

FCC Test Report

FCC ID	:	NKRDAXA-GO1
Equipment	:	802.11ac 3*3 PCle module
Model No.	:	DAXA-GO1
Brand Name	:	WNC
Applicant	:	Wistron NeWeb Corporation
Address	:	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308,Taiwan,R.O.C.
Standard	:	47 CFR FCC Part 15.247
Received Date	:	Feb. 17, 2014
Tested Date	:	Feb. 18 ~ Mar. 03, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION1	0
2.1	Testing Condition1	0
2.2	The Worst Test Modes and Channel Details1	0
3	TRANSMITTER TEST RESULTS 1	1
3.1	Conducted Emissions	1
3.2	6dB and Occupied Bandwidth 1	4
3.3	RF Output Power 1	7
3.4	Power Spectral Density1	9
3.5	Unwanted Emissions into Restricted Frequency Bands2	1
3.6	Unwanted Emissions into Non-Restricted Frequency Bands4	3
4	TEST LABORATORY INFORMATION	3



Release Record

Report No.	Version	Description	Issued Date
FR421702AI	Rev. 01	Initialissue	May 06, 2014



FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.154MHz 46.50 (Margin -9.28dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 11650.00MHz 52.98 (Margin -1.02dB) - AV	Pass
15.247(b)(3)	Fundamental Emission Output Power	Power [dBm]: 11a: 26.41 HT20: 26.36 HT40: 26.47 VHT20: 26.45 VHT40: 26.57 VHT80: 23.40	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Summary of Test Results



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
IEEE Std. 802.11	Frequency Range (MHz)	Ch. Freq. (MHz)	Channel Number	Transmit Chains (Ν _{τx})	Data Rate / MCS		
а	5725-5850	5745-5825	149-165 [5]	3	6-54 Mbps		
n (HT20)	5725-5850	5745-5825	149-165 [5]	3	MCS 0-23		
n (HT40)	5725-5850	5755-5795	151-159 [2]	3	MCS 0-23		
ac (VHT20)	5725-5850	5745-5825	149-165 [5]	3	MCS 0-8		
ac (VHT40)	5725-5850	5755-5795	151-159 [2]	3	MCS 0-9		
ac (VHT80)	5725-5850	5775	155 [1]	3	MCS 0-9		
Note 1: RF output	t power specifies	hat Maximum Co	nducted Output F	Power.			

Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

1.1.2 Antenna Details

Ant.	Model	Туре	Connector	Operating I	Frequencies (N	/IHz) / Antenna	ı Gain (dBi)
No.		1900	0011100101	5150~5250	5250~5350	5470~5725	5725-5850
1	1002299	Printed	UFL	3.88	3.5	4.33	4.2
2	1002300	Printed	UFL	2.62	3.16	2.46	4.02
3	1002301	Printed	UFL	4.16	4.23	3.65	3.43

1.1.3 Power Supply Type of Equipment under Test (EUT)

 Power Supply Type
 3.3Vdc and 4.2Vdc from host

1.1.4 Accessories

N/A



1.1.5 Channel List

	band (MHz)	5725~5850		
802.11 a / H	IT20 / VHT20	HT40 / VHT40		
Channel	Channel Frequency(MHz)		Frequency(MHz)	
149	5745	151	5755	
153	5765	159	5795	
157	157 5785		Г 80	
161	5805	155	5775	
165	5825			

1.1.6 Test Tool and Duty Cycle

Test Tool	ART2-GUI, Ver. 4_9_425				
	Mode	Duty cycle (%)	Duty factor (dB)		
	11a	98.26%	0.08		
Duty Cycle and Duty Factor	VHT20	98.16%	0.08		
	VHT40	96.21%	0.17		
	VHT80	90.94%	0.41		

1.1.7 Power Setting


Modulation Mode	Test Frequency (MHz)	Power Set
11a	5745	22.5
11a	5785	22.5
11a	5825	22
HT20	5745	22.5
HT20	5785	22.5
HT20	5825	22
HT40	5755	21
HT40	5795	23
VHT20	5745	22.5
VHT20	5785	22.5
VHT20	5825	22
VHT40	5755	21
VHT40	5795	23
VHT80	5775	19



1.2 Local Support Equipment List

	Support Equipment List						
No.	No. Equipment Brand Model S/N FCC ID Signal cable / Length (r						
1	Notebook	DELL	E6430		DoC		
2	Fixture	ICC					

1.3 Test Setup Chart

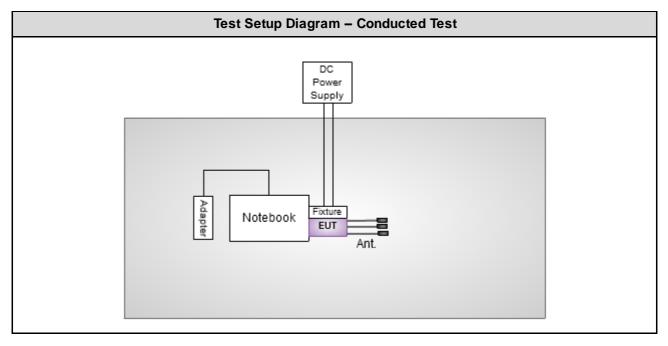



1.4 The Equipment List

Test Item	Conducted Emission							
Test Site	Conduction room 1 / (CO01-WS)						
Instrument	Manufacturer	Manufacturer Model No. Serial No. Calibration Date Calibration Until						
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014			
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014			
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014			
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 24, 2013	Apr. 23, 2014			
50 ohm terminal (Support Unit) NA 50 04 Apr. 22, 2013 Apr. 21, 2014								
Note: Calibration Inter	rval of instruments liste	d above is one year.		-				

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2014	Feb. 16, 2015
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014
Note: Calibration Inter	val of instruments liste	d above is one year.	•	•	

Test Item	Radiated Emission									
Test Site	966 chamber1 / (03CH01-WS)									
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until					
Spectrum Analyzer	R&S	FSV40	101498	Jan. 25, 2014	Jan. 24, 2015					
Receiver	R&S	ESR3	101658	Jan. 10, 2014	Jan. 09, 2015					
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 02, 2014	Jan. 01, 2015					
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 13, 2014	Feb. 12, 2015					
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014					
Preamplifier	Burgeon	BPA-530	SN:100219	Nov. 22, 2013	Nov. 21, 2014					
Preamplifier	Agilent	83017A	MY39501308	Dec. 16, 2013	Dec. 15, 2014					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 16, 2013	Dec. 15, 2014					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 16, 2013	Dec. 15, 2014					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 16, 2013	Dec. 15, 2014					
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 16, 2013	Dec. 15, 2014					
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 16, 2013	Dec. 15, 2014					
DC Power Source	G.W.	GPC-6030D	C671845	Jun. 21, 2013	Jun. 20, 2014					
Note: Calibration Inter	val of instruments listed	d above is one year.								

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov 14, 2014
Preamplifier	EM	EM18G40G	060572	Jun. 20, 2013	Jun. 19, 2014
Note: Calibration Interv	al of instruments listed	d above is two year.			



1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2009 FCC KDB 558074 D01 DTS Meas Guidance v03r01 FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±35.286 Hz
Conducted power	±0.536 dB
Frequency error	±35.286 Hz
Temperature	±0.3 °C
Conducted emission	<u>+</u> 2.946 dB
AC conducted emission	±2.43 dB
Radiated emission	±2.49 dB



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	15°C / 70%	Skys Huang
Radiated Emissions	03CH01-WS	18-20°C / 62-64%	Anderson Hong Haru Yang Brad Wu
RF Conducted	TH01-WS	22°C / 61%	Felix Sung

➢ FCC site registration No.: 657002

➢ IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT40	5795	MCS 0	
Radiated Emissions ≤1GHz	VHT40	5795	MCS 0	
	11a	5745 / 5785 / 5825	6 Mbps	
	HT20	5745 / 5785 / 5825	MCS 0	
RF Output Power	HT40	5755 / 5795	MCS 0	
	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
Radiated Emissions >1GHz	11a	5745 / 5785 / 5825	6 Mbps	
6dB bandwidth	VHT20	5745 / 5785 / 5825	MCS 0	
Power spectral density	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
		prientations placed on the table for sults were found as the worst case		



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

	Conducted Emissions Limit	
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logari	thm of the frequency.	

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.


3.1.3 Test Setup

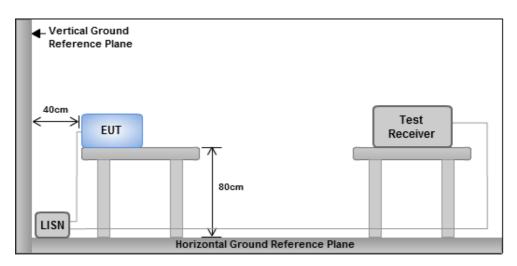

Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



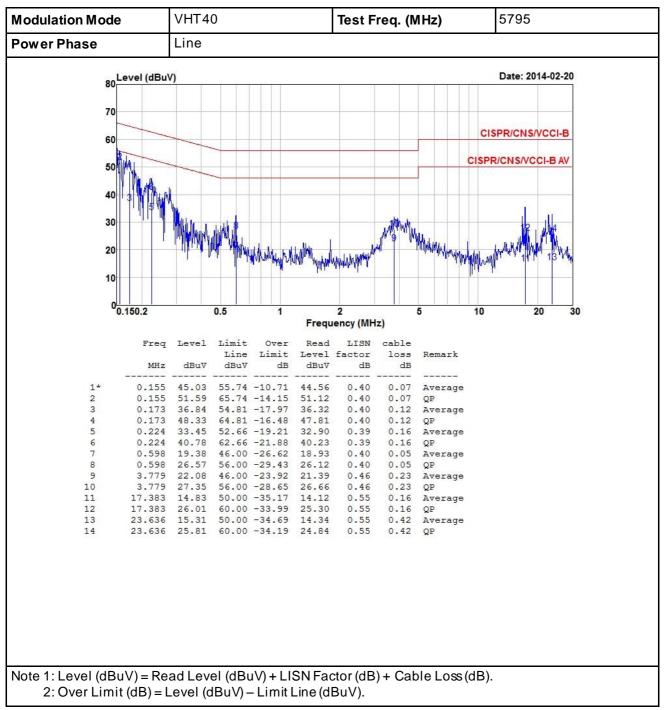

3.1.4 Test Result of Conducted Emissions



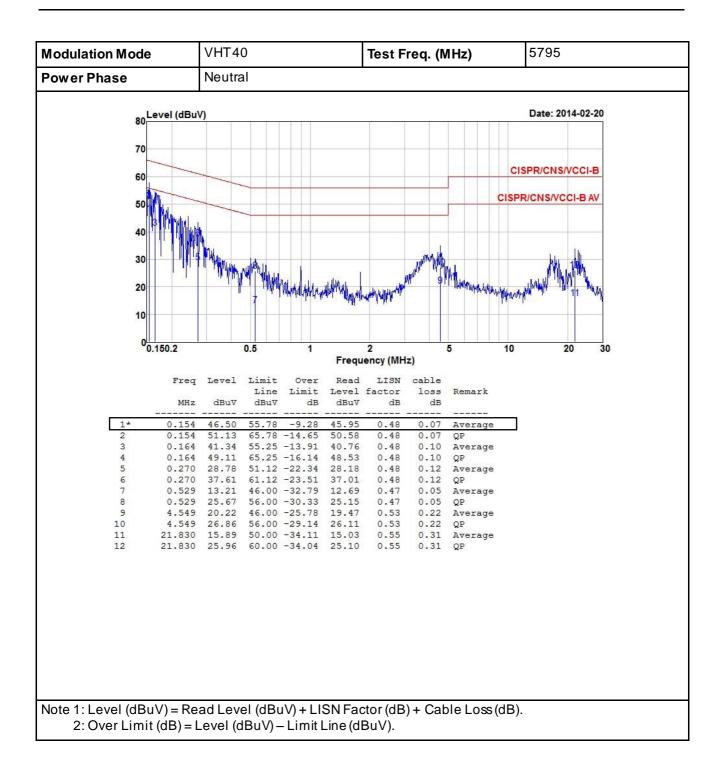



3.2 6dB and Occupied Bandwidth


3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

3.2.3 Test Setup





Modulation	N _{TX}	Freq. (MHz)		Limit (kHz)			
Mode	TX	rieq. (winz)	Chain 0	Chain 1	Chain 2	Chain 3	
11a	3	5745	16.29	16.35	16.41		500
11a	3	5785	16.35	16.06	16.35		500
11a	3	5825	16.29	16.35	16.29		500
VHT20	3	5745	17.28	16.93	17.57		500
VHT20	3	5785	17.22	17.57	17.62		500
VHT20	3	5825	16.41	16.23	17.51		500
VHT40	3	5755	36.29	35.48	35.94		500
VHT40	3	5795	35.48	36.29	35.71		500
VHT80	3	5775	76.06	75.83	76.06		500

3.2.4 Test Result of 6dB and Occupied Bandwidth





Modulation	N			99% Occupied E	Bandwidth (MHz)
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3
11a	3	5745	17.11	16.86	17.73	
11a	3	5785	17.08	16.93	18.05	
11a	3	5825	16.97	16.90	17.58	
VHT20	3	5745	18.20	18.02	18.42	
VHT20	3	5785	18.09	18.09	18.60	
VHT20	3	5825	18.20	18.09	18.49	
VHT40	3	5755	37.05	36.99	36.99	
VHT40	3	5795	36.99	36.92	37.32	
VHT80	3	5775	75.90	75.90	75.77	





3.3 **RF Output Power**

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1 Watt.

- Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.
- □ Antenna gain > 6dBi
 - Non Fixed, point to point operations. The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
 - □ Fixed, point to point operations Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations, no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

- Maximum PeakConducted Output Power
 - □ Spectrum analyzer
 - 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
 - 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
 - 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.


D Power meter

- 1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power

Power meter

1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup





Modulation Mode	N _{TX}	Freq. (MHz)	Conduc		age) outpu Bm)	ıt power	Total Power	Total Power	Limit (dBm)
Wode		(11172)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(ubiii)
11a	3	5745	21.96	20.94	21.85		434.310	26.38	30.00
11a	3	5785	21.73	21.42	21.76		437.580	26.41	30.00
11a	3	5825	21.63	21.23	21.94		434.600	26.38	30.00
HT20	3	5745	21.82	20.81	21.79		423.566	26.27	30.00
HT20	3	5785	21.54	21.32	21.89		432.605	26.36	30.00
HT20	3	5825	21.48	20.62	21.31		391.157	25.92	30.00
HT40	3	5755	20.14	19.24	20.31		294.621	24.69	30.00
HT40	3	5795	21.77	21.26	22.03		443.562	26.47	30.00
VHT20	3	5745	21.89	20.92	21.92		433.717	26.37	30.00
VHT20	3	5785	21.62	21.43	21.96		441.243	26.45	30.00
VHT20	3	5825	21.54	20.75	21.42		400.087	26.02	30.00
VHT40	3	5755	20.25	19.36	20.45		303.141	24.82	30.00
VHT40	3	5795	21.84	21.32	22.19		453.853	26.57	30.00
VHT80	3	5775	18.33	18.32	19.19		218.982	23.40	30.00

3.3.4 Test Result of Maximum Output Power



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- □ Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - 1. Set the RBW = 30kHz, VBW = 100kHz.
 - 2. Detector = Peak, Sweep time = auto couple.
 - 3. Trace mode = max hold, allow trace to fully stabilize.
 - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit. (For 11a / 11ac VHT20)
 - 1. Set the RBW = 30kHz, VBW = 100 kHz.
 - 2. Detector = RMS, Sweep time = auto couple.
 - 3. Employ trace averaging (RMS) mode over a minimum of 100 traces.
 - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit. (For 11ac VHT40 / VHT80)
 - 1 Set the RBW = 30kHz, VBW = 100 kHz.
 - 2 Detector = RMS, Sweep time = auto couple.
 - 3 Manually set the sweep time to: ≥10 x (number of measurement points in sweep) x (total on/off period of the transmitted signal).
 - 4. Perform the measurement over a single sweep.
 - 5. Use the peak marker function to determine the maximum amplitude level.
 - 6. Add 10 log (1/x), where x is the duty cycle

3.4.3 Test Setup






Modulation Mode	N _{TX}	Freq. (MHz)	Total Power Spectral Density (dBm/30kHz)	Limit (dBm/3kHz)
11a	3	5745	1.79	5.34
11a	3	5785	1.42	5.34
11a	3	5825	1.31	5.34
VHT20	3	5745	1.48	5.34
VHT20	3	5785	1.72	5.34
VHT20	3	5825	0.77	5.34
VHT40	3	5755	-2.64	5.34
VHT40	3	5795	-1.46	5.34
VHT80	3	5775	-6.77	5.34

3.4.4 **Test Result of Power Spectral Density**

Note:

1. Test results are bin-by-bin summing measured value of each TX port. 2. Directional gain = $10 * \log((10^{42/20} + 10^{4.02/20} + 10^{3.43/20})^2/3) = 8.66 \text{ dBi} > 6 \text{ dBi}$ Limit shall be reduced to 8 dBm - (8.66 dBi - 6 dBi) = 5.34 dBm

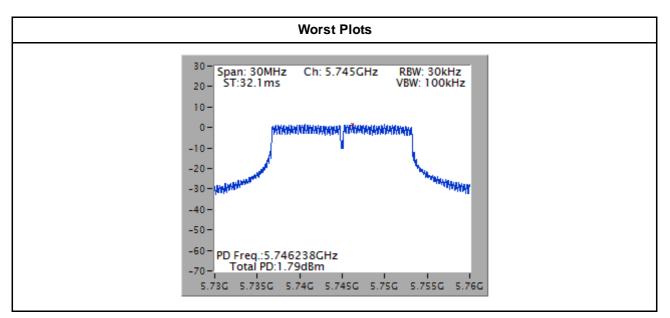



3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit										
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)							
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300							
0.490~1.705	24000/F(kHz)	33.8 - 23	30							
1.705~30.0	30	29	30							
30~88	100	40	3							
88~216	150	43.5	3							
216~960	200	46	3							
Above 960	500	54	3							

Note 1:

Qusai-Peak v alue is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and av erage v alue are measured for frequency above 1GHz. The limit on av erage radio frequency emission is as above table. The limit on peak radio f requency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.



3.5.3 Test Setup

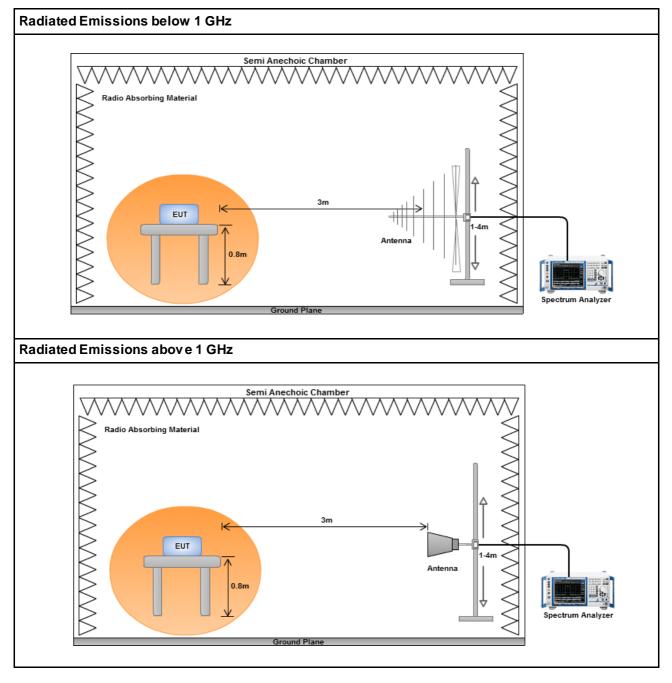



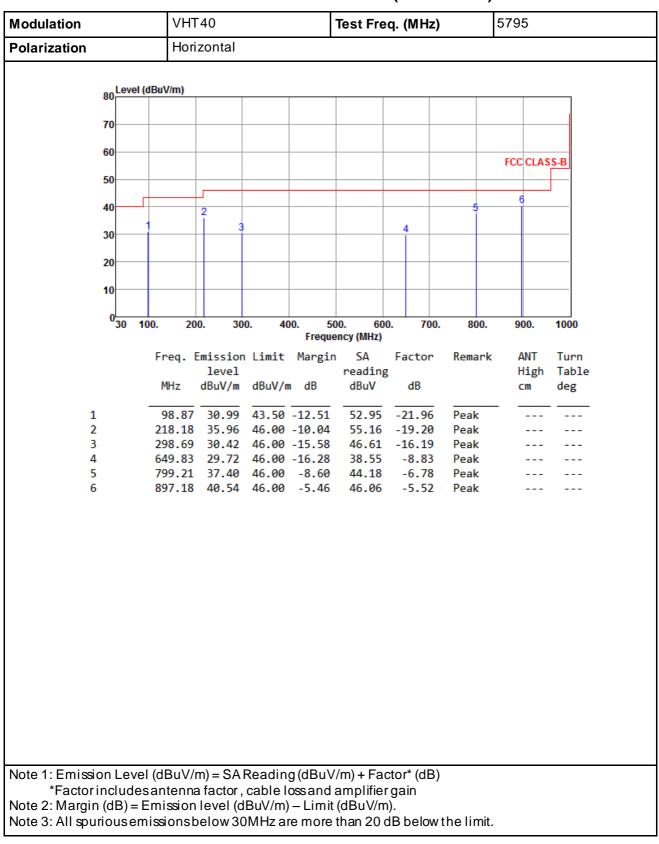


3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)




Modulation		VHT40 Test Freq. (MHz) 5795								
Polarization		Verti	cal							
	evel (dB	uV/m)								
80										
70										
60-										
00									FCC CLAS	S-B
50										
40			_2		4				6	
	1		Ī				Ĩ			
30										
20										
10-										
03	0 100.	20	0. 30	0. 40	00. 50	0. 60	0. 700	. 800.	900.	1000
_						ncy (MHz)				
	F	Freq. E		n Limit	Margin		Factor	Remark		Turn
		MHz	level dBuV/m	dBuV/r	a dB	reading dBuV	g dB		High cm	Table deg
		MAZ	ubuv/m	ubuv/i	u ub	ubuv	ub		CIII	ueg
1			33.32				-21.06	Peak		
2			37.82			55.89		Peak		
3					-10.04 -6.52	52.15 51.06	-16.19 -11.58	Peak Peak		
5			36.67			44.92		Peak		
6	8	397.18	38.50	46.00	-7.50	44.02	-5.52	Peak		
Noto 1: Emission I		4D\//-	n) 6 ^ I	Doodin		(m) + 5 c c	tor* (dD)			
Note 1: Emission L Factorincl*										
Note 2: Margin (dE	8) = Em	nission	level (d	BuV/m)	– Limit	(dBuV/m	ı).			
								the limit.		



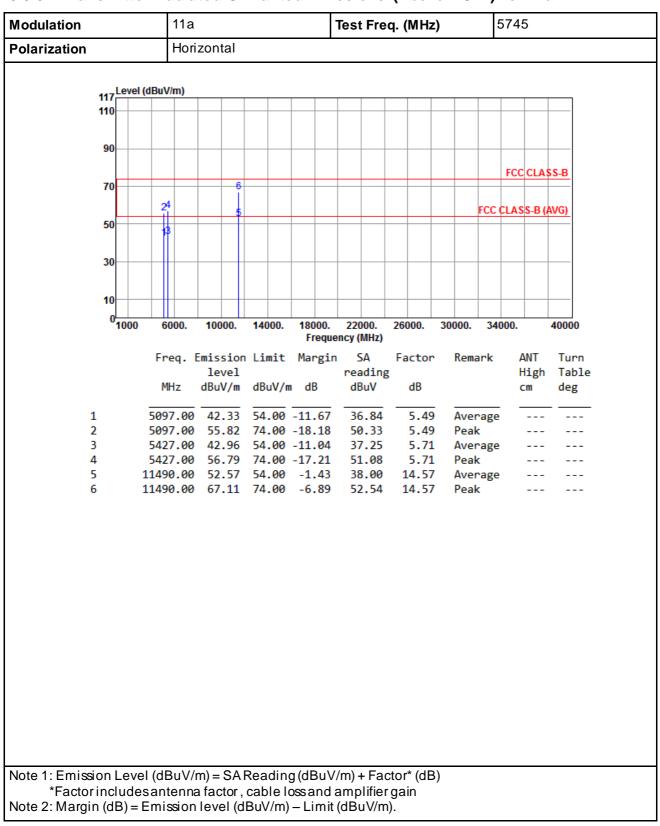


3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a




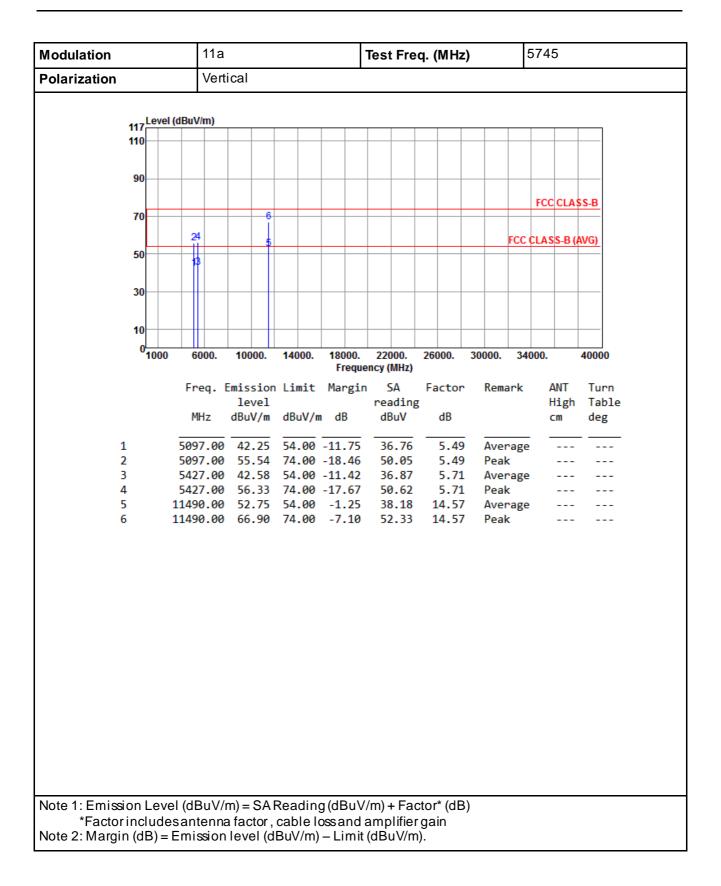




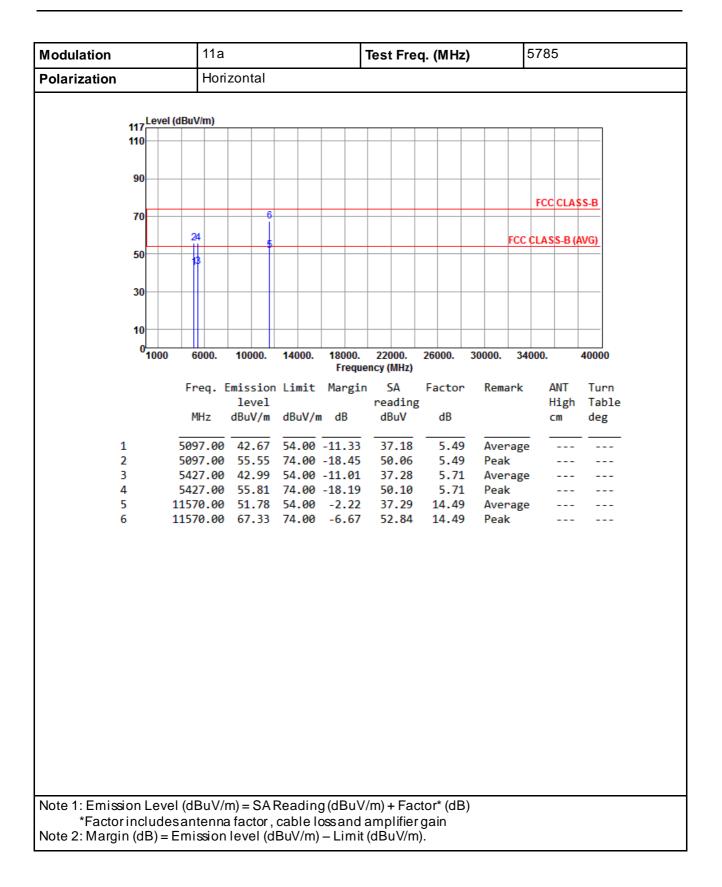




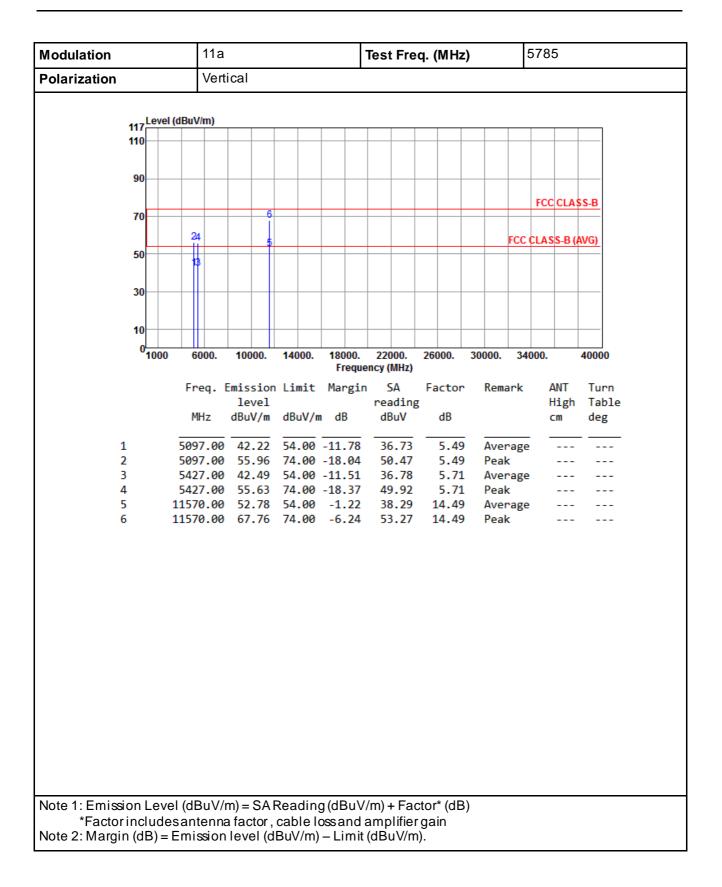




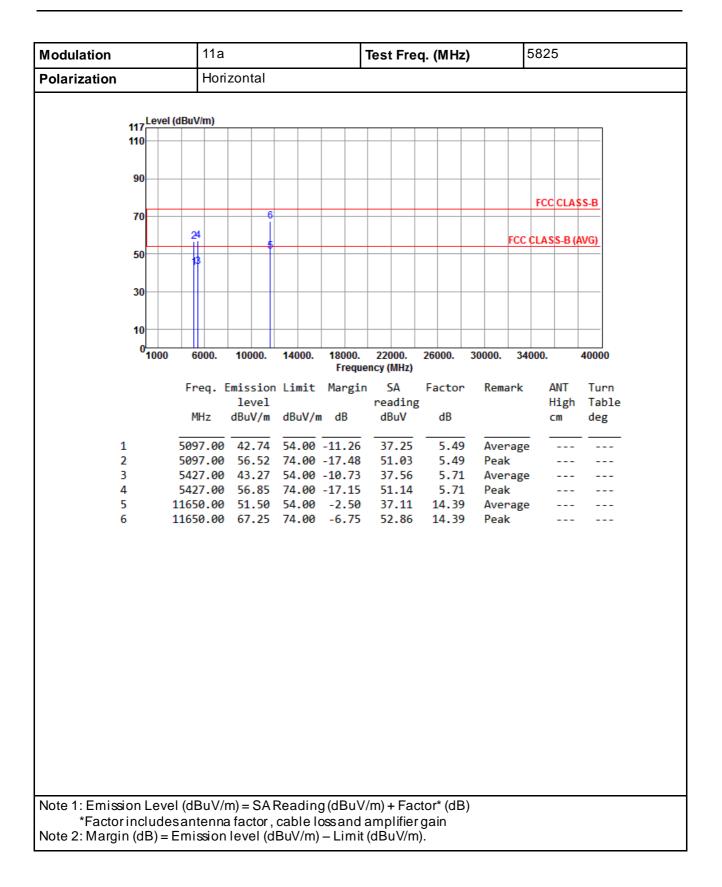



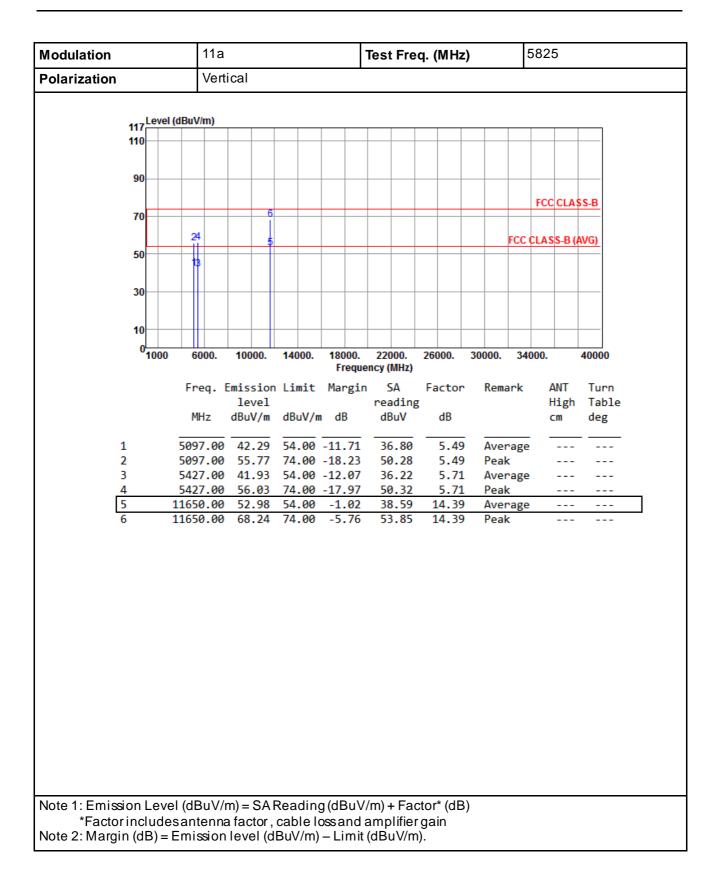




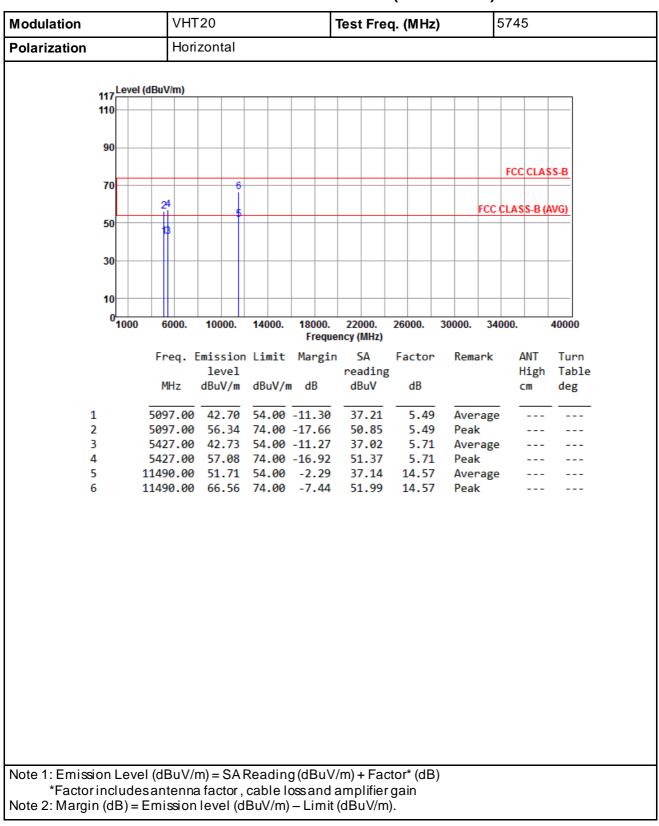


3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20




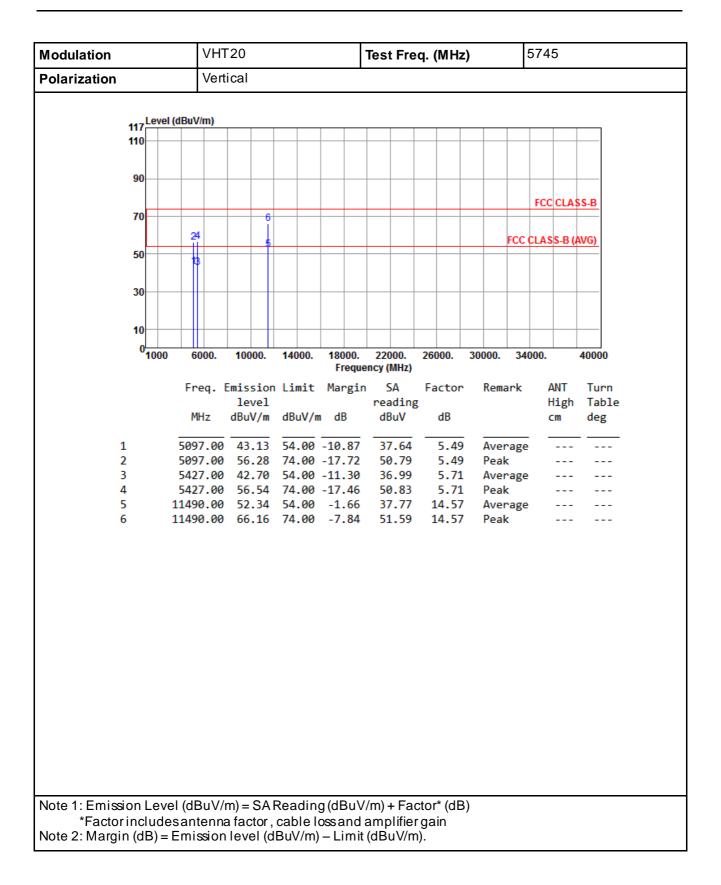




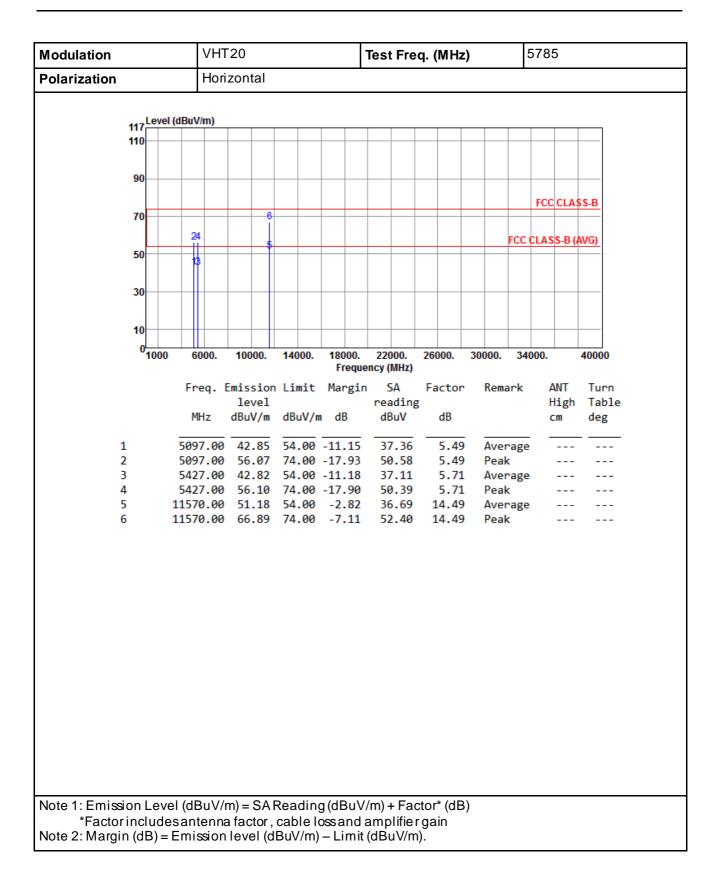




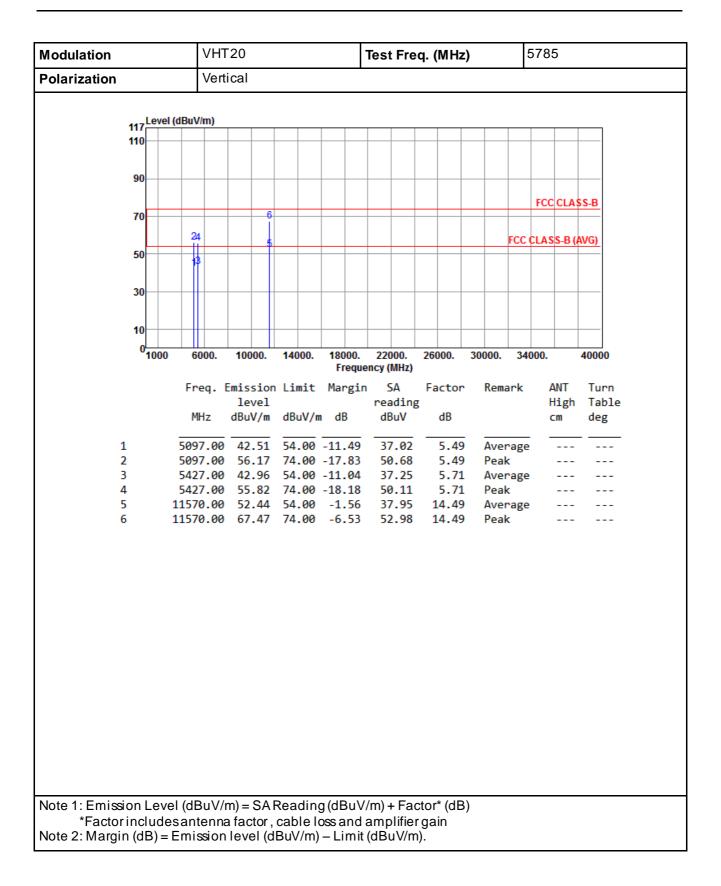



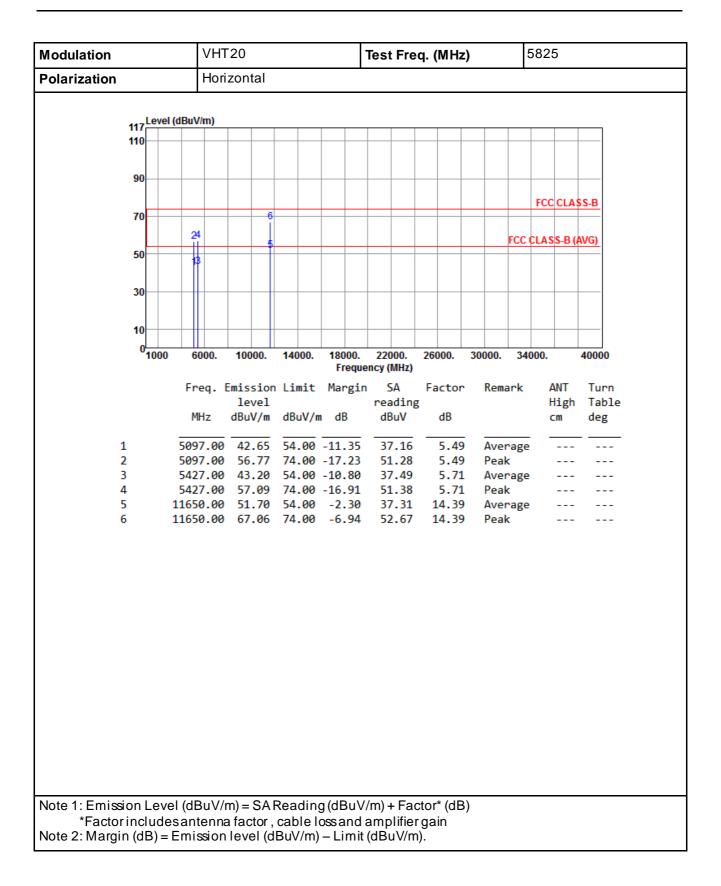



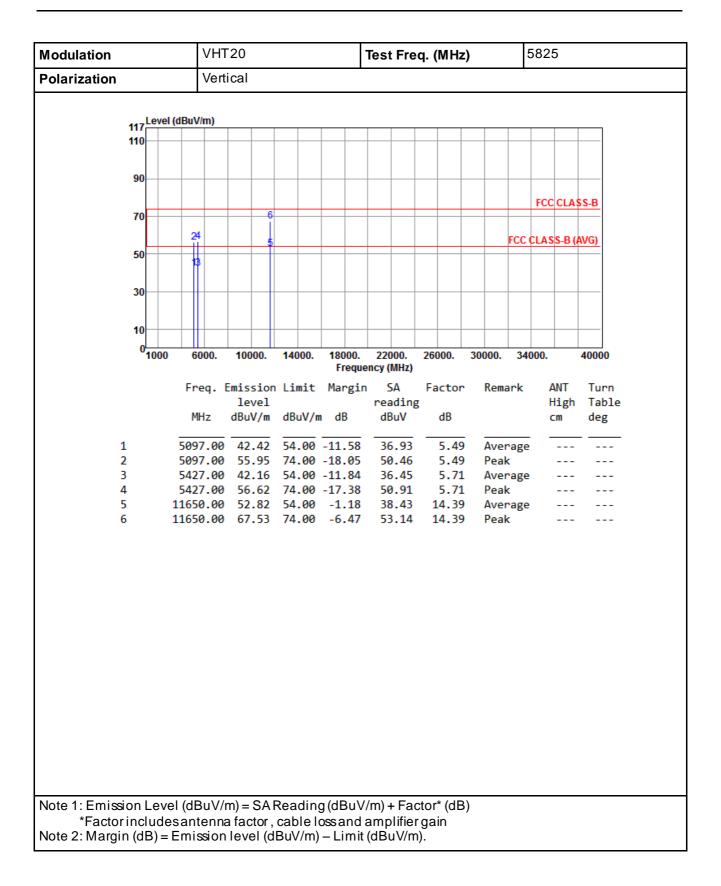





Modulation Polarization		VH	VHT40 Test Freq. (MHz) 5755								
		Ног	Horizontal								
	117	el (dBuV/m)									
	110										
	90										
	70							_	F	CC CLAS	SS-B
	/0		6								
		24						F	CC CL	ASS-B (/	AVG)
	50	13									
	30										
	10							_			
	0 <mark></mark>	0 000	40000	4 4000	40000	22000	0000	20000	2400		40000
	100	0 6000.	10000.	14000.	18000. Freque	22000. ncy (MHz)	26000.	30000.	3400	υ.	40000
		Freq.	Emission	Limit	Margin		Factor	Remar	rk	ANT	Turn
			level			reading				High	
		MHz	dBuV/m	dBuV/n	ı dB	dBuV	dB			cm	deg
	1	5097.00	42.33	54.00	-11.67	36.84	5.49	Avera	age		
	2	5097.00			-17.79	50.72	5.49				
	3	5427.00			-12.05	36.24	5.71	Avera	_		
	4	5427.00			-16.62	51.67	5.71	Peak			
	5 6		48.37 61.50			33.82 46.95	14.55 14.55	Avera Peak	_		
	0	11510.00	01.50	/4.00	-12.50	40.00	14.55	Teak			
ote 1: Emis	sion Lev	vel (dBuV	/m) = SA I	Readin	g(dBuV/	′m) + Fac	tor* (dB)				
		esantenr									
ote 2: Marg											
0			•	,		,					

3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40




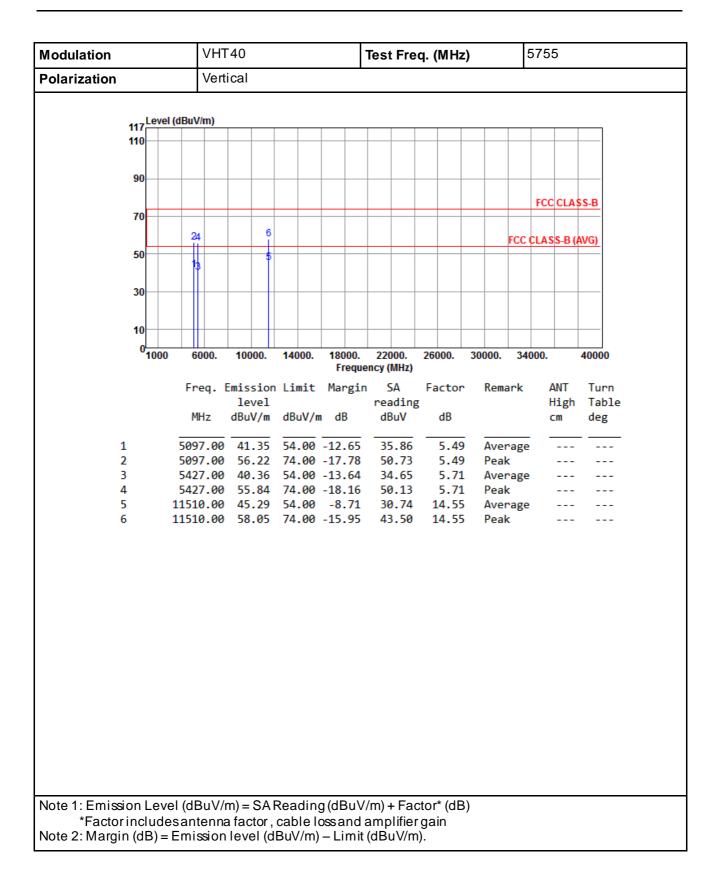




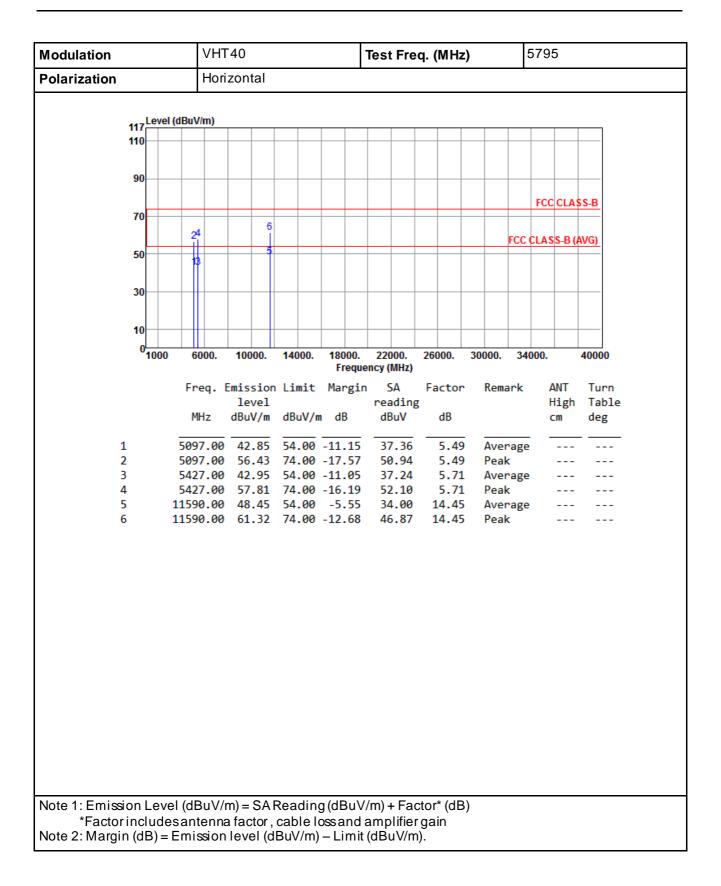



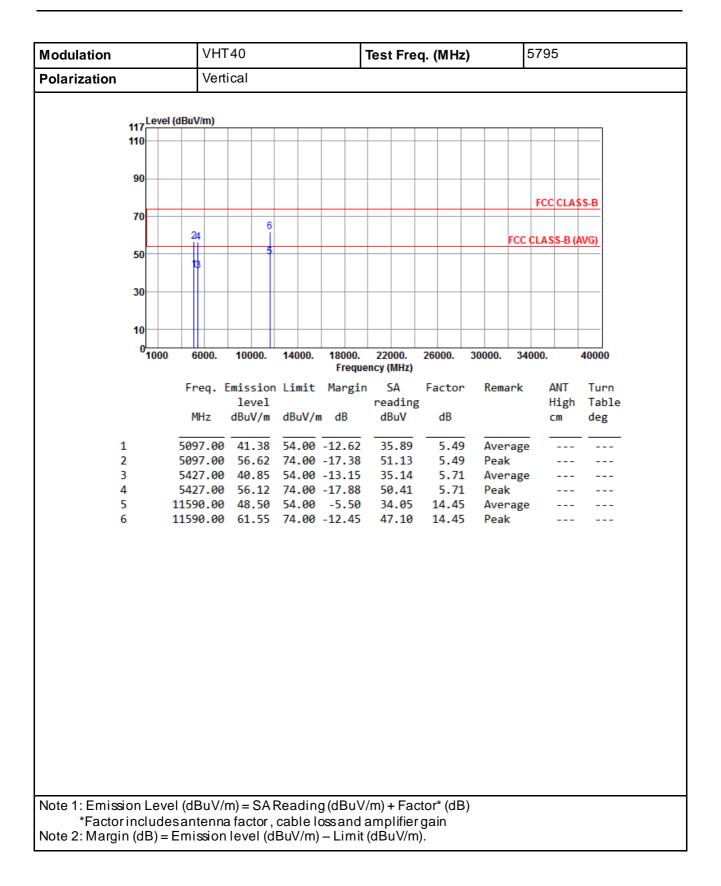




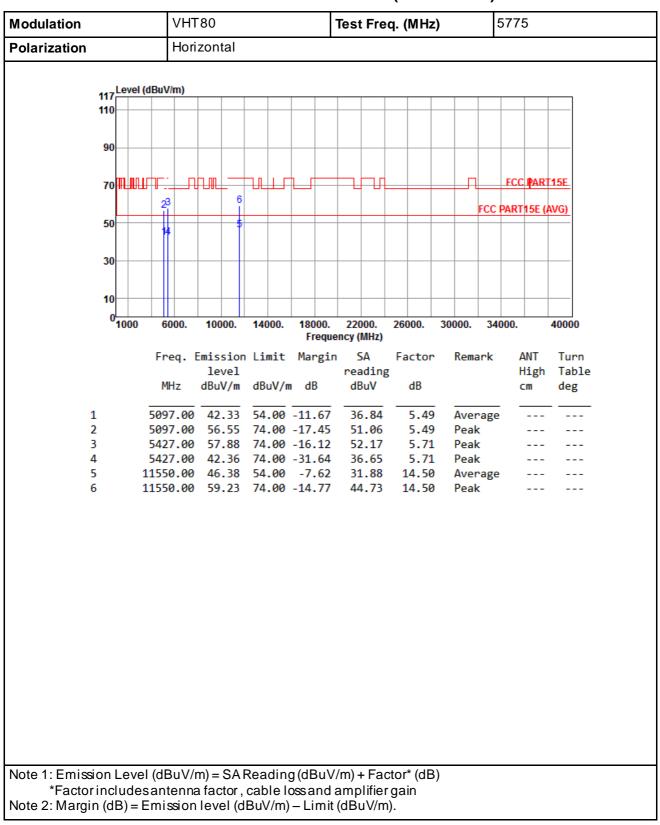

3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80



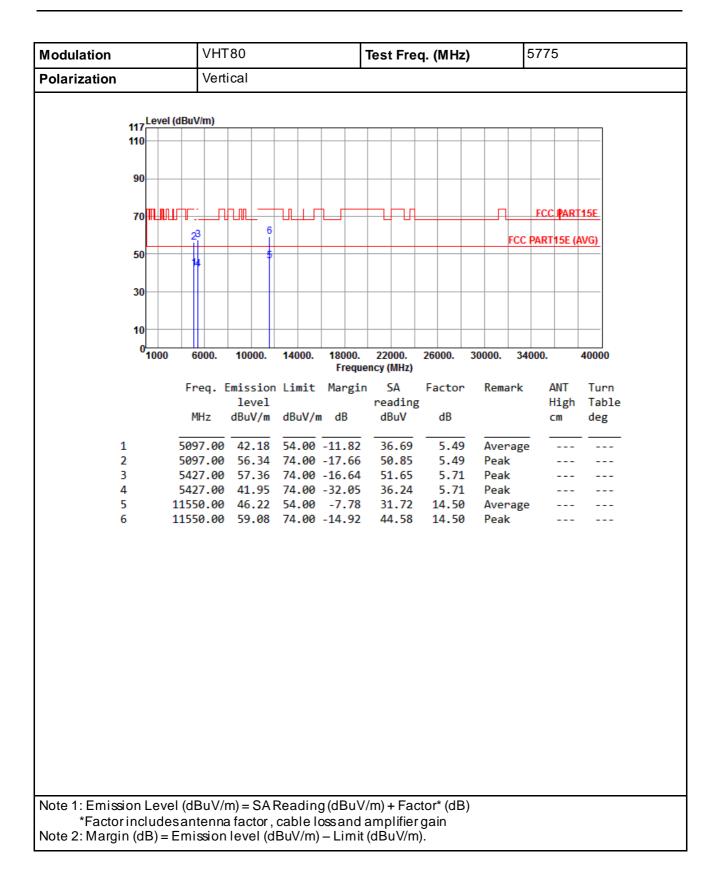



3.6 Unwanted Emissions into Non-Restricted Frequency Bands

3.6.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peakpower in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference Level Measurement

- 1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Set Sweep time = auto couple, Trace mode = max hold.
- 3. Allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement

- 1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Trace Mode = max hold, Sweep = auto couple.
- 3. Allow the trace to stabilize.
- 4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

3.6.3 Test Setup




3.6.4 Test Result of Emissions in non-restricted frequency bands


This test item is performed on each TX output individually without summing or adding 10 log(N_{ANT}) since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.




802.11a

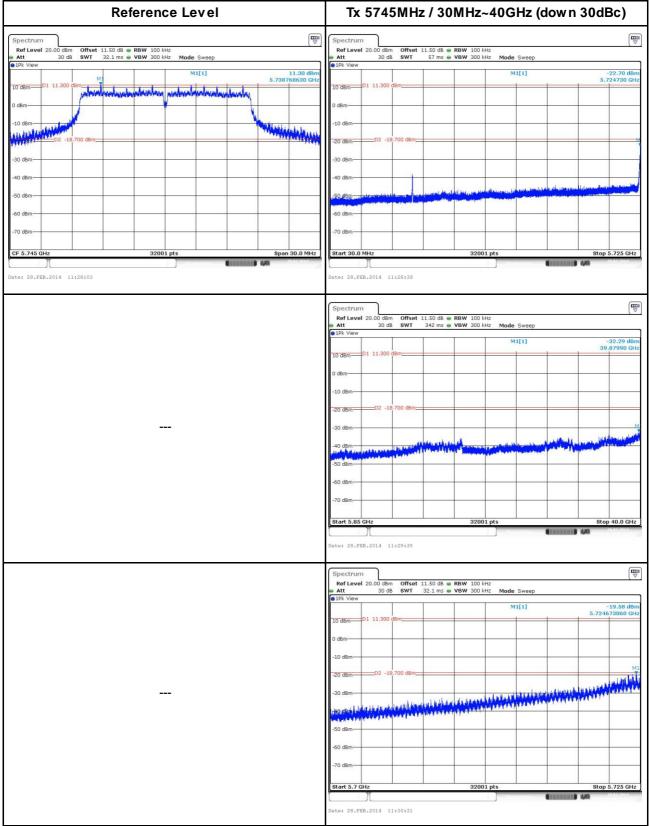



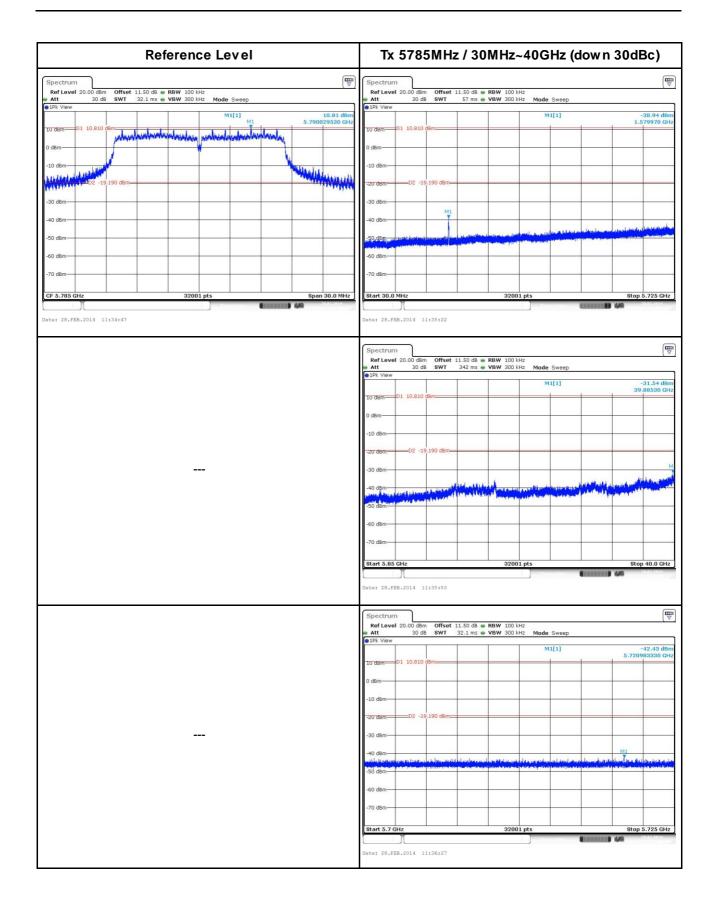




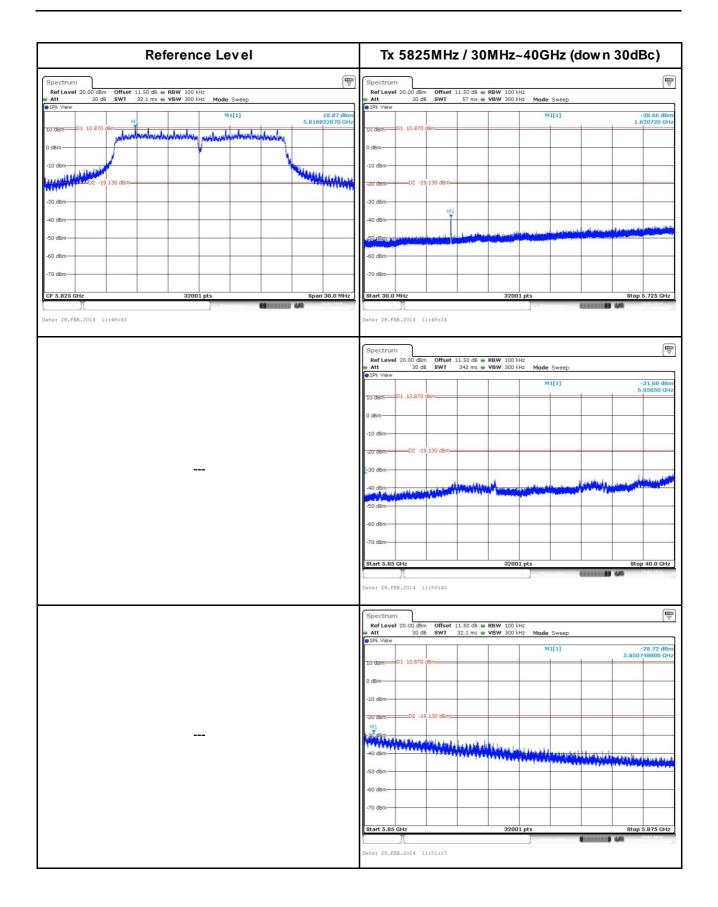





802.11n VHT20

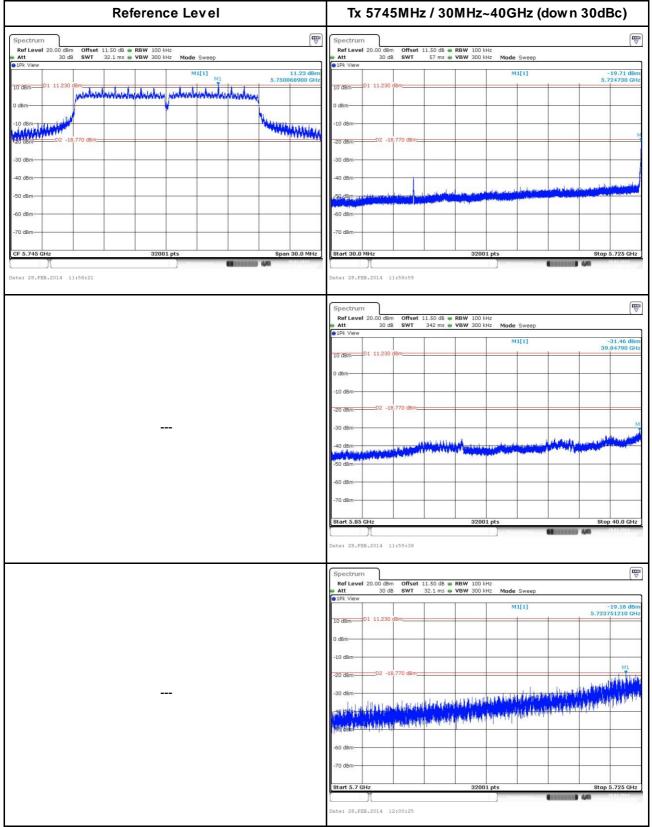



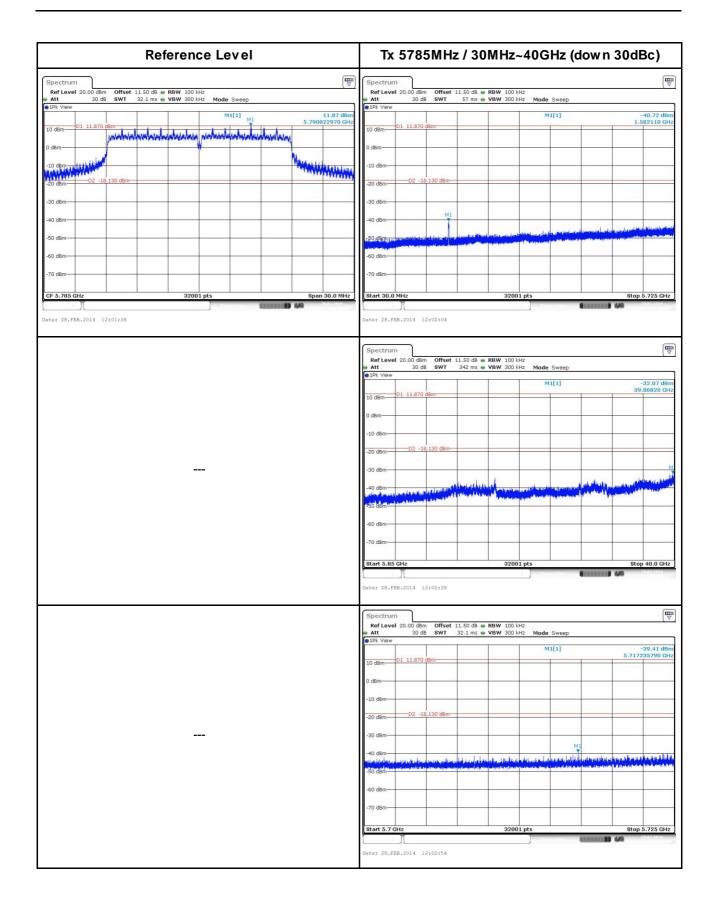




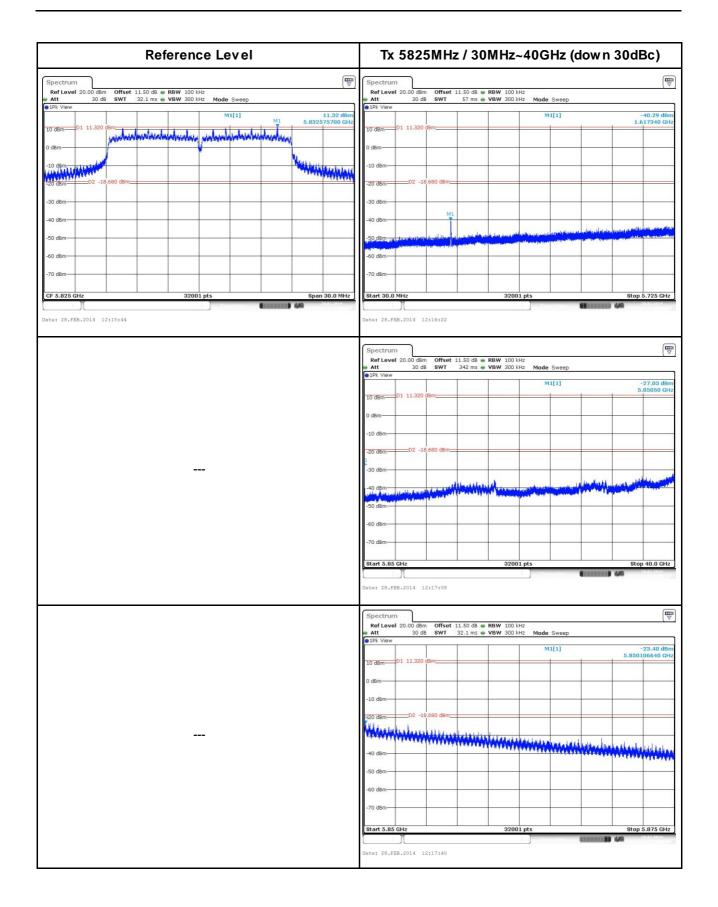




802.11n VHT40

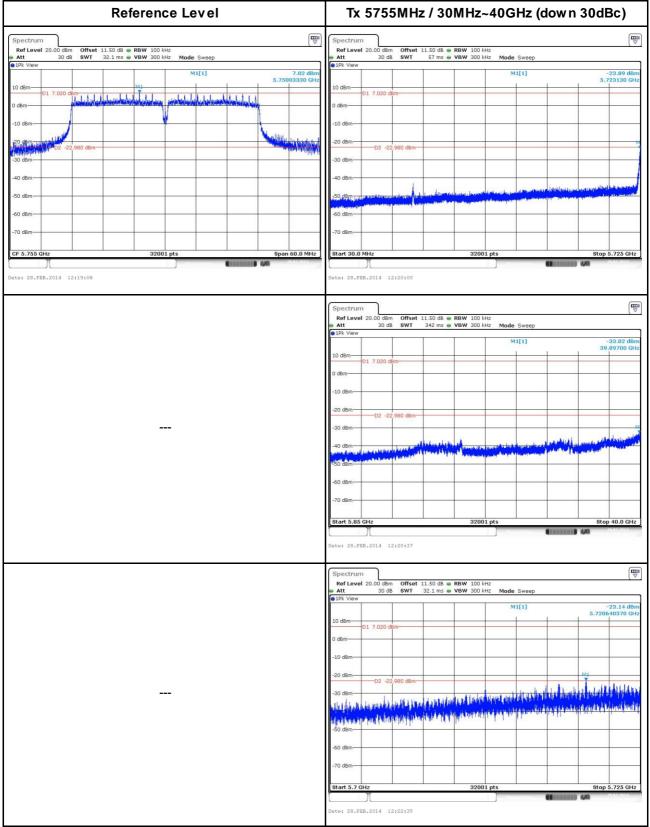




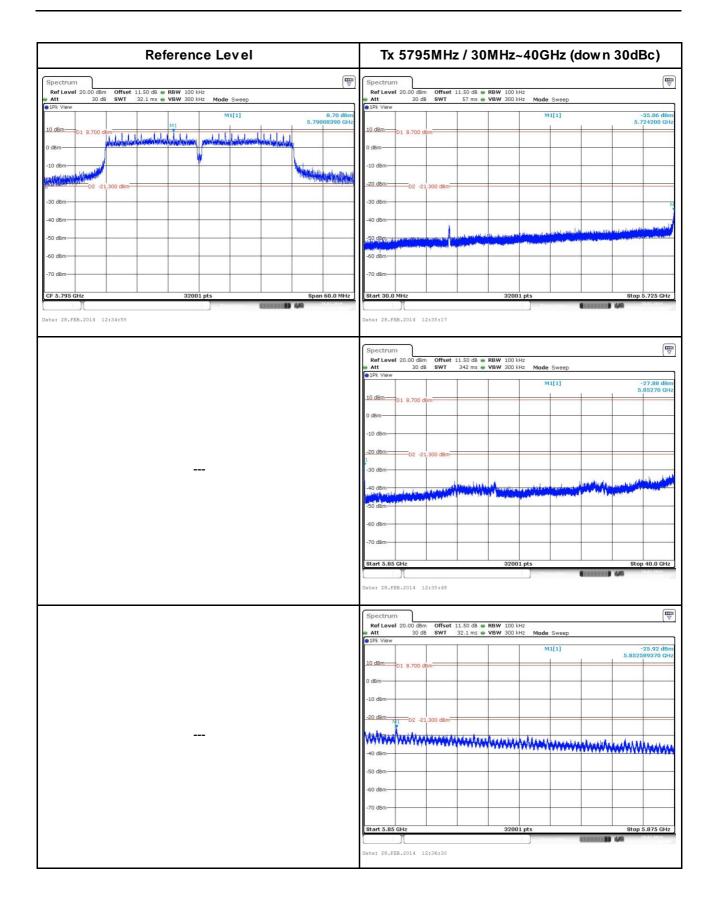



802.11n VHT80

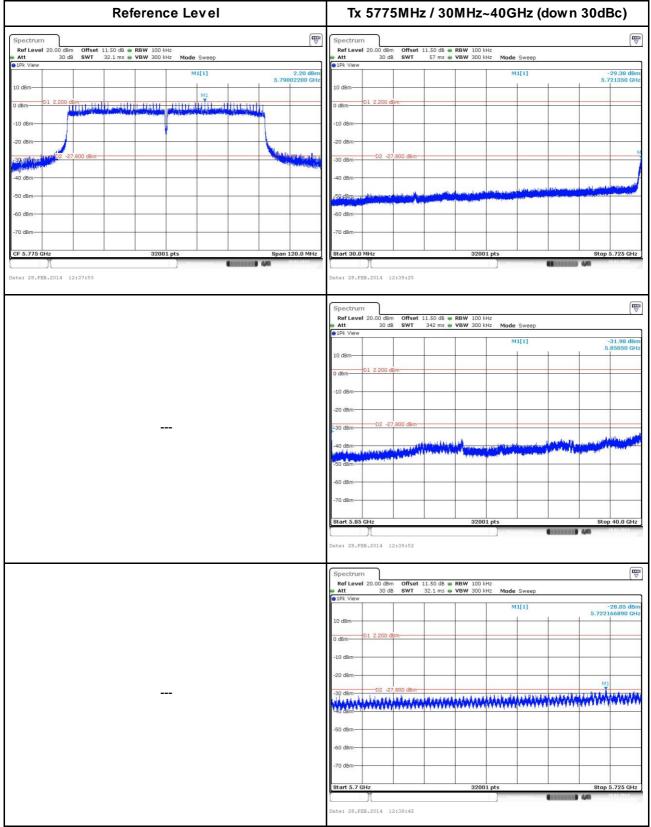



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our dients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our dients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <u>http://www.icertifi.com.tw</u>.

Linkou Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C. Kwei Shan Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155 Email: ICC_Service@icertifi.com.tw

==END===