

PARTIAL

Test Report 19-1-0097801T09a-C1



Deutsche
Akkreditierungsstelle
D-PL-12047-01-01
D-PL-12047-01-03
D-PL-12047-01-04

Number of pages:	18	Date of Report:	2020-May-14
Testing company:	CETECOM GmbH Im Teelbruch 116 45219 Essen Germany Tel. + 49 (0) 20 54 / 95 19-0 Fax: + 49 (0) 20 54 / 95 19-150	Applicant:	Robert Bosch GmbH
Test Object / Tested Device(s):	BUI350		
Listing FCC ID:	2AUXS-NYON350	ISED:	25847-NYON350
Testing has been carried out in accordance with:	<p>Title 47 CFR, Chapter I FCC Regulations, Subchapter A Subpart C: §15.247 (DTS)</p> <p>RSS-247, Issue 2 (DTS) RSS-Gen., Issue 5</p> <p>Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".</p>		
Tested Technology:	Simultaneous Transmission 2.4 GHz W-LAN (IEEE 802.11) and Bluetooth Low Energy		
Test Results:	<p><input checked="" type="checkbox"/> The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document</p> <p>The current version of the Test Report CETECOM_TR19-1-0097801T09a_C1 replaces the the test report CETECOM_TR19-1-0097801T09a dated 2020-05-13. The replaced test report is herewith invalid.</p>		
Signatures:	<div></div> <div>Dipl.-Ing. N. Perez Deputy Lab Manager</div> <div>B.Sc. M. Ahmed Responsible for test report</div>		

Table of Contents

1	General information	3
1.1	Disclaimer and Notes.....	3
1.1.	Summary of Test Results	4
1.2.	Summary of Test Methods	4
2	Administrative Data	5
2.1	Identification of the Testing Laboratory	5
2.2	General limits for environmental conditions.....	5
2.3	Test Laboratories sub-contracted.....	5
2.4	Organizational Items	5
2.5	Applicant's details	5
2.6	Manufacturer's details	5
2.7	EUT: Type, S/N etc. and short descriptions used in this test report	6
2.8	Auxiliary Equipment (AE): Type, S/N etc. and short descriptions.....	6
2.9	Connected cables	6
2.10	EUT set-ups	6
2.11	EUT operation modes.....	6
3	Equipment under test (EUT)	7
3.1	General Data of Main EUT as Declared by Applicant.....	7
3.2	Detailed Technical data of Main EUT as Declared by Applicant	8
4	Measurements.....	10
4.1	Radiated field strength emissions 30MHz – 1GHz	10
4.2	Radiated field strength emissions above 1GHz	12
4.3	Results from external laboratory.....	14
4.4	Opinions and interpretations	14
5	Equipment lists	14
6	Measurement Uncertainty valid for conducted/radiated measurements	17
7	Versions of test reports (change history)	18

Table of Annex			
Annex No.	Contents	Reference Description	Total Pages
Annex 1	Test result diagrams	CETECOM_TR19_1_0097801T09a_A1	6
Annex 2	External photographs of EUT	CETECOM_TR19_1_0097801T03a_A2	3
Annex 3	Internal photographs of EUT	CETECOM_TR19_1_0097801T03a_A3	6
Annex 4	Test set-up photographs	CETECOM_TR19_1_0097801T09a_A4	4
The listed attachments are separate documents.			

1 General information

1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2.7. CETECOM does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM.

The testing service provided by CETECOM has been rendered under the current "General Terms and Conditions for CETECOM". CETECOM will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM test report include or imply any product or service warranties from CETECOM, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM.

All rights and remedies regarding vendor's products and services for which CETECOM has prepared this test report shall be provided by the party offering such products or services and not by CETECOM.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at CETECOM.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

1.1. Summary of Test Results

The EUT integrates a 2.4GHz WLAN transmitter and Bluetooth LE transmitter. Other implemented wireless technologies were not considered in this report.

Test case	Reference Clause FCC	Reference Clause ISD	Page	Remark	Result
Duty-Cycle	§15.35(c)	RSS-Gen Issue 5, §8.2	--	--	NP
Minimum Emission Bandwidth 6 dB	§15.247 5.2(a)	RSS-247, § 5.2(a) RSS-Gen Issue 5, § 6.7	--	--	NP
Occupied Channel Bandwidth 99%	2.1049(h)	RSS-Gen Issue 5, § 6.7	--	--	NP
RF output power	§15.247(b)(3)	RSS-247, § 5.4(d)	--	--	NP
Transmitter Peak output power radiated	§15.247(b)(4)(c)(i)	RSS-247, § 5.4(d)	--	--	NP
Emissions in non-restricted frequency bands	§15.247(d)	RSS-247, § 5.5	--	--	NP
Radiated Band-Edge emissions	§15.205(b) §15.247(d)	RSS-Gen: Issue 5 §8.9, §8.10 RSS-247, § 5.5	--	--	NP
Power spectral density	§15.247(e)	RSS-247, § 5.2(b)	--	--	NP
Radiated field strength emissions below 30MHz	§15.205(a) §15.209(a)	RSS-Gen: Issue 5 §8.9 Table 6	--	--	NP
Radiated field strength emissions 30MHz – 1GHz	§15.209 §15.247(d)	RSS-Gen: Issue 5 §8.9 Table 5 RSS-247, § 5.5	11	--	PASSED
Radiated field strength emissions above 1GHz	§15.209(a) §15.247(d)	RSS-Gen: Issue 5: §8.9 Table 5+7 RSS-247, § 5.5	13	--	PASSED
AC-Power Lines Conducted Emissions	§15.207	RSS-Gen Issue 5: § 8.8, Table 4	--	--	NP

Remarks:

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the CETECOM Laboratory.

1.2. Summary of Test Methods

Test case	Test method
Duty-Cycle	ANSI 63.10:2013, §11.6(b)
Minimum Emission Bandwidth 6 dB	ANSI C63.10:2013, §6.9.2, §11.8
Occupied Channel Bandwidth 99%	ANSI C63.10:2013, §6.9.3
RF output power	ANSI C63.10:2013, §11.9
Power spectral density	ANSI C63.10:2013, §11.10
Emissions in non-restricted frequency bands	ANSI C63.10:2013, §11.11, §6.10.5
Radiated Band-Edge emissions	ANSI C63.10-2013; "Marker-Delta method", §6.10.5, §11.13
Transmitter Peak output power radiated	Result calculated with measured conducted RF-power value and stated/measured antenna gain for band of interest
Radiated field strength emissions below 30MHz	ANSI C63.10-2013 §6.3, §6.4
Radiated field strength emissions 30MHz- 1GHz	ANSI C63.4-2014 §8.2.3, ANSI C63.10-2013 §6.3, § 6.5
Radiated field strength emissions above 1GHz	ANSI C63.4-2014 §8.3, ANSI C63.10-2013 §6.3, § 6.6
AC-Power Lines Conducted Emissions	ANSI C63.4-2014 §7, ANSI C63.10-2013 § 6.2

And reference also to Test methods in KDB558074v05r02

2 Administrative Data

2.1 Identification of the Testing Laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Mr. Volker Wittmann
Accreditation scope:	DAkkS Webpage
Test location:	CETECOM GmbH; Im Teelbruch 116 ;45219 Essen - Kettwig

2.2 General limits for environmental conditions

Temperature:	22±2° C
Relative. humidity:	45±15% rH

2.3 Test Laboratories sub-contracted

Company name:

2.4 Organizational Items

Order No.:	19-1-00978
Responsible for test report and	
Project leader:	Mr.Mohamed Ahmed
Receipt of EUT:	16.09.2019
Date(s) of test:	2020-Mrz-19 – 2020-Mrz-23
Version of template:	13.02

2.5 Applicant's details

Applicant's name:	Robert Bosch GmbH Robert-Bosch-Platz 1
Address:	70839 Gerlingen-Schillerhöhe Baden-Württemberg Germany
Contact Person:	Mr. Uwe Feuchter (CM-CI2/EEB) <uwe.feuchter@de.bosch.com>

2.6 Manufacturer's details

Manufacturer's name:	Robert Bosch GmbH
Address:	Robert-Bosch-Platz 1 70839 Gerlingen Germany

2.7 EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	PMT Sample No.	EUT	Type	S/N	HW status	SW status
EUT A	Sample 01 of 19-1-02039	BUI350	E-Bike computer with Navigation (Radiated)	4	0.8.2.0	0.197.5.0

*) EUT short description is used to simplify the identification of the EUT in this test report.

2.8 Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	Micro USB-cable	Type B cable	--	--	--
AE 2	DELL Laptop	Latitude E6420	VVF52 A01	Intel Core i5	Windows 7
AE 3	Smartphone	SAMSUNG SM-G930F	R58J74JTHYF	--	Android 7.0
AE 4	19-1-00978S14	E-Bike Holder with Power supply connection	BUI135	--	--

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

2.9 Connected cables

Cable short description *)	Cable type	Connectors	Length
CAB 1	Micro USB-cable	Type B cable	1 m

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

2.10 EUT set-ups

set-up no. *)	Combination of EUT and AE	Description
set. 1	EUTA + AE1 + AE2 + AE3 + AE 4	Used for radiated measurements. AE1 + AE2 only used for configuration and was removed during measurement. AE3 was placed outside of the measurement volume.

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

2.11 EUT operation modes

EUT operating mode no. *)	Operating modes	Additional information
op. 1	WLAN_TX-Mode + BLE TX Mode	EUT WiFi was connected to a Access Point. From a laptop also connected to the same WiFi network iperf throughput measurement was continuously done during test. At the same time BLE was connected to a mobile phone. With help of a app "nRF Connect" RSSI was continuously read out from the EUT.

*) EUT operating mode no. is used to simplify the test report.

3 Equipment under test (EUT)

3.1 General Data of Main EUT as Declared by Applicant

Product name	BUI350		
Kind of product	E-Bike computer with Navigation		
Firmware	<input type="checkbox"/> for normal use	<input checked="" type="checkbox"/> Special version for test execution	
Power supply	<input type="checkbox"/> AC Mains	-	
	<input checked="" type="checkbox"/> DC Mains	12 V DC via AE 4	
	<input checked="" type="checkbox"/> Battery	Lithium Ion battery	
Operational conditions	T _{nom} = 22 °C	T _{min} = -10 °C	T _{max} = 50 °C
EUT sample type	Pre-Production		
Weight	Pleas see applicants documents for details		
Size	8 cm / 11 cm(width/length)		
Interfaces/Ports	Micro USB, CAN (via AE 4)		
For further details refer Applicants Declaration & following technical documents			
Description of Reference Document (supplied by applicant)	Version	Total Pages	
Technical Passport eBike BUI350	--	10	
For further details regarding radio parameters, please refer to IEEE802.11 Specification			

3.2 Detailed Technical data of Main EUT as Declared by Applicant

3.2.1 WLAN

Frequency Band	2.4 GHz ISM Band (2400 MHz - 2483.5 MHz)		
Frequency Channel B.W. (USA bands only)	<input checked="" type="checkbox"/> WLAN 2.4 GHz 802.11b g n (SISO)	Ch 1 2 3 4 5 6 7 Ch. 8 9 10 11	Bandwidth 20 MHz
	<input type="checkbox"/> WLAN 2.4 GHz 802.11n (SISO)	Ch 3 4 5 6 7 8 9 10 11	Bandwidth 40 MHz
802.11b – Mode OFDM Modulation Data Rates	<input checked="" type="checkbox"/> DBPSK 1 Mbps <input checked="" type="checkbox"/> DQPSK 2 Mbps <input checked="" type="checkbox"/> CCK-PBCC 5.5 Mbps / 11 Mbps <input type="checkbox"/> ERP-PBCC 22 Mbps		
802.11g – Mode OFDM Modulation Data Rates	<input checked="" type="checkbox"/> BPSK 6 Mbps / 9 Mbps <input checked="" type="checkbox"/> QPSK 12 Mbps / 18 Mbps <input checked="" type="checkbox"/> 16-QAM 24 Mbps / 36 Mbps <input checked="" type="checkbox"/> 64-QAM 48 Mbps / 54 Mbps		
802.11n – Mode OFDM Modulation Data Rates	<input checked="" type="checkbox"/> HT20(MCS0 to MCS7) 7.2 / 14.4 / 21.7 / 28.9 / 43.3 / 57.8 / 65 / 72.2 Mbps		
Other wireless options	<input type="checkbox"/> a/n/ac mode <input checked="" type="checkbox"/> Bluetooth LE <input type="checkbox"/> Bluetooth EDR (not tested within this report) <input checked="" type="checkbox"/> GNSS, not tested in this report)		
Max. Conducted Output Power	b-mode: 18.9 dBm g-mode: 20.3 dBm n-mode(20MHz): 21.1 dBm		
EIRP WLAN (Calculated EIRP)	b-mode: 18.9 dBm - 1.3 dBi = 17.6 dBm g-mode: 20.3 dBm - 1.3 dBi = 19 dBm n-mode(20MHz): 21.1 dBm - 1.3 dBi = 19.8 dBm		
Antenna Type(s)	PCB		
Antenna Gain(s)	-1.3 dBi		
FCC label attached	No		
Test firmware / software and storage location	Script saved on EUTA / Putty stored in AE2		
For further details refer Applicants Declaration & following technical documents			
Description of Reference Document (supplied by applicant)		Version	Total Pages
LBEE5KL1DX-977_JEBMM0-1454A_2018-05-15		15. May 2018	42
Technical Passport eBike BUI350		--	10

3.2.2 BLE

Frequency Band	2.4 GHz ISM Band (2400 MHz - 2483.5 MHz)		
Number of Channels (USA/Canada -bands)	40 (37 Hopping + 3 Advertising)		
Nominal Channel Bandwidth	2 MHz		
Type of Modulation Data Rate	<input checked="" type="checkbox"/> GFSK 1 Mbit / s	<input type="checkbox"/> GFSK 2 Mbit / s	
	<input type="checkbox"/> GFSK 500 kbit / s	<input type="checkbox"/> GFSK 125 kbit / s	
Other wireless options	<input type="checkbox"/> a/n/ac mode		
	<input checked="" type="checkbox"/> b/g/n mode		
	<input type="checkbox"/> Bluetooth EDR (not tested within this report)		
	<input checked="" type="checkbox"/> GNSS, not tested in this report)		
Max. Conducted Output Power	8.3 dBm		
Antenna Type(s)	PCB		
Antenna Gain(s)	-1.3 dBi		
FCC label attached	No		
Test firmware / software and storage location	Script saved on EUTA / Putty stored in AE2		
For further details refer Applicants Declaration & following technical documents			
Description of Reference Document (supplied by applicant)		Version	Total Pages
LBEE5KL1DX-977_JEBMM0-1454A_2018-05-15		15. May 2018	42
Technical Passport eBike BUI350		--	10


4 Measurements

4.1 Radiated field strength emissions 30MHz – 1GHz

4.1.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

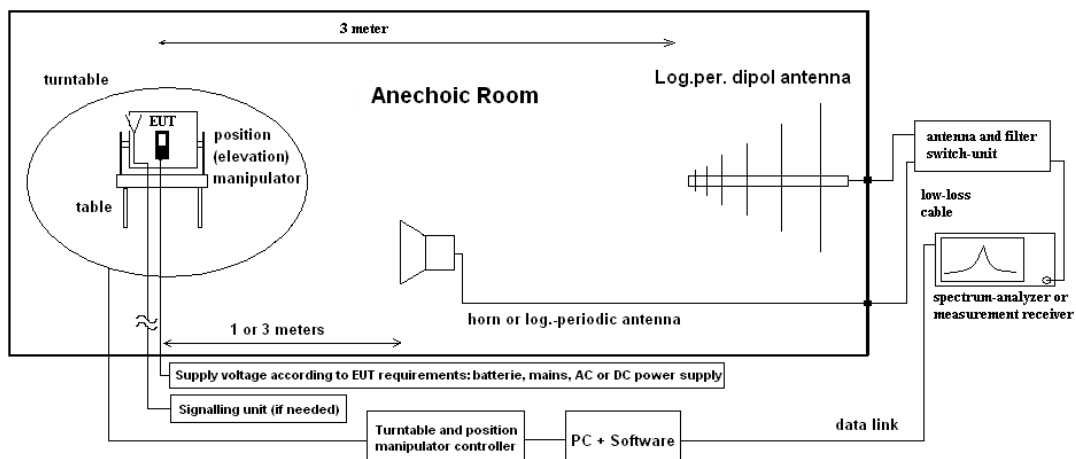

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and it's characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

4.1.2 Limit

Radiated emissions limits (3 meters)				
Frequency Range [MHz]	Limit [$\mu\text{V/m}$]	Limit [$\text{dB}\mu\text{V/m}$]	Detector	RBW / VBW [kHz]
30 - 88	100	40.0	Quasi peak	100 / 300
88 - 216	150	43.5	Quasi peak	100 / 300
216 - 960	200	46.0	Quasi peak	100 / 300
960 - 1000	500	54.0	Quasi peak	100 / 300

4.1.3 Measurement Location and Equipment

Test location	Cetecom Essen
Test site	120901 – SAC – Radiated Emission <1GHz

4.1.4 Result

Diagram	Channel	Mode	Maximum Level [$\text{dB}\mu\text{V/m}$] Frequency Range 30 – 1000MHz	Result
3.01a	--	Combined WLAN + BLE	36.60 $\text{dB}\mu\text{V/m}$ @ 33.84 MHz	Passed
3.01b	--	Combined WLAN + BLE	39.15 $\text{dB}\mu\text{V/m}$ @ 933.15 MHz	Passed


Remark: for more informations and graphical plot see report CETECOM_TR19_1_0097801T09a_A1

4.2 Radiated field strength emissions above 1GHz

4.2.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 18-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

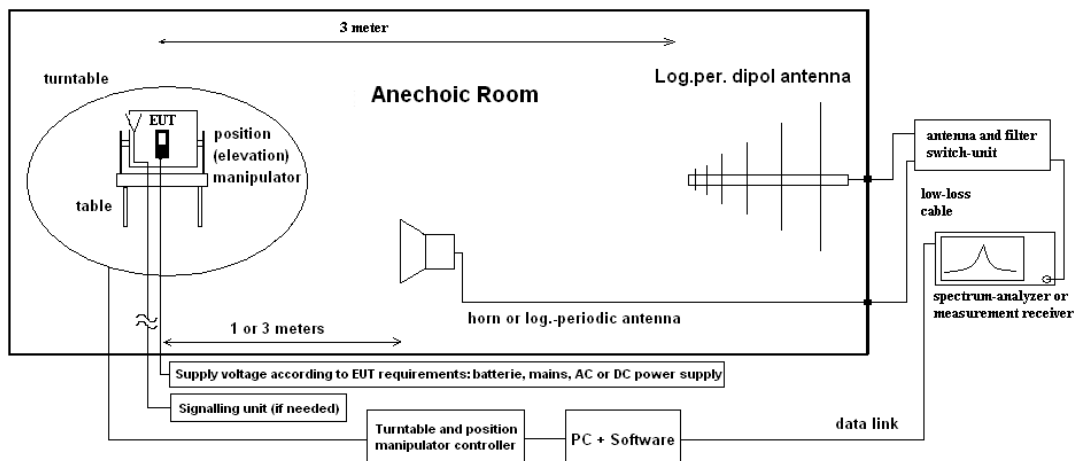

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 15°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and it's characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions or three axis scan for portable/small equipment.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + A_F + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

E_C = Electrical field – corrected value

E_R = Receiver reading

M = Margin

L_T = Limit

A_F = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

G_A = Gain of pre-amplifier (if used)

All units are dB-units, positive margin means value is below limit.

4.2.2 Limit

Radiated emissions limits (3 meters)				
Frequency Range [MHz]	Limit [$\mu\text{V/m}$]	Limit [$\text{dB}\mu\text{V/m}$]	Detector	RBW / VBW [kHz]
Above 1000	500	54	Average	1000 / 3000
Above 1000	5000	74	Peak	1000 / 3000

4.2.3 Measurement Location and Equipment

Test location	Cetecom Essen
Test site	120904 – FAC – Radiated Emission

4.2.4 Result

Diagram	Channel	Mode	Maximum Level [$\text{dB}\mu\text{V/m}$] Frequency Range 1 – 15GHz	Result
4.01	--	Combined WLAN + BLE	61.287 @ 14.823GHz (PK) 49.618 @ 14.656 (AV)	Passed

Remark: for more informations and graphical plot see report CETECOM_TR19_1_0097801T09a_A1

Diagram	Channel	Mode	Maximum Level [$\text{dB}\mu\text{V/m}$] Frequency Range 15 – 26.5GHz	Result
4.02	--	Combined WLAN + BLE	57.57 @ 26.49GHz (PK) 49.38 @ 26.384(AV)	Passed

Remark: for more informations and graphical plot see report CETECOM_TR19_1_0097801T09a_A1

4.3 Results from external laboratory

None

-

4.4 Opinions and interpretations

None

-

5 Equipment lists

ID	Description	Manufacturer	SerNo	Cal Date
120904	FAC1 - Radiated Emissions			
20720	EMC32 [FAC]	Rohde & Schwarz Messgerätebau GmbH	V10.50	
20020	Horn Antenna 3115 (Subst 1)	EMCO Elektronik GmbH	9107-3699	19.07.2021
20549	Log.Per-Antenna HL025	Rohde & Schwarz Messgerätebau GmbH	1000060	31.07.2021
20700	PC ctc662012 [FAC]	Dell Inc.		
20262	Power Meter NRV-S	Rohde & Schwarz Messgerätebau GmbH	825770/0010	15.05.2020
20357	power sensor NRV-Z1	Rohde & Schwarz Messgerätebau GmbH	861761/002	21.05.2021
20338	Pre-Amplifier 100MHz - 26GHz JS4-00102600-38-5P	Miteq Inc.	838697	
20484	Pre-Amplifier 2,5GHz - 18GHz AMF-5D-02501800-25-10P	Miteq Inc.	1244554	
20287	Pre-Amplifier 25MHz - 4GHz AMF-2D-100M4G-35-10P	Miteq Inc.	379418	
20690	Spectrum Analyzer FSU	Rohde & Schwarz Messgerätebau GmbH	100302/026	23.05.2021
120901	SAC - Radiated Emission <1GHz			
25038	Loop Antenna (H-Field) HFH2- Z2	Rohde & Schwarz	879824/13	31.03.2022
20574	Biconilog Hybrid Antenna BTA-L	Frankonia	980026L	03.05.2022

ID	Description	Manufacturer	SerNo	Cal Date
20302	Horn Antenna BBHA9170	Schwarzbeck Mess-Elektronik OHG	155	30.03.2022
20620	ESU 26	Rohde & Schwarz	100362	30.05.2020
120910	CTC-Radio Laboratory 1			
20866	FSV3030 Signal Analyzer 30GHz	Rohde & Schwarz Messgerätebau GmbH	101247	02.10.2020
20805	Open Switch and control Platform OSP B157WX 40GHz 8Port Switch	Rohde & Schwarz Messgerätebau GmbH	101264	03.05.2020
20693	TSS8997	Rohde & Schwarz Messgerätebau GmbH	--	--
20871	NRP-Z81	Rohde & Schwarz Messgerätebau GmbH	104631	08.04.2021
	120919 - Conducted Emission			
20300	AC - LISN (50 Ohm/50μH, 1-phase) ESH3-Z5	Rohde & Schwarz Messgerätebau GmbH	892 239/020	22.05.2020
20005	AC - LISN 50 Ohm/50μH ESH2-Z5	Rohde & Schwarz Messgerätebau GmbH	861741/005	23.05.2020
20468	Digital Multimeter Fluke 112	Fluke Deutschland GmbH	90090455	16.05.2021
20377	EMI Test Receiver ESC530	Rohde & Schwarz Messgerätebau GmbH	100160	22.05.2020
20536	Impedance Stabilization Network ISN ST08	Teseq GmbH	25867	18.05.2020
20533	Impedance Stabilization Network ISN T200A	Teseq GmbH	25706	18.05.2020
20534	Impedance Stabilization Network ISN T400A	Teseq GmbH	24881	18.05.2020
20541	Impedance Stabilization Network ISN T8-Cat6	Teseq GmbH	26373	18.05.2020
20535	Impedance Stabilization Network ISN T800	Teseq GmbH	26321	18.05.2020
20099	Passive Voltage Probe ESH2-Z3	Rohde & Schwarz Messgerätebau GmbH	299.7810.52	16.05.2021
20100	passive voltage probe TK 9416	Schwarzbeck Mess-Elektronik OHG	without	16.05.2021

ID	Description	Manufacturer	SerNo	Cal Date
20033	RF-current probe (100kHz-30MHz) ESH2-Z1	Rohde & Schwarz Messgerätebau GmbH	879581/18	23.05.2021
20373	Single-Line V-Network (50 Ohm/5μH) ESH3-Z6	Rohde & Schwarz Messgerätebau GmbH	100535	22.05.2020
20007	Single-Line V-Network (50 Ohm/5μH) ESH3-Z6	Rohde & Schwarz Messgerätebau GmbH	892563/002	23.05.2020
20556	Thermo-/Hygrometer WS-9400	Conrad Electronic GmbH	-	
20051	VHF-Current Probe 20-300 MHz ESV-Z1	Rohde & Schwarz Messgerätebau GmbH	872421	16.05.2021

6 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor k , such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%							Remarks
Conducted emissions (U _{CISPR})	CISPR 16-2-1	9 kHz - 150 kHz 150 kHz - 30 MHz	4.0 dB 3.6 dB							-
Radiated emissions Enclosure	CISPR 16-2-3	30 MHz - 1 GHz 1 GHz - 18 GHz	4.2 dB 5.1 dB							E-Field
Disturbance power	CISPR 16-2-2	30 MHz - 300 MHz	-							-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB							Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	--	-	
		9 kHz - 12.75 GHz	N/A	0.60	0.7	0.25	N/A	--		
		12.75 - 26.5GHz	N/A	0.82	--	N/A	N/A	--		
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	0.70	N/A	0.69	--	N/A - not applicable	
		2.8 GHz - 12.75GHz	1.48	N/A	1.51	N/A	1.43	--		
		12.75 GHz - 18GHz	1.81	N/A	1.83	N/A	1.77	--		
		18 GHz - 26.5GHz	1.83	N/A	1.85	N/A	1.79	--		
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)							Frequency error
			1.0 dB							Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)							Frequency error
	-		See above: 0.70 dB							Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm							-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.0 dB							Magnetic field E-field
		30 MHz - 1 GHz	4.2 dB							
		1 GHz - 18 GHz	4.91 dB							
		18 GHz – 26.5 GHz	5.06 dB							
		26.5 GHz - 40 GHz	5.52 dB							

7 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2020-May-13
C1	Chapter 1.1: module reference removed Chapter 3.2.1 Administrative Changes	2020-May-14
--	--	--

End of Test Report