



FCC Test Report

Test report no.: EMC_544FCC15.247_2003_KM8_CoL_CDMA

FCC Part 15.247 for DSSS systems / CANADA RSS-210

EUT: Tablet PC
with WLAN
collocated with CDMA Module
FCC ID: Q2GIX104-118

Model: iX104
Model: KM8
Model: AC555



Accredited according to ISO/IEC 17025



FCC listed # 101450

IC recognized # 3925

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

Table of Contents

1	General information
1.1	Notes
1.2	Testing laboratory
1.3	Details of applicant
1.4	Application details
1.5	Test item
1.6	Test standards
2	Technical test
2.1	Summary of test results
2.2	Test report
1	General information
1.1	Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

TEST REPORT PREPARED BY:**EMC Engineer: Harpreet Sidhu**

1.2 Testing laboratory
CETECOM Inc.
411 Dixon Landing Road, Milpitas, CA-95035, USA
Phone: +1 408 586 6200 Fax: +1 408 586 6299
E-mail: lothar.schmidt@cetecomusa.com
Internet: www.cetecom.com

1.3 Details of applicant

Name : **Xplore Technologies**
Street : **14000 Summit Road, Suite 900**
City / Zip Code : **Austin, TX 78728**
Country : **USA**
Contact : **Douglas L. Fowler**
Telephone : **+1 512 336 7797**
Tele-fax : **+1 512 336 7791**
e-mail : [**dfowler@xploretech.com**](mailto:dfowler@xploretech.com)

1.4 Application details

Date of receipt test item : 2003-09-02
Date of test : 2002-09-03/04

1.5 Test item

EUT Manufacturer : Applicant
WLAN Manufacturer : Wistron Neweb Corporation
Street : No. 10-1, Li-hsin Road I, Science-based Industrial Park
City / Zip Code : Hsinchu 300
Country : Taiwan, R.O.C
CDMA Module Mfg'er : Sierra Wireless, Inc.
Street : 13811 Wireless Way
City / Zip Code : Richmond, BC V6V 3A4
Country : Canada
Model No. (EUT) : [**iX104**](#)
Model No. (WLAN) : [**KM8**](#)
Model No. (CDMA) : [**AC555**](#)
Description : 802.11b wireless LAN mini PCI card Collocated with CDMA module in Tablet PC
FCC ID : Q2GIX104-118

Additional information

Frequency	:	2412MHz – 2462MHz for WLAN 825.25MHz – 847.75MHz for Cellular 850 1851.25MHz – 1908.75MHz for PCS 1900
Type of modulation	:	DSSS for WLAN OQPSK for CDMA
Number of channels	:	11 for WLAN 833(Cellular)/1199 (PCS)
Antenna	:	Embedded in Tablet PC
Output power	:	0.083W conducted peak power
Extreme temp. Tolerance	:	-20°C to +60°C

1.6 Test standards: FCC Part 15 §15.247 / CANADA RSS-210

NOTE: This test report covers only radiated testing done on Tablet PC model# iX104 with WLAN model# KM8 collocated with CDMA module. For all RF Conducted measurements on WLAN please refer to test report# ISL-03LR007FC

2 Technical test**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests
Performed

Final Verdict:
(Only “passed” if all single measurements are “passed”)

Passed

Technical responsibility for area of testing:

2003-10-08 EMC & Radio Seigfried Lehmann (Manager)



Date

Section

Name

Signature

Responsible for test report and project leader:

2003-10-08 EMC & Radio Harpreet Sidhu (EMC Engineer)



Date

Section

Name

Signature

2.2 Test report

TEST REPORT

Test report no.: EMC_544FCC15.247_2003_KM8_CoL_CDMA

TEST REPORT REFERENCE

LIST OF MEASUREMENTS		PAGE
MAXIMUM PEAK OUTPUT POWER	§ 15.247 (b) (1)	8
BAND EDGE COMPLIANCE (WLAN Alone)	§15.247 (c)	12
BAND EDGE COMPLIANCE (GSM850 Collocated)	§15.247 (c)	16
BAND EDGE COMPLIANCE (GSM 1900 Collocated)	§15.247 (c)	20
EMISSION LIMITATIONS (WLAN Alone)	§ 15.247 (c) (1)	24
EMISSION LIMITATIONS (CDMA 850 Collocated)	§ 15.247 (c) (1)	34
EMISSION LIMITATIONS (CDMA 1900 Collocated)	§ 15.247 (c) (1)	43
CONDUCTED EMISSIONS	§ 15.107/207	52
RECEIVER SPURIOUS RADIATION	§ 15.209	53
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS		58
BLOCK DIAGRAMS		59

**MAXIMUM PEAK OUTPUT POWER
(RADIATED)**

§ 15.247 (b) (1)

EIRP:

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2412	2437	2462
T _{nom} (23)°C	V _{nom}	19.07	18.94	18.66
Measurement uncertainty		±0.5dBm		

LIMIT


SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	≤30dBm Conducted ≤36dBm Radiated (EIRP)

ANALYZER SETTINGS: RBW=VBW=10MHz


**MAXIMUM PEAK OUTPUT POWER
(RADIATED)
Low Channel (2412MHz)**

§ 15.247 (b) (1)

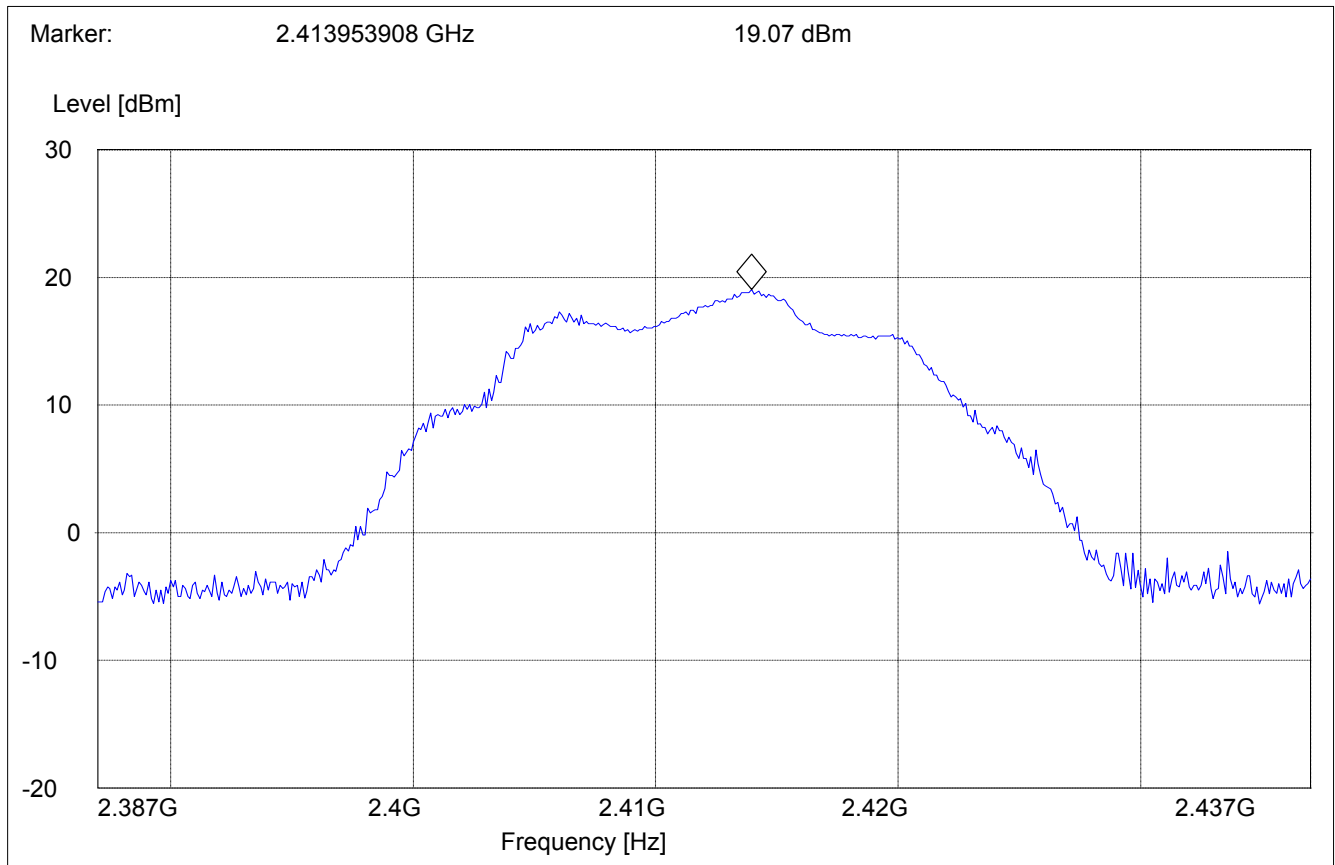


**MAXIMUM PEAK OUTPUT POWER
(RADIATED)
Mid Channel (2437MHz)**

§ 15.247 (b) (1)

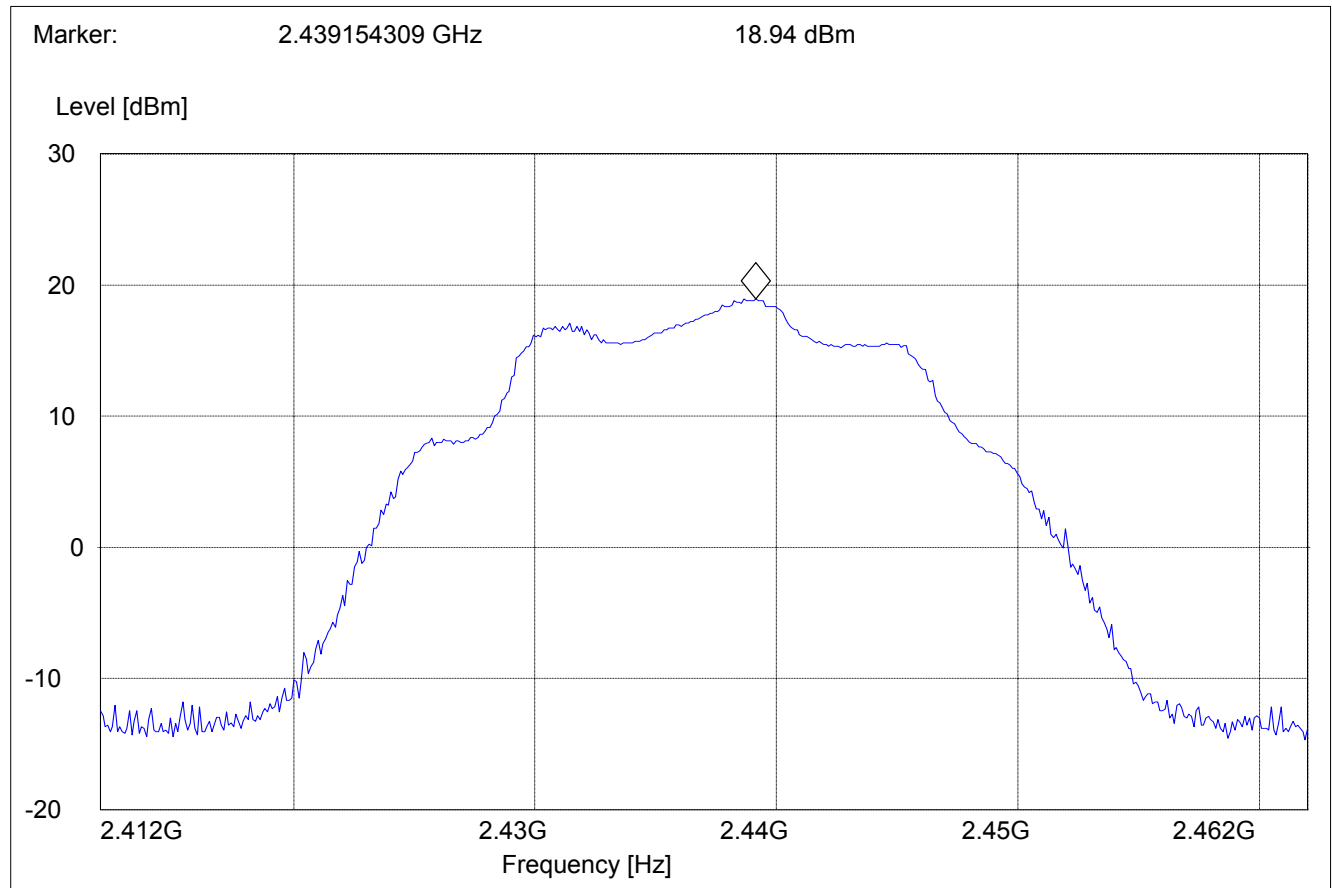

**MAXIMUM PEAK OUTPUT POWER
(RADIATED)
High Channel (2462MHz)**

§ 15.247 (b) (1)

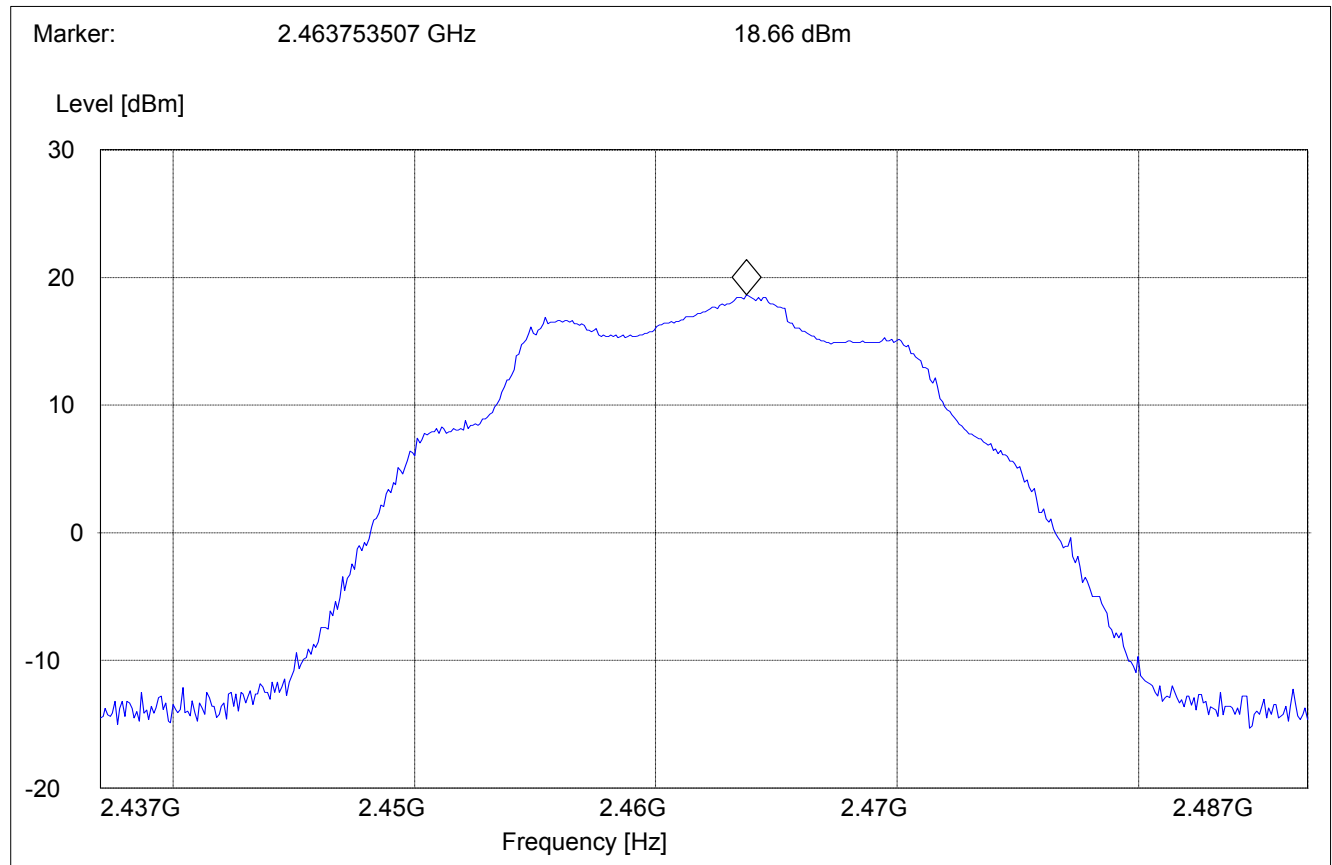


BAND EDGE COMPLIANCE (WLAN Alone)

§15.247 (c)

Low frequency section (spurious in the restricted band 2310 – 2390 MHz) (Average measurement)

Operating condition : Tx at 2412MHz
 SWEEP TABLE : "FCC15.247 LBE_AVG"
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

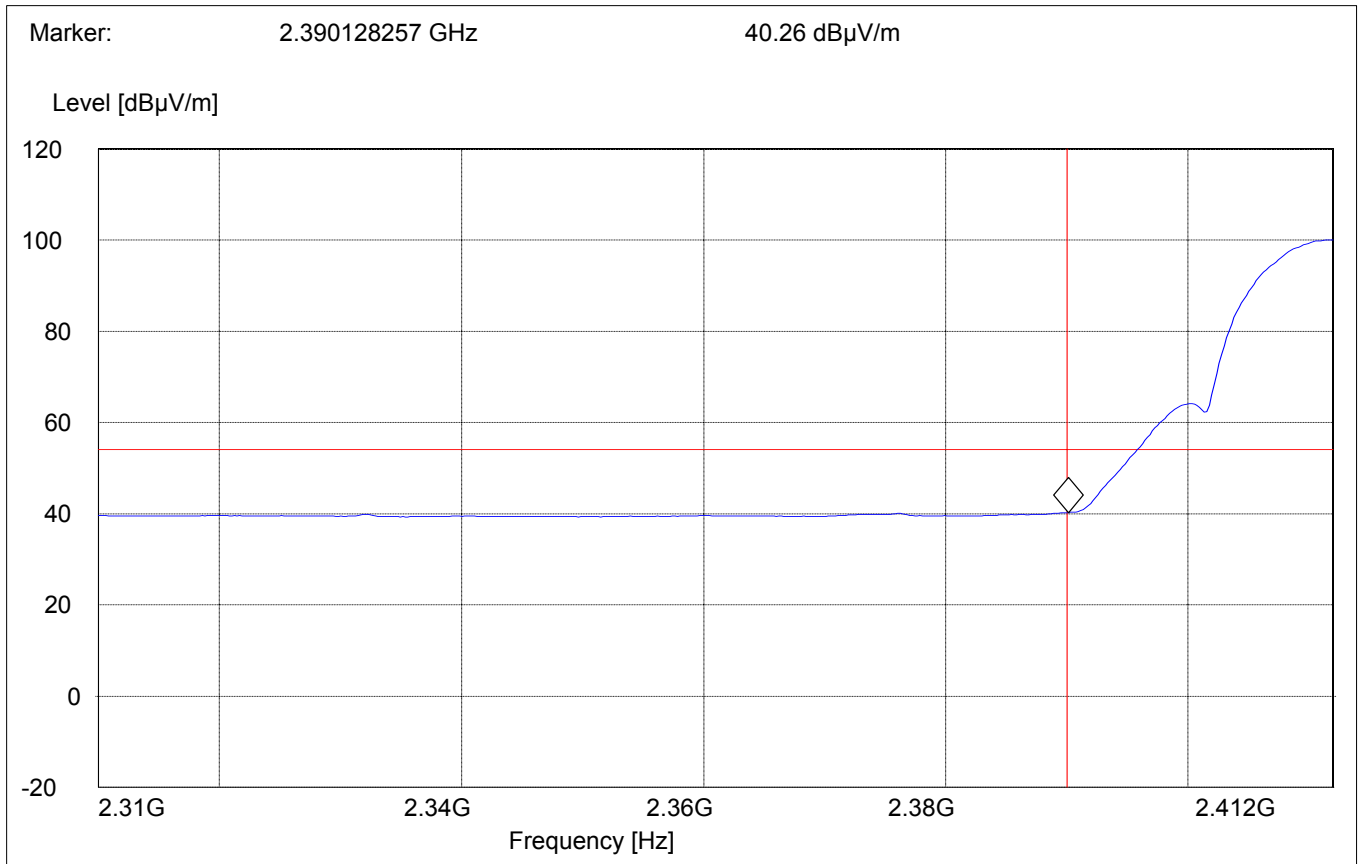

BAND EDGE COMPLIANCE


§15.247 (c)

Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

(Peak measurement)

Operating condition : Tx at 2412MHz
 SWEEP TABLE : "FCC15.247 LBE_Pk"
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

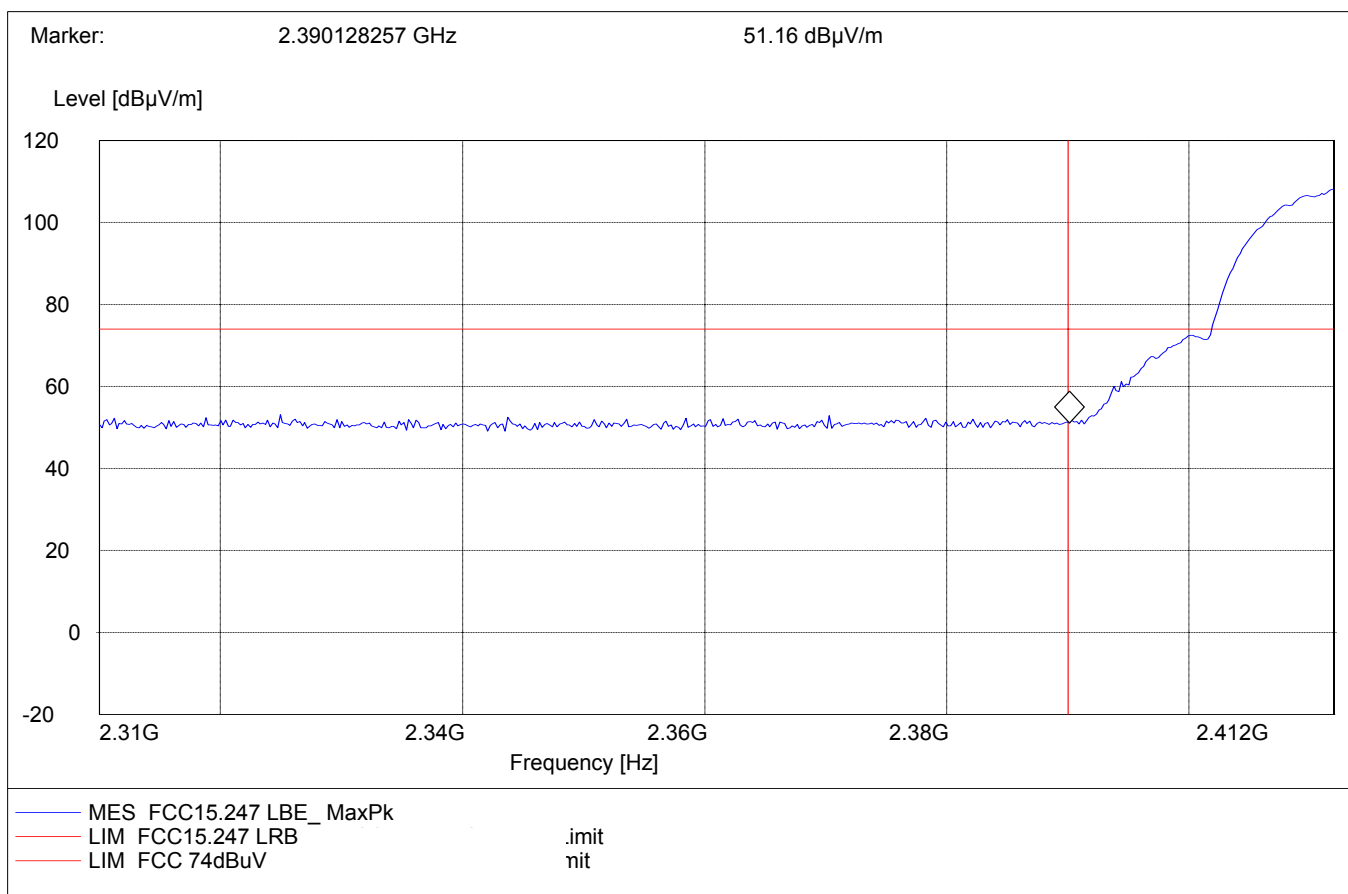

BAND EDGE COMPLIANCE


§15.247 (c)

High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

(Average measurement)

Operating condition : Tx at 2472MHz
 SWEEP TABLE : "FCC15.247 HBE_AVG"
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

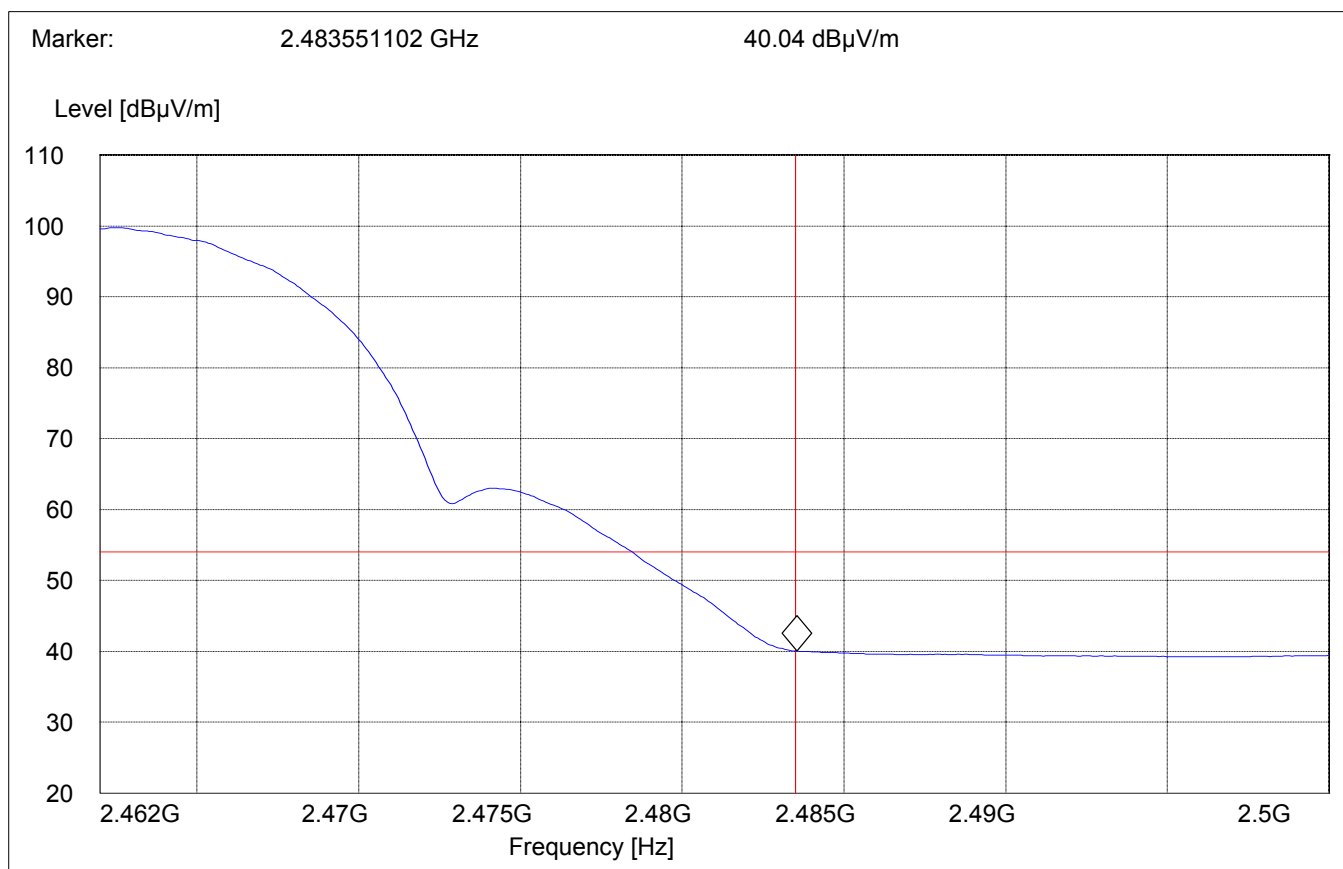

BAND EDGE COMPLIANCE


§15.247 (c)

High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

(Peak measurement)

Operating condition : Tx at 2472MHz
 SWEEP TABLE : "FCC15.247 HBE_PK"
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

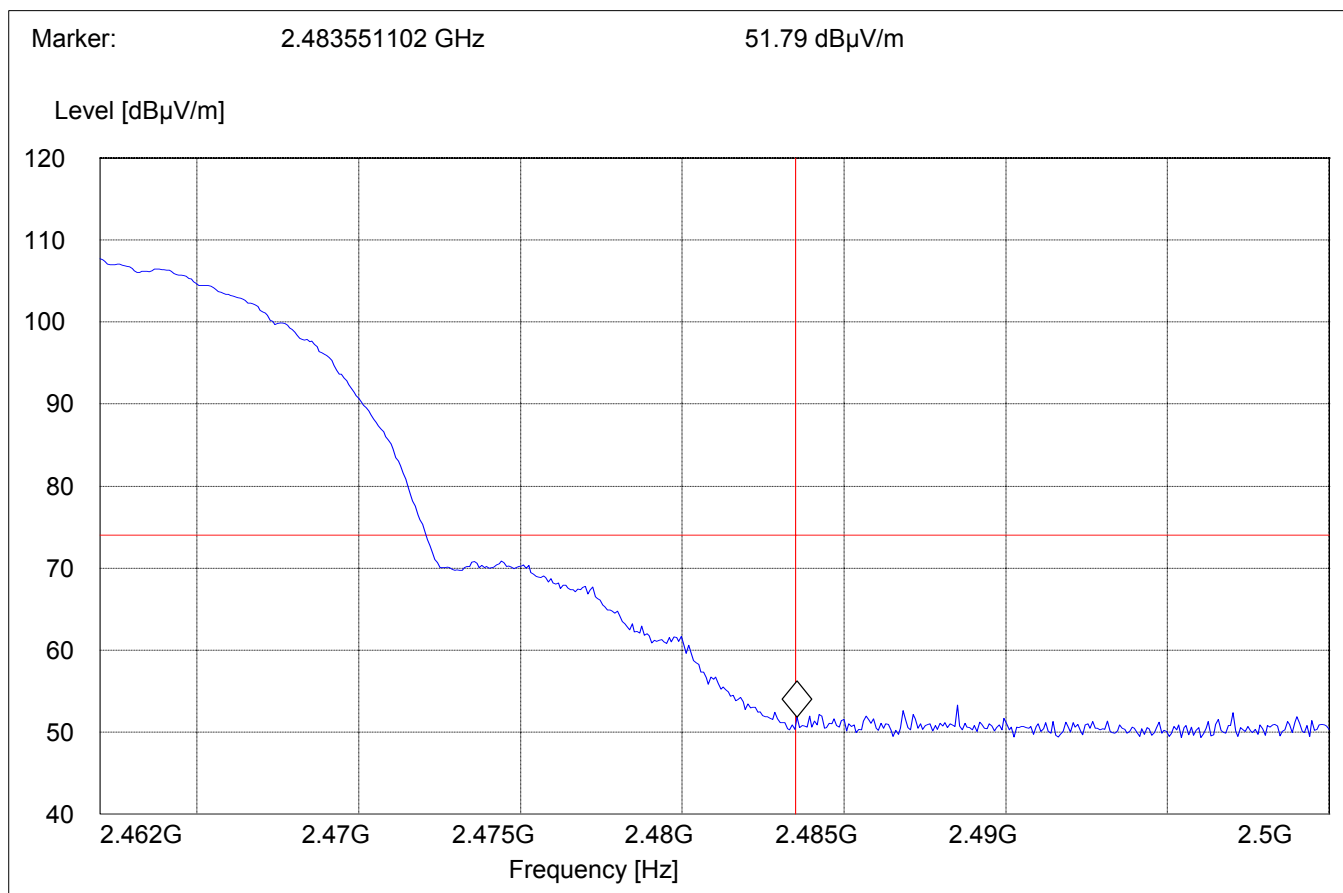


BAND EDGE COMPLIANCE (GSM850 Collocated)
WLAN Collocated with CDMA Module 850MHz band
Cellular 850 Tx @ ch-128

§15.247 (c)

Low frequency section (spurious in the restricted band 2310 – 2390 MHz)
(Average measurement)

Operating condition : Tx at 2412MHz
 SWEEP TABLE : "FCC15.247 LBE_AVG"
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

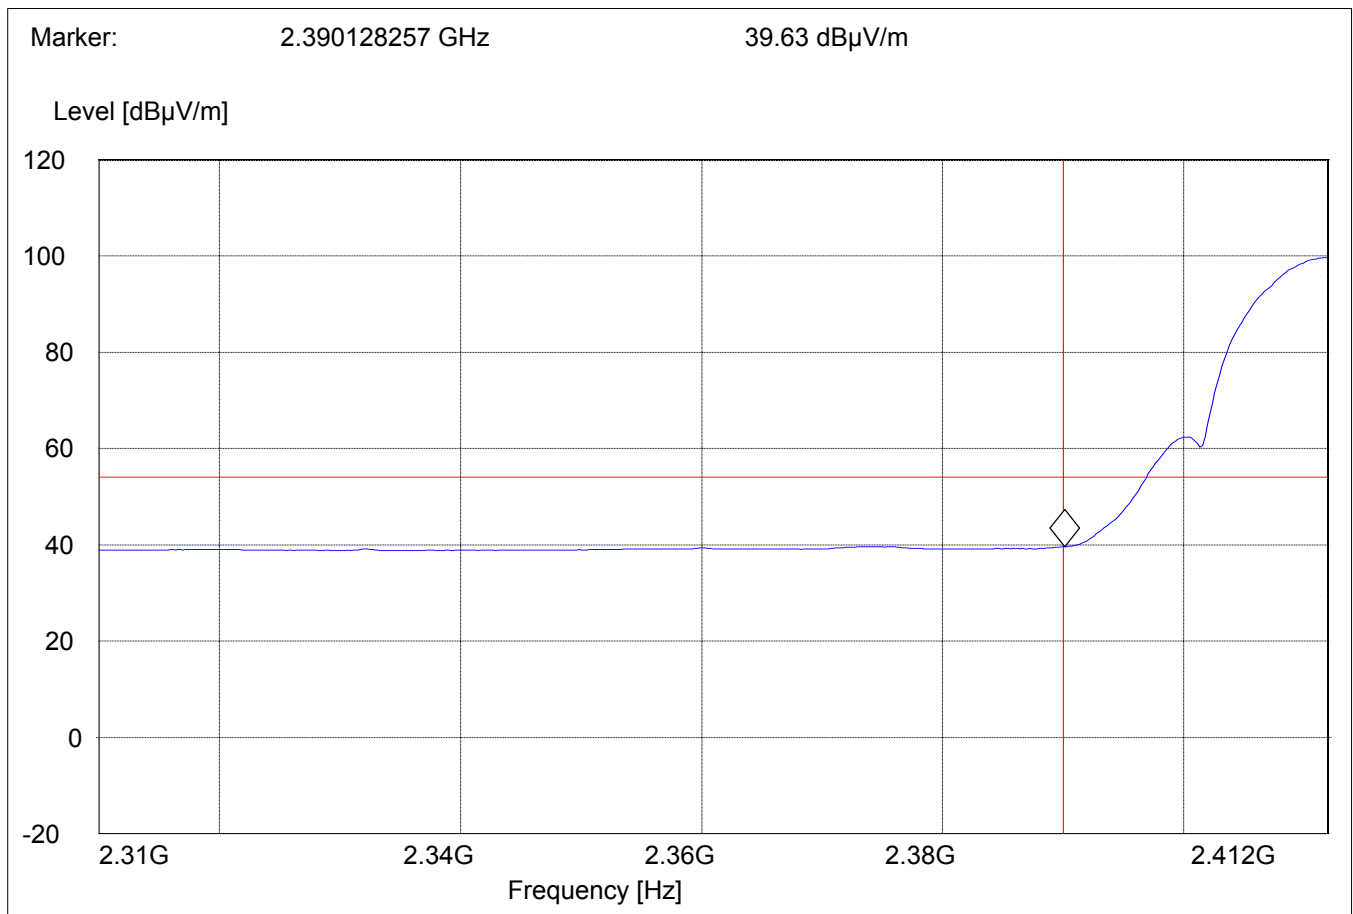

BAND EDGE COMPLIANCE

§15.247 (c)


Cellular 850 Tx @ ch-128

Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

(Peak measurement)

Operating condition : Tx at 2412MHz
 SWEEP TABLE : "FCC15.247 LBE_Pk"
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

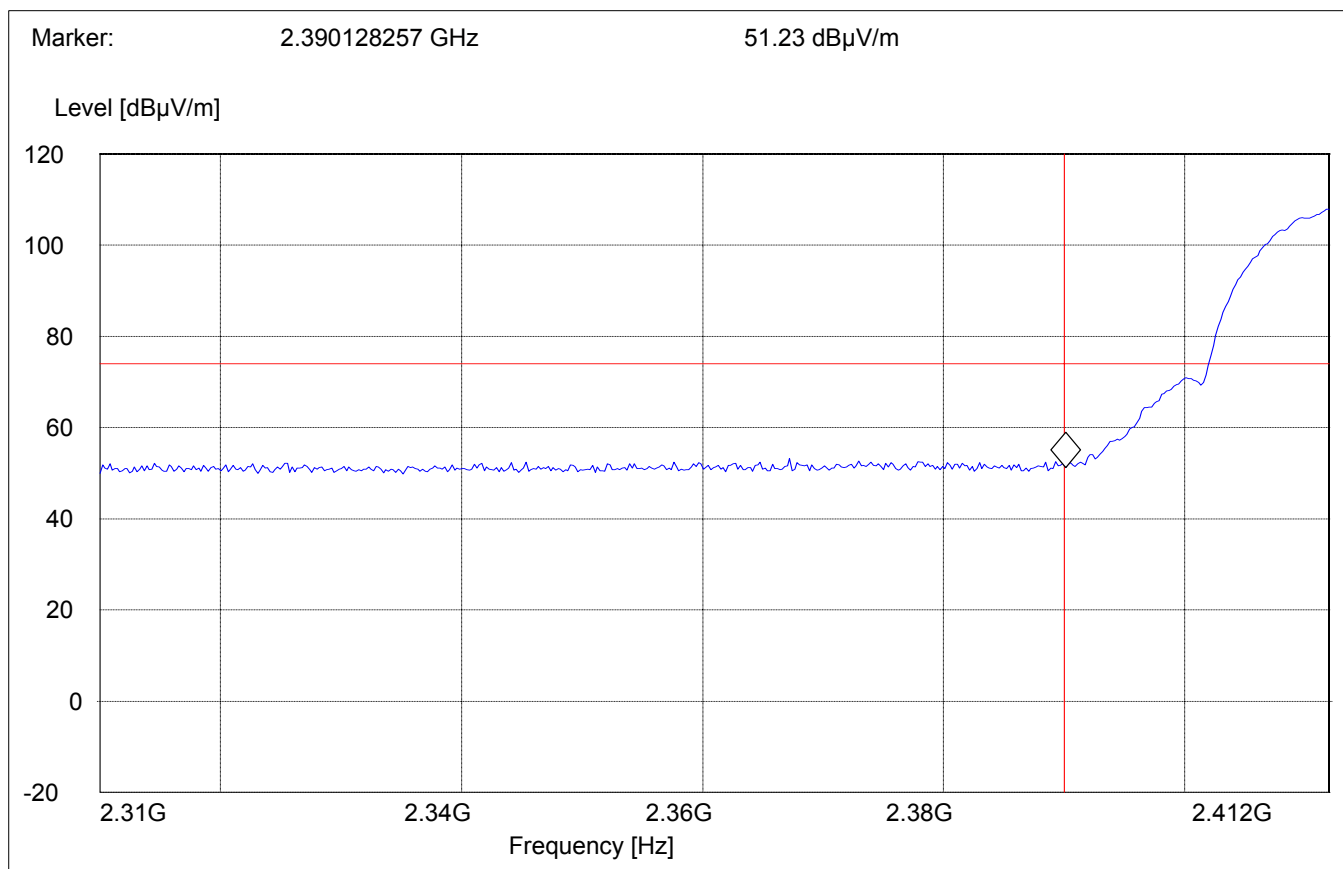

BAND EDGE COMPLIANCE

§15.247 (c)


Cellular 850 Tx @ ch-251

High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

(Average measurement)

Operating condition : Tx at 2472MHz
 SWEEP TABLE : "FCC15.247 HBE_AVG"
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

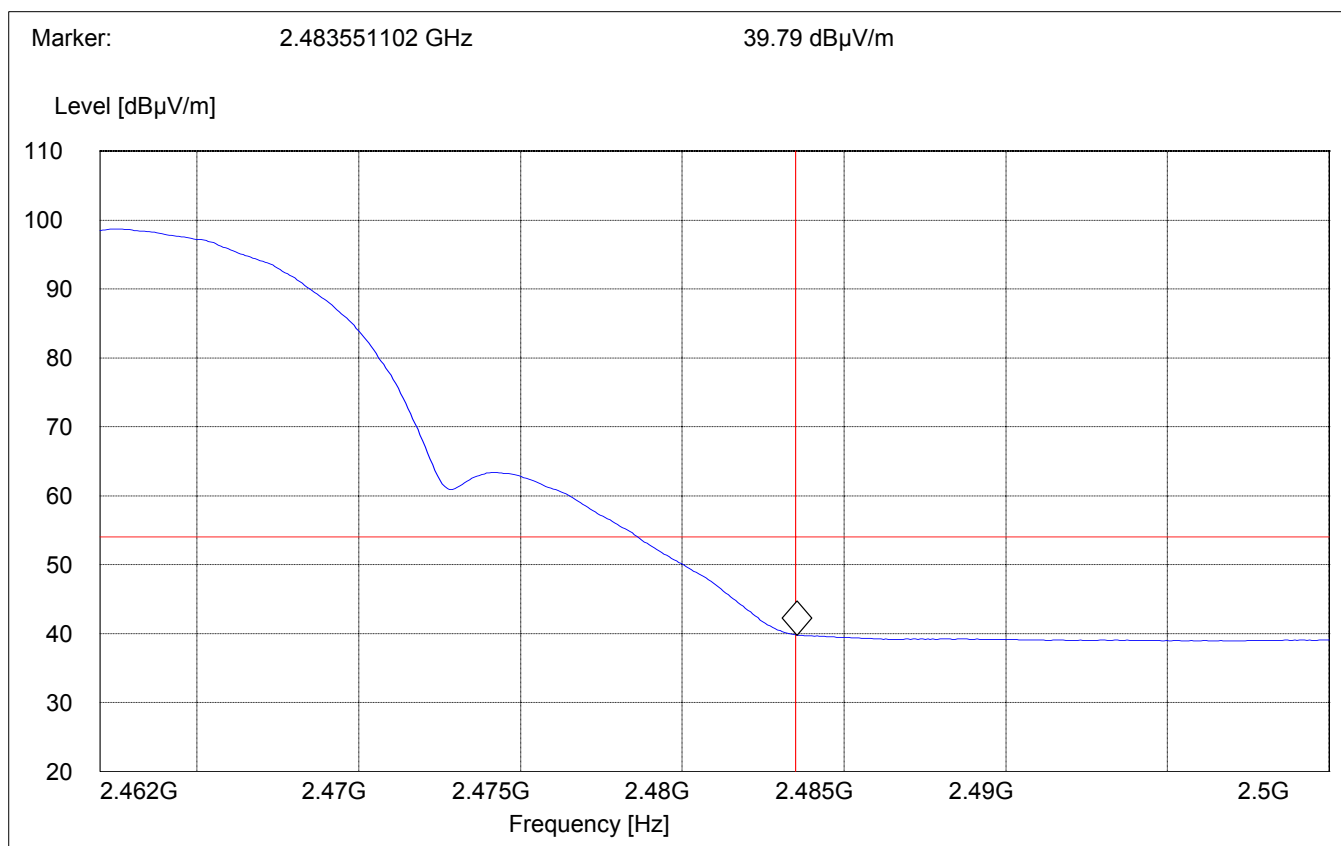


BAND EDGE COMPLIANCE Cellular 850 Tx @ ch-251

§15.247 (c)

High frequency section (spurious in the restricted band 2483.5 – 2500 MHz) (Peak measurement)

Operating condition : Tx at 2472MHz
SWEEP TABLE : "FCC15.247 HBE_PK"
Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

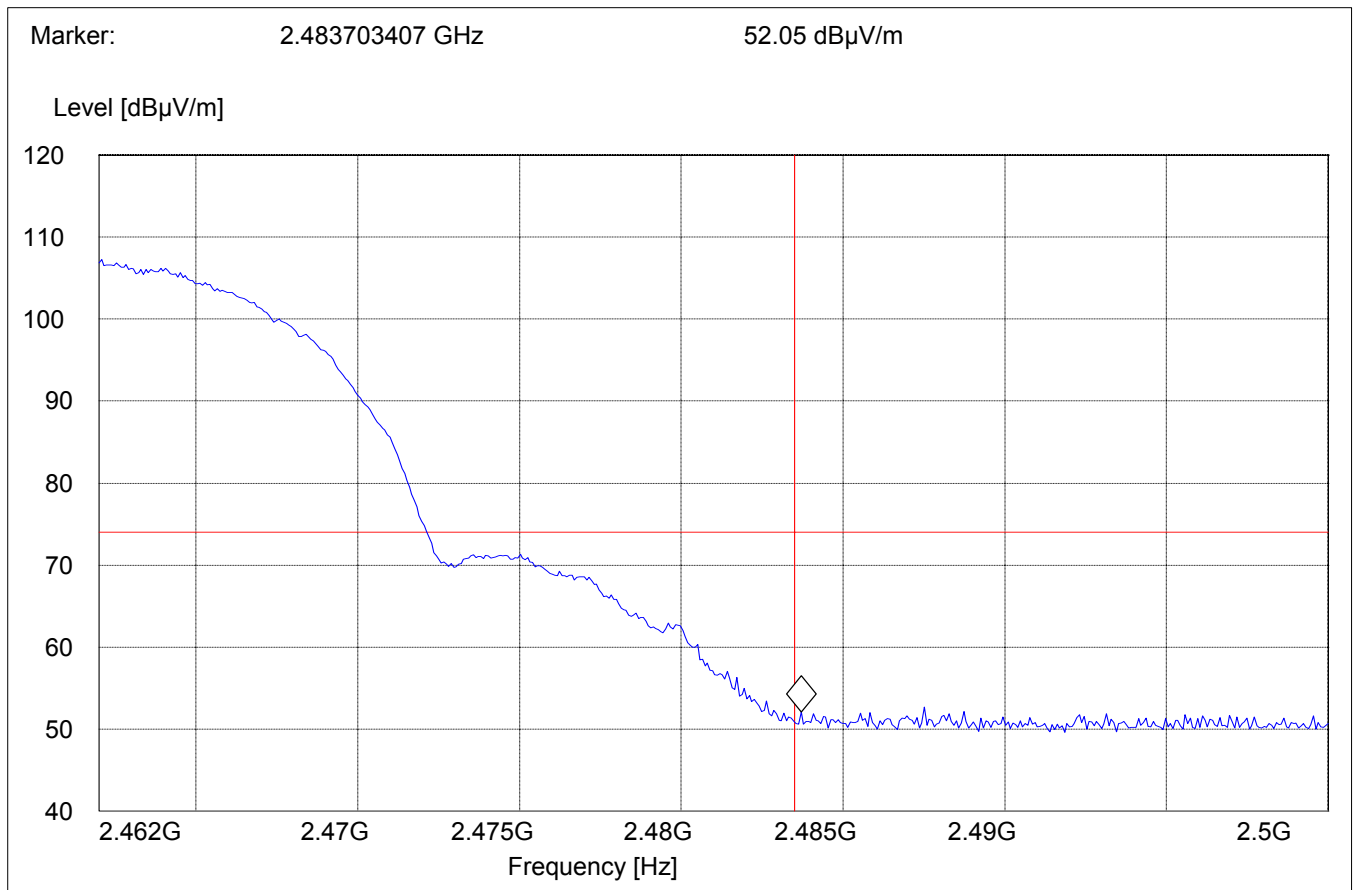


BAND EDGE COMPLIANCE (GSM 1900 Collocated)
WLAN Collocated with CDMA Module 1900MHz band
PCS 1900 Tx @ ch-512

§15.247 (c)

Low frequency section (spurious in the restricted band 2310 – 2390 MHz)
(Average measurement)

Operating condition : Tx at 2412MHz
 SWEEP TABLE : "FCC15.247 LBE_AVG"
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

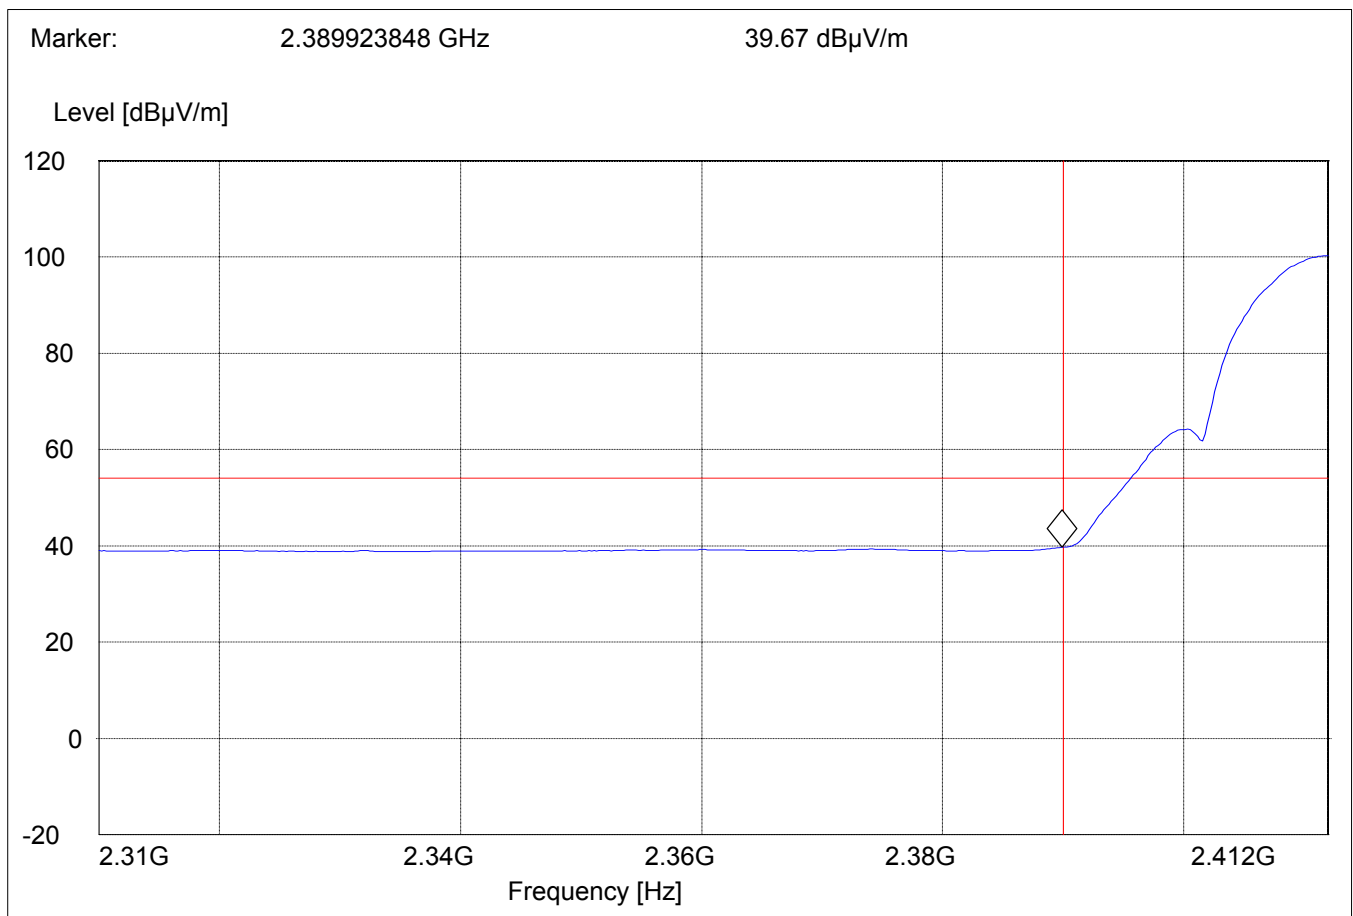


BAND EDGE COMPLIANCE PCS 1900 Tx @ ch-512

§15.247 (c)

Low frequency section (spurious in the restricted band 2310 – 2390 MHz) (Peak measurement)

Operating condition : Tx at 2412MHz
SWEEP TABLE : "FCC15.247 LBE_Pk"
Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

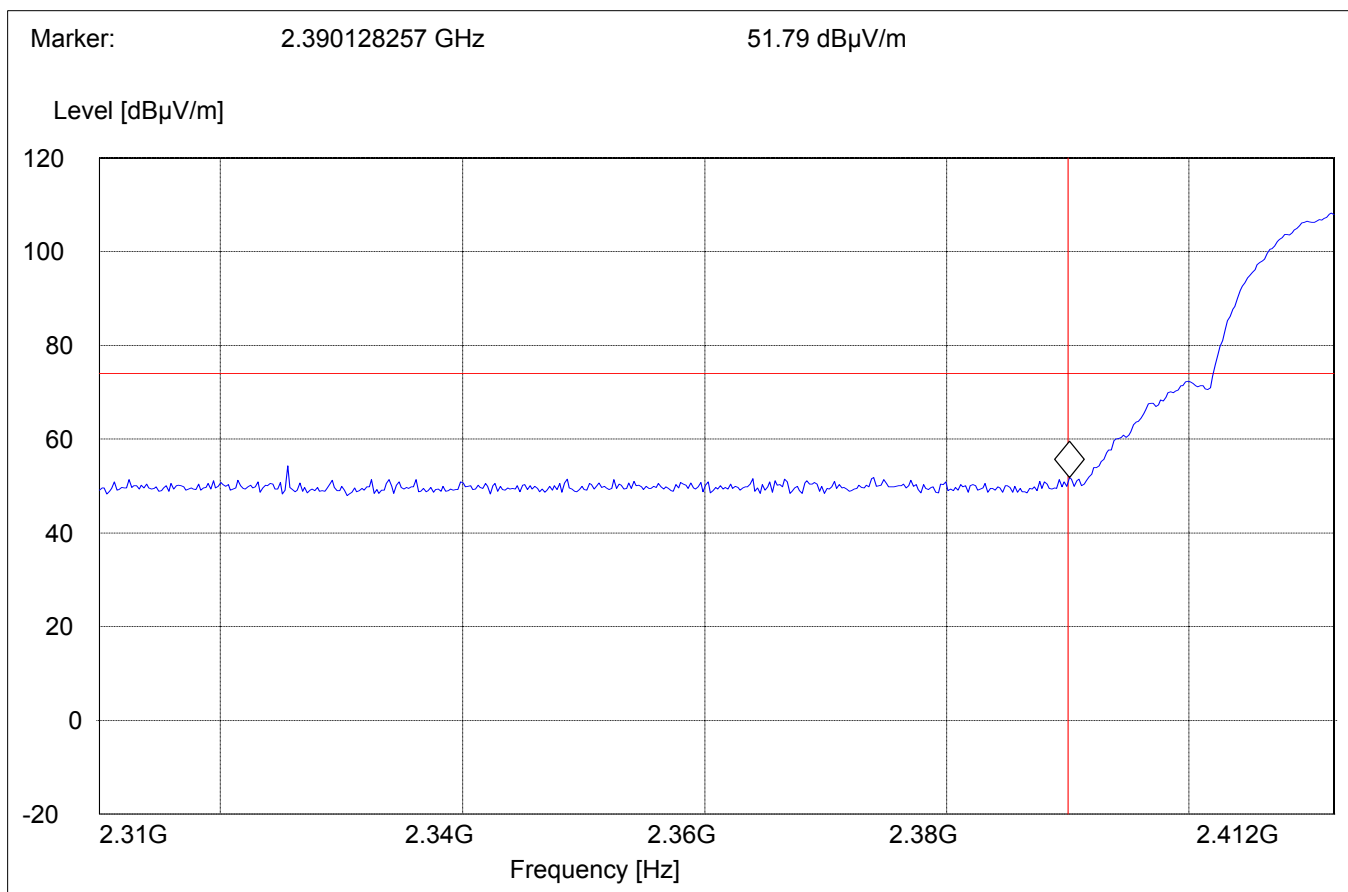


BAND EDGE COMPLIANCE PCS 1900 Tx @ ch-810

§15.247 (c)

High frequency section (spurious in the restricted band 2483.5 – 2500 MHz) (Average measurement)

Operating condition : Tx at 2472MHz
SWEEP TABLE : "FCC15.247 HBE_AVG"
Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

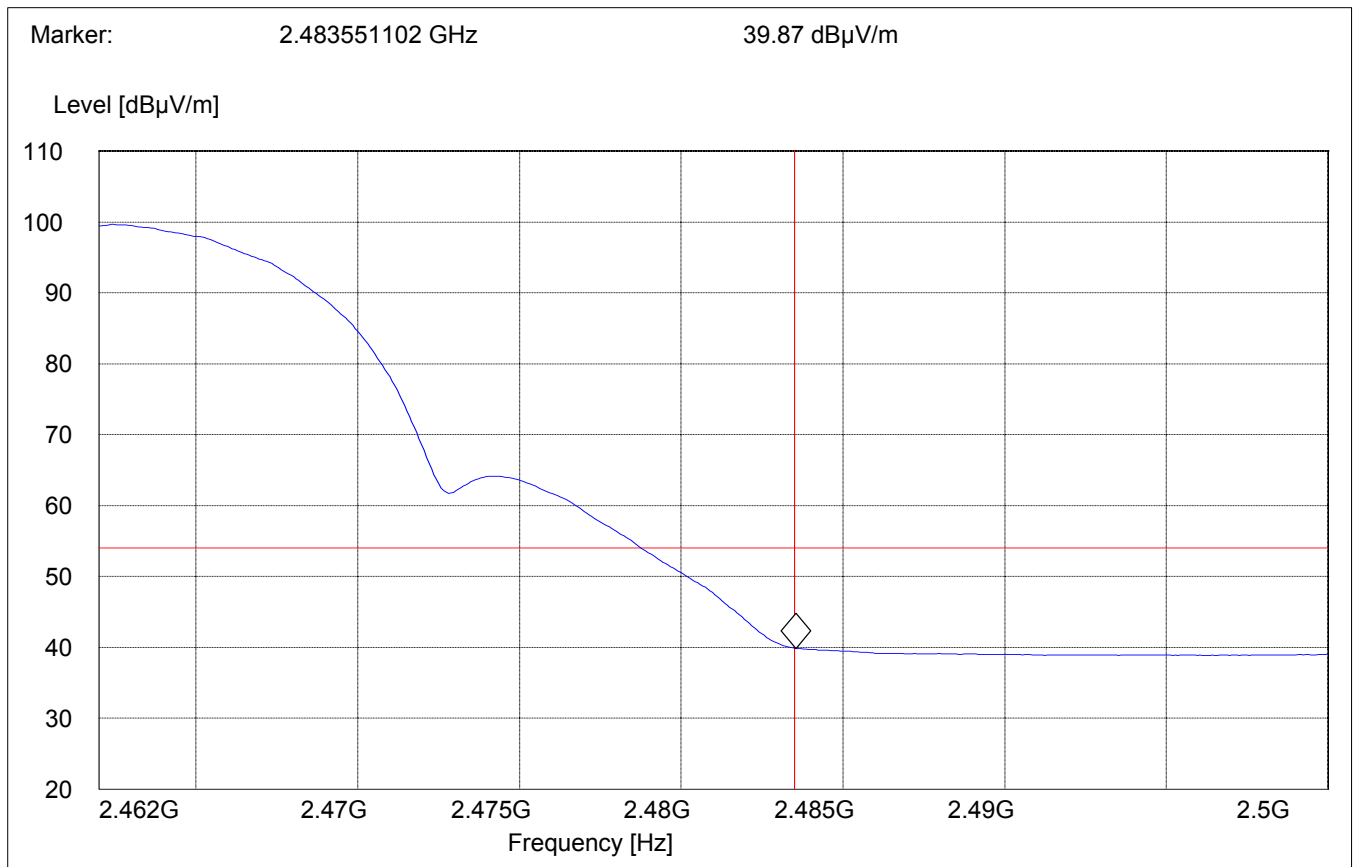


BAND EDGE COMPLIANCE PCS 1900 Tx @ ch-810

§15.247 (c)

High frequency section (spurious in the restricted band 2483.5 – 2500 MHz) (Peak measurement)

Operating condition : Tx at 2472MHz
SWEEP TABLE : "FCC15.247 HBE_PK"
Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

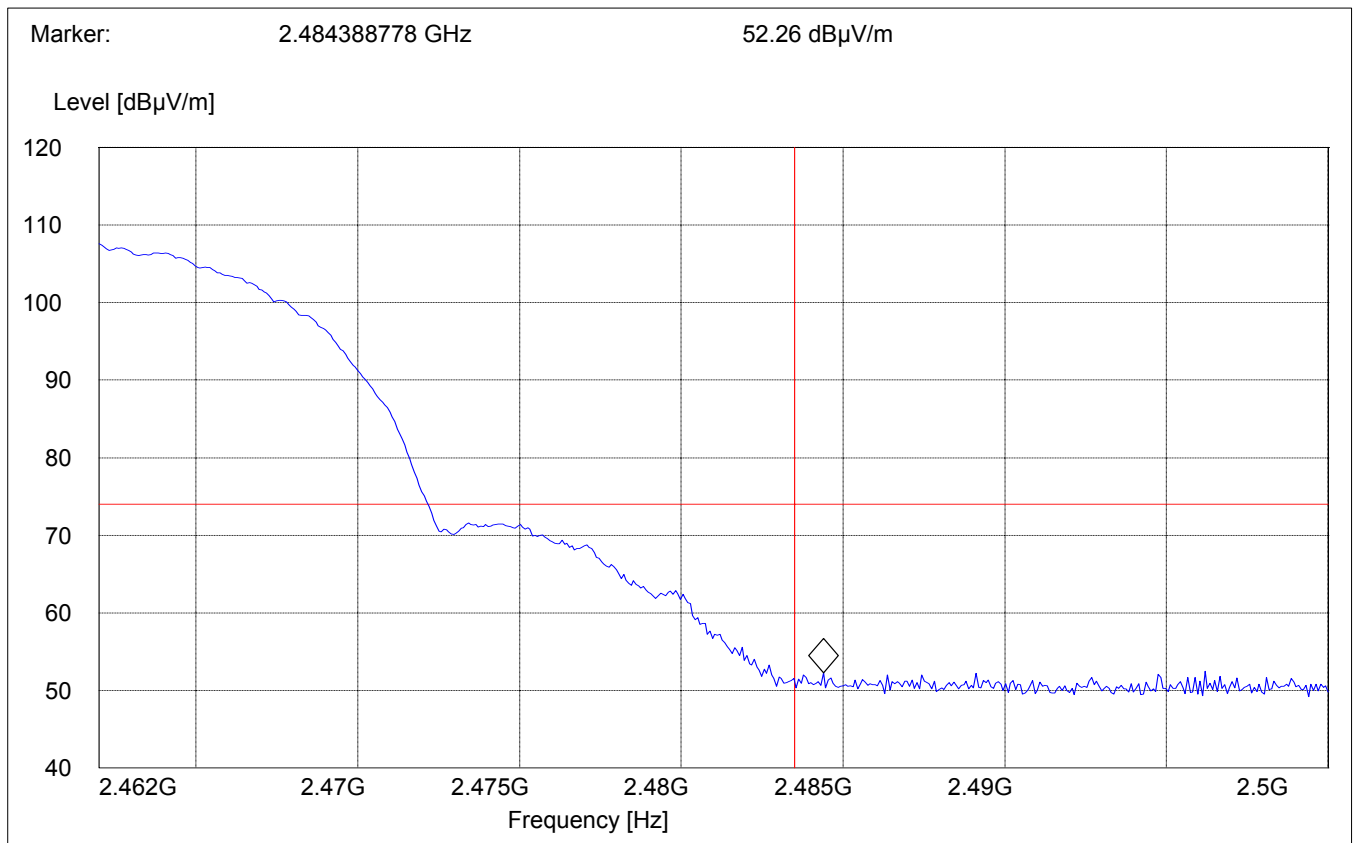

**EMISSION LIMITATIONS (WLAN Alone)
Transmitter (Radiated)****§ 15.247 (c) (1)****LIMITS**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions, which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode unless specified with the plots.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

EMISSION LIMITATIONS - Radiated (Transmitter)**§ 15.247 (c) (1)**

Transmit at Lowest channel Frequency 2412MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			
Transmit at Middle channel Frequency 2437MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			
Transmit at Highest channel Frequency 2462MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Lowest Channel (2412MHz): 30MHz – 1GHz

Note: This plot is valid for low, mid, high channels (worst-case plot)

SWEEP TABLE:

"BT Spuri hi 30-1G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

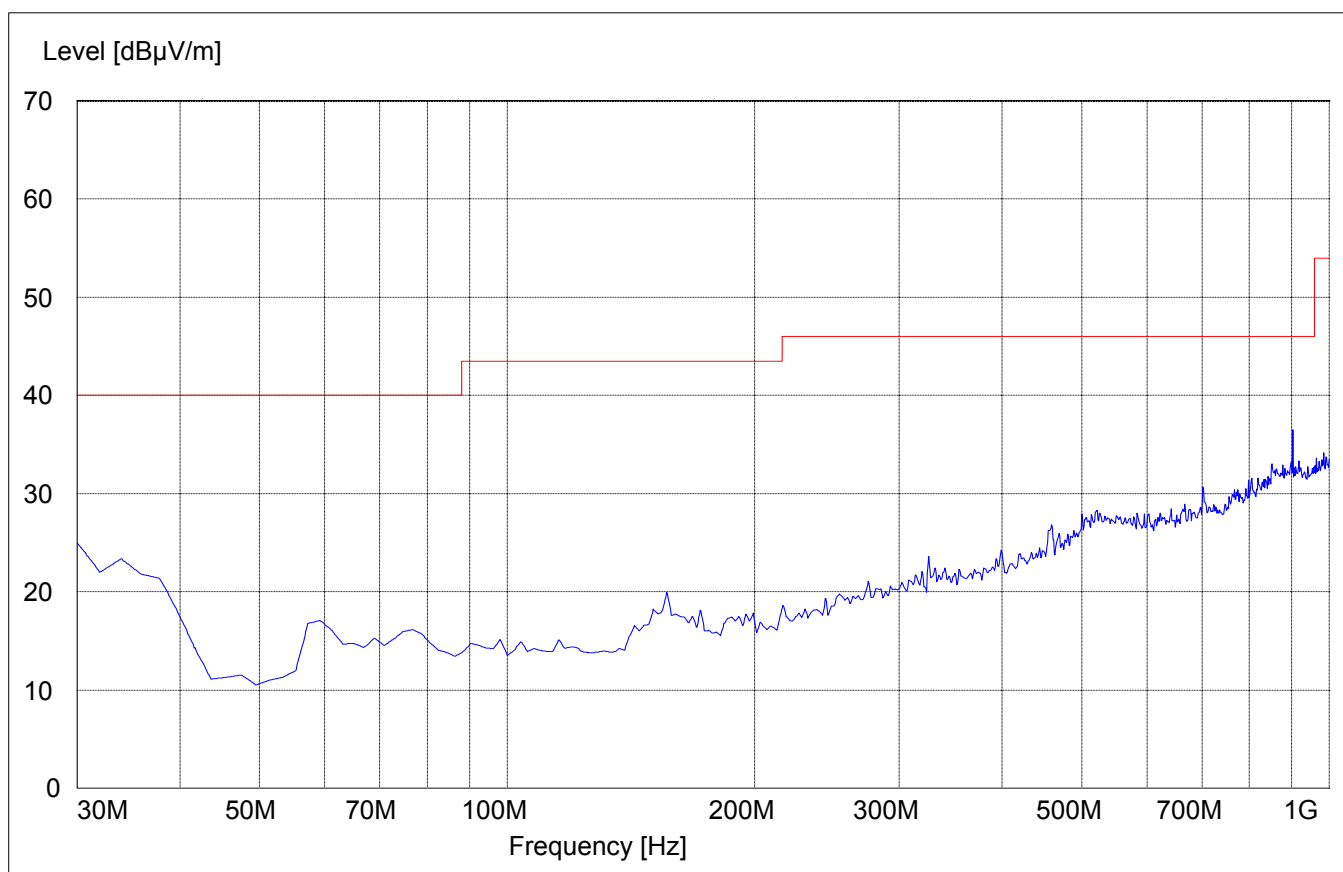

EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.247 (c) (1)

Lowest Channel (2412MHz): 1GHz – 3GHz

Note: The peak above the limit line is the carrier freq.

SWEEP TABLE:

SWEEP TABLE:		"BT Spuri hi 1-3G"				
Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

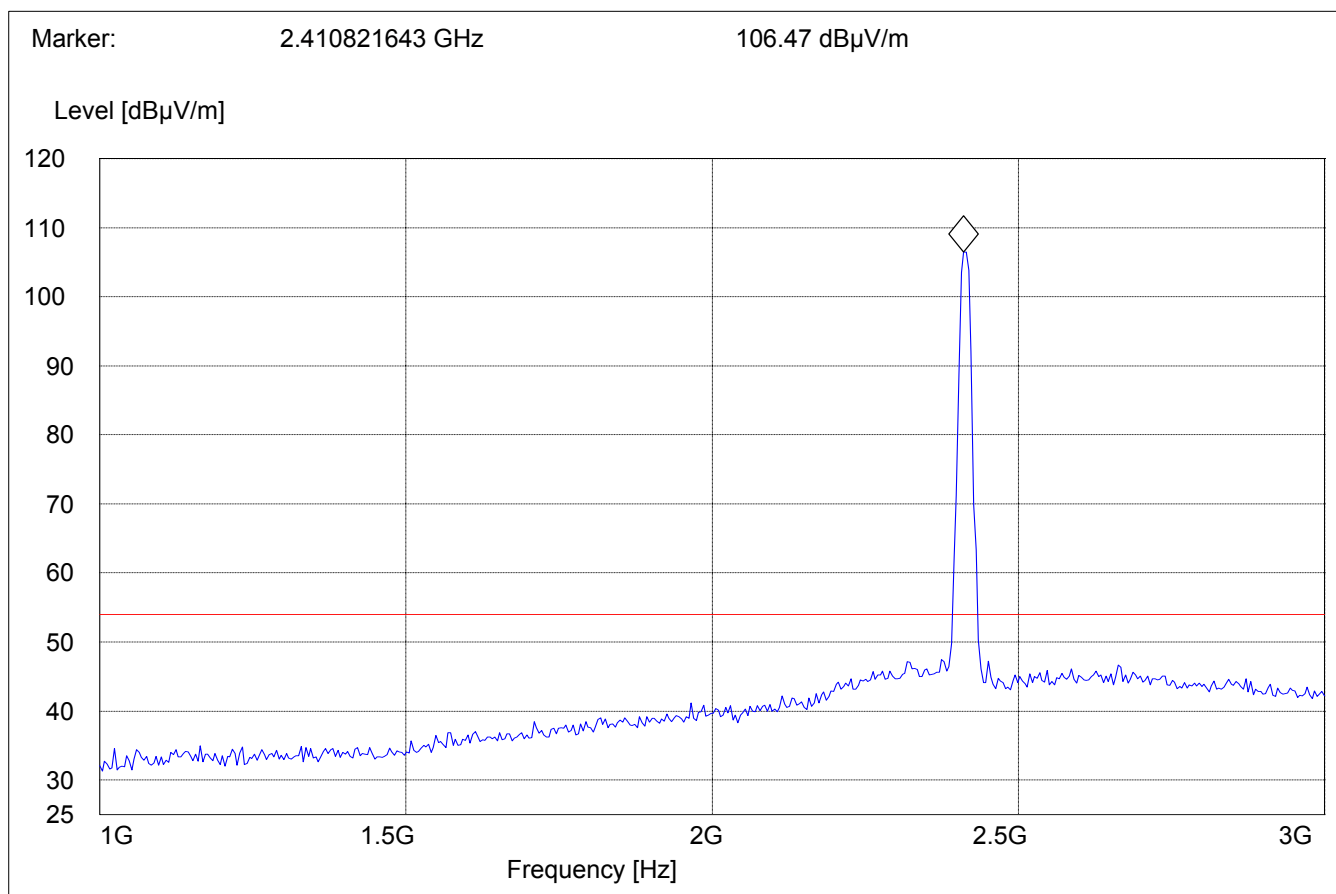


EMISSION LIMITATIONS - Radiated (Transmitter) Lowest Channel (2412MHz): 3GHz – 18GHz

§ 15.247 (c) (1)

SWEEP TABLE:

"BT Spuri hi 3-18G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

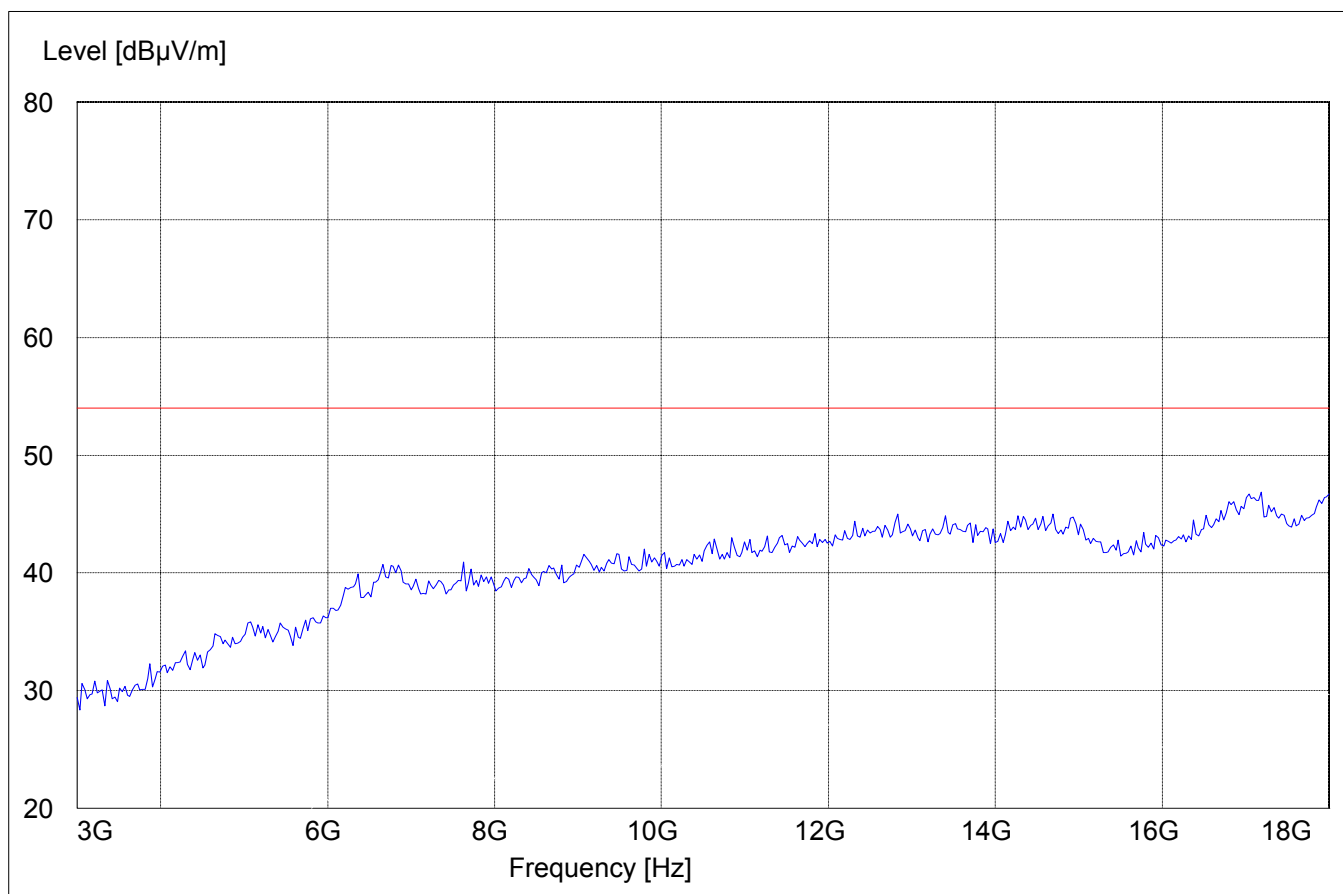


EMISSION LIMITATIONS - Radiated (Transmitter) Mid Channel (2437MHz): 1GHz – 3GHz

§ 15.247 (c) (1)

Note: The peak above the limit line is the carrier freq.

SWEEP TABLE:

		"BT Spuri hi 1-3G"				
Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

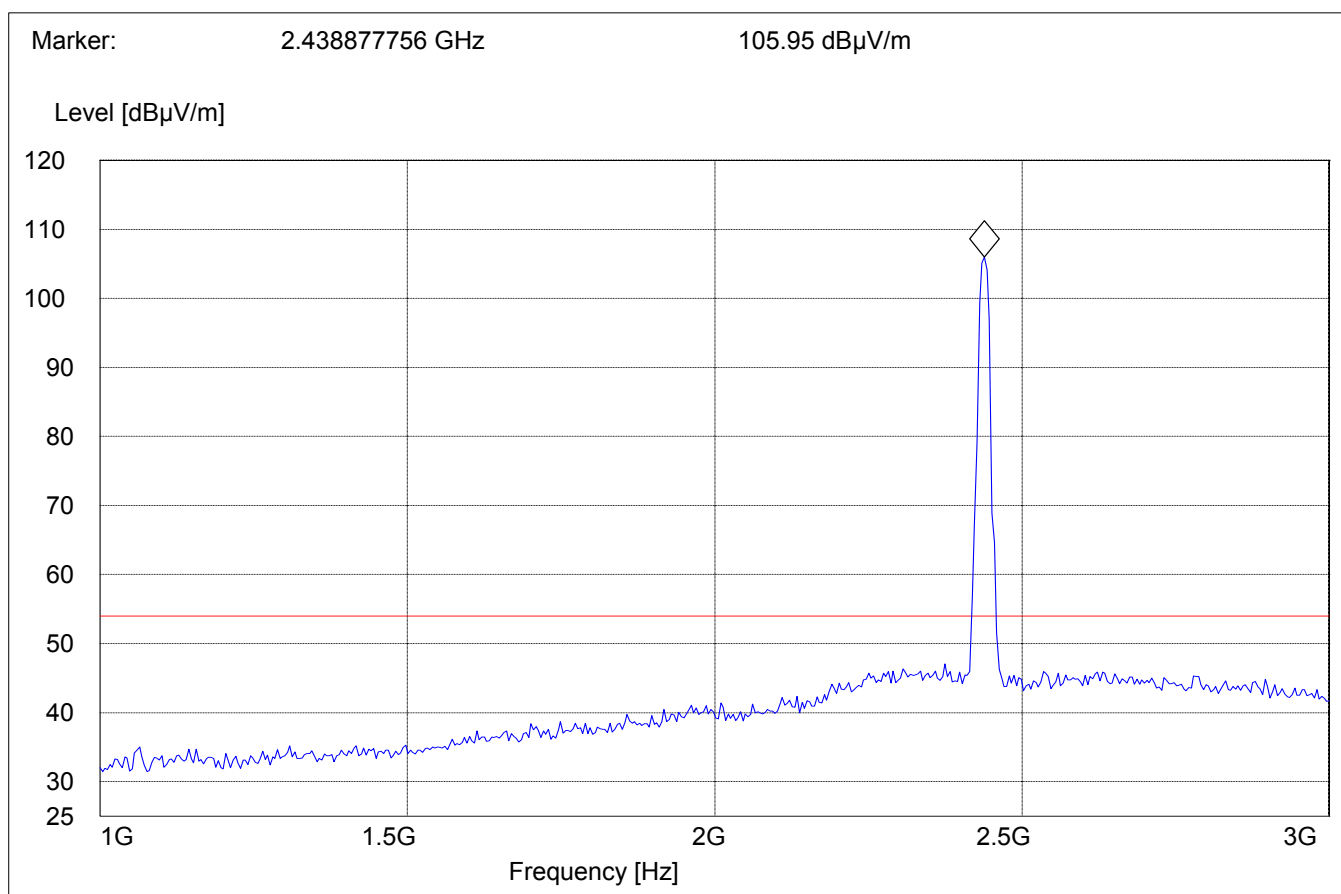


EMISSION LIMITATIONS - Radiated (Transmitter) Mid Channel (2437MHz): 3GHz – 18GHz

§ 15.247 (c) (1)

SWEEP TABLE:

		"BT Spuri hi 3-18G"					
Start	Stop	Detector	Meas.	RBW		Transducer	
Frequency	Frequency	Time	Bandw.		VBW		
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)	

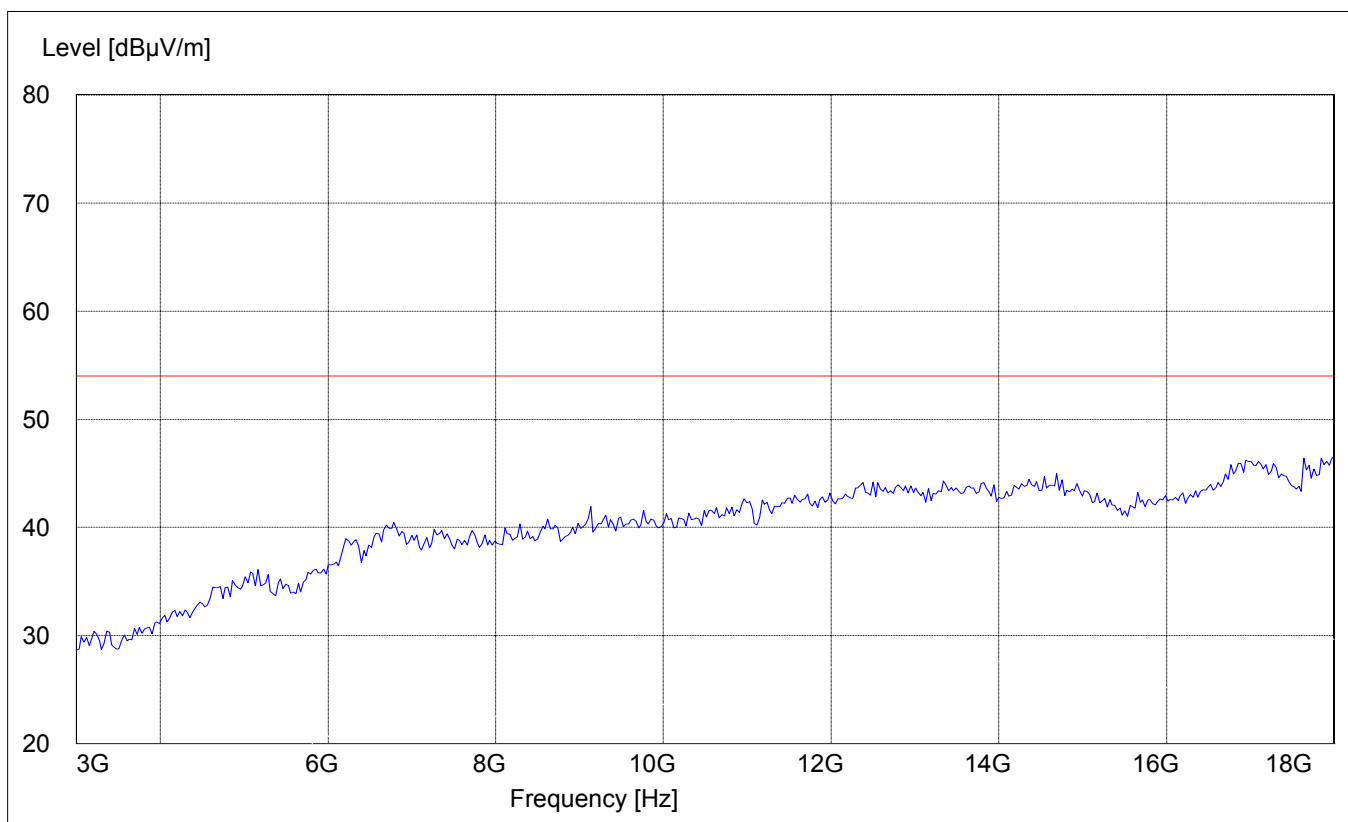

EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.247 (c) (1)

Highest Channel (2462MHz): 1GHz – 3GHz

Note: The peak above the limit line is the carrier freq.

SWEEP TABLE:

		"BT Spuri hi 1-3G"				
Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

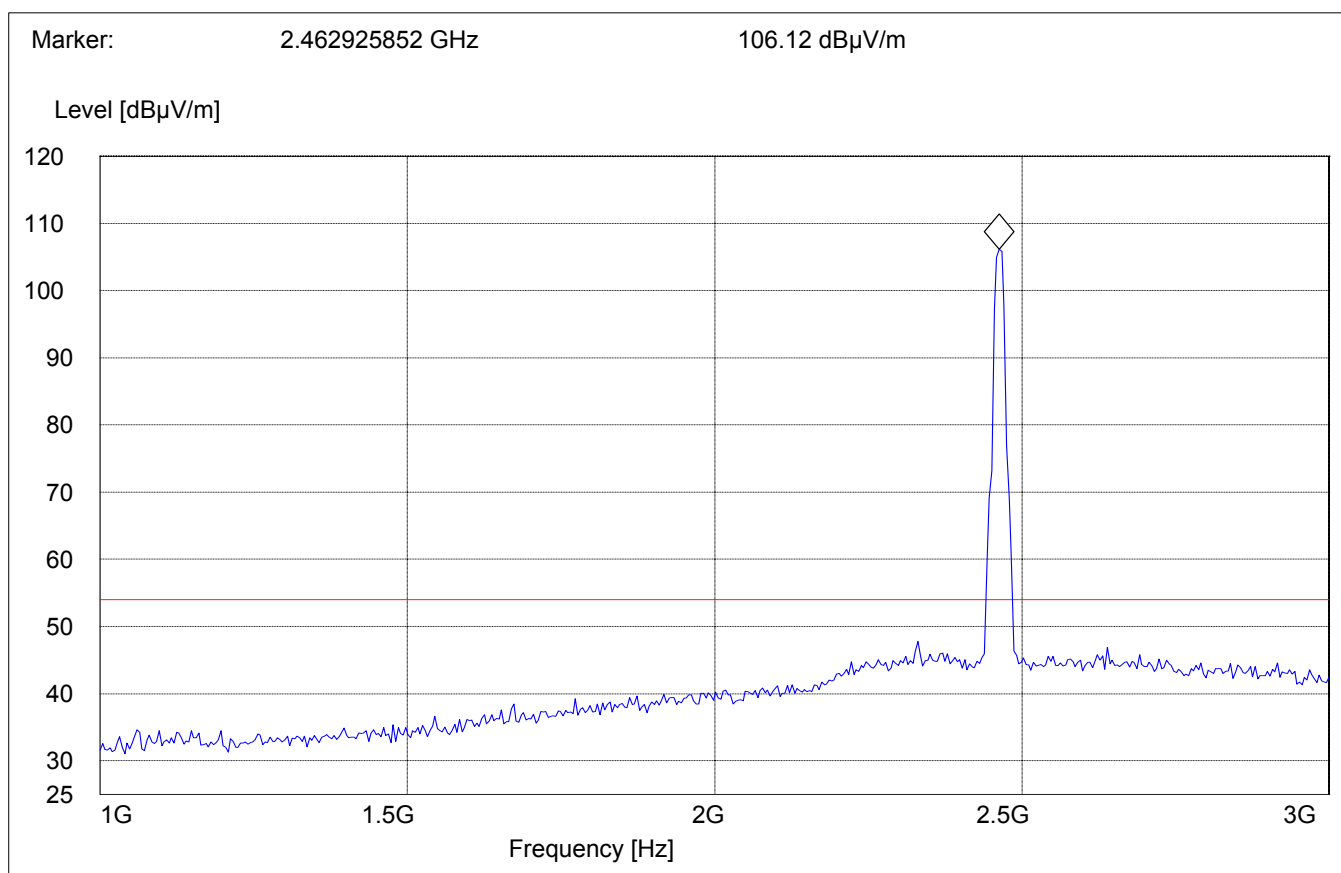

EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.247 (c) (1)

Highest Channel (2462MHz): 3GHz – 18GHz

SWEEP TABLE:

"BT Spuri hi 3-18G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

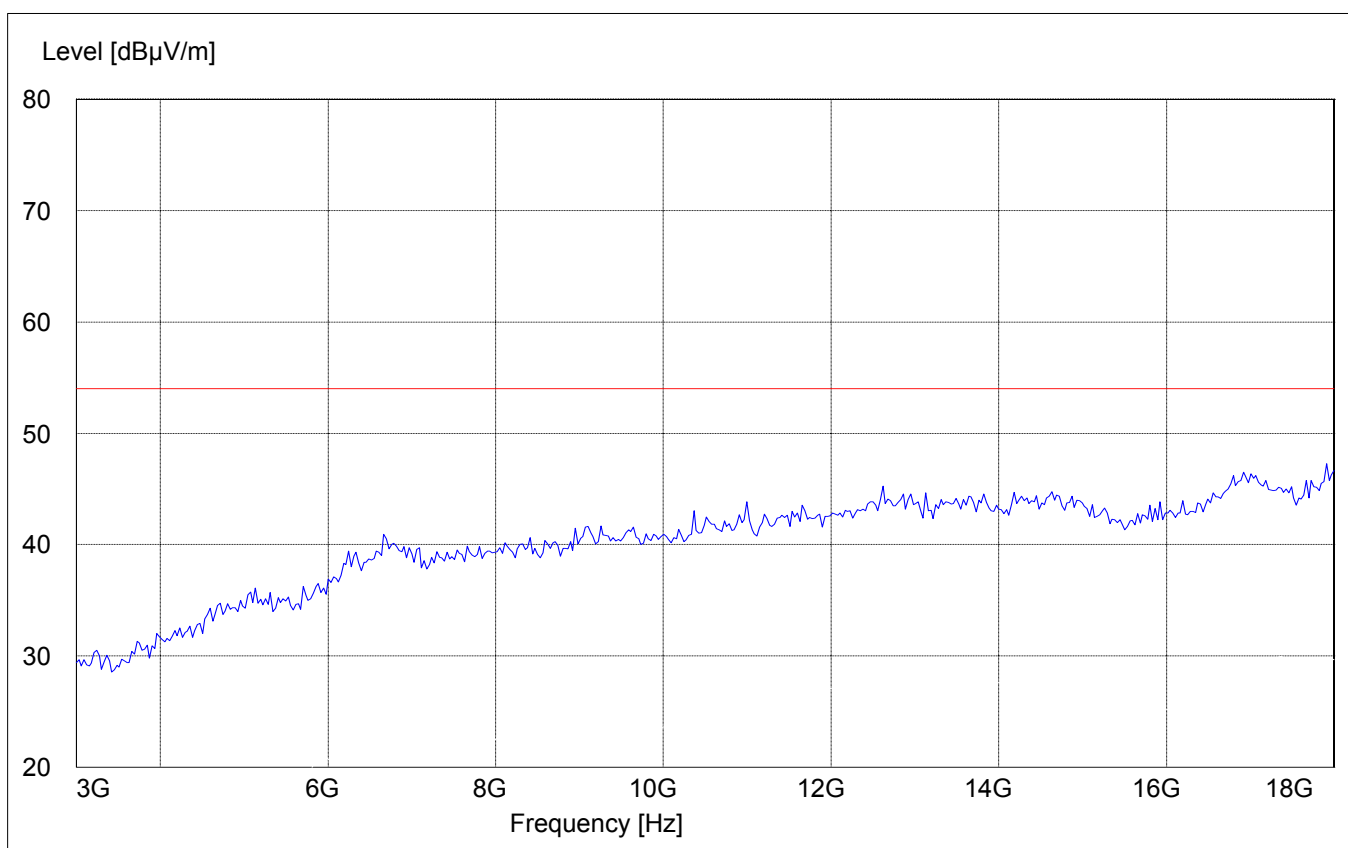

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


18GHz – 25GHz

Note: This plot is valid for low, mid, high channels (worst-case plot)

SWEEP TABLE:

"BT Spuri hi 18-25G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	25 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

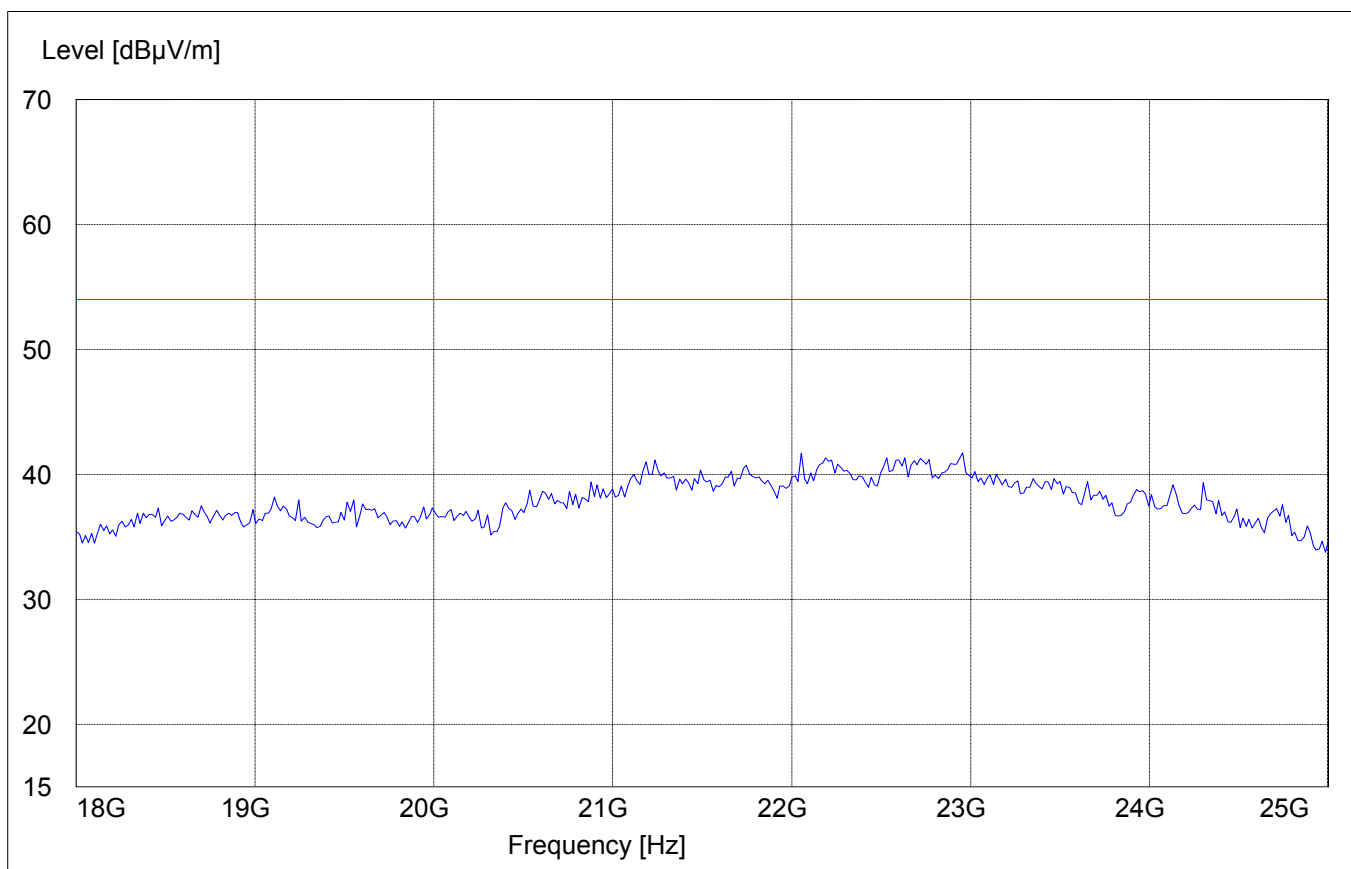

EMISSION LIMITATIONS (CDMA 850 Collocated)

§ 15.247 (c) (1)

Transmitter (Radiated)

WLAN Collocated with CDMA Module 850MHz band

Transmit at Lowest channel Frequency 2412MHz			
Frequency (MHz)	Level (dBμV/m)		
	Peak	Quasi-Peak	Average
1649.29	56.76		46.88
2478.95	64.19		51.95
3210.42	38.39		
4112.22	38.02		
4953.90	43.40		
Transmit at Middle channel Frequency 2437MHz			
Frequency (MHz)	Level (dBμV/m)		
	Peak	Quasi-Peak	Average
1673.34	60.76		52.29
2511.02	58.28		49.99
3270.54	35.35		
4172.34	39.63		
5014.02	43.45		
7298.6	48.01		
Transmit at Highest channel Frequency 2462MHz			
Frequency (MHz)	Level (dBμV/m)		
	Peak	Quasi-Peak	Average
1697.4	57.47		45.99
2543.08	60.07		50.04
3300.6	41.32		
4232.46	38.62		
5074.14	44.50		
7388.77	45.47		

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Lowest Channel (2412MHz): 30MHz – 1GHz

Cellular 850 Tx @ low channel

Note: This plot is valid for low, mid, high channels (worst-case plot)


SWEEP TABLE:

"BT Spuri hi 30-1G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

Note:

- This plot is valid for low, mid, high channels (worst-case plot)
- The peak above the limit line is the Cellular 850 carrier freq.

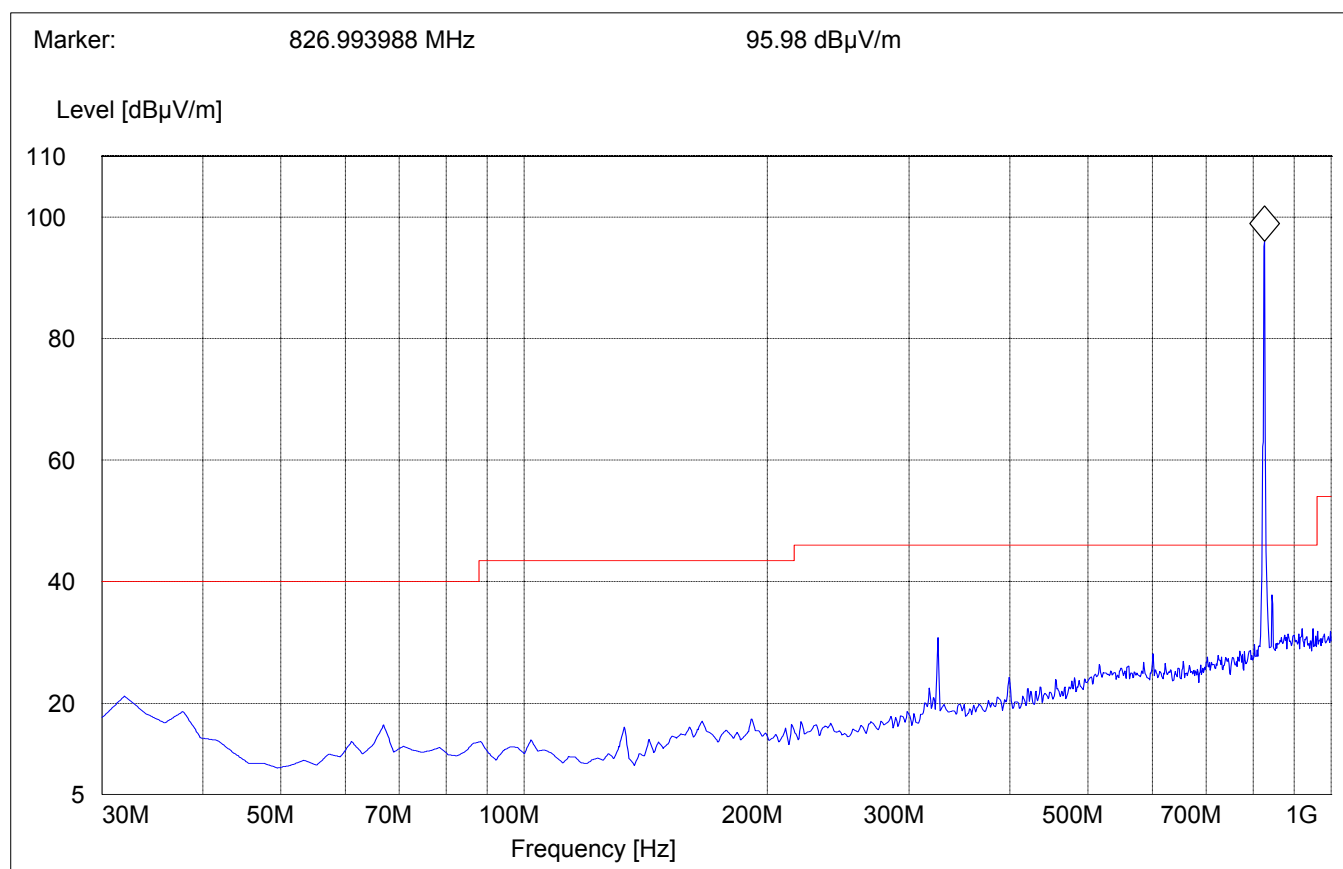

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Lowest Channel (2412MHz): 1GHz – 3GHz


Cellular 850 Tx @ Low channel

Note: The marked peak is 3rd harmonic of 850 TCH & Peak @ 1.6MHz is 2nd harmonic of 850 TCH. (CDMA Tx is exempt from part 15 limits) and peak above the limit line is the carrier freq. WLAN.

SWEEP TABLE:

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

"BT Spuri hi 1-3G"

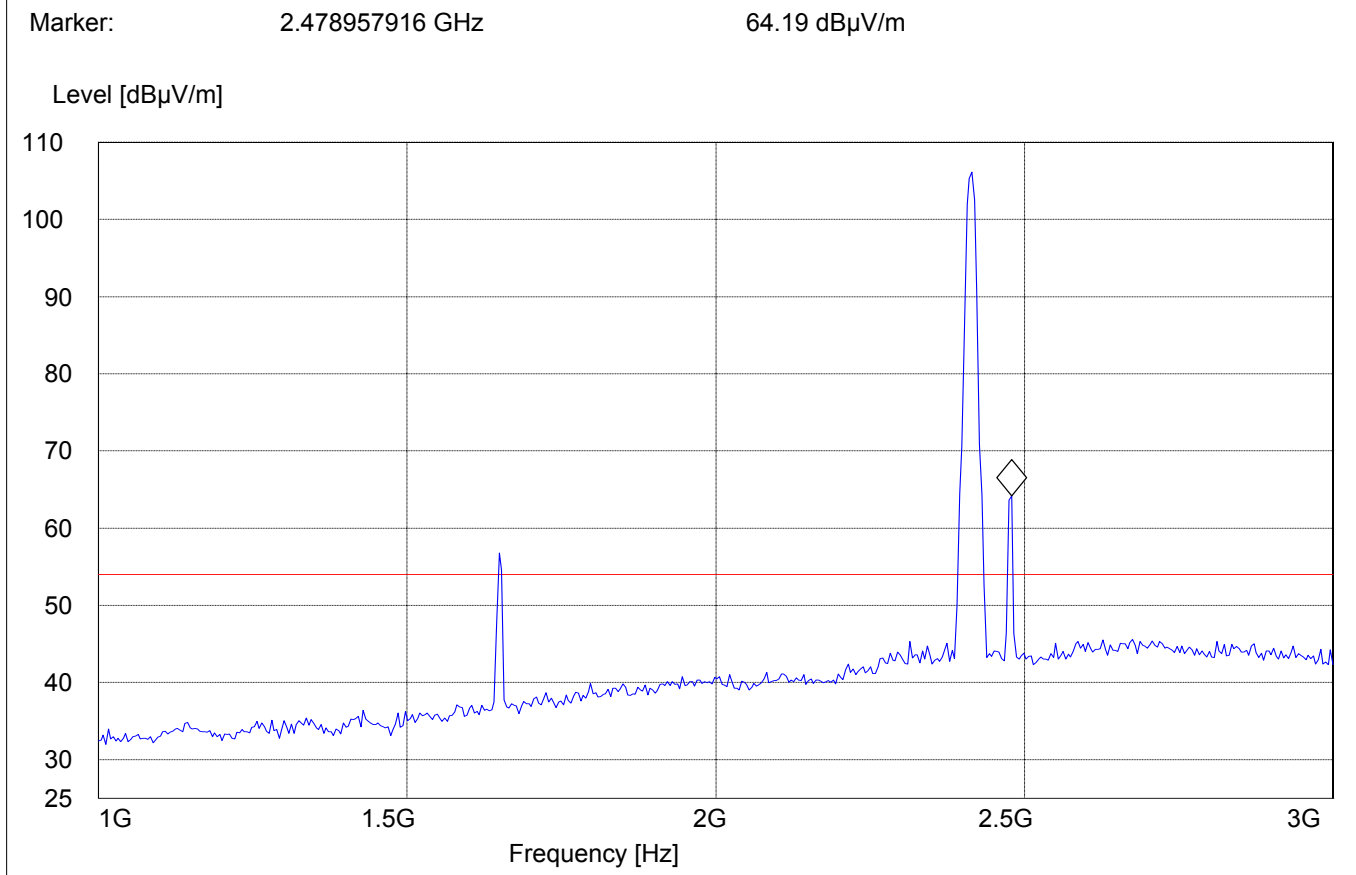

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Lowest Channel (2412MHz): 3GHz – 18GHz

Cellular 850 Tx @ Low channel

SWEEP TABLE:

"BT Spuri hi 3-18G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

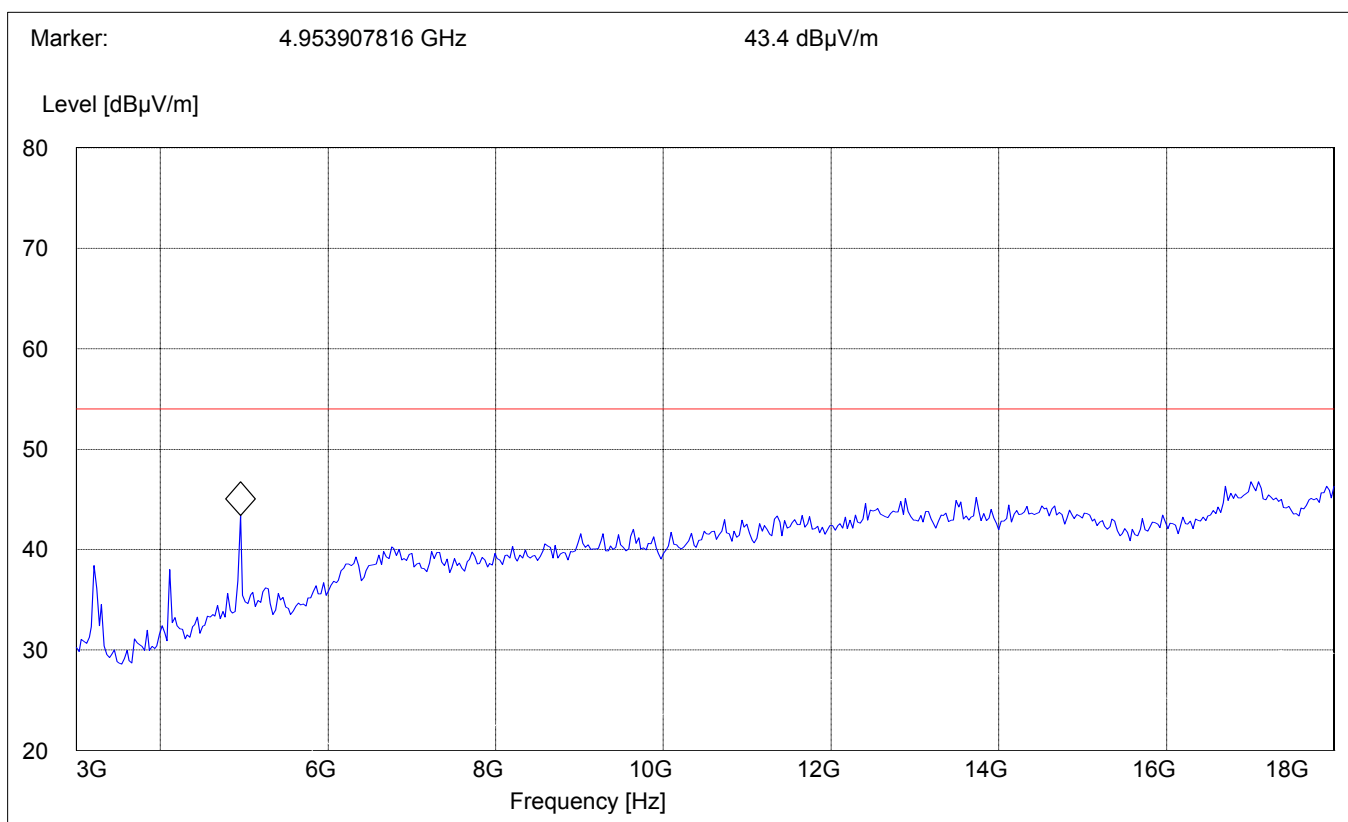

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Middle Channel (2437MHz): 1GHz – 3GHz


Cellular 850 Tx @ Mid channel

Note: The marked peak is 2nd harmonic of 850 TCH & Peak @ 2.511MHz is 3rd harmonic of 850 TCH. (CDMA Tx is exempt from part 15 limits) and peak above the limit line is the carrier freq. WLAN.

SWEEP TABLE:

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

"BT Spuri hi 1-3G"

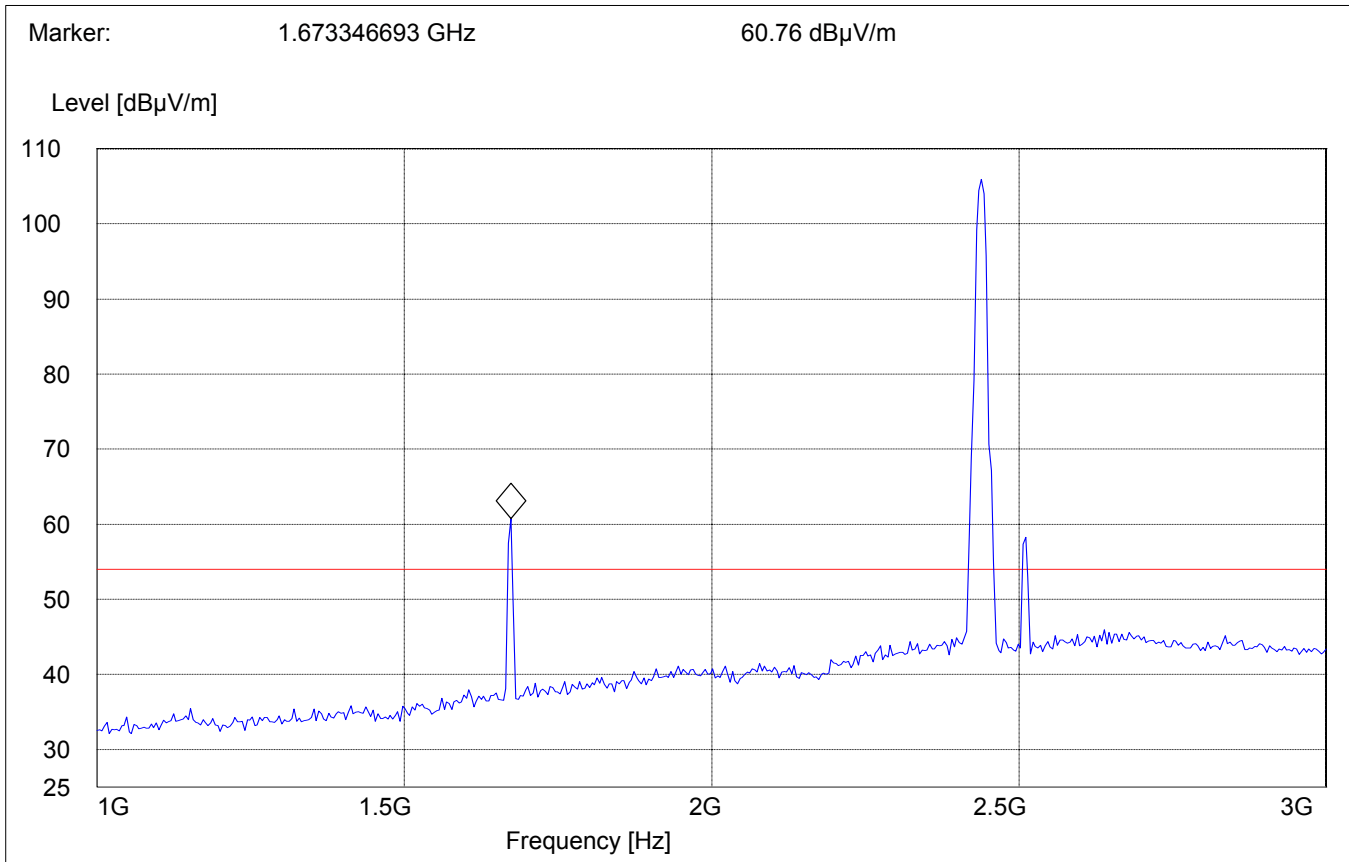

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Middle Channel (2437MHz): 3GHz – 18GHz

Cellular 850 Tx @ Mid channel

SWEEP TABLE:

"BT Spuri hi 3-18G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

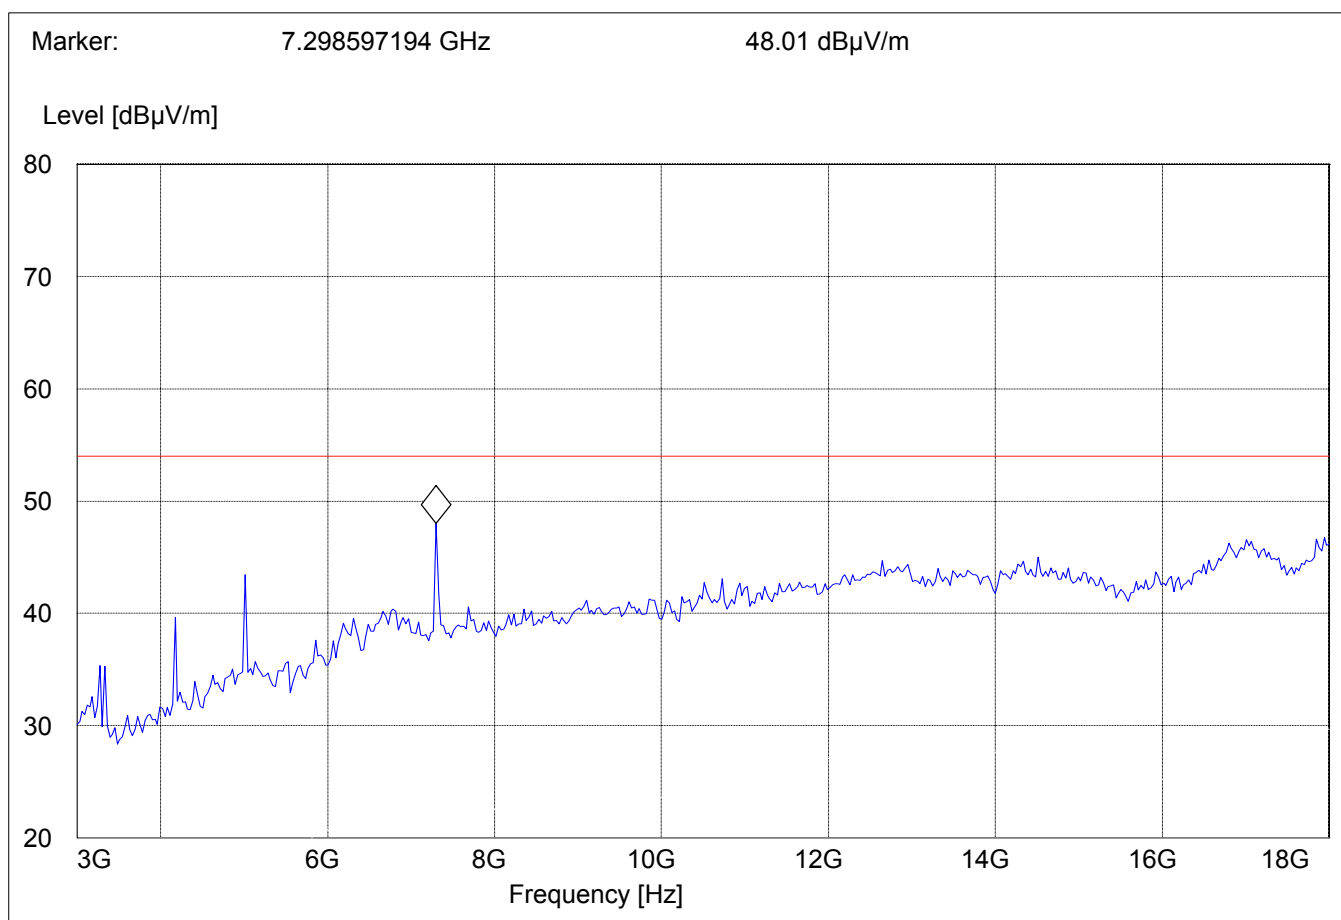

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Highest Channel (2462MHz): 1GHz – 3GHz


Cellular 850 Tx @ High channel

Note: The marked peak is 3rd harmonic of 850 TCH & Peak @ 1.697MHz is 2nd harmonic of 850 TCH. (CDMA Tx is exempt from part 15 limits) and peak above the limit line is the carrier freq. WLAN.

SWEEP TABLE:

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

"BT Spuri hi 1-3G"

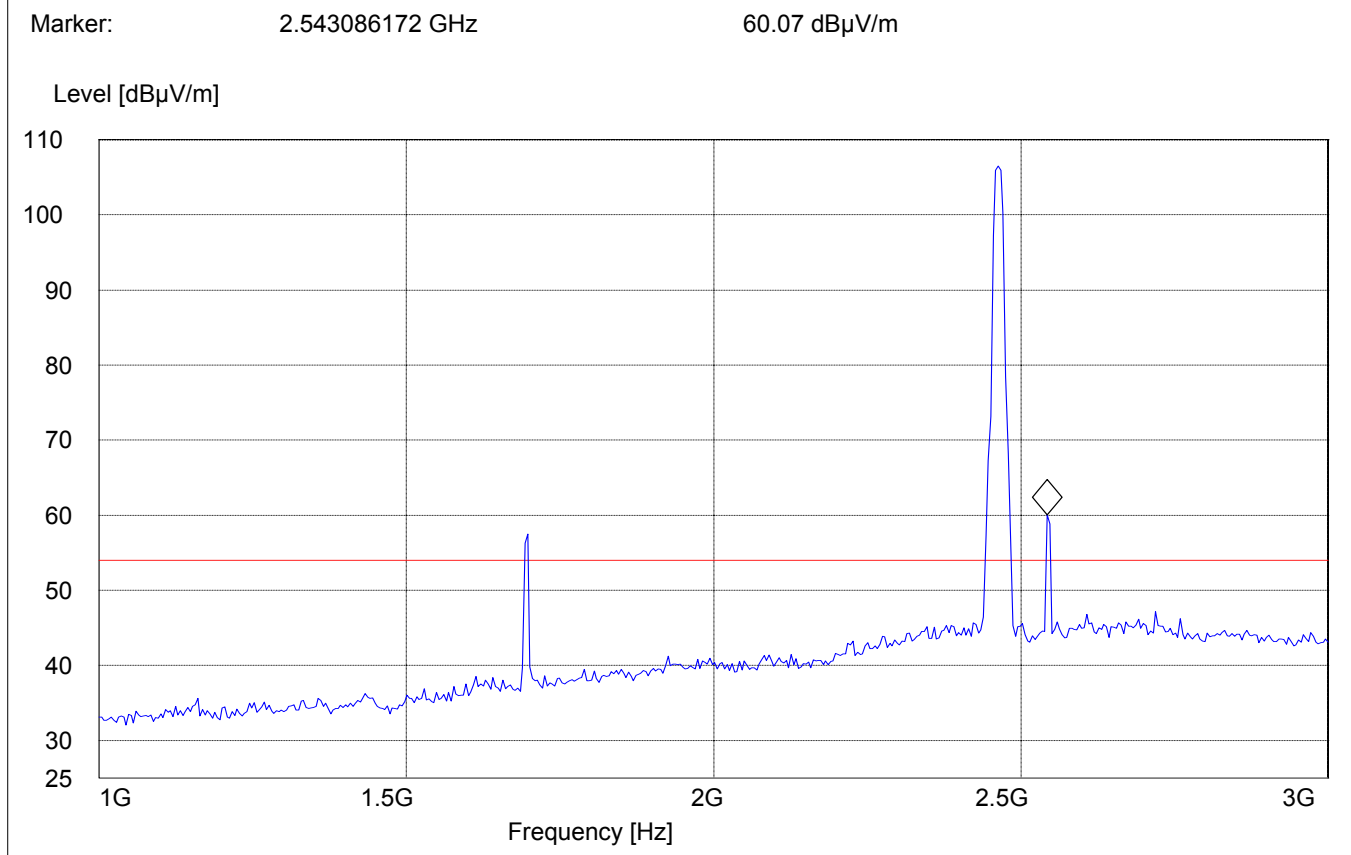

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Highest Channel (2462MHz): 3GHz – 18GHz

Cellular 850 Tx @ High channel

SWEEP TABLE:

"BT Spuri hi 3-18G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

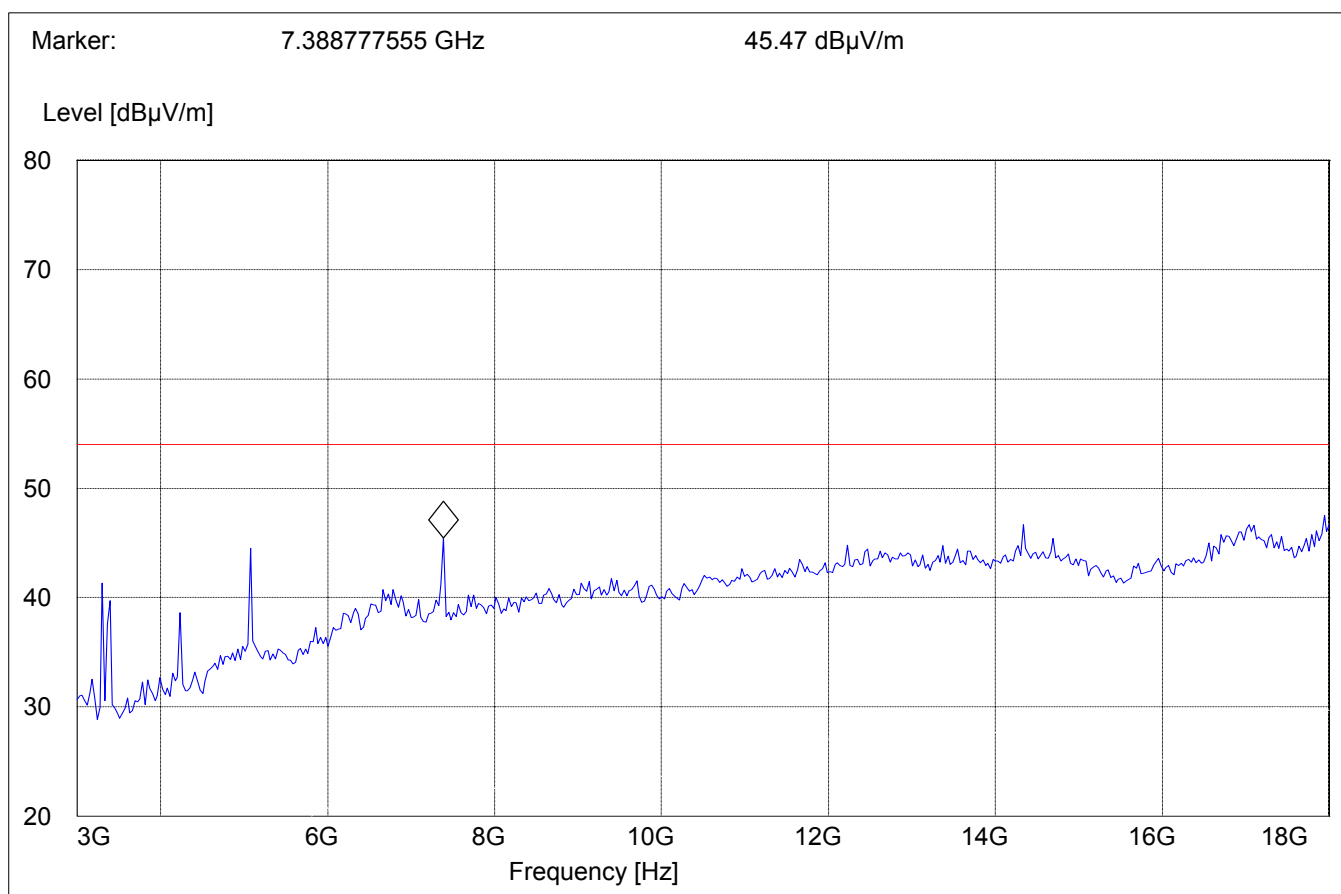

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


18GHz – 25GHz

Note: This plot is valid for low, mid, high channels (worst-case plot)

SWEEP TABLE:

"BT Spuri hi 18-25G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	25 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

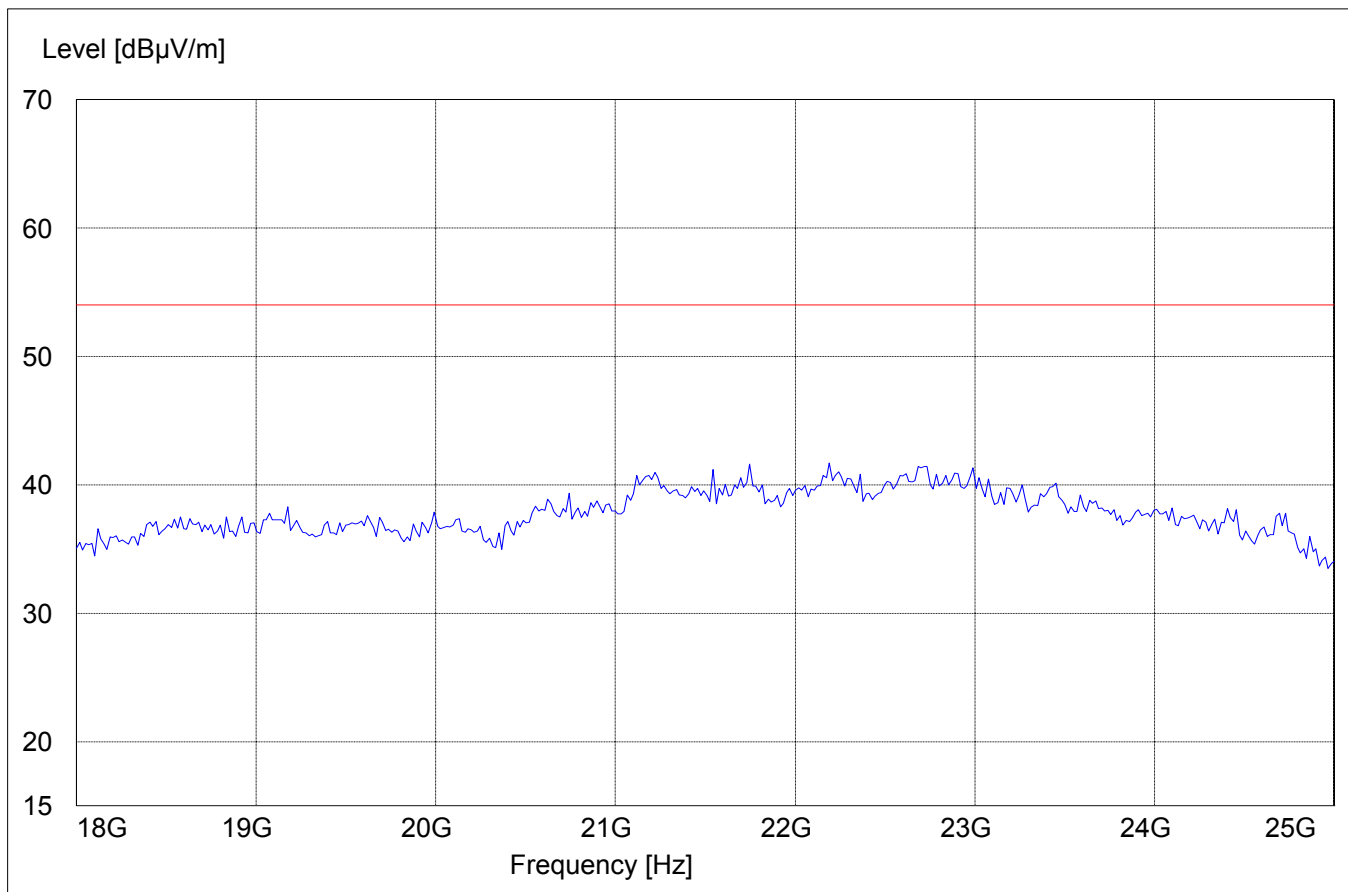

EMISSION LIMITATIONS (CDMA 1900 Collocated)

§ 15.247 (c) (1)

Transmitter (Radiated)

WLAN Collocated with CDMA Module 1900MHz band

Transmit at Lowest channel Frequency 2412MHz			
Frequency (MHz)	Level (dBμV/m)		
	Peak	Quasi-Peak	Average
1288.57	48.96		40.88
2114.22	55.22		45.85
3691.38	45.97		
5555.11	48.07		
Transmit at Middle channel Frequency 2437MHz			
Frequency (MHz)	Level (dBμV/m)		
	Peak	Quasi-Peak	Average
1320.64	54.93		47.21
2142.2	67.22		53.21
3000	40.20		
3751.5	42.73		
5615.23	52.95		
Transmit at Highest channel Frequency 2462MHz			
Frequency (MHz)	Level (dBμV/m)		
	Peak	Quasi-Peak	Average
2174.34	67		50.77
3000.00	44.63		28.51
3811.62	35.40		
5705.41	56.32		32.80
7388.77	44.37		32.24

EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.247 (c) (1)

Lowest Channel (2412MHz): 30MHz – 1GHz

PCS 1900 Tx @ Low channel

Note: This plot is valid for low, mid, high channels (worst-case plot)

SWEEP TABLE:		"BT Spuri hi 30-1G"			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

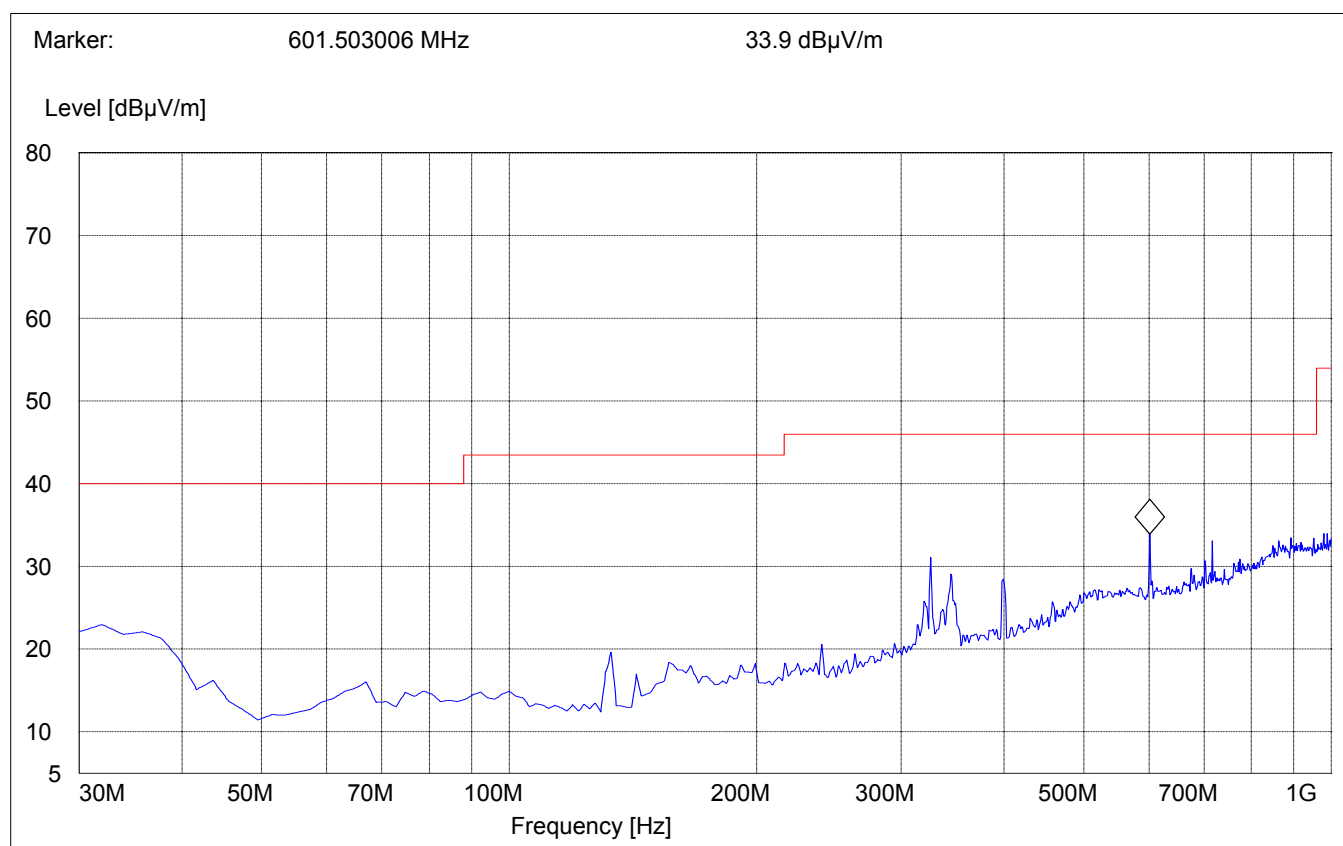

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Lowest Channel (2412MHz): 1GHz – 3GHz


PCS 1900 Tx @ Low channel

Average measurement

Note: The higher peak above the limit line is the WLAN carrier freq. & lower peak above the limit line is the CDMA carrier freq.

SWEEP TABLE:

		"BT Spuri hi 1-3G"					
Start	Stop	Detector	Meas.	RBW		Transducer	
Frequency	Frequency	Time	Bandw.		VBW		
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)	

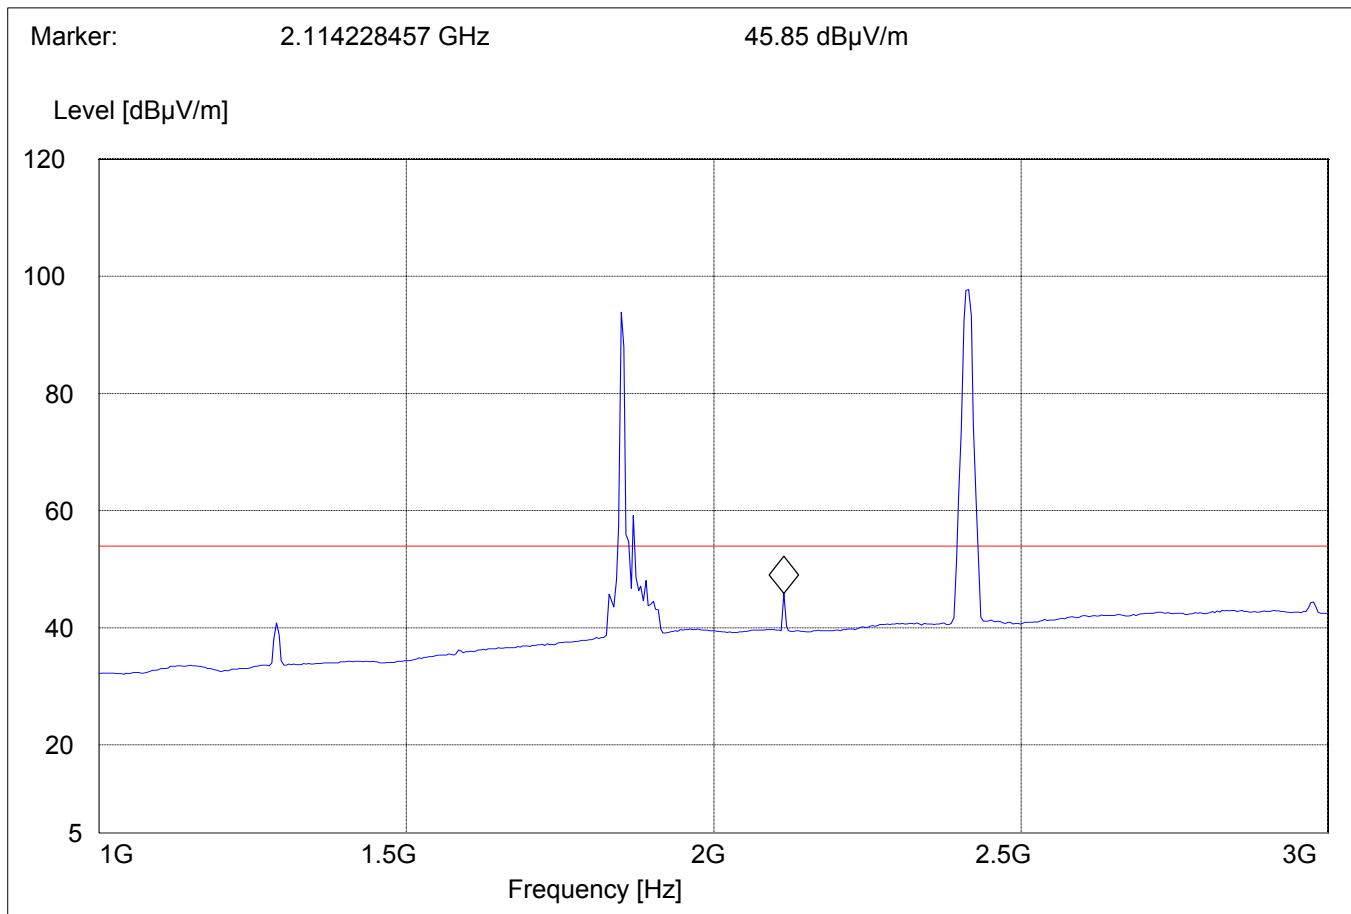

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Lowest Channel (2412MHz): 3GHz – 18GHz

PCS 1900 Tx @ Low channel

SWEEP TABLE:

"BT Spuri hi 3-18G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

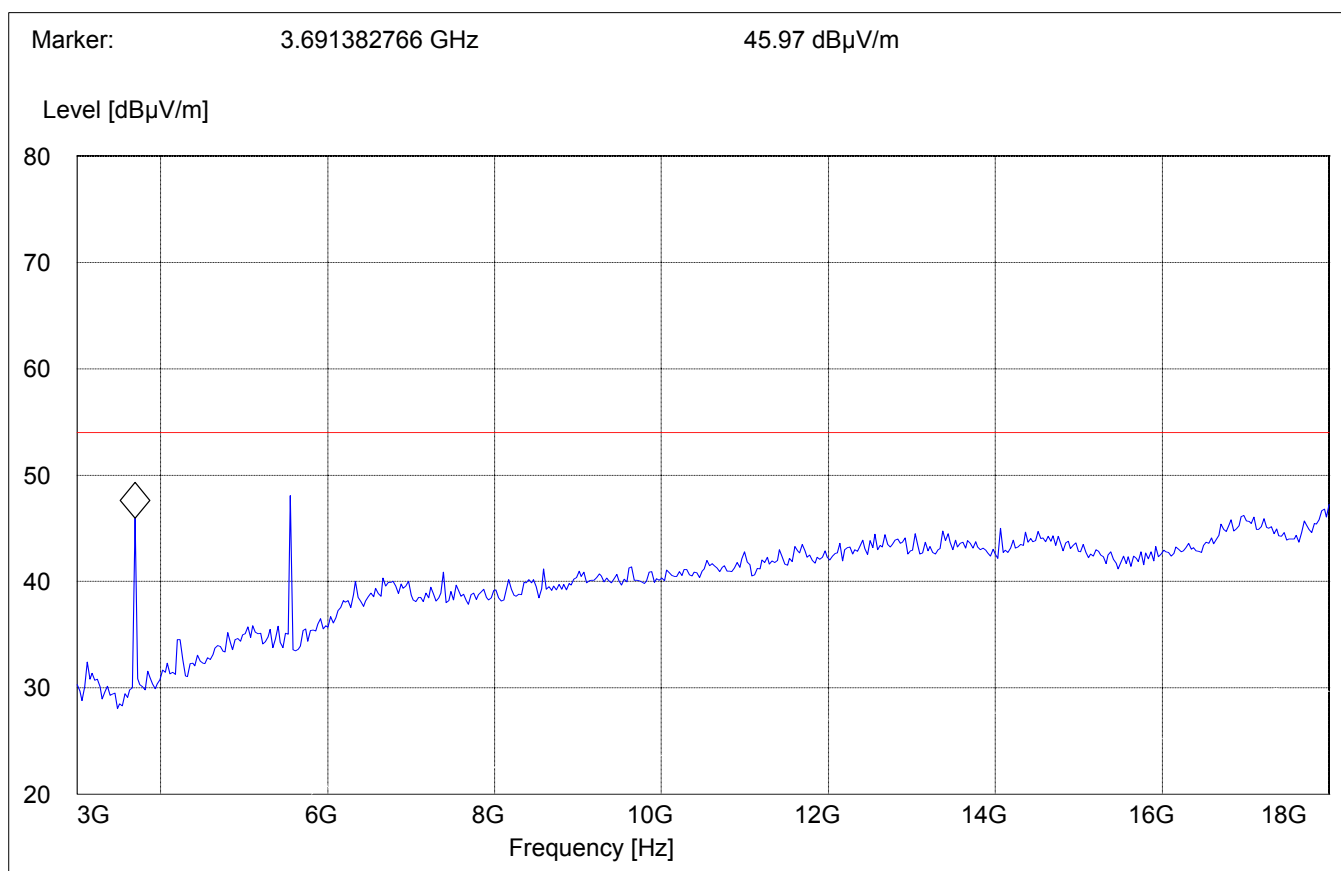

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Mid Channel (2437MHz): 1GHz – 3GHz

PCS 1900 Tx @ Mid channel

Average measurement

Note: The higher peak above the limit line is the WLAN carrier freq. & lower peak above the limit line is the CDMA carrier freq.

SWEEP TABLE:		"BT Spuri hi 1-3G"				
Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

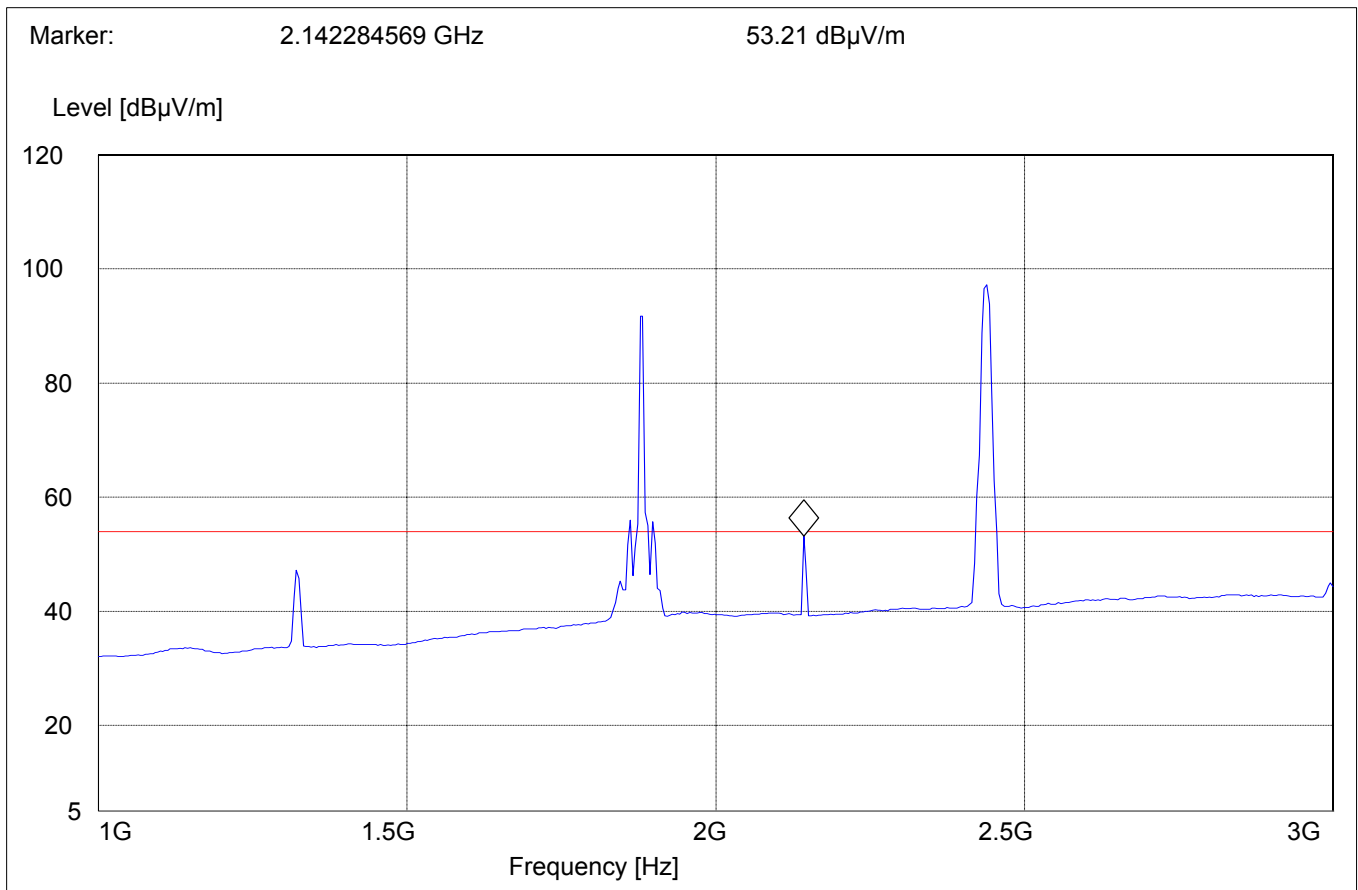

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Mid Channel (2437MHz): 3GHz – 18GHz


PCS 1900 Tx @ Mid channel

Note: The marked frequency is 3rd harmonic of CDMA TCH (CDMA Tx is exempt from part 15 limits)

SWEEP TABLE:

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

"BT Spuri hi 3-18G"

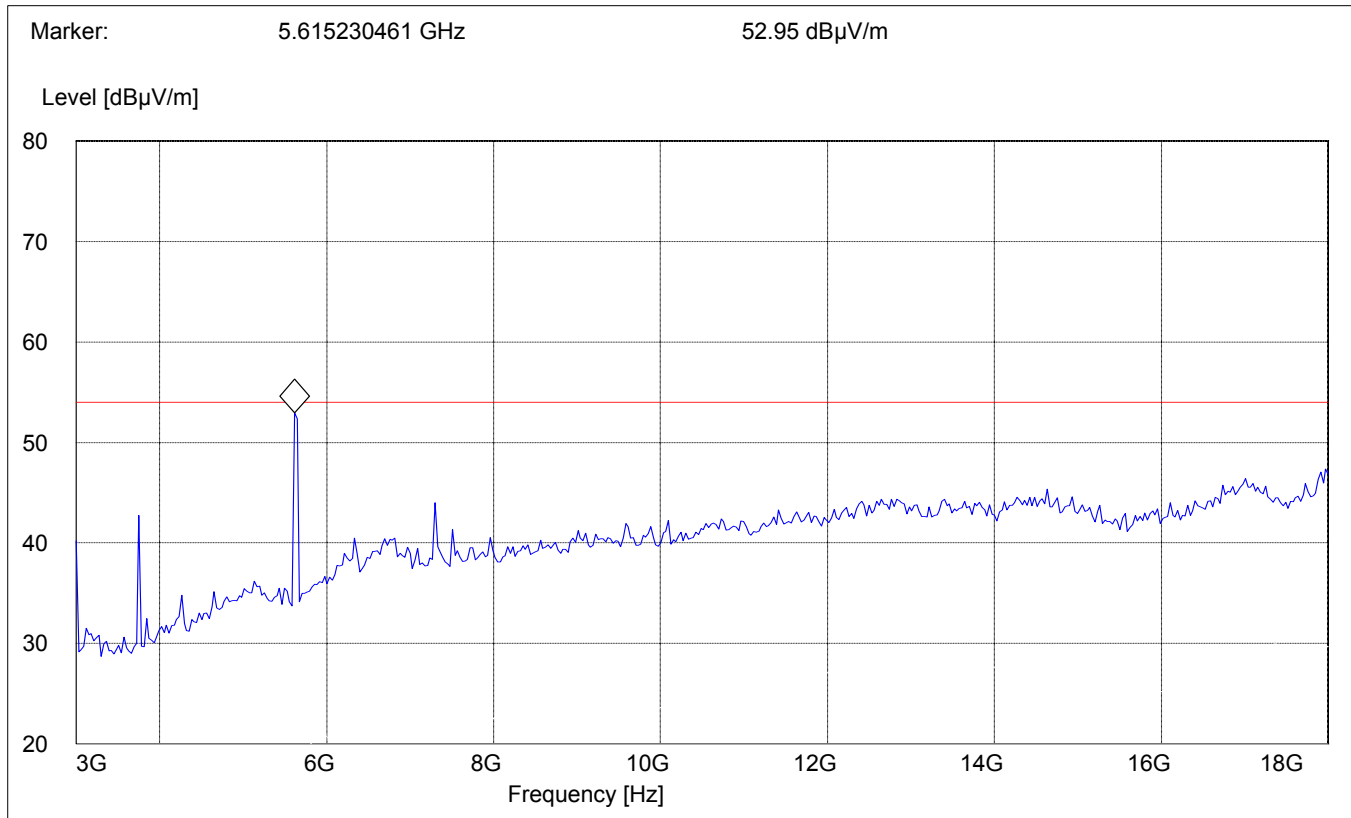

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Highest Channel (2462MHz): 1GHz – 3GHz

PCS 1900 Tx @ High channel

Average measurement

Note: The higher peak above the limit line is the WLAN carrier freq. & lower peak above the limit line is the CDMA carrier freq.

SWEEP TABLE:		"BT Spuri hi 1-3G"				
Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

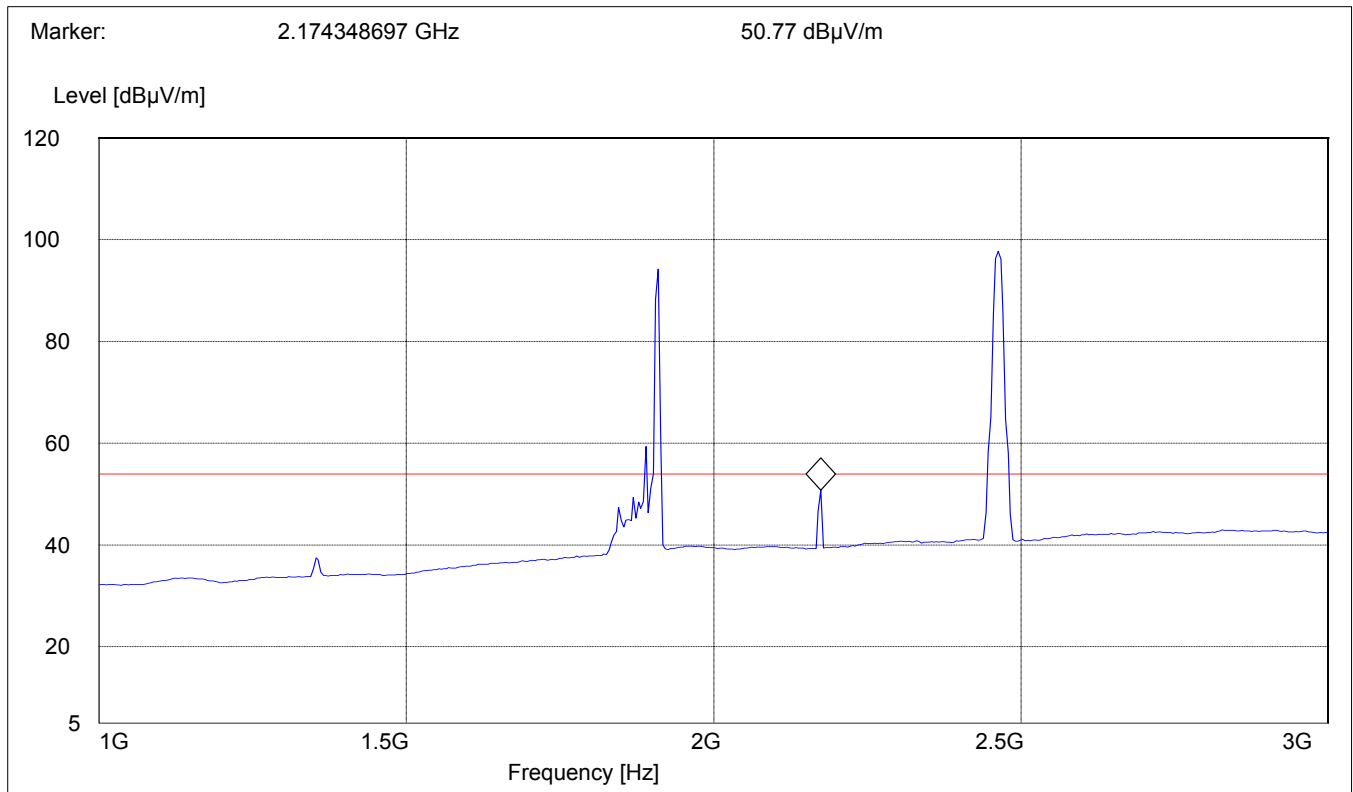

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Highest Channel (2462MHz): 3GHz – 18GHz


PCS 1900 Tx @ High channel

Note: The marked frequency is 3rd harmonic of CDMA TCH (CDMA Tx is exempt from part 15 limits)

SWEEP TABLE:

"BT Spuri hi 3-18G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

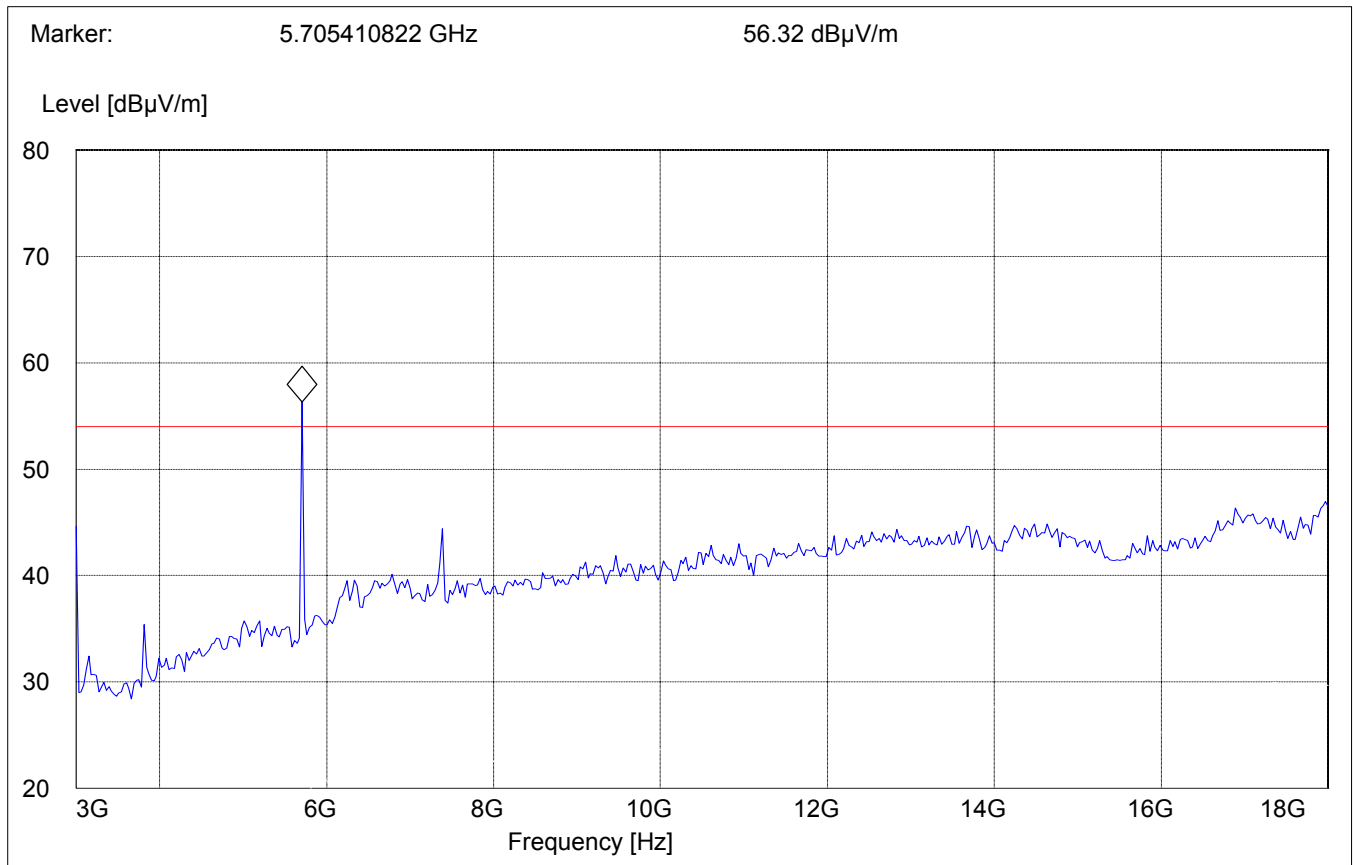

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


18GHz – 25GHz

Note: This plot is valid for low, mid, high channels (worst-case plot)

SWEEP TABLE:

"BT Spuri hi 18-25G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	25 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

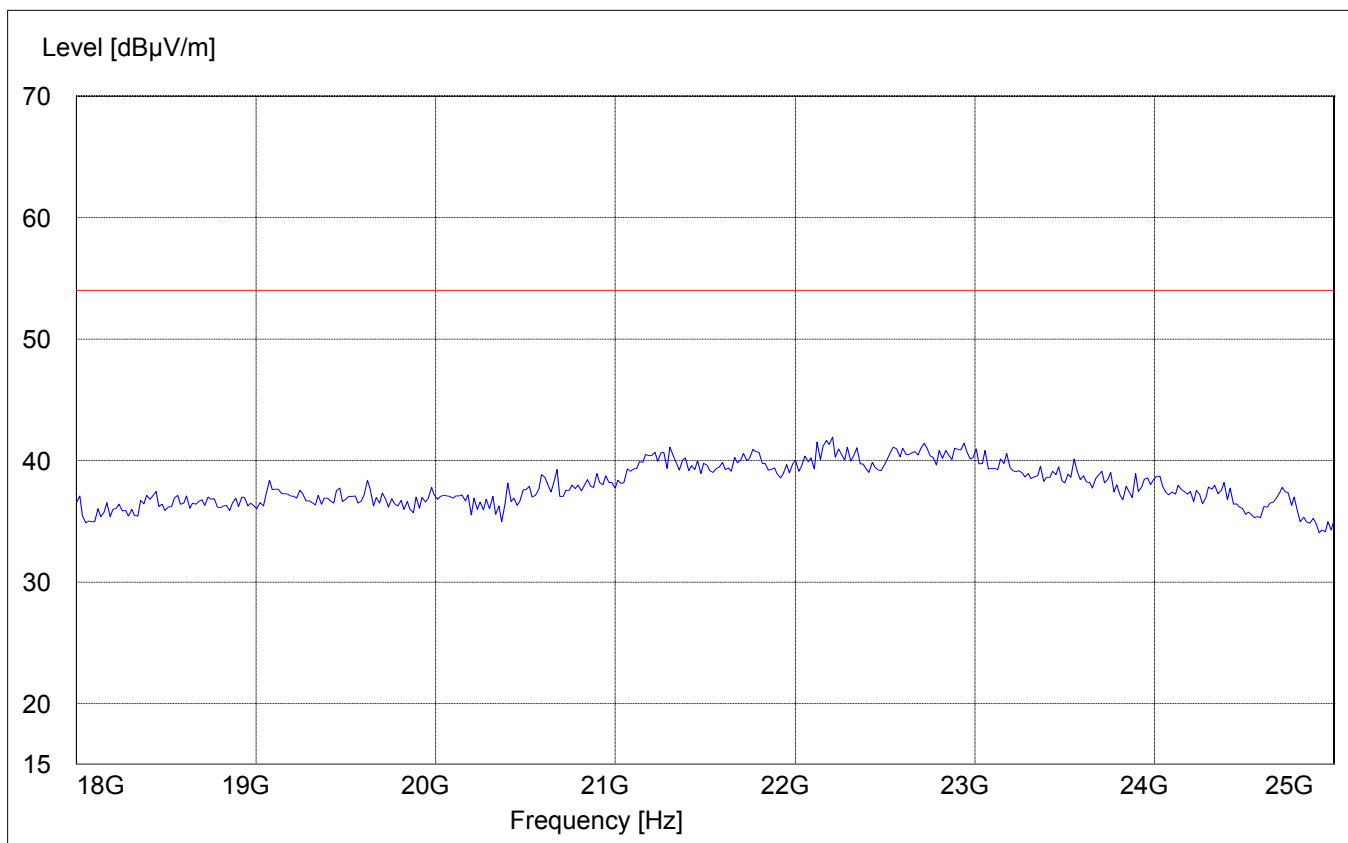

CONDUCTED EMISSIONS

§ 15.107/207

Measured with AC/DC power adapter

SWEEP TABLE: "55022 cond"

Short Description:		EN 55022 for 150KHz-30MHz			
Start	Stop	Detector	Meas	IF	Transducer
Frequency	Frequency		Time	Bandw.	
150.0 kHz	30.0 MHz	MaxPeak	Coupled	10 kHz	None

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)


Limit

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

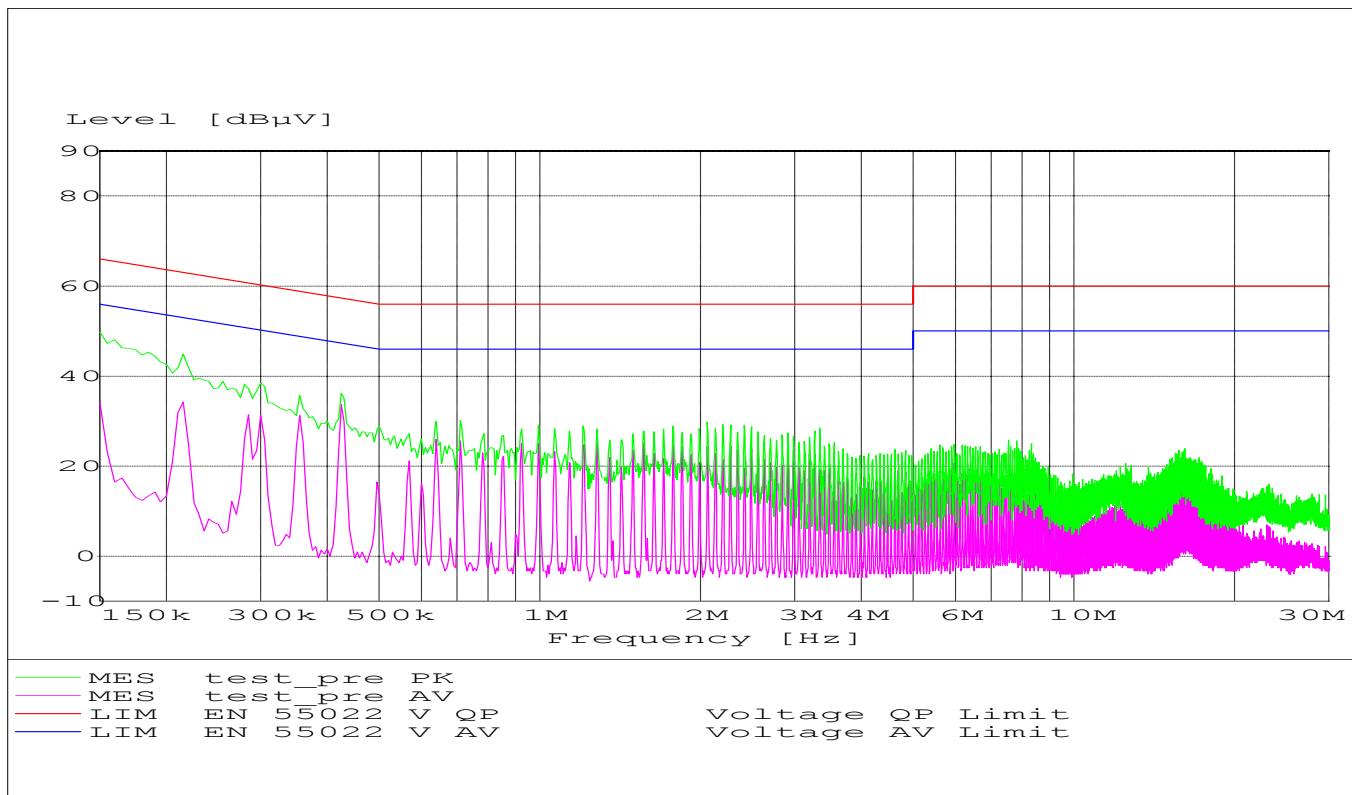

RECEIVER SPURIOUS RADIATION**§ 15.209****Limits**

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

NOTE:


The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

RECEIVER SPURIOUS RADIATION 30MHz – 1GHz

§ 15.209

SWEEP TABLE:

		"BT Spuri hi 30-1G"			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

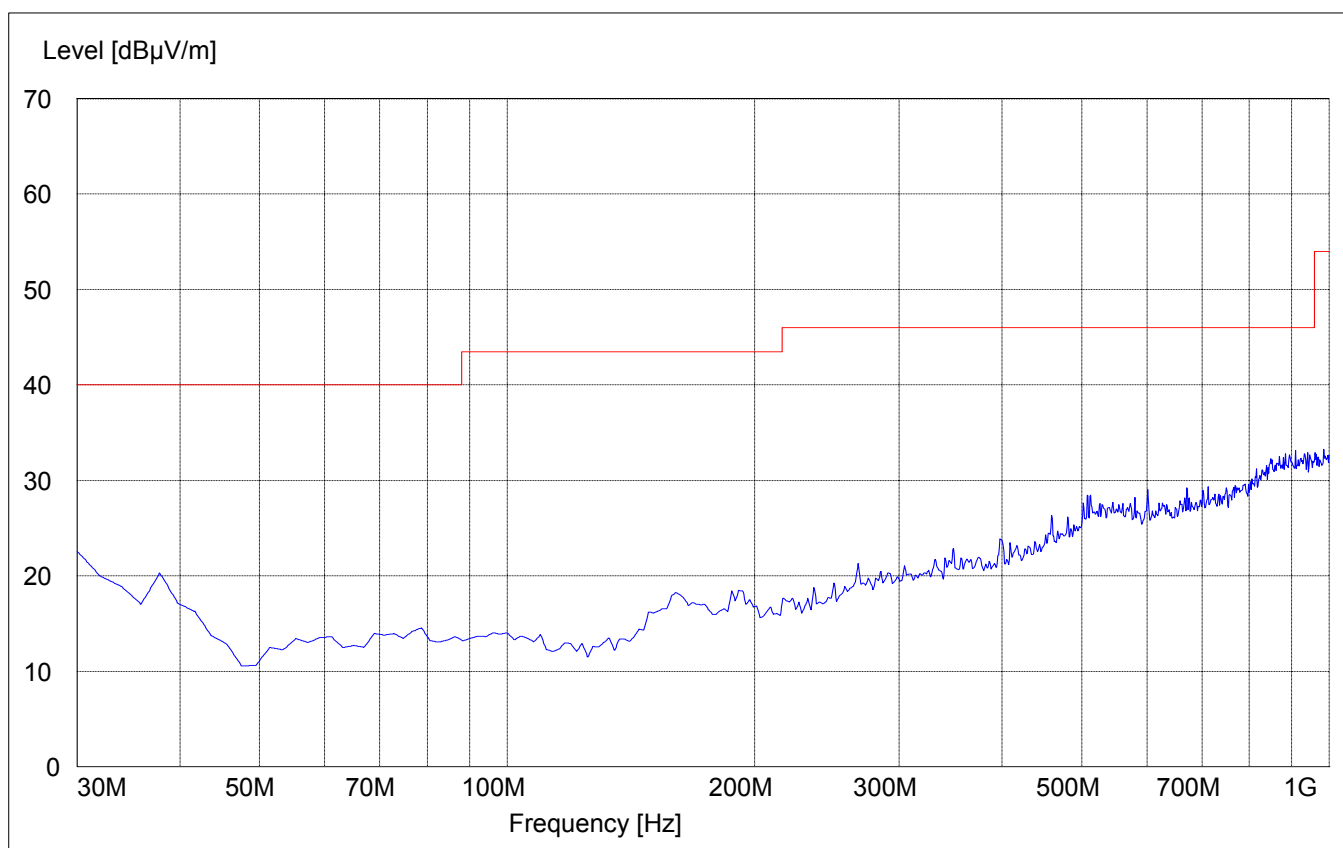


RECEIVER SPURIOUS RADIATION

§ 15.209

1GHz – 3GHz

SWEEP TABLE:

SWEEP TABLE:		"BT Spuri hi 1-3G"				
Start	Stop	Detector	Meas.	RBW		Transducer
Frequency	Frequency	Time	Bandw.		VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

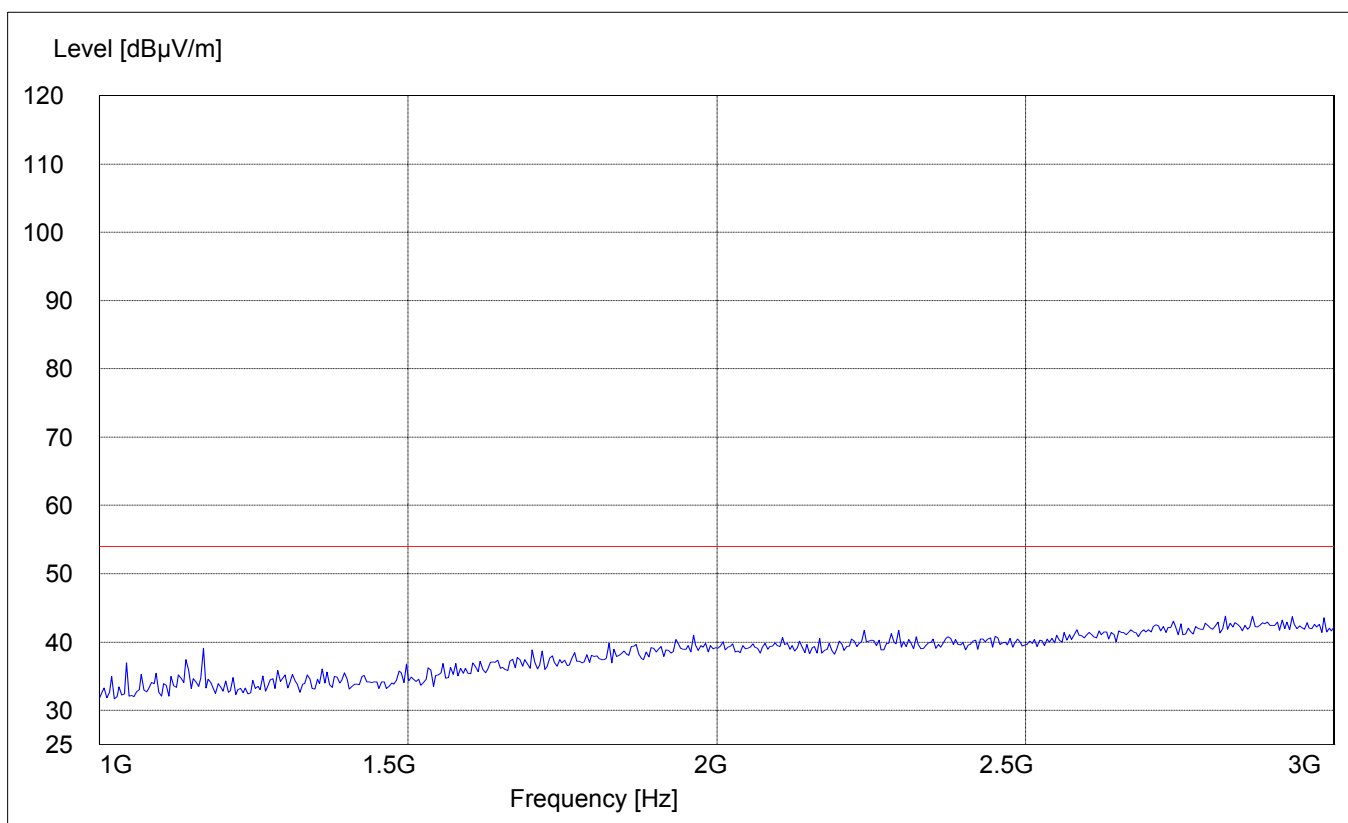


RECEIVER SPURIOUS RADIATION 3GHz – 18GHz

§ 15.209

SWEEP TABLE:

		"BT Spuri hi 3-18G"			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
3.0 GHz	18 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

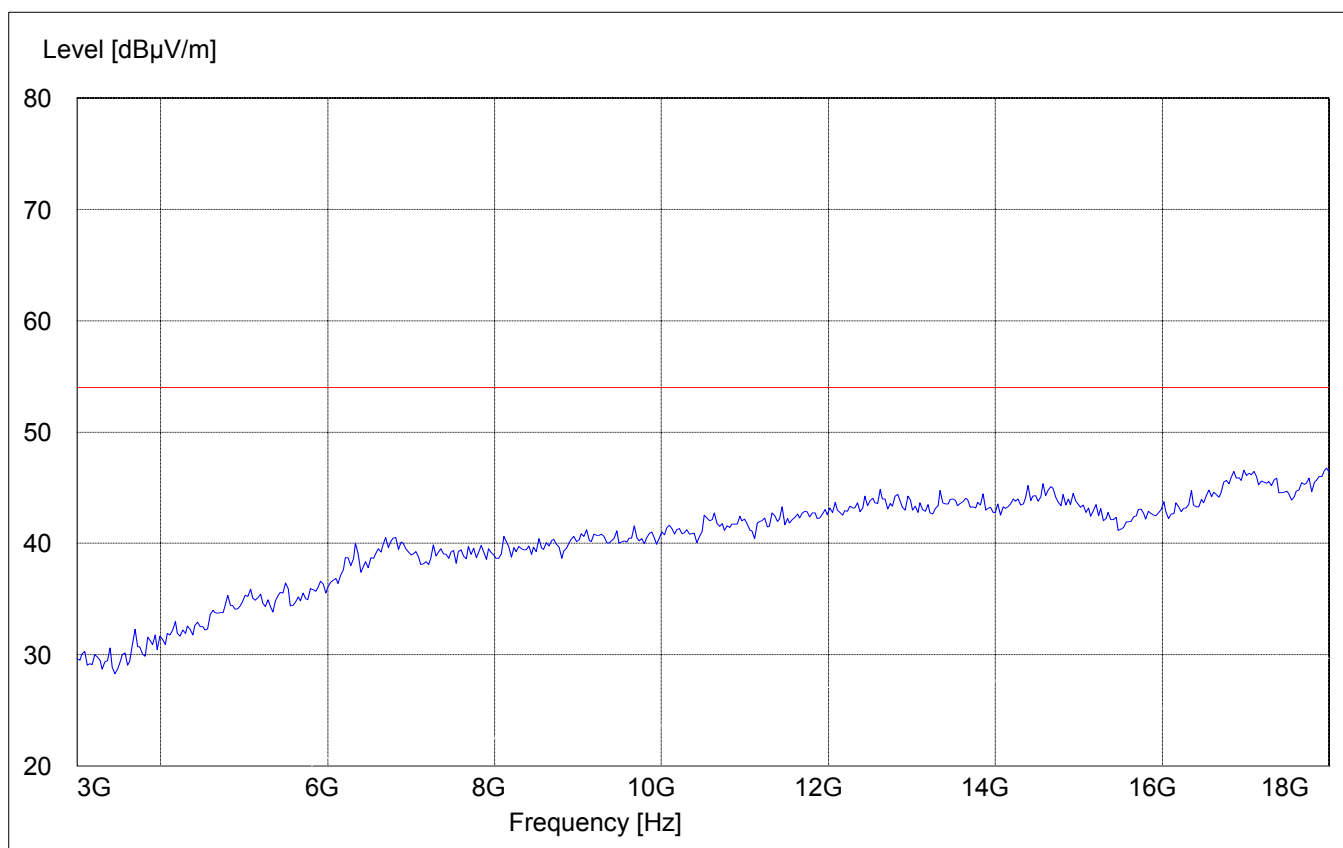


RECEIVER SPURIOUS RADIATION 18GHz – 25GHz

§ 15.209

SWEEP TABLE:


		"BT Spuri hi 18-25G"			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	25 GHz	MaxPeak	Coupled	1 MHz	#141 horn (dBi)

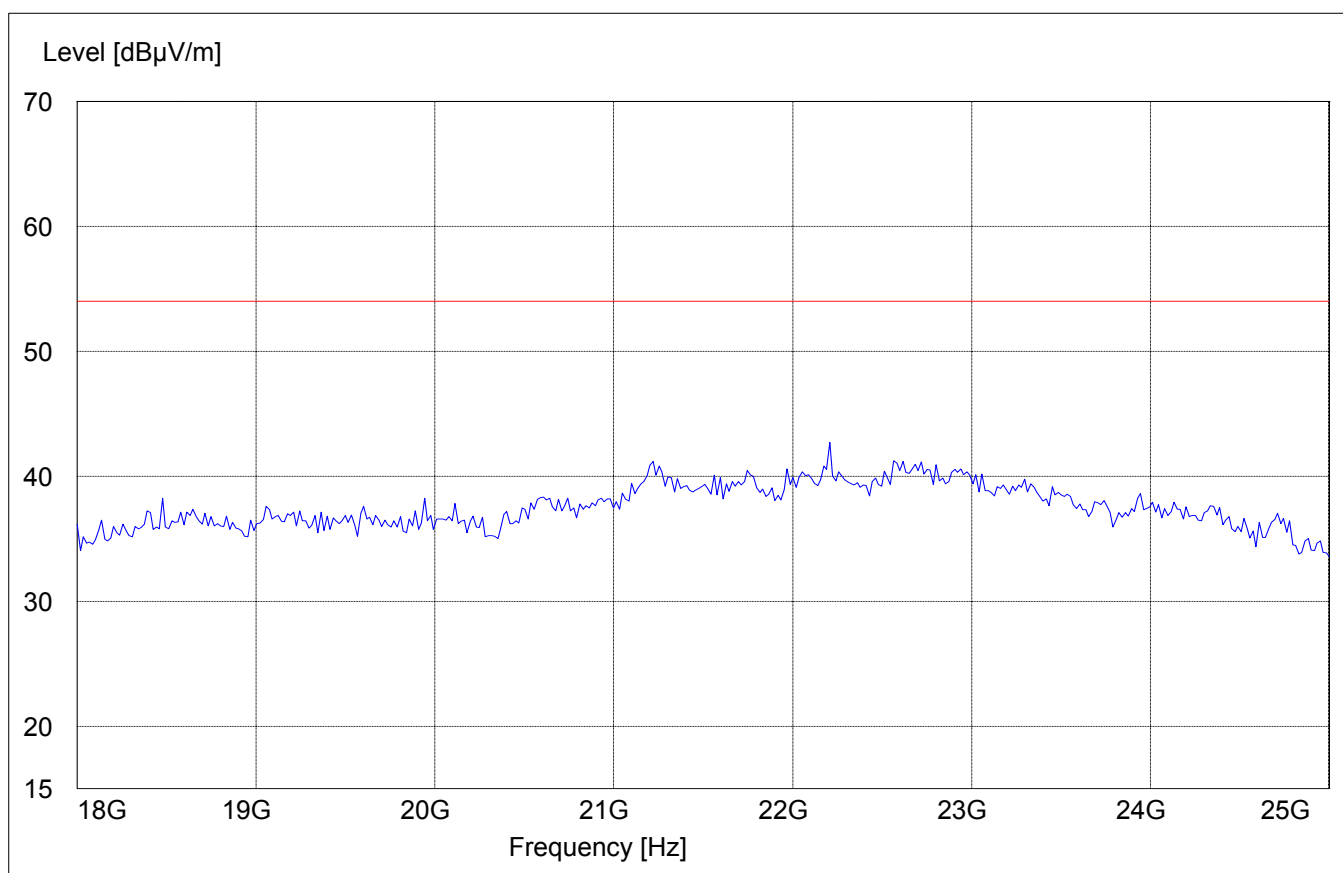

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Biconilog Antenna	3141	EMCO	0005-1186
04	Horn Antenna (700M-18GHz)	SAS-200/571	AH Systems	325
05	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
06	2-3GHz Band reject filter	BRM50701	Microtronics	6
07	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
08	Pre-Amplifier	TS-ANA	Rohde & Schwarz	--
09	Pre-Amplifier	JS4-00102600	Miteq	00616

BLOCK DIAGRAMS
Conducted Testing

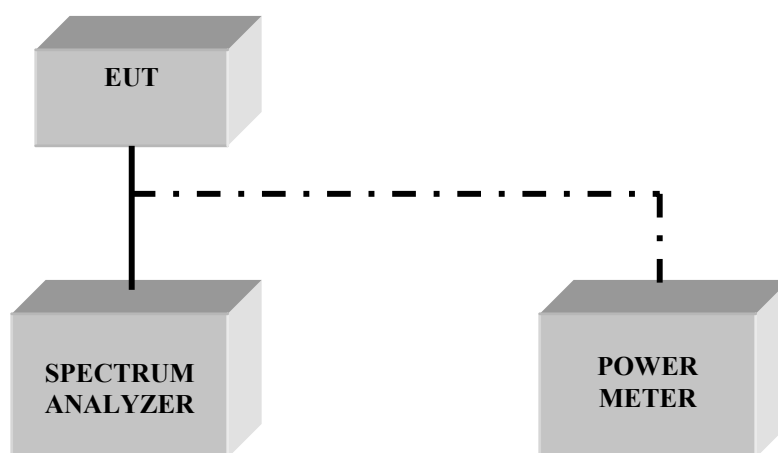

Radiated Testing

ANECHOIC CHAMBER

