



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Hytera Communications Corporation Limited

Address: Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road,
Nanshan District, Shenzhen, 518057 China

FCC ID: YAMHM68XU1

Product Name: Digital Mobile Radio

Standard(s): FCC PART 22, 74, 80 and 90
ANSI C63.26-2015
TIA-603-E-2016

The above equipment has been tested and found compliance with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR22070026-00D

Date Of Issue: 2022-09-12

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	7
1.3 MEASUREMENT UNCERTAINTY	8
2. SUMMARY OF TEST RESULTS	9
3. REQUIREMENTS AND TEST PROCEDURES	10
3.1 TRANSMITTER FREQUENCY STABILITY	10
3.1.1 Applicable Standard.....	10
3.1.2 Test Procedure	11
3.1.3 EUT Setup Block Diagram	11
3.2 TRANSMITTER OUTPUT POWER	12
3.2.1 Applicable Standard.....	12
3.2.2 Test Procedure	13
3.2.3 EUT Setup Block Diagram	13
3.3 OCCUPIED BANDWIDTH & EMISSION MASK.....	14
3.3.1 Applicable Standard.....	14
3.3.2 Test Procedure	15
3.3.3 EUT Setup Block Diagram	17
3.4 TRANSMITTER UNWANTED EMISSIONS(CONDUCTED).....	18
3.4.1 Applicable Standard.....	18
3.4.2 Test Procedure	19
3.4.3 EUT Setup Block Diagram	20
3.5 TRANSIENT FREQUENCY BEHAVIOR	21
3.5.1 Applicable Standard.....	21
3.5.2 Test Procedure	21
3.6 MODULATION CHARACTERISTICS.	23
3.6.1 Applicable Standard.....	23
3.6.2 Test Procedure	23
3.6.3 EUT Setup Block Diagram	24
3.7 TRANSMITTER UNWANTED EMISSIONS(RADIATED)	25
3.7.1 Applicable Standard.....	25
4. Test DATA AND RESULTS.....	29
4.1 FREQUENCY STABILITY:.....	29
4.2 RF OUTPUT POWER	31
4.3 OCCUPIED BANDWIDTH & EMISSION MASK:	38
4.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS:	50
4.5 MODULATION CHARACTERISTIC:.....	56

4.7 TRANSIENT FREQUENCY BEHAVIOR.....61

4.5 RADIATED SPURIOUS EMISSIONS:63

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Digital Mobile Radio
EUT Model:	HM682 U1
Multiple Models:	HM680 U1, HM685 U1, HM686 U1, HM688 U1, HM689 U1, HM650 U1, HM655 U1, HM656 U1, HM658 U1, HM659 U1, HM652 U1
Operation Frequency:	400-470 MHz
Modulation Type:	FM, 4FSK
Channel Spacing:	12.5 kHz /25 kHz
Rated Output Power: (Conducted)	High Power Level: 50W Low Power Level: 5W
Rated Input Voltage:	DC 13.6V from Vehicle Battery
Serial Number:	CR22070026-RF-S1
EUT Received Date:	2022.07.18
EUT Received Status:	Good
Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer. All tests were performed with model: HM682 U1, since it is the worst model per test for FHSS report.	

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Hand microphone	Hytera Communications Corporation Limited	Unknown	Unknown

Antenna Information Detail ▲:

Antenna	Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
Antenna 1	Hytera Communications Corporation Limited	Helical	50	0 dBi/400-470MHz

Test Frequency Detail:

Per C63.26-2015, section 5.1, the frequencies below was performed for test:

Modulation/ Channel Bandwidth	Test Channel	Frequency (MHz)	Rule Part
FM 12.5kHz	Lowest	400.0125	For Federal
	Middle	453.2125	For Part 90
	Highest	469.9875	For Part 90
	Additional	455.0125	For Part 74
	Additional	454.0125	For Part 22
4FSK 12.5kHz	Lowest	400.0125	For Federal
	Middle	453.2125	For Part 90
	Highest	469.9875	For Part 90
	Additional	455.0125	For Part 74
	Additional	454.0125	For Part 22
FM 25kHz	Additional	455.0125	For Part 74
	Additional	454.0125	For Part 22
	Additional	459.9875	For Part 80

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
Equipment Modifications:	No
EUT Exercise Software:	KL_CPS_V2.1.01.003
The software was provided by manufacturer.	

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
api	Load	50oml	50oml Load
BEW	Coaxial Attenuator	TS300-6-40	213311
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386

1.2.3 Support Cable List and Details

Cable Description	Shielding Cable	Ferrite Core	Length (m)	From Port	To
RF Cable	Yes	No	0.2	EUT	Attenuator
DC Power Cable	No	No	2.0	DC Power Supply	EUT

1.2.4 Block Diagram of Test Setup

Radiation Emission Test:

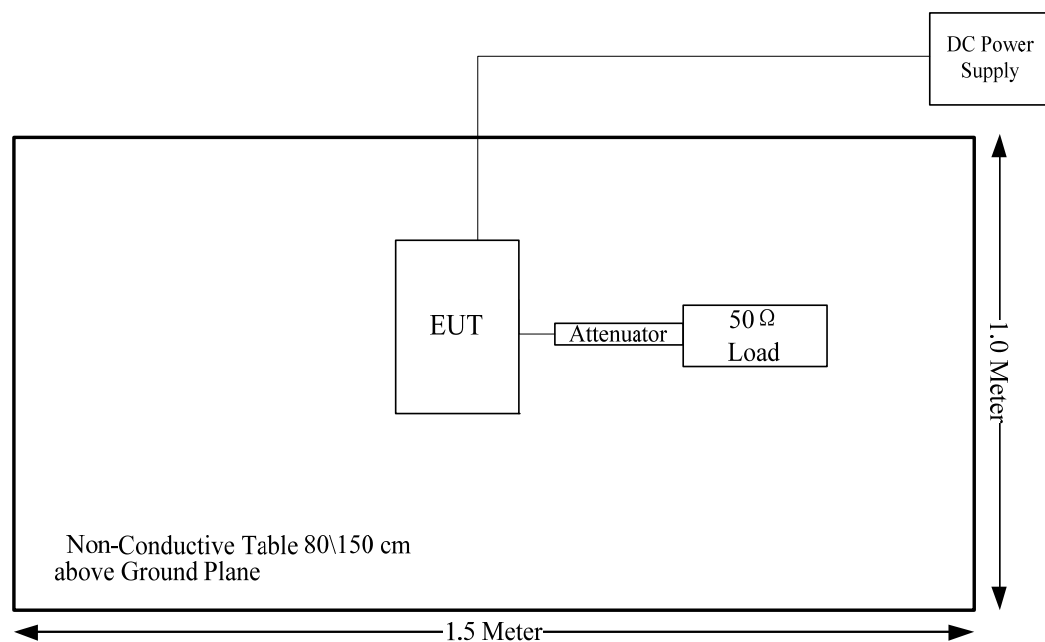

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶
Audio Frequency/Low Pass Filter Response	4.02%
Modulation Limiting	1.19%

2. SUMMARY OF TEST RESULTS

Standard/Rule(s)	Description of Test	Results
§2.1055; § 22.355; §74.464; §80.209; §90.213	Frequency Stability	Compliant
§2.1046; § 22.727; §80.215; §74.461; §90.205	RF Output Power	Compliant
§2.1049;§22.357;§ 22.731; §74.462;§80.205; §80.207 §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliant
§2.1051; §22.861; §74.462; §80.211;§90.210	Spurious Emission at Antenna Terminal	Compliant
§2.1053;§22.861; §74.462;§80.211;§90.210	Spurious Radiated Emissions	Compliant
§90.214	Transient Frequency Behavior	Compliant
§2.1047	Modulation Characteristic	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Transmitter Frequency Stability

3.1.1 Applicable Standard

FCC §90.213

In the 421-512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

FCC §74.464

For operations on frequencies above 25 MHz using authorized bandwidths up to 30 kHz, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in compliance with the frequency tolerance requirements of §90.213 of this chapter. For all other operations, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in accordance with the following:

Frequency range	Tolerance (percent)	
	Base station	Mobile station
25 to 30 MHz:		
3 W or less	.002	.005
Over 3 W	.002	.002
30 to 300 MHz:		
3 W or less	.0005	.005
Over 3 W	.0005	.0005
300 to 500 MHz, all powers	.00025	.0005

FCC §80.209

(a) The frequency tolerance requirements applicable to transmitters in the maritime services are shown in the following table. Tolerances are given as parts in 10^6 unless shown in Hz.


Frequency bands and categories of stations	Tolerances ¹
(5) Band 156-162 MHz:	
(i) Coast stations:	
For carriers licensed to operate with a carrier power:	
Below 3 watts	10.
3 to 100 watts	5. ⁷
(ii) Ship stations	10. ⁴
(iii) Survival craft stations operating on 121.500 MHz	50.
(iv) EPIRBs:	
(7) Band 400-466 MHz:	
(i) EPIRBs operating on 406-406.1 MHz	5.
(ii) On-board stations	5.
(iii) Radiolocation and telecommand stations.	5.

3.1.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC or AC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

3.1.3 EUT Setup Block Diagram

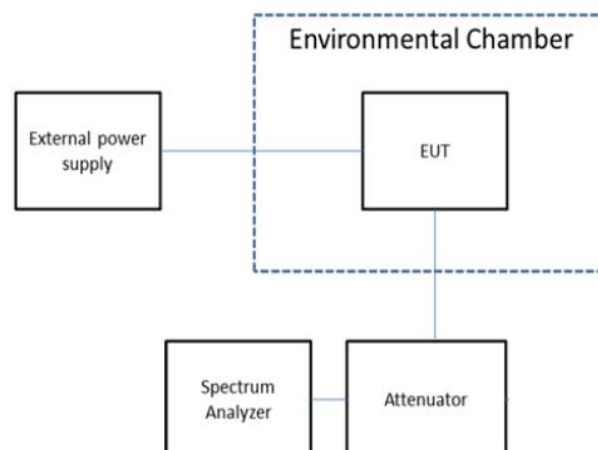

3.2 Transmitter Output Power

3.2.1 Applicable Standard

FCC §90.205

(h) 450-470 MHz.

(1) The maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and required service area and will be authorized in accordance with table 2.

Applicants requesting an ERP in excess of that listed in table 2 must submit an engineering analysis based upon generally accepted engineering practices and standards that includes coverage contours to demonstrate that the requested station parameters will not produce coverage in excess of that which the applicant requires.

(2) Applications for stations where special circumstances exist that make it necessary to deviate from the ERP and antenna heights in Table 2 will be submitted to the frequency coordinator accompanied by a technical analysis, based upon generally accepted engineering practices and standards, that demonstrates that the requested station parameters will not produce a signal strength in excess of 39 dBu at any point along the edge of the requested service area. The coordinator may then recommend any ERP appropriate to meet this condition.

(3) An applicant for a station with a service area radius greater than 32 km (20 mi) must justify the requested service area radius, which may be authorized only in accordance with table 2, note 4. For base stations with service areas greater than 80 km, all operations 80 km or less from the base station will be on a primary basis and all operations outside of 80 km from the base station will be on a secondary basis and will be entitled to no protection from primary operations.

FCC §22.727

(a) *Maximum ERP.* The effective radiated power (ERP) of central office and rural subscriber station transmitters must not exceed the applicable limits in this paragraph under any circumstances.

Frequency range (MHz)	Maximum ERP (watts)
152-153	1400
157-159	150
454-455	3500
459-460	150

FCC §74.461

(a) Transmitter power is the power at the transmitter output terminals and delivered to the antenna, antenna transmission line, or any other impedance-matched, radio frequency load. For the purpose of this Subpart, the transmitter power is the carrier power.

(b) The authorized transmitter power for a remote pickup broadcast station shall be limited to that necessary for satisfactory service and, in any event, shall not be greater than 100 watts, except that a station to be operated aboard an aircraft shall normally be limited to a maximum authorized power of 15 watts. Specific authorization to operate stations on board aircraft with an output power exceeding 15 watts will be issued only upon an adequate engineering showing of need, and of the procedures that will be taken to avoid harmful interference to other licensees.

FCC §80.215

(e)(3) On board stations 456-468 MHz - 4W

(m) For radiodetermination transmitters using A1D, A2D, F1D, F2D, G1D and G2D emissions on 154.585 MHz, 159.480 MHz, 160.725 MHz, 160.785 MHz, 454.000 MHz and 459.000 MHz the mean output power of the unmodulated carrier must not exceed 25 watts.


3.2.2 Test Procedure

Before performing this measurement, the power of the EUT shall be set or controlled to the maximum rating of the range for which equipment certification or verification is sought.

Except where otherwise specified, tests shall be performed at the ambient temperature, at the manufacturer's rated supply voltage, and with the transmitter modulating signal representative (i.e. typical) of those encountered in a real system operation.

The spectrum analyzer shall be configured with a resolution bandwidth that encompasses the entire occupied bandwidth (see section 6.7) of the EUT. If the spectrum analyzer's largest available resolution bandwidth is smaller than the occupied bandwidth of the EUT, it is permitted to use a narrower resolution bandwidth plus numerical integration, in linear power terms, over the occupied bandwidth of the transmitter in order to measure its output power, except when the emission is a wideband noise-like signal and being measured for peak power. For transmitters with constant envelope modulation, RF output power and field strength measurements performed on the fundamental frequency can be carried out with an unmodulated carrier. The method used shall be described in the test report.

3.2.3 EUT Setup Block Diagram

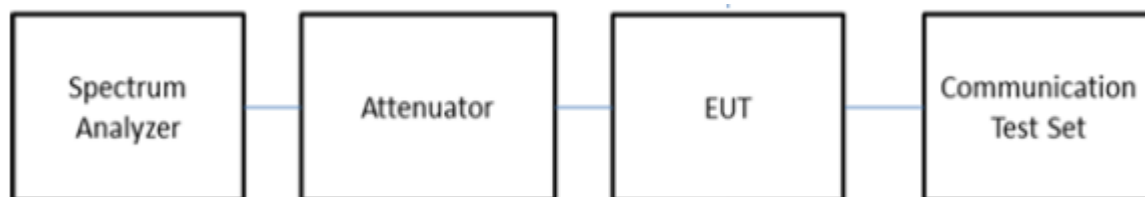

3.3 Occupied Bandwidth & Emission Mask

3.3.1 Applicable Standard

FCC §90.209

(a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where §2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.

(b) (5) Unless specified elsewhere, channel spacings and bandwidths that will be authorized in the following frequency bands are given in the following table: STANDARD CHANNEL SPACING/BANDWIDTH

FCC §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

FCC §22.359

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC §74.462

(a) Each authorization for a new remote pickup broadcast station or system shall require the use of certificated equipment and such equipment shall be operated in accordance with emission specifications included in the grant of certification and as prescribed in paragraphs (b), (c), and (d) of this section.

FCC §80.205

(a) An emission designator shows the necessary bandwidth for each class of emission of a station except that in ship earth stations it shows the occupied or necessary bandwidth, whichever is greater. The following table gives the class of emission and corresponding emission designator and authorized bandwidth:

Class of emission	Emission designator	Authorized bandwidth (kHz)
F3E ^B	16KOF3E	20.0

FCC §80.211

The mean power when using emissions other than those in paragraphs (a), (b), (c) and (d) of this section:

- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log 10$ (mean power in watts) dB.

3.3.2 Test Procedure

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).


Emission Mask D for Transmitters Equipped With or Without an Audio Low-Pass Filter

The power of any emission shall be attenuated below the transmitter output power P (dBW) as specified in Table.

Displacement Frequency, f_d (kHz)	Minimum Attenuation (dB)	Resolution Bandwidth (Hz)
$5.625 < f_d \leq 12.5$	$7.27(f_d - 2.88)$	Specified in Section 4.2.2
$f_d > 12.5$	Whichever is the lesser: 70 or $50 + 10 \log_{10}(p)$	Specified in Section 4.2.2

In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak mode. For emissions beyond 50 kHz from the edge of the authorized bandwidth, the resolution bandwidth shall be 100 kHz for frequencies at or below 1 GHz, and 1 MHz for frequencies above 1 GHz. However, for emission mask F, at a displacement frequency of less than 3.75 kHz, the resolution bandwidth shall be 30 Hz.

3.3.3 EUT Setup Block Diagram

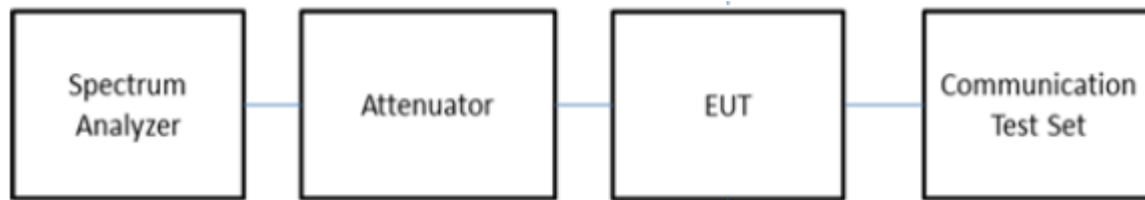

3.4 Transmitter Unwanted Emissions(Conducted)

3.4.1 Applicable Standard

FCC §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (5) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (6) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (7) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.
- (8) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

FCC §22.359

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC §74.462

(c) For emissions on frequencies above 25 MHz with authorized bandwidths up to 30 kHz, the emissions shall comply with the emission mask and transient frequency behavior requirements of §§90.210 and 90.214 of this chapter. For all other emissions, the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) On any frequency removed from the assignment frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB;
- (3) On any frequency removed from the assigned frequency by more than 250 percent on the authorized bandwidth; at least 43 plus $10 \log_{10}$ (mean output power, in watts) dB.

FCC §80.211

The mean power when using emissions other than those in paragraphs (a), (b), (c) and (d) of this section:

- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10 \log_{10}$ (mean power in watts) dB.

3.4.2 Test Procedure

In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak mode. For emissions beyond 50 kHz from the edge of the authorized bandwidth, the resolution bandwidth shall be 100 kHz for frequencies at or below 1 GHz, and 1 MHz for frequencies above 1 GHz. However, for emission mask F, at a displacement frequency of less than 3.75 kHz, the resolution bandwidth shall be 30 Hz.

In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated or used in the equipment, whichever is lower, without going below 9 kHz, up to at least the applicable frequency given below:

(a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) If the equipment operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(c) If the equipment operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise in the applicable RSS.


(d) If the equipment contains a digital device that is exclusively used for enabling the operation of the radio apparatus: the spectrum shall be investigated according to the conditions specified in paragraphs (a) through (c) of this section or the range applicable to the digital device, as shown in table 2, whichever is the higher frequency range of investigation.

Table 2 – Frequency range for radiated measurement for equipment with a digital device

Highest frequency generated, operated or used in the equipment (MHz)	Upper frequency limit of measurement range (MHz)
< 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
> 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

It is not necessary to report the amplitude of spurious emissions attenuated more than 20 dB below the permissible value

3.4.3 EUT Setup Block Diagram

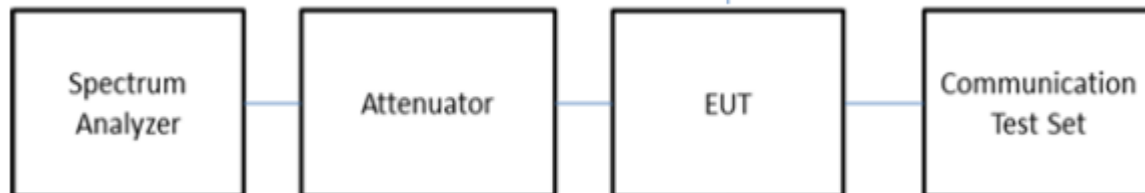

3.5 Transient Frequency Behavior

3.5.1 Applicable Standard


FCC §90.214

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms

3.5.2 Test Procedure

TIA-603-E Clause 2.2.19

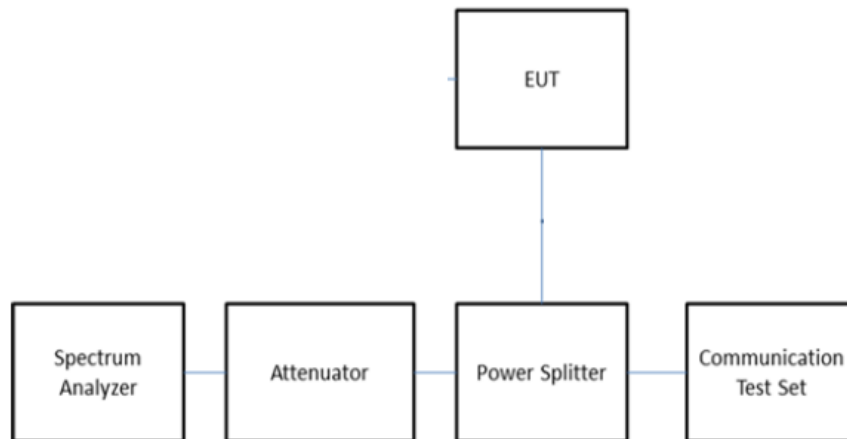

- Connect the equipment as illustrated.
- Connect the output of the standard transmitter load to the RF power meter. Supply sufficient attenuation via the RF attenuator to provide a level that is approximately 40 dB below the maximum allowable input to the modulation domain analyzer.
- Unkey the transmitter.
- Disconnect the RF power meter and connect the modulation domain analyzer in its place. Set the envelope trigger of the modulation domain analyzer to the minimum level that will trigger when the transmitter is keyed.
- Reduce the attenuation of the RF attenuator so that the input to the modulation domain analyzer is increased by 30 dB when the transmitter is keyed.
- Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signal.
- Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the timebase reference to the left for observing the transmitter turn-on transient.
- Key the transmitter.
- Observe the stored display of the modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the periods t_1 and t_2 , and shall also remain within limits following t_2 .

- j) Adjust the modulation domain analyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transient of the transmitter signal.
- k) Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the timebase reference to the right for observing the transmitter turn-off transient.
- l) Unkey the transmitter.
- m) Observe the stored display of the modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the period t_3 .

3.6 Modulation characteristics.

3.6.1 Applicable Standard

FCC §2.1047

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

3.6.2 Test Procedure

C63.26-2015, Clause 5.3.2 Modulation limiting test methodology


Modulation limiting is the ability of a transmitter circuit to limit the transmitter from producing deviations in excess of a rated system deviation.

- a) Connect the equipment as illustrated in Figure 1.
- b) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- c) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to ≥ 15000 Hz. Turn the de-emphasis function off.
- d) Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation. This is the 0 dB reference level.
- e) Increase the level from the audio generator by 20 dB in 5 dB increments recording the deviation as measured from the test receiver in each step. Verify that the audio level used to make the OBW measurement is included in the sweep.
- f) Repeat for step e) at 300 Hz, 2500 Hz and 3000 Hz at a minimum using the 0 dB reference level obtained in step d).
- g) Set the test receiver to measure peak negative deviation and repeat step d) through step f).
- h) The values recorded in step f) and step g) are the modulation limiting.
- i) Plot the data set as a percentage of deviation relative to the 0 dB reference point versus input voltage.

C63.26-2015, Clause 5.3.3.2 Audio frequency response test methodology—Constant Input

- a) Connect the equipment as illustrated in Figure 3.
- b) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 50 Hz to $\geq 15\ 000$ Hz. Turn the de-emphasis function off.
- c) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- d) Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
- e) Set the test receiver to measure rms deviation and record the deviation reading as DEVREF.
- f) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.

3.6.3 EUT Setup Block Diagram

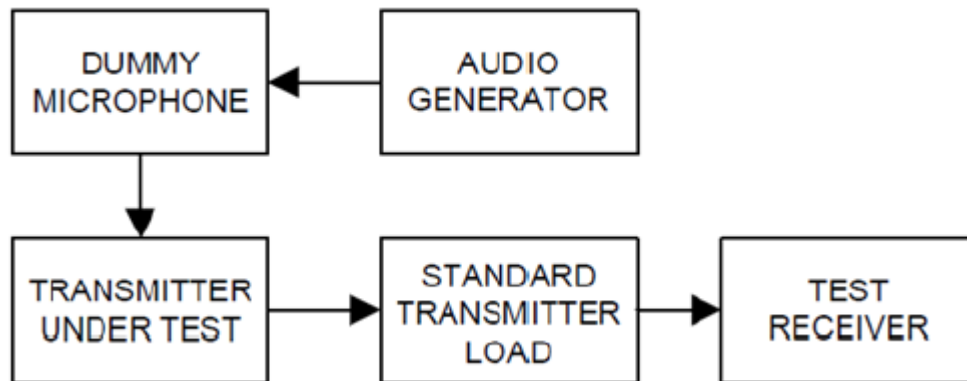

3.7 Transmitter Unwanted Emissions(Radiated)

3.7.1 Applicable Standard

FCC §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (9) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (10) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (11) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.
- (12) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

FCC §22.359

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.
- (b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC §74.462

- (c) For emissions on frequencies above 25 MHz with authorized bandwidths up to 30 kHz, the emissions shall comply with the emission mask and transient frequency behavior requirements of §§90.210 and

90.214 of this chapter. For all other emissions, the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) On any frequency removed from the assignment frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB;
- (3) On any frequency removed from the assigned frequency by more than 250 percent on the authorized bandwidth; at least 43 plus $10 \log_{10}$ (mean output power, in watts) dB.

FCC §80.211

The mean power when using emissions other than those in paragraphs (a), (b), (c) and (d) of this section:

- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10 \log_{10}$ (mean power in watts) dB.

3.7.2 Test setup:

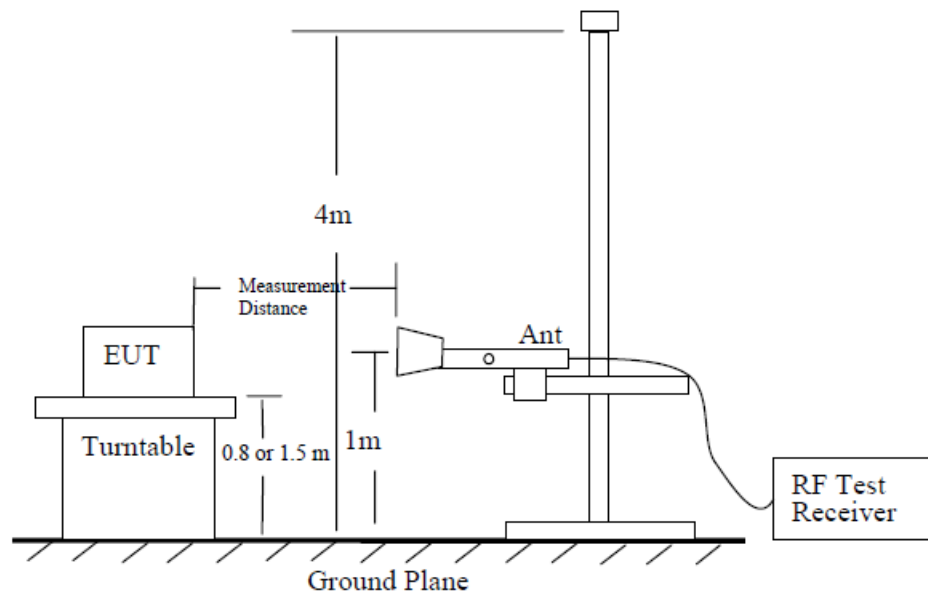


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

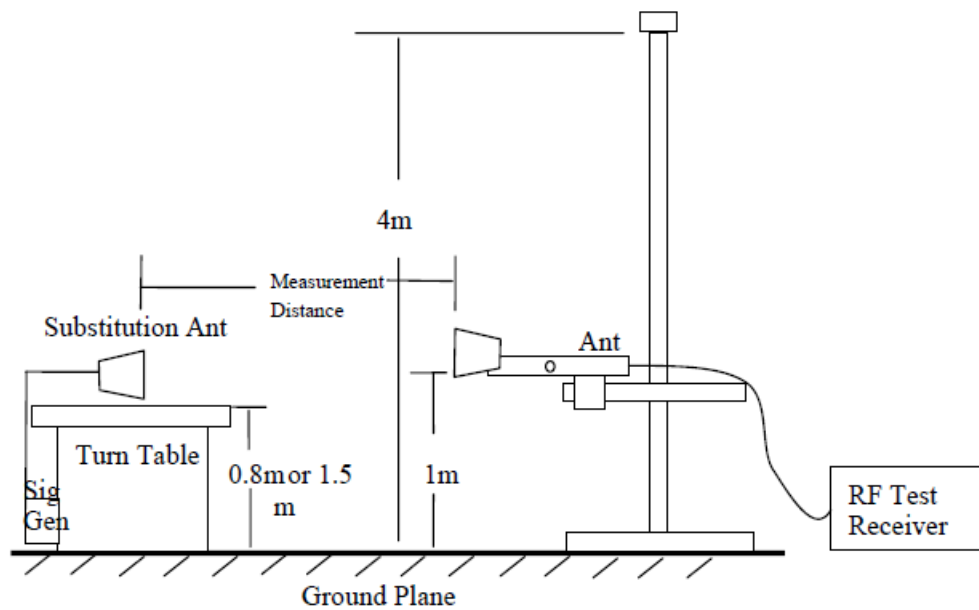


Figure 7 —Substitution method set-up for radiated emission

3.7.3 Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where

$$P_e = \text{equivalent emission power in dBm}$$

$$P_s = \text{source (signal generator) power in dBm}$$
 NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4. Test DATA AND RESULTS

4.1 FREQUENCY STABILITY:

Serial Number:	CR22070026-RF-S1	Test Date:	2022/08/05-2022/08/08
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.5-28.1	Relative Humidity: (%)	64-68	ATM Pressure: (kPa)	100.1-100.2
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100004	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022-04-06	2023-04-05
UNI-T	Multimeter	UT39A+	C210582554	2021-09-30	2022-09-29

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

FCC Part 90:

Un-modulation, Reference Frequency: 453.2125 MHz, Limit: ± 2.5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	13.6	453.2127524	0.56
-20		453.2127241	0.49
-10		453.2127012	0.44
0		453.2126741	0.38
10		453.2126354	0.30
20		453.2125200	0.04
30		453.2125024	0.01
40		453.2124723	-0.06
50		453.2124527	-0.10
20	10.8	453.2124312	-0.15
20	15.6	453.2124021	-0.22

FCC Part 80:

Un-modulation, Reference Frequency: 459.9875MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	13.6	459.9873548	-0.32
-20		459.9875012	0.00
-10		459.9874571	-0.09
0		459.9875247	0.05
10		459.9875687	0.15
20		459.9875200	0.04
30		459.9877642	0.57
40		459.9876537	0.33
50		459.9876604	0.35
20	10.8	459.9875781	0.17
20	15.6	459.9877241	0.49

FCC Part 74:

Un-modulation, Reference Frequency: 455.0125 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	13.6	455.0123217	-0.39
-20		455.0123851	-0.25
-10		455.0124573	-0.09
0		455.0124982	0.00
10		455.0125354	0.08
20		455.0125200	0.04
30		455.0126870	0.41
40		455.0125357	0.08
50		455.0125874	0.19
20	10.8	455.0125379	0.08
20	15.6	455.0125681	0.15

FCC Part 22:

Un-modulation, Reference Frequency: 454.0125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	13.6	454.0128421	0.75
-20		454.0127586	0.57
-10		454.0126927	0.42
0		454.0125584	0.13
10		454.0125014	0.00
20		454.0125200	0.04
30		454.0125001	0.00
40		454.0124527	-0.10
50		454.0123574	-0.31
20	10.8	454.0125529	0.12
20	15.6	454.0126157	0.25

4.2 RF OUTPUT POWER

Serial Number:	CR22070026-RF-S1	Test Date:	2022/08/05-2022/08/08
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.5-28.1	Relative Humidity: (%)	64-68	ATM Pressure: (kPa)	100.1-100.2
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100004	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2022-07-15	2023-07-14

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:







Channel Separation	Test Modulation	Test Channel	Test Frequency (MHz)	Conducted Output Power (dBm)		Limit (dBm)	
				High Power Level	Low Power Level	High Power Level	Low Power Level
12.5kHz	FM	Low	400.0125	46.74	37.04	47.78	37.78
		Middle	453.2125	46.67	37.38	47.78	37.78
		High	469.9875	46.55	36.76	47.78	37.78
		Additional	454.0125	46.68	37.29	47.78	37.78
		Additional	455.0125	46.67	37.19	47.78	37.78
	4FSK	Low	400.0125	46.72	36.90	47.78	37.78
		Middle	453.2125	46.65	37.22	47.78	37.78
		High	469.9875	46.52	36.57	47.78	37.78
		Additional	454.0125	46.64	37.16	47.78	37.78
		Additional	455.0125	46.62	37.06	47.78	37.78
25kHz	FM	Additional	454.0125	46.68	37.29	47.78	37.78
		Additional	455.0125	46.67	37.20	47.78	37.78
		Additional	459.9875	46.68	37.08	47.78	37.78





Note:







The high rated power level is 50W(47dBm), and low rated power level is 5W(37dBm).





The output power shall not exceed by more than 20 percent the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.







The 30.50dB is the Insertion loss of the RF cable, Coaxial Attenuators, which was offset into the Spectrum Analyzer.

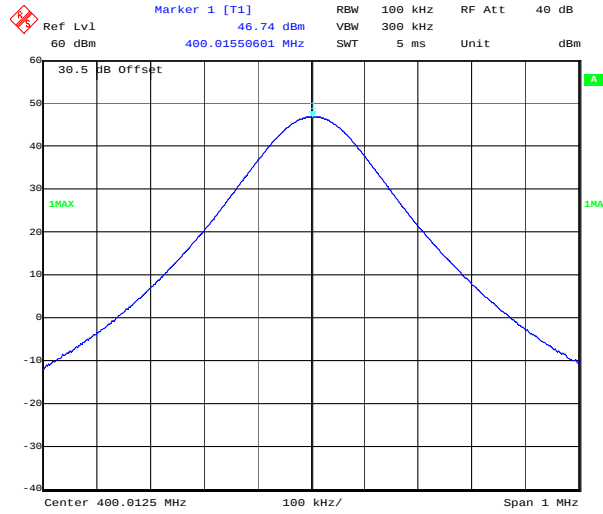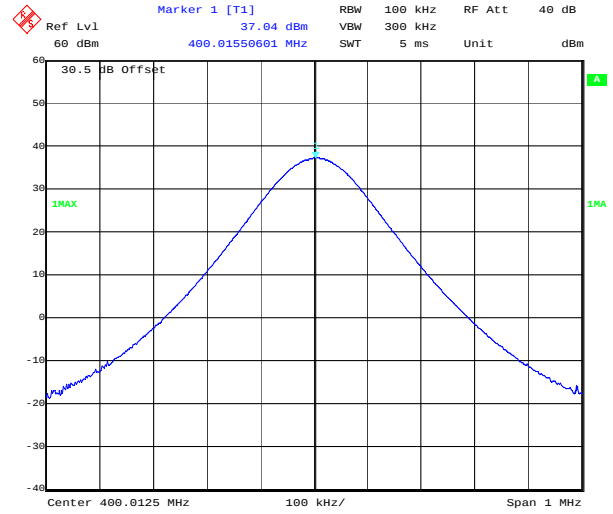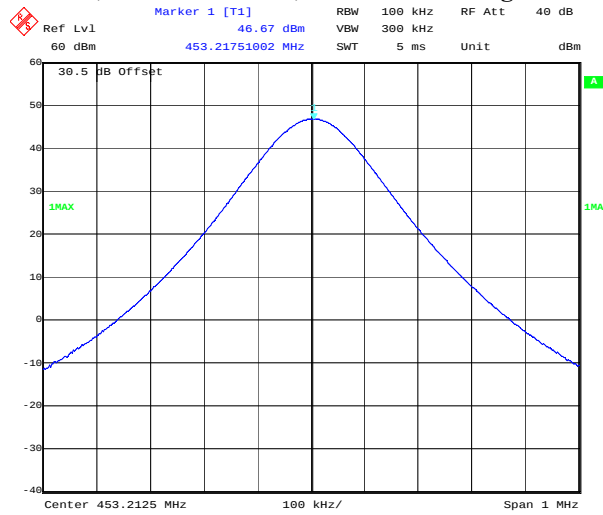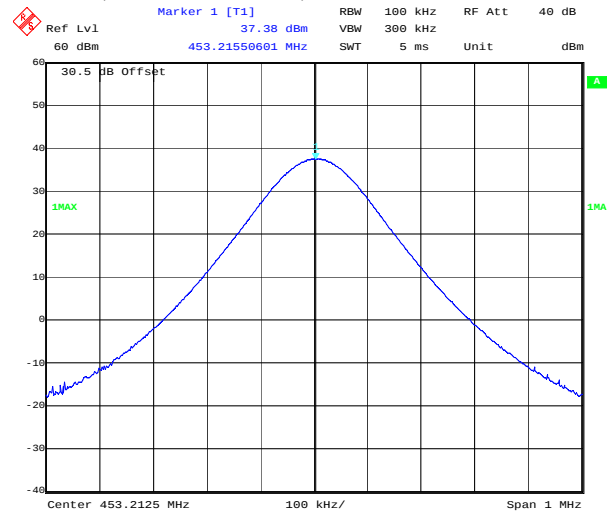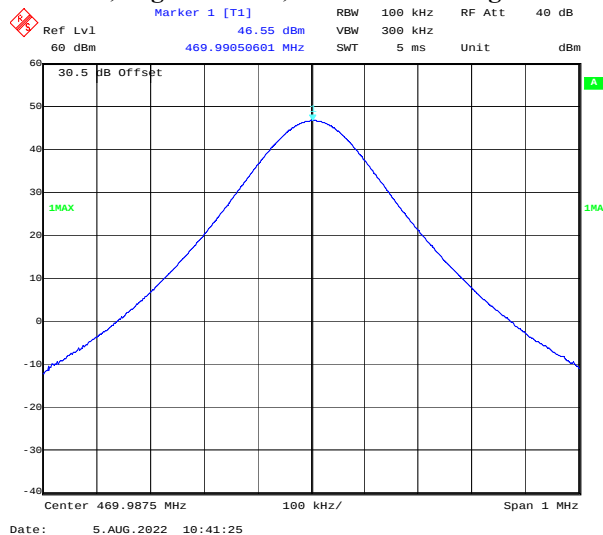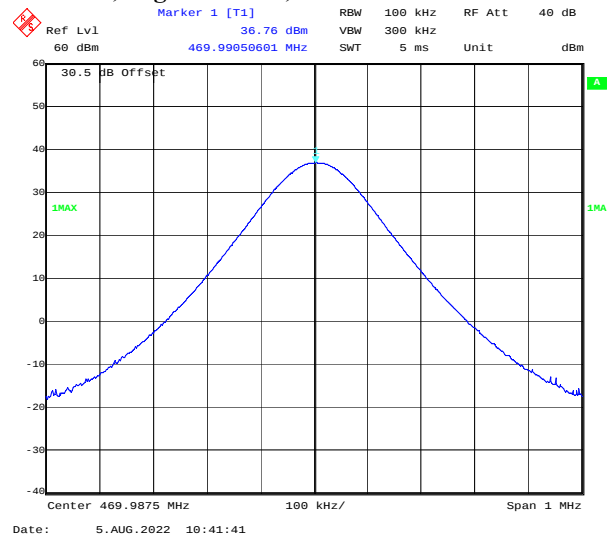FM, 12.5kHz:**Low Channel, 400.0125 MHz High Power****Low Channel, 400.0125 MHz Low Power****Part 90, Middle Channel, 453.2125 MHz High Power****Part 90, Middle Channel, 453.2125 MHz Low Power****Part 90, High Channel, 469.9875MHz High Power****Part 90, High Channel, 469.9875 MHz Low Power**

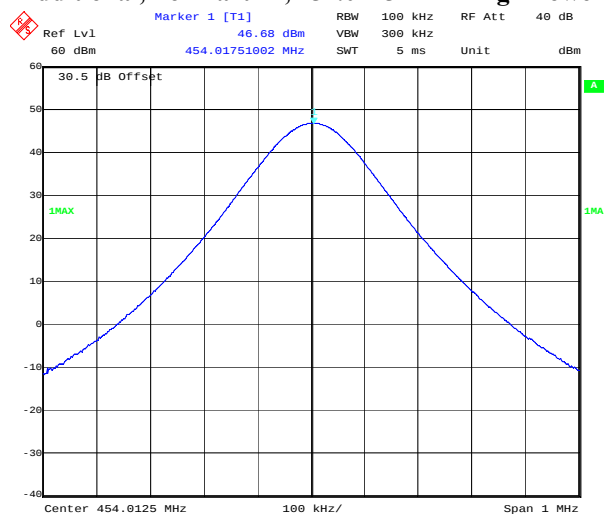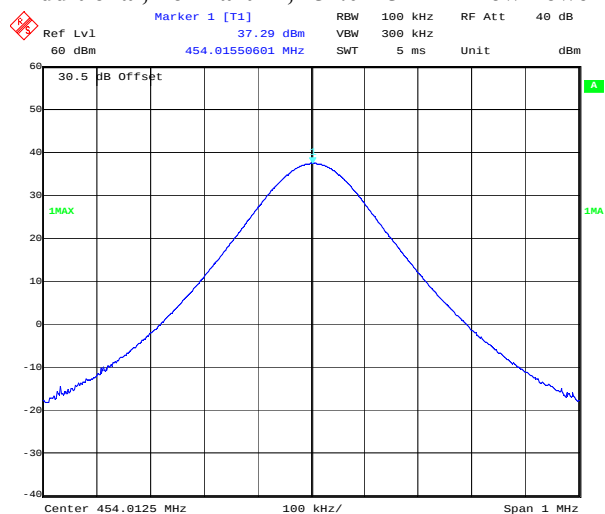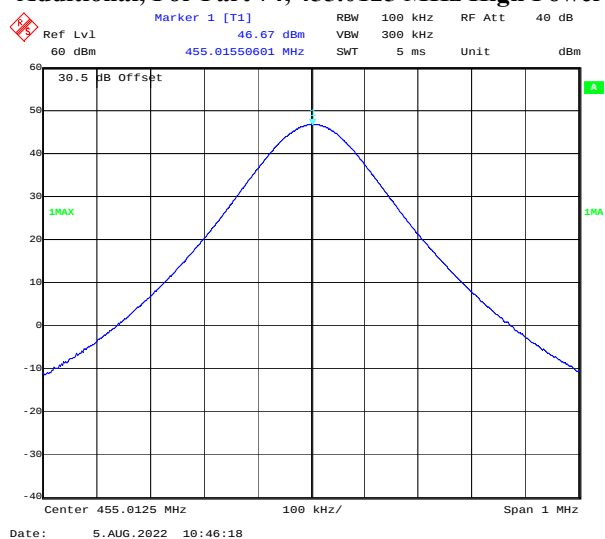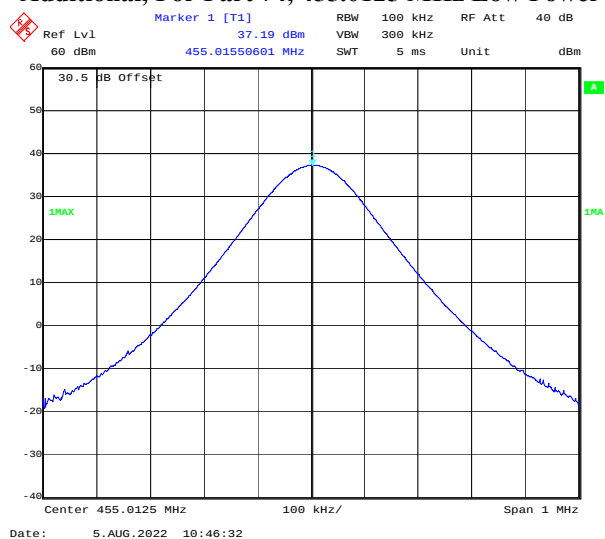Additional, For Part 22, 454.0125 MHz High Power**Additional, For Part 22, 454.0125 MHz Low Power****Additional, For Part 74, 455.0125 MHz High Power****Additional, For Part 74, 455.0125 MHz Low Power**

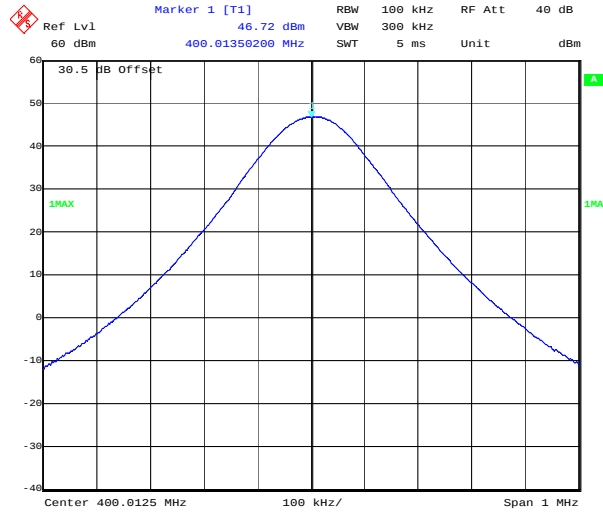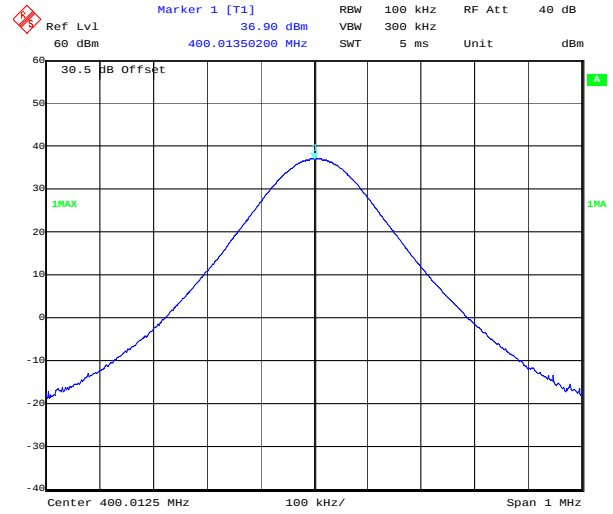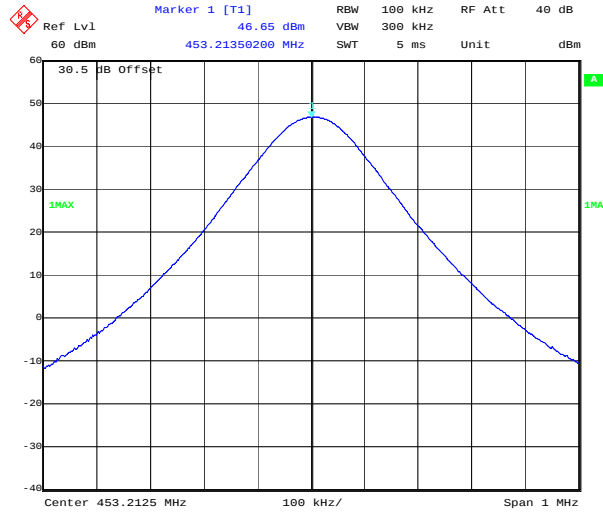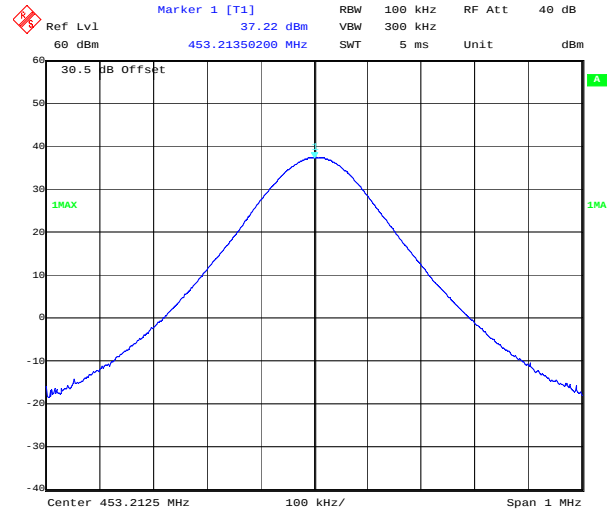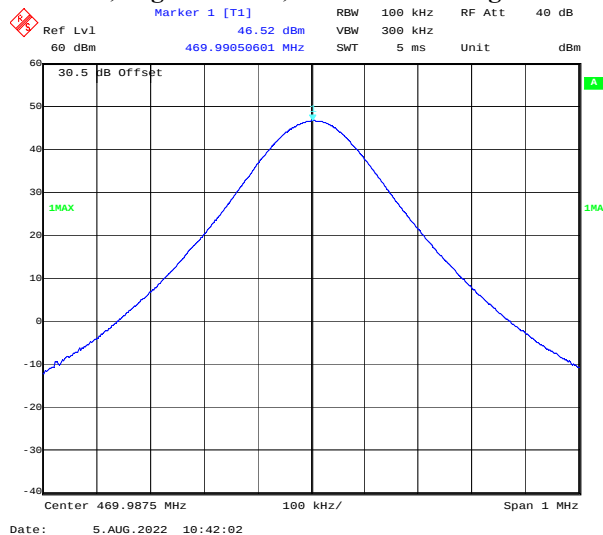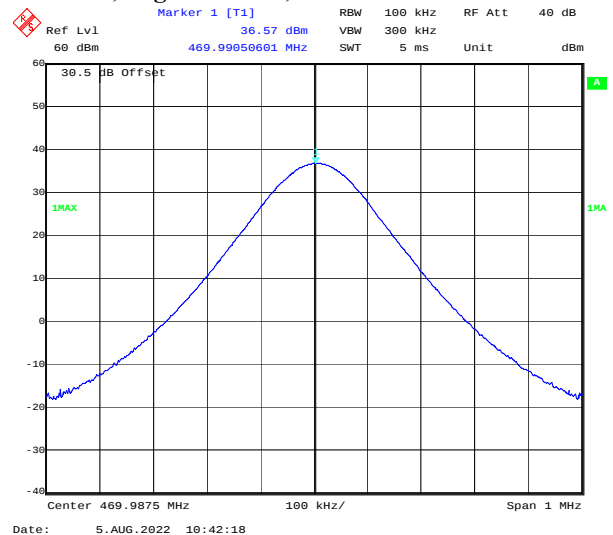4FSK, 12.5kHz:**Low Channel, 400.0125 MHz High Power****Low Channel, 400.0125 MHz Low Power****Part 90, Middle Channel, 453.2125 MHz High Power****Part 90, Middle Channel, 453.2125 MHz Low Power****Part 90, High Channel, 469.9875MHz High Power****Part 90, High Channel, 469.9875 MHz Low Power**

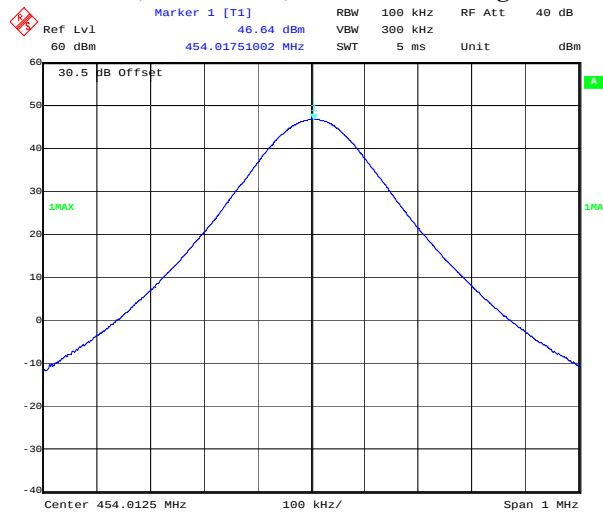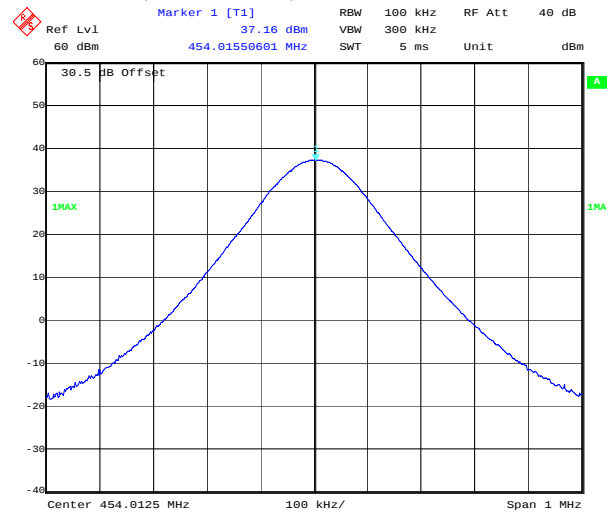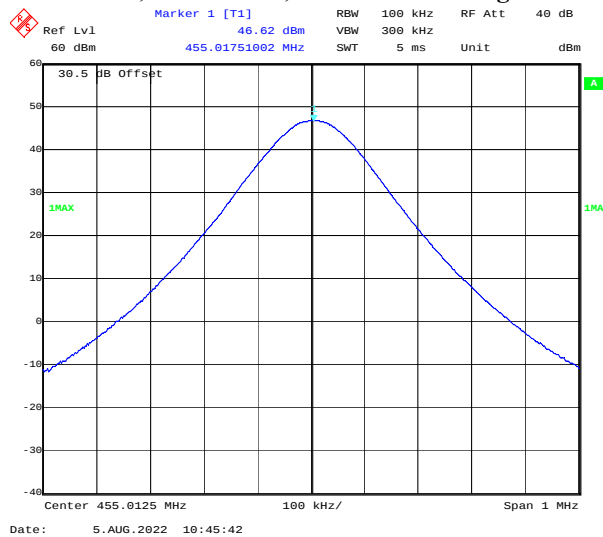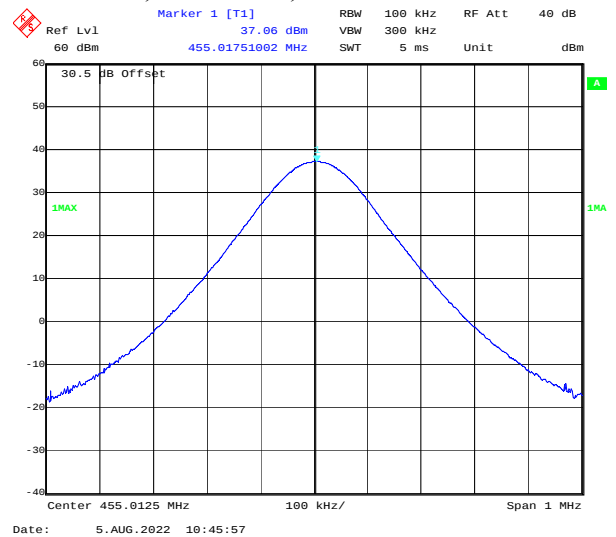Additional, For Part 22, 454.0125 MHz High Power**Additional, For Part 22, 454.0125 MHz Low Power****Additional, For Part 74, 455.0125 MHz High Power****Additional, For Part 74, 455.0125 MHz Low Power**

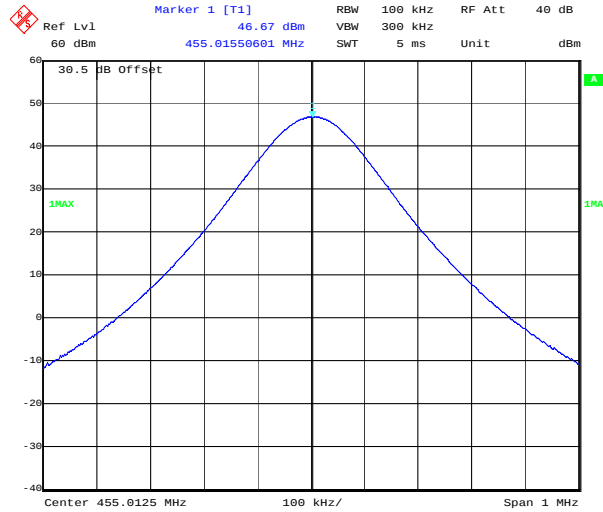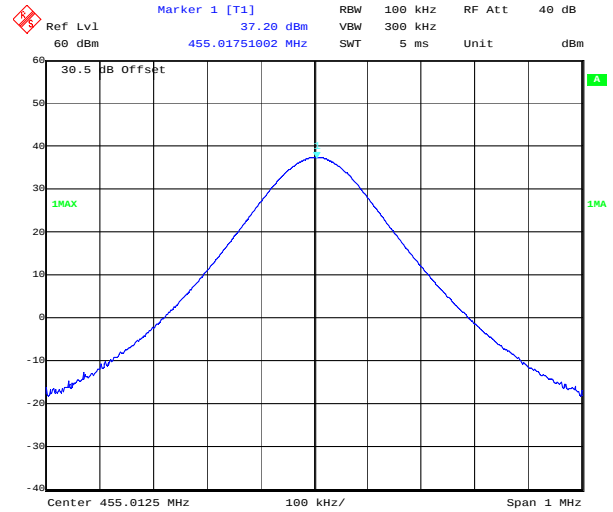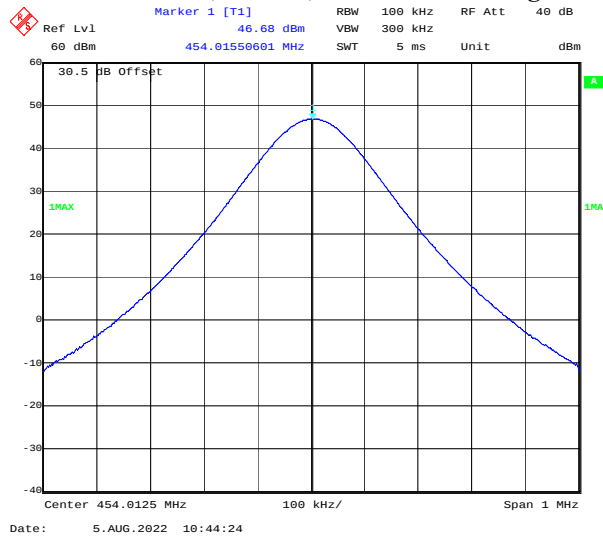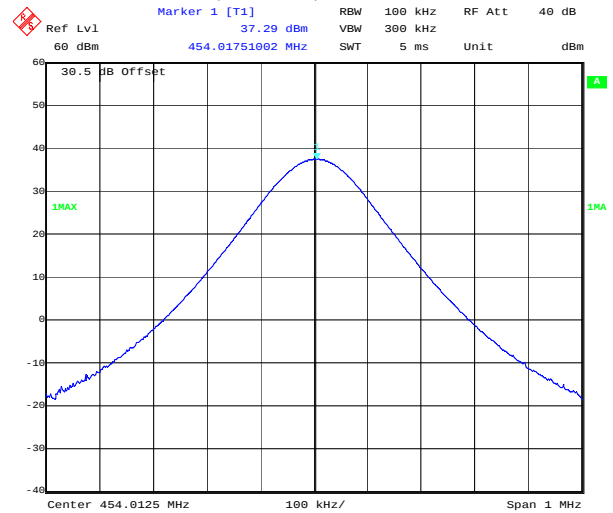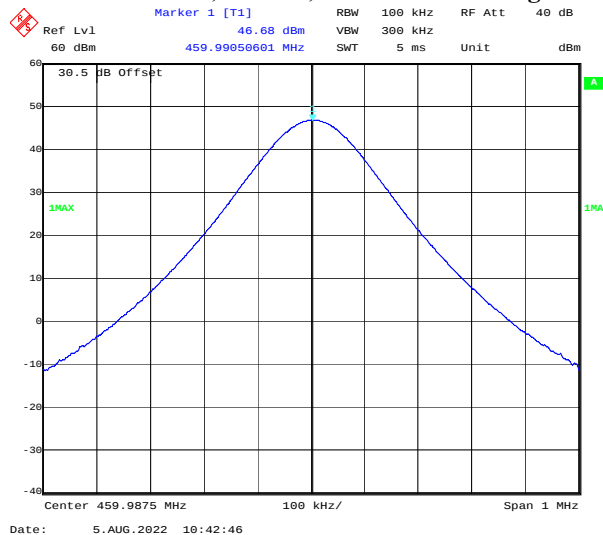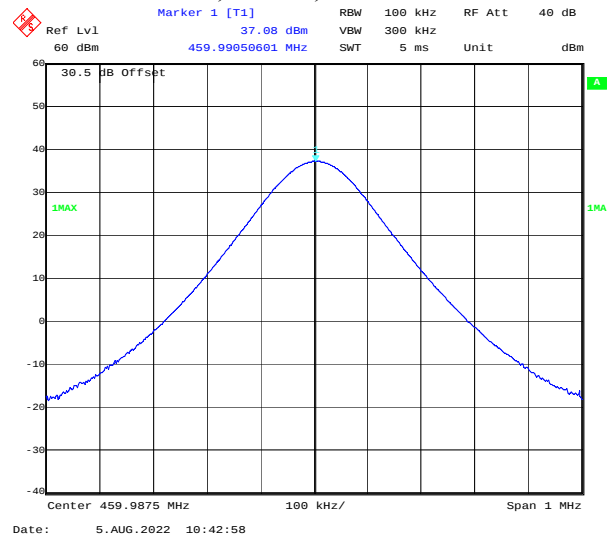FM, 25kHz:**Additional Channel, Part 74, 455.0125 MHz High Power****Additional Channel, Part 74, 455.0125 MHz Low Power****Additional Channel, Part 22, 454.0125 MHz High Power****Additional Channel, Part 22, 454.0125 MHz Low Power****Additional Channel, Part 80, 459.9875 MHz High Power****Additional Channel, Part 80, 459.9875 MHz Low Power**

4.3 OCCUPIED BANDWIDTH & EMISSION MASK:

Serial Number:	CR22070026-RF-S1	Test Date:	2022/08/05-2022/08/08
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.5-28.1	Relative Humidity: (%)	64-68	ATM Pressure: (kPa)	100.1-100.2
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100004	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2022-07-15	2023-07-14

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Modulation Mode	Channel Separation	Test Frequency (MHz)	High Power Level		Low Power Level	
			99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
FM	12.5kHz	400.0125	9.820	10.401	10.020	10.401
		453.2125	9.920	10.401	10.020	10.401
		469.9875	9.920	10.451	10.020	10.451
		454.0125	9.920	10.451	10.020	10.451
		455.0125	9.920	10.451	9.920	10.451
4FSK	12.5kHz	400.0125	7.615	9.950	7.515	9.549
		453.2125	7.415	9.649	7.615	9.549
		469.9875	7.415	9.749	7.515	9.549
		454.0125	7.515	9.749	7.315	9.349
		455.0125	7.415	9.850	7.415	9.649
FM	25kHz	454.0125	15.030	16.002	15.030	16.002
		455.0125	14.830	16.002	15.030	16.002
		459.9875	14.830	16.092	15.030	15.992

Note: Emission bandwidth was based on calculation method instead of measurement.

Emission Designator: Per CFR 47 §2.201& §2.202, BW = 2M + 2D

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25 kHz)

Emission Designator: 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 7K60F1D and 7K60F1E

The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).



F1D and F1E portion of the designator indicates digital information.

Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.



The 30.50dB is the Insertion loss of the RF cable, Coaxial Attenuators, which was offset into the Spectrum Analyzer.

FM, 12.5kHz, High Power:



Low Channel

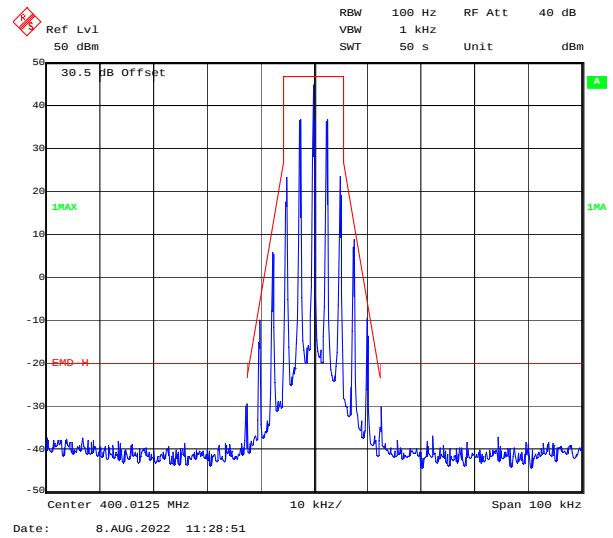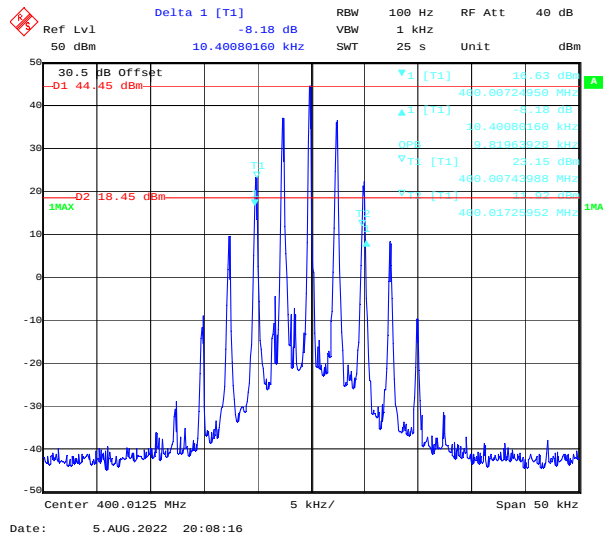



Middle Channel

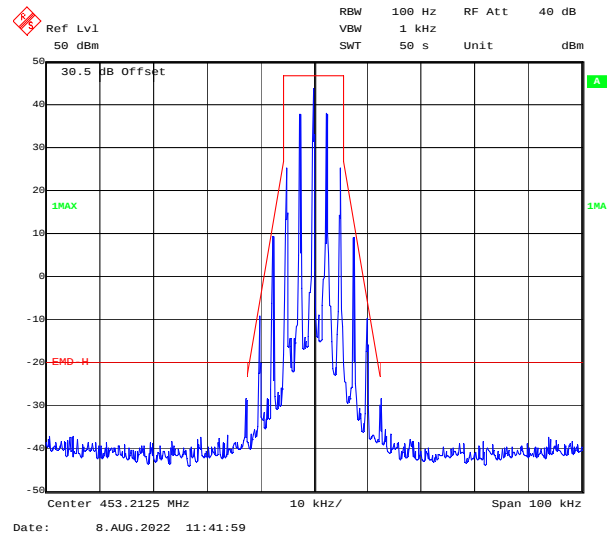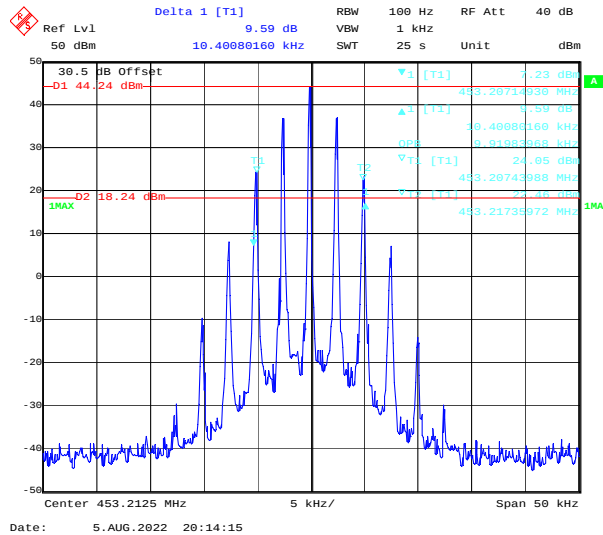



High Channel

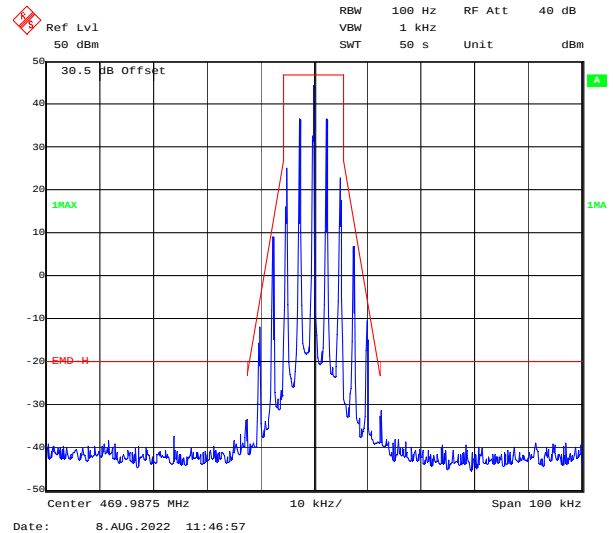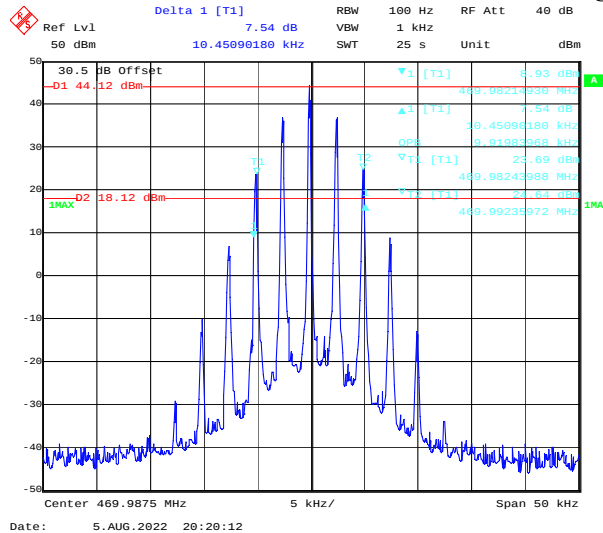

Additional Channel Part 74, 455.0125 MHz

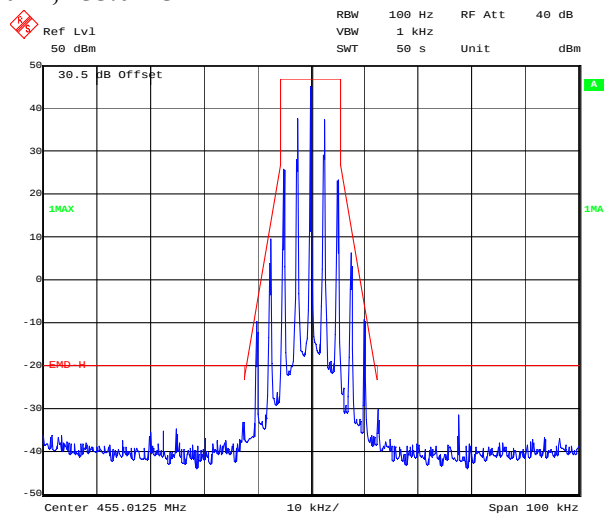
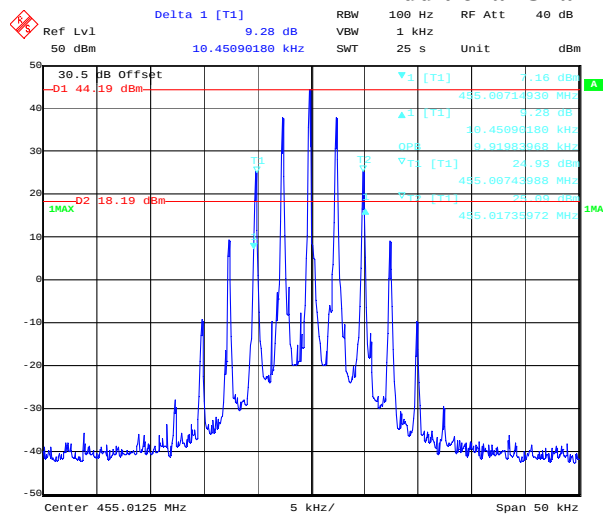


Additional Channel Part 22, 454.0125 MHz

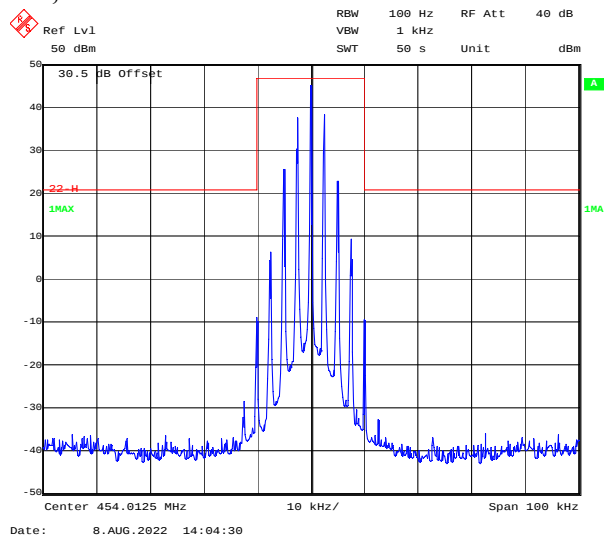
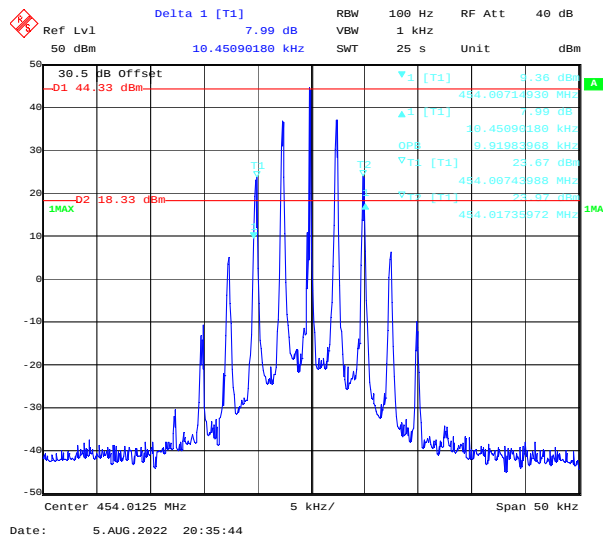


FM, 12.5kHz, Low Power:



Low Channel

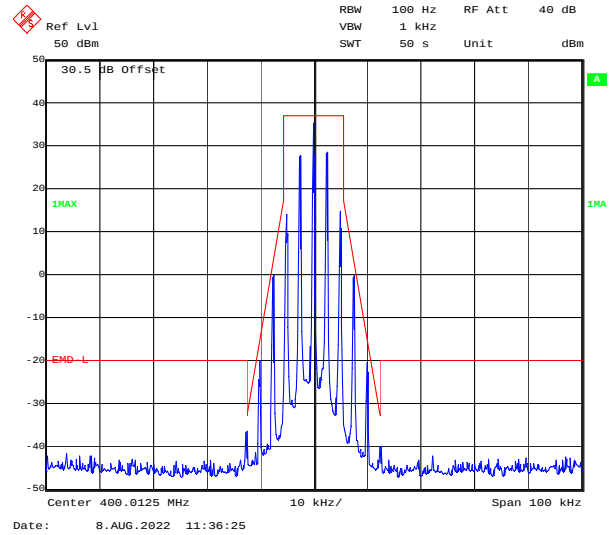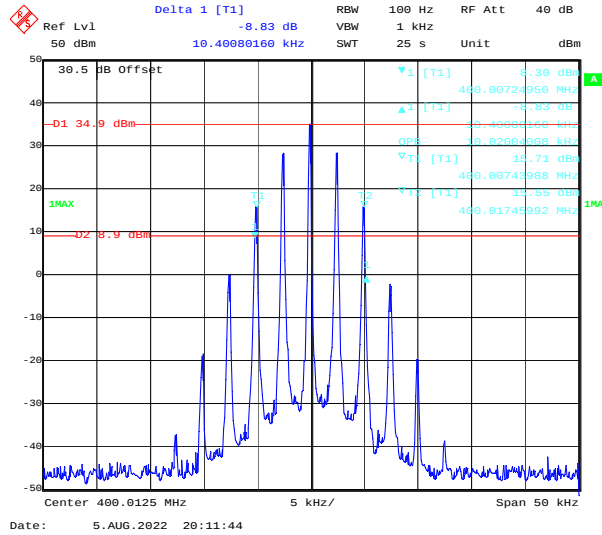



Middle Channel

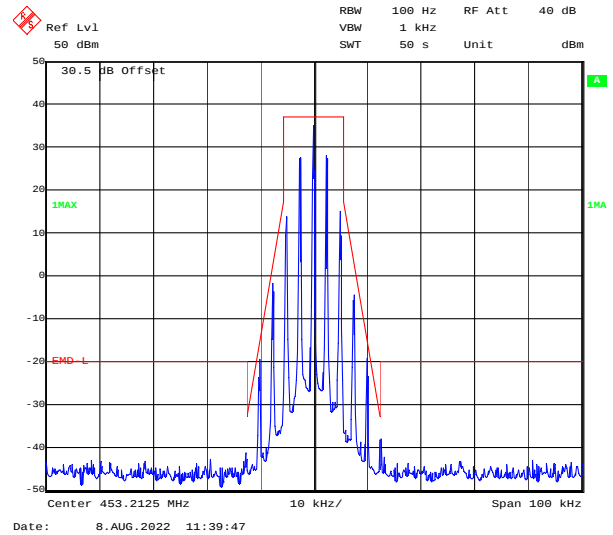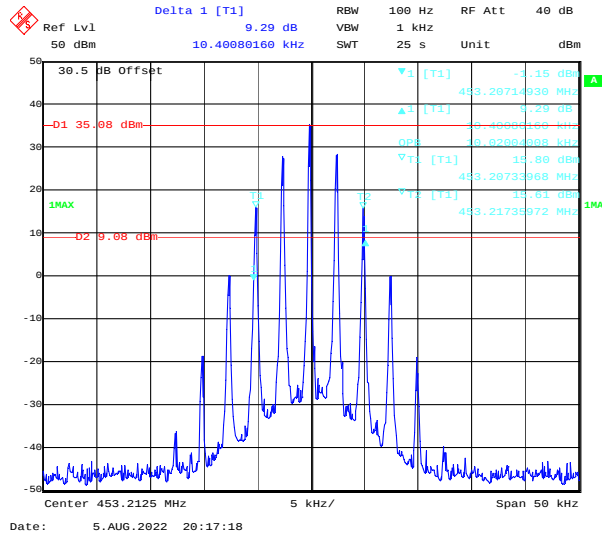



High Channel

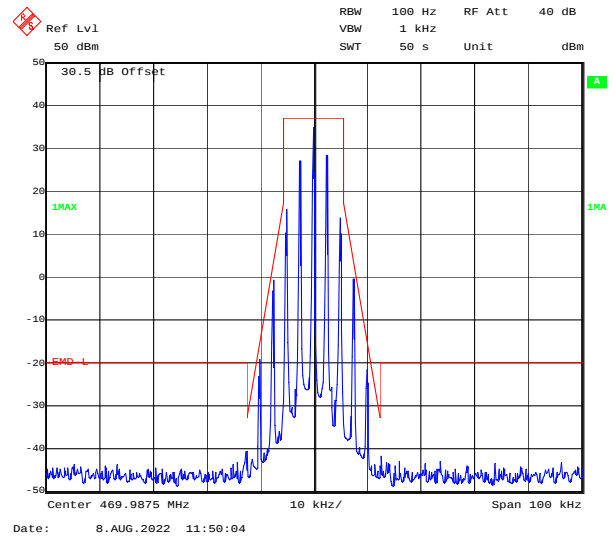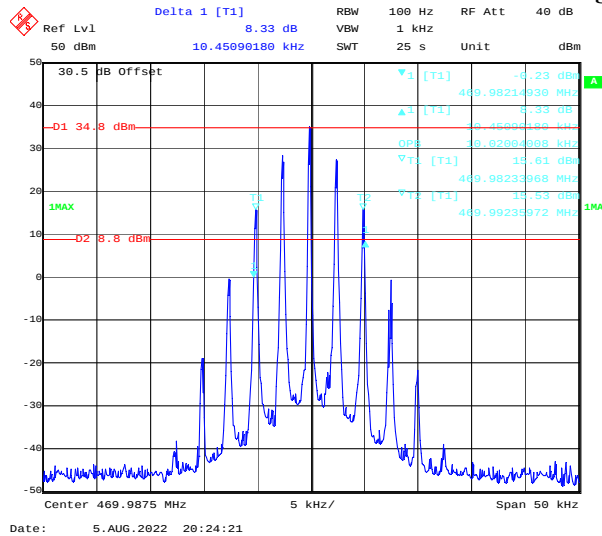

Additional Channel Part 74, 455.0125 MHz

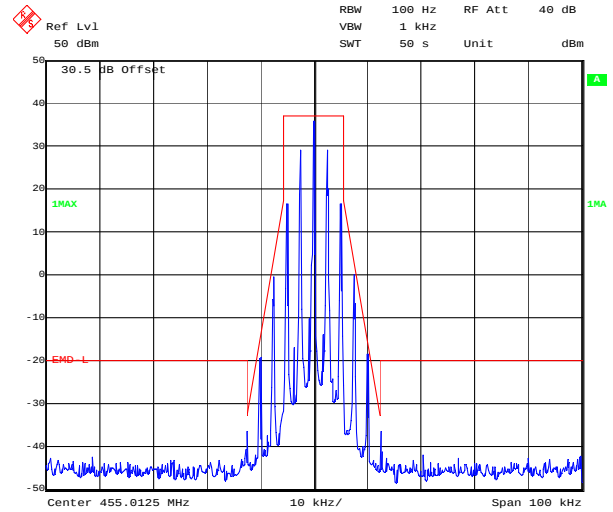
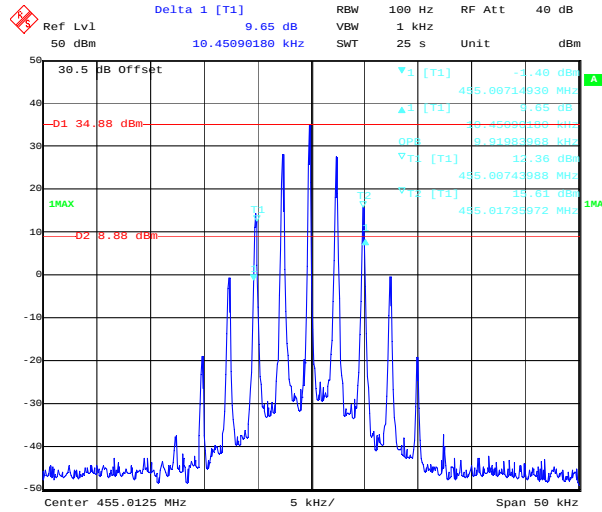


Additional Channel Part 22, 454.0125 MHz

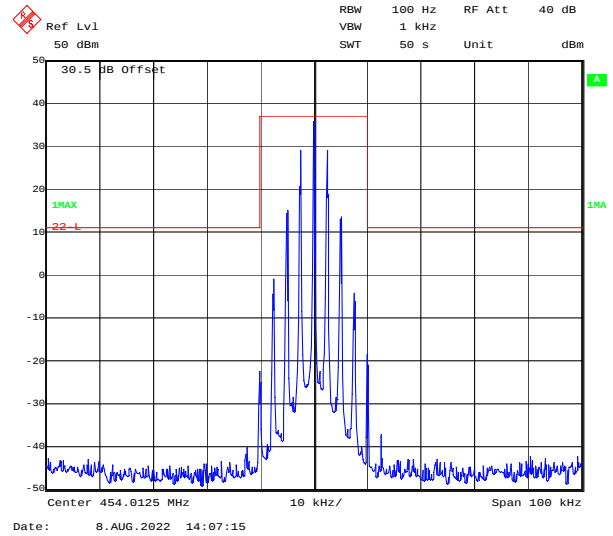
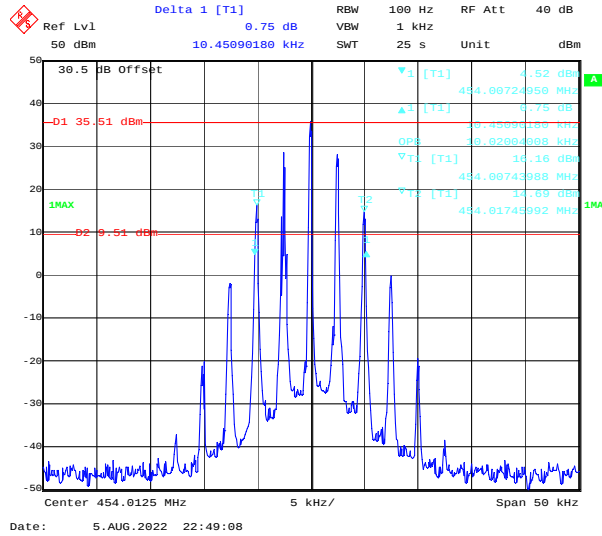


4FSK, 12.5kHz, High Power:



Low Channel

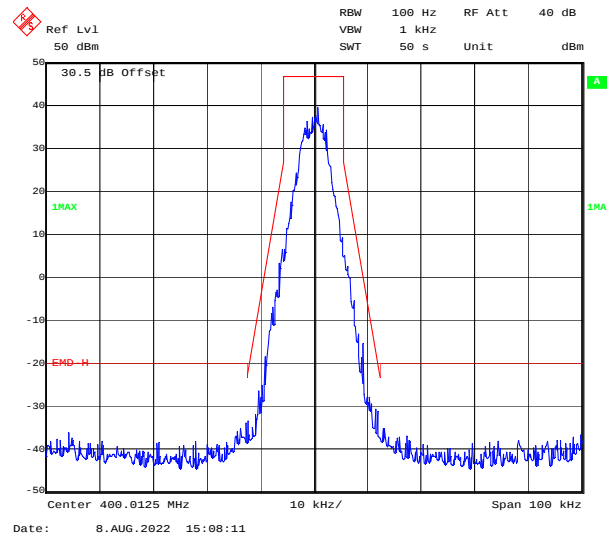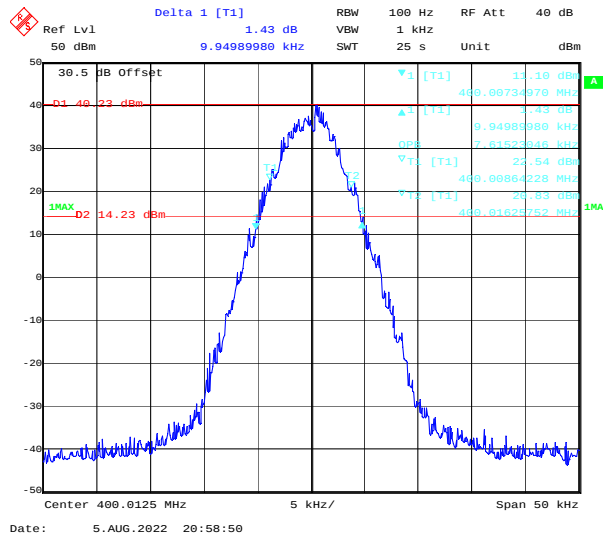

Middle Channel

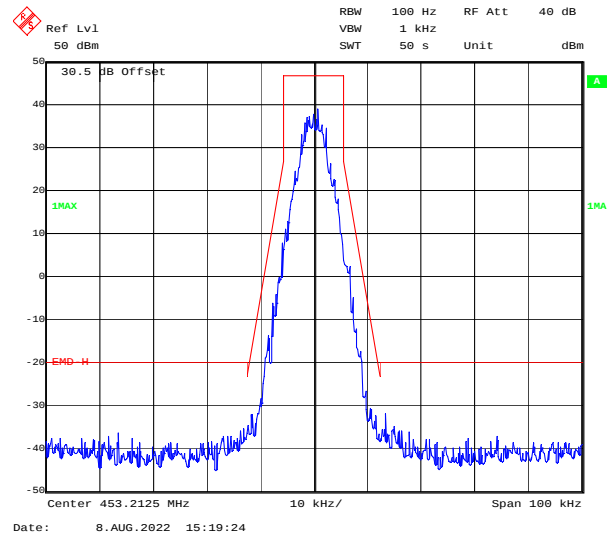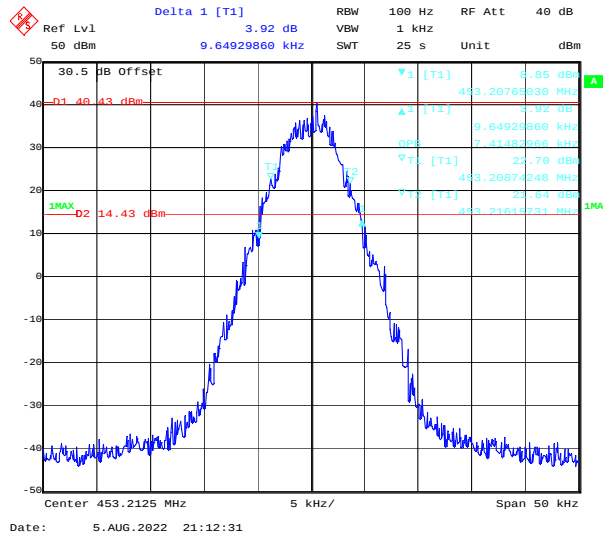

High Channel

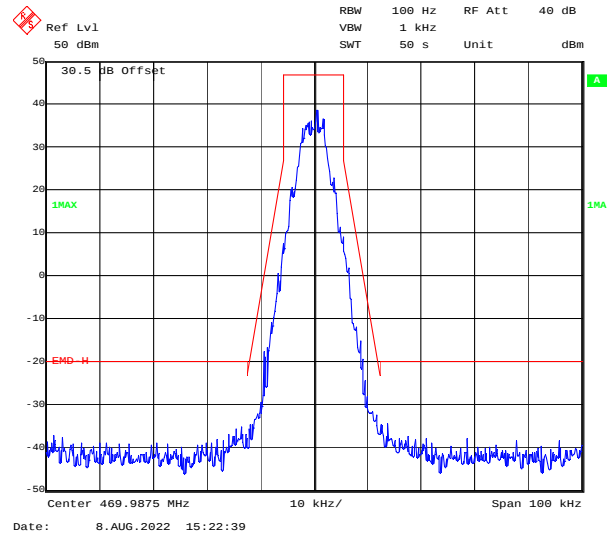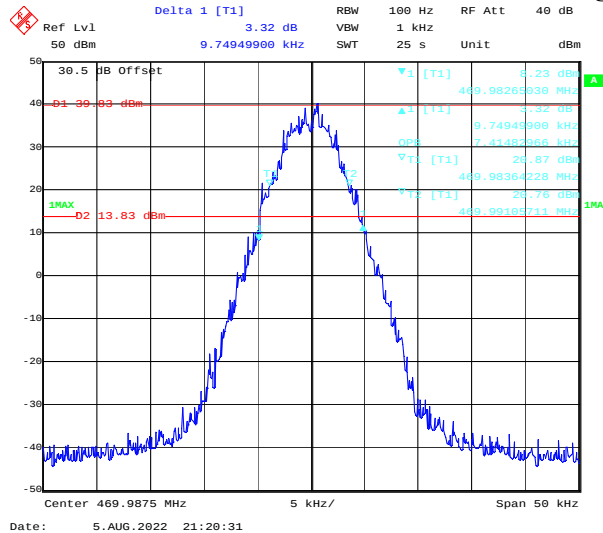

[illegible]

Ref Lvl 100 Hz RF Att 40 dB
50 dBm SWT 50 s Unit dBm

30.5 MHz Offset

1MAX

END H

Center 455.0125 MHz 10 kHz/ Span 100 kHz

Ref Lvl 10.48 dBm
50 dBm
454.00755919 MHz

Marker 1 [T1]
10.48 dBm
454.00755919 MHz


RBW 100 Hz
VBW 1 kHz
SWT 25 s

RF Att 40 dB
Unit dBm

30.5 dB Offset
D1 40.1 dBm
D2 14.1 dBm
MAX
T1
T2
T3
T4
T5
T6
T7
T8
T9
T10
T11
T12
T13
T14
T15
T16
T17
T18
T19
T20
T21
T22
T23
T24
T25
T26
T27
T28
T29
T30
T31
T32
T33
T34
T35
T36
T37
T38
T39
T40
T41
T42
T43
T44
T45
T46
T47
T48
T49
T50
T51
T52
T53
T54
T55
T56
T57
T58
T59
T60
T61
T62
T63
T64
T65
T66
T67
T68
T69
T70
T71
T72
T73
T74
T75
T76
T77
T78
T79
T80
T81
T82
T83
T84
T85
T86
T87
T88
T89
T90
T91
T92
T93
T94
T95
T96
T97
T98
T99
T100
T101
T102
T103
T104
T105
T106
T107
T108
T109
T110
T111
T112
T113
T114
T115
T116
T117
T118
T119
T120
T121
T122
T123
T124
T125
T126
T127
T128
T129
T130
T131
T132
T133
T134
T135
T136
T137
T138
T139
T140
T141
T142
T143
T144
T145
T146
T147
T148
T149
T150
T151
T152
T153
T154
T155
T156
T157
T158
T159
T160
T161
T162
T163
T164
T165
T166
T167
T168
T169
T170
T171
T172
T173
T174
T175
T176
T177
T178
T179
T180
T181
T182
T183
T184
T185
T186
T187
T188
T189
T190
T191
T192
T193
T194
T195
T196
T197
T198
T199
T200
T201
T202
T203
T204
T205
T206
T207
T208
T209
T210
T211
T212
T213
T214
T215
T216
T217
T218
T219
T220
T221
T222
T223
T224
T225
T226
T227
T228
T229
T230
T231
T232
T233
T234
T235
T236
T237
T238
T239
T240
T241
T242
T243
T244
T245
T246
T247
T248
T249
T250
T251
T252
T253
T254
T255
T256
T257
T258
T259
T260
T261
T262
T263
T264
T265
T266
T267
T268
T269
T270
T271
T272
T273
T274
T275
T276
T277
T278
T279
T280
T281
T282
T283
T284
T285
T286
T287
T288
T289
T290
T291
T292
T293
T294
T295
T296
T297
T298
T299
T300
T301
T302
T303
T304
T305
T306
T307
T308
T309
T310
T311
T312
T313
T314
T315
T316
T317
T318
T319
T320
T321
T322
T323
T324
T325
T326
T327
T328
T329
T330
T331
T332
T333
T334
T335
T336
T337
T338
T339
T340
T341
T342
T343
T344
T345
T346
T347
T348
T349
T350
T351
T352
T353
T354
T355
T356
T357
T358
T359
T360
T361
T362
T363
T364
T365
T366
T367
T368
T369
T370
T371
T372
T373
T374
T375
T376
T377
T378
T379
T380
T381
T382
T383
T384
T385
T386
T387
T388
T389
T390
T391
T392
T393
T394
T395
T396
T397
T398
T399
T400
T401
T402
T403
T404
T405
T406
T407
T408
T409
T410
T411
T412
T413
T414
T415
T416
T417
T418
T419
T420
T421
T422
T423
T424
T425
T426
T427
T428
T429
T430
T431
T432
T433
T434
T435
T436
T437
T438
T439
T440
T441
T442
T443
T444
T445
T446
T447
T448
T449
T450
T451
T452
T453
T454
T455
T456
T457
T458
T459
T460
T461
T462
T463
T464
T465
T466
T467
T468
T469
T470
T471
T472
T473
T474
T475
T476
T477
T478
T479
T480
T481
T482
T483
T484
T485
T486
T487
T488
T489
T490
T491
T492
T493
T494
T495
T496
T497
T498
T499
T500
T501
T502
T503
T504
T505
T506
T507
T508
T509
T510
T511
T512
T513
T514
T515
T516
T517
T518
T519
T520
T521
T522
T523
T524
T525
T526
T527
T528
T529
T530
T531
T532
T533
T534
T535
T536
T537
T538
T539
T540
T541
T542
T543
T544
T545
T546
T547
T548
T549
T550
T551
T552
T553
T554
T555
T556
T557
T558
T559
T560
T561
T562
T563
T564
T565
T566
T567
T568
T569
T570
T571
T572
T573
T574
T575
T576
T577
T578
T579
T580
T581
T582
T583
T584
T585
T586
T587
T588
T589
T590
T591
T592
T593
T594
T595
T596
T597
T598
T599
T600
T601
T602
T603
T604
T605
T606
T607
T608
T609
T610
T611
T612
T613
T614
T615
T616
T617
T618
T619
T620
T621
T622
T623
T624
T625
T626
T627
T628
T629
T630
T631
T632
T633
T634
T635
T636
T637
T638
T639
T640
T641
T642
T643
T644
T645
T646
T647
T

Port 22, 454.0125 MHz

 Ref Lvl 50 dBm RBW 100 Hz RF Att 40 dB
50 dBm SWT 50 s Unit dBm

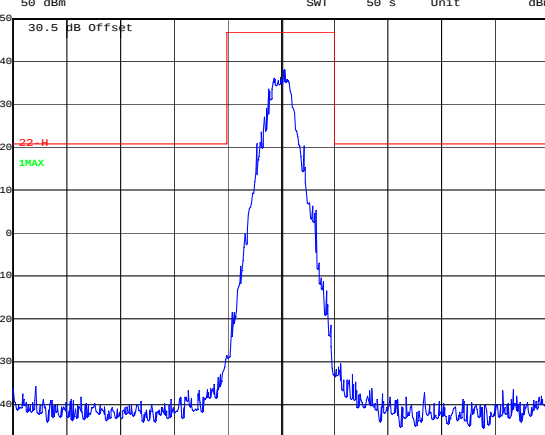

30.5 1B Offset

-23 dBm



1MAX

Center 454.0125 MHz 10 kHz/ Span 100 kHz



Date: 8.AUG.2022 15:34:23

4FSK, 12.5kHz, Low Power:



Low Channel

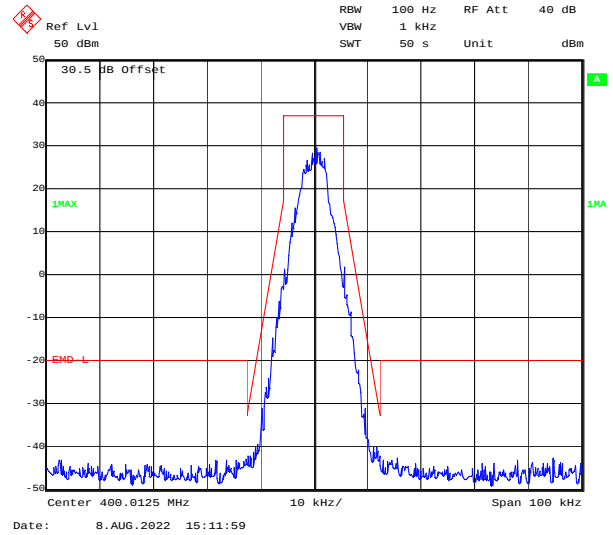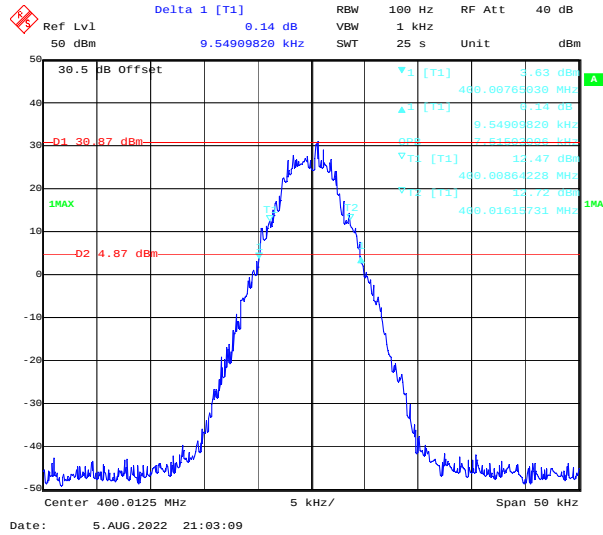



Middle Channel

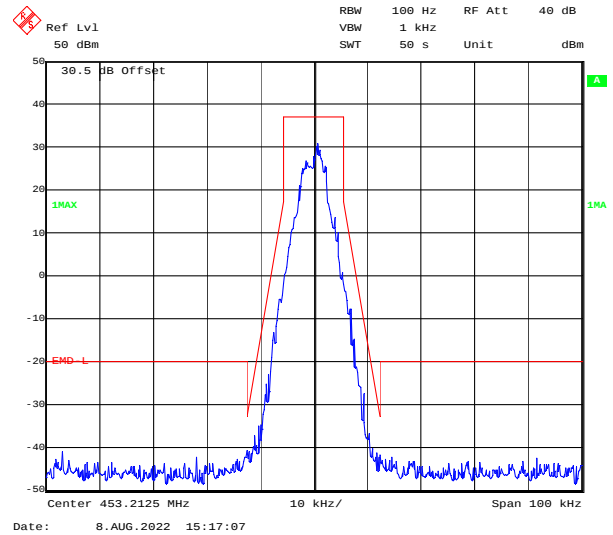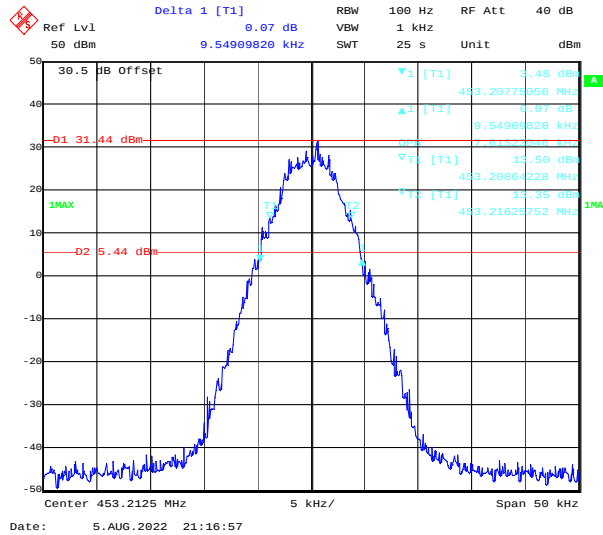



High Channel

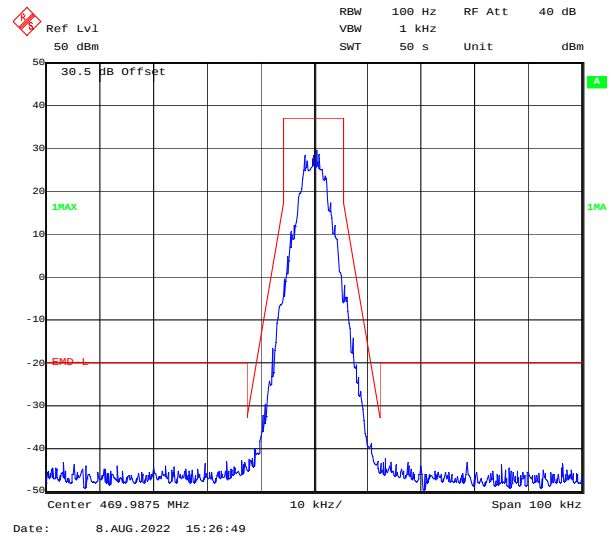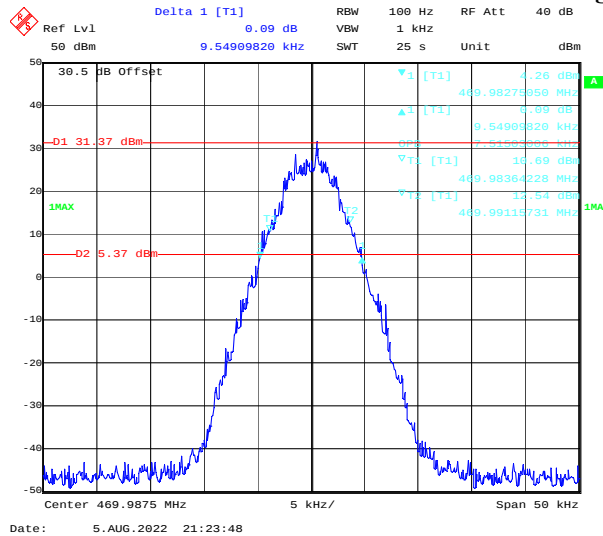

Additional Channel Part 74, 455.0125 MHz

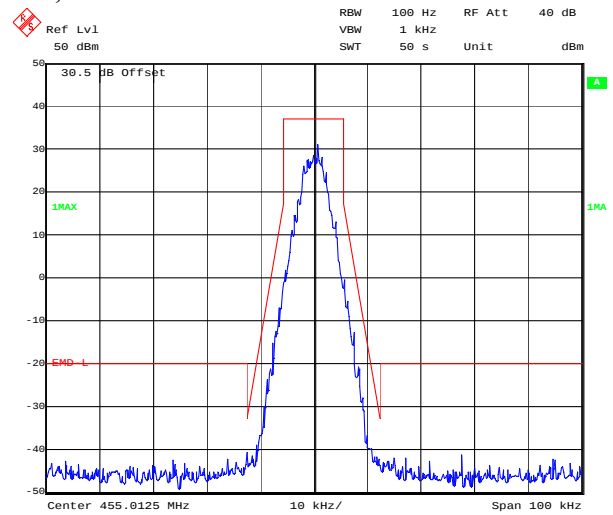
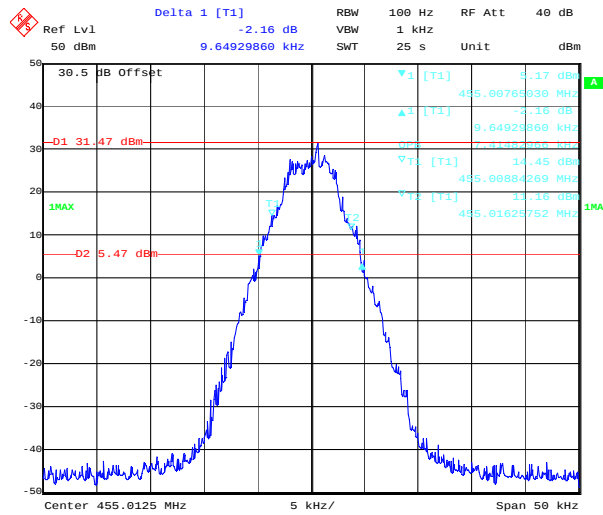


Additional Channel Part 22, 454.0125 MHz

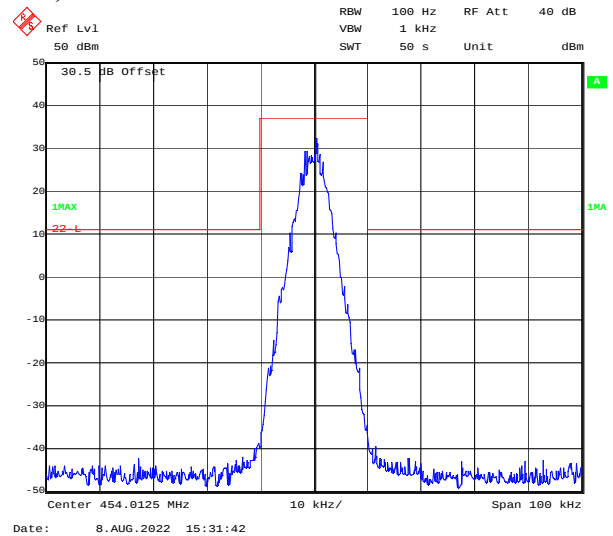
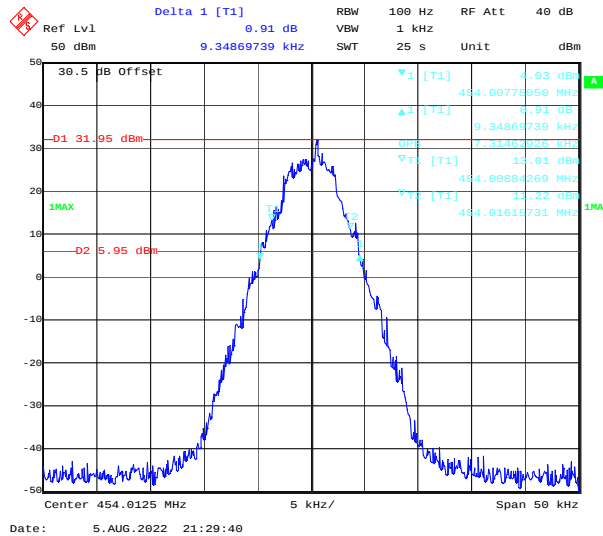


FM, 25 kHz, High Power:



Additional Channel Part 80, 459.9875 MHz

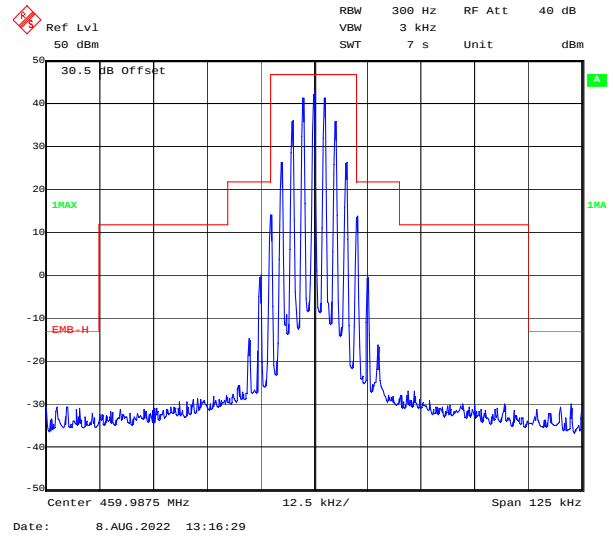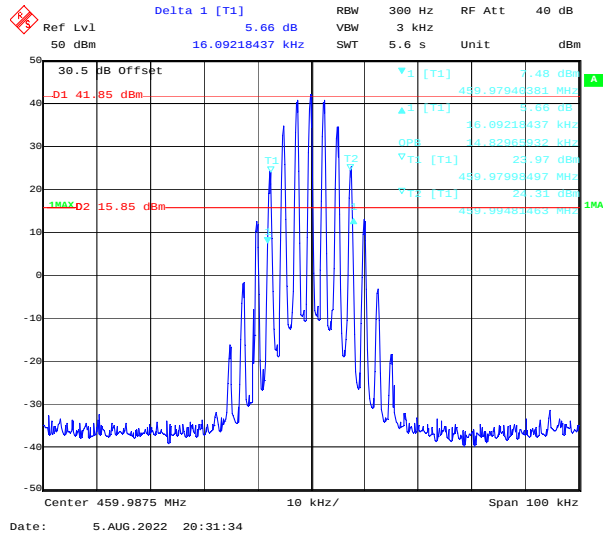

Additional Channel Part 74, 455.0125 MHz

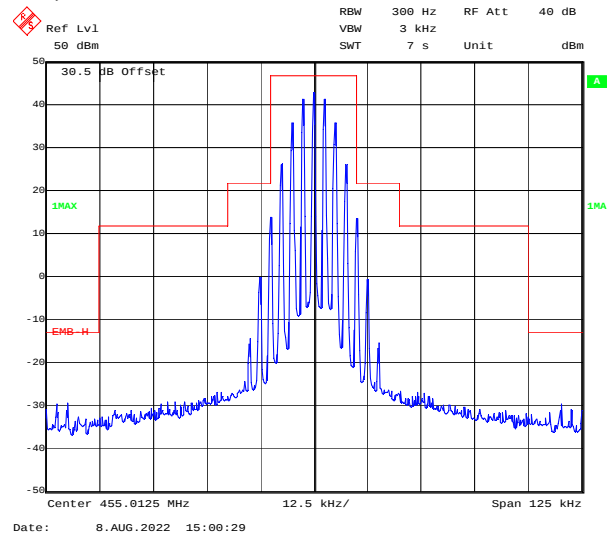
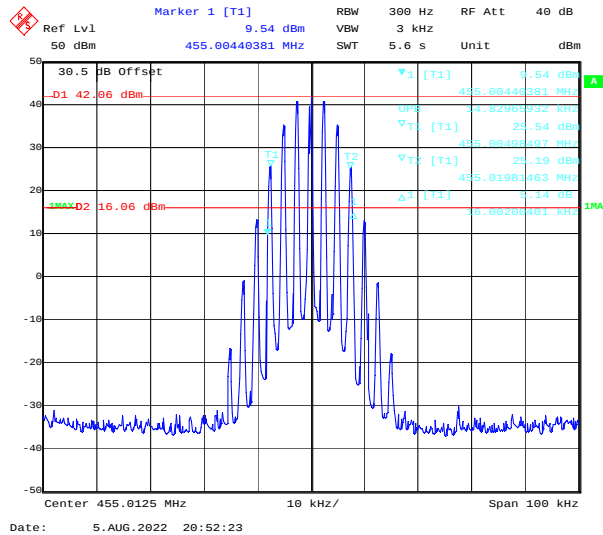


Additional Channel Part 22, 454.0125 MHz

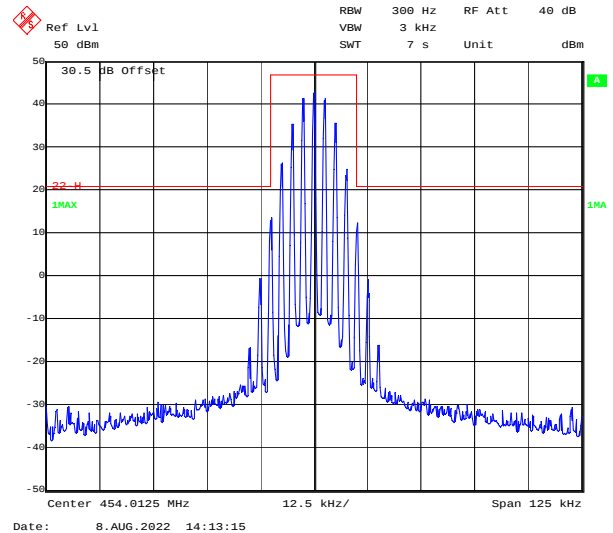
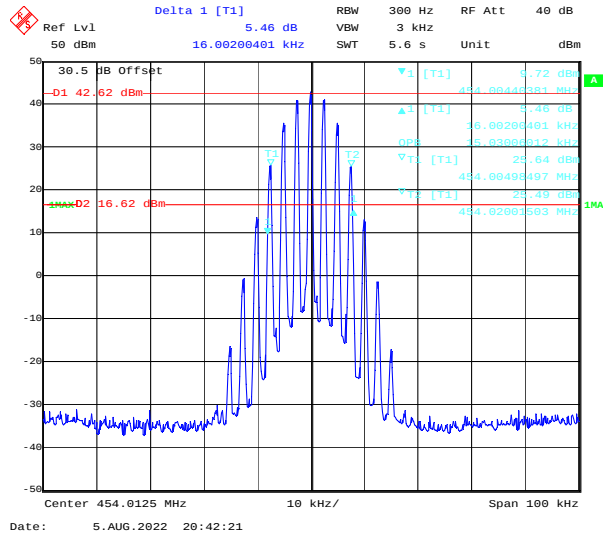


FM, 25 kHz, Low Power:



Additional Channel Part 80, 459.9875 MHz

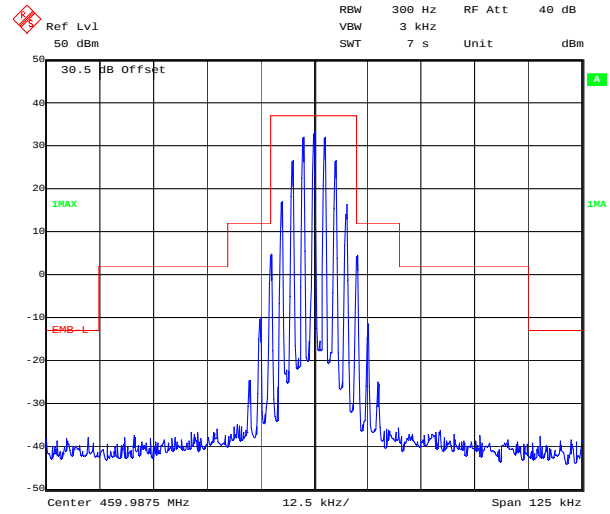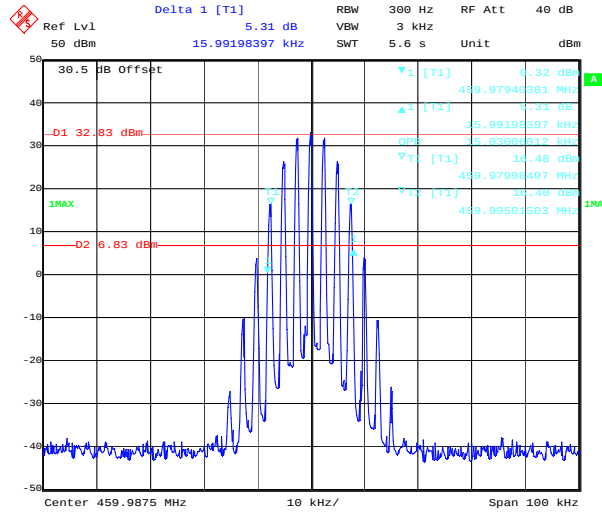

Additional Channel Part 74, 455.0125 MHz

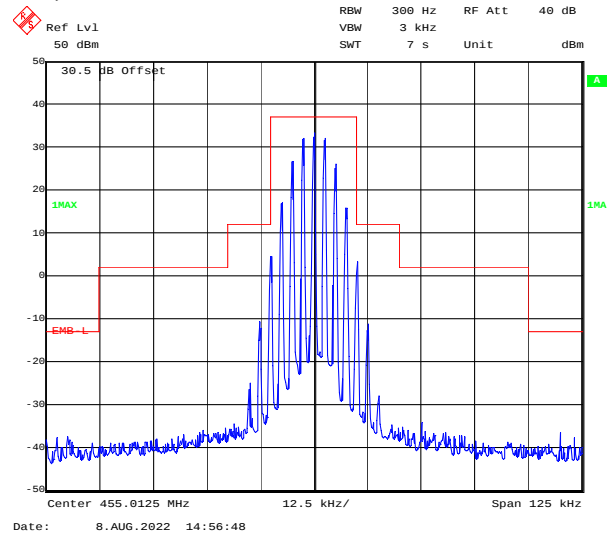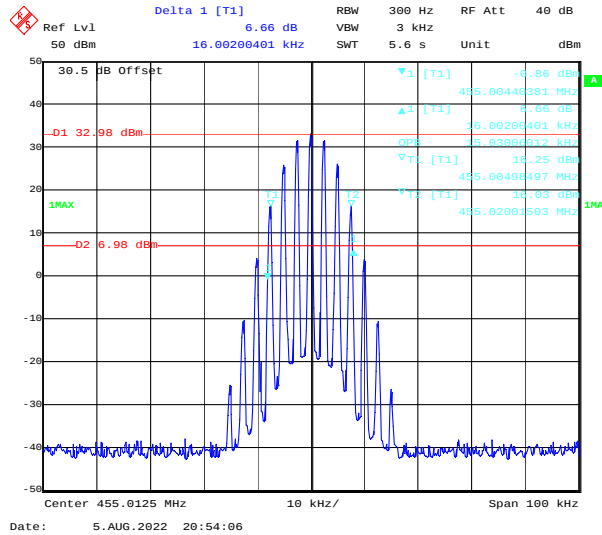

Additional Channel Part 22, 454.0125 MHz

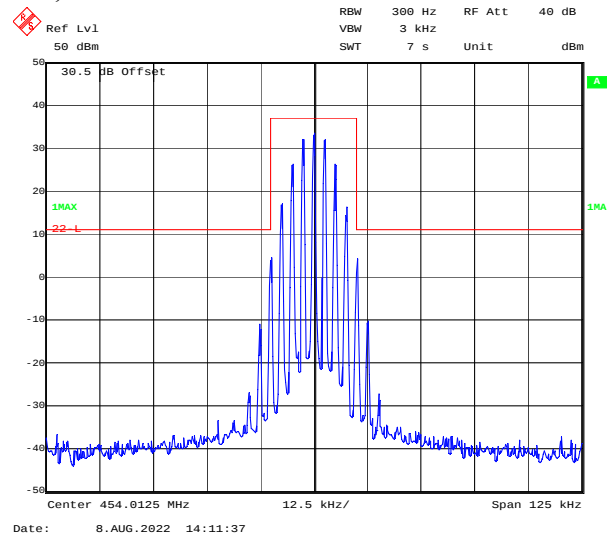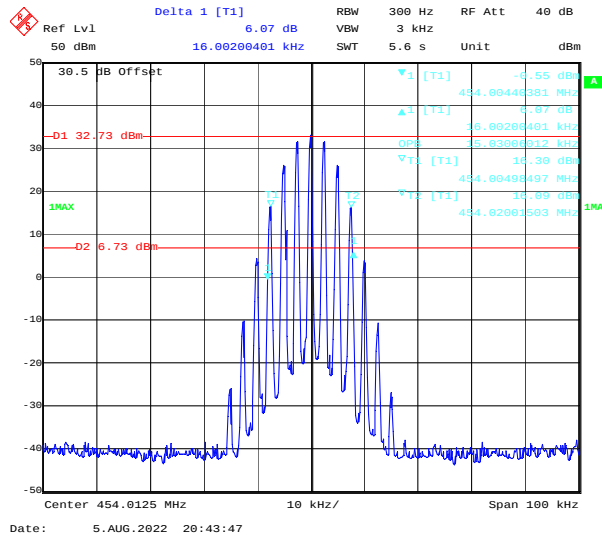

4.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS:

Serial Number:	CR22070026-RF-S1	Test Date:	2022/08/05-2022/08/08
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.5-28.1	Relative Humidity: (%)	64-68	ATM Pressure: (kPa)	100.1-100.2
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100004	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2022-07-15	2023-07-14
E-Microwave	Band Rejection Filter	OBF-ZP-400-470-NF	OE02214273	2022-07-15	2023-07-14

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:



Note:

Only High power was tested.



The 30.50dB is the Insertion loss of the RF cable, Coaxial Attenuators, which was offset into the Spectrum Analyzer.

FM, 12.5kHz:



Low Channel, 400.0125 MHz

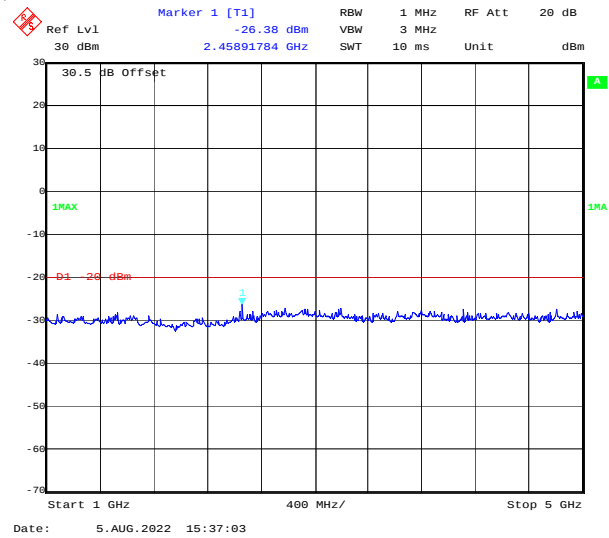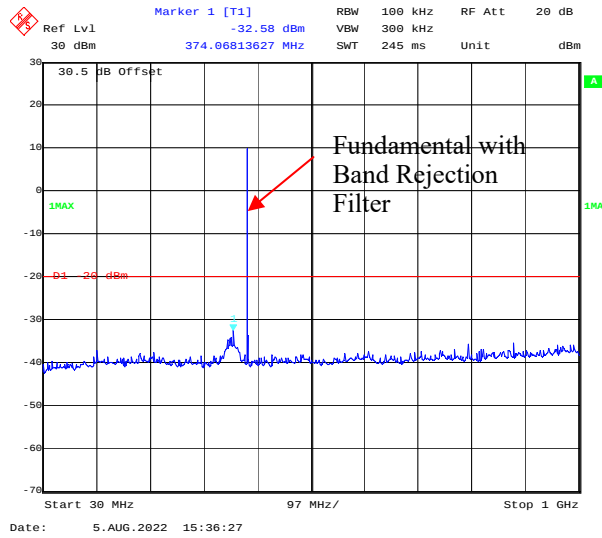

Middle Channel, 453.2125 MHz

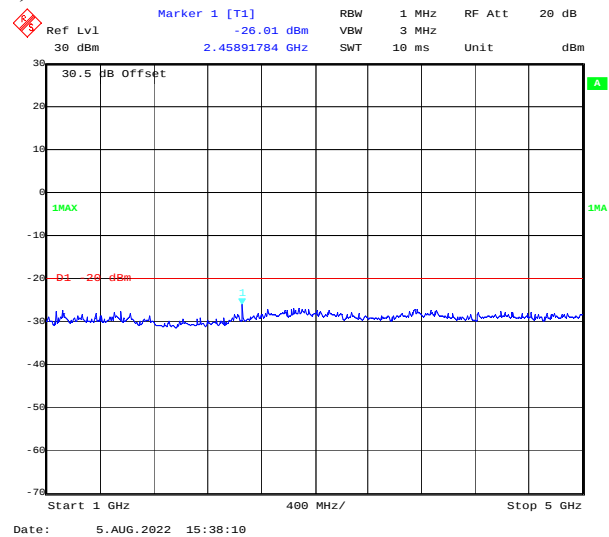
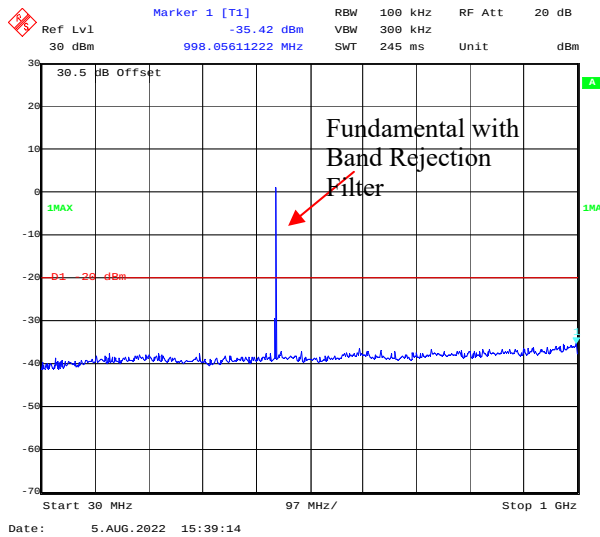


High Channel, 469.9875 MHz

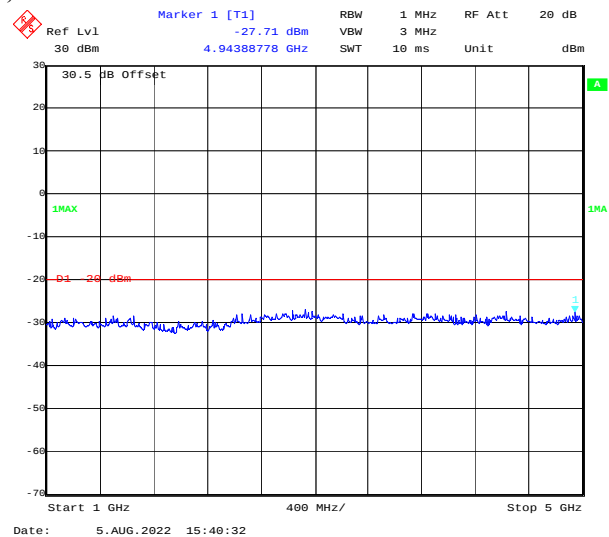
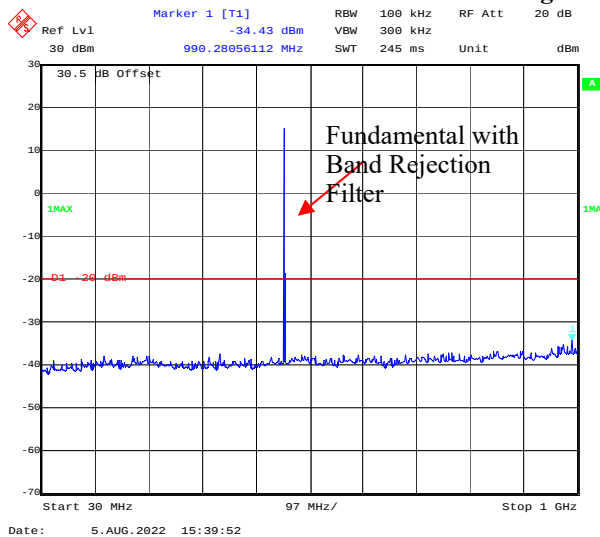


4FSK, 12.5kHz:



Low Channel, 400.0125 MHz

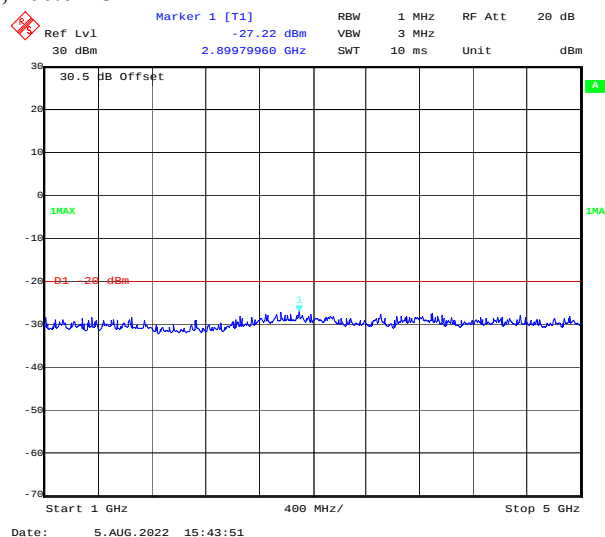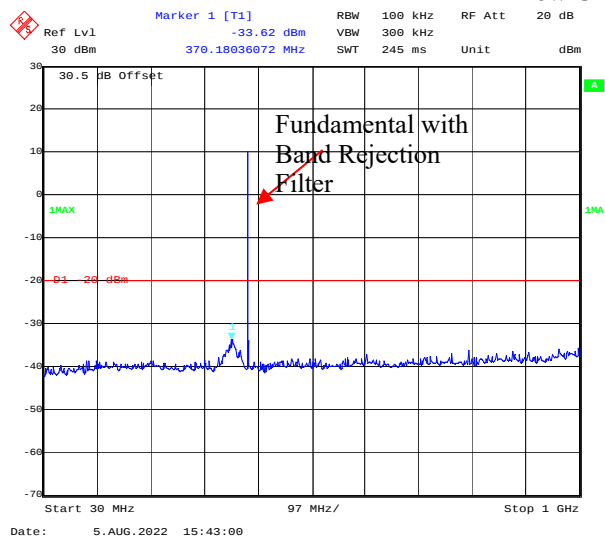

Middle Channel, 453.2125 MHz

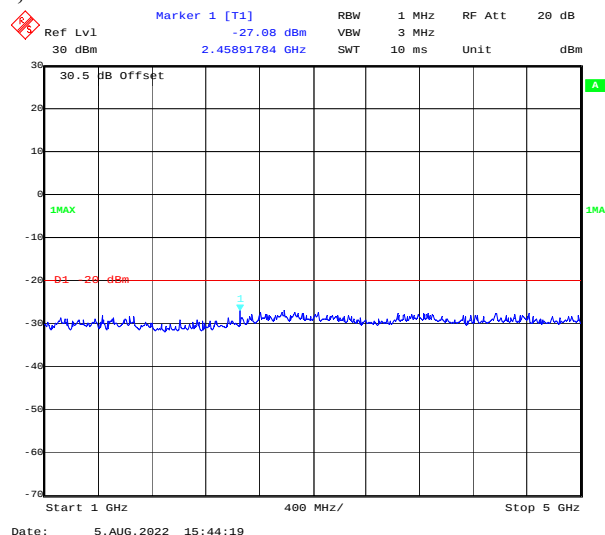
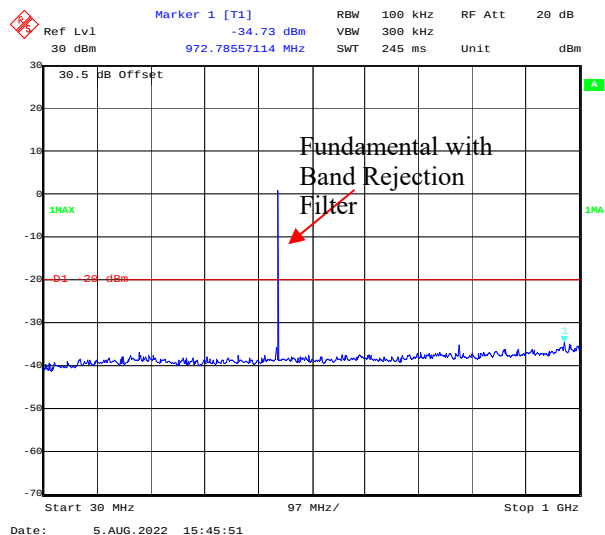


High Channel, 469.9875 MHz

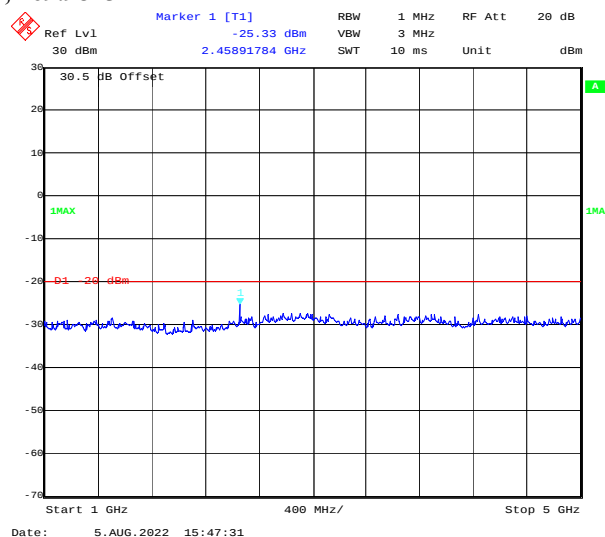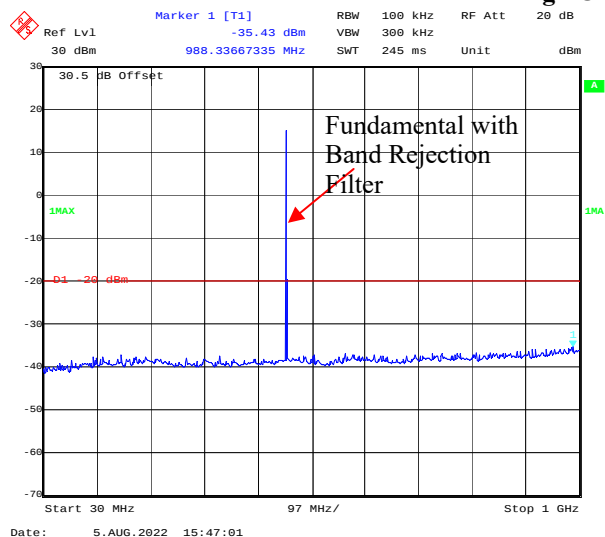



Part 80:

FM, 25kHz, 459.9875 MHz

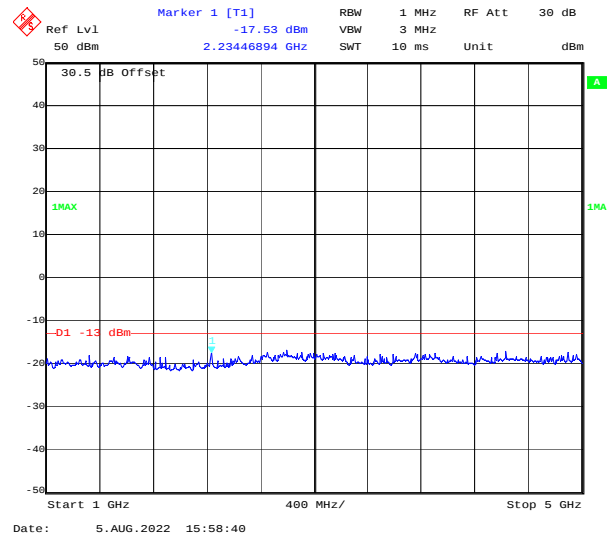
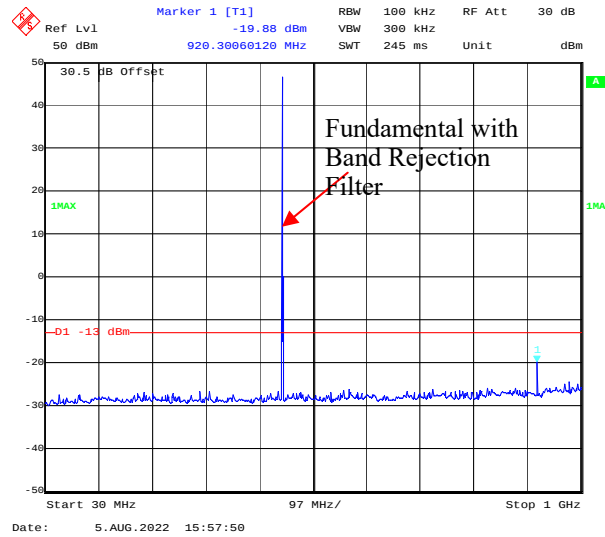


Part 74:



FM,12.5kHz, 455.0125 MHz

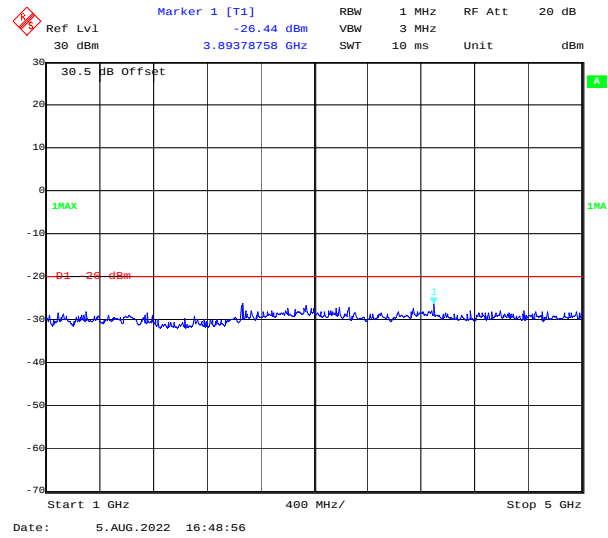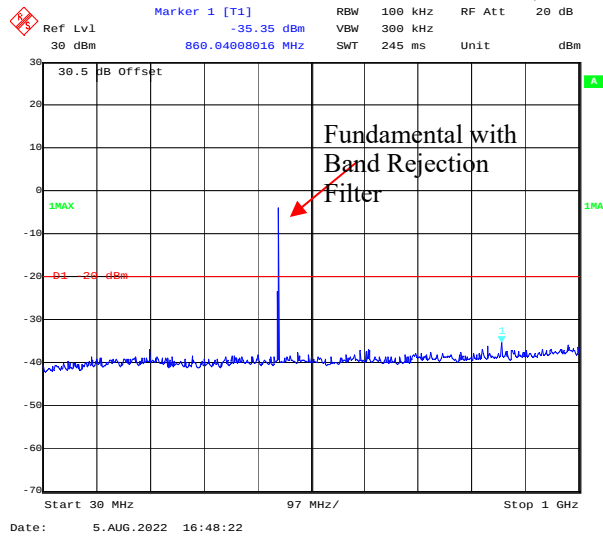

FM,25kHz, 455.0125 MHz

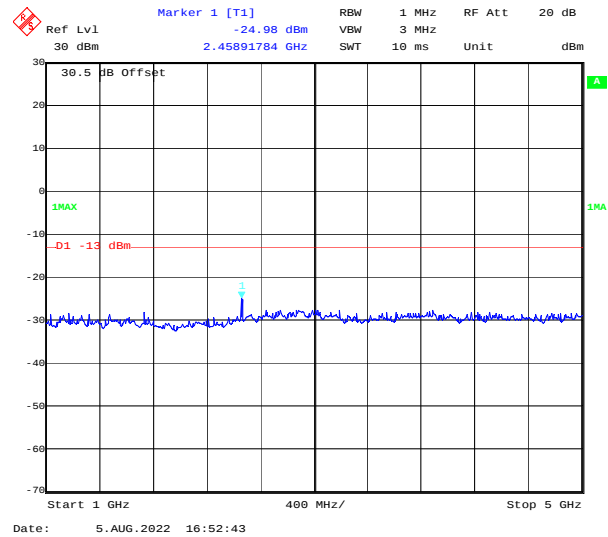
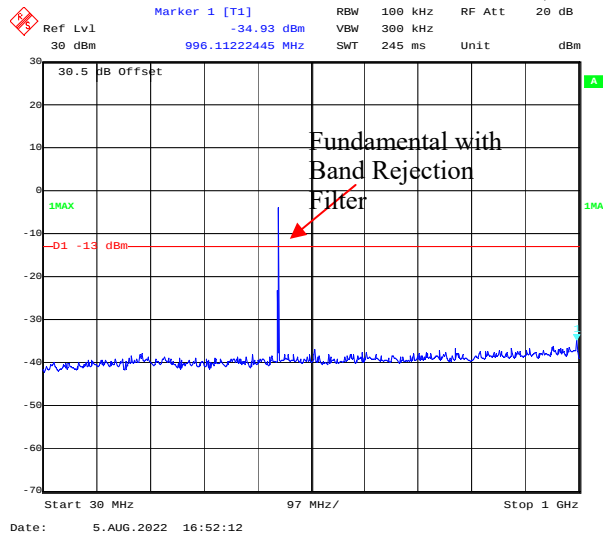


4FSK,12.5kHz, 455.0125 MHz

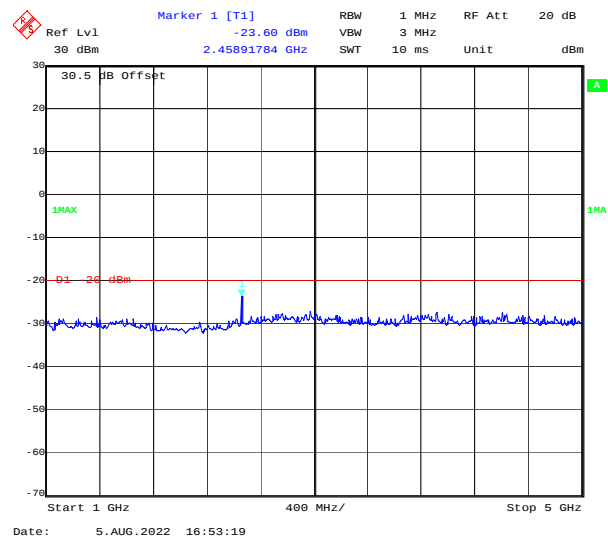
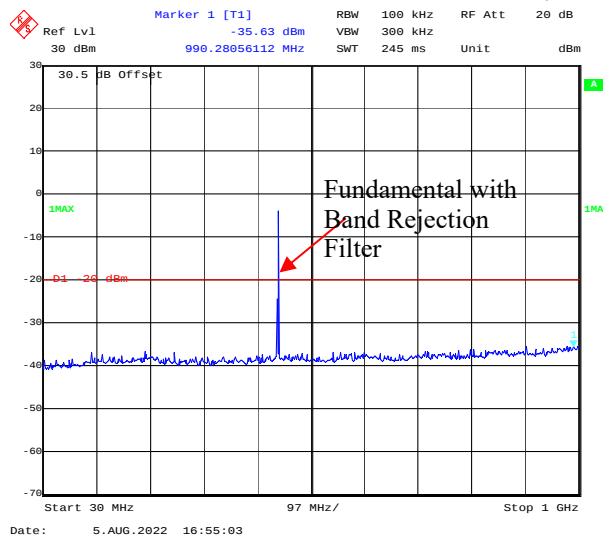


Part 22:



FM,12.5kHz, 454.0125 MHz

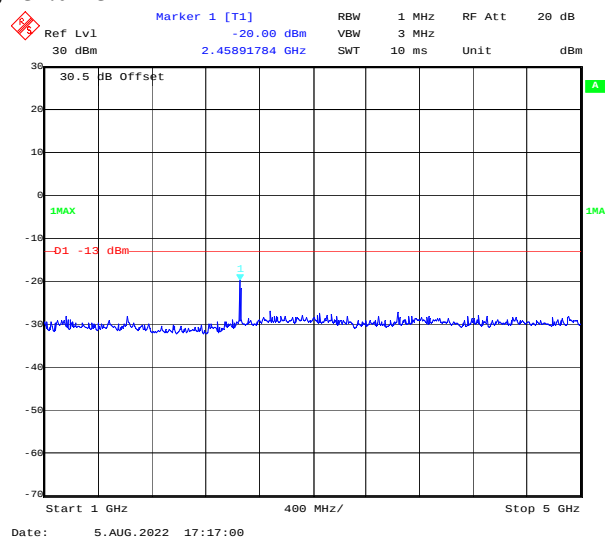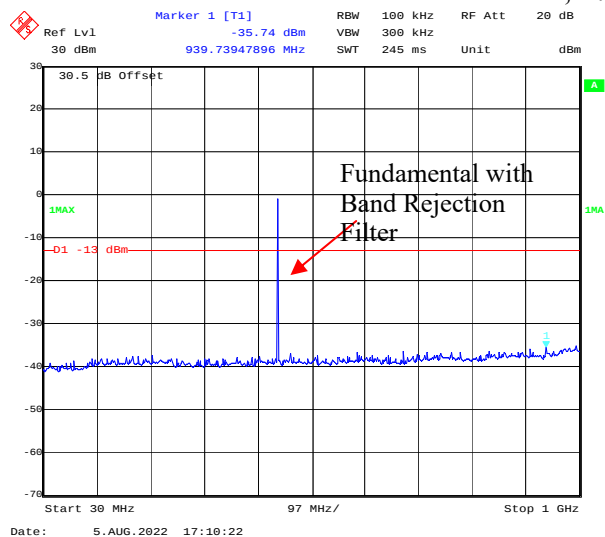

FM,25kHz, 454.0125 MHz

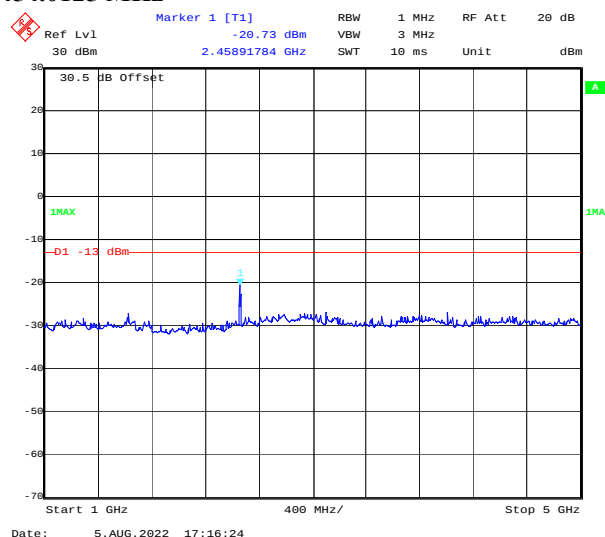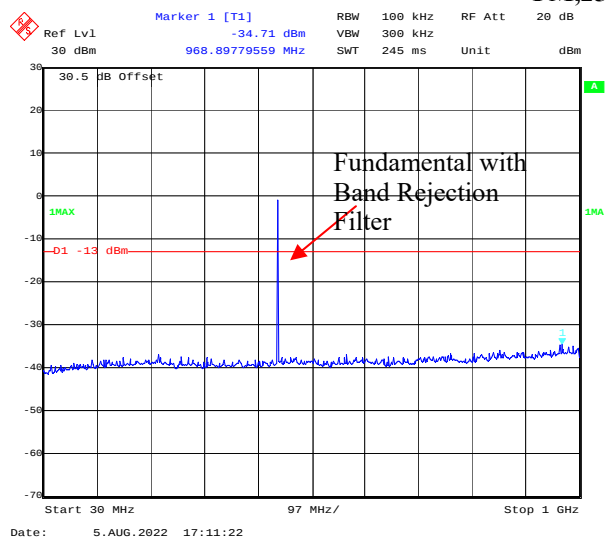

4FSK,12.5kHz, 454.0125 MHz

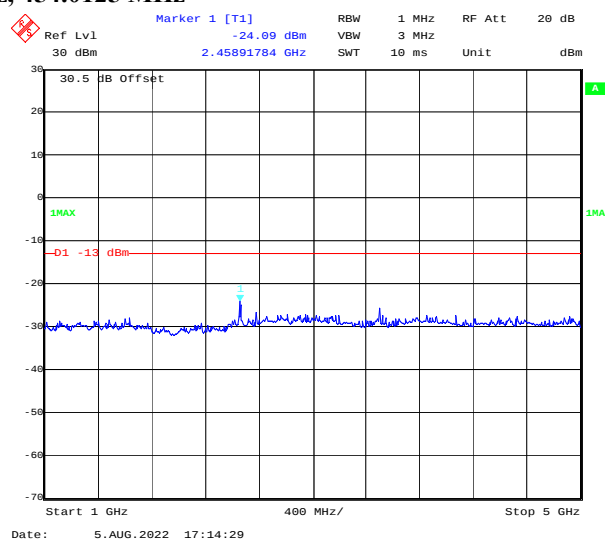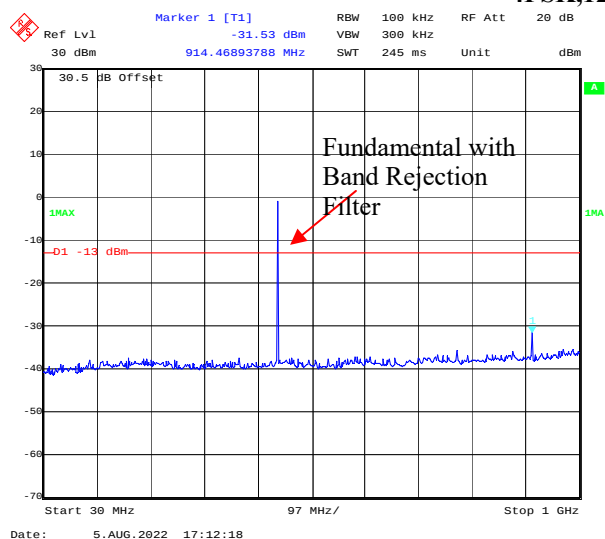

4.5 MODULATION CHARACTERISTIC:

Serial Number:	CR22070026-RF-S1	Test Date:	2022/08/05-2022/08/08
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	27.5-28.1	Relative Humidity: (%)	64-68	ATM Pressure: (kPa)	100.1-100.2



Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100004	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2022-07-15	2023-07-14

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Audio Frequency Response – High Power

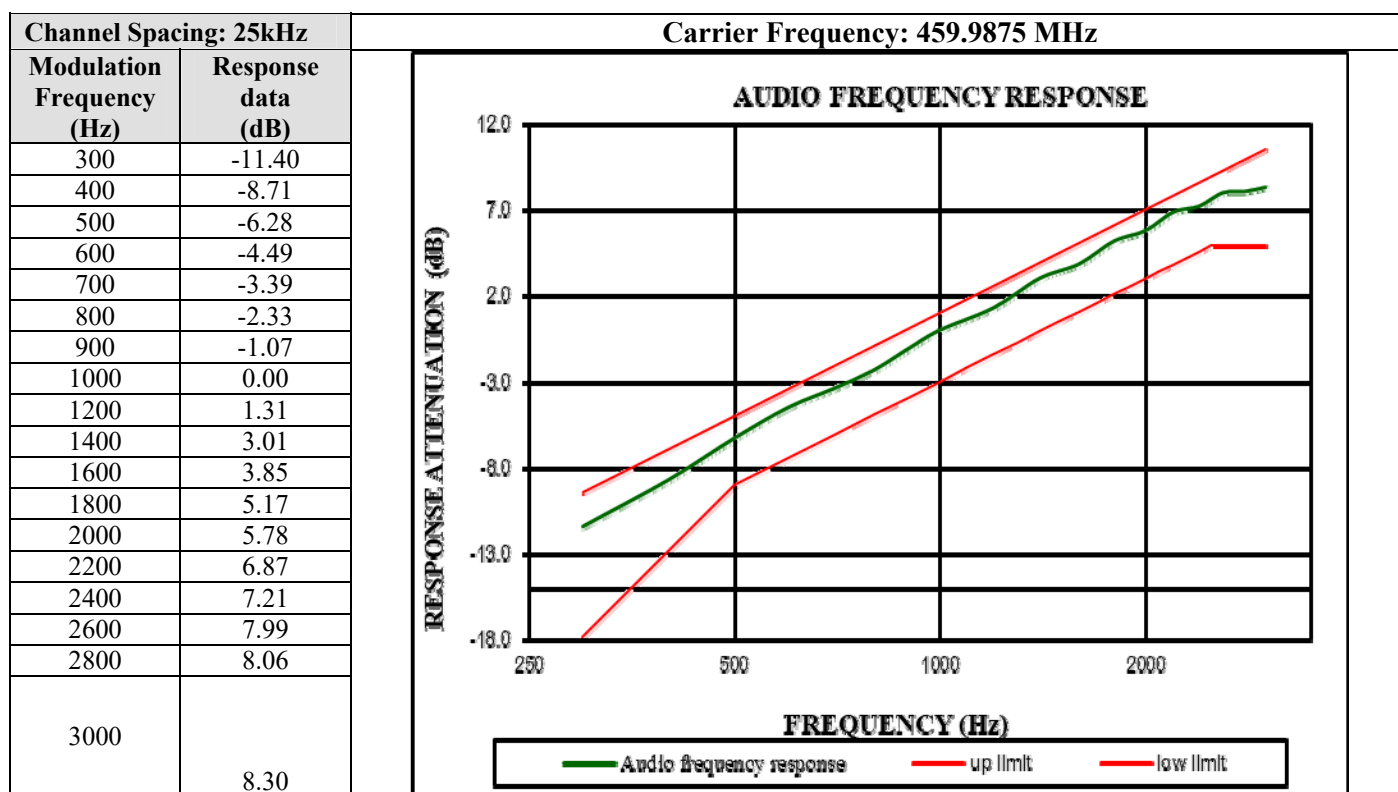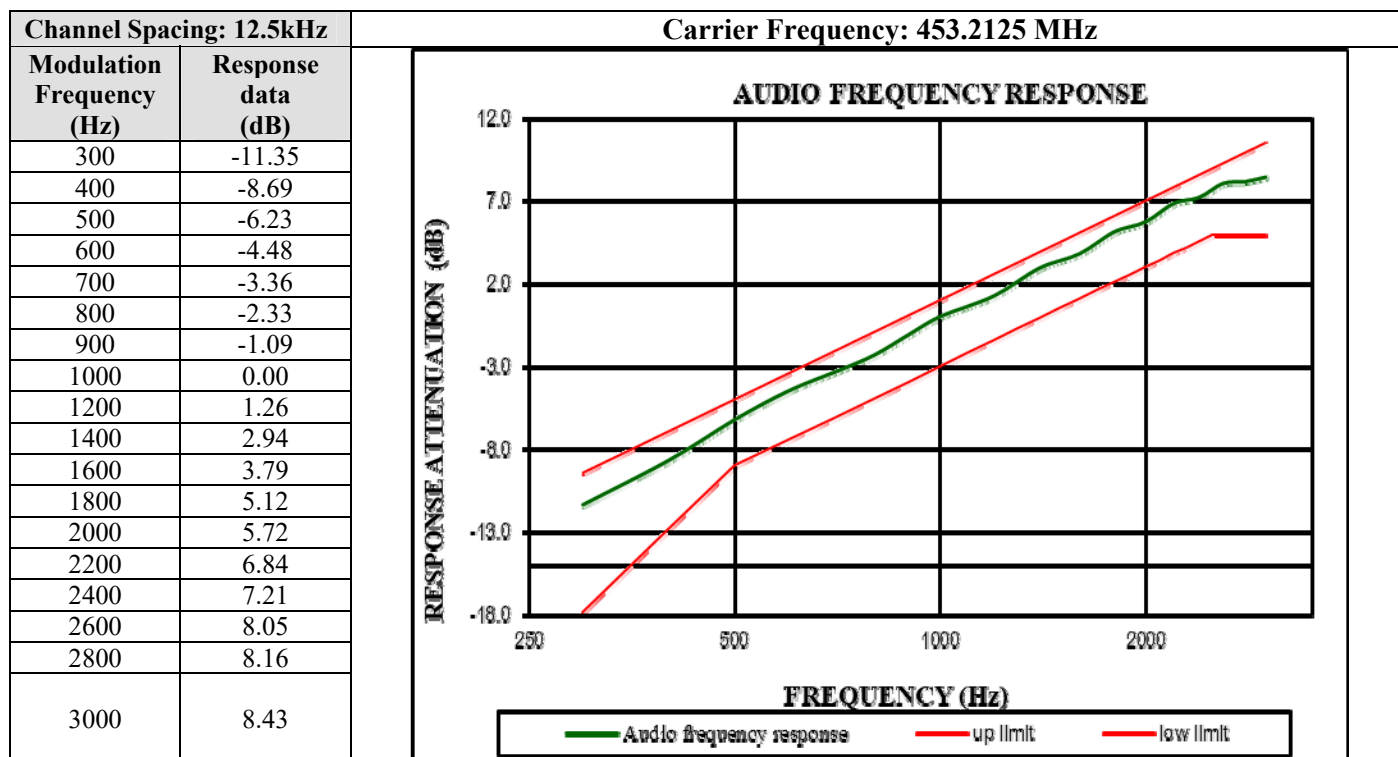


Modulation Limiting – High Power

Channel Spacing: 12.5kHz		Carrier Frequency: 453.2125 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	1.095	0.044	1.001	0.021	2.5
400	1.519	0.081	1.405	0.054	2.5
500	2.086	0.101	2.001	0.082	2.5
600	2.246	0.117	2.197	0.094	2.5
700	2.264	0.128	2.201	0.095	2.5
800	2.302	0.137	2.251	0.102	2.5
900	2.236	0.154	2.186	0.114	2.5
1000	2.231	0.168	2.183	0.125	2.5
1200	2.278	0.191	2.221	0.147	2.5
1400	2.235	0.234	2.186	0.198	2.5
1600	2.216	0.253	2.145	0.213	2.5
1800	2.244	0.291	2.201	0.257	2.5
2000	2.258	0.307	2.224	0.283	2.5
2200	2.234	0.344	2.203	0.301	2.5
2400	2.217	0.358	2.185	0.337	2.5
2600	2.197	0.393	2.142	0.364	2.5
2800	2.154	0.401	2.122	0.371	2.5
3000	2.063	0.411	2.028	0.384	2.5

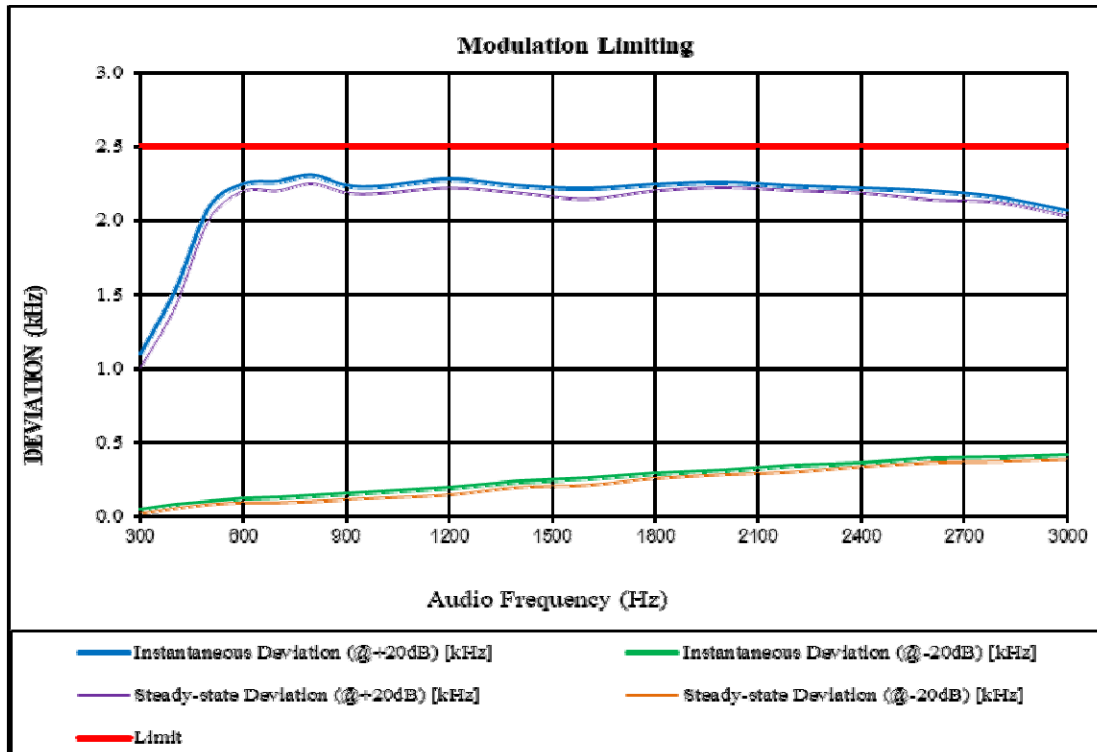


Channel Spacing: 25kHz		Carrier Frequency: 459.9875 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	2.186	0.106	2.053	0.065	5
400	3.032	0.133	2.854	0.087	5
500	4.071	0.168	3.897	0.115	5
600	4.335	0.196	4.253	0.132	5
700	4.417	0.228	4.352	0.166	5
800	4.402	0.256	4.296	0.191	5
900	4.355	0.282	4.245	0.223	5
1000	4.383	0.318	4.266	0.254	5
1200	4.457	0.367	4.341	0.302	5
1400	4.409	0.443	4.355	0.387	5
1600	4.364	0.478	4.267	0.429	5
1800	4.414	0.548	4.351	0.467	5
2000	4.453	0.591	4.342	0.514	5
2200	4.276	0.669	4.187	0.601	5
2400	4.209	0.699	4.099	0.625	5
2600	4.217	0.768	4.154	0.714	5
2800	4.203	0.776	4.101	0.721	5
3000	4.065	0.798	3.907	0.745	5

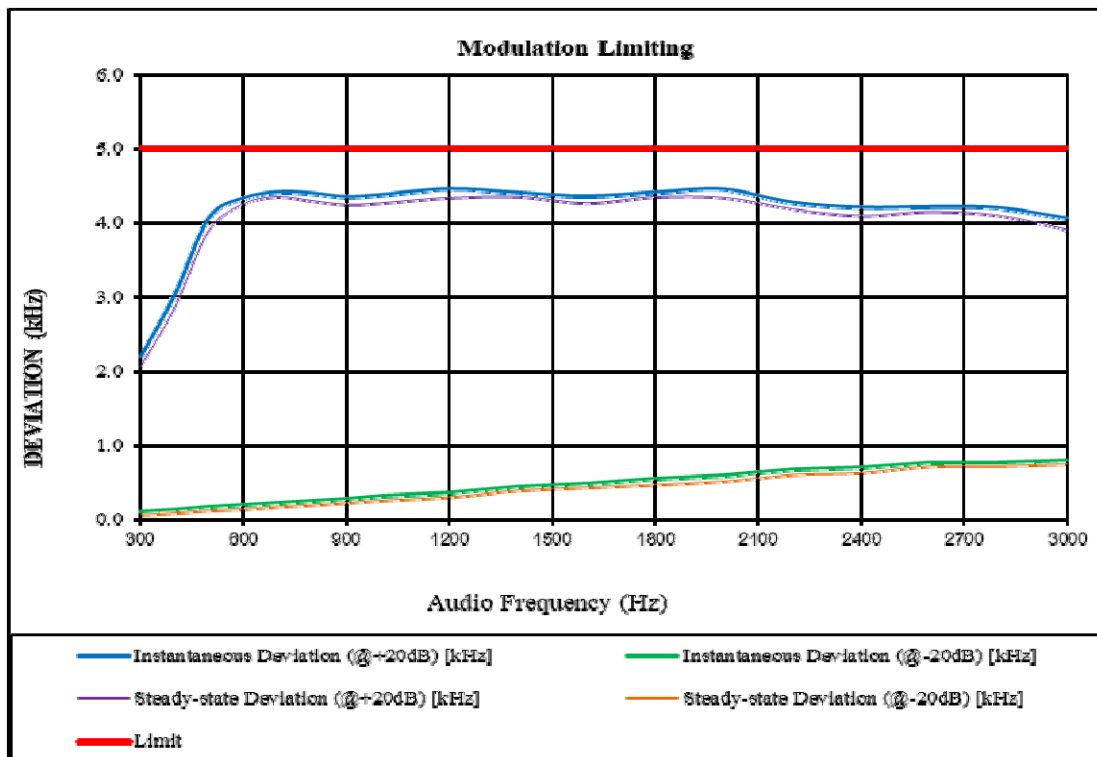


Audio Frequency Low Pass Filter Response – High Power

Channel Spacing: 12.5kHz		
Carrier Frequency: 453.2125 MHz		
Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
3.0	-5.7	0.0
3.5	-12.3	-6.7
4.0	-18.6	-12.5
5.0	-28.1	-22.2
7.0	-43.7	-36.8
10.0	-60.2	-52.3
15.0	-77.5	-69.9
20.0	-88.4	-82.5

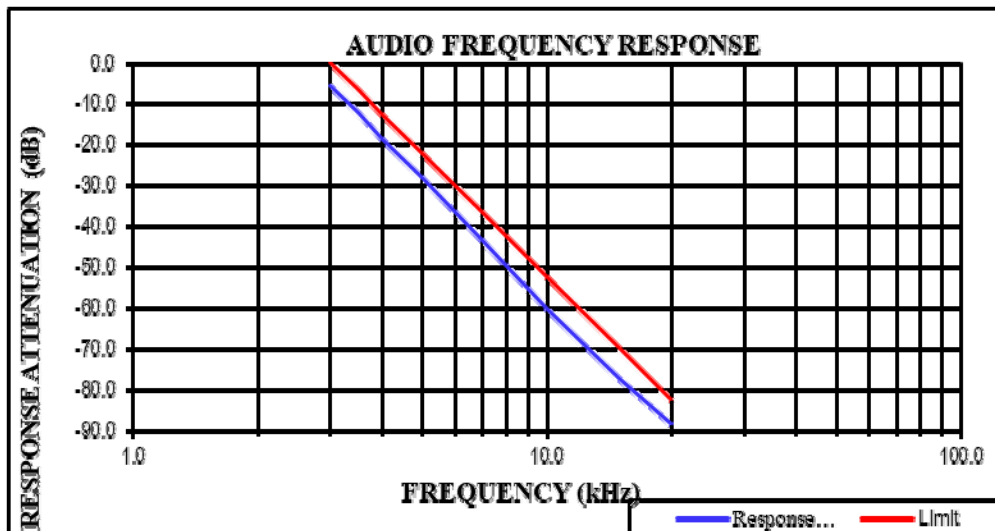

Channel Spacing: 25kHz		
Carrier Frequency: 459.9875 MHz		
Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
3.0	-5.6	0
3.5	-12.5	-4.0
4.0	-18.7	-7.5
5.0	-28.3	-13.3
7.0	-43.5	-22.1
10.0	-60.1	-31.4
15.0	-77.5	-41.9
20.0	-88.5	-50.0
30.0	-88.6	-50.0
50.0	-88.8	-50.0
70.0	-88.7	-50.0

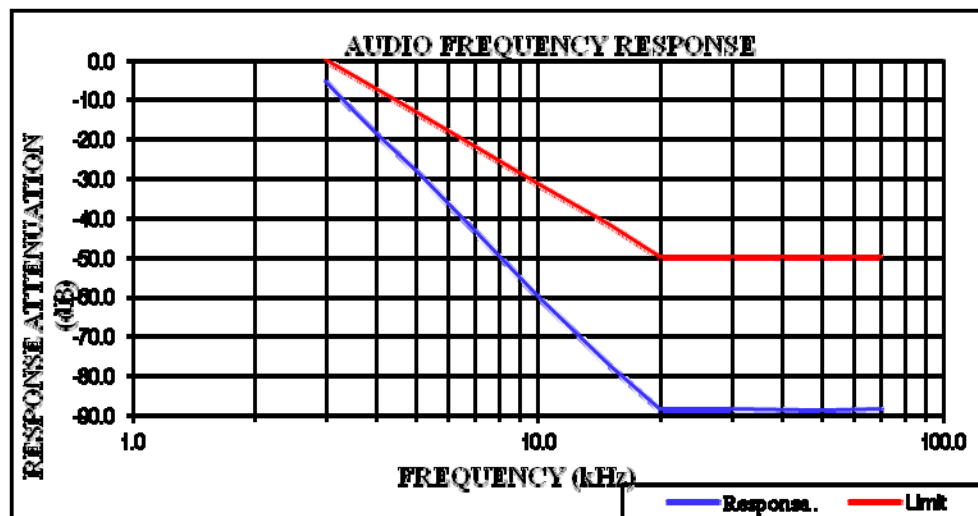

4.7 TRANSIENT FREQUENCY BEHAVIOR

Serial Number:	CR22070026-RF-S1	Test Date:	2022/08/05-2022/08/08
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	27.5-28.1	Relative Humidity: (%)	64-68	ATM Pressure: (kPa)	100.1-100.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100004	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2022-07-15	2023-07-14

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	10(t ₁)	±12.5 kHz	Pass
	25(t ₂)	±6.25 kHz	
	10(t ₃)	±12.5 kHz	


Note: During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in §90.213:

For 453.2125 MHz 12.5kHz mode, limit is: 453.2125 MHz * 2.5ppm = 1.133kHz

Turn ON

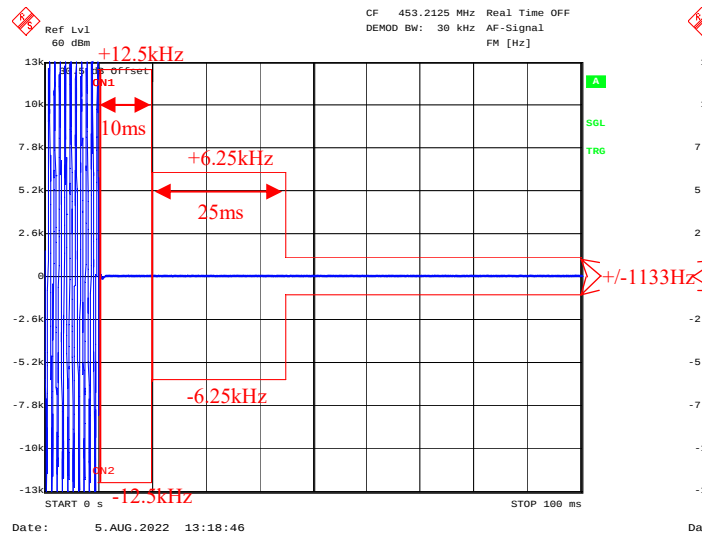

Turn OFF

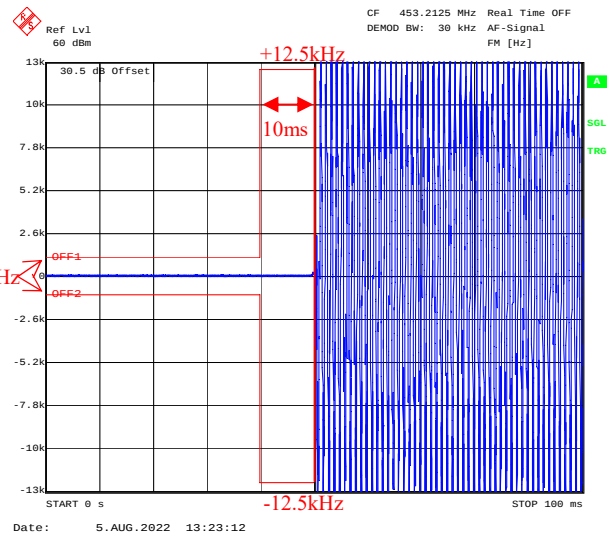

4.5 RADIATED SPURIOUS EMISSIONS:

Serial Number:	CR22070026-RF-S1	Test Date:	2022-08-31~2022-09-03
Test Site:	966-1/966-2	Test Mode:	Transmitting
Tester:	Carl Xue, Nick Tang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9~26.7	Relative Humidity: (%)	48~61	ATM Pressure: (kPa)	99.8~100.5
----------------------	-----------	------------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2022-07-15	2023-07-14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022-07-17	2023-07-16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022-07-17	2023-07-16
Sonoma	Amplifier	310N	186165	2022-07-17	2023-07-16
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
Agilent	Signal Generator	E8247C	MY43321352	2022-04-01	2023-03-31
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2022-07-15	2023-07-14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022-08-07	2023-08-06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022-08-07	2023-08-06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2021-10-18	2024-10-17
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2022-07-17	2023-07-16
E-Microwave	Band Rejection Filter	OBF-ZP-400-470-NF	OE02214273	2022-07-15	2023-07-14

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Note:

Test only performed with High power level.

30MHz - 5GHz:**Part 90**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 400.0125MHz-12.5 kHz								
800.03	H	39.05	-32.25	0.00	0.58	-32.83	-20.00	12.83
800.03	V	33.55	-34.19	0.00	0.58	-34.77	-20.00	14.77
1200.04	H	74.22	-28.64	7.66	0.69	-21.67	-20.00	1.67
1200.04	V	72.25	-31.35	7.66	0.69	-24.38	-20.00	4.38
1600.05	H	60.82	-43.55	8.62	0.83	-35.76	-20.00	15.76
1600.05	V	58.07	-46.33	8.62	0.83	-38.54	-20.00	18.54
2000.06	H	59.24	-42.89	9.10	0.89	-34.68	-20.00	14.68
2000.06	V	62.21	-39.29	9.10	0.89	-31.08	-20.00	11.08
2400.08	H	48.61	-52.44	9.34	0.98	-44.08	-20.00	24.08
2400.08	V	50.20	-50.59	9.34	0.98	-42.23	-20.00	22.23
2800.09	H	52.14	-47.79	9.88	1.04	-38.95	-20.00	18.95
2800.09	V	48.71	-51.09	9.88	1.04	-42.25	-20.00	22.25
3200.10	H	48.34	-48.78	10.28	1.11	-39.61	-20.00	19.61
3200.10	V	45.58	-51.29	10.28	1.11	-42.12	-20.00	22.12
3600.11	H	41.40	-56.15	10.50	1.24	-46.89	-20.00	26.89
3600.11	V	43.49	-53.92	10.50	1.24	-44.66	-20.00	24.66
4000.13	H	39.26	-56.50	10.90	1.29	-46.89	-20.00	26.89
4000.13	V	43.83	-51.73	10.90	1.29	-42.12	-20.00	22.12
4FSK, Frequency: 400.0125MHz-12.5 kHz								
800.03	H	38.19	-33.11	0.00	0.58	-33.69	-20.00	13.69
800.03	V	33.14	-34.60	0.00	0.58	-35.18	-20.00	15.18
1200.04	H	72.79	-30.07	7.66	0.69	-23.10	-20.00	3.10
1200.04	V	71.14	-32.46	7.66	0.69	-25.49	-20.00	5.49
1600.05	H	61.25	-43.12	8.62	0.83	-35.33	-20.00	15.33
1600.05	V	54.25	-50.15	8.62	0.83	-42.36	-20.00	22.36
2000.06	H	60.68	-41.45	9.10	0.89	-33.24	-20.00	13.24
2000.06	V	62.33	-39.17	9.10	0.89	-30.96	-20.00	10.96
2400.08	H	50.17	-50.88	9.34	0.98	-42.52	-20.00	22.52
2400.08	V	50.85	-49.94	9.34	0.98	-41.58	-20.00	21.58
2800.09	H	50.94	-48.99	9.88	1.04	-40.15	-20.00	20.15
2800.09	V	49.06	-50.74	9.88	1.04	-41.90	-20.00	21.90
3200.10	H	48.63	-48.49	10.28	1.11	-39.32	-20.00	19.32
3200.10	V	48.74	-48.13	10.28	1.11	-38.96	-20.00	18.96
3600.11	H	40.32	-57.23	10.50	1.24	-47.97	-20.00	27.97
3600.11	V	43.90	-53.51	10.50	1.24	-44.25	-20.00	24.25
4000.13	H	39.02	-56.74	10.90	1.29	-47.13	-20.00	27.13
4000.13	V	43.42	-52.14	10.90	1.29	-42.53	-20.00	22.53

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 453.2125MHz-12.5 kHz								
906.43	H	35.72	-32.89	0.00	0.55	-33.44	-20.00	13.44
906.43	V	37.82	-28.18	0.00	0.55	-28.73	-20.00	8.73
1359.64	H	70.65	-32.66	8.11	0.77	-25.32	-20.00	5.32
1359.64	V	66.49	-37.03	8.11	0.77	-29.69	-20.00	9.69
1812.85	H	50.53	-52.90	8.88	0.90	-44.92	-20.00	24.92
1812.85	V	48.32	-55.23	8.88	0.90	-47.25	-20.00	27.25
2266.06	H	53.04	-49.03	9.26	0.95	-40.72	-20.00	20.72
2266.06	V	53.02	-48.94	9.26	0.95	-40.63	-20.00	20.63
2719.28	H	45.91	-54.06	9.75	1.05	-45.36	-20.00	25.36
2719.28	V	43.24	-56.67	9.75	1.05	-47.97	-20.00	27.97
3172.49	H	48.26	-48.98	10.27	1.13	-39.84	-20.00	19.84
3172.49	V	48.82	-48.21	10.27	1.13	-39.07	-20.00	19.07
3625.70	H	35.52	-61.97	10.53	1.22	-52.66	-20.00	32.66
3625.70	V	39.53	-57.85	10.53	1.22	-48.54	-20.00	28.54
4078.91	H	37.88	-58.08	10.85	1.29	-48.52	-20.00	28.52
4078.91	V	38.32	-57.57	10.85	1.29	-48.01	-20.00	28.01
4FSK, Frequency: 453.2125MHz-12.5 kHz								
906.43	H	35.16	-33.45	0.00	0.55	-34.00	-20.00	14.00
906.43	V	35.08	-30.92	0.00	0.55	-31.47	-20.00	11.47
1359.64	H	71.31	-32.00	8.11	0.77	-24.66	-20.00	4.66
1359.64	V	69.22	-34.30	8.11	0.77	-26.96	-20.00	6.96
1812.85	H	54.08	-49.35	8.88	0.90	-41.37	-20.00	21.37
1812.85	V	51.77	-51.78	8.88	0.90	-43.80	-20.00	23.80
2266.06	H	52.76	-49.31	9.26	0.95	-41.00	-20.00	21.00
2266.06	V	52.81	-49.15	9.26	0.95	-40.84	-20.00	20.84
2719.28	H	49.98	-49.99	9.75	1.05	-41.29	-20.00	21.29
2719.28	V	46.67	-53.24	9.75	1.05	-44.54	-20.00	24.54
3172.49	H	53.34	-43.90	10.27	1.13	-34.76	-20.00	14.76
3172.49	V	57.35	-39.68	10.27	1.13	-30.54	-20.00	10.54
3625.70	H	37.01	-60.48	10.53	1.22	-51.17	-20.00	31.17
3625.70	V	41.80	-55.58	10.53	1.22	-46.27	-20.00	26.27
4078.91	H	38.56	-57.40	10.85	1.29	-47.84	-20.00	27.84
4078.91	V	39.36	-56.53	10.85	1.29	-46.97	-20.00	26.97

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 469.9875MHz-12.5 kHz								
939.98	H	36.04	-31.75	0.00	0.64	-32.39	-20.00	12.39
939.98	V	40.47	-24.88	0.00	0.64	-25.52	-20.00	5.52
1409.96	H	70.62	-33.06	8.25	0.72	-25.53	-20.00	5.53
1409.96	V	63.74	-39.99	8.25	0.72	-32.46	-20.00	12.46
1879.95	H	53.30	-49.78	8.96	0.88	-41.70	-20.00	21.70
1879.95	V	51.44	-51.40	8.96	0.88	-43.32	-20.00	23.32
2349.94	H	53.85	-47.64	9.31	0.97	-39.30	-20.00	19.30
2349.94	V	55.72	-45.53	9.31	0.97	-37.19	-20.00	17.19
2819.93	H	45.98	-53.86	9.91	1.05	-45.00	-20.00	25.00
2819.93	V	45.06	-54.70	9.91	1.05	-45.84	-20.00	25.84
3289.91	H	55.10	-41.62	10.32	1.15	-32.45	-20.00	12.45
3289.91	V	49.78	-46.69	10.32	1.15	-37.52	-20.00	17.52
3759.90	H	36.44	-59.97	10.66	1.24	-50.55	-20.00	30.55
3759.90	V	39.91	-56.38	10.66	1.24	-46.96	-20.00	26.96
4229.89	H	37.77	-58.27	10.76	1.32	-48.83	-20.00	28.83
4229.89	V	37.68	-58.30	10.76	1.32	-48.86	-20.00	28.86
4FSK, Frequency: 469.9875MHz-12.5 kHz								
939.98	H	36.12	-31.67	0.00	0.64	-32.31	-20.00	12.31
939.98	V	41.26	-24.09	0.00	0.64	-24.73	-20.00	4.73
1409.96	H	71.24	-32.44	8.25	0.72	-24.91	-20.00	4.91
1409.96	V	65.65	-38.08	8.25	0.72	-30.55	-20.00	10.55
1879.95	H	52.20	-50.88	8.96	0.88	-42.80	-20.00	22.80
1879.95	V	50.93	-51.91	8.96	0.88	-43.83	-20.00	23.83
2349.94	H	53.06	-48.43	9.31	0.97	-40.09	-20.00	20.09
2349.94	V	55.35	-45.90	9.31	0.97	-37.56	-20.00	17.56
2819.93	H	48.07	-51.77	9.91	1.05	-42.91	-20.00	22.91
2819.93	V	48.23	-51.53	9.91	1.05	-42.67	-20.00	22.67
3289.91	H	59.15	-37.57	10.32	1.15	-28.40	-20.00	8.40
3289.91	V	57.11	-39.36	10.32	1.15	-30.19	-20.00	10.19
3759.90	H	36.50	-59.91	10.66	1.24	-50.49	-20.00	30.49
3759.90	V	41.28	-55.01	10.66	1.24	-45.59	-20.00	25.59
4229.89	H	34.53	-61.51	10.76	1.32	-52.07	-20.00	32.07
4229.89	V	38.71	-57.27	10.76	1.32	-47.83	-20.00	27.83

Part 80

Part 66

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 459.9875MHz-25 kHz								
919.98	H	34.31	-33.97	0.00	0.60	-34.57	-13.00	21.57
919.98	V	37.40	-28.34	0.00	0.60	-28.94	-13.00	15.94
1379.96	H	71.71	-31.80	8.16	0.74	-24.38	-13.00	11.38
1379.96	V	67.98	-35.66	8.16	0.74	-28.24	-13.00	15.24
1839.95	H	47.36	-55.93	8.91	0.89	-47.91	-13.00	34.91
1839.95	V	52.68	-50.59	8.91	0.89	-42.57	-13.00	29.57
2299.94	H	51.77	-50.15	9.28	0.98	-41.85	-13.00	28.85
2299.94	V	54.93	-46.78	9.28	0.98	-38.48	-13.00	25.48
2759.93	H	46.73	-53.22	9.82	1.06	-44.46	-13.00	31.46
2759.93	V	47.00	-52.86	9.82	1.06	-44.10	-13.00	31.10
3219.91	H	51.41	-45.62	10.29	1.13	-36.46	-13.00	23.46
3219.91	V	49.70	-47.08	10.29	1.13	-37.92	-13.00	24.92
3679.90	H	36.82	-60.55	10.58	1.23	-51.20	-13.00	38.20
3679.90	V	41.39	-55.94	10.58	1.23	-46.59	-13.00	33.59
4139.89	H	38.05	-57.93	10.82	1.28	-48.39	-13.00	35.39
4139.89	V	40.95	-55.00	10.82	1.28	-45.46	-13.00	32.46

Part 74

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 455.0125MHz-12.5 kHz								
910.03	H	34.15	-34.37	0.00	0.54	-34.91	-20.00	14.91
910.03	V	35.86	-30.07	0.00	0.54	-30.61	-20.00	10.61
1365.04	H	71.18	-32.19	8.12	0.77	-24.84	-20.00	4.84
1365.04	V	65.52	-38.03	8.12	0.77	-30.68	-20.00	10.68
1820.05	H	51.23	-52.16	8.88	0.90	-44.18	-20.00	24.18
1820.05	V	49.67	-53.81	8.88	0.90	-45.83	-20.00	25.83
2275.06	H	53.60	-48.43	9.27	0.96	-40.12	-20.00	20.12
2275.06	V	54.16	-47.73	9.27	0.96	-39.42	-20.00	19.42
2730.08	H	46.48	-53.48	9.77	1.06	-44.77	-20.00	24.77
2730.08	V	45.34	-54.56	9.77	1.06	-45.85	-20.00	25.85
3185.09	H	48.19	-49.00	10.27	1.12	-39.85	-20.00	19.85
3185.09	V	47.66	-49.30	10.27	1.12	-40.15	-20.00	20.15
3640.10	H	35.92	-61.54	10.54	1.22	-52.22	-20.00	32.22
3640.10	V	40.84	-56.53	10.54	1.22	-47.21	-20.00	27.21
4095.11	H	38.93	-57.07	10.84	1.27	-47.50	-20.00	27.50
4095.11	V	40.58	-55.38	10.84	1.27	-45.81	-20.00	25.81
FM, Frequency: 455.0125MHz-25 kHz								
910.03	H	35.34	-33.18	0.00	0.54	-33.72	-13.00	20.72
910.03	V	36.71	-29.22	0.00	0.54	-29.76	-13.00	16.76
1365.04	H	70.52	-32.85	8.12	0.77	-25.50	-13.00	12.50
1365.04	V	63.84	-39.71	8.12	0.77	-32.36	-13.00	19.36
1820.05	H	52.51	-50.88	8.88	0.90	-42.90	-13.00	29.90
1820.05	V	50.32	-53.16	8.88	0.90	-45.18	-13.00	32.18
2275.06	H	53.72	-48.31	9.27	0.96	-40.00	-13.00	27.00
2275.06	V	54.44	-47.45	9.27	0.96	-39.14	-13.00	26.14
2730.08	H	46.19	-53.77	9.77	1.06	-45.06	-13.00	32.06
2730.08	V	44.95	-54.95	9.77	1.06	-46.24	-13.00	33.24
3185.09	H	49.36	-47.83	10.27	1.12	-38.68	-13.00	25.68
3185.09	V	48.74	-48.22	10.27	1.12	-39.07	-13.00	26.07
3640.10	H	36.29	-61.17	10.54	1.22	-51.85	-13.00	38.85
3640.10	V	41.50	-55.87	10.54	1.22	-46.55	-13.00	33.55
4095.11	H	38.03	-57.97	10.84	1.27	-48.40	-13.00	35.40
4095.11	V	40.61	-55.35	10.84	1.27	-45.78	-13.00	32.78

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 455.0125MHz-12.5 kHz								
910.03	H	32.94	-35.58	0.00	0.54	-36.12	-20.00	16.12
910.03	V	35.22	-30.71	0.00	0.54	-31.25	-20.00	11.25
1365.04	H	74.05	-29.32	8.12	0.77	-21.97	-20.00	1.97
1365.04	V	70.70	-32.85	8.12	0.77	-25.50	-20.00	5.50
1820.05	H	56.53	-46.86	8.88	0.90	-38.88	-20.00	18.88
1820.05	V	53.57	-49.91	8.88	0.90	-41.93	-20.00	21.93
2275.06	H	52.90	-49.13	9.27	0.96	-40.82	-20.00	20.82
2275.06	V	53.93	-47.96	9.27	0.96	-39.65	-20.00	19.65
2730.08	H	46.83	-53.13	9.77	1.06	-44.42	-20.00	24.42
2730.08	V	46.05	-53.85	9.77	1.06	-45.14	-20.00	25.14
3185.09	H	48.61	-48.58	10.27	1.12	-39.43	-20.00	19.43
3185.09	V	48.65	-48.31	10.27	1.12	-39.16	-20.00	19.16
3640.10	H	39.86	-57.60	10.54	1.22	-48.28	-20.00	28.28
3640.10	V	43.13	-54.24	10.54	1.22	-44.92	-20.00	24.92
4095.11	H	38.71	-57.29	10.84	1.27	-47.72	-20.00	27.72
4095.11	V	39.84	-56.12	10.84	1.27	-46.55	-20.00	26.55

Part 22

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 454.0125MHz-12.5 kHz								
908.03	H	34.61	-33.96	0.00	0.54	-34.50	-13.00	21.50
908.03	V	36.78	-29.19	0.00	0.54	-29.73	-13.00	16.73
1362.04	H	58.96	-44.38	8.11	0.77	-37.04	-13.00	24.04
1362.04	V	54.25	-49.29	8.11	0.77	-41.95	-13.00	28.95
1816.05	H	44.96	-58.45	8.88	0.90	-50.47	-13.00	37.47
1816.05	V	43.09	-60.43	8.88	0.90	-52.45	-13.00	39.45
2270.06	H	37.22	-64.83	9.26	0.95	-56.52	-13.00	43.52
2270.06	V	36.95	-64.98	9.26	0.95	-56.67	-13.00	43.67
2724.08	H	35.56	-64.41	9.76	1.05	-55.70	-13.00	42.70
2724.08	V	35.60	-64.31	9.76	1.05	-55.60	-13.00	42.60
3178.09	H	35.38	-61.84	10.27	1.12	-52.69	-13.00	39.69
3178.09	V	36.18	-60.82	10.27	1.12	-51.67	-13.00	38.67
3632.10	H	34.64	-62.84	10.53	1.22	-53.53	-13.00	40.53
3632.10	V	34.36	-63.02	10.53	1.22	-53.71	-13.00	40.71
4086.11	H	34.62	-61.36	10.85	1.28	-51.79	-13.00	38.79
4086.11	V	35.64	-60.28	10.85	1.28	-50.71	-13.00	37.71
FM, Frequency: 454.0125MHz-25 kHz								
908.03	H	35.07	-33.50	0.00	0.54	-34.04	-13.00	21.04
908.03	V	35.86	-30.11	0.00	0.54	-30.65	-13.00	17.65
1362.04	H	73.47	-29.87	8.11	0.77	-22.53	-13.00	9.53
1362.04	V	69.61	-33.93	8.11	0.77	-26.59	-13.00	13.59
1816.05	H	50.52	-52.89	8.88	0.90	-44.91	-13.00	31.91
1816.05	V	49.18	-54.34	8.88	0.90	-46.36	-13.00	33.36
2270.06	H	52.31	-49.74	9.26	0.95	-41.43	-13.00	28.43
2270.06	V	53.19	-48.74	9.26	0.95	-40.43	-13.00	27.43
2724.08	H	47.24	-52.73	9.76	1.05	-44.02	-13.00	31.02
2724.08	V	45.02	-54.89	9.76	1.05	-46.18	-13.00	33.18
3178.09	H	47.92	-49.30	10.27	1.12	-40.15	-13.00	27.15
3178.09	V	47.96	-49.04	10.27	1.12	-39.89	-13.00	26.89
3632.10	H	36.73	-60.75	10.53	1.22	-51.44	-13.00	38.44
3632.10	V	41.26	-56.12	10.53	1.22	-46.81	-13.00	33.81
4086.11	H	37.14	-58.84	10.85	1.28	-49.27	-13.00	36.27
4086.11	V	37.44	-58.48	10.85	1.28	-48.91	-13.00	35.91

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK,Frequency: 454.0125MHz-12.5 kHz								
908.03	H	34.11	-34.46	0.00	0.54	-35.00	-13.00	22.00
908.03	V	34.37	-31.60	0.00	0.54	-32.14	-13.00	19.14
1362.04	H	72.71	-30.63	8.11	0.77	-23.29	-13.00	10.29
1362.04	V	67.00	-36.54	8.11	0.77	-29.20	-13.00	16.20
1816.05	H	54.33	-49.08	8.88	0.90	-41.10	-13.00	28.10
1816.05	V	52.21	-51.31	8.88	0.90	-43.33	-13.00	30.33
2270.06	H	54.13	-47.92	9.26	0.95	-39.61	-13.00	26.61
2270.06	V	52.80	-49.13	9.26	0.95	-40.82	-13.00	27.82
2724.08	H	49.77	-50.20	9.76	1.05	-41.49	-13.00	28.49
2724.08	V	46.34	-53.57	9.76	1.05	-44.86	-13.00	31.86
3178.09	H	53.85	-43.37	10.27	1.12	-34.22	-13.00	21.22
3178.09	V	55.73	-41.27	10.27	1.12	-32.12	-13.00	19.12
3632.10	H	36.15	-61.33	10.53	1.22	-52.02	-13.00	39.02
3632.10	V	41.87	-55.51	10.53	1.22	-46.20	-13.00	33.20
4086.11	H	37.21	-58.77	10.85	1.28	-49.20	-13.00	36.20
4086.11	V	38.81	-57.11	10.85	1.28	-47.54	-13.00	34.54

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

===== END OF REPORT =====