



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9) Date : 20 May 2020

Application No. : LZ010969(3)

Applicant : One World Technologies, Inc.
115 Innovation Way,
Anderson, South Carolina, United States, 29625

Sample Description : One(1) item of submitted sample stated to be :

Sample Description	Model number
Remote of Hart RC Truck	HPRC01

Sample registration no. : RZ025921-001
Radio Frequency : 2415MHz – 2472MHz Transceiver
Rating : 2 x 1.5V AAA size batteries
No. of submitted sample : One (1) piece (s)

Date Received : 28 Apr 2020
Test Period : 11 May 2018 to 20 May 2020.

Test Requested : FCC Certification for FCC Part 15, subpart C
ISED Certification for License-exempt Device

Test Method : 47 CFR Part 15 (10-1-19 Edition), ANSI C63.10 – 2013, ANSI C63.4 – 2014
RSS-210 Issue 10, RSS-Gen Issue 5

Test Engineer : Mr. LEUNG Shu-kan, Ken

Test Result : See attached sheet(s) from page 2 to 20.

Conclusion : The submitted sample was found to comply with requirement of FCC Part 15
Subpart B and C and RSS-210 Issue 10.

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature : _____

Mr. WONG Lap-pang, Andrew
Manager
Electrical Division

Page 1 of 20

FCC ID: VMZ-HPRC01T
IC: 9880A-HPRC01T



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

Table of Contents

1	General Information	3
1.1	General Description	3
1.2	Location of the test site	4
1.3	List of measuring equipment.....	5
1.4	Measurement Uncertainty.....	6
1.5	Test Summary	6
2	Description of the radiated emission test	7
2.1	Test Procedure	7
2.2	Test Setup	8
2.3	Test Result	10
2.4	Radiated Emission Measurement Data	11
3	Description of the Line-conducted Test.....	14
3.1	Test Procedure	14
3.2	Test Result	14
3.3	Test Setup	14
3.4	Graph and Table of Conducted Emission Measurement Data	14
4	Supplementary document.....	15
4.1	Bandwidth.....	15
5	Appendices.....	16



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

1 General Information

1.1 General Description

The equipment under test (EUT) is a controller for Hart RC Truck. The EUT is power by 2 x 1.5V AAA size batteries. It operates at 2415MHz – 2473MHz. There are joysticks on the EUT. When the joysticks are moved, the EUT will transmit the radio control signal to receiver.

The brief circuit description is listed as follows:

- U1 and its associated circuit act as RF circuit
- Y1 and its associated circuit act as oscillator
- K, K-1 and its associated circuit act as car control circuit



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

1.2 Location of the test site

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 – 2013. A shielded room is located at :

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

FCC Accredited Lab (Designation Number: HK0004)
ISED Wireless Test Site (ISED Assigned Code: 4093A)



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	R&S	ESCI	100152	15 Jan 2021	1Year
Spectrum Analyzer	R&S	FSV40	100964	29 Oct 2020	1Year
Biconical Antenna	Rohde & Schwarz	HK116	837414/004	20 Oct 2020	2Years
Log Periodic Antenna	Teseq	UPA6109	43666	20 Oct 2020	2Years
Loop Antenna	EMCO	6502	00056620	29 Oct 2020	2Years
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	02 Feb 2023	3Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	02 Feb 2023	3Years
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170442	15 Sep 2021	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	12 Sep 2021	2Years
Horn Antenna	Schwarzbeck	BBHA 9120C	9120C 594	27 Sep 2020	2Years
Pre-amplifier	Schwarzbeck	BBV9718	BBV9718 297	27 Sep 2020	2Years
Coaxial Cable	Schaffner	RG 213/U	N/A	08 May 2020	1Year
Coaxial Cable	Suhner	RG 214/U	N/A	08 May 2020	1Year
Coaxial Cable	Suhner	Sucoflex_104	N/A	14 Jan 2022	2Years



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U_{lab})
30MHz ~ 200MHz (Horizontal)	4.59dB
30MHz ~ 200MHz (Vertical)	4.49dB
200MHz ~ 1000MHz (Horizontal)	4.94dB
200MHz ~ 1000MHz (Vertical)	4.97dB
1GHz ~ 6GHz	4.52dB
6GHz ~ 18GHz	4.58dB

1.5 Test Summary

TEST ITEM	FCC REFERENCE	RESULT
Radiated emission	15.249(a)	Comply
Out-band emission	15.249(d)	Comply
Peak Limit	15.249(e)	Comply
Bandwidth	15.215(c)	Comply



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

2 Description of the radiated emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013.

A non-conductive turntable with dimensions of 1.5m x 0.4m x 0.8m (L x W x H) placed above the reference ground plane. The equipment under test (EUT) was placed at 0.8m height for below 1GHz measurement and 1.5m height for above 1GHz measurement. The test distance is 3m between EUT and receiving antenna. A broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated. Additional absorbing material will be placed between the EUT and receiving antenna for above 1GHz measurement.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AZ0020189(9)

Date : 20 May 2020

2.2 Test Setup

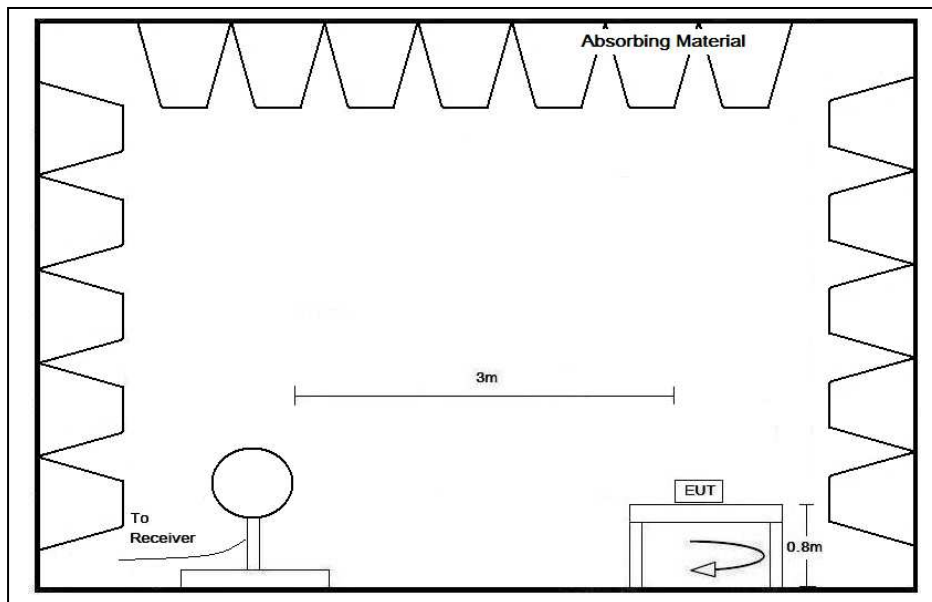

Below 30MHz

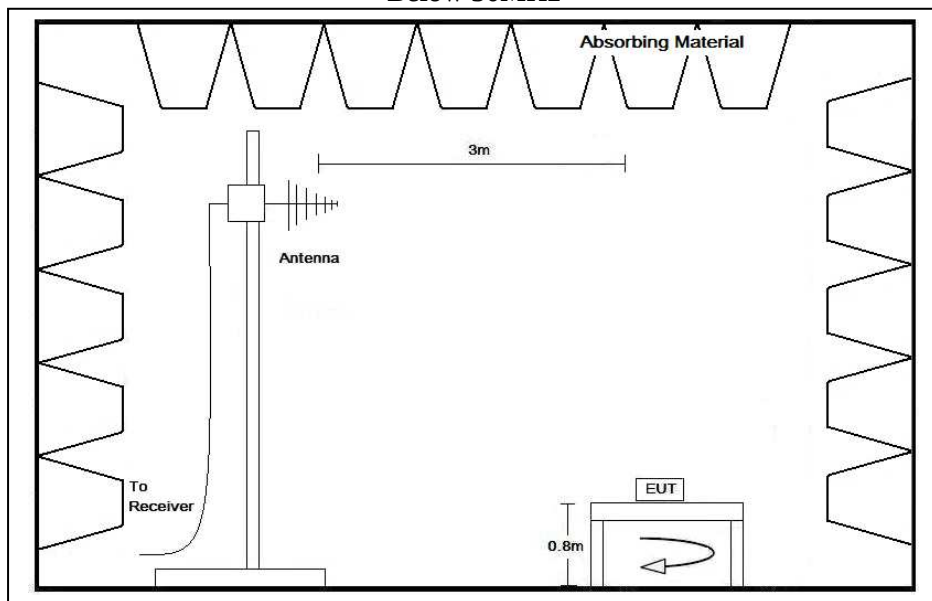

30MHz – 1GHz

FCC ID: VMZ-HPRC01T
IC: 9880A-HPRC01T

Page 8 of 20



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

2.2 Test Setup

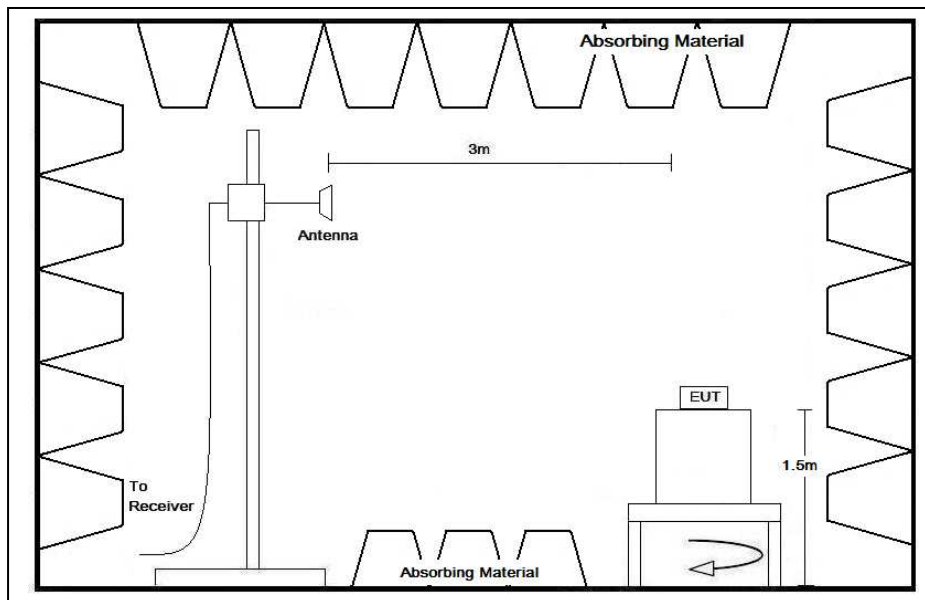

Above 1GHz



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

2.3 Test Result

Peak Detector data was measured unless otherwise stated.

The radiated emissions are measured from 9kHz to 26GHz (the tenth harmonics)

The worst case configuration is shown on the worst case configuration of test setup photo.

“#” means emissions appearing within the restricted bands of 47 CFR Part 15 section 15.205 and “*” means emission appearing within the restricted band of RSS-GEN section 8.10.

The frequencies from fundamental up to tenth harmonics were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next pages.

The EUT has been tested in Transmission mode.

It was found that the EUT meet the FCC requirement.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

2.4 Radiated Emission Measurement Data

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	24.3	°C
Relative humidity:	52.7	%

Channel: 2415MHz

Polarization	Frequency (MHz)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector Type
H	2415.045	103.0	-4.7	98.3	114.0	-15.7	Peak
H	2414.985	86.5	-4.7	81.8	94.0	-12.2	Average
V	2413.796	102.7	-4.7	98.0	114.0	-16.0	Peak
V	2414.980	86.3	-4.7	81.6	94.0	-12.4	Average
H	2400.000	71.6	-4.7	66.9	74.0	-7.1	Peak
H	2400.000	28.4	-4.7	23.7	54.0	-30.3	Average
V	2400.000	72.3	-4.7	67.6	74.0	-6.4	Peak
V	2400.000	28.6	-4.7	23.9	54.0	-30.1	Average
H	4829.985	47.6	3.8	51.4	74.0	-22.6	Peak
H	4829.910	40.6	3.8	44.4	54.0	-9.6	Average
V	4830.049	54.3	3.8	58.1	74.0	-15.9	Peak
V	4829.919	37.3	3.8	41.1	54.0	-12.9	Average
H	7244.220	43.2	11.2	54.4	74.0	-19.6	Peak
H	7244.910	25.8	11.2	37.0	54.0	-17.0	Average
V	7244.849	41.8	11.2	53.0	54.0	-1.0	Peak

Remark: 1) The peak detector value is below the average limit at emission of 7244.849MHz, so no additional average measurement is done



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

Channel: 2444MHz

Polarization	Frequency (MHz)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector Type
H	2443.425	104.0	-4.7	99.3	114.0	-14.7	Peak
H	2444.985	87.6	-4.7	82.9	94.0	-11.1	Average
V	2444.254	102.3	-4.7	97.6	114.0	-16.4	Peak
V	2443.995	85.8	-4.7	81.1	94.0	-12.9	Average
H	4887.985	57.9	3.8	61.7	74.0	-12.3	Peak
H	4887.900	40.8	3.8	44.6	54.0	-9.4	Average
V	4888.010	54.3	3.8	58.1	74.0	-15.9	Peak
V	4887.915	37.1	3.8	40.9	54.0	-13.1	Average
H	7331.865	45.1	11.2	56.3	74.0	-17.7	Peak
H	7331.905	27.7	11.2	38.9	54.0	-15.1	Average
V	7332.050	42.5	11.2	53.7	54.0	-0.3	Peak

Remark: 1) The peak detector value is below the average limit at emission of 7332.050MHz, so no additional average measurement is done



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

Channel: 2473MHz

Polarization	Frequency (MHz)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector Type
H	2473.179	104.1	-4.7	99.4	114.0	-14.6	Peak
H	2472.990	88.0	-4.7	83.3	94.0	-10.7	Average
V	2472.915	104.3	-4.7	99.6	114.0	-14.4	Peak
V	2472.990	87.6	-4.7	82.9	94.0	-11.1	Average
H	2483.500	77.3	-4.7	72.6	74.0	-1.4	Peak
H	2483.500	30.2	-4.7	25.5	54.0	-28.5	Average
V	2483.500	77.4	-4.7	72.7	74.0	-1.3	Peak
V	2483.500	30.2	-4.7	25.5	54.0	-28.5	Average
H	4945.979	59.1	3.8	62.9	74.0	-11.1	Peak
H	4959.909	41.7	3.8	45.5	54.0	-8.5	Average
V	4945.330	58.1	3.8	61.9	74.0	-12.1	Peak
V	4945.925	41.2	3.8	45.0	54.0	-9.0	Average
H	7418.130	44.6	11.2	55.8	74.0	-18.2	Peak
H	7418.900	28.5	11.2	39.7	54.0	-14.3	Average
V	7419.159	45.4	11.2	56.6	74.0	-17.4	Peak
V	7418.909	29.1	11.2	40.3	54.0	-13.7	Average

Page 13 of 20

FCC ID: VMZ-HPRC01T
IC: 9880A-HPRC01T

The conformity statement stated in Conclusion above is based on the decision rule agreed with applicant and listed in www.cmateesting.org/qac/statement-of-conformity.pdf
This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmateesting.org.
This document shall not be reproduced except in full or with written approval by CMA Testing. The observations and test results in this report are relevant only to the sample tested.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmateesting.org Web Site: <http://www.cmateesting.org>



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

3 Description of the Line-conducted Test


3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 – 2013. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

No measurement is required as the EUT is a battery-operated product.

3.3 Test Setup

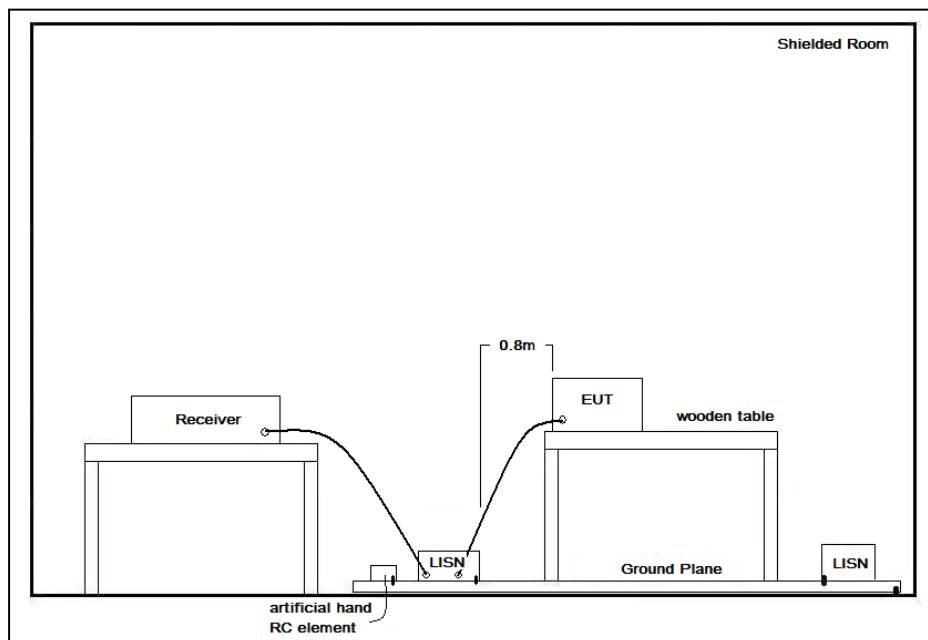

3.4 Graph and Table of Conducted Emission Measurement Data

Not Applicable



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

4 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename
ID Label/Location	Label Artwork and Location.pdf
Block Diagram	Block Diagram.pdf
Schematic Diagram	Schematic.pdf
Users Manual	User Manual.pdf
Operational Description	Operation Description.pdf

4.1 Bandwidth

Appendices A1 is shown the fundamental emission is confined in the specified band. 20dB bandwidth is 1.4689MHz. It also shows that the EUT met the FCC Part 15.215(c).



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

5 Appendices

A1	20dB Bandwidth Plot	2	pages
A2	99% Bandwidth Plot	2	pages

Page 16 of 20

FCC ID: VMZ-HPRC01T
IC: 9880A-HPRC01T



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AZ0020189(9)

Date : 20 May 2020

A1. 20dB Bandwidth Plot

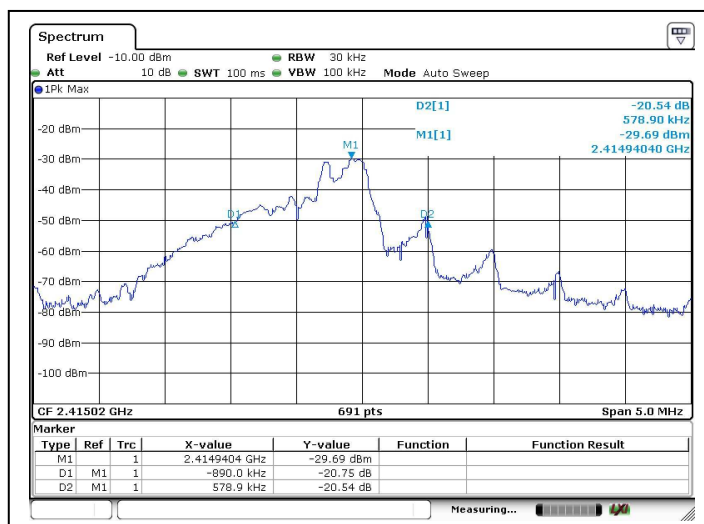

Channel: 2415MHz

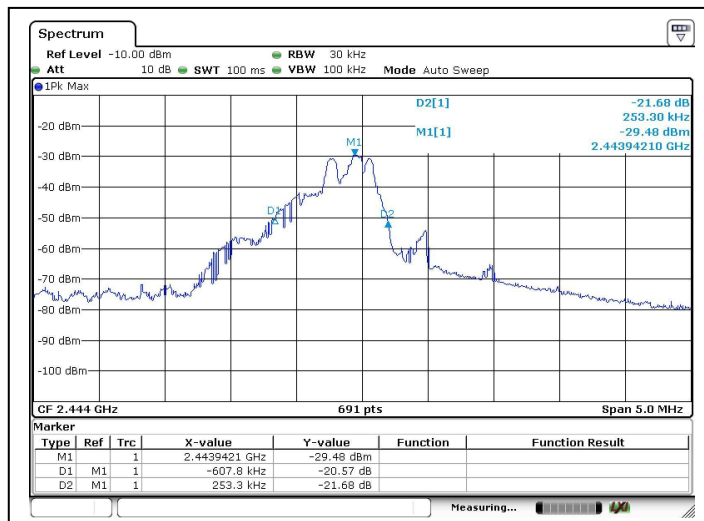

Channel: 2444MHz

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

A1. 20dB Bandwidth Plot

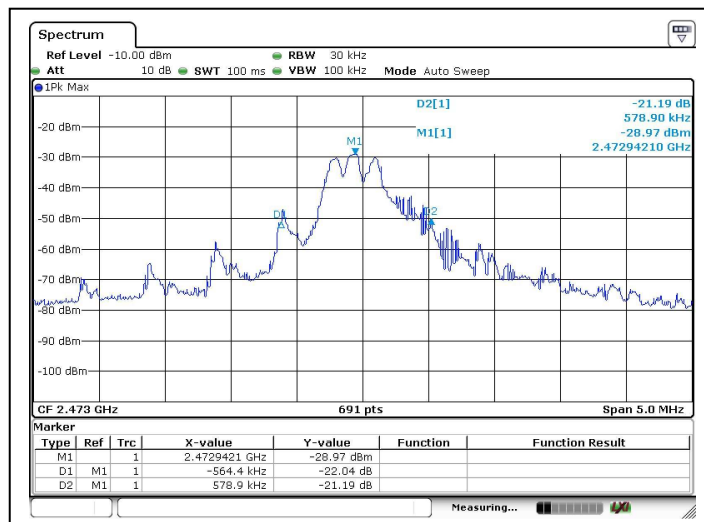

Channel: 2473MHz

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 18 of 20

FCC ID: VMZ-HPRC01T

IC: 9880A-HPRC01T

The conformity statement stated in Conclusion above is based on the decision rule agreed with applicant and listed in www.cmateesting.org/qac/statement-of-conformity.pdf

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmateesting.org.

This document shall not be reproduced except in full or with written approval by CMA Testing. The observations and test results in this report are relevant only to the sample tested.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmateesting.org Web Site: <http://www.cmateesting.org>



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AZ0020189(9)

Date : 20 May 2020

A2. 99% Bandwidth Plot

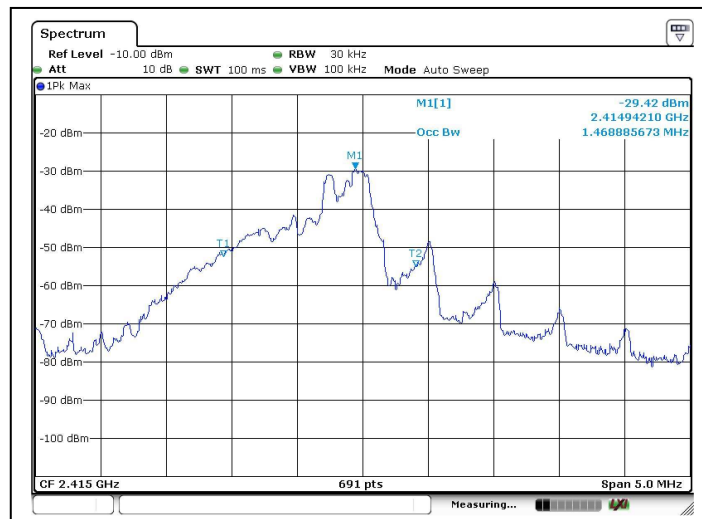

Channel: 2415MHz

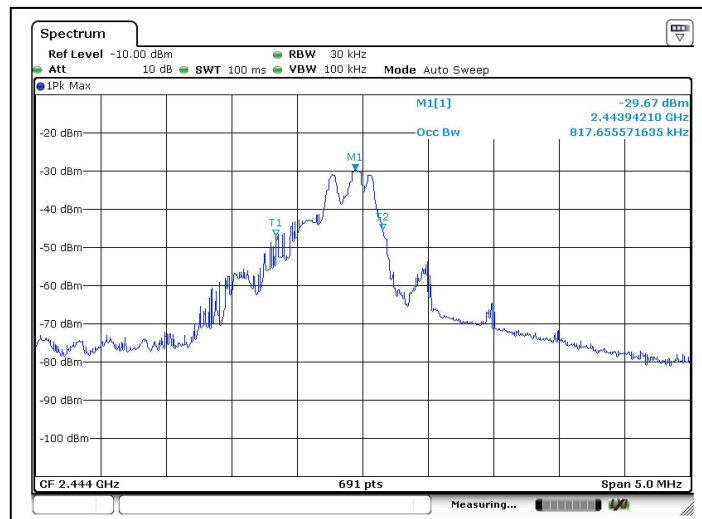

Channel: 2444MHz

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AZ0020189(9)

Date : 20 May 2020

A2. 99% Bandwidth Plot

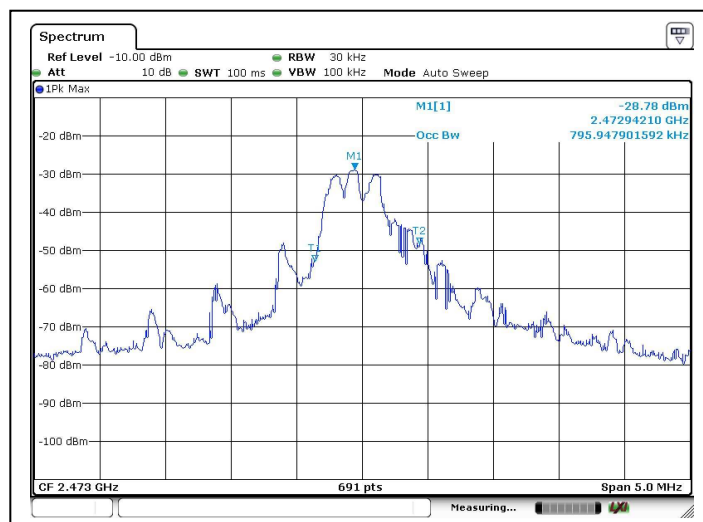

Channel: 2473MHz

***** End of Report *****

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 20 of 20

FCC ID: VMZ-HPRC01T

IC: 9880A-HPRC01T

The conformity statement stated in Conclusion above is based on the decision rule agreed with applicant and listed in www.cmateesting.org/qac/statement-of-conformity.pdf.
This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmateesting.org.
This document shall not be reproduced except in full or with written approval by CMA Testing. The observations and test results in this report are relevant only to the sample tested.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmateesting.org Web Site: <http://www.cmateesting.org>