

Test report

282376-1TRFWL

Date of issue: June 18, 2015

Applicant:

Andrew Wireless Innovations Group

Product:

ION-E

Model:

UAP

FCC ID:

BCR-IONEUAP

Specification:

FCC 47 CFR Part 90

Private Land Mobile Radio Services

Test location

Company name	Nemko Canada Inc.
Address	303 River Road
City	Ottawa
Province	Ontario
Postal code	K1V 1H2
Country	Canada
Telephone	+1 613 737 9680
Facsimile	+1 613 737 9691
Toll free	+1 800 563 6336
Website	www.nemko.com
Site number	FCC test site registration number: 176392, IC: 2040A-4 (3 m semi anechoic chamber)

Tested by	Kevin Rose, Wireless/EMC Specialist
Reviewed by	Andrey Adelberg, Senior Wireless/EMC Specialist
Date	June 18, 2015
Signature	

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.
© Nemko Canada Inc.

Table of contents

Table of contents	3
Section 1. Report summary	4
1.1 Applicant and manufacturer	4
1.2 Test specifications	4
1.3 Statement of compliance	4
1.4 Exclusions	4
1.5 Test report revision history	4
Section 2. Summary of test results	5
2.1 FCC Part 27 test results	5
Section 3. Equipment under test (EUT) details	6
3.1 Sample information	6
3.2 EUT information	6
3.3 Technical information	6
3.4 Product description and theory of operation	6
3.5 EUT exercise details	6
3.6 EUT setup diagram	7
Section 4. Engineering considerations	8
4.1 Modifications incorporated in the EUT	8
4.2 Technical judgment	8
4.3 Deviations from laboratory tests procedures	8
Section 5. Test conditions	9
5.1 Atmospheric conditions	9
5.2 Power supply range	9
Section 6. Measurement uncertainty	10
6.1 Uncertainty of measurement	10
Section 7. Test equipment	11
7.1 Test equipment list	11
Section 8. Testing data	12
8.1 FCC §90.205; §90.219(e)(1) RF Output Power	12
8.2 FCC §90.210; §90.219(e)(3) Conducted Spurious	13
8.3 FCC §90.210; §90.219(e)(3) Radiated Spurious	18
8.4 FCC §90.213 Frequency stability	19
8.5 FCC §90.210; §90.219(e)(4)(i)(ii)(iii) Input vs Output	20
8.6 FCC §90.219 (e)(2) Noise figure	25
Section 9. Setup Photos	27
9.1 Set-up	27
Section 10. Block diagrams of test set-ups	28
10.1 Radiated emissions set-up	28

Section 1. Report summary

1.1 Applicant and manufacturer

Company name	Andrew Wireless Innovations Group
Address	620 N Greenfield Parkway
City	Garner
Province/State	NC
Postal/Zip code	27529
Country	USA

1.2 Test specifications

FCC 47 CFR Part 90	Private Land Mobile Radio Services
935210 D02 Signal Boosters Certification v02r01	Appendix D booster, amplifier, and repeater interim basic authorization procedures

1.3 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

1.4 Exclusions

None

1.5 Test report revision history

Revision #	Details of changes made to test report
TRF	Original report issued



Section 2. Summary of test results

2.1 FCC Part 27 test results

Part	Test description	Verdict
\$90.205 \$90.219(e)(1)	RF Output Power	Pass
\$90.210 \$90.219(e)(3)	Conducted Spurious	Pass
\$90.210 \$90.219(e)(3)	Radiated Spurious	Pass
\$90.213	Frequency stability	Pass
\$90.210 \$90.219(e)(4)(i)(ii)(iii)	Emission masks	Pass
\$90.214	Transient frequency behavior	Not applicable
\$90.221	Adjacent channel power	Not applicable
\$90.207	Modulation Characteristics	Pass
\$90.219 (e)(2)	Noise figure	Pass

Notes: None

Section 3. Equipment under test (EUT) details

3.1 Sample information

Receipt date	August 18, 2014
Nemko sample ID number	1

3.2 EUT information

Product name	ION-E
Model	UAP
Serial number	18

3.3 Technical information

Operating band	P25, FM in 851 – 862 MHz and CDMA, LTE in 862 – 869 MHz
Modulation type	F1D, F1E, F3E in 851 – 862 MHz and F9W, D7W in 862 – 869 MHz
Power requirements	110 V _{AC} , ~3 A for entire system tested
Emission designator	D7W, F1D, F3E, F1E, and F9W
Gain	20 dB
Antenna information	Antenna Gain is 6.85 dBd

3.4 Product description and theory of operation

The UAP amplifier is a multi-band, multi-operator remote unit configuration used in conjunction with a master unit in the ION-E optical distribution antenna system.

3.5 EUT exercise details

The UAP was controlled via a Laptop interface with control software to configure the system.

3.6 EUT setup diagram

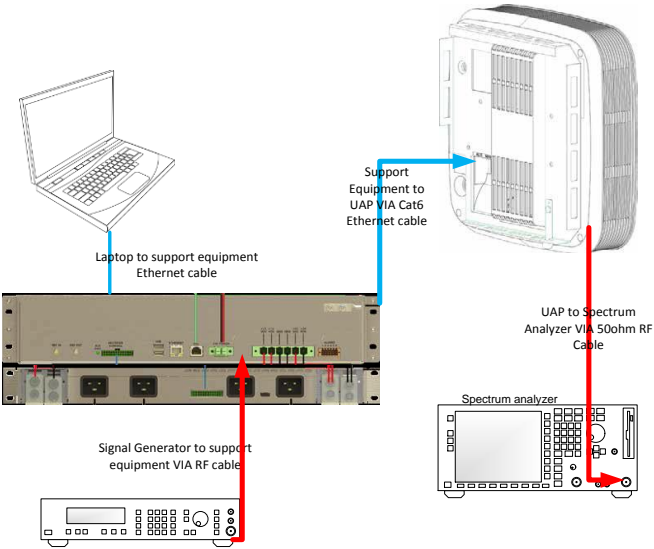


Figure 3.6-1: Setup diagram

Table 3.6-1: Support equipment

Description	Manufacturer	Model/Part number	Serial number	Rev.
Power Supply	GE	SP800XXXXXXZ0P3	14CS1227006	1
WCS rack	Commscope	WCS4	47	-

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

None

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

Temperature	15–30 °C
Relative humidity	20–75 %
Air pressure	860–1060 mbar

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.



Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

Test name	Measurement uncertainty, dB
All antenna port measurements	0.55
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber	TDK	SAC-3	FA002047	1 year	Feb. 25/16
Flush mount turntable	Sunol	FM2022	FA002082	—	NCR
Controller	Sunol	SC104V	FA002060	—	NCR
Antenna mast	Sunol	TLT2	FA002061	—	NCR
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 26	FA002043	1 year	Jan. 7/16
Spectrum analyzer	Rohde & Schwarz	FSU	FA001877	1 year	Mar. 27/16
Bilog antenna (20–3000 MHz)	Sunol	JB3	FA002108	1 year	Apr. 12/16
Horn antenna (1–18 GHz)	EMCO	3115	FA000825	1 year	Apr. 01/16
Pre-amplifier (1–18 GHz)	JCA	JCA118-503	FA002091	1 year	June 23/15
50 Ω coax cable	C.C.A.	None	FA002555	1 year	June 23/15
Signal generator	Rohde & Schwarz	SMIQ03E	FA001269	1 year	June 15/15
Signal generator	Rohde & Schwarz	SMIQ06B	FA001878	1 year	June 15/15
Noise Source	HP	346A	Rental	2 year	Mar 20/17
50 Ω coax cable	Huber + Suhner	None	FA002074	1 year	June 23/15
Temperature chamber	Thermotron	SM-16C	FA001030	1 year	NCR

Note: NCR - no calibration required, VOU - verify on use

Section 8. Testing data

8.1 FCC §90.205; §90.219(e)(1) RF Output Power

8.1.1 Definitions and limits

Signal boosters must be deployed such that the radiated power of the each retransmitted channel, on the forward link and on the reverse link, does not exceed 5 Watts effective radiated power (ERP)

8.1.2 Test summary

Test date	April 30, 2015	Temperature	24 °C
Test engineer	Kevin Rose	Air pressure	1004 mbar
Verdict	Pass	Relative humidity	47 %

8.1.3 Observations, settings and special notes

Worst case limit is used. Test receiver settings:

Detector mode	Peak
Resolution bandwidth	1 MHz
Intergration bandwidth	>OBW
Video bandwidth	>RBW
Trace mode	Max Hold
Measurement time	Auto

8.1.4 Test data

Table 8.1-1: RF Output power results

Modulation	Frequency, MHz	Conducted Power, dBm	Antenna Gain, dBd	ERP, W	Limit, W
Analog	860.0	18.20	6.85	0.32	5.00
P25	860.0	18.02	6.85	0.32	5.00
1.4 MHz OFDM	868.0	18.20	6.85	0.32	5.00
3 MHz OFDM	867.0	18.30	6.85	0.33	5.00
5 MHz OFDM	866.0	18.10	6.85	0.31	5.00
CDMA	867.0	18.68	6.85	0.36	5.00

8.2 FCC §90.210; §90.219(e)(3) Conducted Spurious

8.2.1 Definitions and limits

Spurious emissions from a signal booster must not exceed -13 dBm within any 100 kHz measurement bandwidth.

Emission Mask H. For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of 4 kHz or less: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 4 kHz, but no more than 8.5 kHz: At least $107 \log (fd/4)$ dB;
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 8.5 kHz, but no more than 15 kHz: At least $40.5 \log (fd/1.16)$ dB;
- (4) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 15 kHz, but no more than 25 kHz: At least $116 \log (fd/6.1)$ dB;
- (5) On any frequency removed from the center of the authorized bandwidth by more than 25 kHz: At least $43 + \log (P)$ dB.

Emission Mask G. For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 10 kHz, but no more than 250 percent of the authorized bandwidth: At least $116 \log (fd/6.1)$ dB, or $50 + 10 \log (P)$ dB, or 70 dB, whichever is the lesser attenuation;
- (2) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.


8.2.2 Test summary

Test date	April 28, 2015	Temperature	23 °C
Test engineer	Kevin Rose	Air pressure	1007 mbar
Verdict	Pass	Relative humidity	32 %

8.2.3 Observations, settings and special notes


Frequency range	30 MHz to 10th harmonic
Detector mode	Peak
Resolution bandwidth sweep	100 kHz (below 1 GHz), 1000 kHz (above 1 GHz)
Resolution bandwidth band edge	> 1 % of OBW
Video bandwidth	>RBW
Trace mode	Max Hold
Measurement time	Auto

8.2.4 Test data

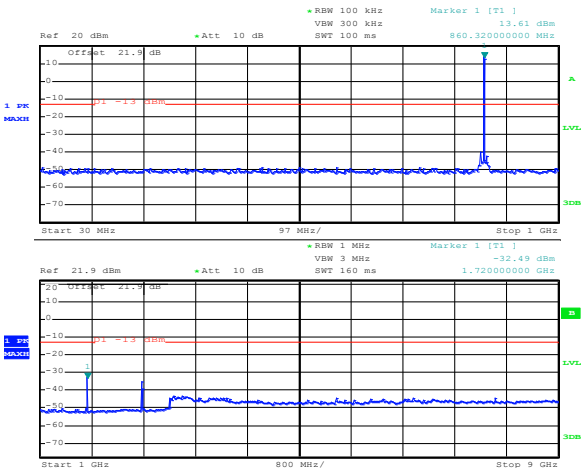


Date: 26.MAY.2015 13:12:54

Figure 8.2-1: 30MHz to 9 GHz 1.4 MHz OFDM

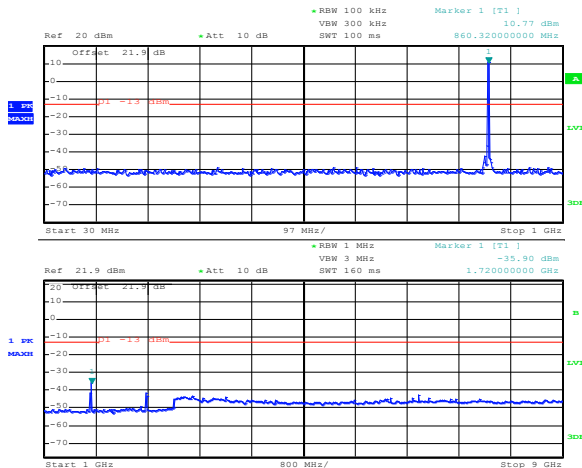


Date: 26.MAY.2015 13:13:14

Figure 8.2-2: 30MHz to 9 GHz 3 MHz OFDM

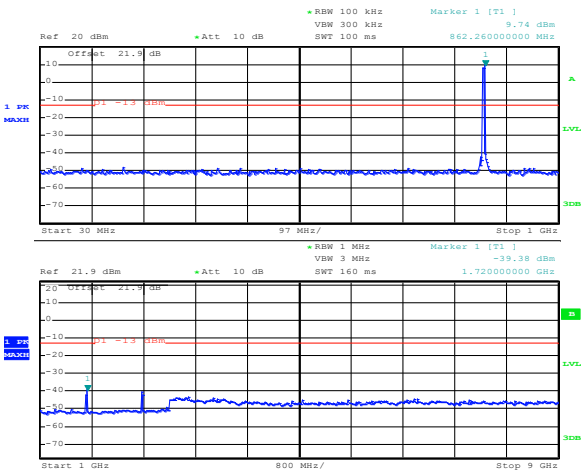

Date: 26.MAY.2015 13:13:36


Figure 8.2-3: 30MHz to 9 GHz 5 MHz OFDM

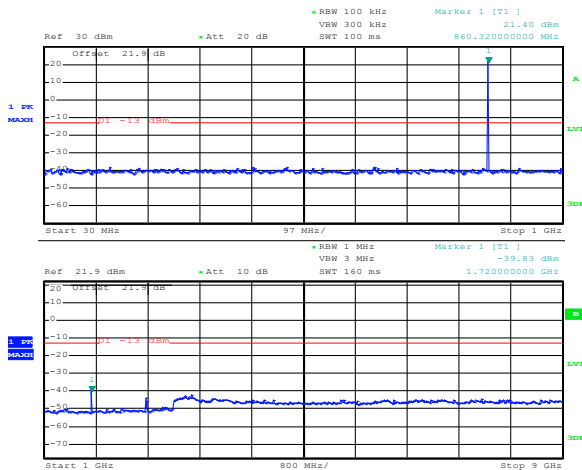

Date: 26.MAY.2015 13:23:42


Figure 8.2-4: 30MHz to 9 GHz CDMA

8.2.4 Test data continued

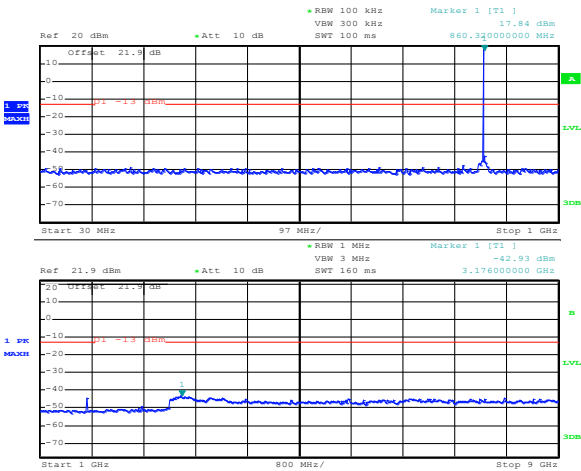


Date: 26.MAY.2015 13:12:15

Figure 8.2-5: 30MHz to 9 GHz Analog

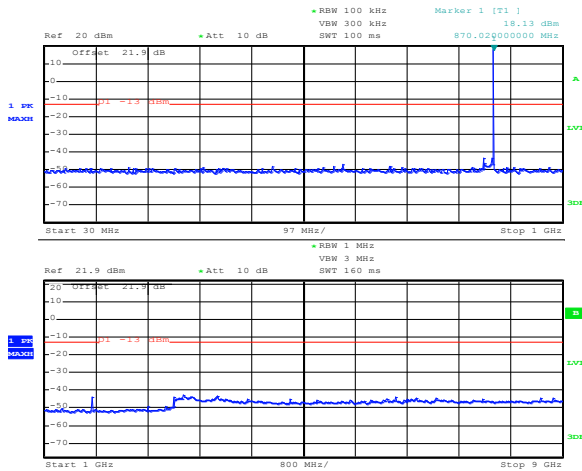


Date: 26.MAY.2015 13:10:54

Figure 8.2-6: 30MHz to 9 GHz P25

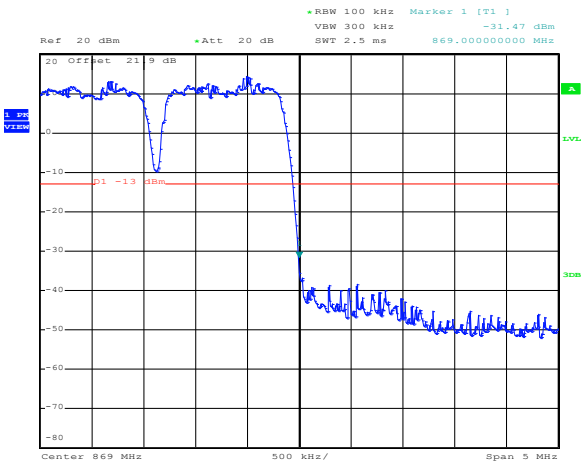

Date: 26.MAY.2015 13:49:38


Figure 8.2-7: Upper Band 1.4 MHz Intermodulation

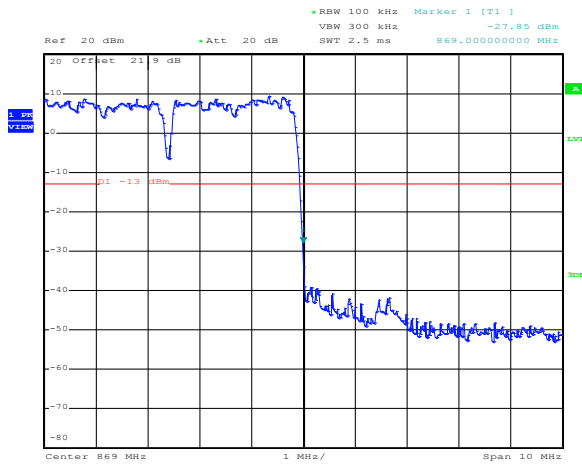

Date: 26.MAY.2015 13:49:13


Figure 8.2-8: 3 MHz Intermodulation

8.2.4 Test data continued

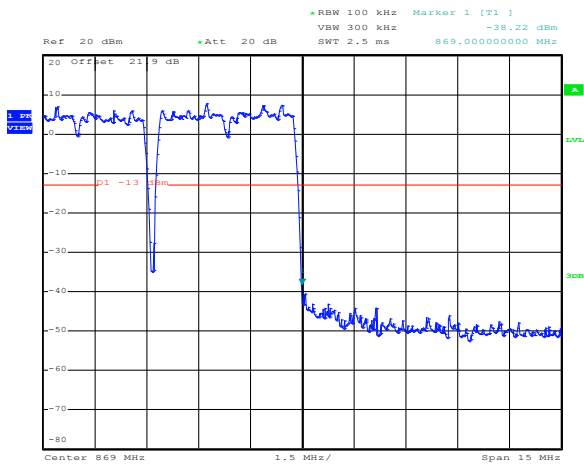


Date: 26.MAY.2015 13:48:47

Figure 8.2-9: 5 MHz Intermodulation

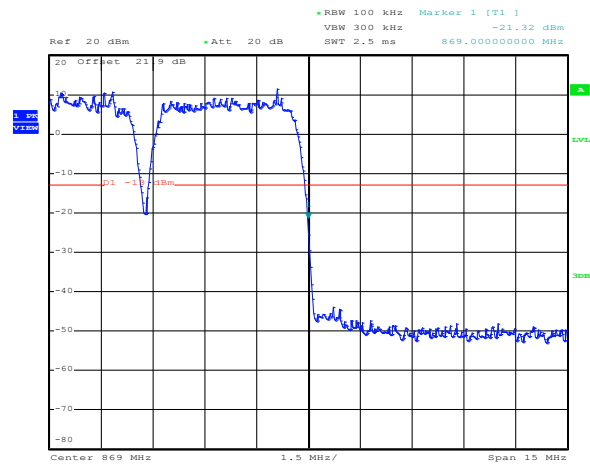


Date: 26.MAY.2015 13:45:55

Figure 8.2-10: CDMA Intermodulation

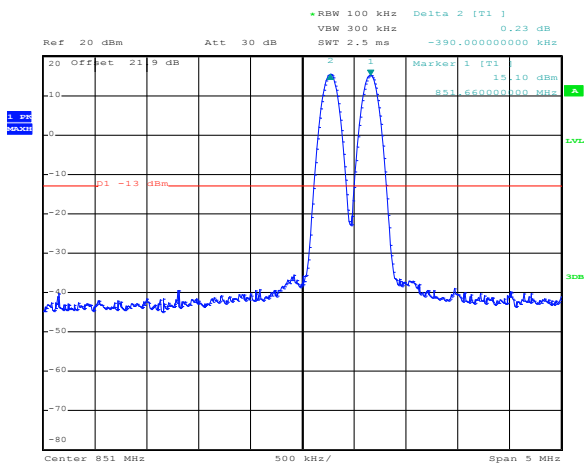

Date: 26.MAY.2015 13:01:19


Figure 8.2-11: Analog Intermodulation

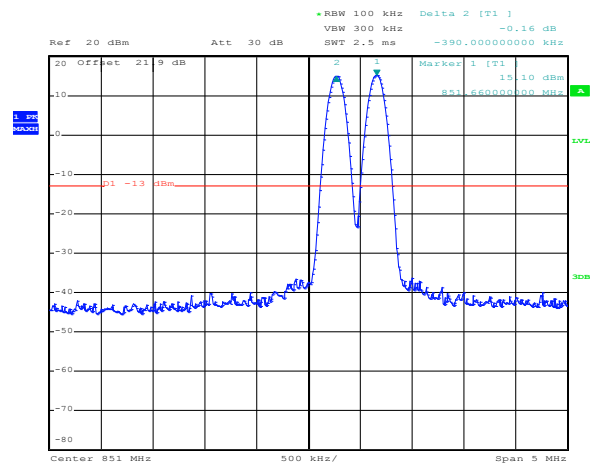

Date: 26.MAY.2015 13:00:09


Figure 8.2-12: P25 Intermodulation

8.2.4 Test data continued

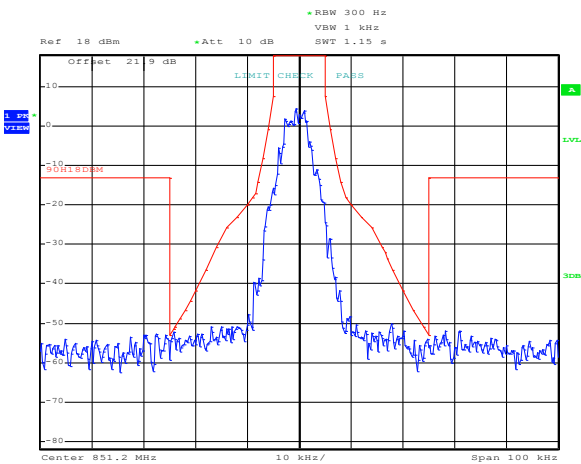

Date: 25.MAY.2015 20:27:39

Figure 8.2-13: P25 Mask H

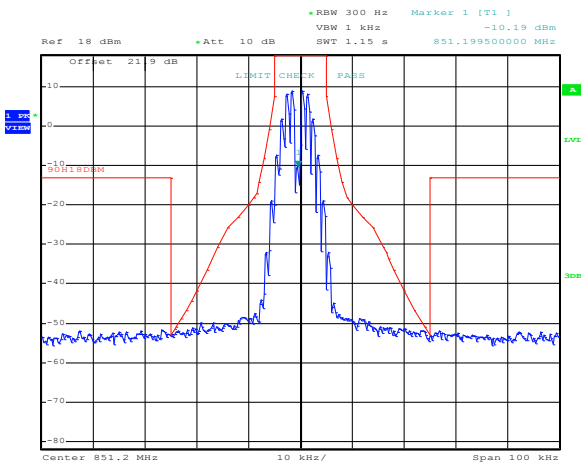

Date: 25.MAY.2015 20:33:12

Figure 8.2-14: Analog Mask H

8.3 FCC §90.210; §90.219(e)(3) Radiated Spurious

8.3.1 Definitions and limits

Spurious emissions from a signal booster must not exceed –13 dBm within any 100 kHz measurement bandwidth.

8.3.2 Test summary

Test date	May 3, 2015	Temperature	23 °C
Test engineer	Kevin Rose	Air pressure	1005 mbar
Verdict	Pass	Relative humidity	35 %

8.3.3 Observations, settings and special notes

Low, Mid, and High channels of all modulations were investigated.
No emissions were detected within 20 dB of the –13 dBm limit.

Receiver settings were:

Frequency range	30 MHz to 10 th harmonic
Detector mode	Peak
Resolution bandwidth	100 kHz (below 1 GHz), 1 MHz (above 1 GHz)
Video bandwidth	>RBW
Trace mode	Max Hold

8.4 FCC §90.213 Frequency stability

8.4.1 Definitions and limits

Frequency range (MHz)	Fixed and base stations, PPM	Mobile stations Over 2 watts output power, PPM	Mobile stations 2 watts or less output power, PPM
851-854	1	1.5	1.5
854-869	1.5	2.5	2.5

8.4.2 Test summary

Test date	March 24, 2015	Temperature	22 °C
Test engineer	Kevin Rose	Air pressure	1001 mbar
Verdict	Pass	Relative humidity	34 %

8.4.3 Observations, settings and special notes

Assessed to remain within assigned band. Spectrum analyzer settings:

Detector mode	Peak
Resolution bandwidth	20 Hz
Video bandwidth	RBW × 3
Trace mode	Max Hold

8.4.4 Test data

Table 8.4-1: Frequency Stability result

Test conditions	Frequency, MHz	Offset, Hz
+50 °C, Nominal	864.998292	0
+40 °C, Nominal	864.998292	0
+30 °C, Nominal	864.998292	0
+20 °C, +15 %	864.998292	0
+20 °C, Nominal	864.998292	Reference
+20 °C, -15 %	864.998292	0
+10 °C, Nominal	864.998292	0
0 °C, Nominal	864.998292	0
-10 °C, Nominal	864.998292	0
-20 °C, Nominal	864.998292	0
-30 °C, Nominal	864.998292	0

8.5 FCC §90.210; §90.219(e)(4)(i)(ii)(iii) Input vs Output

8.5.1 Definitions and limits

(4) A signal booster must be designed such that all signals that it retransmits meet the following requirements:

(i) The signals are retransmitted on the same channels as received. Minor departures from the exact provider or reference frequencies of the input signals are allowed, provided that the retransmitted signals meet the requirements of §90.213.

(ii) There is no change in the occupied bandwidth of the retransmitted signals.

(iii) The retransmitted signals continue to meet the unwanted emissions limits of §90.210 applicable to the corresponding received signals (assuming that these received signals meet the applicable unwanted emissions limits by a reasonable margin)

8.5.2 Test summary


Test date	April 29, 2015	Temperature	22 °C
Test engineer	Kevin Rose	Air pressure	1003 mbar
Verdict	Pass	Relative humidity	46 %

8.5.3 Observations, settings and special notes

Spectrum analyzer settings:


Detector mode	Peak
Resolution bandwidth	≥1 % of OBW
Video bandwidth	≥ RBW
Trace mode	Max Hold

8.5.4 Test data

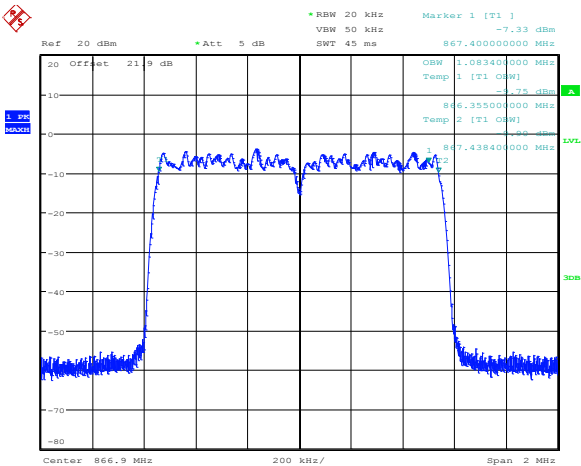


High channel
Date: 30.APR.2015 15:33:23

Figure 8.5-1: 1.4 MHz OFDM output

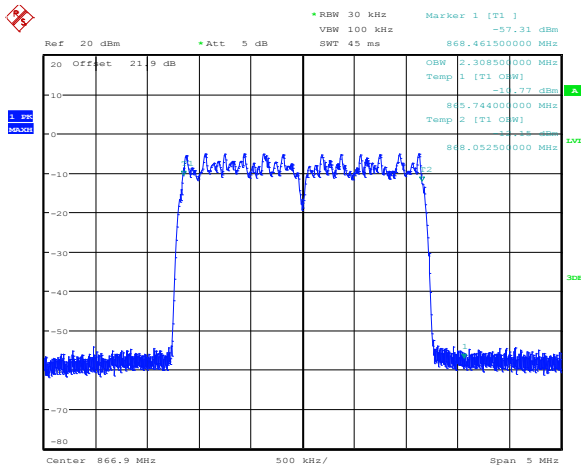


High channel
Date: 30.APR.2015 15:32:32

Figure 8.5-2: 3 MHz OFDM output

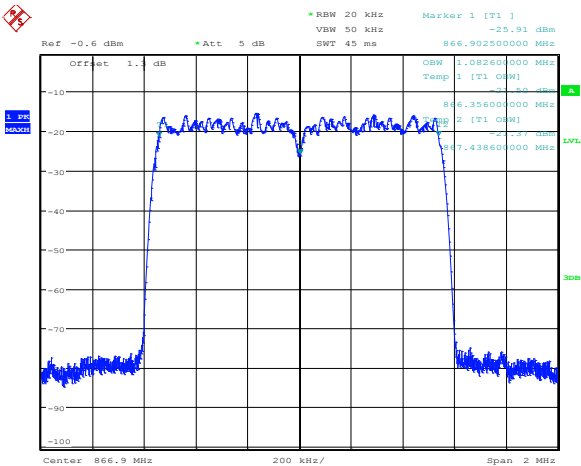

High channel
Date: 30.APR.2015 16:07:02

Figure 8.5-3: 1.4 MHz OFDM input

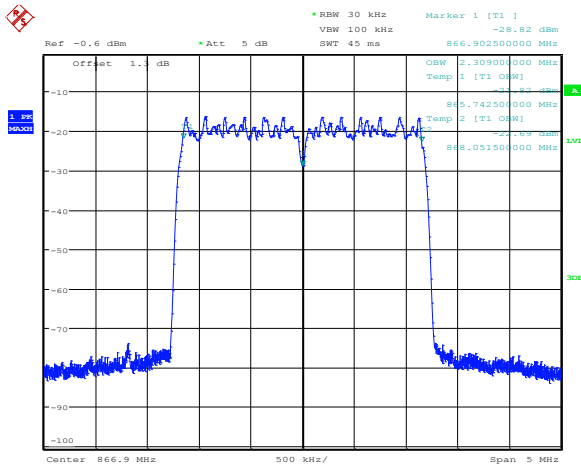

High channel
Date: 30.APR.2015 16:08:16

Figure 8.5-4: 3 MHz OFDM input

8.5.4 Test data continued

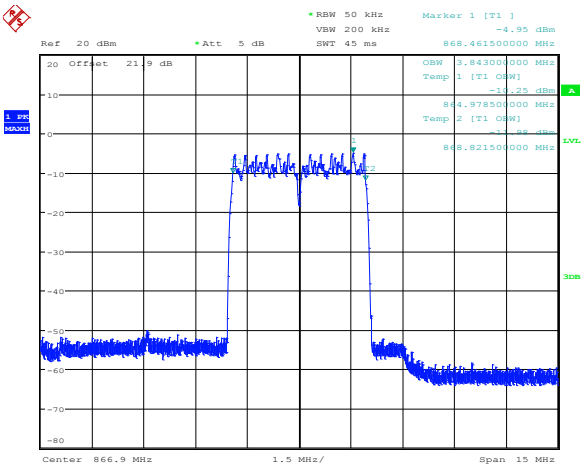


Figure 8.5-5: 5 MHz OFDM output

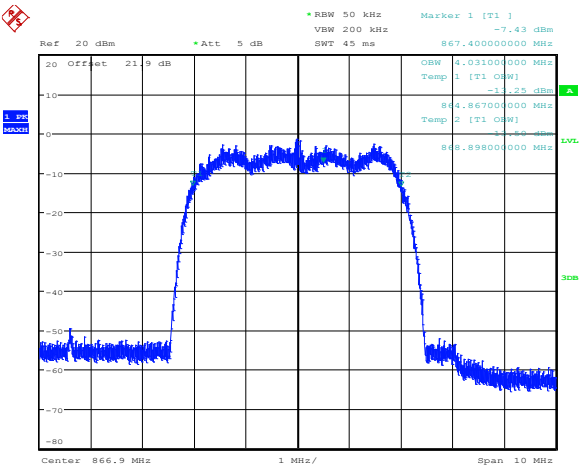


Figure 8.5-6: CDMA output

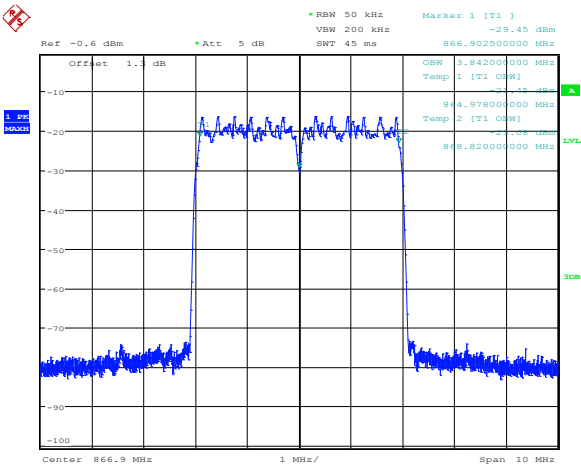


Figure 8.5-7: 5 MHz OFDM input


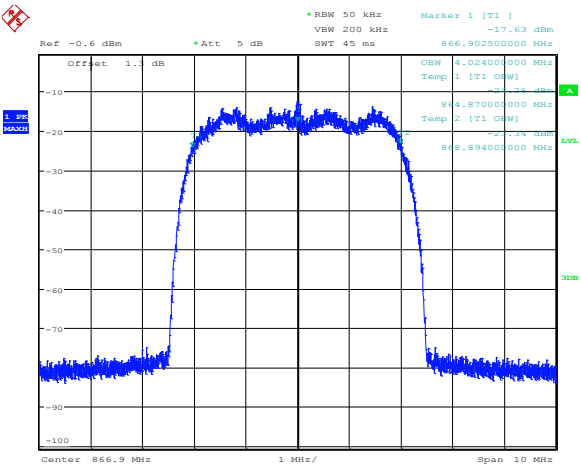



Figure 8.5-8: CDMA input

8.5.4 Test data continued

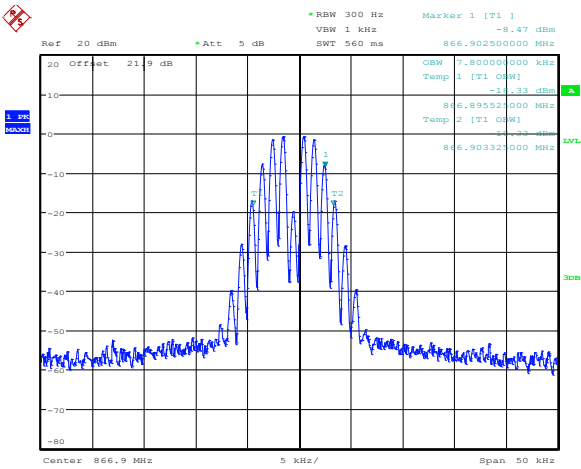


High channel
Date: 30.APR.2015 15:35:30

Figure 8.5-9: Analog output

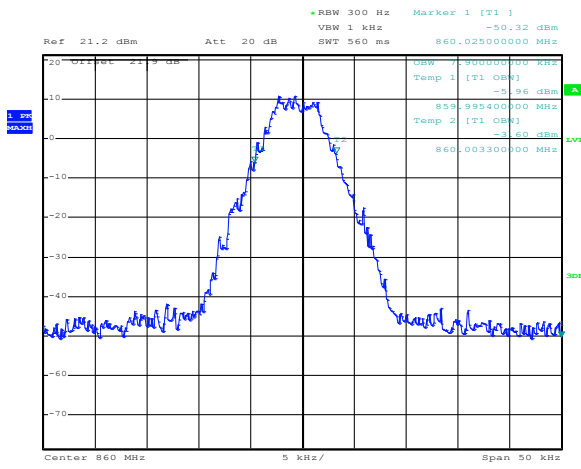


Date: 25.MAY.2015 20:16:34

Figure 8.5-10: P25 output

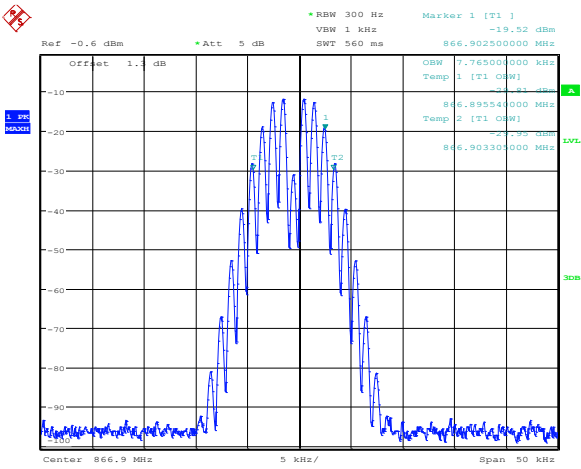

High channel
Date: 30.APR.2015 15:37:50


Figure 8.5-11: Analog input

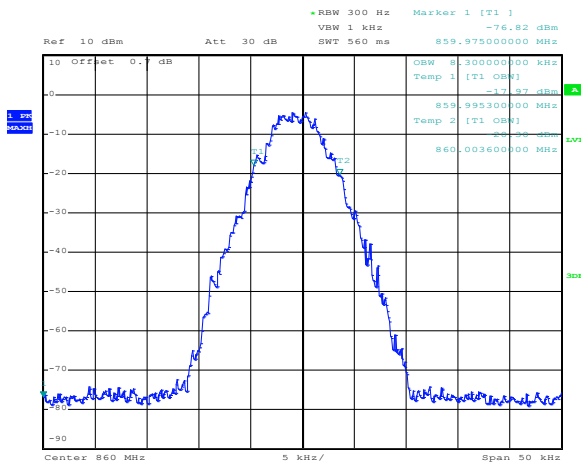

Date: 26.MAY.2015 10:34:57

Figure 8.5-12: P25 input

8.5.4 Test data continued

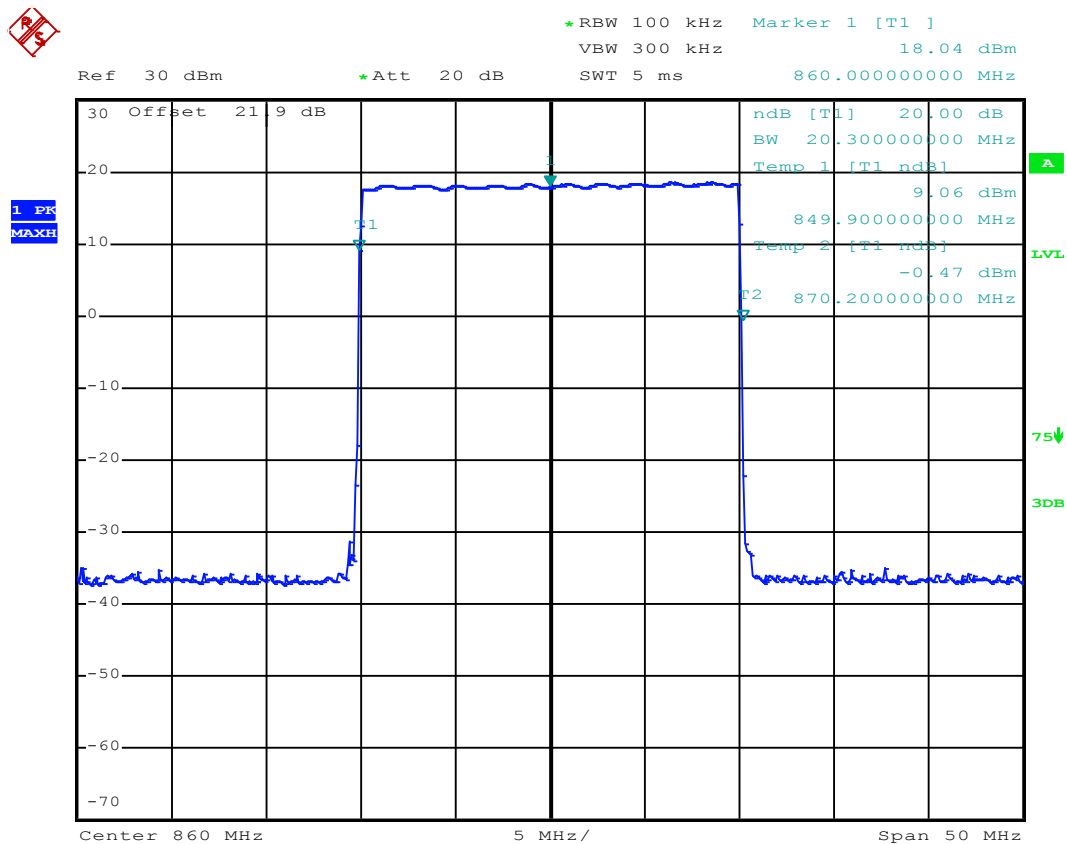

Date: 29.APR.2015 14:06:15

Figure 8.5-13: Filter response

8.6 FCC §90.219 (e)(2) Noise figure

8.6.1 Definitions and limits

T The noise figure of a signal booster must not exceed 9 dB in either direction.

8.6.2 Test summary

Test date	May 3, 2015	Temperature	22 °C
Test engineer	Kevin Rose	Air pressure	1003 mbar
Verdict	Pass	Relative humidity	46 %

8.6.3 Observations, settings and special notes

Assessed to remain within assigned band. Spectrum analyzer settings:

Detector mode	Peak
Resolution bandwidth	1 MHz
Video bandwidth	RBW × 3
Trace mode	Average

8.6.4 Test data


Table 8.6-1: Noise figure result

Noise Source OFF, dBm	Noise Source ON, dBm	ENR, dB	NF Result, dB	Limit, dB	Margin, dB
-73.03	-71.84	5.04	5.05	9.00	3.95

Noise Figure (NF) = $10 \times \log_{10} (10^{(ENR/10)} / 10^{(Y/10)} - 1)$


Y= Noise Source OFF - Noise Source ON

ENR= Noise level above Thermal noise

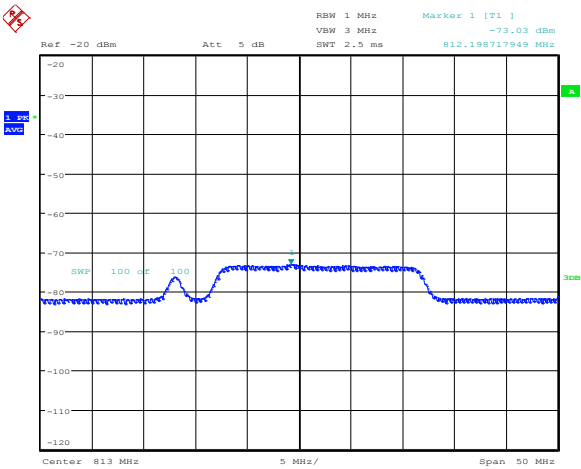

High channel
Date: 3.MAY.2015 14:07:38

Figure 8.6-1: Noise source off

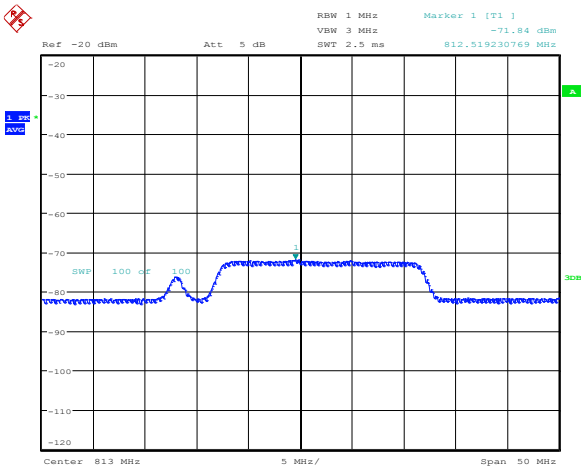

High channel
Date: 3.MAY.2015 14:07:12

Figure 8.6-2: Noise source on

Section 9. Setup Photos

9.1 Set-up



Figure 9.1-1: Radiated setup photo



Figure 9.1-2: Conducted setup photo

Section 10. Block diagrams of test set-ups

10.1 Radiated emissions set-up

