FCC/IC DFS Test Report

Tested in accordance with
Federal Communications Commission (FCC)
Personal Communications Services
CFR 47, Parts 15.407
&
Industry Canada (IC), RSS-210



REPORT NO.: RTS-6057-1406-12_rev1

PRODUCT MODEL NO.: RGY181LW

TYPE NAME: BlackBerry® smartphone

FCC ID: L6ARGY180LW IC: 2503A-RGY180LW

This report supersedes the report RTS-6057-1406-12 dated June 12, 2014

DATE: July 10, 2014

RTS is accredited according to EN ISO/IEC 17025 by:



592

≅ BlackBerry.	DFS Test Report for the BlackBerry® smartphone Model RGY181LW	
Test Report No. Date of Test RTS-6057-1406-12_rev1 June 6, 2014		FCC ID: L6ARGY180LW IC: 2503A-RGY180LW

Report Revision History:

Rev1:

- 1. Editorial changes in the header.
- 2. Addition of KDB references in section A Scope.

Statement of Performance:

The BlackBerry[®] smartphone, model RGY181LW, part number CER-59665-001 Rev2-x05-02 and accessories perform within the requirements of the test standards when configured and operated per Blackberry's operation instructions.

Declaration:

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Documented by:	Reviewed by:
Hong Lin	
Heng Lin Compliance Specialist II	Kevin Guo Compliance Specialist I
Reviewed and Approved by:	
Masud S. Attayi, P.Eng. Manager, Regulatory Compliance	

This report shall $\underline{\mathsf{NOT}}$ be reproduced except in full without the written consent of RTS - A division of BlackBerry Limited.

Copyright 2005-2014 Page 2 of 12

∷ BlackBerry.	DFS Test Report for the BlackBerry® smartphone Model RGY181LW	
Test Report No.	Date of Test	FCC ID: L6ARGY180LW
RTS-6057-1406-12_rev1	June 6, 2014	IC: 2503A-RGY180LW

Table of Contents

A.	Scope	4
В.	Associated Documents	4
C.	Product Identification	4
D.	Support Equipment Used for the Testing of the EUT	5
E.	Test Results Chart – FCC Part 15, Client Device	6
F.	Summary of Result	6
G.	Compliance Test Equipment Used	7
APPE	ENDIX 1 - DFS TEST PLOTS and DATA	8

Page 3 of 12

≅ BlackBerry.	DFS Test Report for the BlackBerry® smartphone Model RGY181LW	
Test Report No.	Date of Test	FCC ID: L6ARGY180LW
RTS-6057-1406-12_rev1	June 6, 2014	IC: 2503A-RGY180LW

A. Scope

This report details the results of compliance tests that were performed in accordance with the requirements of:

- FCC CFR 47 Part 15.407, October, 2013
- Industry Canada, RSS-210, Issue 8, December 2010, License-exempt Radio Apparatus
- KDB 905462 D02 UNII DFS Compliance Procedures
- KDB 848637 Guidance for U-NII client devices without radar detection capabilities

B. Associated Documents

None

C. Product Identification

Manufactured by BlackBerry Limited whose headquarters is located at:

295 Phillip Street

Waterloo, Ontario

Canada, N2L 3W8

Phone: 519 888 7465 Fax: 519 888 6906

The equipment under test (EUT) was tested at the following location:

RTS Test Facility

440 Phillip Street

Waterloo, Ontario

Canada, N2L 5R9

Phone: 519 888 7465 Fax: 519 888 6906

The testing was performed on June 6, 2014.

This report shall <u>NOT</u> be reproduced except in full without the written consent of RTS - A division of BlackBerry Limited.

Copyright 2005-2014 Page 4 of 12

DFS Test Report for the BlackBerry® smartphone Model RGY181LV		e Model RGY181LW
Test Report No.	Date of Test	FCC ID: L6ARGY180LW
RTS-6057-1406-12_rev1	June 6, 2014	IC: 2503A-RGY180LW

BlackBerry® smartphone Samples Tested

SAMPLE	MODEL	CER NUMBER	PIN	SOFTWARE
1	RGY181LW	CER-59665-001 Rev2-x05-02	2FFF46FB	10.3.0.626

DFS testing was performed on sample 1.

The manufacturer declared modes for the EUT operational characteristics that affect DFS are as follows:

Operating	Operating Modes (5250 -5350 MHz, 5470-5725MHz)				
	Master Device				
\boxtimes	Client Device (no In-Service Monitoring, no Ad – Hoc mode)				
	Client Device with In-Service Monitoring				
Channel	Protocol IP Based Frame Based Other				

D. Support Equipment Used for the Testing of the EUT

Manufacturer	Description	Model	Serial Number	FCC ID and IC
Cisco	Wireless Controller	2504	PSJ162904G5	-
Cisco	Access Point	AIR-CAP3702E-A-K9	FTX181077V8	LDK102087 2461B-102087
D-Link	Router	WBR-1310	P10317B010096	KA2WBR1310 4216A-WBR1310
Lenovo	Laptop	4236-D84	R8-A1XXN 11/05	-

This report shall <u>NOT</u> be reproduced except in full without the written consent of RTS - A division of BlackBerry Limited.

Copyright 2005-2014 Page 5 of 12

≅ BlackBerry.	DFS Test Report for the BlackBerry® smartphone Model RGY181L	
Test Report No.	Date of Test	FCC ID: L6ARGY180LW
RTS-6057-1406-12_rev1	June 6, 2014	IC: 2503A-RGY180LW

E. Test Results Chart - FCC Part 15, Client Device

SPECIFICATION		TEST TYPE	Meets	Test Data
FCC CFR 47	IC	IESTITE	Requirement	APPENDIX
Part 15.407 RSS-210, A9.3		Channel closing transmission time	Yes	1
Part 15.407	RSS-210, A9.3	Channel move time	Yes	1

F. Summary of Result

a). The BlackBerry® smartphone met the requirement of the Channel Closing Transmission and Time, Channel Move time and Non-occupancy period requirement as per FCC 15.407. The measurement was performed on Channel 106 of the DFS band with 80MHz bandwidth. Radar Type 1 of the Short Pulse Test waveform was used for tests.

See APPENDIX 1 for the test data.

Measurement Uncertainties:

Measurement	Measurement	Expanded
	Unit	Uncertainty
DFS Threshold (Conducted)	dBm	1.2

BlackBerry Limited. Copyright 2005-2014 Page 6 of 12

≅ BlackBerry.	DFS Test Report for the BlackBerry® smartphone Model RGY181LW		
Test Report No. RTS-6057-1406-12_rev1	Date of Test June 6, 2014	FCC ID: L6ARGY180LW IC: 2503A-RGY180LW	

G. Compliance Test Equipment Used

<u>UNIT</u>	MANUFACTURER	MODEL	<u>SERIAL</u> <u>NUMBER</u>	CAL DUE DATE (YY MM DD)	<u>USE</u>
Spectrum Analyzer	Rohde & Schwarz	FSV	101820	14-11-25	DFS
DFS RF Modulator	National Instruments	PXIe-5611	EC157C	15-03-17	DFS
DFS I/Q Signal Generator	National Instruments	PXIe-5450	EC6BB1	15-03-17	DFS
DFS RF Signal Generator	National Instruments	PXIe-5620	ED2167	15-03-17	DFS
T/RH Meter	OMEGA	iTHX-SD	0380564	16-11-14	DFS

H. Test Software used

<u>SOFTWARE</u>	<u>COMPANY</u>	VERSION	<u>USE</u>
iDFTest	Redwolf	2.5	DFS

Page 7 of 12




≅ BlackBerry.	DFS Test Report for the BlackBerry® smartphone Model RGY181LW APPENDIX 1			
Test Report No.	Date of Test	FCC ID: L6ARGY180LW		
RTS-6057-1406-12_rev1	June 6, 2014	IC: 2503A-RGY180LW		

DFS Conducted Test Results

DFS Test Methods

Conducted Test Method

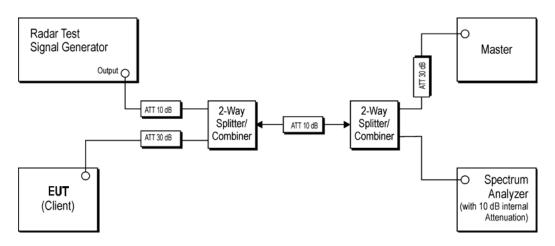

<u>UNIT</u>	<u>MANUFACTURER</u>	MODEL	SERIAL NUMBER
10dB Attenuator	Aeroflex Weinschel	3330A-10	-
30dB Attenuator	Aeroflex Weinschel	3330A-30	-
2-Way Splitter	Weinschel	1515	QC170
2-Way Splitter	Weinschel	1534	221

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the Channel Closing Transmission Time and Channel Move Time.

BlackBerry Limited. Copyright 2005-2014 Page 9 of 12

≅ BlackBerry.	DFS Test Report for the BlackBerry® smartphone Model RGY181LW APPENDIX 1			
Test Report No.	Date of Test	FCC ID: L6ARGY180LW		
RTS-6057-1406-12_rev1	June 6, 2014	IC: 2503A-RGY180LW		

DFS Conducted Test Results Cont'd

Radar Waveforms

	FCC Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Detection Percentage	Minimum Number of Trials	
1	1	1428	18	60%	30	
2	1-5	150-230	23-29	60%	30	
3	6-10	200-500	16-18	60%	30	
4	11-20	200-500	12-16	60%	30	
Aggregate	(Radar Types	80%	120			

FCC Long Pulse Radar Test Waveforms							
Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µs)	Number of Pulses per Burst	Number of Bursts	Minimum Detection Percentage	Minimum Number of Trials
5	50-100	5-20	1000- 2000	1-3	8-20	80%	30

	Frequency Hopping Radar Test Waveforms						
Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Detection Percentage	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

BlackBerry Limited. Copyright 2005-2014 Page 10 of 12

≅ BlackBerry.	DFS Test Report for the BlackBerry® smartphone Model RGY181LW APPENDIX 1		
Test Report No.	Date of Test	FCC ID: L6ARGY180LW	
RTS-6057-1406-12_rev1	June 6, 2014	IC: 2503A-RGY180LW	

DFS Conducted Test Results Cont'd

The following tests were performed by Heng Lin

Date of the test: June 6, 2014


The environmental conditions were: Temperature: 23.6 – 24.7 °C

Humidity: 22.9 – 49.5 %

Wave form Type	Channel Closing Transmission Time		Channel Move Time		Result
	Measured	Limit	Measured	Limit	
Radar Type 1	22.125 ms	260 ms	843 ms	10 s	PASS

Channel Bandwidth (80MHz)

Channel Closing Transmission Time

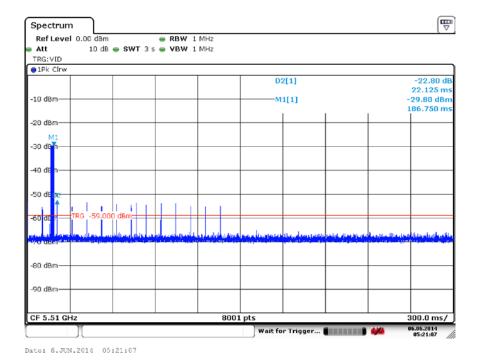


This report shall <u>NOT</u> be reproduced except in full without the written consent of RTS - A division of BlackBerry Limited.

Copyright 2005-2014 Page 11 of 12

≅ BlackBerry.	DFS Test Report for the BlackBerry® smartphone Model RGY181LW APPENDIX 1		
Test Report No.	Date of Test	FCC ID: L6ARGY180LW	
RTS-6057-1406-12_rev1	June 6, 2014	IC: 2503A-RGY180LW	

DFS Conducted Test Results Cont'd

Channel Move Time

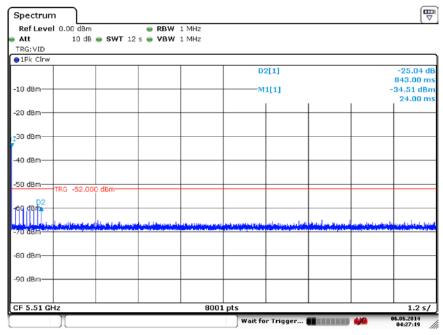

Date: 6.JUN.2014 04:27:19

This report shall NOT be reproduced except in full without the written consent of RTS - A division of BlackBerry Limited.

Copyright 2005-2014

Page 12 of 12