

Appendix A: Effective (Isotropic) Radiated Power Output Data

Test Result

Band	Channel	PCL	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
GSM850	128	5	33.46	28.85	38.45	PASS
GSM850	190	5	33.54	28.93	38.45	PASS
GSM850	251	5	33.24	28.63	38.45	PASS
GSM1900	512	0	30.09	31.16	33.00	PASS
GSM1900	661	0	30.22	31.29	33.00	PASS
GSM1900	810	0	30.27	31.34	33.00	PASS

Band	Channel	PCL	Slot	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
GPRS850	128	5	1	33.48	28.87	38.45	PASS
GPRS850	128	5	2	31.32	26.71	38.45	PASS
GPRS850	128	5	3	29.96	25.35	38.45	PASS
GPRS850	128	5	4	28.34	23.73	38.45	PASS
GPRS850	190	5	1	33.55	28.94	38.45	PASS
GPRS850	190	5	2	31.53	26.92	38.45	PASS
GPRS850	190	5	3	30.23	25.62	38.45	PASS
GPRS850	190	5	4	28.59	23.98	38.45	PASS
GPRS850	251	5	1	33.24	28.63	38.45	PASS
GPRS850	251	5	2	31.29	26.68	38.45	PASS
GPRS850	251	5	3	30.05	25.44	38.45	PASS
GPRS850	251	5	4	28.33	23.72	38.45	PASS
GPRS1900	512	0	1	30.20	31.27	33.00	PASS
GPRS1900	512	0	2	27.85	28.92	33.00	PASS
GPRS1900	512	0	3	26.59	27.66	33.00	PASS
GPRS1900	512	0	4	24.83	25.9	33.00	PASS
GPRS1900	661	0	1	30.27	31.34	33.00	PASS
GPRS1900	661	0	2	28.36	29.43	33.00	PASS
GPRS1900	661	0	3	27.08	28.15	33.00	PASS
GPRS1900	661	0	4	25.32	26.39	33.00	PASS
GPRS1900	810	0	1	30.33	31.4	33.00	PASS
GPRS1900	810	0	2	28.59	29.66	33.00	PASS
GPRS1900	810	0	3	27.37	28.44	33.00	PASS
GPRS1900	810	0	4	25.55	26.62	33.00	PASS

Remark: EIRP (dBm) = Conducted power (dBm) + Antenna Gain (dBi). (For GSM1900)

ERP (dBm) = EIRP (dBm) - 2.15 (dB). (For GSM850)


Appendix B: Peak-to-Average Ratio(CCDF)

Test Result

Band	Channel	PCL	Result(dB)	Limit(dB)	Verdict
GSM850	190	5	2.65	13	PASS
GSM1900	661	0	2.72	13	PASS

Remark: All channel and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

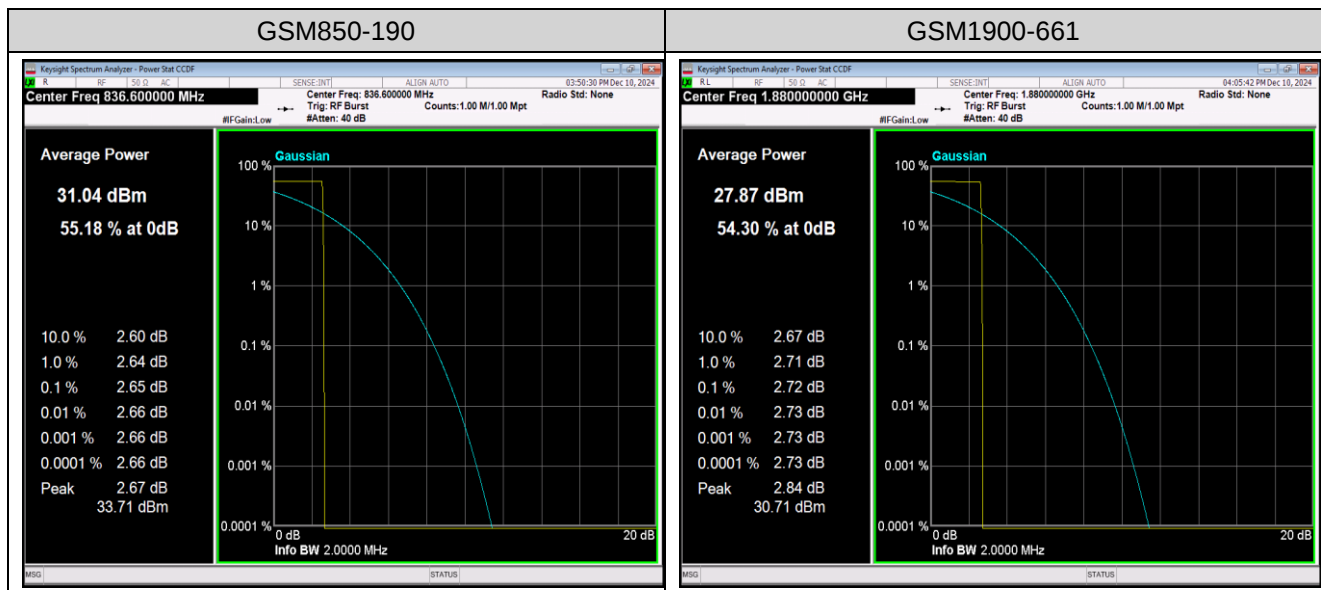


Appendix C: 26dB Bandwidth and Occupied Bandwidth

Test Result

Band	Channel	PCL	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM850	128	5	0.24431	0.3168	---	PASS
GSM850	190	5	0.24847	0.3130	---	PASS
GSM850	251	5	0.24475	0.3148	---	PASS
GSM1900	512	0	0.24645	0.3181	---	PASS
GSM1900	661	0	0.24595	0.3107	---	PASS
GSM1900	810	0	0.24259	0.3206	---	PASS

Test Graphs

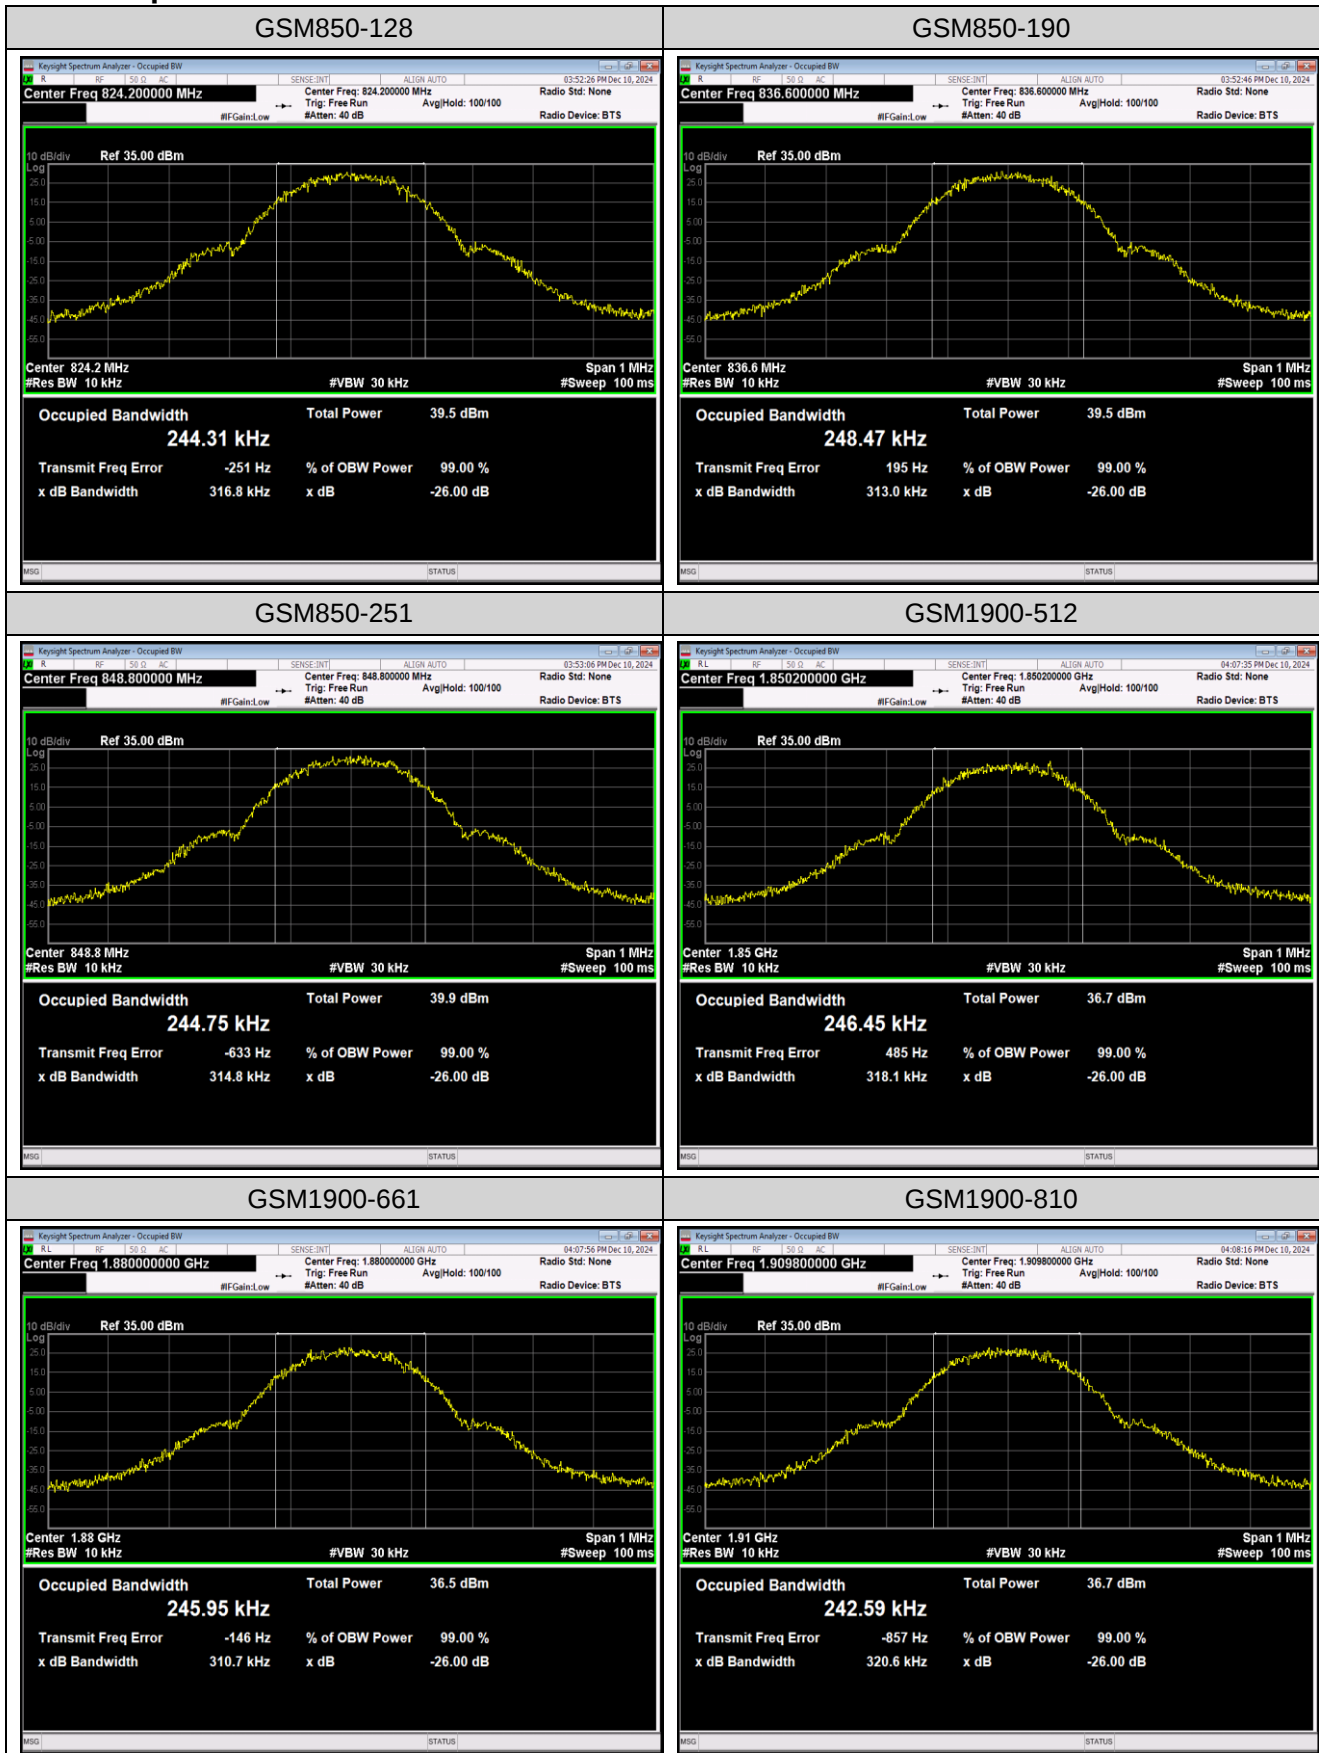


Appendix D: Band Edge

Test Result

Band	Channel	PCL	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM850	128	5	823.98	-22.86	-13	PASS
GSM850	251	5	849.02	-22.91	-13	PASS
GSM1900	512	0	1849.98	-15.26	-13	PASS
GSM1900	810	0	1910.02	-13.33	-13	PASS

Test Graphs

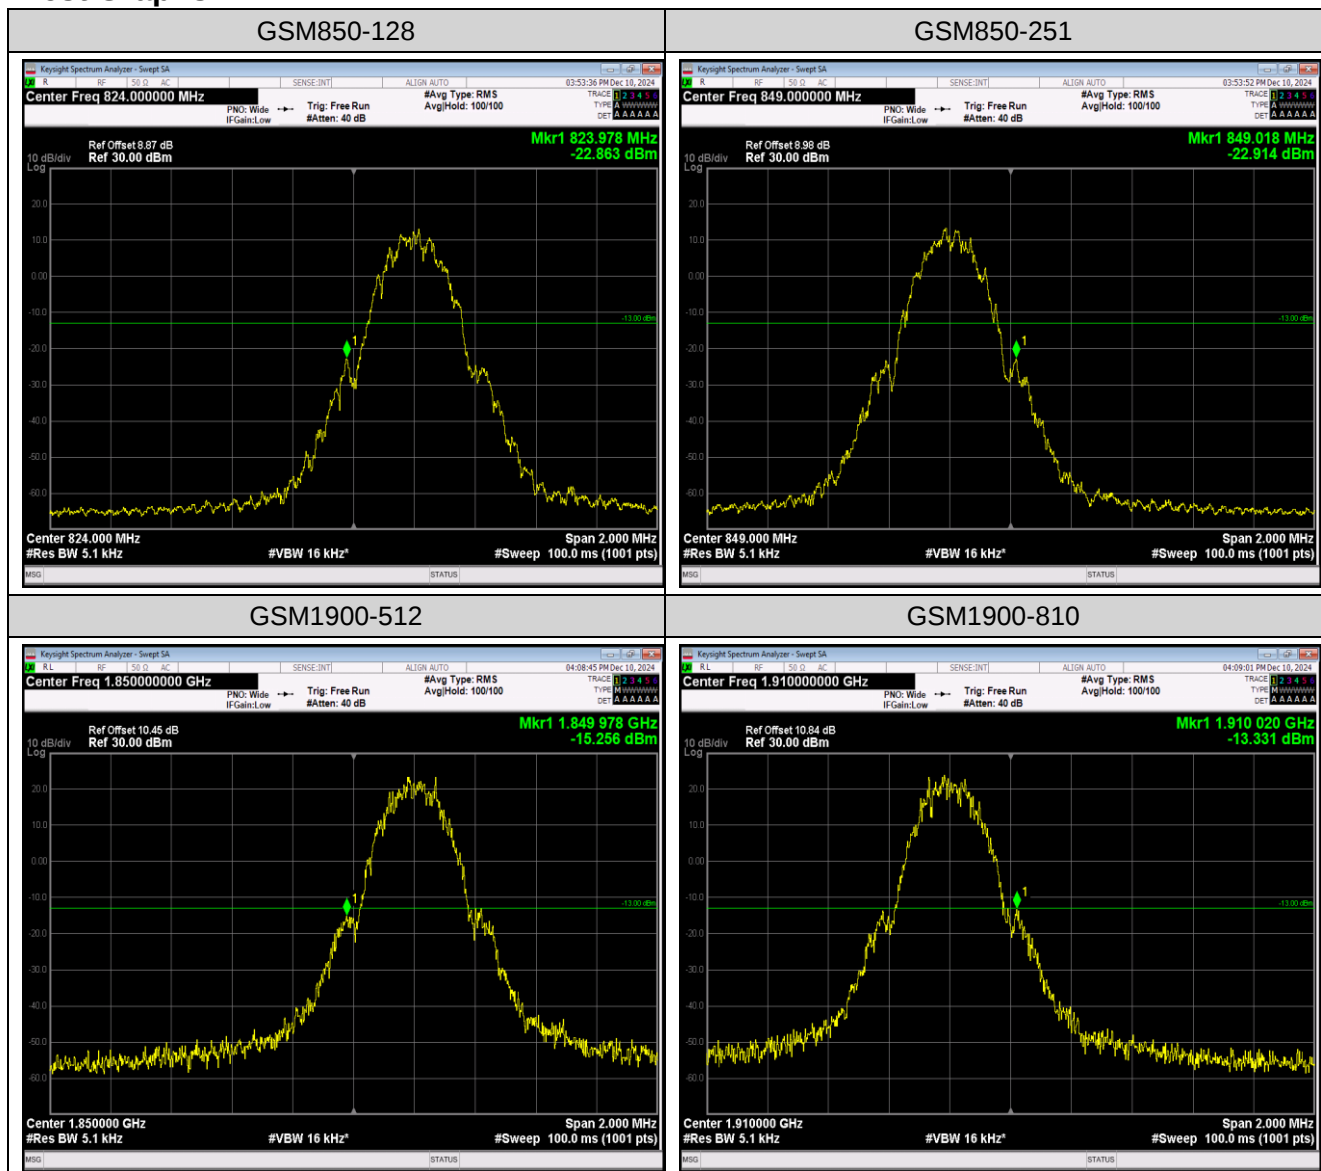


Appendix E: Conducted Spurious Emission

Test Result

Band	Channel	PCL	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	5	0.009~0.15MHz	0.01	-54.14	-33	PASS
GSM850	128	5	0.15~30MHz	0.15	-40.92	-13	PASS
GSM850	128	5	30~1000MHz	980.24	-42.21	-13	PASS
GSM850	128	5	1000~10000MHz	1648.3	-25.32	-13	PASS
GSM850	190	5	0.009~0.15MHz	0.01	-54.67	-33	PASS
GSM850	190	5	0.15~30MHz	0.15	-42.21	-13	PASS
GSM850	190	5	30~1000MHz	940.51	-45.09	-13	PASS
GSM850	190	5	1000~10000MHz	1673.2	-25.71	-13	PASS
GSM850	251	5	0.009~0.15MHz	0.01	-54.42	-33	PASS
GSM850	251	5	0.15~30MHz	0.15	-40.36	-13	PASS
GSM850	251	5	30~1000MHz	640.91	-43.01	-13	PASS
GSM850	251	5	1000~10000MHz	1697.8	-25.35	-13	PASS
GSM1900	512	0	0.009~0.15MHz	0.01	-53.19	-43	PASS
GSM1900	512	0	0.15~30MHz	0.17	-44.26	-23	PASS
GSM1900	512	0	30~1000MHz	374.48	-45.71	-13	PASS
GSM1900	512	0	1000~18000MHz	17014.57	-22.32	-13	PASS
GSM1900	661	0	0.009~0.15MHz	0.01	-56.36	-43	PASS
GSM1900	661	0	0.15~30MHz	0.15	-42.01	-23	PASS
GSM1900	661	0	30~1000MHz	923.73	-45.42	-13	PASS
GSM1900	661	0	1000~18000MHz	16355.53	-22.57	-13	PASS
GSM1900	810	0	0.009~0.15MHz	0.01	-55.7	-43	PASS
GSM1900	810	0	0.15~30MHz	0.16	-45.17	-23	PASS
GSM1900	810	0	30~1000MHz	910.89	-45.33	-13	PASS
GSM1900	810	0	1000~18000MHz	17096.17	-22.13	-13	PASS

Remark: All channel and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

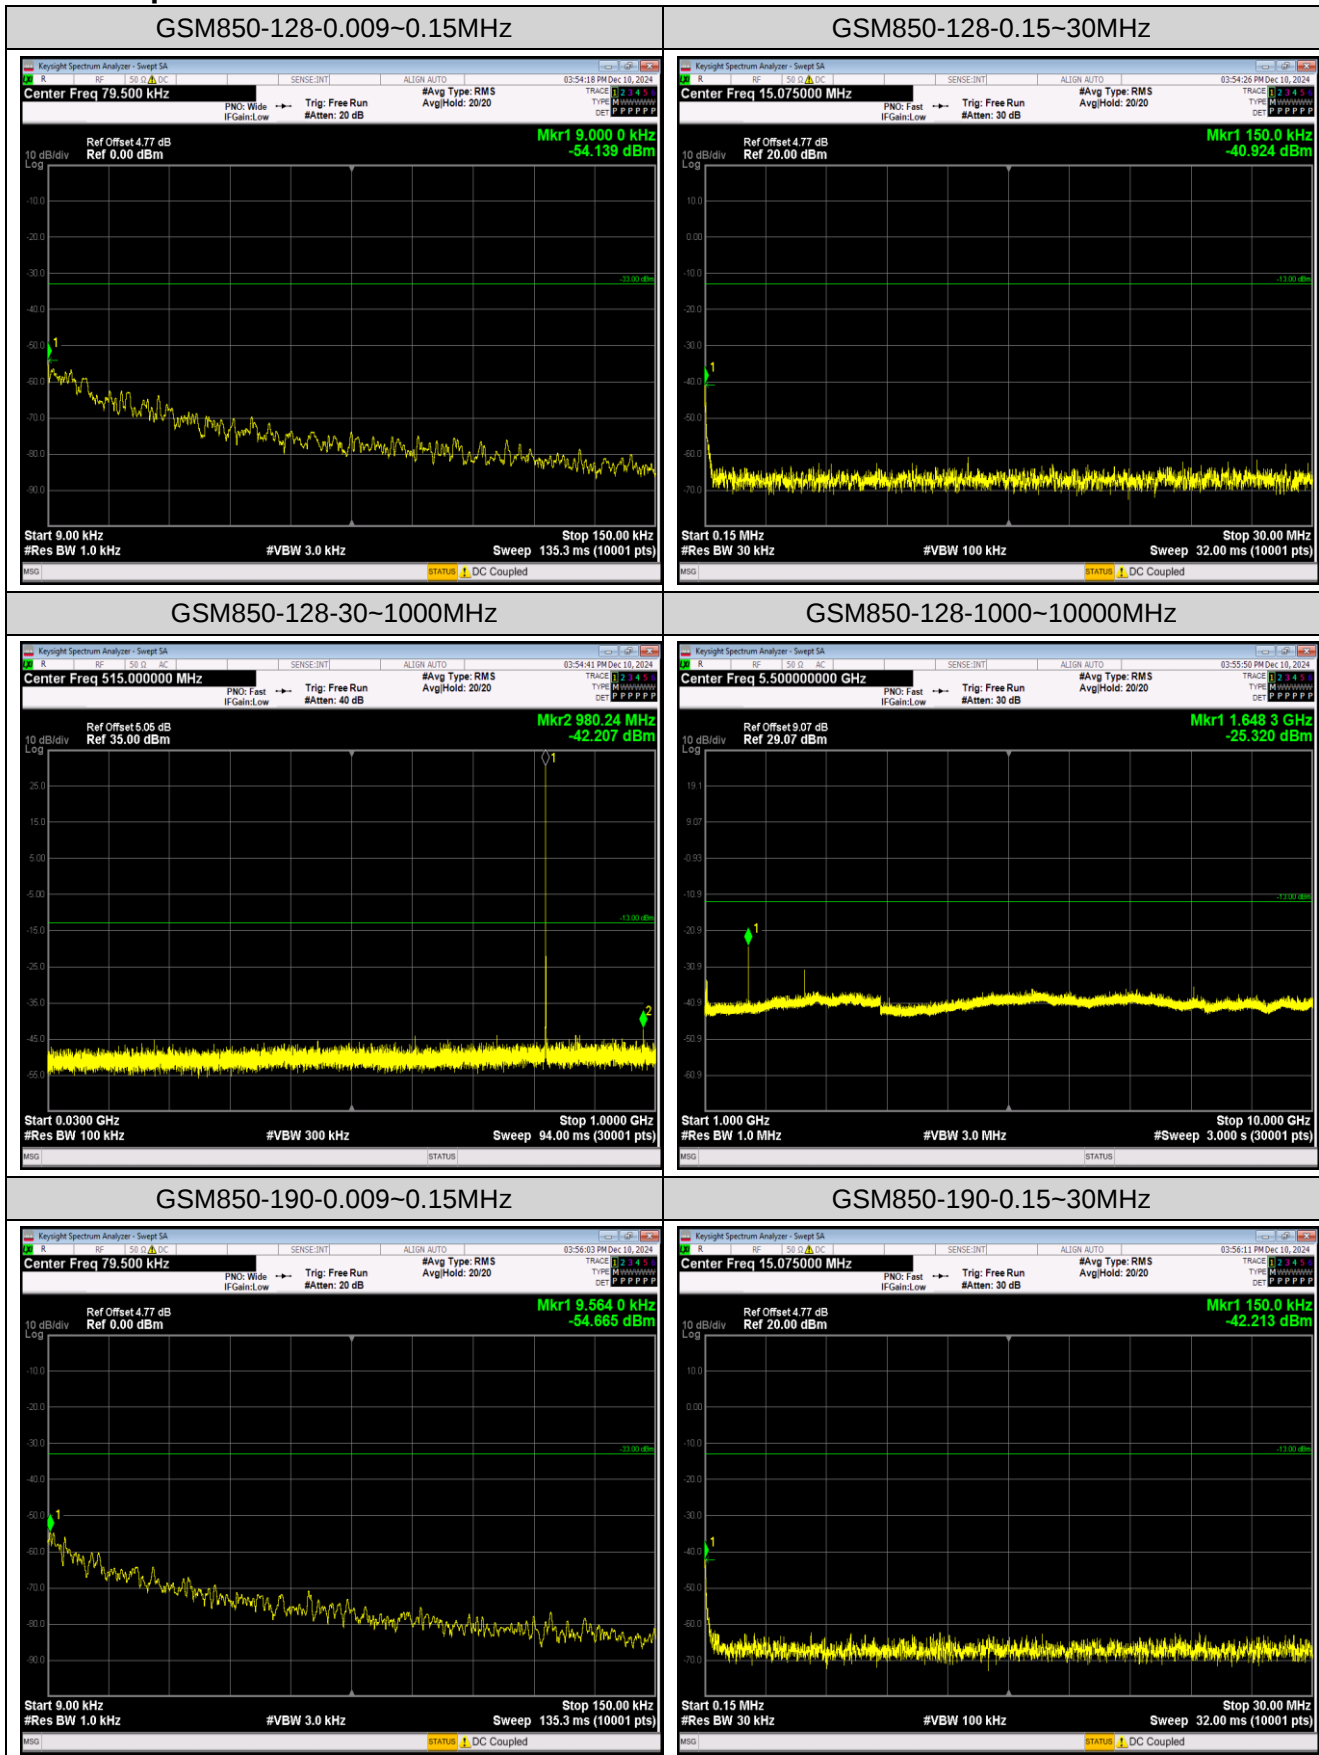



JianYan Testing Group Shenzhen Co., Ltd.


No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: JYTSZR2412030

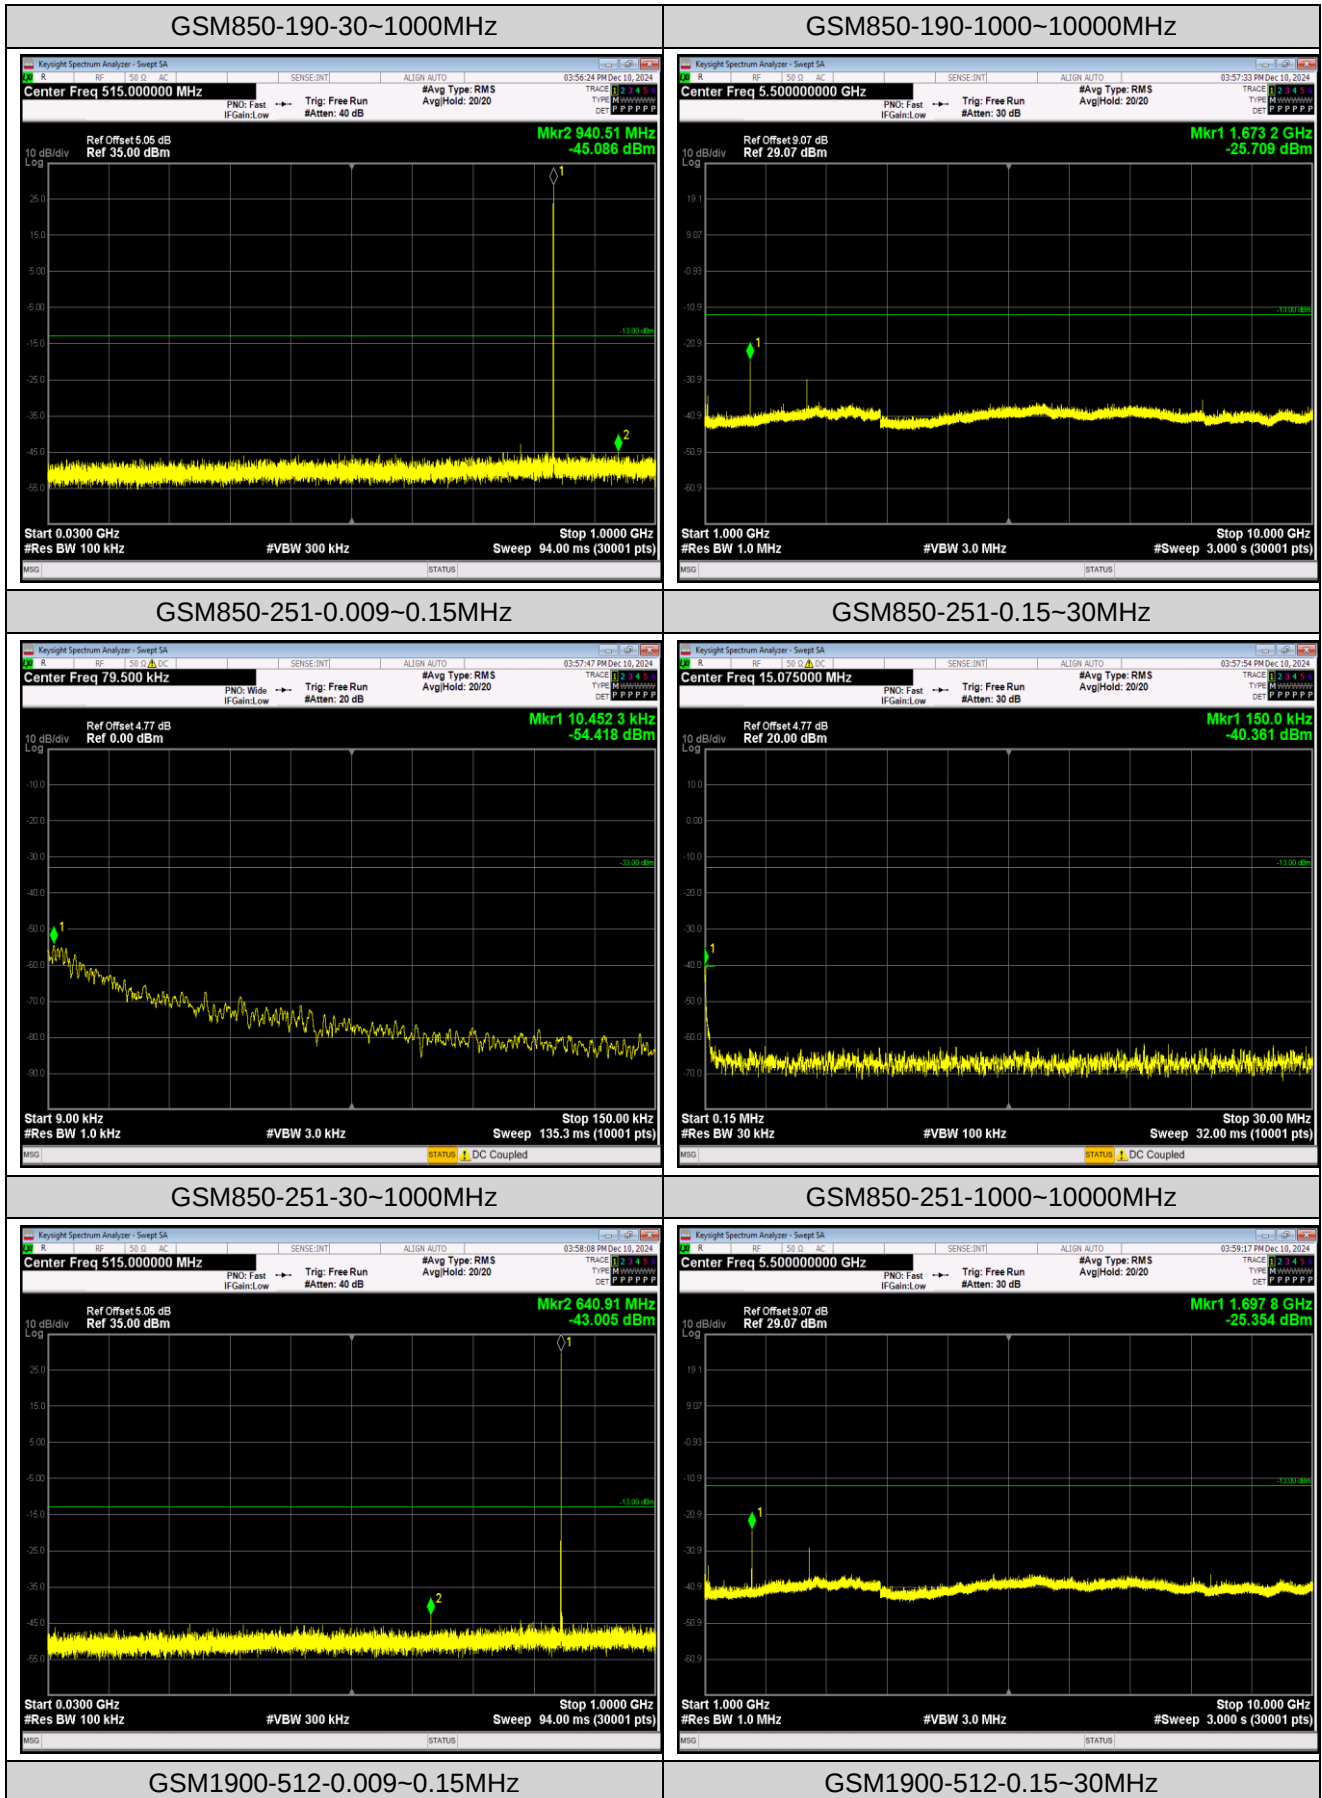

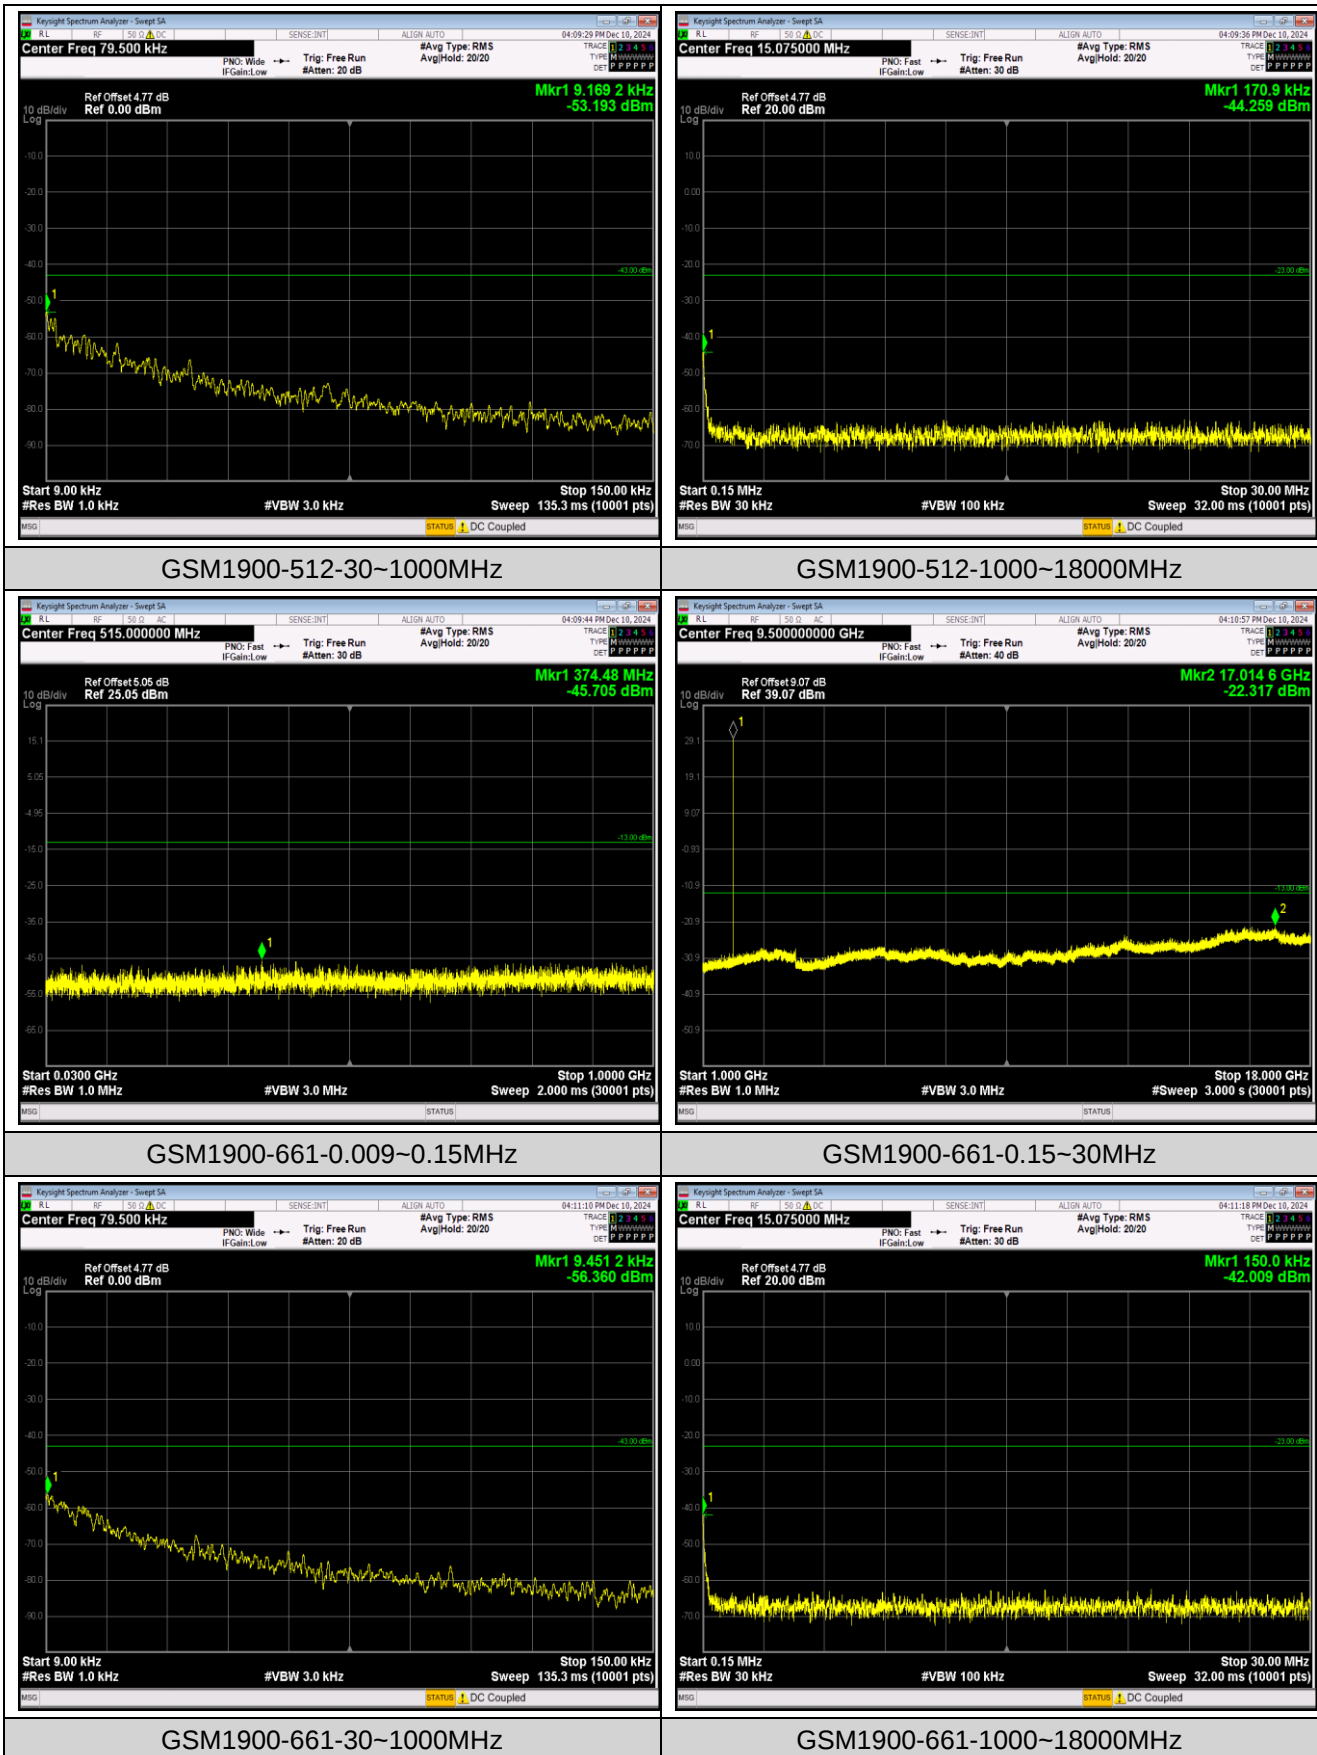

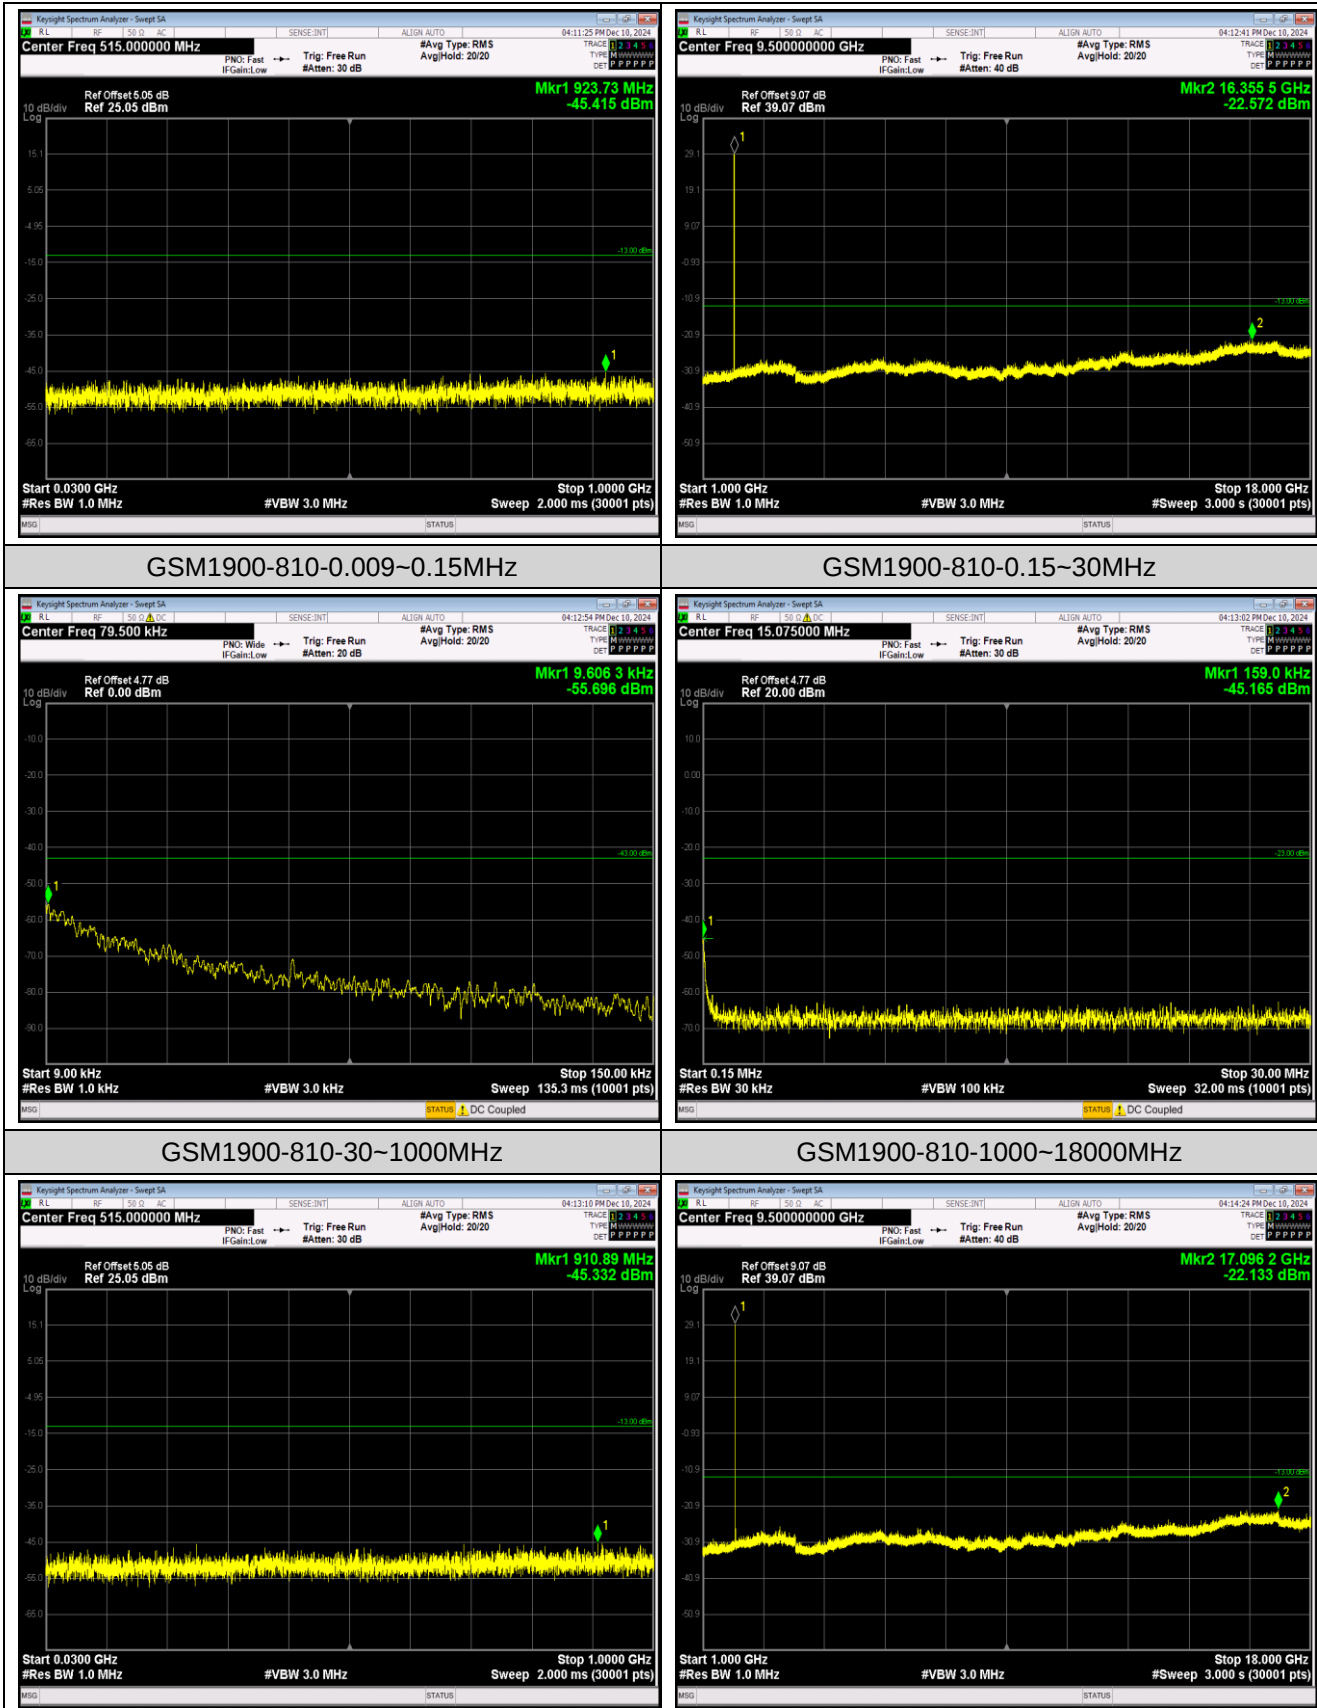

Appendix F: Frequency Stability

Test Result

Reference Frequency: GSM850 Middle channel=190 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	3.29	0.003933	±2.5	Pass
	-20	-1.84	-0.002199		
	-10	-0.29	-0.000347		
	0	1.97	0.002355		
	10	-12.40	-0.014822		
	20	-4.81	-0.005749		
	30	-7.07	-0.008451		
	40	-2.94	-0.003514		
	50	-0.06	-0.000072		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.50	3.39	0.004052	±2.5	Pass
	3.70	2.00	0.002391		
	4.20	-1.81	-0.002164		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: PCS1900 Middle channel=661 Frequency=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	12.01	0.006388	Within authorized band for PCS 1900	Pass
	-20	3.91	0.002080		
	-10	9.94	0.005287		
	0	6.49	0.003452		
	10	-2.65	-0.001410		
	20	0.36	0.000191		
	30	3.65	0.001941		
	40	8.07	0.004293		
	50	5.84	0.003106		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.50	-6.75	-0.003590	Within authorized band for PCS 1900	Pass
	3.70	2.81	0.001495		
	4.20	7.39	0.003931		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Appendix G: Modulation Characteristics

Test Result

Band	Channel	Result	Verdict
GSM850	190	PASS	PASS
GSM1900	661	PASS	PASS

Remark: All channel had been tested, but only the worst case data displayed in this report.

Test Graphs

