Freq Offset 0 Hz

Scale Type

Log

Span 30.00 MHz Sweep 1.066 ms (1000 pts)





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11n20\_ANT1\_5320\_MCS0\_PSD

#VBW 3.0 MHz\*

Center 5.32000 GHz #Res BW 1.0 MHz

**CF Step** 6.000000 MHz

Freq Offset 0 Hz

Scale Type


Mar

<u>Auto</u>

Log

Span 60.00 MHz Sweep 1.066 ms (1000 pts)



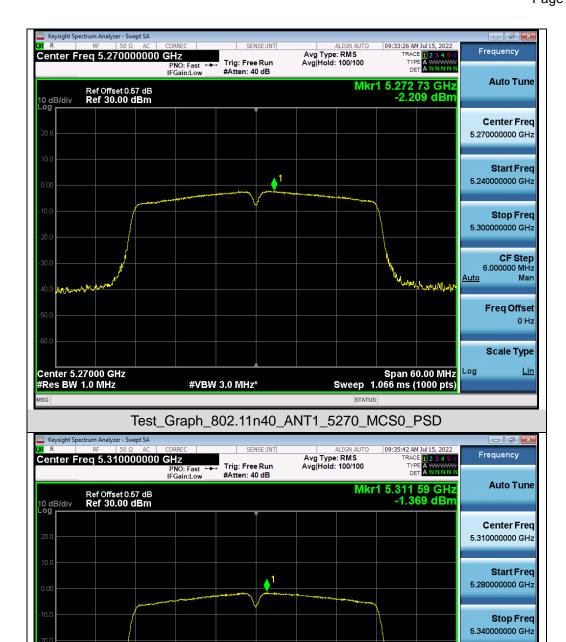

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11n40\_ANT1\_5310\_MCS0\_PSD

#VBW 3.0 MHz\*

Center 5.31000 GHz #Res BW 1.0 MHz

Scale Type

Log

Span 30.00 MHz Sweep 1.066 ms (1000 pts)





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11ac20\_ANT1\_5300\_MCS0\_PSD

#VBW 3.0 MHz\*

Center 5.30000 GHz #Res BW 1.0 MHz

Scale Type

Log

Span 60.00 MHz Sweep 1.066 ms (1000 pts)






Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11ac40\_ANT1\_5270\_MCS9\_PSD

#VBW 3.0 MHz\*

Center 5.27000 GHz #Res BW 1.0 MHz



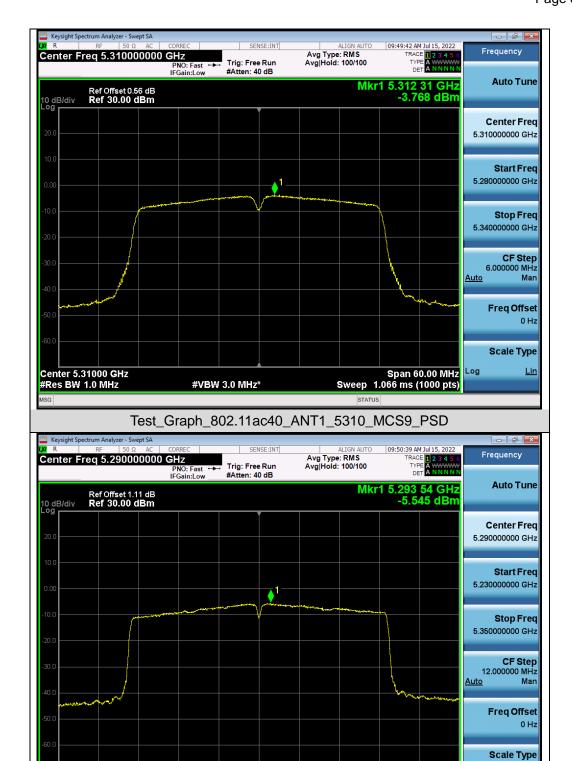

Test\_Graph\_802.11ac80\_ANT1\_5290\_MCS9\_PSD

#VBW 3.0 MHz\*


Span 120.0 MHz Sweep 1.066 ms (1000 pts)

Log

Center 5.29000 GHz #Res BW 1.0 MHz



#### Test Graphs of Conducted Output Power Spectral Density for band 5.725-5.85 GHz

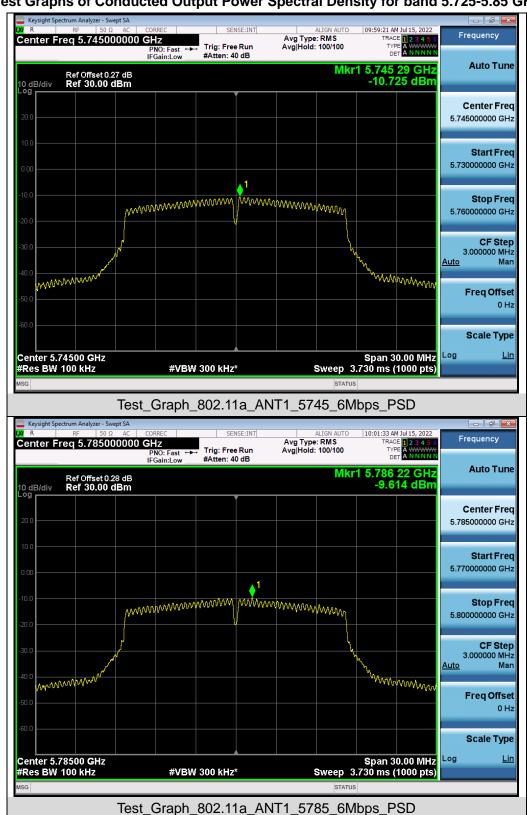

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Freq Offset 0 Hz

Scale Type

Log

Span 30.00 MHz Sweep 3.730 ms (1000 pts)



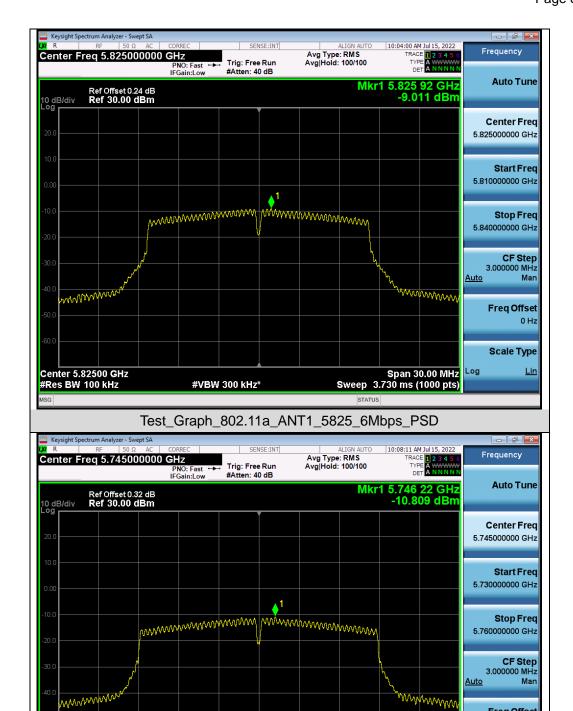

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11n20\_ANT1\_5745\_MCS0\_PSD

#VBW 300 kHz\*

Center 5.74500 GHz #Res BW 100 kHz

5.810000000 GHz

Stop Freq 5.840000000 GHz

> CF Step 3.000000 MHz

Mar

<u>Auto</u>





WWWWWW

MANAMANAMANA

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

<sub>1</sub> አለሌላ

**CF Step** 6.000000 MHz

Freq Offset 0 Hz

Scale Type


Mar

<u>Auto</u>

Log

Span 60.00 MHz Sweep 7.459 ms (1000 pts)



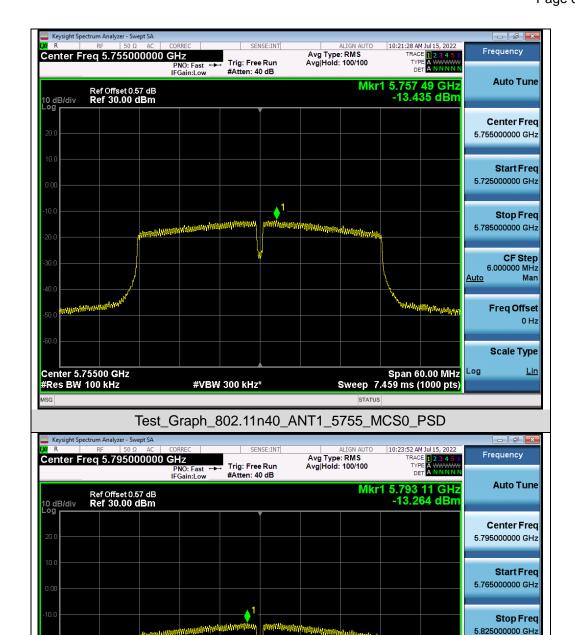

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11n40\_ANT1\_5795\_MCS0\_PSD

#VBW 300 kHz\*

Center 5.79500 GHz #Res BW 100 kHz

Web: http://www.agccert.com/





5.785000000 GHz Start Fred 5.770000000 GHz Stop Freq 5.800000000 GHz **CF Step** 3.000000 MHz <u>Auto</u> Mar wwwwww WWWW Freq Offset Scale Type Center 5.78500 GHz #Res BW 100 kHz Span 30.00 MHz Sweep 3.730 ms (1000 pts) Log #VBW 300 kHz\* Test\_Graph\_802.11ac20\_ANT1\_5785\_MCS0\_PSD

<u>Auto</u>


Log

Span 60.00 MHz Sweep 7.459 ms (1000 pts) Mar

Freq Offset

Scale Type



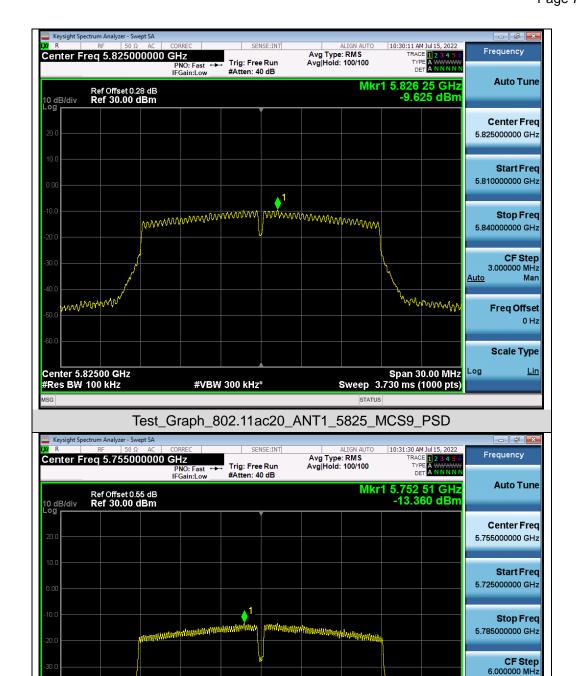

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11ac40\_ANT1\_5755\_MCS9\_PSD

#VBW 300 kHz\*


Center 5.75500 GHz #Res BW 100 kHz

Scale Type

Log

Span 120.0 MHz Sweep 14.85 ms (1000 pts)



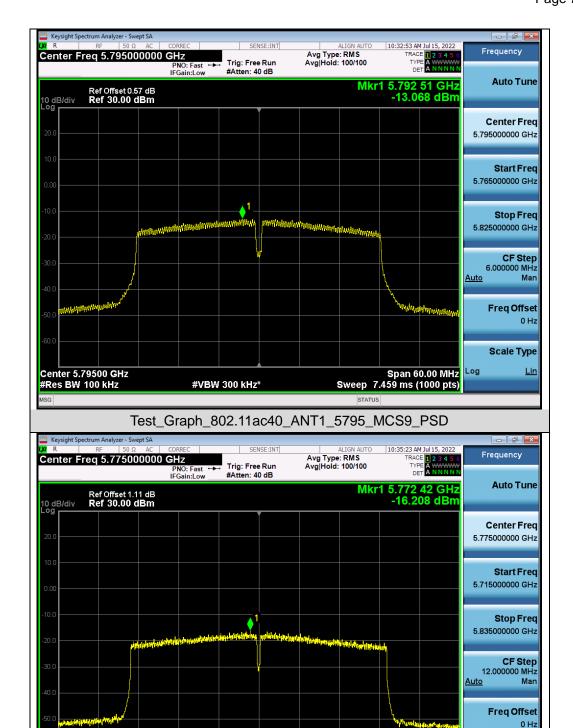

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11ac80\_ANT1\_5775\_MCS9\_PSD

#VBW 300 kHz\*

Center 5.77500 GHz #Res BW 100 kHz



Report No.: AGC01689220609FE06

Page 72 of 134

#### 10. CONDUCTED SPURIOUS EMISSION

#### 10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

### 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

#### 10.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

#### 10.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test channel	Criteri
-27dBm/MHz	5150MHz-5250MH z	PASS
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge		PASS
increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or		
below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		

Note: All the 20MHz bandwidth modulation had been tested, the 802.11a20 was the worst case and record in his test report. All the 40MHz bandwidth modulation had been tested, the 802.11N40 was the worst case and record in his test report. All the 80MHz bandwidth modulation had been tested, the 802.11AC80 was the worst case and record in his test report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




## Test Graphs of Spurious Emissions outside of the 5.15-5.35 GHz band for transmitters operating in the 5.15-5.25 GHz band

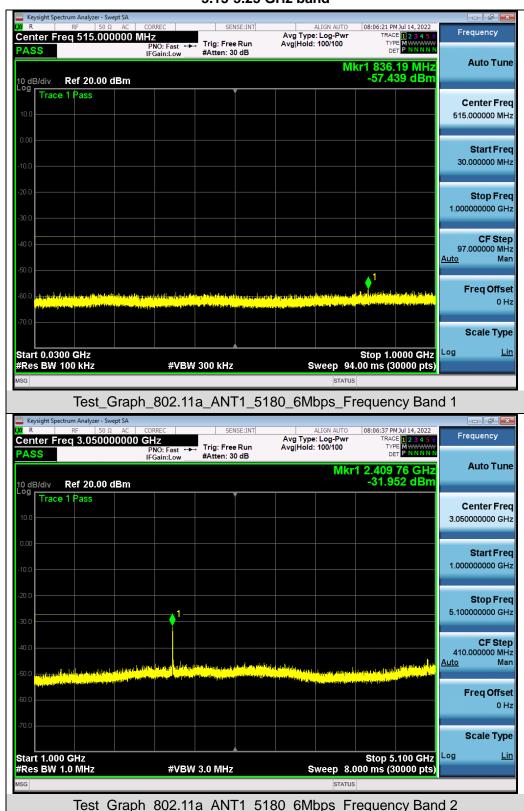


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




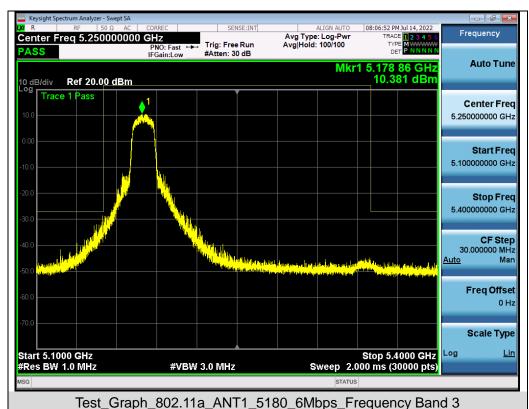


Center Freq 16.200000000 GHz
PASS
PASS 08:07:14 PM Jul 14, 2022 Frequency Avg Type: Log-Pwi Avg|Hold: 100/100 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 25.657 2 GHz -36.606 dBm 10 dB/div Ref 20.00 dBm Trace 1 Pass Center Freq 16.200000000 GHz Start Fred 5.400000000 GHz 27.000000000 GHz **CF Step** 2.160000000 GHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Start 5.40 GHz #Res BW 1.0 MHz Stop 27.00 GHz Sweep 56.00 ms (30000 pts) Log #VBW 3.0 MHz Test\_Graph\_802.11a\_ANT1\_5180\_6Mbps\_Frequency Band 4



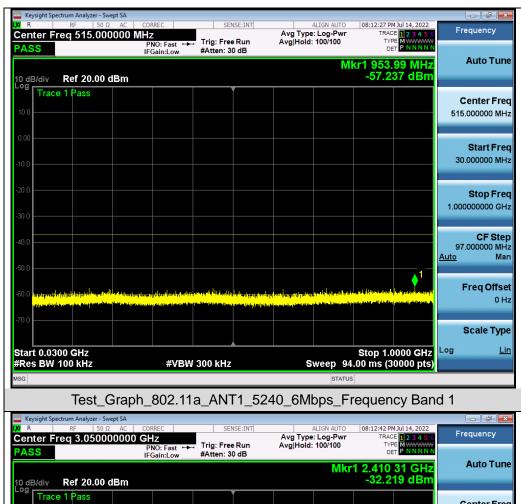

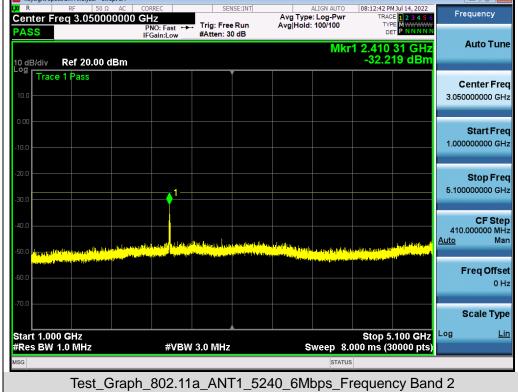





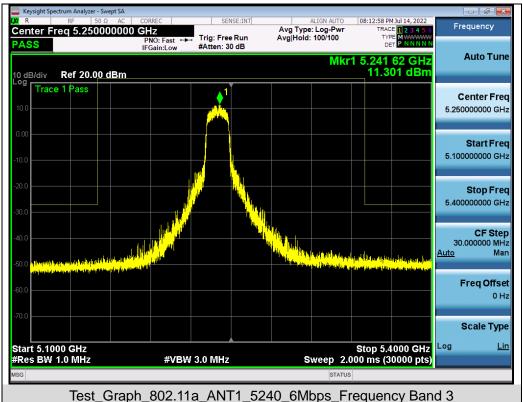






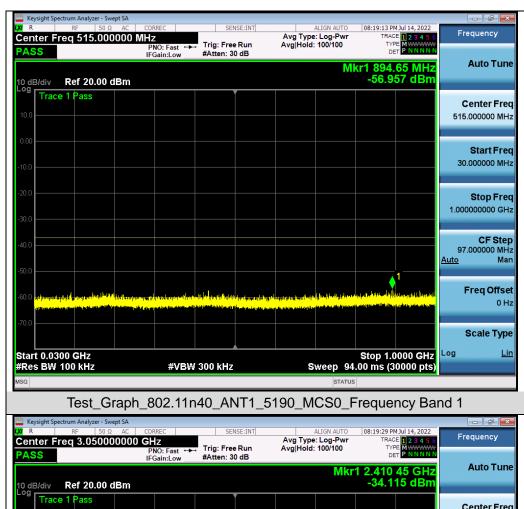

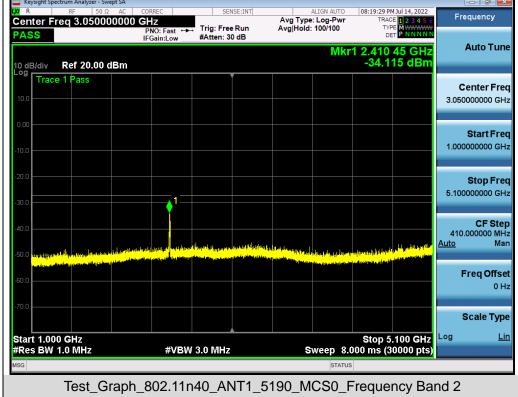





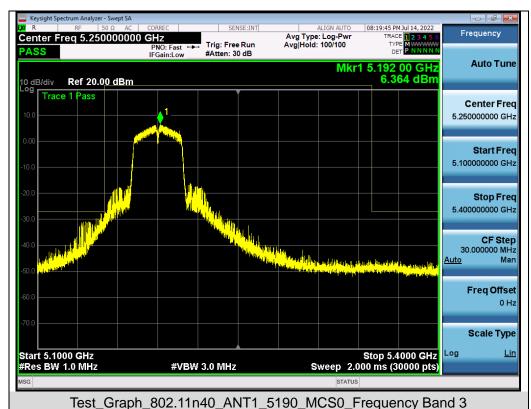






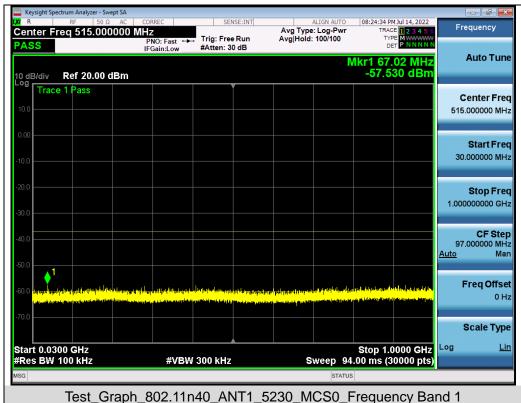

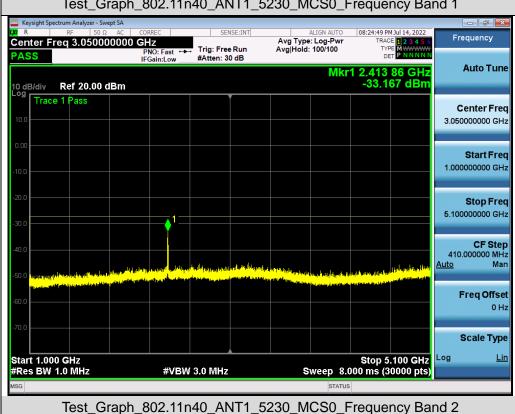





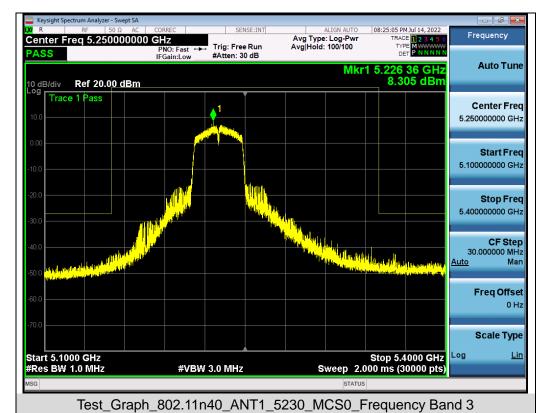






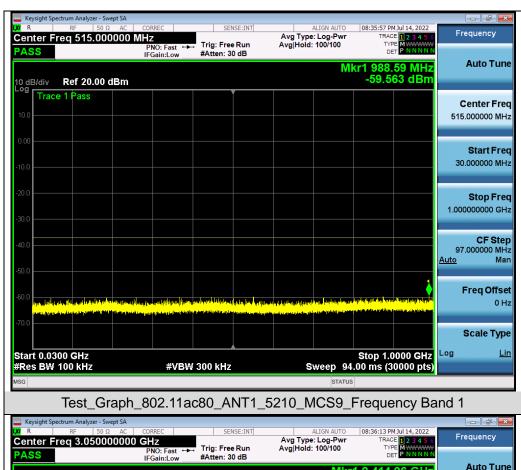

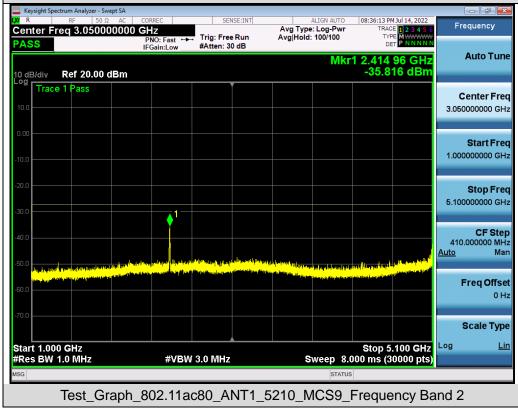




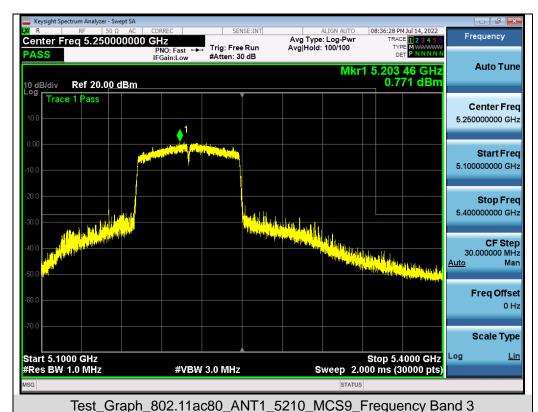

Center Freq 16.200000000 GHz
PASS
PASS
PASS
PASS 08:36:49 PM Jul 14, 2022 Frequency Avg Type: Log-Pwi Avg|Hold: 100/100 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 25.040 8 GHz -38.176 dBm 10 dB/div Ref 20.00 dBm Trace 1 Pass Center Freq 16.200000000 GHz Start Fred 5.400000000 GHz 27.000000000 GHz **CF Step** 2.160000000 GHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Start 5.40 GHz #Res BW 1.0 MHz Stop 27.00 GHz Sweep 56.00 ms (30000 pts) Log #VBW 3.0 MHz Test\_Graph\_802.11ac80\_ANT1\_5210\_MCS9\_Frequency Band 4




# Test Graphs of Spurious Emissions outside of the 5.25-5.35 GHz band for transmitters operating in the 5.25-5.35 GHz band

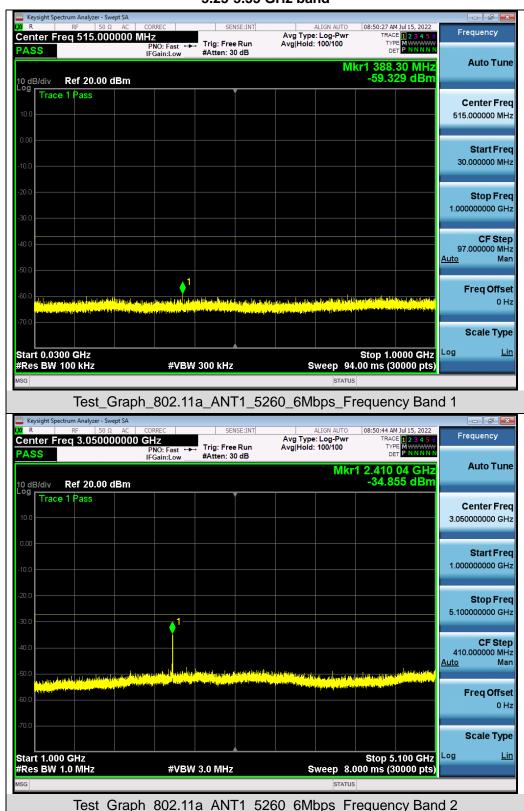

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



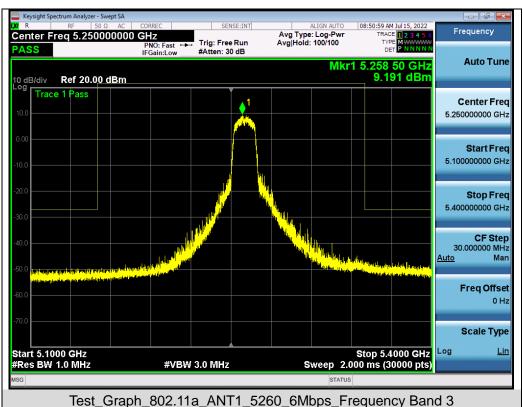









| 10 dB/div | Ref 20.00 dBm | -31.739 dBm | | Center Freq | 3.050000000 GHz | | Start Freq | 1.00000000 GHz | | Stop Freq | 1.00000000 GHz | | Stop Freq | 5.100000000 GHz | | Stop Freq | 5.100000000 GHz | | Stop Freq | 5.100000000 GHz | | Stop Freq | Stop Grey | Stop Gr




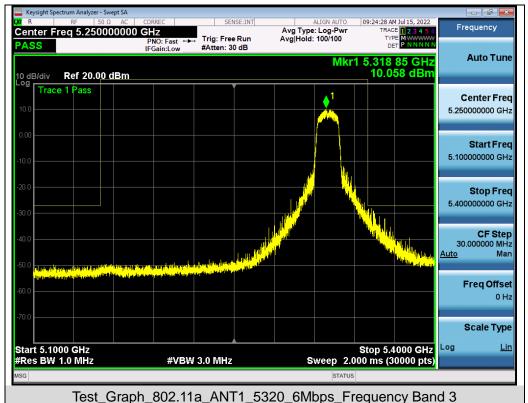






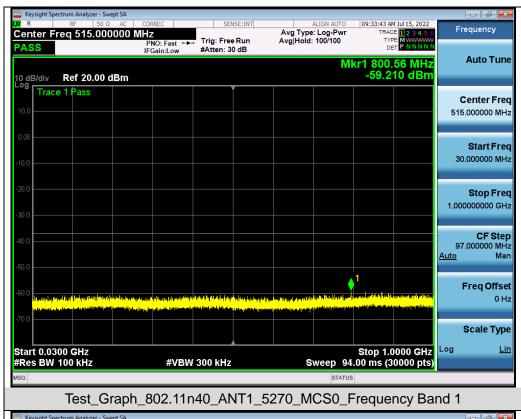

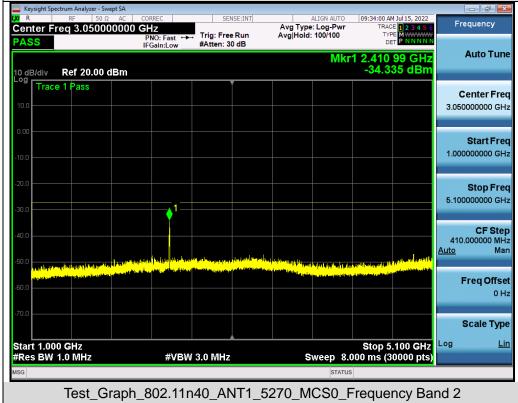



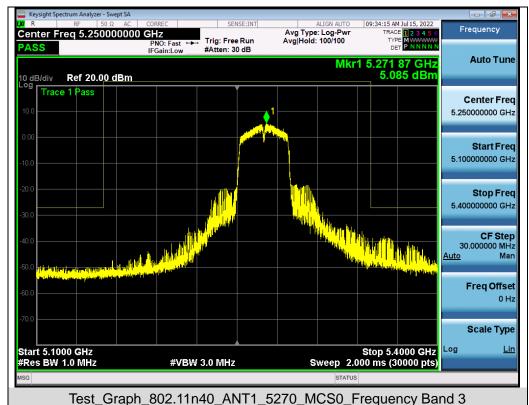



1.000000000 GHz

5.100000000 GHz

**CF Step** 410.000000 MHz

Freq Offset 0 Hz

Scale Type


Mar

<u>Auto</u>

Log

Stop 5.100 GHz Sweep 8.000 ms (30000 pts)



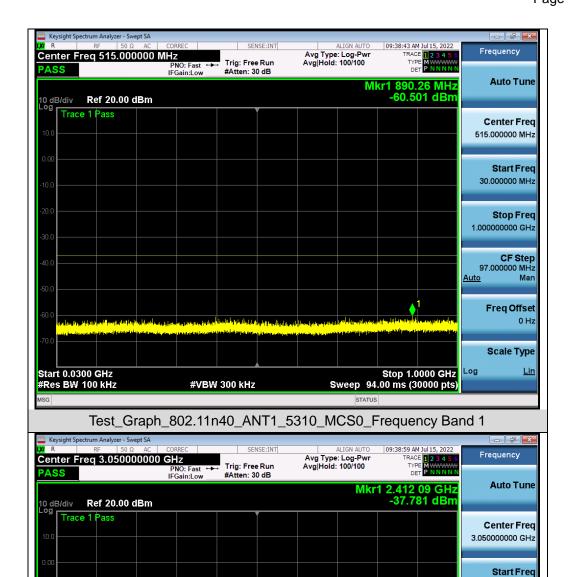


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11n40\_ANT1\_5310\_MCS0\_Frequency Band 2

#VBW 3.0 MHz


Start 1.000 GHz #Res BW 1.0 MHz




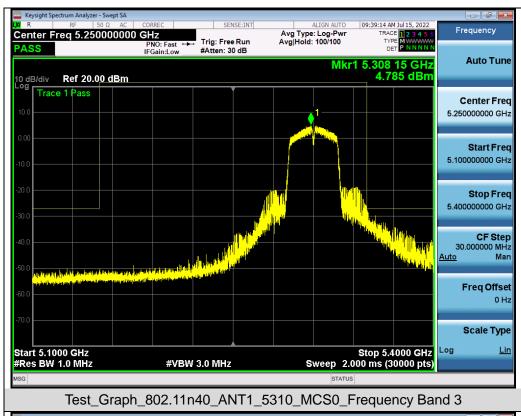





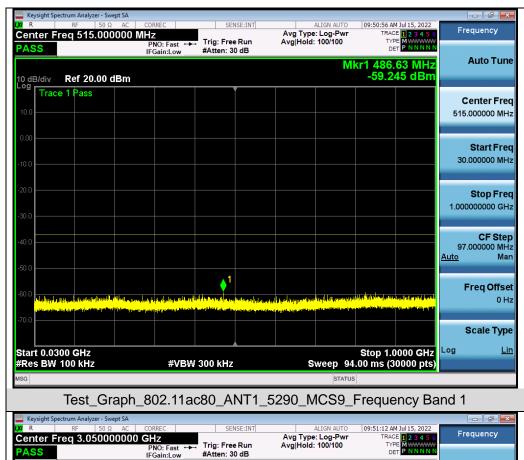

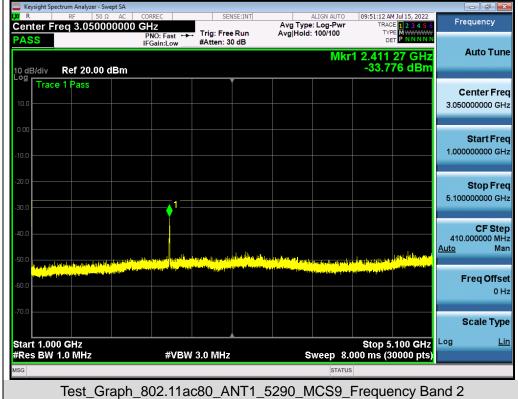











### Test Graphs of Spurious Emissions outside of the 5.725-5.85 GHz band for transmitters operating in the 5.725-5.85 GHz band

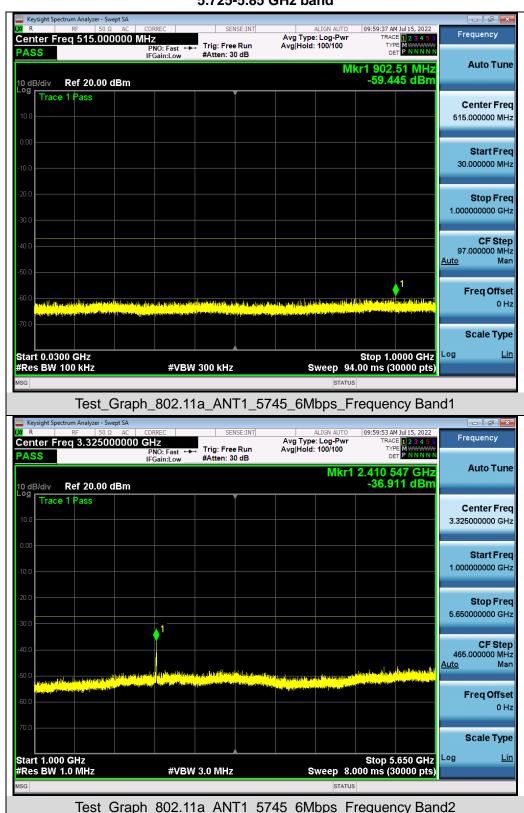


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



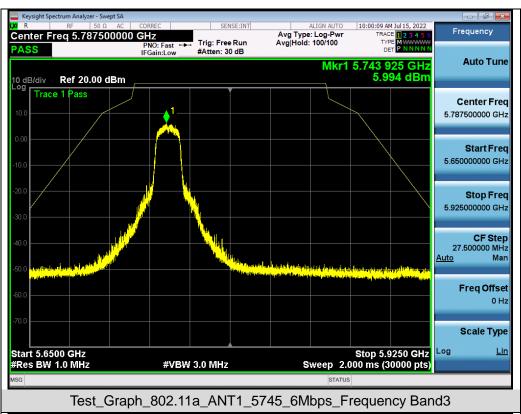






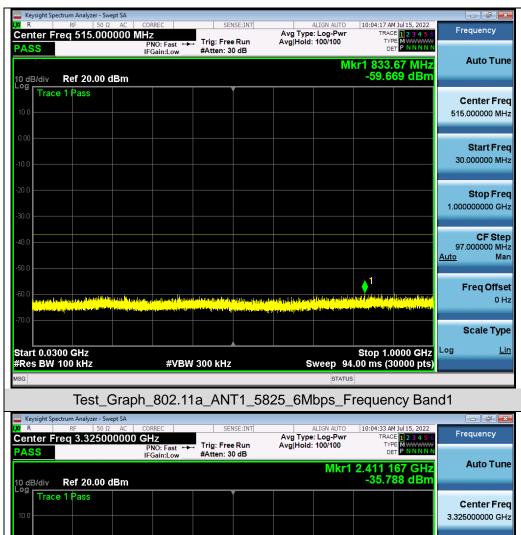




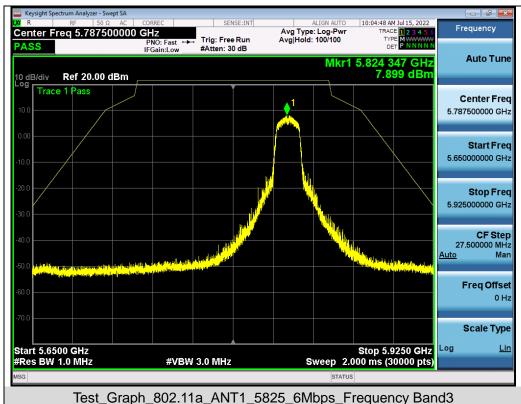






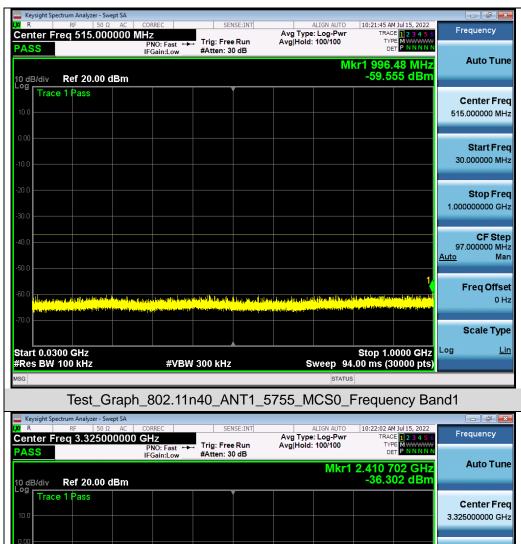





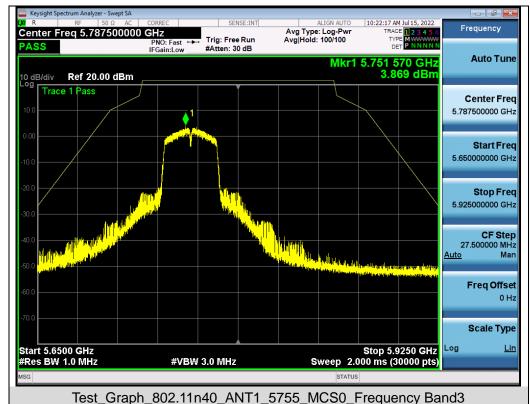






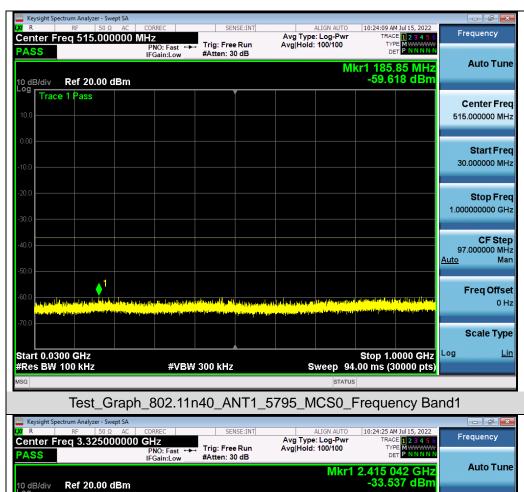

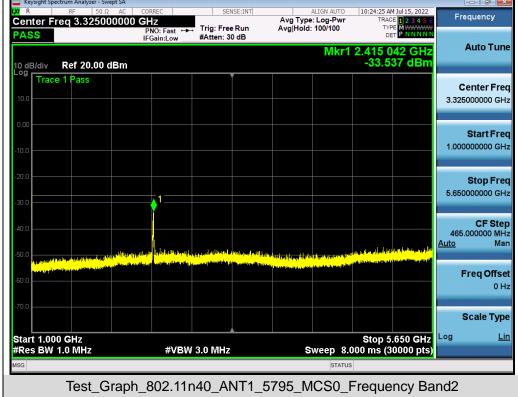





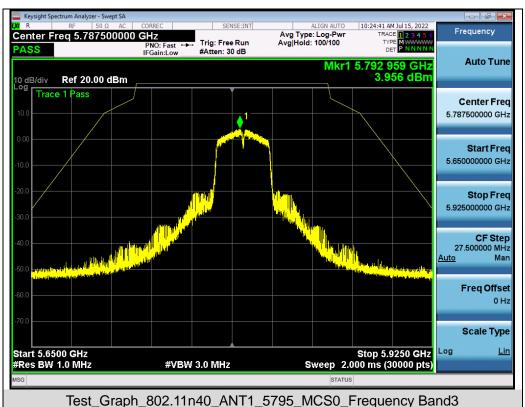






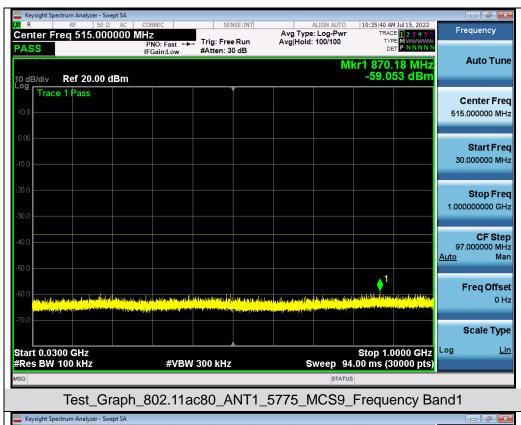

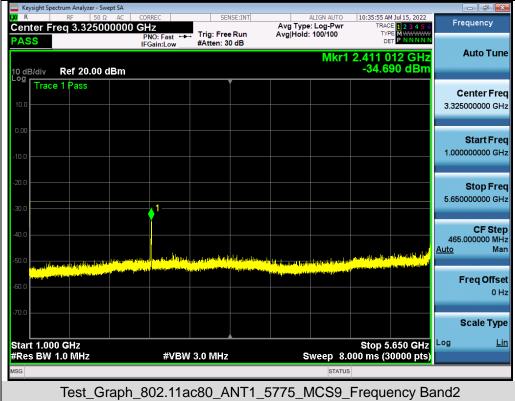



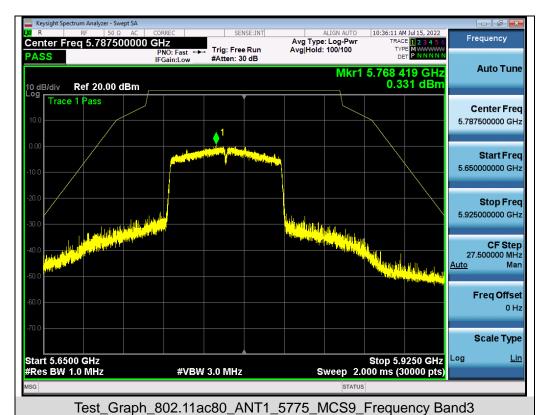

Center Freq 16.462500000 GHz
PASS
PASS 10:36:33 AM Jul 15, 2022 Frequency Avg Type: Log-Pwr Avg|Hold: 100/100 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 24.402 1 GHz -38.581 dBm 10 dB/div Ref 20.00 dBm Trace 1 Pass Center Freq 16.462500000 GHz Start Fred 5.925000000 GHz Stop Freq 27.000000000 GHz **CF Step** 2.107500000 GHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Start 5.93 GHz #Res BW 1.0 MHz Stop 27.00 GHz Sweep 54.00 ms (30000 pts) Log #VBW 3.0 MHz Test\_Graph\_802.11ac80\_ANT1\_5775\_MCS9\_Frequency Band4



Page 103 of 134

#### 11. RADIATED EMISSION


#### 11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3M VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




#### 11.2. TEST SETUP


### Radiated Emission Test-Setup Frequency Below 30MHz

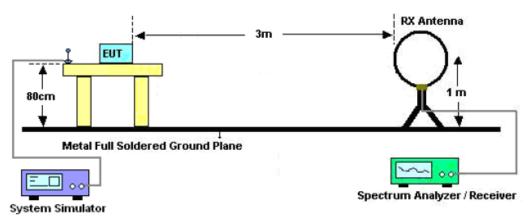

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

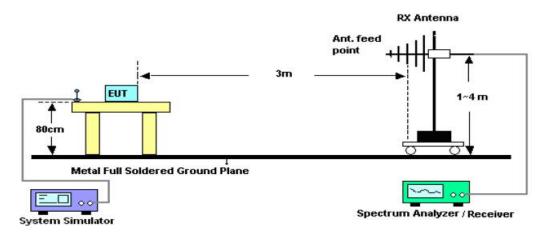

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

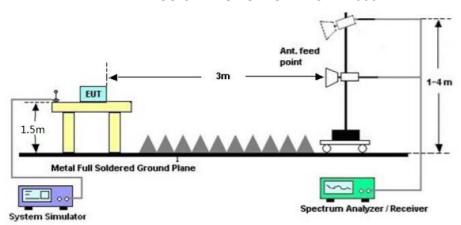

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 105 of 134

### 11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission.

the test records reported below are the worst result compared to other modes.

### 11.4. TEST RESULT


#### Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



### Radiated emission from 30MHz to 1000MHz

EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

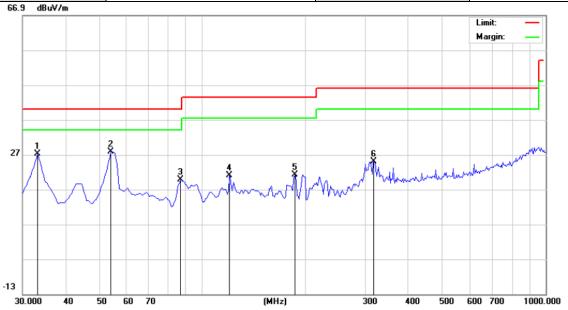


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∨	dB	dBuV/m	dBuV/m	dB	Detector
1		33.2333	14.90	12.27	27.17	40.00	-12.83	peak
2	*	54.2500	12.93	14.90	27.83	40.00	-12.17	peak
3		86.5833	5.58	14.28	19.86	40.00	-20.14	peak
4		120.5333	3.14	17.96	21.10	43.50	-22.40	peak
5		186.8167	8.12	13.03	21.15	43.50	-22.35	peak
6	,	317.7667	4.61	20.48	25.09	46.00	-20.91	peak

**RESULT: PASS** 



EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

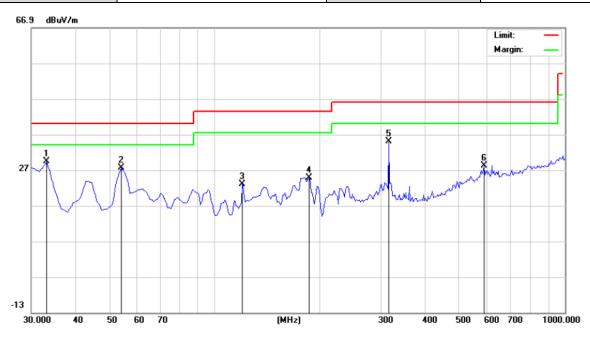

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	33.2332	17.06	12.27	29.33	40.00	-10.67	peak
2		54.2500	12.83	14.86	27.69	40.00	-12.31	peak
3	•	120.5332	4.94	17.98	22.92	43.50	-20.58	peak
4	•	186.8166	9.10	15.74	24.84	43.50	-18.66	peak
5	;	314.5332	15.59	19.40	34.99	46.00	-11.01	peak
6	ţ	587.7500	3.62	24.59	28.21	46.00	-17.79	peak

**Note:** All test channels had been tested. The 802.11a20 at 5180MHz is the worst case and recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.



Page 108 of 134

### Radiated emission above 1GHz


EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal/Vertical

#### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10360.000	46.85	9.14	55.99	68.20	-12.21	peak	
15540.000	40.55	10.22	50.77	74.00	-23.23	peak	
15540.000	32.89	10.22	43.11	54.00	-10.89	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

## RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
10360.000	46.18	9.14	55.32	68.20	-12.88	peak		
15540.000	42.12	10.22	52.34	74.00	-21.66	peak		
15540.000	31.60	10.22	41.82	54.00	-12.18	AVG		
Remark:	Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								





EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5200MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10400.042	47.63	9.14	56.77	68.20	-11.43	peak	
15600.000	41.85	10.22	52.07	74.00	-21.93	peak	
15600.000	33.58	10.22	43.80	54.00	-10.20	AVG	
Remark:	Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

## RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
10400.042	43.29	9.14	52.43	68.20	-15.77	peak		
15600.000	43.25	10.22	53.47	74.00	-20.53	peak		
15600.000	32.66	10.22	42.88	54.00	-11.12	AVG		
Remark:	Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								



Page 110 of 134


EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5240MHz	Antenna	Horizontal/Vertical

## RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10400.042	48.85	9.14	57.99	68.20	-10.21	peak			
15600.000	42.33	10.22	52.55	74.00	-21.45	peak			
15600.000	34.51	10.22	44.73	54.00	-9.27	AVG			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

## RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10400.042	47.28	9.14	56.42	68.20	-11.78	peak
15600.000	41.96	10.22	52.18	74.00	-21.82	peak
15600.000	32.74	10.22	42.96	54.00	-11.04	AVG
Remark:			•		-	•
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						






EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5260MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10520.000	47.85	9.14	56.99	68.20	-11.21	peak	
15780.000	38.59	10.22	48.81	74.00	-25.19	peak	
15780.000	31.18	10.22	41.40	54.00	-12.60	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

## RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10520.000	46.84	9.14	55.98	68.20	-12.22	peak	
15780.000	37.51	10.22	47.73	74.00	-26.27	peak	
15780.000	31.26	10.22	41.48	54.00	-12.52	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							





EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5300MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10600.000	45.58	9.14	54.72	74.00	-19.28	peak			
10600.000	31.89	9.14	41.03	54.00	-12.97	AVG			
15900.000	48.51	10.22	58.73	74.00	-15.27	peak			
15900.000	31.27	10.22	41.49	54.00	-12.51	AVG			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

# RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10600.000	46.31	9.14	55.45	74.00	-18.55	peak	
10600.000	30.22	9.14	39.36	54.00	-14.64	AVG	
15900.000	49.14	10.22	59.36	74.00	-14.64	peak	
15900.000	30.79	10.22	41.01	54.00	-12.99	AVG	
Remark:						1	
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 113 of 134

EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Horizontal/Vertical

## RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10640.000	46.25	9.14	55.39	74.00	-18.61	peak			
10640.000	32.17	9.14	41.31	54.00	-12.69	AVG			
15900.000	49.29	10.22	59.51	74.00	-14.49	peak			
15900.000	30.88	10.22	41.10	54.00	-12.90	AVG			
Remark:	_								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									
		_							

## RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10640.000	48.31	9.14	57.45	74.00	-16.55	peak
10640.000	33.96	9.14	43.10	54.00	-10.90	AVG
15900.000	48.74	10.22	58.96	74.00	-15.04	peak
15900.000	32.17	10.22	42.39	54.00	-11.61	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Page 114 of 134


EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz	Antenna	Horizontal/Vertical

## RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11490.000	46.33	9.42	55.75	74.00	-18.25	peak
11490.000	31.22	9.42	40.64	54.00	-13.36	AVG
17235.000	41.19	10.51	51.70	68.20	-16.50	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11490.000	44.91	9.42	54.33	74.00	-19.67	peak
11490.000	30.87	9.42	40.29	54.00	-13.71	AVG
17235.000	40.75	10.51	51.26	68.20	-16.94	peak
Remark:	Remark:					
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						





EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5785MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11570.000	46.91	9.42	56.33	74.00	-17.67	peak
11570.000	36.58	9.42	46.00	54.00	-8.00	AVG
17355.000	42.11	10.51	52.62	68.20	-15.58	peak
Remark:	Remark:					
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

# RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11570.000	45.28	9.42	54.70	74.00	-19.30	peak
11570.000	35.11	9.42	44.53	54.00	-9.47	AVG
17355.000	40.85	10.51	51.36	68.20	-16.84	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						





EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5825MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.000	48.32	9.62	57.94	74.00	-16.06	peak
11650.000	32.96	9.62	42.58	54.00	-11.42	AVG
17475.000	40.59	10.75	51.34	68.20	-16.86	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

## RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.000	46.22	9.62	55.84	74.00	-18.16	peak
11650.000	35.28	9.62	44.90	54.00	-9.10	AVG
17475.000	41.28	10.75	52.03	68.20	-16.17	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
		_				

**Note:** All test channels had been tested. The 802.11a20 is the worst case and recorded in the test report.

Other frequencies radiation emission from 1GHz to 40GHz at least have 20dB margin and not recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.



# Test result for band edge emission at restricted bands-BAND 1

EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

# Test Graph for Peak Measurement



Test Graph for Average Measurement



**RESULT: PASS** 



EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	AI POS Terminal	Model Name	P8
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

