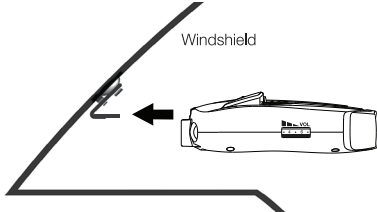



Mounting to the Windshield


- 1 Assemble Suction Cup Bracket


- 2 Adjust Suction Cup Bracket to ensure your RAD 380 has a level view of the road

- 3 Attach Suction Cup Bracket to Windshield


- 4 Attach RAD 380 to Suction Cup Bracket

- 5 Connect Detector to 12V Power Source

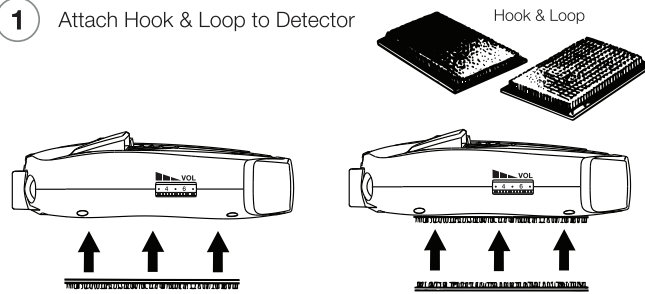
Mounting to the Dashboard

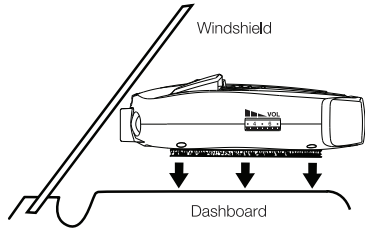- 1 Attach Hook & Loop to Detector


Hook & Loop
- 2 Attach Detector to Dashboard Surface


Windshield

Dashboard
- 3 Connect Detector to 12V Power Source


Cobra®
RAD 380

RADAR/LASER DETECTOR



QUICK START GUIDE

RAD 380 Features

THANK YOU!
For purchasing the new
COBRA® RAD 380





Full manual available at: www.cobra.com




FCC ID:BBORADD3. THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

FCC NOTE: Modifications not expressly approved by the manufacturer could void the user's FCC granted authority to operate the equipment.

Cobra® and the snake design are registered trademarks of Cobra Electronics Corporation, USA. Cobra Electronics Corporation™ is a trademark of Cobra Electronics Corporation, USA. Other trademarks and trade names are those of their respective owners.

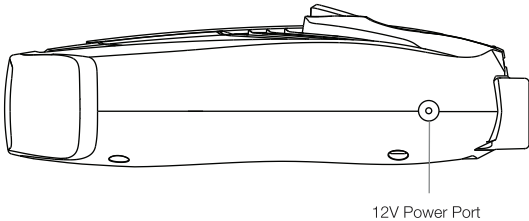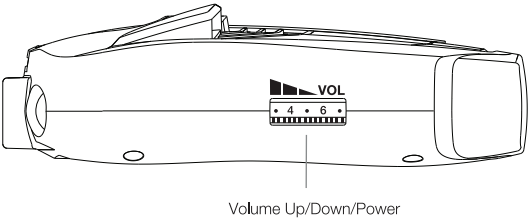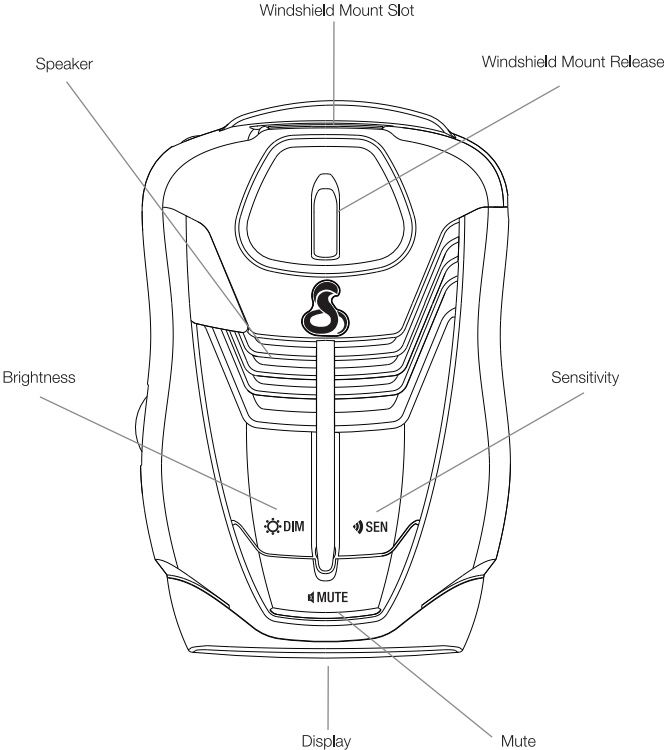

Windshield Suction Cup Bracket



12V Power Cord