

Test Report No.	BC400275-1c	Issue Date:	October 30, 2004
Model / Serial No.	MN: AC/DC RF Sound Module	(RF-SND) / SN: 10	08
Product Type	Safe 'N' Sound Wireless Voice	Module	
Client	Kidde Safety		
Manufacturer	Kidde Safety		
License holder	Kidde Safety		
Address	4980 Centennial Blvd		
	Colorado Springs, CO 80919		
Test Criteria Applied	FCC CFR47 Part 15.231		
Test Result	PASS	Title 47 CFR 15	
Test Project Number References Total Pages	BC400275-1	frequency range	EVICES operating in the of 40.66-40.70MHz and ncluding 15.205, 15.207, oplicable)
Including Appendices:	38		
Tortel Juckey	Ret	but Cremerel	e la

Reviewed By : Todd Seeley

Approved By : Bob Cresswell

INTERNATIONAL APPROVALS LABORATORIES (IAL) reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. IAL have no liability for any deductions, inferences or generalizations drawn by the client or others from IAL issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval of IAL. This report shall not be used by the client to claim product endorsement by NVLAP (No. 200624-0) or any agency of the US government.

International Approval Laboratories and its professional staff hold government and professional organization certifications and are members of IEEE, NVLAP, and VCCI.







Documentation	Page(s)
Test report	1 - 38
Directory	2
Test Regulations	3 - 4
General Remarks	5 - 6
Test-setup Photographs	7 - 12
Appendix A	
Test Data Sheets and Test Equipment Used	13 - 31
Appendix B	
Test Plan/Constructional Data Form	32 - 33
Appendix C	
Measurement Protocol/Test Procedures	34 - 38

### STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty for Conducted Emissions in the frequency range of 150kHz – 30MHz is calculated to be  $\pm 2.30$ dB and for Radiated Emissions is calculated to be  $\pm 3.60$ dB in the frequency range of 30MHz – 200MHz and  $\pm 3.38$ dB in the frequency range of 200MHz – 1000MHz.

EUT Received Date: 9-June-2004

Testing Start Date: 9-June-2004

Testing End Date: 29-October-2004

Rev No 1



The tests were performed according to following re	gulations:			
<ol> <li>FCC CFR47 Part 15.205</li> <li>FCC CFR47 Part 15.207</li> <li>FCC CFR47 Part 15.209</li> <li>FCC CFR47 Part 15.231</li> <li>ICES-003</li> </ol>				
Emission Test Results:				
Conducted Emissions, Powerline (15.207)	- PASS			
Test Re sult				
Minimum limit margin	<u>-7.2</u> dB	at _	1.37 MHz	
Maximum limit exceeding	dB	at _	MHz	
Remarks:				
Radiated Emissions (15.209) / 15.231(b)(3)	- PASS			
Test Result	- FA33			
Minimum limit margin	-5.3 dB	at	423.69 MHz	
Maximum limit exceeding	dB	at _	MHz	
Remarks:				
Radiated Emissions (15.205) / 15.231(b)(2)	- PASS			
Test Result	0.40			
Minimum limit margin	<u>-6.40</u> dB	_	303.15 MHz	
Maximum limit exceeding	dB	at _	MHz	
Remarks:				
Radiated Emissions 15.231(a)(1)&(2) -	PASS			
Test Result				
Remarks: Required measurement for manually and a activation, See General Remarks.	utomatic operated tra	nsmitter eq	uipment. <5 Sec.	after
Radiated Emissions 15.231(b)(1) - PAS	SS			
Test Result	~			
Minimum limit margin	-2.14 dB	at	434.37 MHz	
Maximum limit exceeding	dB	at –	MHz	
Remarks: Measurements were taken utilizing the met and for limiting peak emissions				emissions



	Devices operated within the free of the center frequency	uency band of 70 – 900	0MHz: <b>-20</b>	dBc Ba	ndwidth maximu	m of 0.25
	Devices operated within the free the center frequency	uency band of >900MH	lz: <b>-20dBc</b>	: Bandv	vidth maximum o	f 0.50% o
Radiated	Emissions 15.231(d) -	Not Applicable				
Test Result						
	Devices operated within the frec 0.01% of the center frequency a 115% of the nominal supply vol- device is powered from a batter	s measured through the age at 20 deg. C "a new	e temp ran	ge of -2	0 to +50 deg. C,	and at 85
	Emissions 15.231(e) -	Not Applicable				
Test Result						
Minimum lim	it margin	00.00	dB	at	0000.00 MHz	
Maximum lin	nit exceeding		dB	at	MHz	
	Measurements were taken utiliz and for limiting peak emissions	ng the methods dictate	d by Part	15.35 fo	r averaging pulse	ed emissio



### **GENERAL REMARKS:**

The following remarks are to be considered as "where applicable" and are taken into account while completing any FCC/IC/ETSI radio tests at International Approvals Laboratories, LLC.

Testing was performed in 3 different orthogonal axis to determine the worst case emissions from the device. The worst case emissions measurements are shown in this report.

FCC CFR47 Part 15.31: Measurement Standards: In any case where the device is powered off a battery, a fresh battery was used during test. In cases where the device is powered off an AC supply, voltage was varied per Part 15.31 to find worst case emissions.

FCC CFR47 Part 15.35: Measurement Detector Functions and Bandwidths: FCC Part 15.35 was utilized when performing the measurements within this report.

In any case where the device is powered off a battery, a fresh battery was used durring test. In cases where the device is powered off an AC supply, voltage was veried per Part 15.31 to find worst case emissions.

The actual test distance for the FCC Part 15.209 testing was conducted at 10m for the fact that the device was being tested to EN55022 Class B from 30 MHz to 1000 MHz (meets/exceeds the FCC Part 15.209 & 109B limits) The data is automatically extrapolated back to the FCC 3m limits and measurements are corrected to better show the compliance to FCC requirements and reduce confusion. A correction factor of 10.54dB is used in cases of 30MHz and up for a difference between 10m and 3m measurement distances. All measurements that are lesser than 30MHz where applicable are accompanied with the fall of measurements and calculations to support the interpolation.

The EUT requires a minimum of 10 seconds when manually activated to communicate with its host. In CFR47 part 15.231 (a), the EUT must stop transmitting within 5 seconds of manual or automatic activation. To meet both the requirements in 15.231 and the minimum time required for the EUT to communicate with its host, the manufacture has received approval from the FCC to start transmitting when manually activated, shut off within the required 5 seconds and then start again automatically for another period of less than 5 seconds. See plot on page 27.

The photos in the report reflect testing dates in June 2004. The actual testing data in this report was taken in October 2004.

Modifications required to pass:

The value of the power set resistors, R2 was changed from 24.9k to 47.5k to maximize output power.

Test Specification Deviations: NONE



Rule Part 11, 15	Other Rule	Description	Comments
& 18 Devices	Part Devices	Manu Contact	Can Daga 1 of this yan art
2.1033(b)(1)	2.1033(c)(1)	Manu. Contact	See Page 1 of this report
2.1033(b)(2)	2.1033(c)(2)	FCC Identifier	Attack and an Early's to
2.1033(b)(3)	2.1033(c)(3)	Users Manual to include Operating, installation	Attached as Exhibit
	2.1033(c)(4)	Emissions Designator per 2.	
	2.1033(c)(5)	Frequency Range	Not Applicable to Part 15 Devcies
	2.1033(c)(6)	Power range and controls	Not Applicable to Part 15 Devcies
	2.1033(c)(7)	Maximum power ouput rating	Not Applicable to Part 15 Devcies
	2.1033(c)(8)	DC Voltage and Current suplying final RF stages	Not Applicable to Part 15 Devcies
2.1033(b)(3)	2.1033(c)(9)	Tune –up procedure	Please refer to the users manual for applicability
2.1033(b)(4&5)	2.1033(c)(10)	Complete Circuit Diagrams and circuit operation description	Attached as Exhibit
2.1033(b)(7)	2.1033(c)(11)	Photographs/drawings of the identification label & its location on the device	Attached as Exhibit
2.1033(b)(7)	2.1033(c)(12)	Photographs of the external and internal surfaces, and construction	Attached as Exhibit
	2.1033(c)(13)	Digital Modulation	Not Applicable
2.1033(b)(6)	2.1033(c)(14)	Report of Measurement Data Required by 2.1046 – 2.1057	See Data Below (This report consists of the testing required under Part 15.231)
2.1033(b)(8)		Description of publicly available support equipment used during test	Refer to Exhibit B of this report (Client Test Plan)
2.1033(b)(9)		Statement of Autorization to Part 15.37 of CFR47	The equipment herein is being authorized in accordance to 15.37 of the CFR47 Rules.
2.1033(b)(10)		Direct Sequence Spread Spectrum Devices (DSSS)	Exhibit of compliance to 15.247(e)
2.1033(b)(10)		Frequency Hopping Devices	Exhibit of compliance to 15.247(a)(1)
2.1033(b)(11)		Scanning receiver construction	Exhibit stating compliance to construction in accordance to 15.121.
15.31	15.31	Transmitter Supply Voltage	Testing herein was completed in accordance to FCC CFR47 Part 15.31

### Required Information In Accordance to FCC CFR 47 Part 2.1033:

#### Exhibits Including (where applicable):

- 1. Users Manual
- 2. Operation Description
- 3. Block Diagram
- 4. Report of Measurement
- 5. External & Internal Photographs
- 6. Schematic

- 7. Parts List
- 8. / Tuning Procedure (if applicable)
- 9. Test Setup Photograph
- 10. Label Drawings and or Photograpghs
- 11. Description of Support Equipment (where Applicable)

### Required Information in Accordance to Industry Canada Regulations (In addition to the above):

Information Required	Description	Comments
Modulation Type	(i.e. ASK, NON, FSK, DSSS, FHSS, etc.)	
Emissions Designator	Per TRC-49	
In Country Representative	Contact Information	
99% Bandwidth Measurement	Per RSS-210	



### Test-setup photo(s): Conducted Emissions







International Approvals Laboratories, LLC Rev.No 1

5541 Central Avenue, Suite 110 Boulder, Colorado 80301 Project File: BC400275 Page 8 of 38 Voice: 303 786 7999 Fax: 303 449 6160



Test-setup photo(s): Radiated Intentional Emissions



5541 Central Avenue, Suite 110 Boulder, Colorado 80301 
 Project File: BC400275
 Page 9 of 38

 Voice: 303 786 7999
 Fax: 303 449 6160



Test-setup photo(s): Radiated Intentional Emissions




5541 Central Avenue, Suite 110 Boulder, Colorado 80301 
 Project File: BC400275
 Page 10 of 38

 Voice: 303 786 7999
 Fax: 303 449 6160



Test-setup photo(s): Radiated Unintentional Emissions

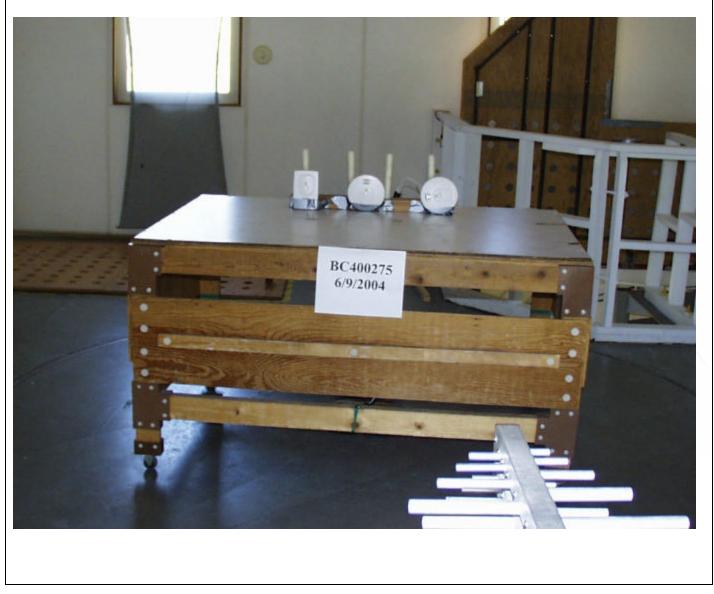



Test-setup photo(s): Radiated Unintentional Emissions





Appendix A

Test Data Sheets

and

Test Equipment Used

5541 Central Avenue, Suite 110 Boulder, Colorado 80301 
 Project File:
 BC400275
 Page 13 of 38

 Voice:
 303 786 7999
 Fax:
 303 449 6160



### Part 15.231 (b)(1) or (e) Field Strength Emissions from Intentional Radiators

&

Part 15.231 (b)(2) / 15.205 Restricted Bands of Operation

International Approvals Laboratories, LLC

Rev.No 1

5541 Central Avenue, Suite 110 Boulder, Colorado 80301 Voice: 3

Project File: BC400275 Page 14 of 38 Voice: 303 786 7999 Fax: 303 449 6160



## Field Strength Measurements Fundamental and Spurious of the Transmitter


Test Report #:	BC400275	Test Area:	Pinewood Site 1 (3m)	Temperature:	20.6	°C
Test Method:	FCC CFR47 Part 15.231/205	Test Date:	10-Oct-2004	Relative Humidity:	35	%
EUT Model #:	AC/DC RF Sound Module	EUT Power:	120 VAC / 60 Hz	Air Pressure:	80	kPa
EUT Serial #:	108			Page:		
Manufacturer:	Kidde Safety			Leve	el Key	
EUT Description:	RF remote sound module			Pk – Peak	Nb – Na	arrow Band
Notes:				Qp – QuasiPeak	Bb – B	road Band
				Av - Average		

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	Duty Cycle Correction	Final Corrected	Limit	DELTA
								(15)
(MHz)	(dBuV)	(dB) (dB\m) (dB)	(dBuV)	(m) (DEG)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
							15.231(b)-	
							15.205	
The followi	ng duty cycle	e was declared by the n	nanufacture	r.				
Duty Cycle	= active / 10	0ms. = 25%						
Averaging emissions		pulsed signals and c	alculation i	in accordance to FCC	CFR47 Part 15.3	35 utilized to calcu	late field stre	ngth
The testing calculated		n accordance to FCC C	FR47 Part	15.205 (restricted ban	ds of operation) ar	nd 15.231 emissions	s and delta lim	its were
Final Corre	cted Peak M	easurement – Duty Cy	cle Correctio	on Factor* = Final Calo	culated Emission			
The Final C	Calculated Er	nission was then comp	ared to the	Limits in CFR47 Part 1	5.205 and 15.231	and the emission/li	mit delta was o	calculated.
( ) ( ) ( ) ( ) ( ) ( ) ( ) ( ) ( ) ( )		ated as follows 20*log1						
		205 Respectively			/			
		3 orthogonal axis and p	loood in the	ward and avia for the	following manage	amanta		
434.37	72.4 Pk	2.2 / 16.0 / 0.0	90.7	V / 1.3 / 329.0	-12	78.7	<mark>80.84</mark>	<mark>-2.14</mark>
434.37 434.37	64.3 Pk	2.2 / 16.0 / 0.0	82.5	H / 1.3 / 329.0	-12	70.5	80.84 80.84	- <u>-2.14</u> -10.34
2nd - 10th		2.27 10.07 0.0	02.0	11/ 1.0/ 020.0		10.0	<mark>00.04</mark>	10.0 <del>1</del>
868.77	63.0 Pk	2.2 / 21.7 / 28.2	<mark>58.7</mark>	V / 1.2 / 344.0	<mark>-12</mark>	<mark>46.7</mark>	<mark>60.84</mark>	<mark>-14.14</mark>
<mark>868.77</mark>	60.7 Pk	<mark>2.2 / 21.7 / 28.2</mark>	<mark>56.4</mark>	H / 1.0 / 312.0	<mark>-12</mark>	<mark>44.4</mark>	<mark>60.84</mark>	<mark>-16.44</mark>
1303.14	64.3 Pk	2.6 / 26.2 / 37.4	<mark>55.7</mark>	V / 1.0 / 257.0	<mark>-12</mark>	<mark>43.7</mark>	<mark>54</mark>	<mark>-10.30</mark>
1303.15	68.2 Pk	2.6 / 26.2 / 37.4	<mark>59.6</mark>	H / 1.9 / 22.0	<mark>-12</mark>	<mark>47.6</mark>	<mark>54</mark>	-6.40
<mark>1737.51</mark>	<mark>57.5 Pk</mark>	<mark>3.0 / 27.9 / 37.2</mark>	<mark>51.3</mark>	<mark>V / 2.5 / 225.0</mark>	<mark>-12</mark>	<mark>39.3</mark>	<mark>60.84</mark>	<mark>-21.54</mark>
<mark>1737.54</mark>	63.1 Pk	<mark>3.0 / 27.9 / 37.2</mark>	<mark>56.9</mark>	<mark>H / 1.9 / 335.0</mark>	<mark>-12</mark>	<mark>44.9</mark>	<mark>60.84</mark>	<mark>-15.94</mark>
<mark>2171.9</mark>	50.6 Pk	<mark>3.5 / 29.6 / 37.8</mark>	<mark>45.9</mark>	<mark>V / 1.5 / 58.0</mark>	<mark>-12</mark>	<mark>33.9</mark>	<mark>60.84</mark>	<mark>-26.94</mark>
<mark>2171.91</mark>	<mark>55.6 Pk</mark>	<mark>3.5 / 29.6 / 37.8</mark>	<mark>50.9</mark>	<mark>H / 1.7 / 320.0</mark>	<mark>-12</mark>	<mark>38.9</mark>	<mark>60.84</mark>	<mark>-21.94</mark>
2606.29	<mark>46.2 Pk</mark>	<mark>4.1 / 30.8 / 37.7</mark>	<mark>43.5</mark>	<mark>V / 2.0 / 58.0</mark>	<mark>-12</mark>	<mark>31.5</mark>	<mark>60.84</mark>	<mark>-29.34</mark>
2606.32	<mark>48.4 Pk</mark>	<mark>4.1 / 30.8 / 37.7</mark>	<mark>45.7</mark>	H / 1.6 / 10.0	<mark>-12</mark>	<mark>33.7</mark>	<mark>60.84</mark>	<mark>-27.14</mark>
3040.69	<mark>48.6 Pk</mark>	<mark>4.6 / 31.8 / 37.5</mark>	<mark>47.5</mark>	H / 1.4 / 0.0	<mark>-12</mark>	<mark>35.5</mark>	<mark>60.84</mark>	<mark>-25.34</mark>
<mark>3040.7</mark>	<mark>45.2 Pk</mark>	<mark>4.6 / 31.8 / 37.5</mark>	<mark>44.1</mark>	<mark>V / 1.4 / 0.0</mark>	<mark>-12</mark>	32.1	<mark>60.84</mark>	<mark>-28.74</mark>
<mark>3475.07</mark>	47.7 Pk	<mark>4.8 / 32.7 / 37.8</mark>	<mark>47.5</mark>	H / 1.7 / 35.0	<mark>-12</mark>	35.5	<mark>60.84</mark>	<mark>-25.34</mark>
3475.08	42.0 Pk	4.8 / 32.7 / 37.8	41.8	V/2.4/0.0	-12	29.8	60.84	-31.04
3909.47	42.4 Pk	5.5 / 34.1 / 37.7	44.3	V / 1.2 / 20.0	<mark>-12</mark>	32.3	54	-21.70
3909.49	49.7 Pk	5.5 / 34.1 / 37.7	51.7	H / 1.7 / 338.0	<mark>-12</mark>	39.7	<mark>54</mark>	-14.30
4343.86	44.2 Pk	6.3 / 33.8 / 38.6	45.7	V / 1.1 / 280.0	-12	33.7	54	-20.30
4343.86	43.1 Pk	6.3 / 33.8 / 38.6	44.6	H / 1.0 / 20.0	-12	32.6	54	-21.40



### **Duty Cycle Correction Factor Justification**

The following plot was taken to verify the actual Duty Cycle as specified in the FCC CFR47 Rules and was utilized to perform the DCCF adjustment for averaging emissions allowed in FCC CFR47 Part 15.35.

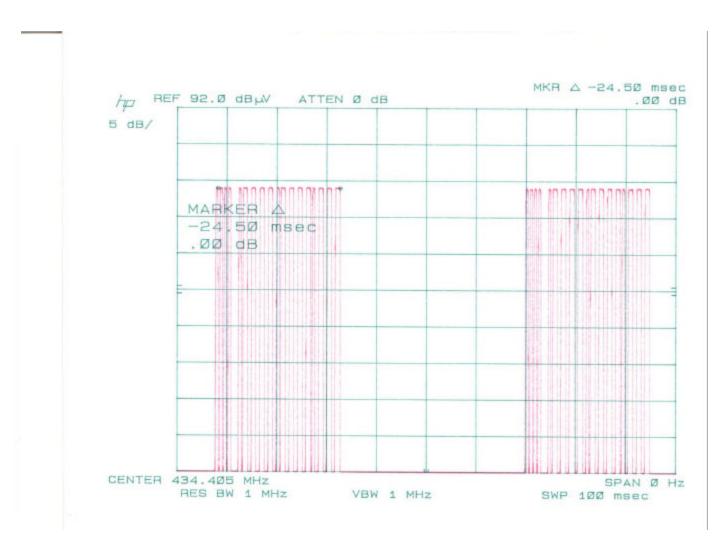



### Part 15.231 (b)(3) / 15.207, 15.209 Spurious and Unintentional Emissions

5541 Central Avenue, Suite 110 Boulder, Colorado 80301 Project File: BC400275 Page 17 of 38 Voice: 303 786 7999 Fax: 303 449 6160



# **Conducted Electromagnetic Emissions**

Test Report #:	BC400275 Run 01	Test Area:	Pinewood Site 1 Cond	Temperature:	22.6	°C
Test Method:	FCC Part 15.207	Test Date:	10-Oct-2004	Relative Humidity:	39	%
EUT Model #:	AC/DC RF Sound Module	EUT Power:	120 VAC / 60 Hz	Air Pressure:	80	kPa
EUT Serial #:	108					
Manufacturer:	Kidde					
EUT Description:	RF remote sound module			Pk-Peak	Nb – N	arrow Band
Notes:				Qp – QuasiPeak	Bb – B	road Band
				Av - Average		

FREQ	LEVEL	CABLE / LISN / ATTEN	FINAL	TEST POINT	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB)	(dBuV)		FCC 15.207	N/A
0.450	1.0 Qp	0.1 / 0.0 / -10.0	11.1	Line 1	-36.9	N/A
0.580	28.2 Qp	0.1 / 0.0 / -10.0	38.3	Line 1	-9.7	N/A
0.680	27.9 Qp	0.1 / 0.0 / -10.0	38.0	Line 1	-10.0	N/A
1.37	27.9 Qp	0.2 / 0.0 / -10.0	38.2	Line 1	-9.8	N/A
1.37	28.4 Qp	0.2 / 0.0 / -10.0	38.7	Line 1	-9.3	N/A
1.47	28.6 Qp	0.2 / 0.0 / -10.0	38.9	Line 1	-9.1	N/A
2.35	26.7 Qp	0.3 / 0.1 / -10.0	37.1	Line 1	-10.9	N/A
21.00	8.1 Qp	1.0 / 1.2 / -10.0	20.3	Line 1	-27.7	N/A
4.60	18.5 Qp	0.4 / 0.1 / -10.0	29.0	Line 1	-19.0	N/A
4.60	25.4 Qp	0.4 / 0.1 / -10.0	35.9	Neutral	-12.1	N/A
21.00	10.4 Qp	1.0 / 1.2 / -10.0	22.6	Neutral	-25.4	N/A
2.35	28.7 Qp	0.3 / 0.1 / -10.0	39.1	Neutral	-8.9	N/A
1.47	30.2 Qp	0.2 / 0.0 / -10.0	40.5	Neutral	-7.5	N/A
1.37	30.5 Qp	0.2 / 0.0 / -10.0	40.8	Neutral	-7.2	N/A
0.680	28.4 Qp	0.1 / 0.0 / -10.0	38.5	Neutral	-9.5	N/A
0.580	29.0 Qp	0.1 / 0.0 / -10.0	39.1	Neutral	-8.9	N/A
0.450	1.0 Qp	0.1 / 0.0 / -10.0	11.1	Neutral	-36.9	N/A

Rev.No 1



# **Conducted Electromagnetic Emissions**

Test Report #:	BC400275 Run 01	Test Area:	Pinewood Site 1 Cond	Temperature:	22.6	°C
Test Method:	FCC Part 15.207	Test Date:	10-Oct-2004	Relative Humidity:	39	%
EUT Model #:	AC/DC RF Sound Module	EUT Power:	120 VAC / 60 Hz	Air Pressure:	80	kPa
EUT Serial #:	108					_
Manufacturer:	Kidde					
EUT Description:	RF remote sound module			Pk – Peak	Nb – N	arrow Band
Notes:				Qp – QuasiPeak	Bb – Bi	road Band
				Av - Average		

FREQ	LEVEL	CABLE / LISN / ATTEN	FINAL	TEST POINT	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB)	(dBuV)		FCC 15.207	N/A
		******** M	easurem	ent Summar	у *****	
1.37	30.5 Qp	0.2 / 0.0 / -10.0	40.8	Neutral	-7.2	N/A
1.47	30.2 Qp	0.2 / 0.0 / -10.0	40.5	Neutral	-7.5	N/A
0.580	29.0 Qp	0.1 / 0.0 / -10.0	39.1	Neutral	-8.9	N/A
2.35	28.7 Qp	0.3 / 0.1 / -10.0	39.1	Neutral	-8.9	N/A
0.680	28.4 Qp	0.1 / 0.0 / -10.0	38.5	Neutral	-9.5	N/A
4.60	25.4 Qp	0.4 / 0.1 / -10.0	35.9	Neutral	-12.1	N/A
21.00	10.4 Qp	1.0 / 1.2 / -10.0	22.6	Neutral	-25.4	N/A
0.450	1.0 Qp	0.1 / 0.0 / -10.0	11.1	Neutral	-36.9	N/A



Test Rep	ort #: BC400	0275 Run 04	Test Area:	Pinewood Site 1 (3	3m) Temp	erature: 20.6 °C
Test Me	thod: FCC p	ot. 15.209	Test Date:	10-Oct-2004	Relative H	umidity: 30 %
EUT Mod	del #: See N	otes	EUT Power:	See Notes	Air Pi	ressure: 80 kPa
EUT Ser	rial #: See N	otes				
Manufact	turer: Kidde					
EUT Descrip	ption: See N	otes			Pk – Peak	Nb – Narrow Band
Notes: AC	C/DC RF sound	d module 120 VAC / 60 Hz			Qp – Quas	iPeak Bb – Broad Band
D	C RF smoke m	odule 4.5 VDC battery			Av - Avera	ge
AC	C/DC RF smok	e module 120 VAC / 60 Hz				-
FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB\m) (dB)	(dbuV)	(m) (DEG)	15.209 <30MHz	15.209 >30MHz
No emissions	s found: 4 to 4.	4 GHz Horizontal.				
Noise floor.						
4400.00	32.4 Av	6.4 / 33.7 / 39.0	33.5	H / 1.0 / 0.0	N/A	-20.5
No emissions Noise floor.	s found: 4 to 4.	4 GHz Vertical.				
4000.00	31.0 Av	5.7 / 34.4 / 38.7	32.4	V/1.0/0.0	N/A	-21.6
4000.00	31.0 AV	5.17 54.47 58.1	52.4	V/1.0/0.0	IN/A	-21.0
1271.04	41.5 Av	2.6 / 26.0 / 37.4	32.7	V / 1.0 / 0.0	N/A	-21.3
1074.04	44.0.4	0.0.400.0.407.4	00.4		N//A	01.0
1271.04	41.2 Av	2.6 / 26.0 / 37.4	32.4	V / 1.0 / 90.0	N/A	-21.6
1271.04	48.8 Av	2.6 / 26.0 / 37.4	40.0	V / 1.0 / 180.0	N/A	-14.0
			1010	.,		
No higher em	issions found:	1 to 4 GHz Vertical.				
Noise floor.						
4000.00	32.1 Av	5.7 / 34.4 / 37.6	34.6	V / 1.0 / 270.0	N/A	-19.4
The following	ywas maximizo	ed between 1 and 4 GHz.				
	_	-	-			
1271.04	50.0 Av	2.6 / 26.0 / 37.4	41.2	V / 1.0 / 280.0	N/A	-12.8
Switched to H						
1271.04	41.5 Av	2.6 / 26.0 / 37.4	32.7	H / 1.0 / 0.0	N/A	-21.3
1271.04	44.4 Av	2.6 / 26.0 / 37.4	35.5	H / 1.0 / 90.0	N/A	-18.5
		1	1			·
1271.04	44.2 Av	2.6 / 26.0 / 37.4	35.4	H / 1.0 / 180.0	N/A	-18.6
1271.04	42.6 Av	2.6 / 26.0 / 37.4	33.8	H / 1.0 / 270.0	N/A	-20.2
-	-				-	-



Test Method:         FCC pt. 15.209         Test Date:         10-Oct-2004         Relative Humidity:         30         %           EUT Model #:         See Notes         EUT Power:         See Notes         Air Pressure:         80         kPa           EUT Serial #:         See Notes         EUT Description:         See Notes         Pk - Peak         Nb - Narrow Band           Notes:         AC/DC RF sound module 120 VAC / 60 Hz         Pk - Peak         Nb - Narrow Band           AC/DC RF smoke module 120 VAC / 60 Hz         A' - Average         A' - Average           AC/DC RF smoke module 120 VAC / 60 Hz         FREQ         LEVEL         CABLE / ANT / PREAMP         FINAL         POL / HGT / AZ         DELTA1 (dB)         DELTA2 (dB)           MHz)         (dBu/)         (dBu/)         (m) DEG         15.209 <30MHz         15.209 <30MHz           No other emissions found:         1 to 4 GHz Horizontal.         No del to 5.209 <30MHz         15.209 <30MHz           No ther emissions found:         1 and 4 GHz.         FEU         See Notes         See Notes           1271.04         50.6 Av         2.6 / 26.0 / 37.4         41.8         H / 1.0 / 28.0         N/A         -12.2           1271.04         50.6 Av         2.6 / 26.0 / 37.4         41.8         H / 1.0 / 0.0	Test Rep	ort #: BC400	0275 Run 04	Test Area:	Pinewood Site 1 (3	Bm)	Tempera	ature:	20.6	°C
EUT Serial #:         See Notes           Kidde           Kidde           Kidde           Kidde           See Notes           Notes:         Pic-Peak         Nb – Narrow Band           Qp – QuasiPeak         Bb – Broad Band           AC/DC RF smoke module 120 VAC / 60 Hz           AC/DC RF smoke module 120 VAC / 60 Hz           AC/DC RF smoke module 120 VAC / 60 Hz           AC/DC RF smoke module 120 VAC / 60 Hz           Maint and the S VDC battery           AC/DC RF smoke module 120 VAC / 60 Hz           Maint and the S VDC battery           AC/DC RF smoke module 120 VAC / 60 Hz           Maint and the S VDC battery           AC/DC RF smoke module 120 VAC / 60 Hz           Maint and the S VDC battery           Notest colspan="4">Maint and the S VDC battery           Notest colspan="4">Maint and the S VDC battery           Notest colspand to the S VDC battery	Test Me	thod: FCC p	ıt. 15.209	Test Date:	10-Oct-2004		Relative Hun	nidity:	30	%
Manufacture: Kidde           EUT Description: See Notes           See Notes           PK - Peak         Nb - Narrow Band           Notes:         PK - Peak         Nb - Narrow Band           DC RF smoke module 120 VAC / 60 Hz           AC/CC RF smoke module 120 VAC / 60 Hz           AC/C RF smoke module 120 VAC / 60 Hz           V           V           AC/C RF smoke module 120 VAC / 60 Hz           V           V           V           V           V           V           V           V           V           V           V           V           No other emissions found: 1 to 4 GHz Horizontal.           Noise floor.           Sign colspan="2">V           V           V           V           V           V           V           V </td <td>EUT Mo</td> <td>del #: See N</td> <td>otes</td> <td>EUT Power:</td> <td>See Notes</td> <td></td> <td>Air Pres</td> <td>sure:</td> <td>80</td> <td>kPa</td>	EUT Mo	del #: See N	otes	EUT Power:	See Notes		Air Pres	sure:	80	kPa
PK - Peak         Nb - Narrow Band           Notes: $A \subset DC \ RF \ sound \ module 120 \ VAC / 60 \ Hz$ $A \subset DC \ RF \ sound \ module 120 \ VAC / 60 \ Hz$ $A \subset Average$ INTER TRANK TO CR \ Smoke \ module 120 \ VAC / 60 \ Hz         DE RET \ moke \ module 120 \ VAC / 60 \ Hz           REC         Calle / ANT / PREAMP         FINAL         POL / HGT / AZ         DELTA1 (dB)         DELTA2 (dB)           (MHz)         Calle / ANT / PREAMP         FINAL         POL / HGT / AZ         DELTA1 (dB)         DELTA2 (dB)           (MHz)         (dBUV)           No other emissions found:         10 4 GB2 (dBVm) (dB)         (dBUV)         (dBUV)         (dBUV)           No other emissions found:         10 4 GB2 (dSVm) (dB)         (dBUV)         (dBUV)	EUT Ser	ial #: See N	otes							
Qp - QuasiPeak         Bb - Broad Band           AC/DC RF smoke module 120 VAC / 60 Hz           AC/DC RF smoke module 120 VAC / 60 Hz           AC/DC RF smoke module 120 VAC / 60 Hz           AC/DC RF smoke module 120 VAC / 60 Hz           FREQ         LEVEL         CABLE / ANT / PREAMP         FINAL         POL / HGT / AZ         DELTA1 (dB)         DELTA2 (dB)           (MLz)         (dBuV)         (dBu/n) (dB)         (dbuV)         (m) (DEG)         15.209 <30MHz         15.209 >30MHz           No other emissions found: 1 to 4 GHz Horizontal.           Noise floor.           35.5 Av         4.8 / 32.8 / 37.8         32.3         H / 1.0 / 270.0         N/A         -21.7           The following was maixmized between 1 and 4 GHz.           The following was maixmized between 1 and 4 GHz.	Manufact	urer: Kidde								
Av - Average           Av - Average           Av - Average           AC/DC RF smok=module 120 VAC / 60 Hz           FREQ         LEVEL         CABLE / ANT / PREAMP         FINAL         POL / HGT / AZ         DELTA1 (dB)         DELTA2 (dB)           (MHz)         (dBvV)         (dBvm) (dB)         (dvv)         (m) CEGT (dB)         DELTA2 (dB)           No other emissions found: 1 to 4 GHz Horizontal.           Noise floor.           3500.00         32.5 Av         4.8 / 32.8 / 37.8         32.3         H / 1.0 / 270.0         N/A         -21.7           Sinde floor.           3500.00         32.5 Av         4.8 / 32.8 / 37.8         32.3         H / 1.0 / 270.0         N/A         -21.7           The following was maixmized between 1 and 4 GHz.	EUT Descrip	otion: See N	otes				Pk – Peak		Nb – N	arrow Band
Av - Average           Av - Average           Av - Average           AC/DC RF smok=module 120 VAC / 60 Hz           FREQ         LEVEL         CABLE / ANT / PREAMP         FINAL         POL / HGT / AZ         DELTA1 (dB)         DELTA2 (dB)           (MHz)         (dBvV)         (dBvm) (dB)         (dvv)         (m) CEG / CG	Notes: AC	C/DC RF sound	d module 120 VAC / 60 Hz				Qp – QuasiPe	eak	Bb – B	road Band
AC/DC RF smoke module 120 VAC / 60 Hz           FREQ         LEVEL         CABLE / ANT / PREAMP         FINAL         POL / HGT / AZ         DELTA1 (dB)         DELTA2 (dB)           (MHz)         (dBuV)         (dB) (dBVm) (dB)         (dbuV)         (m) (DEG)         15.209 <30MHz							•			
FREQ         LEVEL         CABLE / ANT / PREAMP         FINAL         POL / HGT / AZ         DELTA1 (dB)         DELTA2 (dB)           (MHz)         (dBuV)         (dB) (dBVm) (dB)         (dbuV)         (m) (DEG)         15.209 <30MHz							Av Avelage			
(MHz)         (dBuV)         (dB\m) (dB)         (dbuV)         (m) (DEG)         15.209 <30MHz         15.209 >30MHz           No other emissions found: 1 to 4 GHz Horizontal.         Noise floor.		•					1 (dD)			(dD)
No other emissions found: 1 to 4 GHz Horizontal.         Noise floor.           3500.00         32.5 Av         4.8/32.8/37.8         32.3         H/1.0/270.0         N/A         -21.7           The following was maixmized between 1 and 4 GHz.           1271.04         50.6 Av         2.6/26.0/37.4         41.8         H/1.0/282.0         N/A         -12.2           36.92         39.2 Qp         0.7/12.3/28.3         23.9         V/1.0/0.0         N/A         -16.1           39.50         39.2 Qp         0.7/12.1/28.3         23.7         V/1.0/0.0         N/A         -16.3           41.02         42.5 Qp         0.7/12.0/28.3         27.0         V/1.0/0.0         N/A         -13.0           44.10         42.7 Qp         0.7/11.5/28.3         26.7         V/1.0/0.0         N/A         -13.3           45.12         45.2 Qp         0.8/11.4/28.3         29.1         V/1.0/0.0         N/A         -10.9           46.63         46.2 Qp         0.8/11.0/28.3         29.7         V/1.0/0.0         N/A         -10.3           49.84         46.5 Qp         0.8/10.6/28.3         29.7         V/1.0/0.0         N/A         -10.3           53.29         40.0 Qp         0.8/10.0/28.										
Noise floor.           350.00         32.5 Av         4.8/32.8/37.8         32.3         H/1.0/270.0         N/A         -21.7           The following was maixmized between 1 and 4 GHz.           The following was maixmized between 1 and 4 GHz.           1271.04         50.6 Av         2.6/26.0/37.4         41.8         H/1.0/282.0         N/A         -12.2           36.92         39.2 Qp         0.7/12.3/28.3         23.9         V/1.0/0.0         N/A         -16.1           39.50         39.2 Qp         0.7/12.1/28.3         23.7         V/1.0/0.0         N/A         -16.3           41.02         42.5 Qp         0.7/12.0/28.3         27.0         V/1.0/0.0         N/A         -13.0           44.10         42.7 Qp         0.7/11.5/28.3         26.7         V/1.0/0.0         N/A         -13.3           45.12         45.2 Qp         0.8/11.4/28.3         29.1         V/1.0/0.0         N/A         -10.9           46.63         46.2 Qp         0.8/11.0/28.3         29.7         V/1.0/0.0         N/A         -10.3           49.84         46.5 Qp         0.8/10.6/28.3         29.7         V/1.0/0.0         N/A         -10.3           53.29         40.0 Qp	, ,	( )		(vudu)	(III) (DEG)	15.209 <	<30IVITZ	1	5.209 >3	JIVIEZ
3500.00         32.5 Av         4.8/32.8/37.8         32.3         H/1.0/270.0         N/A         -21.7           The following was maixmized between 1 and 4 GHz.           The following was maixmized between 1 and 4 GHz.           1271.04         50.6 Av         2.6/26.0/37.4         41.8         H/1.0/282.0         N/A         -12.2           1271.04         50.6 Av         2.6/26.0/37.4         41.8         H/1.0/282.0         N/A         -12.2           36.92         39.2 Qp         0.7/12.3/28.3         23.9         V/1.0/0.0         N/A         -16.1           39.50         39.2 Qp         0.7/12.1/28.3         23.7         V/1.0/0.0         N/A         -16.3           41.02         42.5 Qp         0.7/11.5/28.3         27.0         V/1.0/0.0         N/A         -13.0           44.10         42.7 Qp         0.7/11.5/28.3         26.7         V/1.0/0.0         N/A         -10.3           45.12         45.2 Qp         0.8/11.4/28.3         29.1         V/1.0/0.0         N/A         -10.3           46.63         46.2 Qp         0.8/11.0/28.3         29.7         V/1.0/0.0         N/A         -10.3           49.84         46.5 Op         0.8/10.0/28.3<		5510115 100110.	r to 4 GHz Honzontai.							
The following was maixmized between 1 and 4 GHz.           The following was maixmized between 1 and 4 GHz.           1271.04         50.6 Av         2.6 / 26.0 / 37.4         41.8         H / 1.0 / 282.0         N/A         -12.2           36.92         39.2 Qp         0.7 / 12.3 / 28.3         23.9         V / 1.0 / 0.0         N/A         -12.2           36.92         39.2 Qp         0.7 / 12.3 / 28.3         23.9         V / 1.0 / 0.0         N/A         -12.2           36.92         39.2 Qp         0.7 / 12.3 / 28.3         23.3         23.9         V / 1.0 / 0.0         N/A         -16.1           39.2 Qp         0.7 / 12.0 / 28.3         23.7         V / 1.0 / 0.0         N/A         -16.3           44.10         42.7 Qp         0.7 / 11.5 / 28.3         26.7         V / 1.0 / 0.0         N/A         -13.3           46.63         46.2 Qp         0.8 / 11.0 / 28.3										



Test Repo			275 Run 04	Test Area:	Pinewood Site 1 (3		Tempe		20.6	°C
Test Me	thod:	FCC pt	. 15.209	Test Date:	10-Oct-2004		Relative Hu	midity:	30	%
EUT Mod	del #:	See No	otes	EUT Power:	See Notes		Air Pre	ssure:	80	 kPa
EUT Ser	rial #:	See No	otes					-		_
Manufact	turer:	Kidde								
EUT Descrip	otion:	See No	otes				Pk – Peak		Nb – Na	arrow Band
Notes: AC	C/DC F	RF sound	module 120 VAC / 60 Hz				Qp – QuasiF	Peak	Bb – Br	oad Band
D	CRFs	moke ma	odule 4.5 VDC battery				Av - Averag	е		
			e module 120 VAC / 60 Hz				, , e. ag	•		
FREQ		VEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELT	A1 (dB)		DELTA2 (	(dB)
(MHz)		BuV)	(dB) (dB\m) (dB)	(dbuV)	(m) (DEG)		<30MHz		5.209 >30	. ,
45.12	•	8 Qp	0.8 / 11.4 / 28.3	29.7	V/1.0/180.0		<501112		-10.3	
46.93		1 Qp	0.8 / 11.0 / 28.3	30.6	V/1.0/180.0		/A	-	-9.4	
53.29		2 Qp	0.8 / 10.0 / 28.3	23.7	V/1.0/180.0		//A		-16.3	
147.38		4 Qp	1.2 / 12.8 / 27.8	20.6	V/1.0/180.0		//A		-22.9	
39.50	40.	1 Qp	0.7 / 12.1 / 28.3	24.6	V / 1.0 / 270.0	Ν	/A		-15.4	
44.10	45.	4 Qp	0.7 / 11.5 / 28.3	29.3	V / 1.0 / 270.0	Ν	/A		-10.7	
45.12	47.	1 Qp	0.8 / 11.4 / 28.3	31.0	V / 1.0 / 270.0	N	I/A		-9.0	
46.93	47.	7 Qp	0.8 / 11.0 / 28.3	31.2	V / 1.0 / 270.0	N	I/A		-8.8	
53.29	41.	6 Qp	0.8 / 10.0 / 28.3	24.1	V / 1.0 / 270.0	N	I/A		-15.9	
147.38	38.	2 Qp	1.2 / 12.8 / 27.8	24.4	V / 1.0 / 270.0	N	/A		-19.1	
The following	were	maximize	ed between 30 and 200 MH	Ζ.						
46.93	47.	8 Qp	0.8 / 11.0 / 28.3	31.2	V / 1.0 / 227.0	N	/A		-8.8	
45.12	48.	4 Qp	0.8 / 11.4 / 28.3	32.3	V / 1.0 / 226.0	N	/A		-7.7	
					11					
No higher em	nission	s found:	0Deg, Horizontal.							
No higher em	nission	s found:	90Deg, Horizontal.							
Nie bieb en ene		- <b>f</b>								
ivo nigher em	IISSION	s tound:	180Deg, Horizontal.							
No higher em	nission	s found:	270Deg, Horizontal.							
Noise floor.										
				T	I					
30.00	22	1 Qp	0.6 / 13.2 / 28.3	7.5	H / 2.0 / 270.0	-4	2.0		-32.5	



Test Re	eport #:	BC40	0275 Run 04	Test Area:	Pinewood Site 1 (	3m)	Tempera	ature:	20.6	°C
Test M	Method:	FCC p	ot. 15.209	Test Date:	10-Oct-2004		Relative Hun	nidity:	30	%
EUT N	/lodel #:	See N	otes	EUT Power:	See Notes		Air Pres	sure:	80	kPa
EUT S	Serial #:	See N	otes							_
Manufa	acturer:	Kidde								
EUT Desc	cription:	See N	otes				Pk – Peak		Nb – N	arrow Band
	· –		d module 120 VAC / 60 Hz				Qp – QuasiPe	aak		road Band
									DD - D	Udu Dahu
_			nodule 4.5 VDC battery				Av - Average			
	AC/DC RI	F smok	ke module 120 VAC / 60 Hz	-						
FREQ	LE\	/EL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELT	A1 (dB)		DELTA2	(dB)
(MHz)	(dB	uV)	(dB) (dB\m) (dB)	(dbuV)	(m) (DEG)	15.209	<30MHz	1	5.209 >30	OMHz
423.69	40.3	3 Qp	2.2 / 15.7 / 28.1	30.1	V / 1.0 / 0.0	Ν	I/A		-15.9	
847.38	24.0	) Qp	2.2 / 22.0 / 28.5	19.7	V / 1.0 / 0.0	Ν	I/A		-26.3	
423.69	40.7	′ Qp	2.2 / 15.7 / 28.1	30.6	V / 1.0 / 90.0	Ν	I/A		-15.4	
847.38	28.1	Qp	2.2 / 22.0 / 28.5	23.8	V / 1.0 / 90.0	Ν	I/A		-22.2	
	T			1						
423.69	49.2	2 Qp	2.2 / 15.7 / 28.1	39.0	V / 1.0 / 180.0	Ν	I/A		-7.0	
847.38	28.4	l Qp	2.2 / 22.0 / 28.5	24.1	V / 1.0 / 270.0	Ν	I/A		-21.9	
		<u> </u>						_		
I he followi	ng were m	naximiz	zed between 200 and 1000 N	IHZ.				<u> </u>		
0.47.00	00.4	<u> </u>		07.0	N//4.0./45.0		1/A		10.0	
847.38	32.1	Qp	2.2 / 22.0 / 28.5	27.8	V / 1.2 / 45.0		I/A		-18.2	
423.69	50.9	0.00	2.2 / 15.7 / 28.1	40.7	V / 1.3 / 163.0		I/A		-5.3	
423.69	50.8	s Qp	2.2 / 15.7 / 28.1	40.7	V / 1.3 / 163.0	r	I/A		-5.3	
Cables we	ro mavimi-	zod								
Cables wel		zeu.								
423.69	41.8	3 Qn	2.2 / 15.7 / 28.1	31.6	H/1.0/0.0	Ν	I/A		-14.4	
847.38	24.6		2.2 / 22.0 / 28.5	20.3	H / 1.0 / 0.0		I/A		-25.7	
260.66	22.8	-	1.8 / 12.4 / 27.2	9.7	H / 1.0 / 0.0		I/A		-36.3	
-		•	1	1	1				-	
260.66	23.2	2 Qp	1.8 / 12.4 / 27.2	10.1	H/1.0/90.0	Ν	I/A		-35.9	
423.69	37.9	-	2.2 / 15.7 / 28.1	27.7	H / 1.0 / 90.0	Ν	I/A		-18.3	
847.38	23.8	3 Qp	2.2 / 22.0 / 28.5	19.5	H / 1.0 / 90.0	Ν	I/A		-26.5	
	<b>I</b>		1	1						
423.69	41.9	Qp	2.2 / 15.7 / 28.1	31.8	H / 1.0 / 180.0	Ν	I/A		-14.2	
847.38	23.4	l Qp	2.2 / 22.0 / 28.5	19.1	H / 1.0 / 180.0	Ν	I/A		-26.9	



Test Repo	ort #: E	3C400	0275 Run 04	Test Area:	Pinewood Site 1 (3	3m)	Temper	ature:	20.6	°C
Test Met	thod: F	-CC p	t. 15.209	10-Oct-2004		Relative Hur	nidity:	30	%	
EUT Mod	del #: 5	See No	otes	EUT Power:	See Notes		Air Pres	sure:	80	 kPa
EUT Ser	ial #: 5	See No	otes					-		_
Manufact	urer: k	Kidde								
EUT Descrip	otion: S	See No	otes				Pk – Peak		Nb – N	arrow Band
Notes: AC	/DC RF	sound	d module 120 VAC / 60 Hz				Qp – QuasiP	eak	Bb – Bi	road Band
	CREsmo	oke m	odule 4.5 VDC battery				Av - Average	<b>.</b>		
			e module 120 VAC / 60 Hz				/w /wordge	•		
FREQ	LEVE		CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ		A1 (dB)		DELTA2	(dB)
(MHz)	(dBu		(dB) (dB\m) (dB)	(dbuV)	(m) (DEG)		<30MHz		5.209 >30	
260.66	23.4	,	1.8 / 12.4 / 27.2	10.4	H / 1.0 / 270.0		<5011112	1.	-35.6	
847.38	27.3		2.2 / 22.0 / 28.5	23.0	H/1.0/270.0		V/A		-23.0	
047.00	21.0	αp	2.27 22.07 20.0	20.0	117 1.07 27 0.0				20.0	
The following	were ma	aximiz	ed between 200 and 1000 M	/Hz.						
847.38	28.1	Qp	2.2 / 22.0 / 28.5	23.8	H / 1.0 / 335.0	١	√/A		-22.2	
423.69	44.9	Qp	2.2 / 15.7 / 28.1	34.7	H / 2.0 / 156.0	١	I∕A		-11.3	
260.66	26.9	Qp	1.8 / 12.4 / 27.2	13.8	H / 1.2 / 10.0	Ν	V/A		-32.2	
	found: 4	4 to 30	MHz Vertical.							$\sim$
Noise floor.										
4.00	32.6	Qp	0.3 / -5.8 / 0.0	27.1	V / 1.0 / 10.0	-2	22.4		N/A	
	found: 4	l to 30	MHz Horizontal.							
Noise floor.					·					
20.02	8.3 0	λb	0.5 / -7.3 / 0.0	1.5	H / 1.0 / 10.0	-4	8.0		N/A	



Test Repo	ort #:	BC40	0275 Run 04	Test Area:	Pinewood Site 1 (3)	m)	Temperatur	e: 20	).6	°C
Test Meth	hod:	FCC p	ot. 15.209	Test Date:	10-Oct-2004		Relative Humidit	y: 30	)	%
EUT Mode	el #:	See N	otes	EUT Power:	See Notes		Air Pressur	e: 80	)	kPa
EUT Seria	al #:	See N	otes							_
Manufactu	urer:	Kidde								
EUT Descript	tion:	See N	otes				Pk – Peak	N	b – Na	arrow Band
	-	F sound	d module 120 VAC / 60 Hz				Qp – QuasiPeak	В	h – Br	oad Band
							•	D	0 01	oud Bund
			nodule 4.5 VDC battery				Av - Average			
AC/	/DC R	F smok	e module 120 VAC / 60 Hz							
FREQ	LE	VEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELT	A1 (dB)		_TA2 (	
(MHz)	(dE	BuV)	(dB) (dB\m) (dB)	(dbuV)	(m) (DEG)		<30MHz	15.20	09 >30	MHz
			********* N	leasurem	ent Summary	/ ******	***			
4400.00	32.4	4 Av	6.4 / 33.7 / 39.0	33.5	H/1.0/0.0	1	N/A		-20.5	
4000.00	32.	1 Av	5.7 / 34.4 / 37.6	34.6	V / 1.0 / 270.0	١	N/A		-19.4	
3500.00	32.	5 Av	4.8 / 32.8 / 37.8	32.3	H / 1.0 / 270.0	١	N/A		-21.7	
1271.04	50.	6 Av	2.6 / 26.0 / 37.4	41.8	H / 1.0 / 282.0	1	N/A		-12.2	
847.38	32.1	1 Qp	2.2 / 22.0 / 28.5	27.8	V / 1.2 / 45.0	1	I/A		-18.2	
423.69	50.8	8 Qp	2.2 / 15.7 / 28.1	40.7	V / 1.3 / 163.0	1	N/A		-5.3	
260.66	26.9	9 Qp	1.8 / 12.4 / 27.2	13.8	H / 1.2 / 10.0	1	N/A		-32.2	
195.00	23.	1 Qp	1.4 / 13.8 / 27.6	10.8	H / 2.0 / 270.0	1	N/A		-32.7	
147.38	38.2	2 Qp	1.2 / 12.8 / 27.8	24.4	V / 1.0 / 270.0	1	N/A		-19.1	
86.61	40.0	0 Qp	0.9 / 7.9 / 28.1	20.7	V / 1.0 / 90.0	١	N/A		-19.3	
80.79	35.4	4 Qp	0.9 / 7.5 / 28.2	15.6	V/1.0/0.0	١	N/A		-24.4	
53.29	41.0	6 Qp	0.8 / 10.0 / 28.3	24.1	V / 1.0 / 270.0	1	N/A		-15.9	
49.84	46.	5 Qp	0.8 / 10.6 / 28.3	29.7	V/1.0/0.0	1	N/A		-10.3	
46.93	47.8	8 Qp	0.8 / 11.0 / 28.3	31.2	V / 1.0 / 227.0	١	N/A		-8.8	
46.63	46.2	2 Qp	0.8 / 11.0 / 28.3	29.7	V/1.0/0.0	١	N/A		-10.3	
45.12		4 Qp	0.8 / 11.4 / 28.3	32.3	V / 1.0 / 226.0	١	N/A		-7.7	
44.10		4 Qp	0.7 / 11.5 / 28.3	29.3	V / 1.0 / 270.0		N/A		-10.7	
41.02	43.	5 Qp	0.7 / 12.0 / 28.3	27.9	V / 1.0 / 180.0	١	N/A		-12.1	
39.50		1 Qp	0.7 / 12.1 / 28.3	24.6	V / 1.0 / 270.0		N/A		-15.4	
36.92		7 Qp	0.7 / 12.3 / 28.3	25.3	V / 1.0 / 90.0		N/A		-14.7	
30.00	22.1	1 Qp	0.6 / 13.2 / 28.3	7.5	H / 2.0 / 270.0		12.0		-32.5	
20.02		3 Qp	0.5 / -7.3 / 0.0	1.5	H / 1.0 / 10.0		18.0		N/A	
4.00	32.0	6 Qp	0.3 / -5.8 / 0.0	27.1	V / 1.0 / 10.0	-2	22.4		N/A	



### Part 15.231 (a) (1) & (2) Manual and Automate shutoff within 5 seconds

Rev.No 1

5541 Central Avenue, Suite 110 Boulder, Colorado 80301 Project File: BC400275 Page 26 of 38 Voice: 303 786 7999 Fax: 303 449 6160

Ref 69.99	dBµV	#Atten 10 df				0.3 dB	Change Ti
Peak Log	1R		2R 🛠	2 •			Change Ti
5 dB/							Clear T
	- And Arring			hara	Martha Martha	Magandan Angaran	
Center 43 Res BW 1			ŧVBW 1 MHz	Swee	Spa p 20 s (40	an 0 Hz )1 pts)	
Marker 1R 1∆	Trace (1) (1)	Type Time Time	X Axis 3.1 4.7		Amplit 63.52 d 0.6	:ude IBµV 6 dB	
2R 2۵	(1) (1)	Time Time	7.95 4.85		63.83 d 0.3	IBµV 3 dB	



### Part 15.231 (c) and/or (d) Stability over Temperature and Voltage -20dBc Bandwidth

5541 Central Avenue, Suite 110 Boulder, Colorado 80301 Project File: BC400275 Page 28 of 38 Voice: 303 786 7999 Fax: 303 449 6160

Rev.No 1



# -20dB Bandwidth Measurement

Test F	Report #:	BC300275	Test Area:	Pinewood Site 1 (3m)	Temperature:	25.5	°C
Test	Method:	15.231 (c)	Test Date:	10-Jun-04	Relative Humidity:	31	%
EUT	Model #:	AC/DC RF Smoke Module	EUT Power:	120 VAC / 60 Hz	Air Pressure:	80	kPa
EUT	Serial #:	108	_		-		_
Manu	facturer:	Kidde Safety					
EUT Des	scription:	AC/DC RF smoke detector					
Notes:	Measure	ments were taken in accordance t	o FCC CFR47 P	art 15.231(c).	-		
-	-20dBc B	Bandwidth Section (c) the RBW wa	as set at a minim	um 0f 10 kHz as per			
_	ANSI C6	3.4 – 2001 13.1.7					

-20dBc Bandwidth Section (c)

			/
Resolution Bandwidth Utilized	Bandwidth Measured -20dBc	Bandwidth Limit 0.25% or 0.50% of The Fundamental Carrier Freq.	DELTA from Bandwidth Limit to Fundamental Carrier Freq.
(kHz)	(HZ)	(Hz)	(Hz)
100	453,000	1,056,000	633,000

# Temperature Stability Section (d) N/A

Voltage Stability Section (d) N/A



## Equipment Utilized During Test

5541 Central Avenue, Suite 110 Boulder, Colorado 80301 
 Project File:
 BC400275
 Page 30 of 38

 Voice:
 303 786 7999
 Fax:
 303 449 6160



# **Project Report**

### Technician Karen Parker

**Begin Date: End Date:** 6/10/2004 6/10/2004

### Project: BC400275

Capital Asset	IDManufacturer	Model #	Serial #	Description	Test Performed	Service Type	Service Date	Service Due
192	RHODE & SCHWARZ	ESH2-Z5	830364/002	LISN 50 ohm/50uH 3 line (1kHz - 30 MHz)	C Conducted Emissions	For Ver	3/8/2004	3/8/2005
198	Hewlett-Packard	11947A	3107A01984	Transient Limiter	C Conducted Emissions	For Ver	9/30/2003	9/30/2004
199	RHODE & SCHWARZ	ESH3	872318/036	Low Frequency Receiver (9 kHz - 30 MHz)	C Conducted Emissions	For Cal	11/10/2003	11/10/2004
6	Hewlett-Packard	8594E	3223A00145	Spectrum Analyzer	R Radiated Emissions	For Cal	1/16/2004	1/16/2005
138	EMC TEST SYSTEMS	3109	3142	Biconical Antenna 30-300MHz	R Radiated Emissions	For Cal	10/3/2003	10/3/2004
171	Hewlett-Packard	85662A	1928A01169	Spectrum Analyzer - Display Section	R Radiated Emissions	For Cal	1/21/2004	1/21/2005
172	Hewlett-Packard	8566B	2430A00759	Spectrum Analyzer	R Radiated Emissions	For Cal	1/21/2004	1/21/2005
187	EMCO	3115	9205-3886	Horn Antenna 1-18GHz	R Radiated Emissions	For Cal	10/6/2003	10/6/2004
203	Avantek	AFT97-8434-10F	1007	RF Pre-Amplifier (4-8 GHz)	R Radiated Emissions	For Ver	4/7/2004	4/7/2005
202	Avantek	AWT-18037	1002	RF Pre-Amplifier (8-18 GHz)	R Radiated Emissions	For Ver	4/7/2004	4/7/2005
213	Mini-Circuits Lab	ZHL-42	N052792-2	Amplifier	R Radiated Emissions	For Ver	6/20/2003	6/20/2004
217	EMCO	3146	9203-3376	Log Periodic Antenna	R Radiated Emissions	For Cal	10/3/2003	10/3/2004
248	Hewlett-Packard	8447F	3113A05545	9 kHz- 1.3GHz Pre Amp	R Radiated Emissions	For Ver	6/5/2003	6/5/2004
165	RHODE & SCHWARZ	HFH2Z2	880669/042	Loop Antenna (polarad)	R Radiated Emissions	For Cal	11/3/2003	11/3/2004

Project File: BC400275 Page 31 of 38



## Appendix B

Test Plan

and

Constructional Data Form


Rev.No 1

5541 Central Avenue, Suite 110 Boulder, Colorado 80301 Project File: BC400275 Page 32 of 38 Voice: 303 786 7999 Fax: 303 449 6160



The following graph has been supplied by the customer.

### Carrier duty cycle AC/DC RF Smoke, DC RF Smoke, AC/DC RF Sounder 8 June 2004

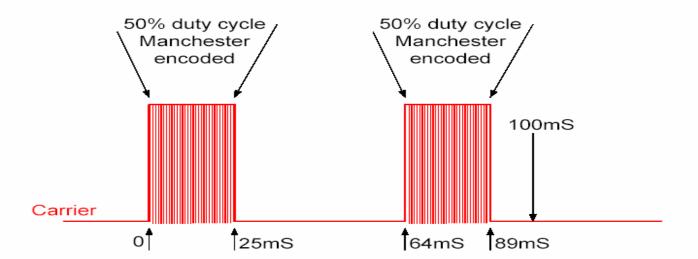

Project File: BC400275 Page 33 of 38



Appendix C

**Measurement Protocol** 

And

**Test Procedures** 

Rev.No 1

5541 Central Avenue, Suite 110 Boulder, Colorado 80301 Project File: BC400275 Page 34 of 38 Voice: 303 786 7999 Fax: 303 449 6160



#### MEASUREMENT PROTOCOL

#### **GENERAL INFORMATION**

#### **Test Methodology**

Conducted and radiated emission testing is performed according to the procedures in ANSI C63.4 & CNS13438.

#### **Justification**

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into it's characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

#### CONDUCTED EMISSIONS

The final level, expressed in  $dB\mu V$ , is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the applicable limit.

To convert between dB $\mu$ V and  $\mu$ V, the following conversions apply:

- dBµV = 20(log μV)
- $\mu V = Inverse \log(dB\mu V/20)$

### **RADIATED EMISSIONS**

The final level, expressed in  $dB\mu V/m$ , is arrived at by taking the reading from the spectrum analyzer (Level  $dB\mu V$ ) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has the applicable limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets in Attachment B. The amplifier gain is automatically accounted for by using an analyzer offset.

Example: At a Test Frequency of 30 MHz, with a peak reading on the spectrum analyzer or measuring receiver of 14 dBmV:

Measured Level	+	Transducer & Cable Loss factor	=	Corrected Reading	Specification Limit	-	Corrected Reading	=	Delta Specification
(dBµV)		(dB)		(dBµV/m)	(dBµV/m)		(dBµV/m)		
14.0		14.9		28.9	40.0		28.9		-11.1



#### **DETAILS OF TEST PROCEDURES**

#### General Standard Information

The test methods used comply with ANSI C63.4-1992 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."


#### **Conducted Emissions**

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50  $\Omega$ /50  $\mu$ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. In some cases, a pre-scan using a spectrum analyzer is initially performed on the units comprising the system under test to locate the highest emissions. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver or spectrum analyzer with quasi-peak and average detection and recorded on the data sheets.

#### Radiated Emissions


Radiated emissions from the EUT are measured in the frequency range of 30 to 22GHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3, 10 or 30 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees.



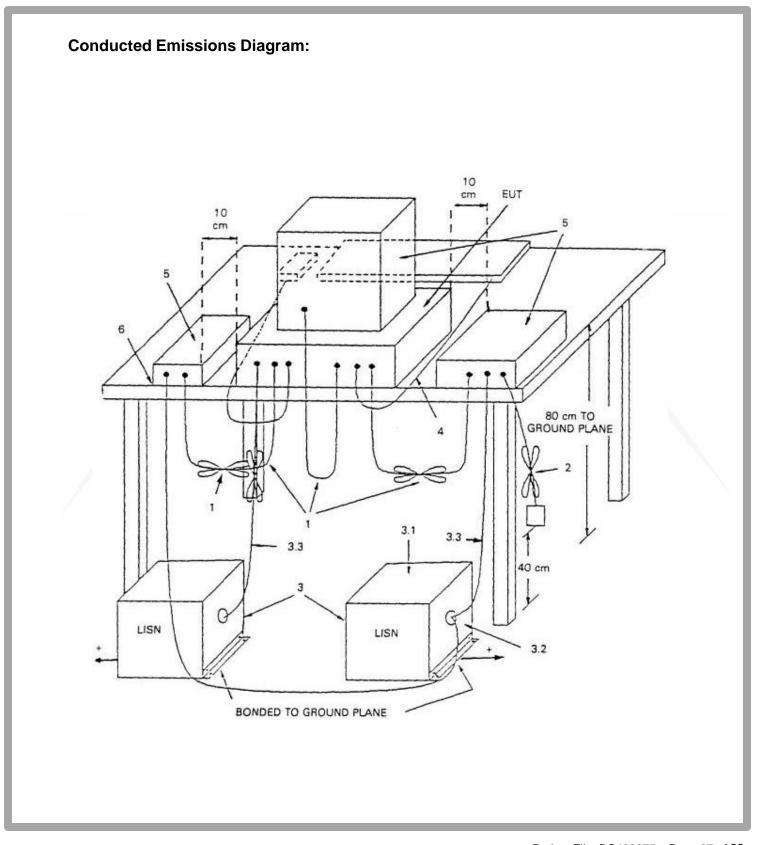

5541 Central Avenue, Suite 110 Boulder, Colorado 80301 Project File: BC400275 Page 37 of 38 Voice: 303 786 7999 Fax: 303 449 6160



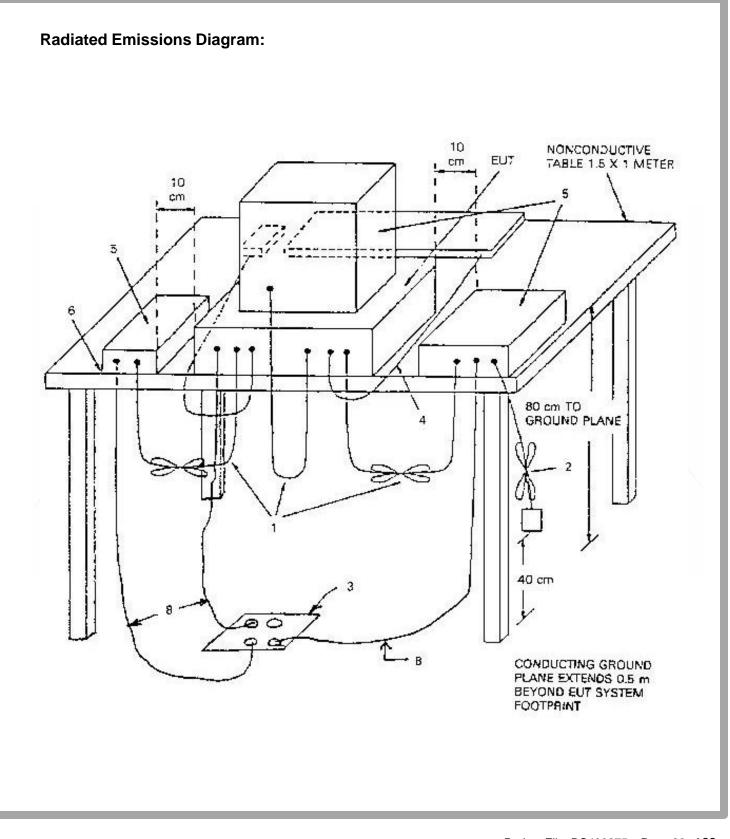

5541 Central Avenue, Suite 110 Boulder, Colorado 80301 Project File: BC400275 Page 38 of 38 Voice: 303 786 7999 Fax: 303 449 6160