

The University of Michigan  
Radiation Laboratory  
3228 EECS Building  
Ann Arbor, MI 48109-2122  
Tel: (734) 764-0500

Measured Radio Frequency Emissions  
From

**Johnson Controls Model: U-connect**  
**Modules: 05064022AC, 05091004AA, 05064013AC**

Report No. 160  
May 20, 2003

Copyright © 2003


For:  
Johnson Controls Interiors L.L.C.  
One Prince Center  
Holland, MI 49423

Contact:  
Jeremy Bos  
Tel: 616-394-6076  
Fax: 616-394-3877  
PO: Verbal

Measurements made by:

Joseph D. Brunett

Tests supervised by:  
Report approved by:



Valdis V. Liepa  
Research Scientist

---

**Summary**

Tests for compliance with FCC Regulations, Part 15.247, and with Industry Canada (IC) Regulations, RSS-210, Part 6.2.2, were performed on Johnson Controls model U-connect frequency hopping spread spectrum (FHSS) transmitter. The DUT is subject to the Rules and Regulations as a transmitter.

In testing completed on 06-Nov-02, the radiated emissions in restricted bands were met by 9.8 dB. The AC line conducted emissions tests do not apply, since the device is powered from a 12 VDC system. The DUT is exempt as a digital device since it is used in a transportation vehicle. All other testing indicates that the Johnson Controls model U-connect modules 05064022AC, 05091004AA, and 05064013AC meet the limitations set forth by the FCC and IC for a 2.4 GHz FHSS transmitters.

## 1. Introduction

Johnson Controls model U-connect (05064022AC, 05091004AA, 05064013AC) was tested for compliance with FCC Regulations, Part 15, Subpart C, adopted under Docket 87-389, April 18, 1989, and with Industry Canada RSS-210, Issue 5, November, 2001. The tests were performed at the University of Michigan Radiation Laboratory Willow Run Test Range following the procedures described in ANSI C63.4-1992 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The Site description and attenuation characteristics of the Open Site facility are on file with FCC Laboratory, Columbia, Maryland (FCC Reg. No: 91050) and with Industry Canada, Ottawa, ON (File Ref. No: IC 2057).

## 2. Test Procedure and Equipment Used

The pertinent test equipment commonly used in our facility for measurements is listed in Table 2.1 below. The middle column identifies the specific equipment used in these tests.

**Table 2.1 Test Equipment**

<b>Test Instrument</b>	<b>Eqpt. Used</b>	<b>Manufacturer/Model</b>
Spectrum Analyzer (0.1-1500 MHz)		Hewlett-Packard, 182T/8558B
Spectrum Analyzer (9kHz-22GHz)	X	Hewlett-Packard 8593A SN: 3107A01358
Spectrum Analyzer (9kHz-26GHz)	X	Hewlett-Packard 8593E, SN: 3412A01131
Spectrum Analyzer (9kHz-26GHz)		Hewlett-Packard 8563E, SN: 3310A01174
Spectrum Analyzer (9kHz-40GHz)		Hewlett-Packard 8564E, SN: 3745A01031
Power Meter	X	Hewlett-Packard, 432A
Power Meter		Anritsu, ML4803A/MP
Peak Power Meter		Pacific Instruments 1018B
Harmonic Mixer (26-40 GHz)		Hewlett-Packard 11970A, SN: 3003A08327
Harmonic Mixer (40-60 GHz)		Hewlett-Packard 11970U, SN: 2332A00500
Harmonic Mixer (75-110 GHz)		Hewlett-Packard 11970W, SN: 2521A00179
Harmonic Mixer (140-220 GHz)		Pacific Millimeter Prod., GMA, SN: 26
S-Band Std. Gain Horn	X	S/A, Model SGH-2.6
C-Band Std. Gain Horn	X	University of Michigan, NRL design
XN-Band Std. Gain Horn	X	University of Michigan, NRL design
X-Band Std. Gain Horn	X	S/A, Model 12-8.2
X-band horn (8.2- 12.4 GHz)	X	Narda 640
X-band horn (8.2- 12.4 GHz)		Scientific Atlanta , 12-8.2, SN: 730
K-band horn (18-26.5 GHz)	X	FXR, Inc., K638KF
Ka-band horn (26.5-40 GHz)	X	FXR, Inc., U638A
U-band horn (40-60 GHz)		Custom Microwave, HO19
W-band horn(75-110 GHz)		Custom Microwave, HO10
G-band horn (140-220 GHz)		Custom Microwave, HO5R
Bicone Antenna (30-250 MHz)	X	University of Michigan, RLBC-1
Bicone Antenna (200-1000 MHz)	X	University of Michigan, RLBC-2
Dipole Antenna Set (30-1000 MHz)	X	University of Michigan, RLDP-1,-2,-3
Dipole Antenna Set (30-1000 MHz)		EMCO 2131C, SN: 992
Active Rod Antenna (30 Hz-50 MHz)		EMCO 3301B, SN: 3223
Active Loop Antenna (30 Hz-50 MHz)		EMCO 6502, SN:2855
Ridge-horn Antenna (300-5000 MHz)	X	University of Michigan
Amplifier (5-1000 MHz)	X	Avantak, A11-1, A25-1S
Amplifier (5-4500 MHz)	X	Avantak
Amplifier (4.5-13 GHz)	X	Avantek, AFT-12665
Amplifier (6-16 GHz)	X	Trek
Amplifier (16-26 GHz)	X	Avantek
LISN Box		University of Michigan
Signal Generator		Hewlett-Packard 8657B

### 3. Configuration and Identification of Device Under Test

The DUT is a frequency hopping spread spectrum (FHSS) transmitter operating in 2400 - 2483.5 MHz band. The DUT is 5 x 1.5 x 3.5 inches, and connects to a peripheral laptop computer via a serial interface card for testing purposes. The system has been designed to operate with 79 channels spaced 1 MHz apart between 2402 MHz and 2480 MHz. The DUT has only one antenna built into the PCB. In all, three modules, differing only in digital automotive interface bus, were tested.

The DUT was designed and manufactured by Johnson Controls Interiors L.L.C., One Prince Center, Holland, MI 49423. It is identified as:

Johnson Controls Bluetooth Module  
Model: U-connect  
Modules: 05064022AC, 05091004AA, 05064013AC  
FCC ID: CB2UCONN  
IC: 279B-UCONN

#### Peripheral Equipment:

Laptop Computer	
Compaq Presario	SN: V745BQD22994
Model: Series 2940	FCC ID: CNTTAI-24639-TT-E
Serial Interface Card	SN: Proto1

In addition to a standard unit, a modified unit was provided by the manufacturer which had the internal antenna disabled and a SMA connector attached for conducted antenna measurement purposes.

#### 3.1 EMI Relevant Modifications

No modifications were made to the DUT by this laboratory during testing.

## 4. Emission Limits

### 4.1 Radiated Emission Limits

Since the DUT is a spread spectrum device (15.247, 2.4 GHz), the radiated emissions are subject to emissions in restricted bands only (15.205). The applicable frequencies, through ten harmonics, are given below in Table 4.1. Emission limits from digital circuitry are specified in Table 4.2.

**Table 4.1 Radiated Emission Limits (FCC:15.205; IC:RSS-210, 6.3) - Transmitter**

Frequency (MHz)	Fundamental Ave. E <sub>lim</sub> (3m)		Spurious* Ave. E <sub>lim</sub> (3m)	
	( $\mu$ V/m)	dB ( $\mu$ V/m)	( $\mu$ V/m)	dB ( $\mu$ V/m)
2400-2483.5	---		---	
2310-2390 2483.5-2500 4500-5250	Restricted Bands Bands		500	54.0
7250-7750 14470-14500 17700-21400 22010-23120 23600-24000	Restricted Bands		500	54.0

\* Measure up to tenth harmonic; 1 MHz res. BW, 100 Hz video BW (for average detection)

**Table 4.2 Radiated Emission Limits (FCC:15.109;IC: RSS-210, 7.3) - Digital device.**

Frequency (MHz)	Class A ds = 10 m		Class B ds = 3 m	
	( $\mu$ V/m)	dB ( $\mu$ V/m)	( $\mu$ V/m)	dB ( $\mu$ V/m)
30-88	90	39.0	100	40.0
88-216	150	43.5	150	43.5
219-960	210	46.4	200	46.0
960-	300	49.5	500	54.0

120 kHz BW up to 1 GHz, 1 MHz BW above 1 GHz

## 4.2 Conducted Emission Limits

**Table 4.3 Conducted Emission Limits (FCC:15.107; IC: RSS-210, 6.6).**

Frequency (MHz)	Class A		Class B	
	$\mu\text{V}$	$\text{dB}\mu\text{V}$	$\mu\text{V}$	$\text{dB}\mu\text{V}$
0.45-1.705	1000	60.0	250	48.0
1.705-30.0	3000	69.6	250	48.0

Note: Quasi-Peak readings apply here (9 kHz BW)

## 5. Radiated Emission Tests and Results

### 5.1 Anechoic Chamber Measurements

In our chamber, there is a set-up similar to that of an outdoor 3-meter site, with a turntable, an antenna mast, and a ground plane. Instrumentation includes spectrum analyzers and other equipment as needed. For these tests the receiver (horn) antennas were placed on a Styrofoam block, at about 1.2 m height, and the DUT on a turntable at 3 meter distance (moved to 1 m distance if needed).

Standard gain horn antennas were used for the measurements. Up to 7 GHz the horns were connected to a spectrum analyzer via RG-214 coaxial cable, and above 7 GHz a pre-amp was added. The cables and the pre-amplifier used were specially calibrated for these tests using a network analyzer.

The DUT antenna was rotated in all possible ways and the maximum emission recorded. A photograph in the Test Setup portion of this submittal shows the measurement set-up.

### 5.2 Outdoor Measurements

None made.

### 5.3 Computations and Results

To convert the dBm measured on the spectrum analyzer to  $\text{dB}(\mu\text{V}/\text{m})$ , we use expression

$$E_3(\text{dB}\mu\text{V}/\text{m}) = 107 + P_R + K_A - K_G + K_E$$

where

- $P_R$  = power recorded on spectrum analyzer, dB, measured at 3m
- $K_A$  = antenna factor, dB/m
- $K_G$  = pre-amplifier gain, including cable loss, dB
- $K_E$  = pulse operation correction factor, dB

When presenting the data, the dominant measured emissions at each frequency, under all of the possible orientations, are given. Computations and results are given in Table 5.1. There we see that in the worst case the DUT meets the limit by 9.8 dB at 4882 MHz.

Note, that besides the emission measurements, each table contains the frequency range of operation (in upper section of the table).

#### 5.4 Duty Factor for Normal Operation

No duty factor is used.

### 6. Other Measurements and Computations

#### 6.1 20 dB Bandwidth (15.247(a)(1)(ii))

For this test, the DUT was put in a test mode for continuous data transmission (hopping disabled). The DUT was placed in front of the horn antenna oriented for maximum radiation. The analyzer was set for RBW=10 kHz, VBW=10 kHz, SPAN= 2 MHz. The 20-dB bandwidth was measured for low, mid, and high channels used by the DUT. The maximum limit for 20dB bandwidth of a single channel is 1 MHz. The resulting measured data is below, and plots are shown in Figure 6.1.

<u>Channel</u>	<u>Frequency</u>	<u>20 dB BW</u>	<u>Limit (max)</u>
1	2.402 GHz	725 kHz	1 MHz
39	2.441 GHz	730 kHz	1 MHz
79	2.480 GHz	800 kHz	1 MHz

#### 6.2 Carrier Frequency Separation (15.247(a)(1))

For this test, the DUT was put in a test mode for data transmission (hopping enabled). The DUT was placed in front of the horn antenna at the location of maximum radiation. The analyzer was set for RBW=10 kHz, VBW= 30 kHz, SPAN= 1.8 MHz. The Carrier Frequency Separation was measured for low, mid, and high channels used by the DUT. A minimum carrier separation of 25 kHz, or the 20 dB bandwidth of the hopping channel, whichever is larger, is required. The resulting measured data is below, and plots are shown in Figure 6.2.

<u>Channel</u>	<u>Frequency</u>	<u>Separation</u>	<u>Limit (min)</u>
1	2.402 GHz		
2	2.403 GHz	1.005 MHz	725 kHz
38	2.440 GHz		
39	2.441 GHz	1.010 MHz	730 kHz
78	2.479 GHz		
79	2.480 GHz	1.000 MHz	800 kHz

Note: The different operating modes (data-mode, acquisition-mode) of a Bluetooth device do not influence the channel spacing. There is only one transmitter which is driven by identical input parameters concerning this parameter.

#### 6.3 Number of Hopping Frequencies (15.247(a)(1)(ii))

For this test, the DUT was put in a test mode for data transmission (hopping enabled). The DUT was placed in front of the horn antenna at the location of maximum radiation. The analyzer was set for RBW=30 kHz, VBW=30 kHz, SPAN as needed. The total number of hopping channels must be 75 or greater. The number of measured channels is below, and plots are shown in Figure 6.3.

<u>Frequency Range</u>	<u>Number of Channels</u>	<u>Total</u>	<u>Limit</u>
2402.0 – 2428.5	27		
2430.0 – 2454.5	26	79	>75
2455.0 – 2483.5	26		

#### 6.4 Single-Channel Dwell Time (15.247(a)(1)(ii))

For this test, the DUT was put in a test mode for data transmission (hopping enabled). The DUT was placed in front of the horn antenna at the location of maximum radiation. The analyzer was set for RBW= 1 MHz, VBW= 3 MHz, SPAN= 0 Hz. The limit for total average dwell time in a single channel must be less than 0.4sec in a 30sec period. The dwell time was measured at the low channels and the results are listed below. Plots are shown in Figure 6.4.

<u>Channel</u>	<u>Frequency</u>	<u>Num. Pulses</u>	<u>Active Time</u>	<u>Total</u>	<u>Limit (max)</u>
1	2.402 GHz	21	2.95ms	0.062 sec	0.4 sec

Note: The measured dwell time above may not indicate the actual single channel dwell time of the DUT. A dwell time of 0.3797 seconds within a 30 second period in data mode is independent from the packet type (packet length) for all Bluetooth devices. Therefore, all Bluetooth devices comply with the FCC dwell time requirement in the data mode.

#### 6.5 Peak-to-Average Ratio (15.35(b))

The measured difference between peak and average is always greater than 20 dB for a Bluetooth device. Therefore, peak power radiated emissions are measured, and peak limits (average limit + 20 dB) are applied.

#### 6.6 Peak and Average Output Power (15.247(b))

For this test, the DUT was put in a test mode for data transmission (hopping disabled). Peak power measurements were made using 1 MHz RBW and 3 MHz VBW on the Spectrum Analyzer. The power was measured from the RF port of DUT (a modified module was provided from the manufacturer for this purpose; the antenna is not generally removable). Table 6.2 presents the results. The maximum peak output power limit is 30dBm (1 Watt).

**Table 6.2a Peak Output Power (Antenna Conducted)**

Freq (MHz)	Peak P(dBm)	Peak Limit (dBm)
2402	1.25	30
2441	1.46	30
2480	1.73	30

Note: The different operating modes (data-mode, acquisition-mode) of a Bluetooth device do not influence the output power. There is only one transmitter which is driven by identical input parameters concerning this parameter.

Note: In the original filing, the maximum measured peak output power was reported as 4.7 dBm at 2480 MHz. The current measurement is lower by 3 dB. We cannot explain this difference. We attempted to locate the original module, but were unable to do so. The best we could do was to re-measure a sample from the original design and for that we obtained the following:

**Table 6.2b Peak Output Power – Original Filing (Antenna Conducted)**

Freq (MHz)	Peak P(dBm)	Peak Limit (dBm)
2402	1.26	30
2441	1.67	30
2480	1.86	30

Also note that both the original and current modules use the same Power Class 3 (0 dBm) chip. Again, we cannot explain the higher output power in the original filing.

### 6.7 Potential Health Hazard EM Radiation Level

It has been determined that the DUT output power is less than 10 mW (10 dBm), and given the low gain of the PCB antenna (~1 dBi), no health hazard exists beyond the physical dimensions of the DUT. The following table summarizes the minimum operating distance for this device as calculated from FCC OET Bulletin 65.

**Table 6.3 Potential Health Hazard Radiation Level**

Ant.	Ant.Gain (dB)	Po (mW)	EIRP (mW)	R (cm)
PCB	1	1.5	3.55	0.39

The following equations were used in calculating the operating distance (R).

$$EIRP(mW) = Po(mW) \cdot 10^{\frac{Gain(dB)}{10}}$$

and

$$R = \sqrt{\frac{EIRP(mW)}{4 \cdot \pi \cdot S(mW/cm^2)}}, S = 1mW/cm^2$$

### 6.8 Power Line Conducted Emissions (15.270)

No power line conducted emissions were measured as this device operates from a 12 VDC system.

### 6.9 RF Antenna Spurious Emissions (15.247(c))

For this test, the DUT was put in a test mode for data transmission (hopping disabled). The spectrum analyzer was connected where the antenna attaches to the system. The analyzer was set for RBW= 100 kHz, VBW= 300 kHz, the frequency was swept from 0 to 25 GHz. The DUT was measured for 3 channels used in the system. See Figure 6.5. In all cases, the noise is at least 30 dB below the carrier. (Limit -20.0 dB below carrier).

### 6.10 Band Edge Emissions (15.247(c))

For this test, the DUT was put in a test both hopping and non-hopping test modes. The spectrum analyzer was connected where the antenna attaches to the system. The analyzer was set for RBW=100 kHz, VBW=300 kHz, with the SPAN=5 MHz. The DUT was measured for low and high channels used in the system. Figures 6.6 and 6.7 show the band edge emissions, as summarized below.



Not Hopping

<u>Channel</u>	<u>Frequency</u>	<u>Band Edge</u>	<u>Attenuation</u>	<u>Limit(max)</u>
1	2402.0 MHz	2400.0 MHz	-54.4 dB	-20 dB
79	2480.0 MHz	2483.5 MHz	-57.7 dB	-20 dB

Hopping

<u>Channel</u>	<u>Frequency</u>	<u>Band Edge</u>	<u>Attenuation</u>	<u>Limit(max)</u>
1	2402.0 MHz	2400.0 MHz	-47.2 dB	-20 dB
79	2480.0 MHz	2483.5 MHz	-47.2 dB	-20 dB

The University of Michigan  
Radiation Laboratory  
3228 EECS Building  
Ann Arbor, Michigan 48109-2122  
(734) 764-0500

**Table 5.1 Highest Emissions Measured**

Radiated Emissions										JCI BlueConnect II
#	Freq. MHz	Ant. Used	Ant. Pol.	Peak dBm	Ka dB/m	Kg dB	E3 (Pk) dBμV/m	E3lim (Pk) dBμV/m	Pass dB	Comments
1	2402.0									Low channel
2	2441.0									Mid channel
3	2480.0									High channel
4	Module: 05064022AC									
5	2390.0	Horn S	H/V	-74.9	21.5	- 0.6	54.2	74.0	19.8	Low, noise
6	2390.0	Horn S	H/V	-75.2	21.5	- 0.6	53.9	74.0	20.1	Mid, noise
7	2390.0	Horn S	H/V	-74.9	21.5	- 0.6	54.2	74.0	19.8	High, noise
8	2483.5	Horn S	H/V	-74.4	21.5	- 0.6	54.7	74.0	19.3	Low, noise
9	2483.5	Horn S	H/V	-75.3	21.5	- 0.6	53.8	74.0	20.2	Mid, noise
10	2483.5	Horn S	H/V	-68.7	21.5	- 0.6	60.4	74.0	13.6	High
11	4804.0	Horn C	H/V	-32.3	25.5	37.0	63.2	74.0	10.8	Low
12	4882.0	Horn C	H/V	-31.3	25.5	37.0	64.2	74.0	<b>9.8</b>	Mid
13	4960.0	Horn C	H/V	-35.9	25.5	37.0	59.6	74.0	14.4	High
14	7206.0	Horn XN	H/V	-	25.5	36.0	-	N/A	-	Low
15	7323.0	Horn XN	H/V	-42.8	25.5	36.0	53.7	74.0	20.3	Mid
16	7440.0	Horn XN	H/V	-39.5	25.5	36.0	57.0	74.0	17.0	High
17	12010.0	Horn X	H/V	-60.1	25.5	34.0	38.4	74.0	35.6	Low, noise
18	12205.0	Horn X	H/V	-60.0	25.5	34.0	38.5	74.0	35.5	Mid, noise
19	12400.0	Horn X	H/V	-61.7	25.5	34.0	36.8	74.0	37.2	High, noise
20	14412.0	Horn Ku	H/V	-	32.3	17.3	-	N/A	-	Low
21	14472.0	Horn Ku	H/V	-59.4	32.3	34.0	45.9	74.0	28.1	Mid
22	14880.0	Horn Ku	H/V	-	32.3	34.0	-	N/A	-	High
23	19216.0	Horn K	H/V	-61.8	32.3	32.0	45.5	74.0	28.5	Low
24	19528.0	Horn K	H/V	-59.2	32.3	32.0	48.1	74.0	25.9	Mid
25	19840.0	Horn K	H/V	-58.8	32.3	32.0	48.5	74.0	25.5	High
26	21618.0	Horn K	H/V	-	32.3	32.0	-	N/A	-	Low
27	21969.0	Horn K	H/V	-	32.3	32.0	-	N/A	-	Mid
28	22320.0	Horn K	H/V	-56.5	32.3	32.0	50.8	74.0	23.2	High
29										
30	Worst Case Emissions From other Models/Modules									
31	Module: 05091004AA									
32	4804.0	Horn C	H/V	-35.4	25.5	37.0	60.1	74.0	13.9	Low
33	4882.0	Horn C	H/V	-32.8	25.5	37.0	62.7	74.0	<b>11.3</b>	Mid
34	4960.0	Horn C	H/V	-34.6	25.5	37.0	60.9	74.0	13.1	High
35	Module: 05064013AC									
36	4804.0	Horn C	H/V	-34.3	25.5	37.0	61.2	74.0	12.8	Low
37	4882.0	Horn C	H/V	-31.9	25.5	37.0	63.6	74.0	<b>10.4</b>	Mid
38	4960.0	Horn C	H/V	-34.8	25.5	37.0	60.7	74.0	13.3	High
39	* Peak: measured with 1 MHz RBW and 3 MHz VBW									
40	* Average measurements were not made, as the Pk to Avg ratio is greater than 20 dB (FCC 15.35)									
41	Note: Digital emissions were more than 20 dB below FCC/IC Class B Limit.									
42										

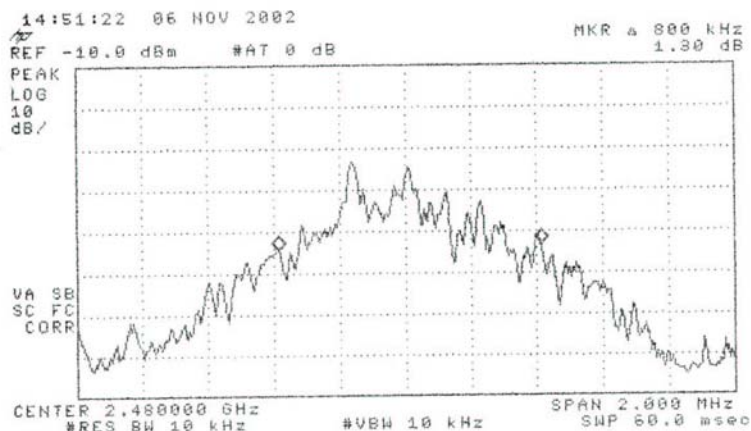
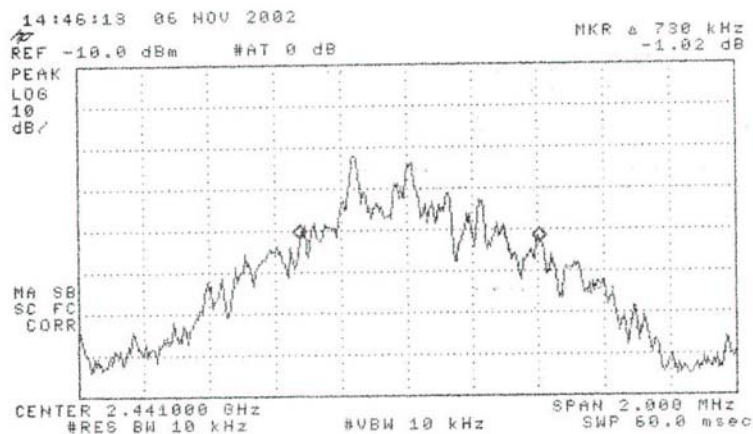
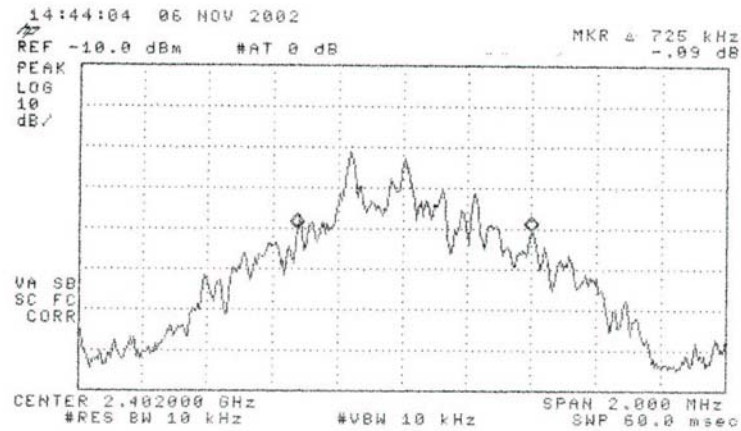


Figure 6.1 Measurement of channel 20 dB bandwidth.  
(top) Low Channel, (middle) Middle Channel, (bottom) High Channel

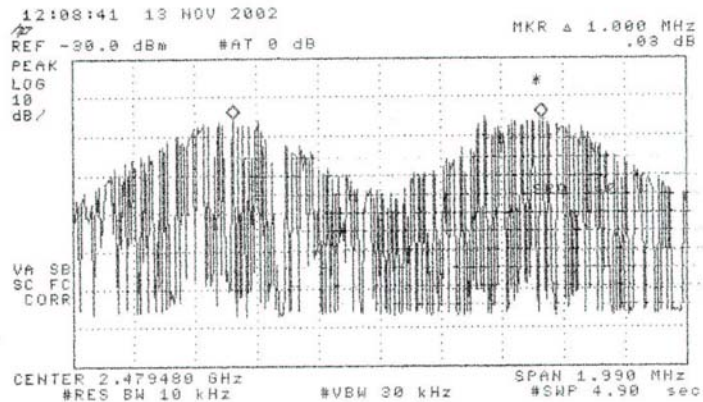
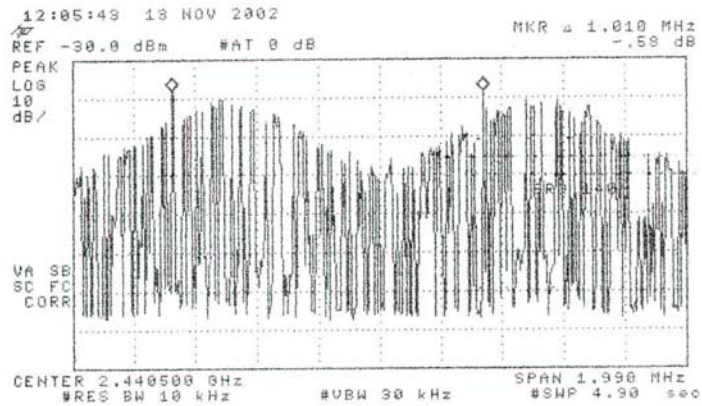
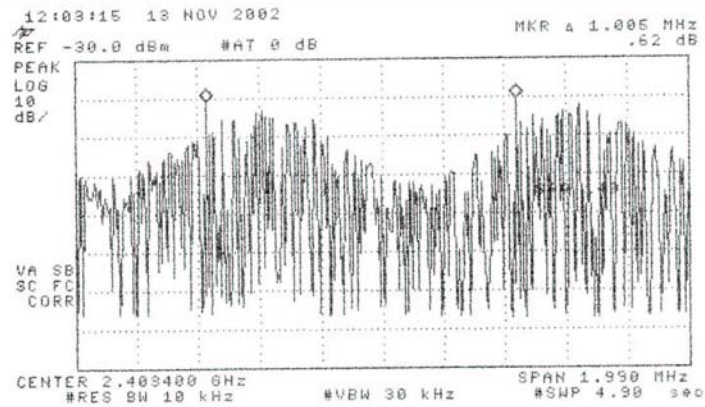


Figure 6.2 Carrier Frequency Separation.  
(top) Low Channel, (middle) Middle Channel, (bottom) High Channel

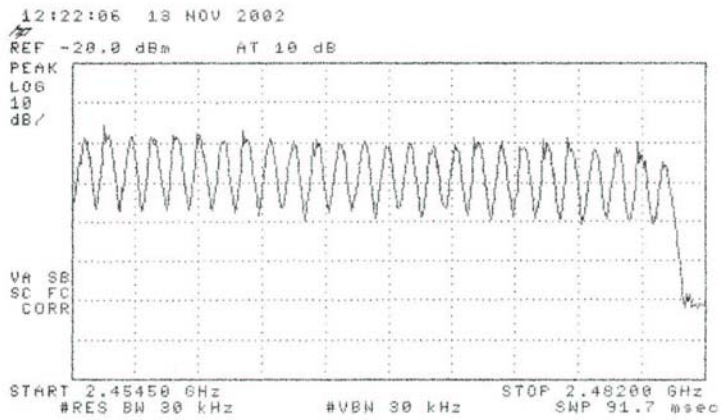
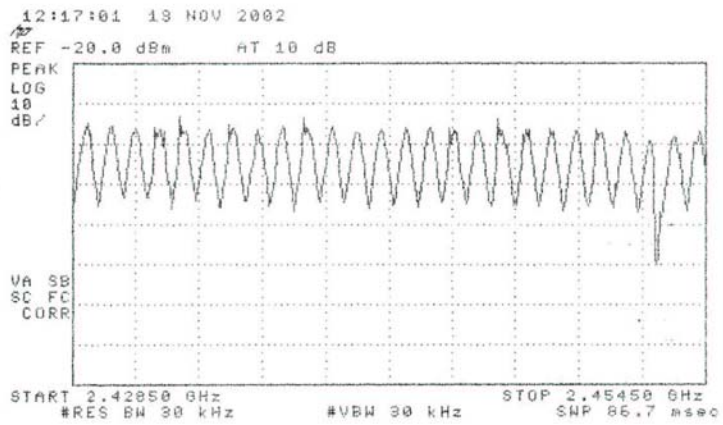
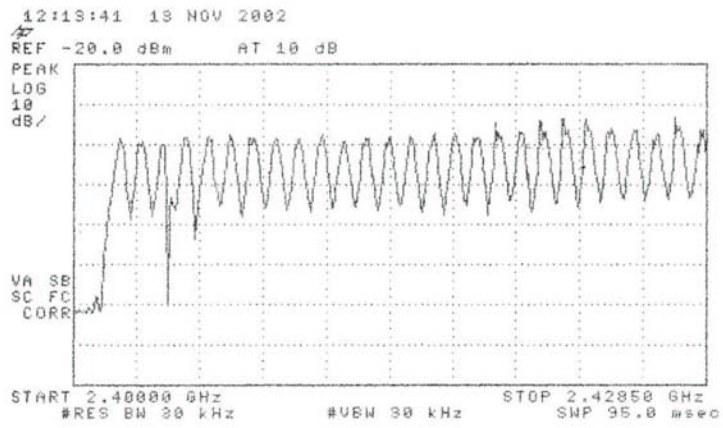


Figure 6.2 Number of Hopping Frequencies.  
(top) low, (middle) middle, (bottom) high portion of band

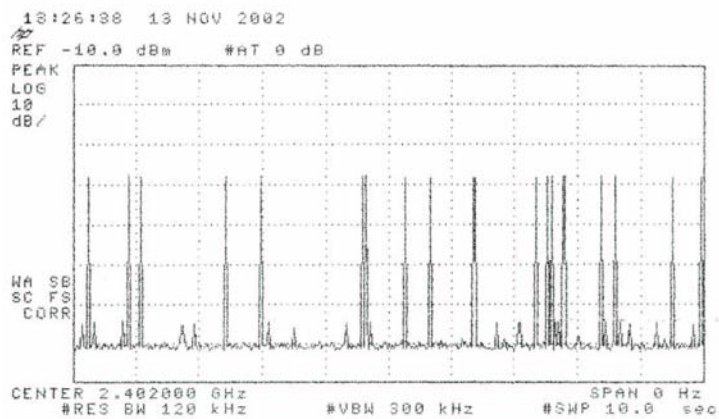
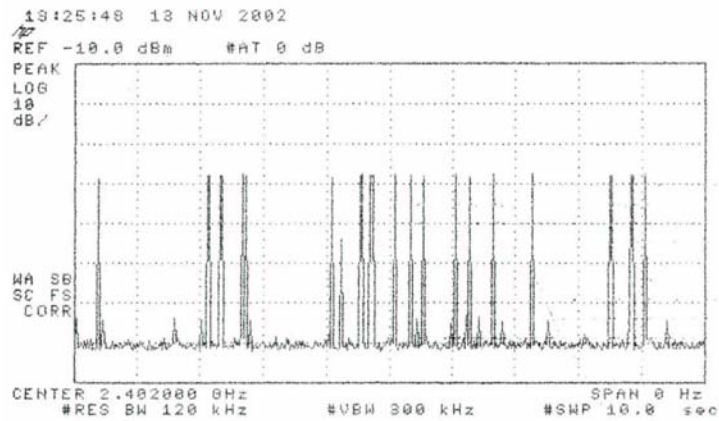
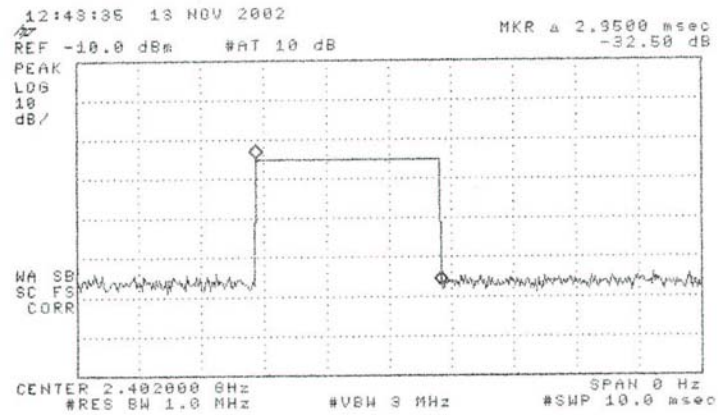


Figure 6.4 Single Channel Dwell Time.  
 (Top – maximum on time per pulse, Bottom – two samples of pulses in 10 sec period)



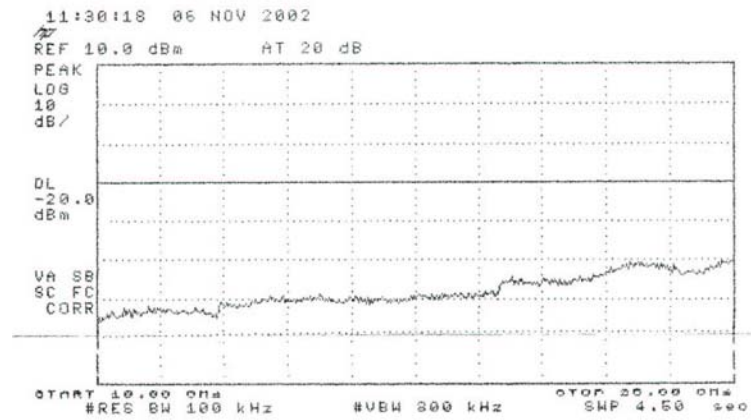
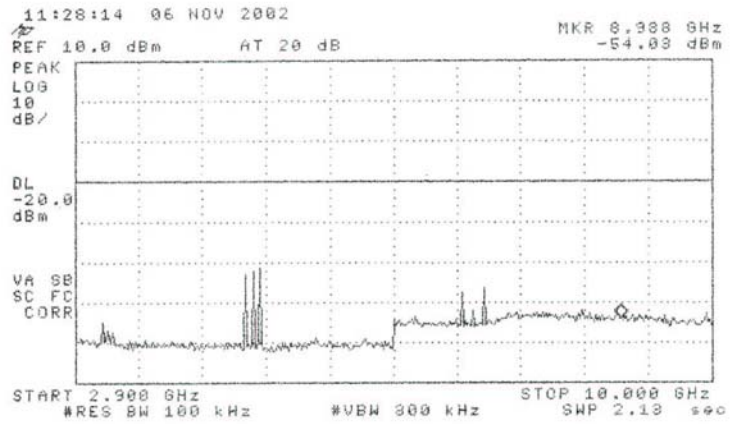
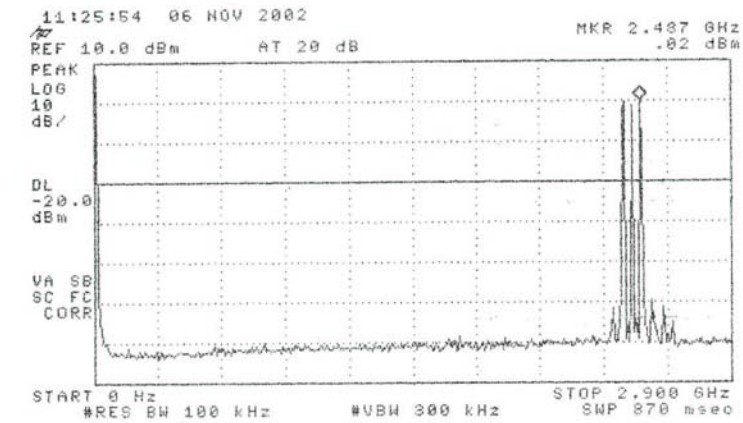


Figure 6.5 Antenna Conducted Spurious Emissions.  
(all channels)

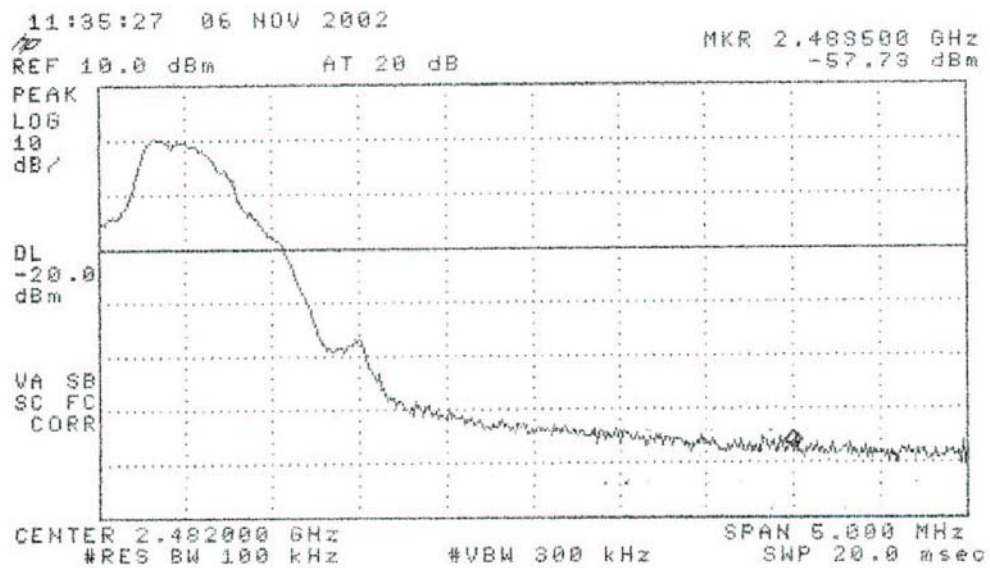
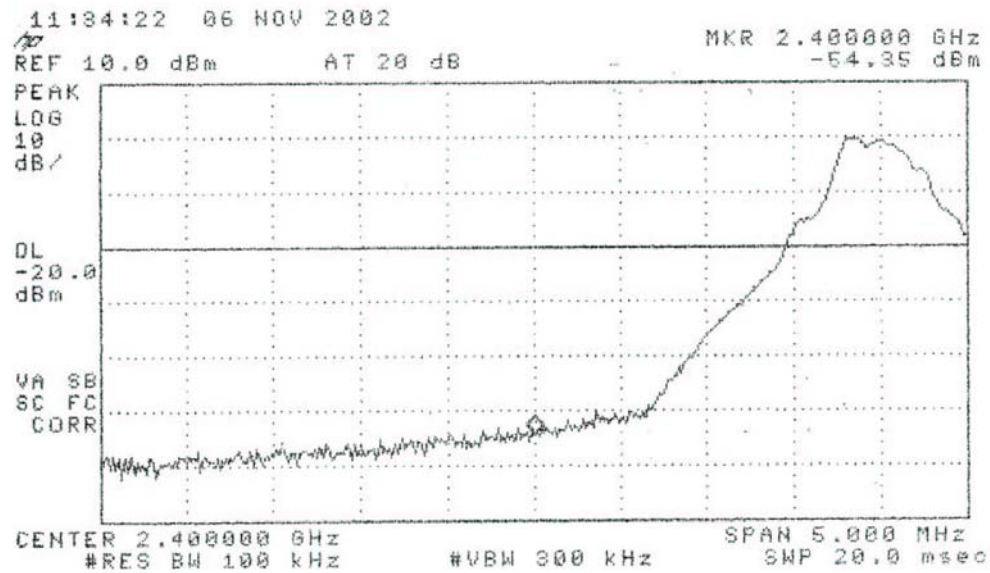


Figure 6.6 Band edge emissions – NOT HOPPING.  
(top) Low Channel, (bottom) High Channel



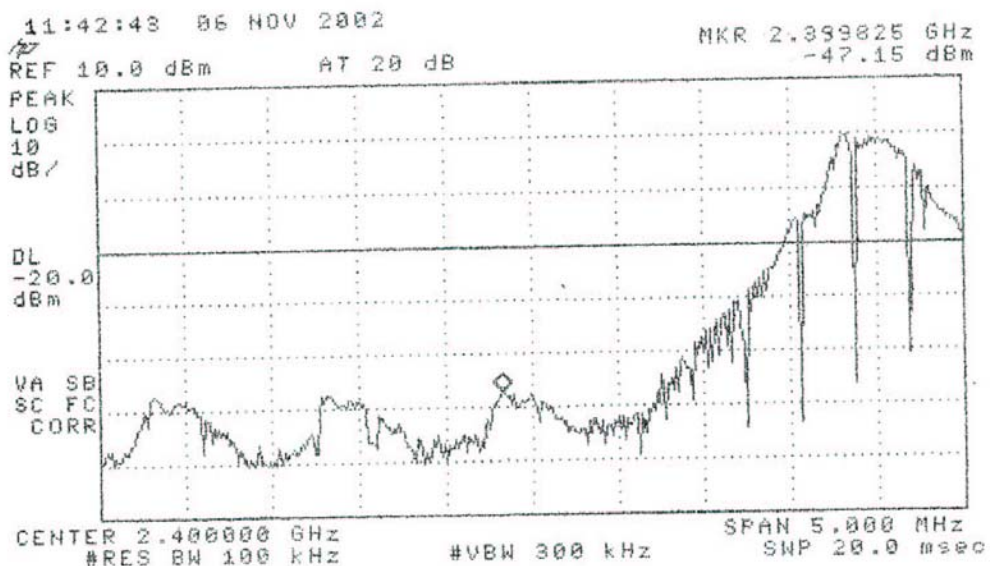
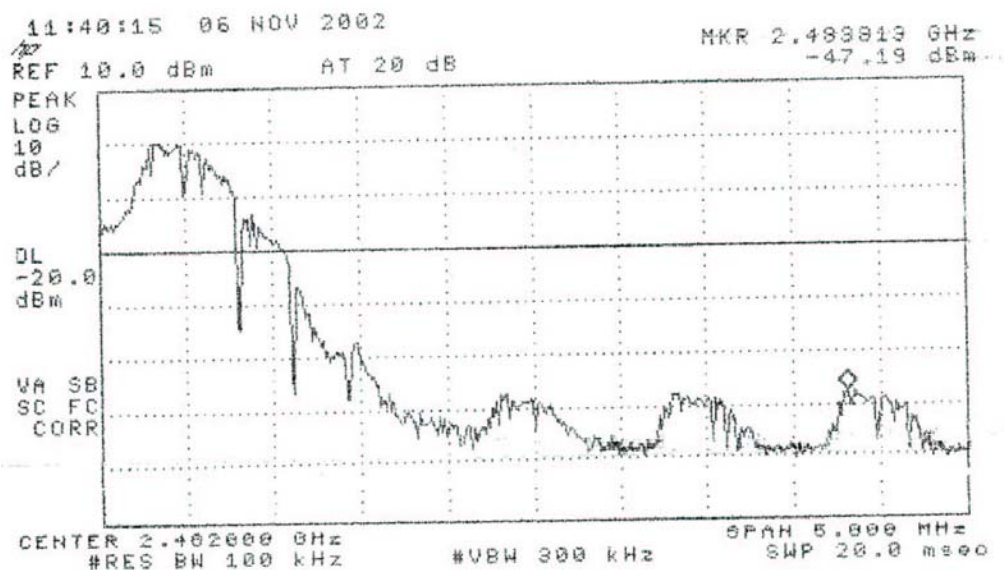


Figure 6.7 Band edge emissions - HOPPING.  
(top) Low Channel, (bottom) High Channel