



HERMON LABORATORIES

Test specification:		Section 96.41(e), Emission mask	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
15-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.24 Emission outside the fundamental test results at high carrier frequency

CHANNEL SPACING:





ANTENNA CHAIN:

Modulation: QPSK

40 MHz

4

Modulation: 256QAM

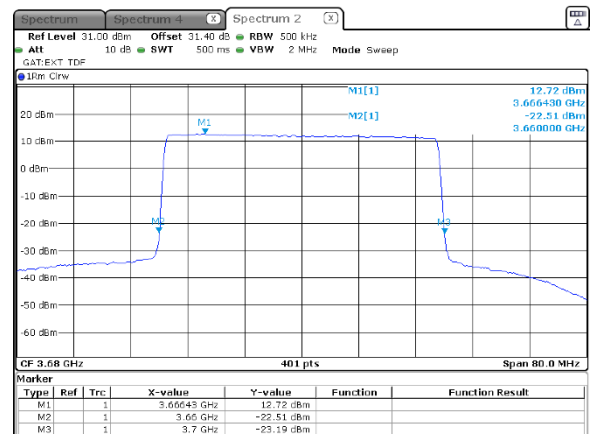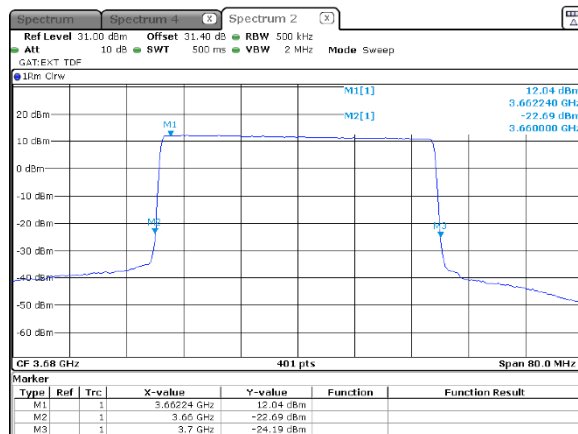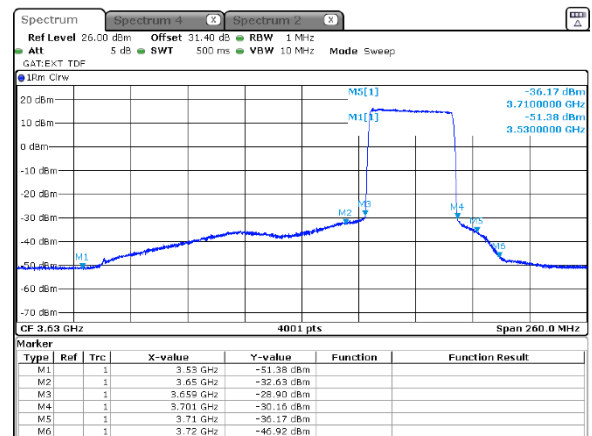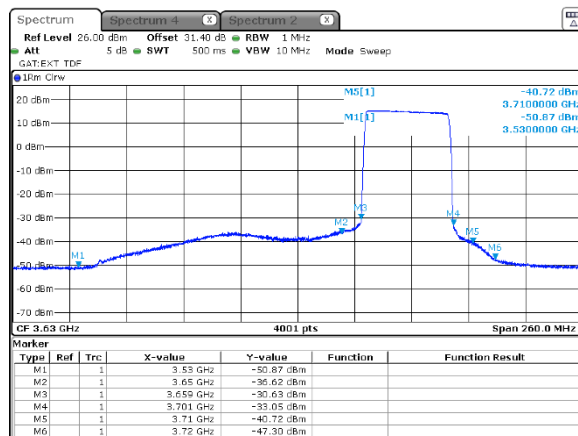



Test specification: Section 96.41(e)(2), Radiated spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

7.5 Radiated spurious emission measurements

7.5.1 General

This test was performed to measure radiated spurious emissions from the EUT. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Radiated spurious emission test limits

Frequency, MHz	EIRP of spurious, dBm	Equivalent field strength limit @ 3m, dB(μV/m)***
0.09 – below 3530.0	-40.0	55.2
3720.0 – 10th harmonic*	-40.0	55.2

*** - Equivalent field strength limit was calculated from maximum allowed ERP of spurious as follows:
 $E = \sqrt{30 \times P \times 1.64} / r$, where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

7.5.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and the performance check was conducted.

7.5.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.5.2.3 The worst test results (the lowest margins) were recorded in Table 7.5.2 and shown in the associated plots.

7.5.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.5.3.1 The EUT was set up as shown in Figure 7.5.2, energized and the performance check was conducted.

7.5.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.

7.5.3.3 The worst test results (the lowest margins) were recorded in Table 7.5.2 and shown in the associated plots.



HERMON LABORATORIES

Test specification: Section 96.41(e)(2), Radiated spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Figure 7.5.1 Setup for spurious emission field strength measurements in 9 kHz to 30 MHz band


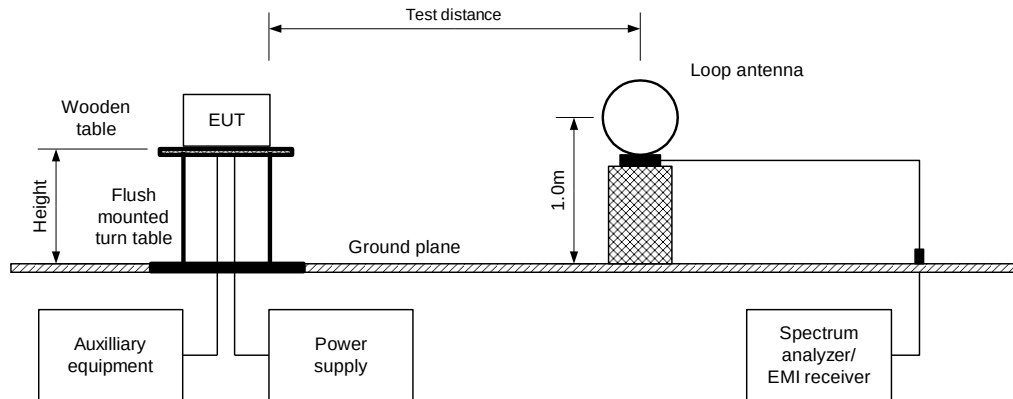


Figure 7.5.2 Setup for spurious emission field strength measurements above 30 MHz



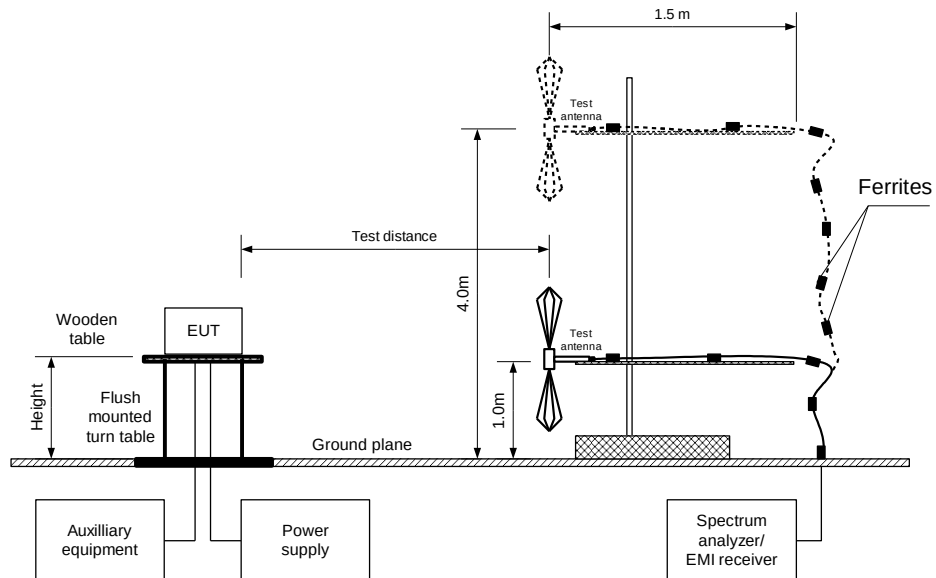

Test specification:		Section 96.41(e)(2), Radiated spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
04-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Table 7.5.2 Spurious emission field strength test results

ASSIGNED FREQUENCY RANGE: 3550 - 3700 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 DETECTOR USED: Peak
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 MODULATION: QPSK
 CHANNEL BANDWIDTH: 40 MHz
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	RBW, kHz	Antenna polarization	Antenna height, m	Turn-table position**, degrees
32.237	41.46	55.20	-13.74	100	Horizontal	1.02	95.0
38.569	34.95	55.20	-20.25	100	Horizontal	1.00	131.0
43.310	37.99	55.20	-17.21	100	Horizontal	1.00	-166.0
59.659	31.81	55.20	-23.39	100	Horizontal	1.02	-58.0
95.014	27.76	55.20	-27.44	100	Horizontal	1.02	177.0
263.996	35.96	55.20	-19.24	100	Horizontal	1.02	-106.0



HERMON LABORATORIES

Test specification: Section 96.41(e)(2), Radiated spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Table 7.5.3 Field strength of spurious emissions above 1 GHz

ASSIGNED FREQUENCY RANGE: 3550 - 3700 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 DETECTOR USED: Peak
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)
 MODULATION: QPSK
 CHANNEL BANDWIDTH: 40 MHz
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)			Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency 3570 MHz										
1040.175	Vertical	1.0	-136	35.58	75.2	-39.62	35.58	55.2	-19.62	Pass
1267.227	Horizontal	1.0	-54	42.48	75.2	-32.72	42.48	55.2	-12.72	Pass
13379.415	Horizontal	1.0	-29	49.80	75.2	-25.40	49.80	55.2	-5.40	Pass
13500.098	Vertical	1.0	-136	50.50	75.2	-24.70	50.50	55.2	-4.70	Pass
Mid carrier frequency 3625 MHz										
1267.227	Horizontal	1.0	-53	42.26	75.2	-32.94	42.26	55.2	-12.94	Pass
1536.112	Vertical	1.0	-121	36.52	75.2	-38.68	36.52	55.2	-18.68	Pass
4266.610	Vertical	1.0	114	42.16	75.2	-33.04	42.16	55.2	-13.04	Pass
High carrier frequency 3680 MHz										
1267.227	Horizontal	1.0	-52	39.68	75.2	-35.52	39.68	55.2	-15.52	Pass
3071.939	Horizontal	1.0	-164	38.13	75.2	-37.07	38.13	55.2	-17.07	Pass
13286.598	Vertical	1.0	-168	48.29	75.2	-26.91	48.29	55.2	-6.91	Pass

Reference numbers of test equipment used

HL 0446	HL 3903	HL 4280	HL 4360	HL 4933	HL 4956	HL 5112	HL 5288
HL 5902							

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		Section 96.41(e)(2), Radiated spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
04-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.1 Radiated emission measurements in 9 kHz - 30 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Low
TEST DISTANCE: 3 m

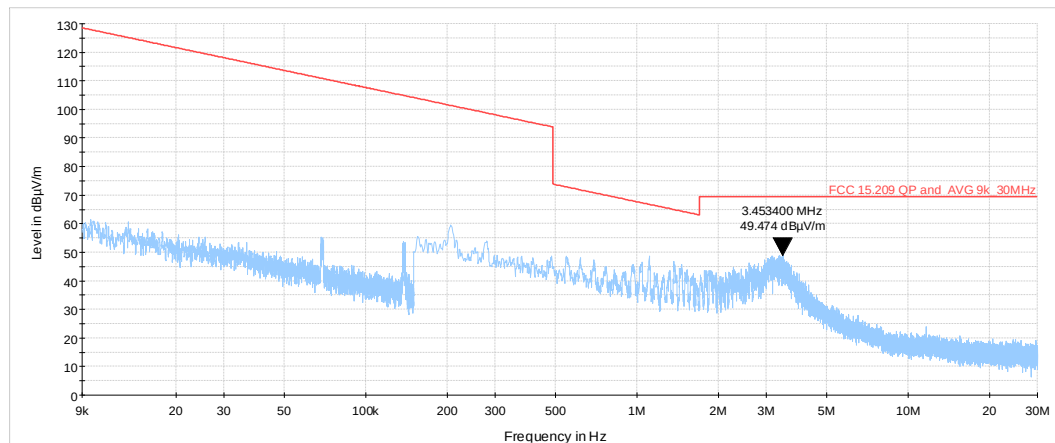

Plot 7.5.2 Radiated emission measurements in 9 kHz - 30 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Mid
TEST DISTANCE: 3 m

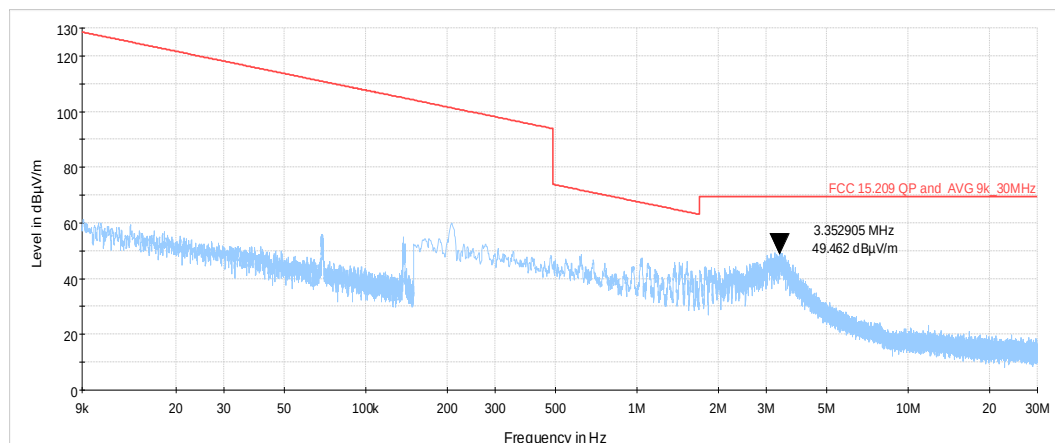




HERMON LABORATORIES

Test specification: Section 96.41(e)(2), Radiated spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.3 Radiated emission measurements in 9 kHz - 30 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: High
TEST DISTANCE: 3 m

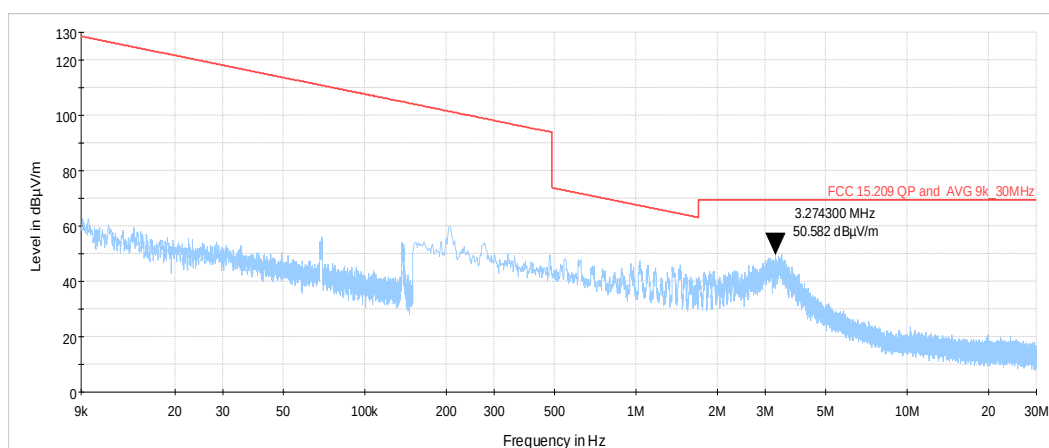




HERMON LABORATORIES

Test specification: Section 96.41(e)(2), Radiated spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.4 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	Low
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

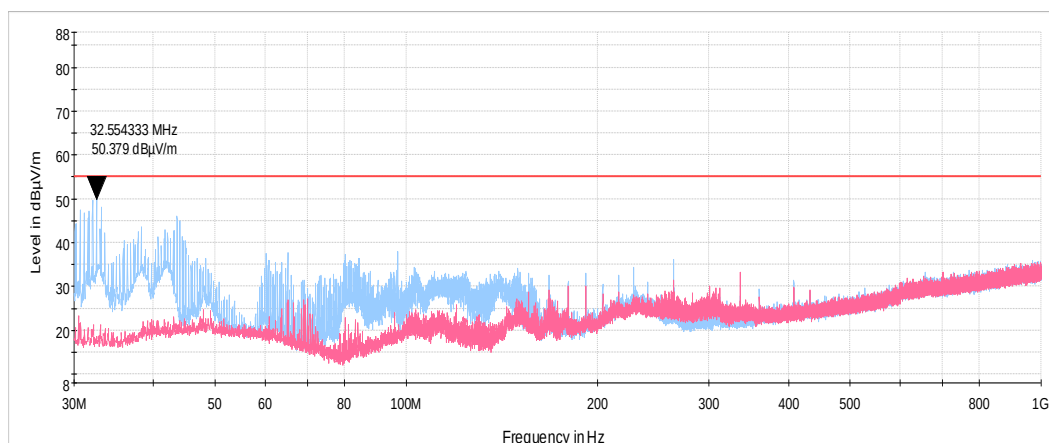

Plot 7.5.5 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	Mid
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

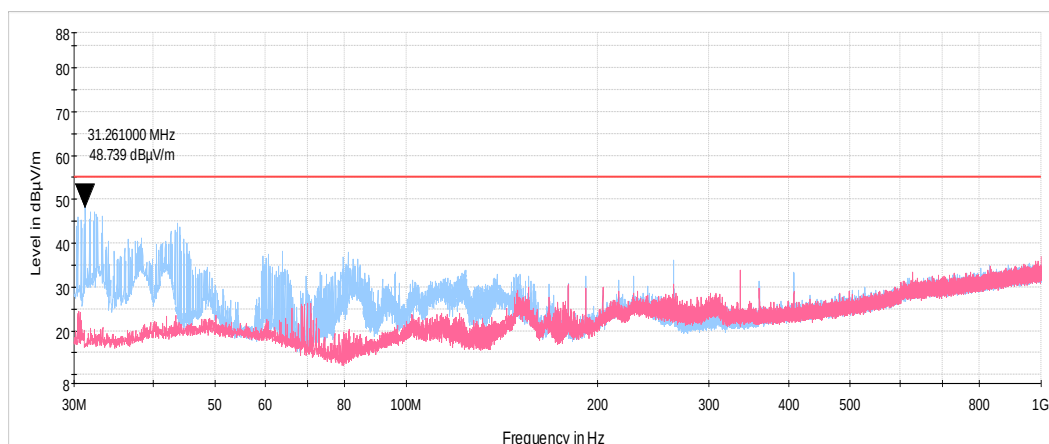




HERMON LABORATORIES

Test specification:		Section 96.41(e)(2), Radiated spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
04-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.6 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	High
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

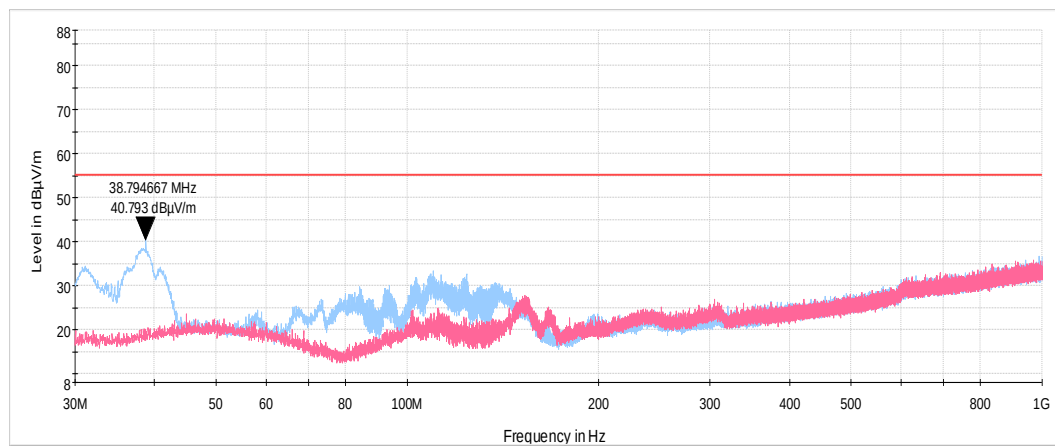




HERMON LABORATORIES

Test specification: Section 96.41(e)(2), Radiated spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.7 Radiated emission measurements in 1000 –18000 MHz range


TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Low
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

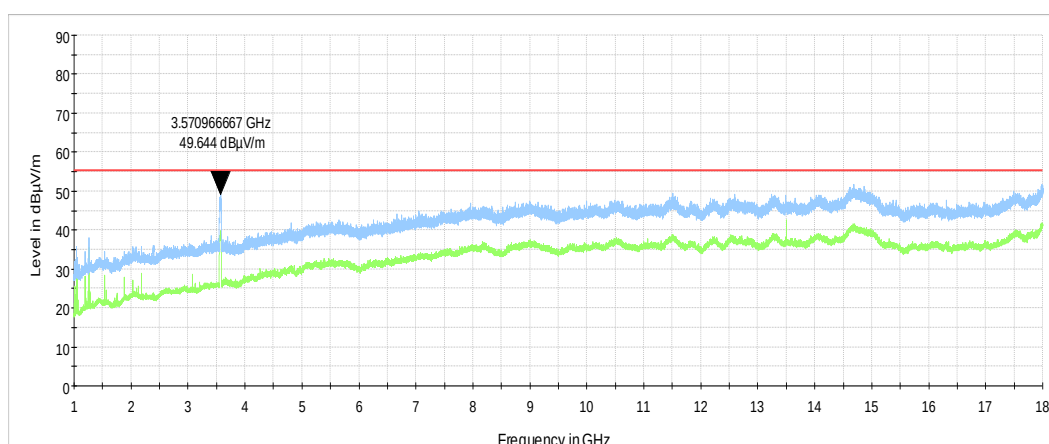

Note: 3570.9 MHz – low fundamental frequency

Plot 7.5.8 Radiated emission measurements in 1000 –18000 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Mid
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

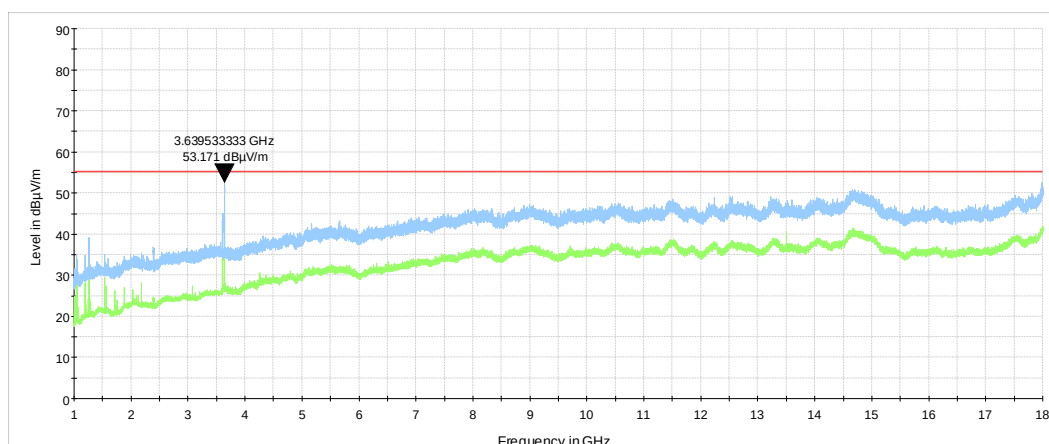

Note: 3639.5 MHz – mid fundamental frequency




HERMON LABORATORIES

Test specification: Section 96.41(e)(2), Radiated spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.9 Radiated emission measurements in 1000 –18000 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	High
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

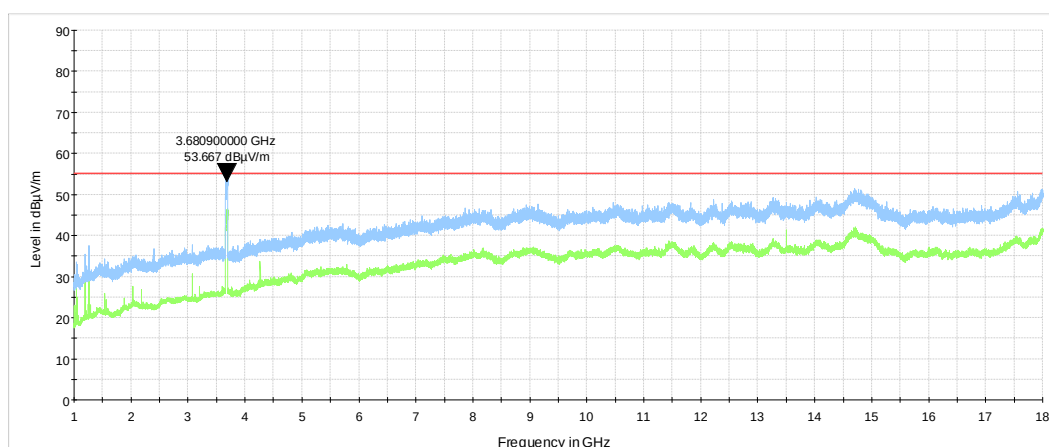

Note: 3680.9 MHz – high fundamental frequency




HERMON LABORATORIES

Test specification: Section 96.41(e)(2), Radiated spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 04-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.10 Radiated emission measurements in 18000 –37000 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Low
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

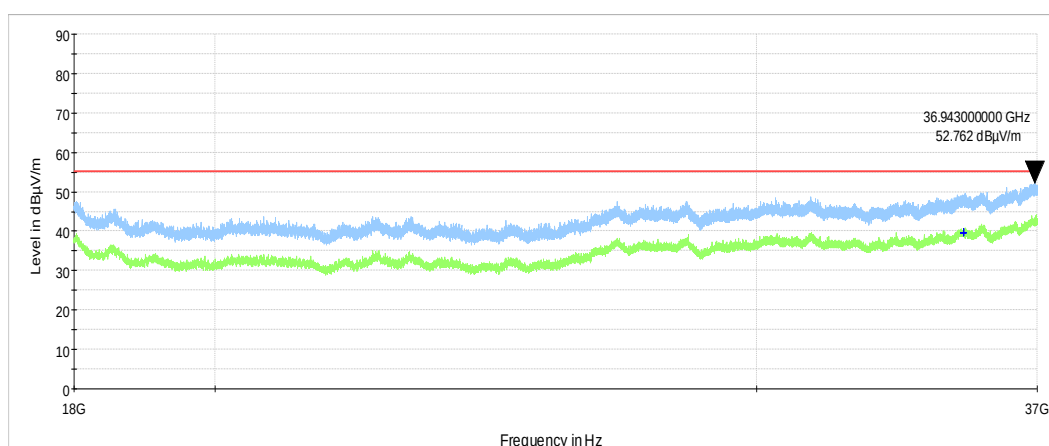

Plot 7.5.11 Radiated emission measurements in 18000 –37000 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Mid
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

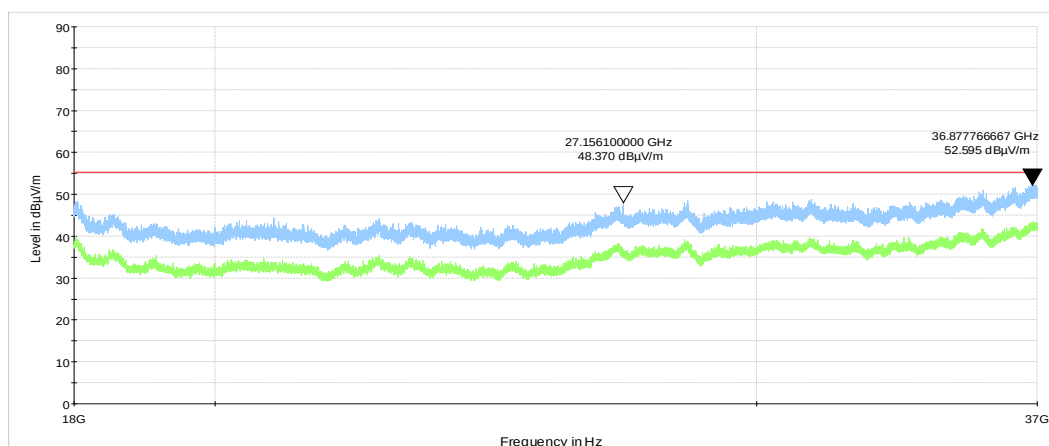




HERMON LABORATORIES

Test specification:		Section 96.41(e)(2), Radiated spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
04-Nov-21			
Temperature: 25 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.12 Radiated emission measurements in 18000 –37000 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	High
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

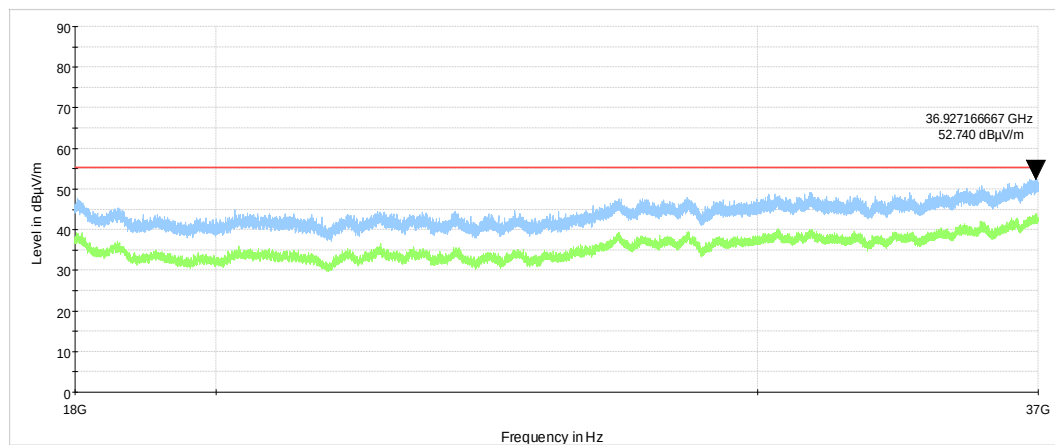



Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

7.6 Spurious emissions at RF antenna connector test

7.6.1 General

This test was performed to measure spurious emissions at RF antenna connector. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Spurious emission limits

Frequency, MHz	Conducted power of spurious, dBm/MHz
0.009 – below 3530.0	-40.0
3720.0 – 10th harmonic*	-40.0


7.6.2 Test procedure

7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and its proper operation was checked.

7.6.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.6.2.3 The spurious emission was measured with spectrum analyzer as provided in Table 7.6.2 and associated plots.

Figure 7.6.1 Spurious emission test setup





HERMON LABORATORIES

Test specification:		Section 96.41(e)(3), Conducted spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Table 7.6.2 Spurious emission test results

ASSIGNED FREQUENCY RANGE: 3550 - 3700 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 37000 MHz
 DETECTOR USED: Peak
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 MODULATION: QPSK
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 NUMBER ANTENNA PORTS: N = 4

Frequency, MHz	Average power (RMS)				Verdict
	Maximun emission per chain, dBm**	Total emission, dBm***	Limit, dBm	Margin, dB*	
Channel bandwidth 20 MHz					
Low carrier frequency 3560 MHz					
3058.87	-47.41	-41.41	-40.00	-1.41	Pass
Mid carrier frequency 3625 MHz					
3073.32	-47.33	-41.33	-40.00	-1.33	Pass
High carrier frequency 3690 MHz					
3099.05	-48.08	-42.08	-40.00	-2.08	Pass
Channel bandwidth 40 MHz					
Low carrier frequency 3570 MHz					
3067.03	-51.50	-45.5	-40.00	-5.50	Pass
Mid carrier frequency 3625 MHz					
3024.91	-52.08	-46.08	-40.00	-6.08	Pass
High carrier frequency 3680 MHz					
3730.08	-51.08	-45.08	-40.00	-5.08	Pass

*- Margin = Total spurious emission - specification limit.

** - Total emission = Maximum emission per chain + 10*log(N)

** - SA Reading over 1 chain = Max SA reading (Chains #1&2 or chains #3&4)

Reference numbers of test equipment used

HL 3287	HL 3301	HL 3302	HL 5642	HL 3356	HL 3433	HL 3434	HL 3435
HL 3818	HL 4355	HL 5637	HL 5174	HL 5286	HL 5409	HL 5611	

Full description is given in Appendix A.




HERMON LABORATORIES


Test specification:		Section 96.41(e)(3), Conducted spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.1 Spurious emission measurements in 9 - 150 kHz range at low carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

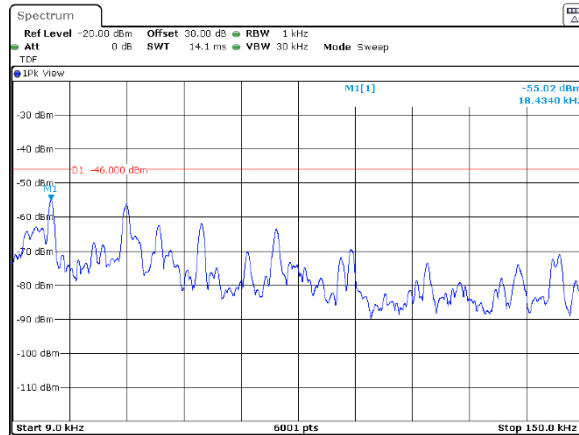


QPSK
20 MHz
ANTENNA CHAIN: #2

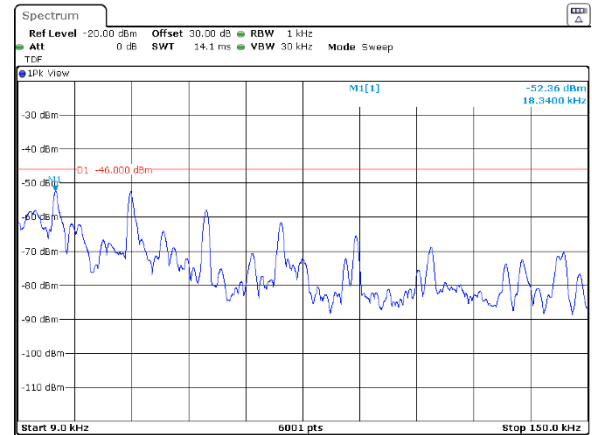

ANTENNA CHAIN: #3

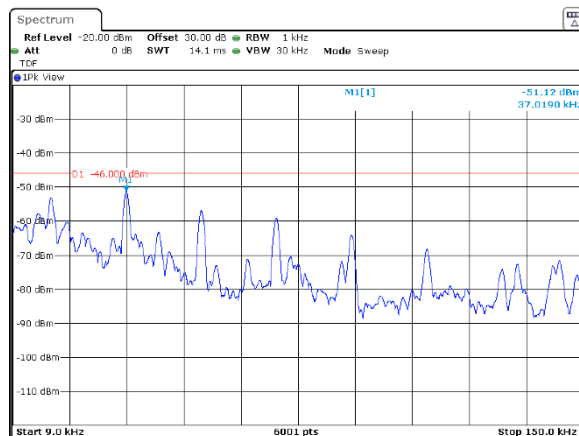

ANTENNA CHAIN: #4

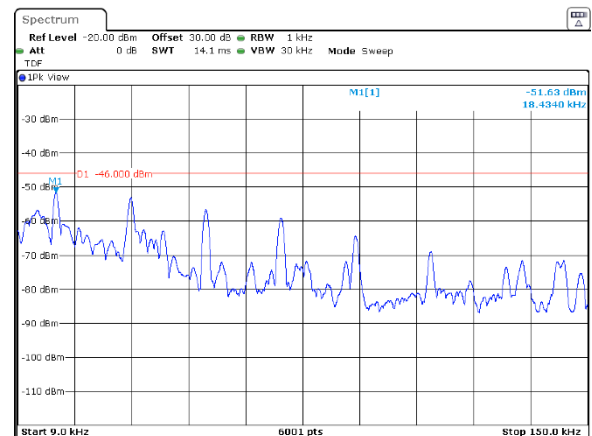




HERMON LABORATORIES


Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.2 Spurious emission measurements in 9 - 150 kHz range at mid carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

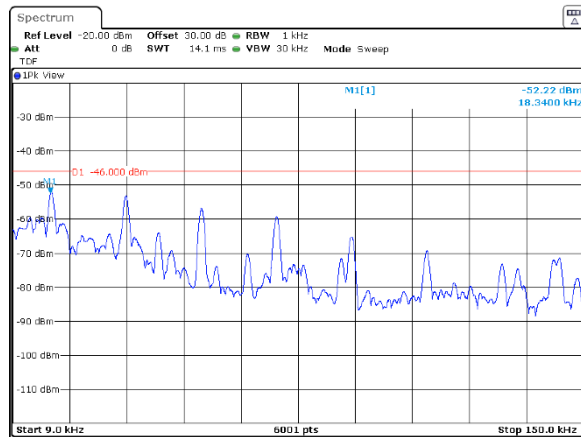


ANTENNA CHAIN: #3

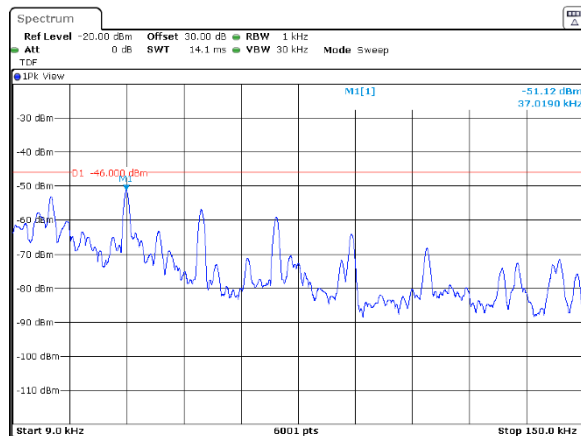

QPSK
20 MHz
ANTENNA CHAIN: #2

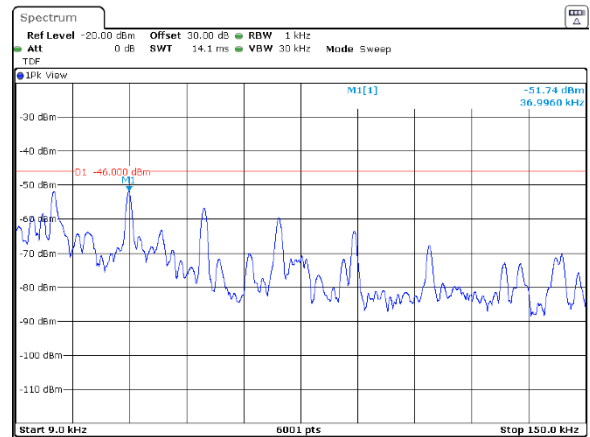

ANTENNA CHAIN: #4

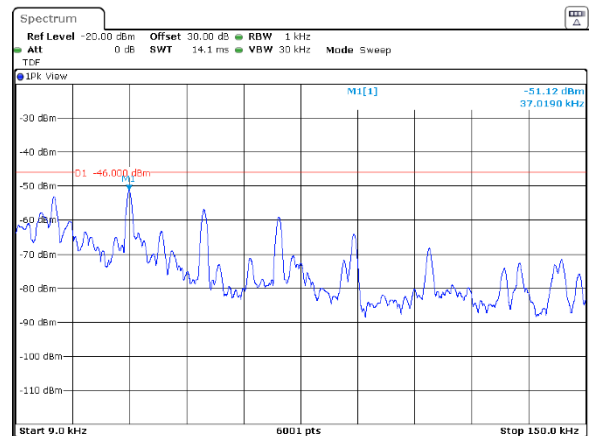




HERMON LABORATORIES


Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.3 Spurious emission measurements in 9 - 150 kHz range at high carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

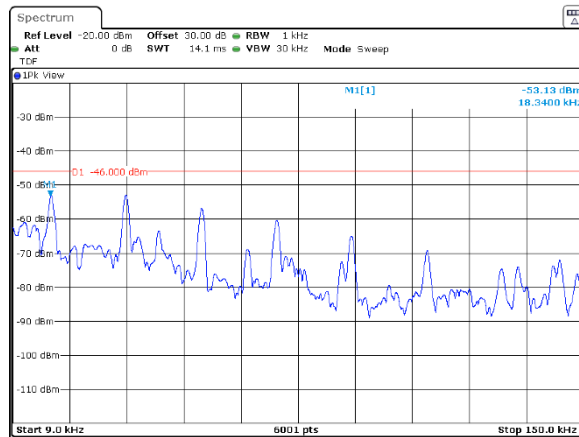


ANTENNA CHAIN: #3

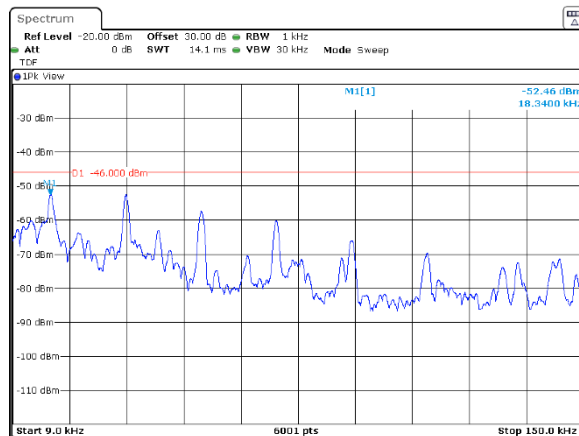

QPSK
20 MHz
ANTENNA CHAIN: #2

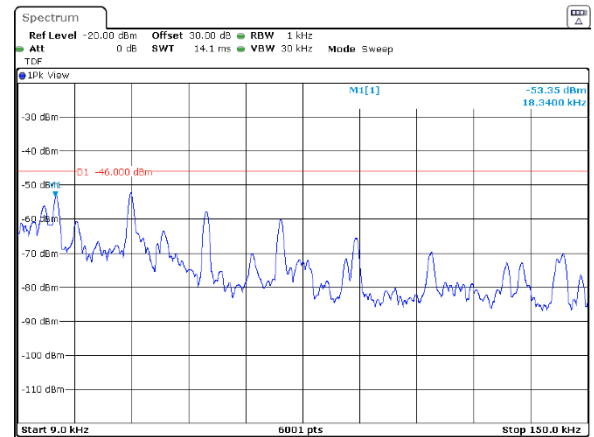

ANTENNA CHAIN: #4

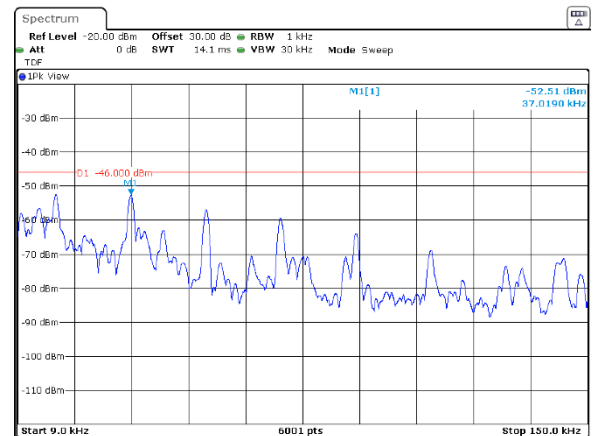




HERMON LABORATORIES


Test specification:		Section 96.41(e)(3), Conducted spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.4 Spurious emission measurements in 150 kHz - 30 MHz range at low carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

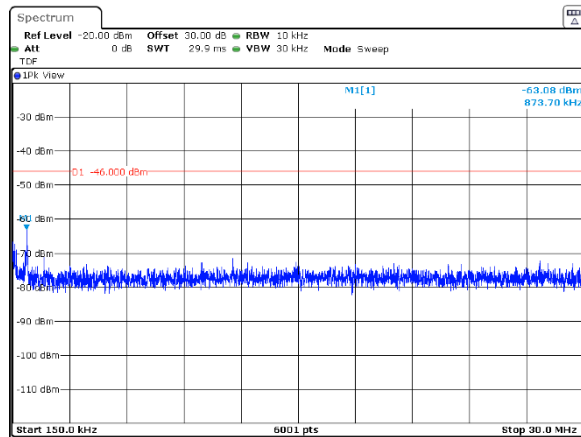


ANTENNA CHAIN: #3

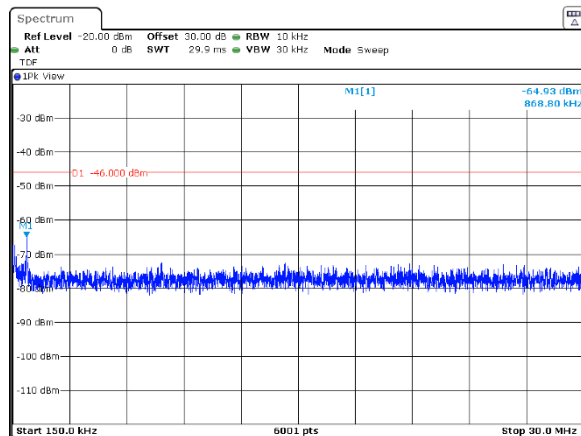

QPSK
20 MHz
ANTENNA CHAIN: #2

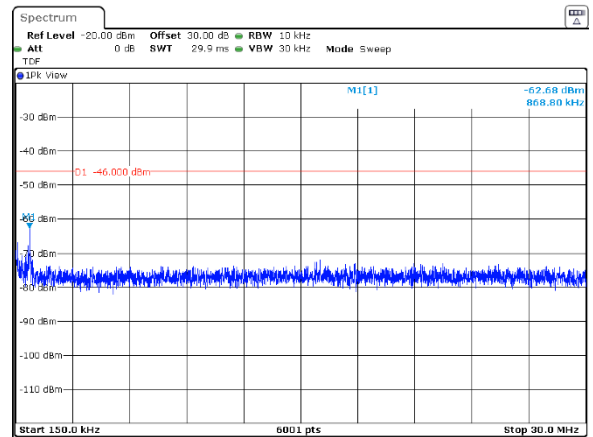

ANTENNA CHAIN: #4

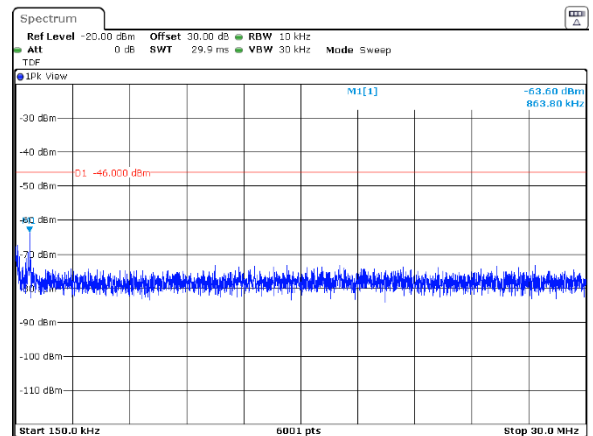




HERMON LABORATORIES


Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.5 Spurious emission measurements in 150 kHz - 30 MHz range at mid carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

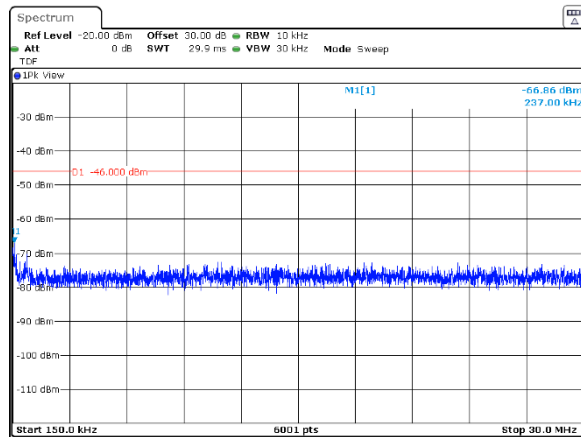


QPSK
20 MHz
ANTENNA CHAIN: #2

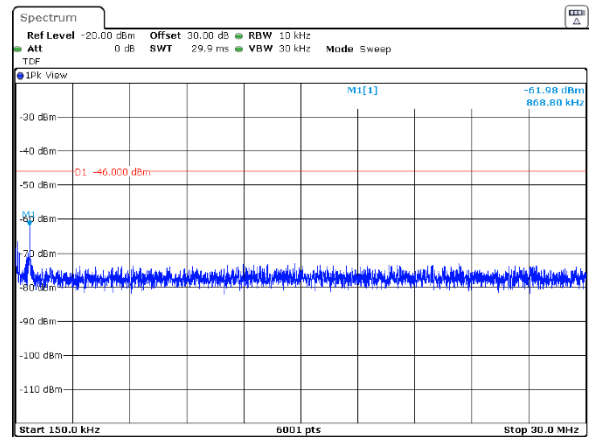

ANTENNA CHAIN: #3

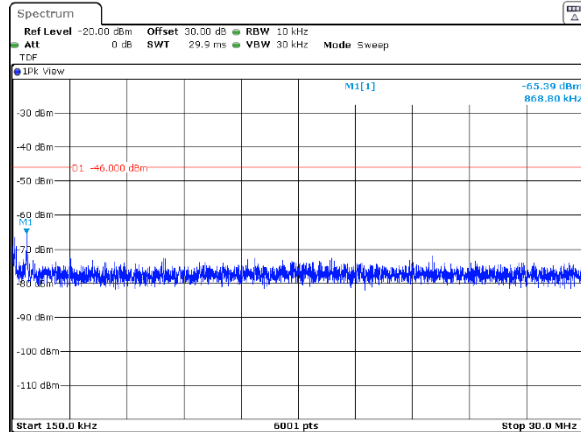

ANTENNA CHAIN: #4

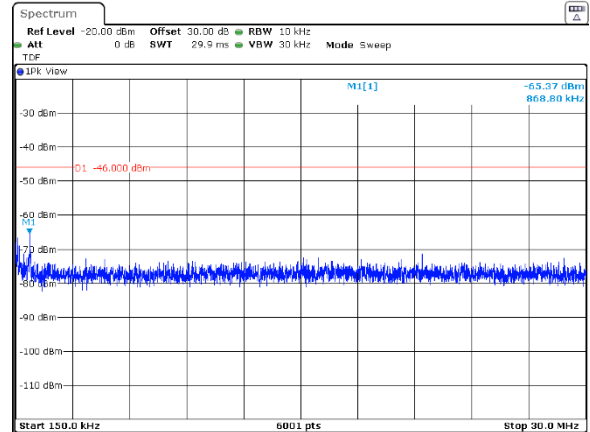




HERMON LABORATORIES


Test specification:		Section 96.41(e)(3), Conducted spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.6 Spurious emission measurements in 150 kHz - 30 MHz range at high carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

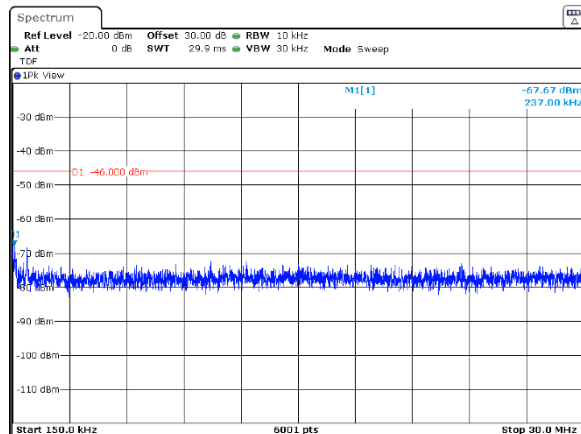


QPSK
20 MHz
ANTENNA CHAIN: #2

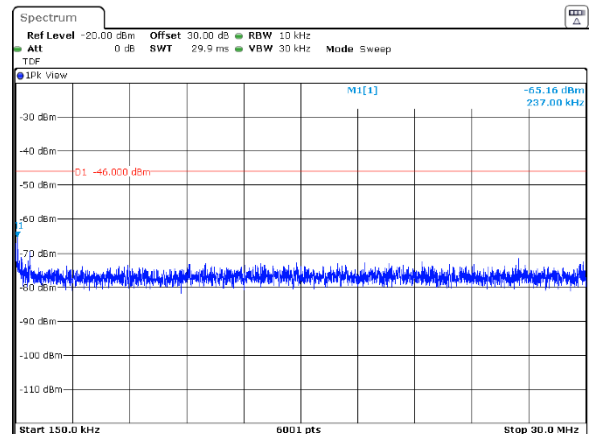

ANTENNA CHAIN: #3

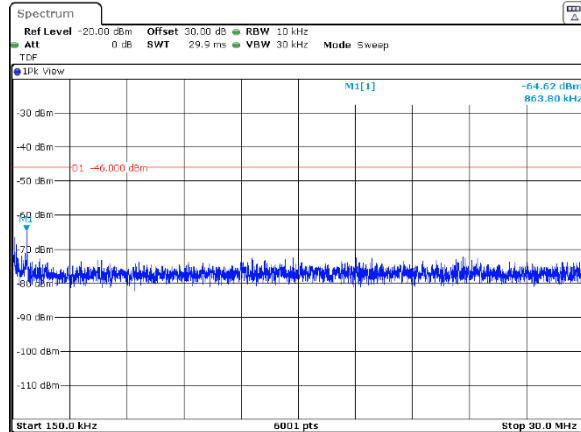

ANTENNA CHAIN: #4

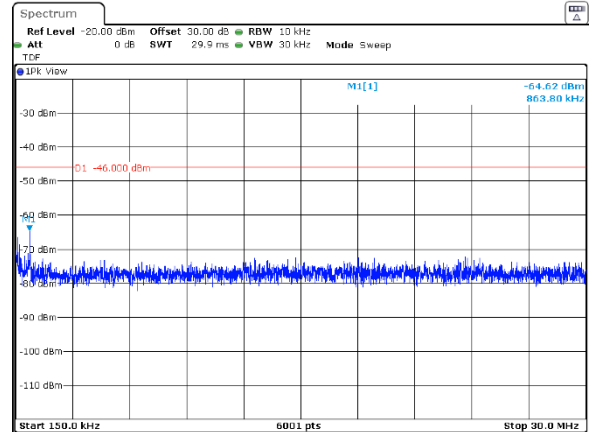




HERMON LABORATORIES


Test specification:		Section 96.41(e)(3), Conducted spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.7 Spurious emission measurements in 30 - 1000 MHz range at low carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

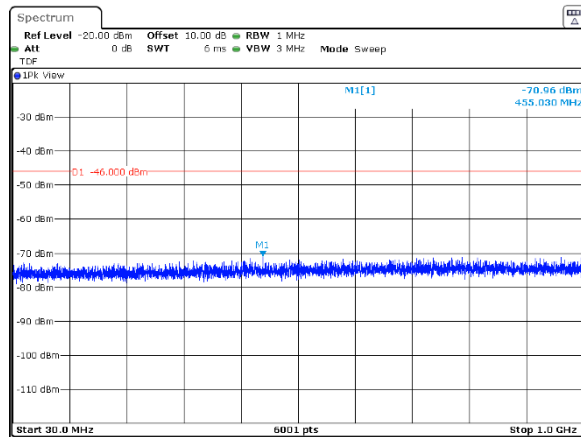


QPSK
20 MHz
ANTENNA CHAIN: #2

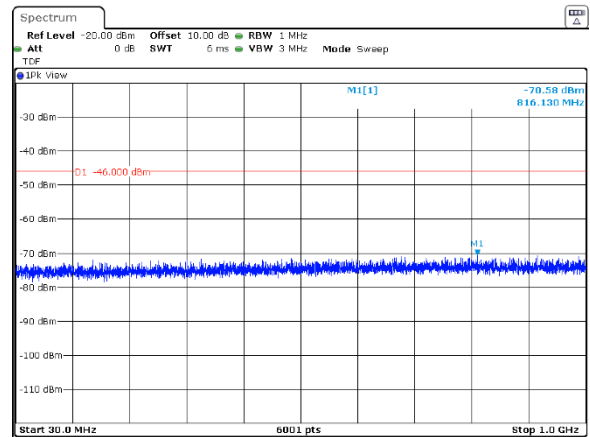

ANTENNA CHAIN: #3

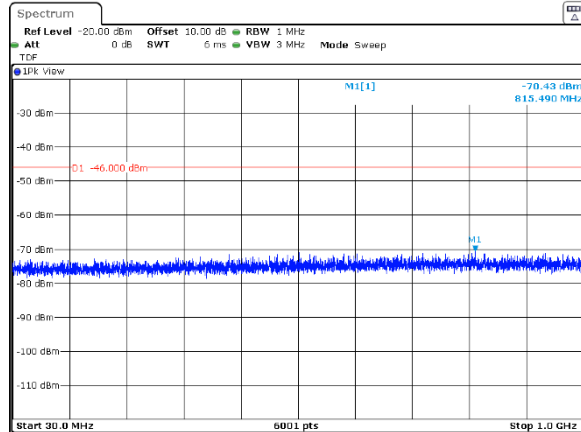

ANTENNA CHAIN: #4

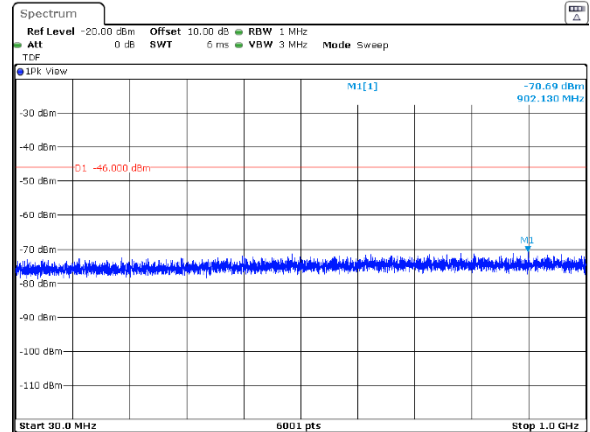




HERMON LABORATORIES


Test specification:		Section 96.41(e)(3), Conducted spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.8 Spurious emission measurements in 30 - 1000 MHz range at mid carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

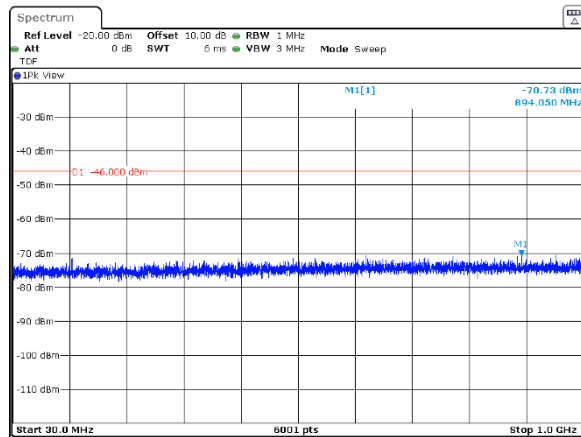


ANTENNA CHAIN: #3

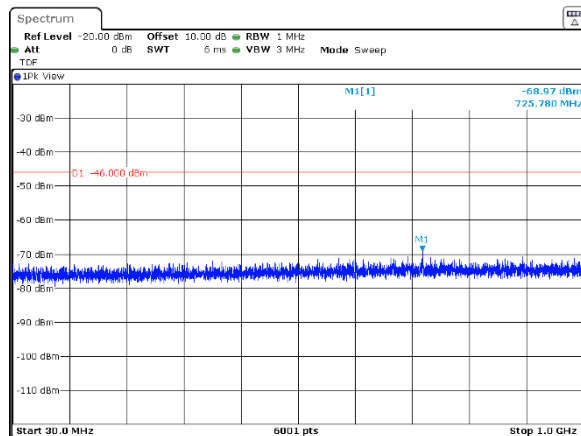

QPSK
20 MHz
ANTENNA CHAIN: #2

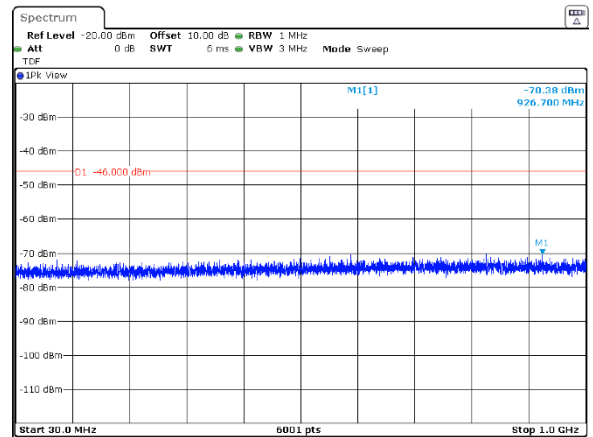

ANTENNA CHAIN: #4

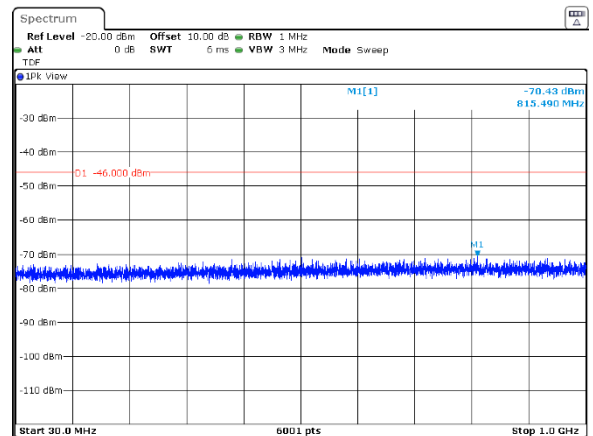




HERMON LABORATORIES


Test specification:		Section 96.41(e)(3), Conducted spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.9 Spurious emission measurements in 30 - 1000 MHz range at high carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

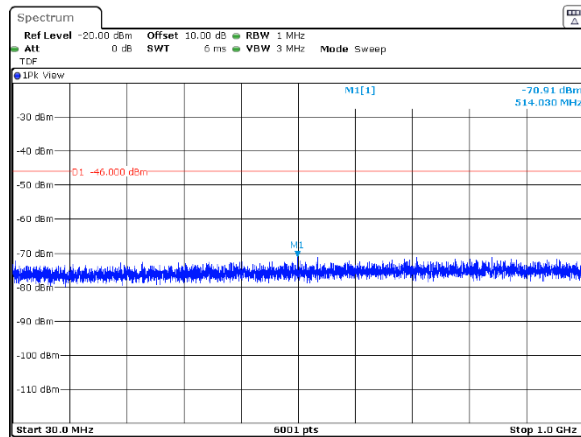


QPSK
20 MHz
ANTENNA CHAIN: #2

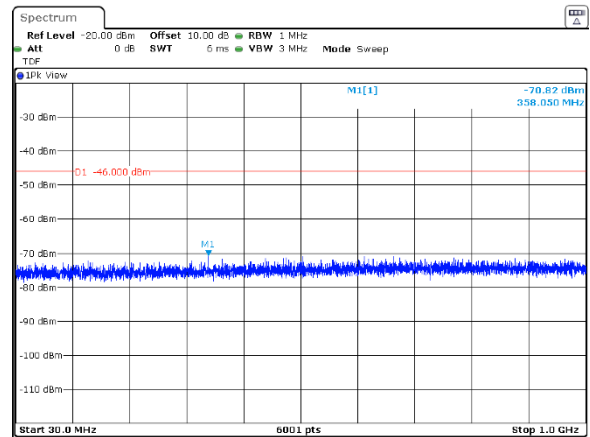

ANTENNA CHAIN: #3

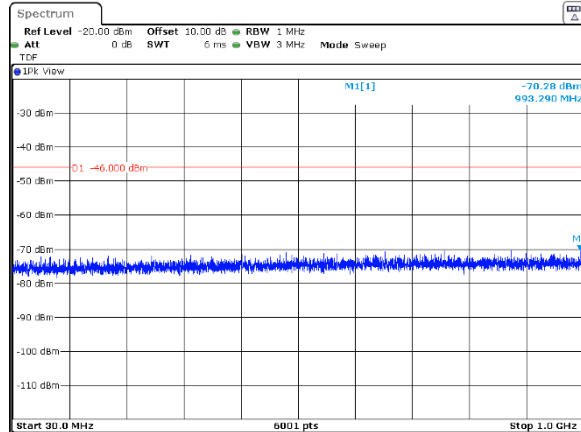

ANTENNA CHAIN: #4

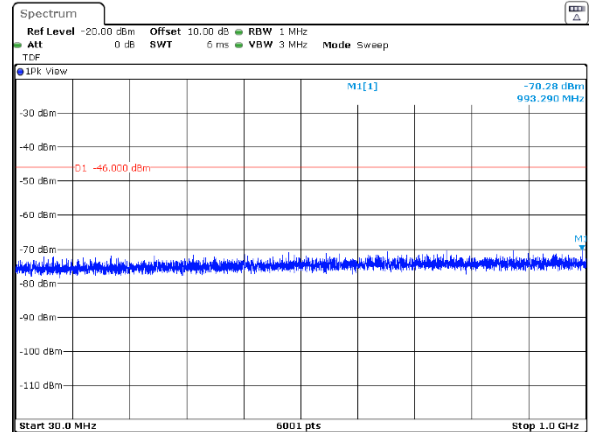




HERMON LABORATORIES


Test specification:		Section 96.41(e)(3), Conducted spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.10 Spurious emission measurements in 1000 - 3000 MHz range at low carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

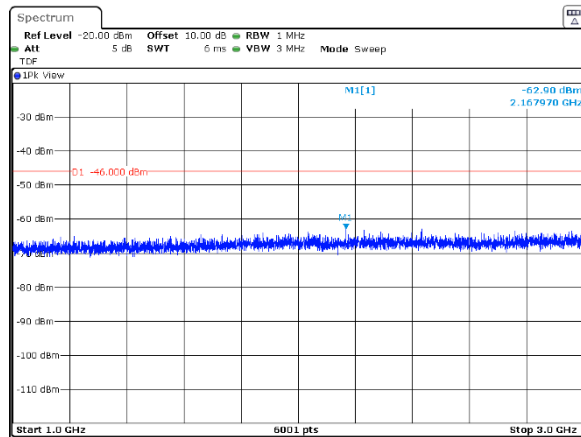


ANTENNA CHAIN: #3

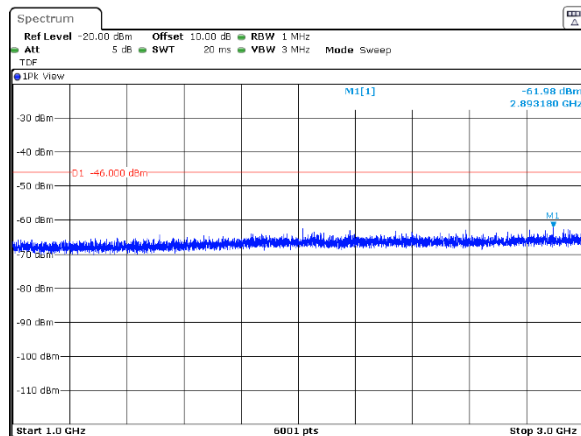

QPSK
20 MHz
ANTENNA CHAIN: #2

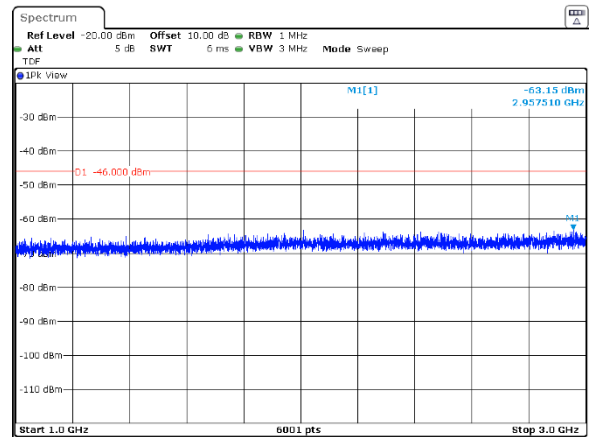

ANTENNA CHAIN: #4

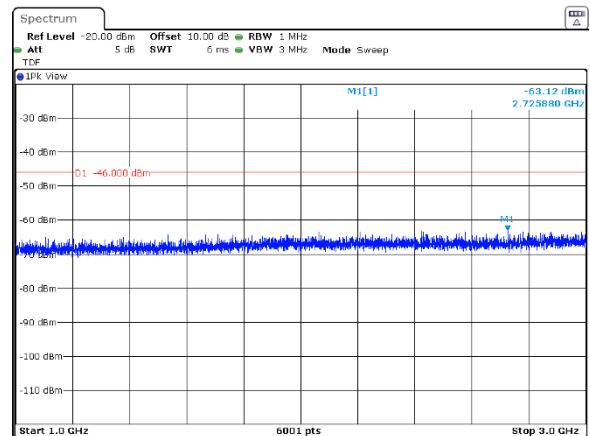




HERMON LABORATORIES


Test specification:		Section 96.41(e)(3), Conducted spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.11 Spurious emission measurements in 1000 - 3000 MHz range at mid carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

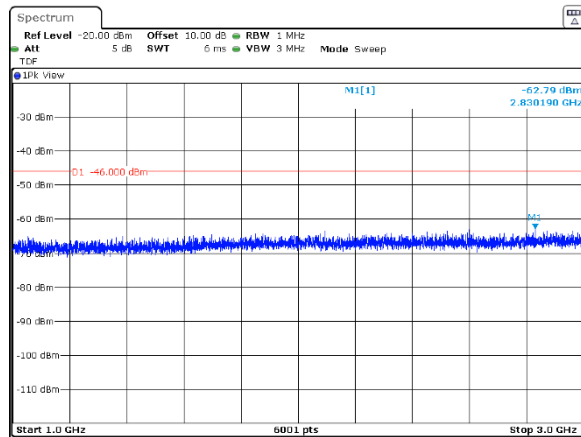


QPSK
20 MHz
ANTENNA CHAIN: #2

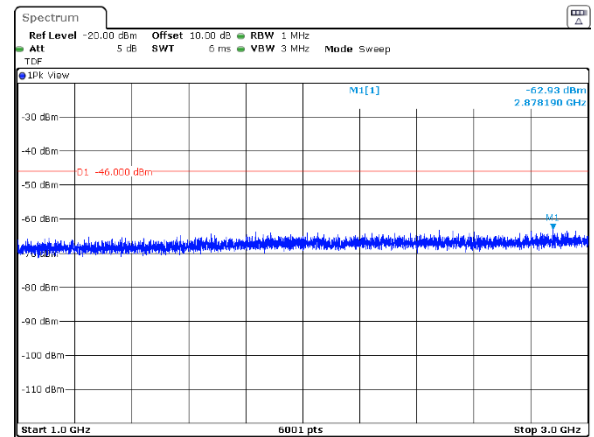

ANTENNA CHAIN: #3

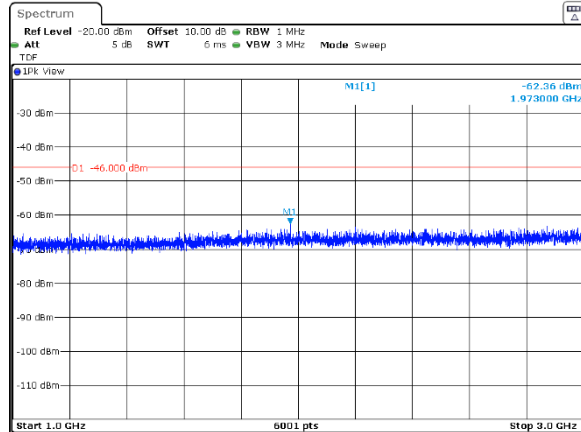

ANTENNA CHAIN: #4

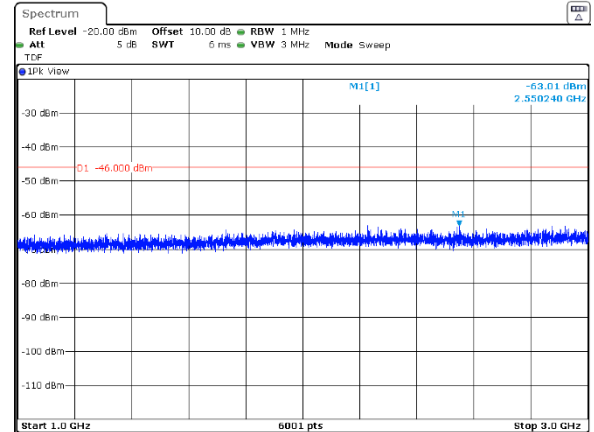




HERMON LABORATORIES


Test specification:		Section 96.41(e)(3), Conducted spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.12 Spurious emission measurements in 1000 - 3000 MHz range at high carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

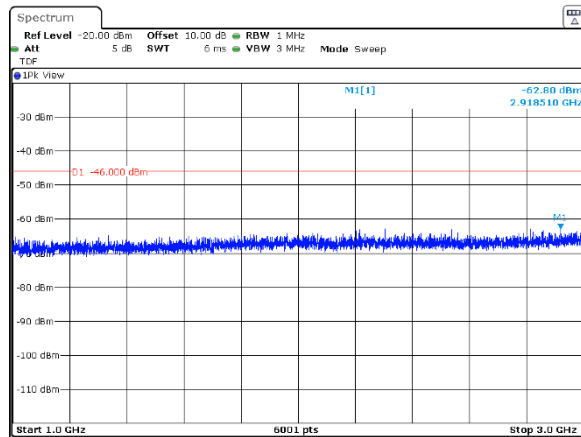


QPSK
20 MHz
ANTENNA CHAIN: #2

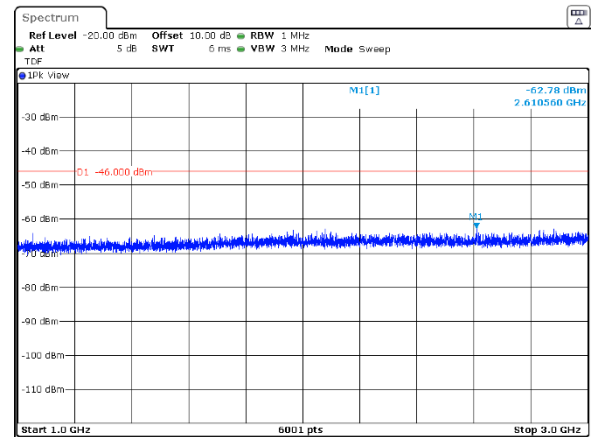

ANTENNA CHAIN: #3

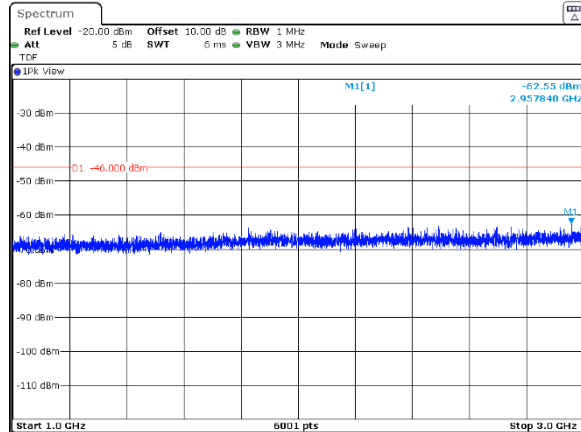

ANTENNA CHAIN: #4

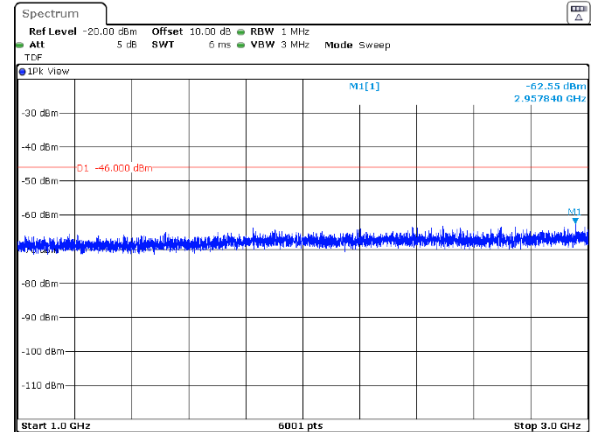




HERMON LABORATORIES


Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Nov-21			
Temperature: 24 °C	Relative Humidity: 53 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

Plot 7.6.13 Spurious emission measurements in 3000 - 3530 MHz range at low carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

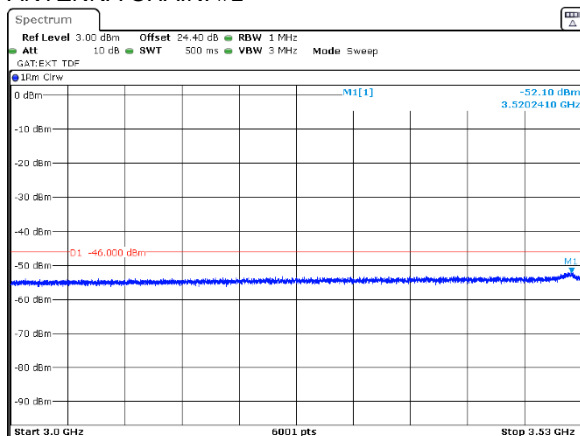

ANTENNA CHAIN: #3

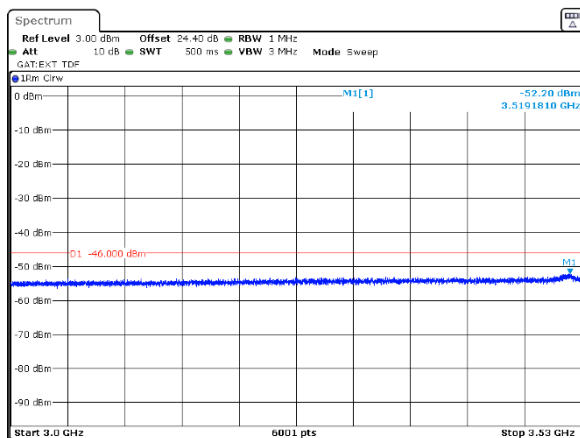

QPSK
20 MHz
ANTENNA CHAIN: #2

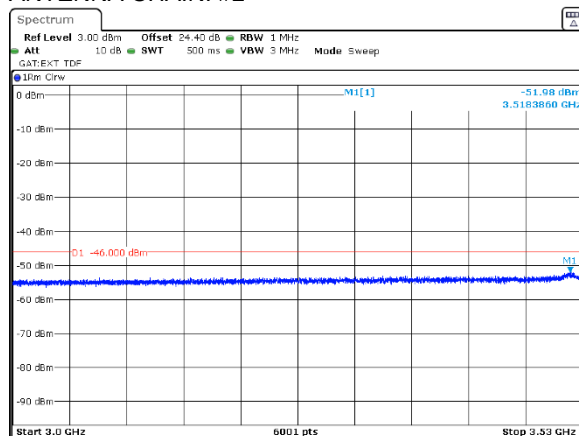

ANTENNA CHAIN: #4

