

# **FCC Test Report**

Report No.: AGC15733240401FR01

FCC ID : 2BBCYDM-R89UV

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Dual Band Digital Two Way Radio

**BRAND NAME** : LISHENG

**MODEL NAME** : DM-R89UV

**APPLICANT**: Lisheng Communications Co., Ltd.

**DATE OF ISSUE** : May 14, 2024

**STANDARD(S)** : FCC Part 90 Subpart I

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 85

# **Report Revise Record**


Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 14, 2024	Valid	Initial Release



# **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	8
2.3 Related Submittal(S) / Grant (S)	9
2.4 Test Methodology	g
2.5 Calculation of Emission Indicators	g
2.6 Special Accessories	9
2.7 Equipment Modifications	9
3. Test Environment	10
3.1 Address of The Test Laboratory	10
3.2 Test Facility	10
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	12
4.System Test Configuration	14
4.1 EUT Configuration	14
4.2 EUT Exercise	14
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	14
4.5 Summary of Test Results	15
5. Description of Test Modes	
6. Frequency Stability	17
6.1 Provisions Applicable	17
6.2 Measurement Procedure	
6.3 Measurement Setup	17
6.4 Measurement Result	18
7. 26dB Emission Bandwidth and 99% Occupied Bandwidth	22
7.1 Provisions Applicable	22
7.2 Measurement Procedure	
7.3 Measurement Setup	22
7.4 Measurement Result	23
8. Spurious Radiated Emission	30
8.1 Provisions Applicable	30
8.2 Measurement Procedure	30
8.3 Measurement Setup	
8.4 Measurement Result	
8.5 Emission Mask Measurement Part	47
9. Modulation Characteristics	
9.1 Provisions Applicable Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedica	ted Testing/Inspection

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





9.2 Measurement Procedure	53
9.3 Measurement Setup	53
9.4 Measurement Result	54
10. Maximum Transmitter Power	58
10.1 Provisions Applicable	58
10.2 Measurement Procedure	58
10.3 Measurement Setup	58
10.4 Measurement Result	60
11. Spurious Emission on Antenna Port	65
11.1 Provisions Applicable	65
11.2 Measurement Procedure	65
11.3 Measurement Setup	65
11.4 Measurement Result	66
12. Transmitter Frequency Behavior	76
12.1 Provisions Applicable	76
12.2 Measurement Setup	76
12.3 Measurement Procedure	77
12.4 Measurement Result	79
13. Audio Low Pass Filter Response	81
13.1 Provisions Applicable	81
13.2 Measurement Procedure	82
13.3 Measurement Setup	82
13.4 Measurement Result	83
Appendix I: Photographs of Test Setup	85
Appendix II: Photographs of Test EUT	85



Report No.: AGC15733240401FR01 Page 5 of 85

# 1. General Information

Applicant	Lisheng Communications Co., Ltd.		
Address	5#, Chongxiang St., Econ. & Tech. Area, Quanzhou, Fujian, China		
Manufacturer	Lisheng Communications Co., Ltd.		
Address	5#, Chongxiang St., Econ. & Tech. Area, Quanzhou, Fujian, China		
Factory	Lisheng Communications Co., Ltd.		
Address	5#, Chongxiang St., Econ. & Tech. Area, Quanzhou, Fujian, China		
Product Designation	Dual Band Digital Two Way Radio		
Brand Name	LISHENG		
Test Model	DM-R89UV		
Date of receipt of test item	Apr. 01, 2024		
Date of Test	Apr. 01, 2024~May 14, 2024		
Deviation from Standard	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Test Report Form No	AGCER-FCC-PMR-V1		

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo zhang	
	Bibo Zhang (Project Engineer)	May 14, 2024
Reviewed By	Calvin Lin	
	Calvin Liu (Reviewer)	May 14, 2024
Approved By	Max Zhang	
	Max Zhang Authorized Officer	May 14, 2024



Page 6 of 85

#### 2. Product Information

# 2.1 Product Technical Description

		1		
Communication Type	Voice / Data (Voice /Tone only)			
Operation Frequency Range	From 136MHz to 174MHzVHF			
Operation requeits range	From 400MHz to 470MHzUHF			
Hardware Version	AR-55A-UV V1.0			
Software Version	AR55A-DMR-E01.13			
Modulation Type	Analog Voice:	FM		
Modulation Type	Digital (Voice + Data):	4FSK		
Digital Type	DMR			
Channel Congretion	Analog Voice:	12.5 kHz		
Channel Separation	Digital (Voice + Data):	12.5 kHz		
Support Data Rate	9600bps			
Emission Designator	Analog Voice:	<ul> <li>✓ VHF:9K97F3E-5W-12.5kHz</li> <li>✓ VHF:9K96F3E-1W-12.5kHz</li> <li>✓ UHF:10K0F3E-5W-12.5kHz</li> <li>✓ UHF:10K0F3E-1W-12.5kHz</li> </ul>		
Zimosion Boolginator	Digital (Voice + Data):	<ul> <li>✓ VHF:7K27F1D-5W-12.5kHz</li> <li>✓ VHF:7K37F1W-1W-12.5kHz</li> <li>✓ UHF:7K37F1D-5W-12.5kHz</li> <li>✓ UHF:7K55F1W-1W-12.5kHz</li> </ul>		
Rated Output Power	VHF:5W/1W/UHF:5W/1W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)			
	VHF: 36.76dBm(5W-Analo	g) VHF: 36.60dBm(5W-Digital)		
Maximum Transmitter Power	VHF: 29.85dBm(1W-Analo	g) VHF: 29.84dBm(1W-Digital)		
waximum transmiller Power	UHF: 36.27dBm(5W-Analo	g) UHF: 36.53dBm(5W-Digital)		
	UHF: 29.88dBm(1W-Analo	g) UHF: 29.90dBm(1W-Digital)		
Antenna Designation	Detachable Antenna			
Antenna Gain	2.5dBi			
Frequency Tolerance	1.099ppm			
Power Supply	DC 7.4V 2200mAh by battery			
Adapter Information Input: AC 100-240V 50/60Hz, 0.2A Output: DC 12V 500mA				

# Note:

- 1. The product has the same digital working characters when operating in both two digitized voice/data mode. So only one set of test results for digital modulation modes are provided in this test report.
- 2. This equipment is capable of supporting a minimum data rate of 4800 bits per second per 6.25 kHz of channel bandwidth. DMR interphone's bandwidth is 12.5 kHz, and it has a double time slot, one is the speech Any report having not been stamped by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Conving or excepting portion of or altering the content of the report is not permitted without the written authorization of AGC. The test result



Page 7 of 85

time slot, one is the data time slot, just language sequence is satisfied with 4800 bps/ $6.25 \ \text{kHz}$  BW.

3. The actual working frequency band of the device is UHF: 400-470MHz. According to the frequency division requirements of KDB634817 and the federal frequency allocation requirements, the working frequency band t



Report No.: AGC15733240401FR01 Page 8 of 85

# 2.2 Test Frequency List

Operation mode	Channel Separation	Operation Frequency Range	Test channel	Test Frequency
	12.5 kHz	400-470MHz	Bottom	406.125 MHz
Analog/ Digital	12.5 kHz	400-470MHz	Middle	453.2125 MHz
Analog/ Digital	12.5 kHz	400-470MHz Middle		458.2125 MHz
	12.5 kHz	400-470MHz	Тор	469.975 MHz
	12.5 kHz	136-174MHz	Bottom	136.025 MHz
Analog/ Digital	12.5 kHz	136-174MHz	Middle	155.7525 MHz
	12.5 kHz	136-174MHz	Тор	173.975 MHz

#### Note:

In section KDB 634817 D01 Sections II) (f) (1) and (2):

Test at least one frequency in each band for each rule part applied under and ensure the device is capable of operating on the frequency under each rule part. This requirement may result in testing on multiple frequencies. Testing on one frequency may be acceptable if multiple listed bands for a rule part with a continuous frequency range are split to remove a conflict with other rules and the technical requirements in the split bands are the same. Additional requirements for RF exposure may apply.



Page 9 of 85

## 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2BBCYDM-R89UV**, filing to comply with Part 2, Part 90 of the Federal Communication Commission rules.

## 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 90	Private Land Mobile Radio Services
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
3	ANSI TIA-102.CAAA-E	Project 25 Digital C4FM/CQPSK Transceiver Measurement Methods
4	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
5	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
6	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01
7	KDB 579009 D03	KDB 579009 D03 Applications Part 90 Refarming Bands v01
8	KDB 634817 D01	KDB 634817 D01 Freq Range Listing for Grants v04r01

#### 2.5 Calculation of Emission Indicators

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

#### For FM Mode (ChannelSpacing: 12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2\*(3.0 kHz + 2.5 kHz) = 11 kHz = 11KO

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

#### For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator 7K60F1D and 7K60F1W

The 99% energy rule was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz.

F1D and F1W portion of the designator indicates digital information.

Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1W.

## 2.6 Special Accessories

Not available for this EUT intended for grant.

## 2.7 Equipment Modifications

Not available for this EUT intended for grant.



Page 10 of 85

3. Test Environment

## 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

# CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

## A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

# FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 11 of 85

#### 3.3 Environmental Conditions

	Normal Conditions	Extreme Conditions
Temperature range (°C)	15 - 35	-20 - 50
Relative humidty range	20 % - 75 %	20 % - 75 %
Pressure range (kPa)	86 - 106	86 - 106
Power supply	DC 7.4V	LV DC 6.29V /HV DC 8.51V

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

# 3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty
Frequency stability	±0.5%
Transmitter power conducted	±0.8dB
Transmitter power Radiated	±1.3dB
Conducted spurious emission 9kHz-40 GHz	±2.7dB
Conducted Emission	±3.2 dB
Radiated Emission below 1GHz	±3.9 dB
Radiated Emission above 1GHz	±4.8 dB
Occupied Channel Bandwidth	±2 %
FM deviation	±2 %
Audio level	±0.98dB
Low Pass Filter Response	±0.65dB
Modulation Limiting	0.42 %
Transient Frequency Behavior	6.8 %



Report No.: AGC15733240401FR01 Page 12 of 85

# 3.5 List of Equipment Used

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-ER-E086	Spectrum Analyzer	KEYSIGHT	N9020A	MY53300860	2023-06-01	2024-05-31	
$\boxtimes$	AGC-EM-E002	Wireless Connectivity Tester	HP	8920B	US35010161	2023-06-02	2024-06-01	
	AGC-EM-E001	Digital Connectivity Tester	Aeroflex	3920B	N/A	2023-06-02	2024-06-01	
$\boxtimes$	AGC-ER-E059	Signal Generator	Agilent	N5182B	MY53050647	2024-02-01	2025-01-31	
$\boxtimes$	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2023-06-01	2024-05-31	
$\boxtimes$	AGC-ER-E075	Small Environmental Tester	SH-242	ESPEC	93008290	2022-08-03	2024-08-02	
$\boxtimes$	AGC-EM-A007	30dB Attenuator	Weinachel	58-30-33	ML030	2023-06-01	2024-05-31	
$\boxtimes$	AGC-EM-E040	Directional coupler	Werlatone	C5571-10	99463	2024-02-01	2026-01-31	
$\boxtimes$		RF Connection Cable	N/A	1#	N/A	Each time	N/A	
		RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31
$\boxtimes$	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2023-07-05	2024-07-04
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
$\boxtimes$	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2023-01-05	2025-01-04
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30
	AGC-EM-E102	Broadband Ridged Horn Antenna	ETS	3117	00154520	2023-06-03	2024-06-02
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-11-13	2024-11-12
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
	AGC-EM-E021	Pre-amplifier	MITEQ	AM-4A-000115	1465421	2022-06-08	2024-06-07
$\boxtimes$	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2023-06-01	2024-05-31
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
$\boxtimes$	AGC-EM-A088	UHF Filter	N/A	N/A	N/A	2023-06-01	2024-05-31
	AGC-EM-A089	VHF Filter	N/A	N/A	N/A	2023-06-01	2024-05-31
Any repo	AGC-EM-E110	Low Pass Filter	N/A having been altered with	N/A out authorization, or	N/A having not been stam	2023-06-01	2024-05-31 d Testing/Inspection

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 13 of 85

• T	Test Software							
Used	Used Equipment No. Test Equipment Manufacturer Model No. Version Information							
	AGC-EM-S004	RE Test System	Tonscend	TS <sup>+</sup> Ver2.1(JS32-RE)	4.0.0.0			



Page 14 of 85

# 4. System Test Configuration


# 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

# 4.3 Configuration of Tested System






Table 2-1 Equipment Used in Tested System

# 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

□ Test Accessories Come From The Laboratory

No	lo. Equipment Model No. Man		Manufacturer	Specification Information	Cable
1	Load Antenna	HG-E10	Amphenol	Terminator DC -3G 50W	N/A

# 

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Battery	R88D-BAT	LISHENG	DC 7.4V, 2200mAh	N/A
2	Adapter	NLA050120W1A6	N/A	Input: AC 100-240V~50/60Hz 0.2A MaX Output: DC 12V 500mA	N/A
3	Charger	N/A	N/A	Input: DC 12V 500mA Output: DC 8.4V 0.45A	N/A
4	Antenna	N/A	N/A	N/A	N/A
5	USB Cable	N/A	N/A	N/A	N/A
6	Back Clip	N/A	N/A	N/A	N/A



Page 15 of 85

# 4.5 Summary of Test Results

Item	FCC Rules	Description Of Test	Result
1	47 CFR FCC PART 90	Antenna Equipment	Pass
2	§90.205& 2.1046	Maximum Transmitter Power	Pass
3	§90.207& 2.1047	Modulation Characteristic	Pass
4	§2.1047	Audio Low Pass Filter Response	Pass
5	§90.209& 2.1049	26dB Emission Bandwidth and 99% Occupied Bandwidth	Pass
6	§90.210& 2.1049	Emission Mask	Pass
7	§90.213& 2.1055	Frequency Tolerance	Pass
8	§90.214	Transmitter Frequency Behavior	Pass
9	§90.210& 2.1051	Spurious Emission on Antenna Port	Pass
10	§90.210& 2.1053	Spurious Radiated Emission	Pass



Page 16 of 85

# 5. Description of Test Modes

The EUT (**Dual Band Digital Two Way Radio**) has been tested under normal operating condition. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation.

No.	Test Mode Description	Channel Separation		
1	TX Bottom channel-VHF	12.5 kHz		
2	TX Middle channel-VHF	12.5 kHz		
3	TX Middle channel-VHF	12.5 kHz		
4	TX Top channel-UHF	12.5 kHz		
5	TX Bottom channel-UHF	12.5 kHz		
6	TX Middle channel-UHF	12.5 kHz		
7	TX Middle channel-VHF	12.5 kHz		
8	TX Top channel-UHF	12.5 kHz		

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details



Page 17 of 85

# 6. Frequency Stability

## 6.1 Provisions Applicable

- According to FCC §2.1055, §90.213, the frequency stability shall be measured with variation of ambient temperature from  $-30^{\circ}$ C to  $+50^{\circ}$ C centigrade.
- According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5 kHz channel separation and 0.0001% for 6.25 kHz channel separation.

#### **6.2 Measurement Procedure**


## 6.2.1 Frequency stability versus environmental temperature

- Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 2. 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature 3. of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

## 6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15℃ to 25℃. Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 7.4V.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

#### 6.3 Measurement Setup

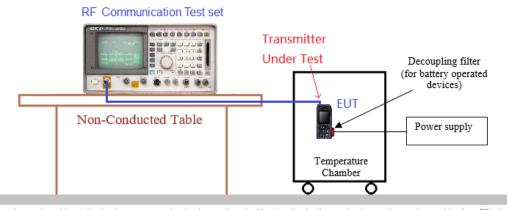



Page 18 of 85

#### **6.4 Measurement Result**

1	12.5 kHz Channel Separation, Analog modulation, Assigned Frequency For VHF-5W								
Test c	conditions	Fr	equency error (pp	om)					
Voltage	Temp	Te	st Frequency (Mi	Hz)	Limit (ppm)	Result			
(V)	(℃)	136.025	155.7525	173.975	(PP)				
	-30	0.940	0.653	0.885					
	-20	0.603	1.028	0.920					
	-10	0.638	0.654	1.064					
	0	1.085	1.008	0.785					
7.40	10	0.662	0.633	0.808					
	20	0.950	0.955	0.540	5	Pass			
	30	1.078	0.761	0.900					
	40	0.557	0.862	0.869					
	50	0.551	0.998	0.695					
8.51	20	0.582	1.038	0.580					
6.29	20	0.793	0.951	0.613					

12.5 kHz Channel Separation, Analog modulation, Assigned Frequency For VHF-1W								
Test	conditions	Fre	equency error (pp					
Voltage	Temp	Te	st Frequency (Mi	Hz)	Limit (ppm)	Result		
(V)	(℃)	136.025	155.7525	173.975	- (ββ)			
	-30	0.532	0.688	0.752				
	-20	0.544	0.951	1.096				
	-10	1.032	0.645	0.800				
	0	1.017	0.957	0.592				
7.40	10	0.530	0.535	0.932				
	20	0.506	0.698	0.567	5	Pass		
	30	0.971	1.050	0.998				
	40	0.953	0.556	0.670				
	50	0.990	0.571	0.991				
8.51	20	0.951	0.827	0.737				
6.29	20	0.645	0.761	0.683				





	12.5 kHz Channel Separation, Analog modulation, Assigned Frequency For UHF-5W									
Test o	conditions		Frequency	error (ppm)						
Voltage	Temp		Test Frequ	ency (MHz)		Limit (ppm)	Result			
(V)	(℃)	406.125	453.2125	458.2125	469.975	(ββιιι)				
	-30	0.996	0.688	0.813	0.728					
	-20	0.793	0.524	0.695	0.659					
	-10	0.670	0.957	0.593	0.346					
	0	0.760	0.581	1.024	0.612					
7.40	10	0.621	0.559	0.990	0.384					
	20	0.507	0.503	0.768	0.601	5	Pass			
	30	0.784	0.898	0.625	0.397					
	40	0.528	0.784	0.544	0.816					
	50	1.015	0.747	0.959	0.663					
8.51	20	1.044	0.844	0.789	0.307					
6.29	20	0.888	0.714	0.770	0.661					

12.5 kHz Channel Separation, Analog modulation, Assigned Frequency For UHF-1W									
Test o	conditions		Frequency	error (ppm)					
Voltage	Temp		Test Frequ	ency (MHz)		Limit (ppm)	Result		
(V)	(℃)	406.125	453.2125	458.2125	469.975	(ββιιι)			
	-30	0.795	0.925	0.711	0.461				
	-20	0.902	1.033	0.929	0.485				
	-10	1.079	0.673	0.583	0.908				
	0	1.006	0.892	0.891	0.428				
7.40	10	1.074	0.929	0.863	0.344				
	20	0.659	0.783	0.871	0.642	5	Pass		
	30	0.521	0.507	0.955	0.620				
	40	0.706	0.711	0.992	0.945				
	50	0.816	0.571	0.983	0.372				
8.51	20	0.835	1.094	0.761	0.502				
6.29	20	0.650	0.993	0.629	0.687				





	12.5 kHz Channel Separation, Digital modulation, Assigned Frequency For VHF-5W								
Test	conditions	Fr	equency error (pr	om)					
Voltage	Temp	Te	est Frequency (MI	Hz)	Limit (ppm)	Result			
(V)	(℃)	136.025	155.7525	173.975	(ββιιι)				
	-30	0.684	0.912	0.781					
	-20	0.654	0.782	0.765					
	-10	0.898	0.603	0.742					
	0	0.912	0.611	0.563					
7.40	10	1.099	0.557	0.652					
	20	1.032	0.573	0.725	5	Pass			
	30	0.522	0.652	0.559					
	40	0.856	0.653	0.353					
	50	0.913	0.889	0.450					
8.51	20	0.602	0.496	0.437	]				
6.29	20	0.704	0.307	0.518					

	12.5 kHz Channel Separation, Digital modulation, Assigned Frequency For VHF-1W								
Test	conditions	Fre	equency error (pp	om)	Limit (ppm)				
Voltage	Temp	Te	st Frequency (Mi	Hz)		Result			
(V)	(℃)	136.025 155.7525 1		173.975	(PPIII)				
	-30	0.828	0.789	0.742					
	-20	1.018	0.444	0.390					
	-10	0.522	0.647	0.340					
	0	0.689	0.428	0.559					
7.40	10	0.959	0.533	0.605					
	20	0.662	0.609	0.713	5	Pass			
	30	0.704	0.570	0.423					
	40	0.837	0.328	0.954					
	50	0.711	0.548	0.738					
8.51	20	0.987	0.399	0.605					
6.29	20	0.718	0.665	0.939					





	12.5 kHz Channel Separation, Digital modulation, Assigned Frequency For UHF-5W									
Test conditions			Frequency	error (ppm)						
Voltage	Temp		Test Frequ	ency (MHz)		Limit (ppm)	Result			
(V)	(℃)	406.125	453.2125	458.2125	469.975	(ββιιι)				
	-30	0.507	0.983	0.900	0.323					
	-20	0.565	0.533	1.068	0.909					
	-10	0.825	0.907	0.843	0.551					
	0	0.668	0.983	0.755	0.313					
7.40	10	0.537	0.804	0.799	0.822					
	20	1.011	0.801	0.622	0.602	5	Pass			
	30	0.962	0.579	0.868	0.955					
	40	0.716	1.039	0.614	0.465					
	50	0.546	0.925	0.664	0.834					
8.51	20	0.797	0.960	0.707	0.899					
6.29	20	0.664	0.756	0.620	0.946					

	12.5 kHz Chan	nel Separation	, Digital modula	ation, Assigned	Frequency Fo	r UHF-1W	
Test o	conditions		Frequency	error (ppm)			
Voltage	Temp (℃)		Test Frequ	Limit (ppm)	Result		
(V)		406.125	453.2125	458.2125	469.975	(PP)	
	-30	0.900	0.796	0.863	0.557		
	-20	0.519	0.547	0.873	0.500		
	-10	1.064	0.972	0.874	0.927		
	0	0.915	0.916	1.045	0.904		
7.40	10	0.941	0.754	0.538	0.428		
	20	0.654	0.905	0.732	0.752	5	Pass
	30	0.825	0.831	0.948	0.404		
	40	0.753	0.914	0.626	0.707		
	50	0.501	0.805	0.862	0.652		
8.51	20	0.968	0.745	0.662	0.372		
6.29	20	0.763	0.603	0.576	0.727		



Report No.: AGC15733240401FR01 Page 22 of 85

# 7. 26dB Emission Bandwidth and 99% Occupied Bandwidth

## 7.1 Provisions Applicable


FCC Part 90.209 & FCC Part 2.1049:

The authorized bandwidth shall be 11.25 kHz for 12.5 kHz channel separation and 6 kHz for 6.25 kHz channel separation.

#### 7.2 Measurement Procedure

- 1. The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.
- 2. Rated system deviation is 2.5 kHz for 12.5kHz channel spacing.
- 3. Spectrum set as follow:
- 4. Centre frequency = fundamental frequency.
- 5. Span=50kHz for 12.5kHz channel spacing.
- 6. RBW=100Hz, VBW=300Hz, Sweep = auto.
- 7. Detector function = peak, Trace = max hold.
- 8. Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.
- 9. Measure and record the results in the test report.

#### 7.3 Measurement Setup

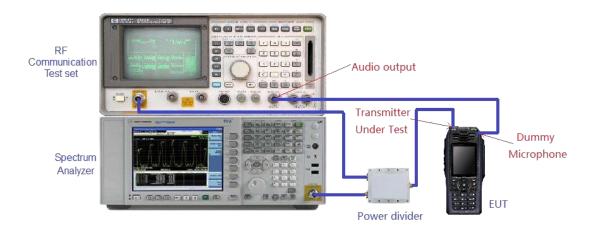



Page 23 of 85


#### 7.4 Measurement Result

	Measurement Result of V	HF-Analog Modulation-	5W					
Operating Frequency		12.5 kHz Channel Sepa	aration					
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result				
136.025 MHz	9.952 kHz	10.16 kHz	11.25 kHz	Pass				
155.7525 MHz	9.971 kHz	10.17 kHz	11.25 kHz	Pass				
173.975 MHz	9.974 kHz	10.18 kHz	11.25 kHz	Pass				
	Measurement Result of V	HF-Analog Modulation-	1W					
Operating Frequency		12.5 kHz Channel Sepa	aration					
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result				
136.025 MHz	9.952 kHz	10.17 kHz	11.25 kHz	Pass				
155.7525 MHz	9.953 kHz	10.17 kHz	11.25 kHz	Pass				
173.975 MHz	9.959 kHz	10.17 kHz	11.25 kHz	Pass				
	Measurement Result of U	HF-Analog Modulation-	5W					
Operating Frequency	12.5 kHz Channel Separation							
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result				
406.125 MHz	9.966 kHz	10.17 kHz	11.25 kHz	Pass				
453.2125 MHz	10.015 kHz	10.19 kHz	11.25 kHz	Pass				
458.2125 MHz	10.002 kHz	10.18 kHz	11.25 kHz	Pass				
469.975 MHz	9.940 kHz	10.16 kHz	11.25 kHz	Pass				
	Measurement Result of U	HF-Analog Modulation-	1W					
Operating Frequency		12.5 kHz Channel Sepa	aration					
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result				
406.125 MHz	9.950 kHz	10.17 kHz	11.25 kHz	Pass				
453.2125 MHz	10.004 kHz	10.18 kHz	11.25 kHz	Pass				
458.2125 MHz	10.002 kHz	10.18 kHz	11.25 kHz	Pass				
469.975 MHz	9.956 kHz	10.17 kHz	11.25 kHz	Pass				




Report No.: AGC15733240401FR01 Page 24 of 85


	Measurement Result of V	/HF-Digital Modulation-	5W					
On a ration of Francisco		12.5 kHz Channel Sepa	aration					
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result				
136.025 MHz	7.113 kHz	9.532 kHz	11.25 kHz	Pass				
155.7525 MHz	7.276 kHz	9.273 kHz	11.25 kHz	Pass				
173.975 MHz	7.211 kHz	9.690 kHz	11.25 kHz	Pass				
	Measurement Result of V	HF-Digital Modulation-	1W					
Operating Frequency		12.5 kHz Channel Sepa	aration					
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result				
136.025 MHz	7.367 kHz	9.684 kHz	11.25 kHz	Pass				
155.7525 MHz	7.277 kHz	9.568 kHz	11.25 kHz	Pass				
173.975 MHz	7.442 kHz	9.160 kHz	11.25 kHz	Pass				
	Measurement Result of U	JHF-Digital Modulation-	5W					
Operating Frequency	12.5 kHz Channel Separation							
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result				
406.125 MHz	7.314 kHz	8.519 kHz	11.25 kHz	Pass				
453.2125 MHz	7.237 kHz	9.928 kHz	11.25 kHz	Pass				
458.2125 MHz	7.373 kHz	9.612 kHz	11.25 kHz	Pass				
469.975 MHz	7.218 kHz	10.06 kHz	11.25 kHz	Pass				
	Measurement Result of L	JHF-Digital Modulation-	1W					
Operating Frequency		12.5 kHz Channel Sepa	aration					
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result				
406.125 MHz	7.549 kHz	9.596 kHz	11.25 kHz	Pass				
453.2125 MHz	7.440 kHz	9.648 kHz	11.25 kHz	Pass				
458.2125 MHz	7.510 kHz	9.770 kHz	11.25 kHz	Pass				
469.975 MHz	7.336 kHz	9.783 kHz	11.25 kHz	Pass				







## Test plot as follows:

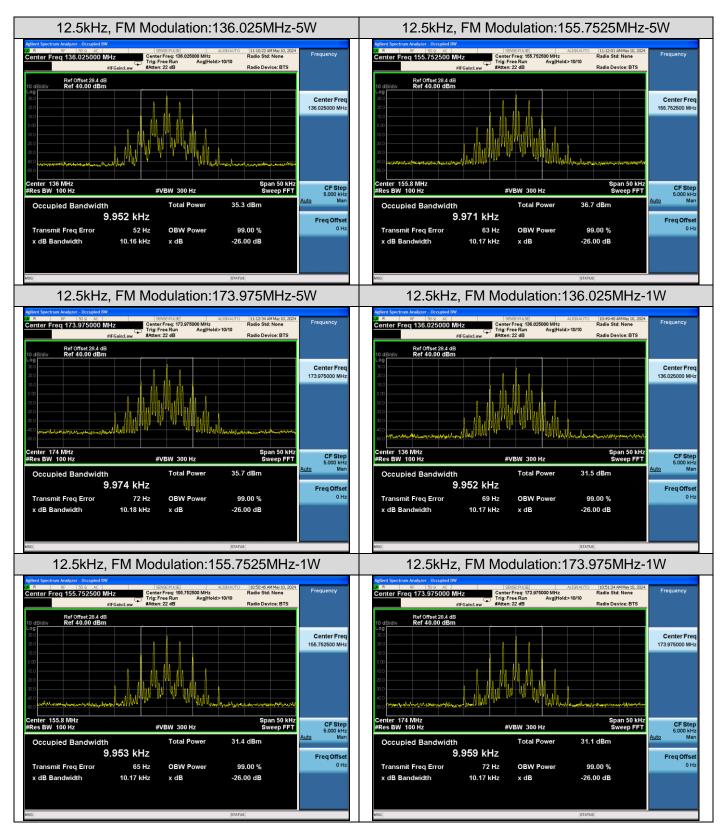







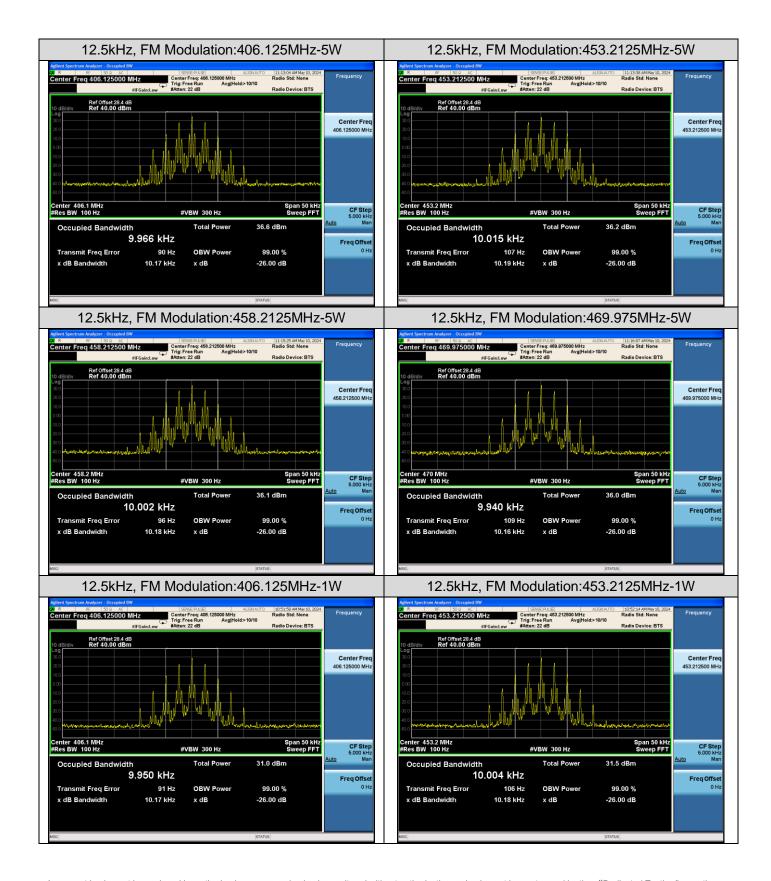







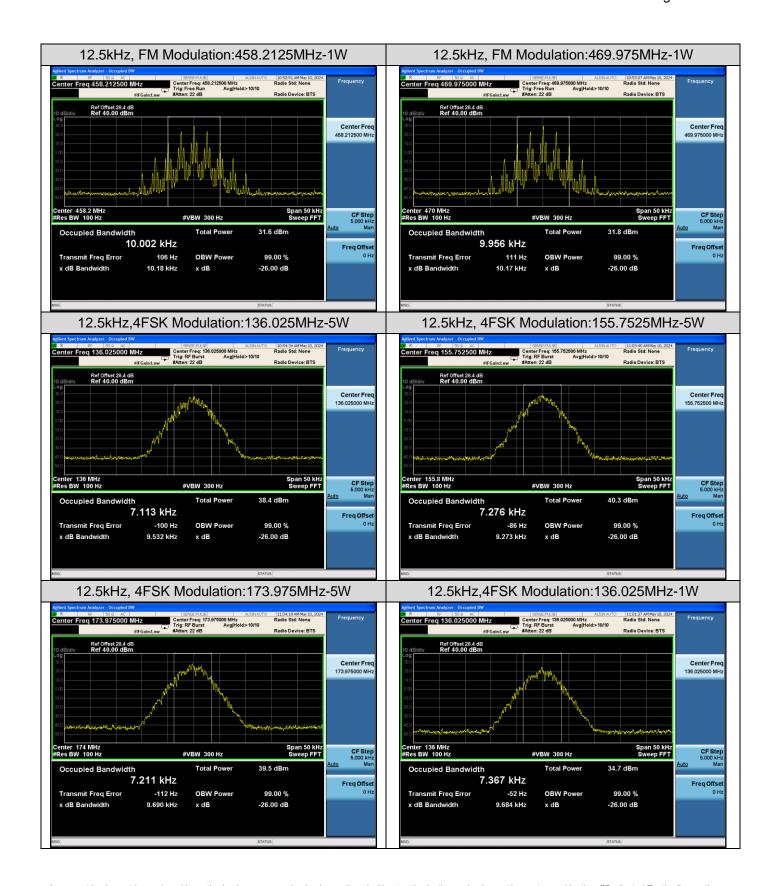






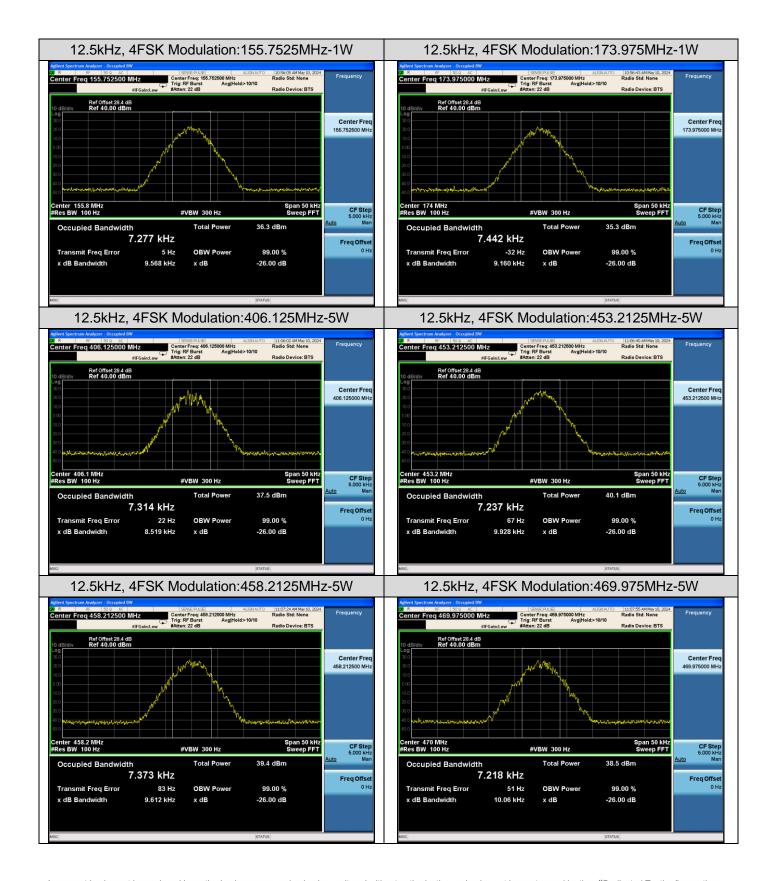





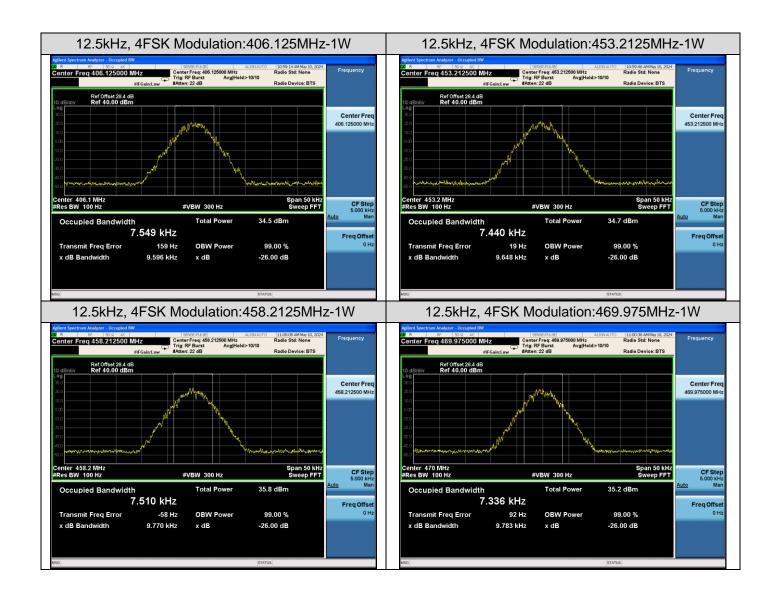



Page 30 of 85

# 8. Spurious Radiated Emission

# 8.1 Provisions Applicable

According to FCC §2.1053 and §90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with each channel separation.


Emission Mask D -for 12.5 kHz Channel Separation:

- (1) On any frequency removed from the center of the authorized bandwidth fo to 5.625 kHz removed from fo: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in kHz) fo of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27(fd-2.88 kHz) dB
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in kHz)fo of more than 12.5 kHz: At least 50+10 log(P) dB or 70 dB, whichever is lesser attenuation.

#### 8.2 Measurement Procedure


- 1. On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2. The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4. The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5. The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- 6. The transmitter shall than be rotated through 360°in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7. The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- 8. The maximum signal level detected by the measuring receiver shall be noted.
- The measurement shall be repeated with the test antenna set to horizontal polarization.
- 10. (Replace the antenna with a proper Antenna (substitution antenna).
- 11. The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- 12. The substitution antenna shall be connected to a calibrated signal generator.
- 13. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 14. The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- 15. The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- 16. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- 17. The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.


#### **8.3 MEASUREMENT SETUP**







# Radiated Emissions 30MHz to 1GHz Test setup

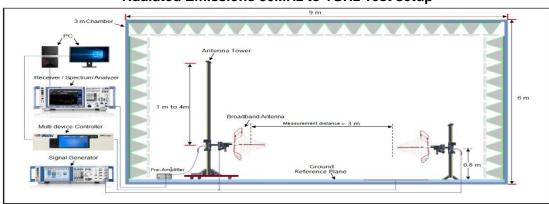

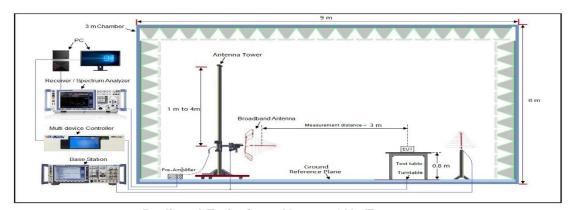

Radiated Emissions Above 1GHz Test setup

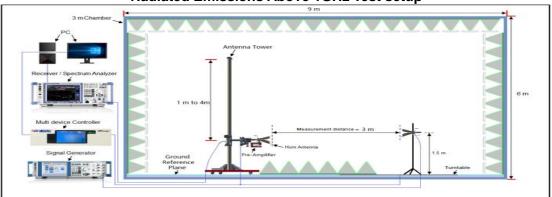

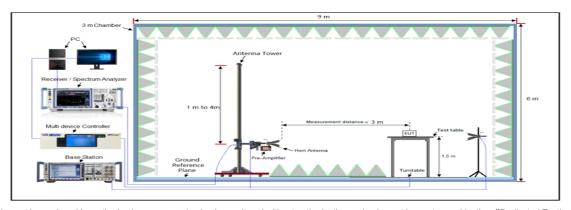



Page 32 of 85

#### 8.4 Measurement Result

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10 harmonic.


In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.

The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.


EIRP = "Read Value" + Measured substitution value + 2.15.

#### Test limit calculation:


Preliminary calculation	Final Result				
At least 50+10 log (P) =50+10log (5) =56.99 (dB)	Limit=P- Preliminary calculation=36.99-56.99=-20 dBm				
At least 50+10 log (P) =50+10log (1) =50.00 (dB)	Limit=P- Preliminary calculation=30.00-50.00=-20 dBm				






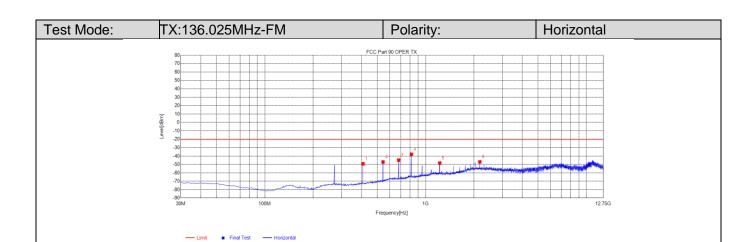


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	408.3	-79.01	-49.13	-20.00	29.13	29.88	196	Horizontal
2	544.1	-79.66	-46.96	-20.00	26.96	32.70	50	Horizontal
3	680.87	-79.68	-44.76	-20.00	24.76	34.92	282	Horizontal
4	816.67	-75.33	-37.81	-20.00	17.81	37.52	59	Horizontal
5	1224.4474	-44.16	-48.25	-20.00	28.25	-4.09	59	Horizontal
6	2176.2926	-49.06	-46.86	-20.00	26.86	2.20	0	Horizontal

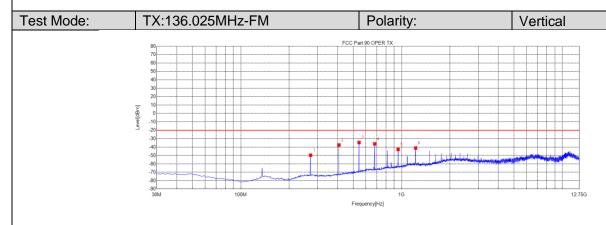


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	271.53	-78.02	-49.64	-20.00	29.64	28.38	45	Vertical
2	408.3	-67.35	-37.47	-20.00	17.47	29.88	328	Vertical
3	544.1	-67.18	-34.48	-20.00	14.48	32.70	345	Vertical
4	680.87	-71.03	-36.11	-20.00	16.11	34.92	360	Vertical
5	952.47	-81.21	-42.67	-20.00	22.67	38.54	9	Vertical
6	1224.4474	-36.97	-41.06	-20.00	21.06	-4.09	27	Vertical






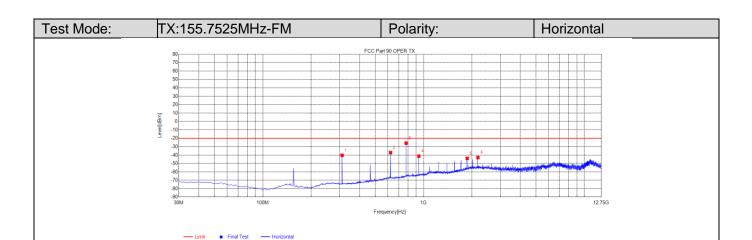


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	311.3	-68.26	-40.19	-20.00	20.19	28.07	150	Horizontal
2	623.64	-71.84	-37.05	-20.00	17.05	34.79	287	Horizontal
3	778.84	-62.60	-25.76	-20.00	5.76	36.84	0	Horizontal
4	935.01	-79.48	-41.26	-20.00	21.26	38.22	158	Horizontal
5	1869.587	-44.34	-43.92	-20.00	23.92	0.42	350	Horizontal
6	2180.9931	-45.09	-42.89	-20.00	22.89	2.20	350	Horizontal

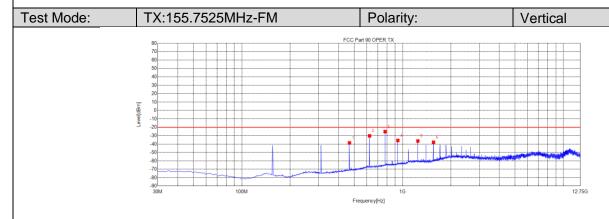


	<u></u>							<u></u>
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	467.47	-69.86	-38.56	-20.00	18.56	31.30	358	Vertical
2	623.64	-64.96	-30.17	-20.00	10.17	34.79	342	Vertical
3	778.84	-61.95	-25.11	-20.00	5.11	36.84	18	Vertical
4	935.01	-73.90	-35.68	-20.00	15.68	38.22	18	Vertical
5	1245.5996	-32.21	-36.30	-20.00	16.30	-4.09	342	Vertical
6	1558.1808	-34.39	-37.80	-20.00	17.80	-3.41	333	Vertical






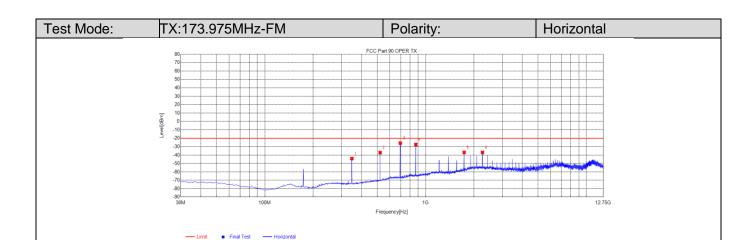


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	348.16	-72.46	-44.14	-20.00	24.14	28.32	180	Horizontal
2	521.79	-69.35	-37.08	-20.00	17.08	32.27	44	Horizontal
3	696.39	-60.74	-25.72	-20.00	5.72	35.02	27	Horizontal
4	870.02	-64.70	-27.42	-20.00	7.42	37.28	61	Horizontal
5	1740.324	-35.65	-36.82	-20.00	16.82	-1.17	78	Horizontal
6	2262.0762	-39.18	-36.89	-20.00	16.89	2.29	316	Horizontal

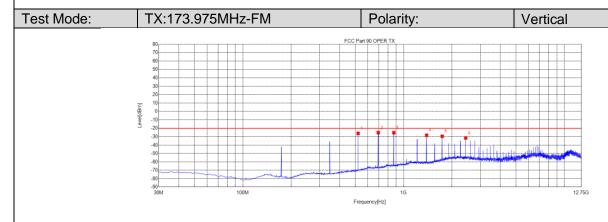


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	521.79	-58.27	-26.00	-20.00	6.00	32.27	350	Vertical
2	696.39	-60.09	-25.07	-20.00	5.07	35.02	325	Vertical
3	870.02	-62.51	-25.23	-20.00	5.23	37.28	358	Vertical
4	1392.4892	-24.12	-28.23	-20.00	8.23	-4.11	360	Vertical
5	1740.324	-28.31	-29.48	-20.00	9.48	-1.17	360	Vertical
6	2435.9936	-34.00	-31.54	-20.00	11.54	2.46	9	Vertical






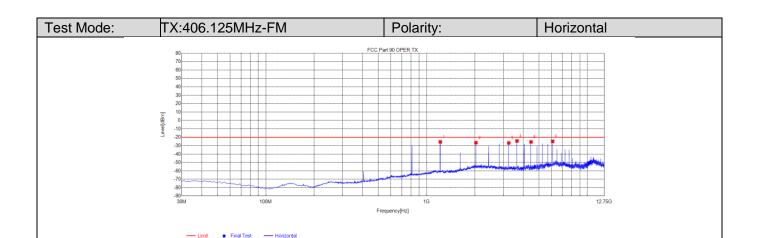


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1218.5719	-21.38	-25.46	-20.00	5.46	-4.08	304	Horizontal
2	2030.5781	-28.47	-26.42	-20.00	6.42	2.05	10	Horizontal
3	3249.1749	-28.63	-26.73	-20.00	6.73	1.90	20	Horizontal
4	3655.7656	-26.68	-24.32	-20.00	4.32	2.36	296	Horizontal
5	4467.7718	-29.78	-25.47	-20.00	5.47	4.31	304	Horizontal
6	6091.7842	-31.66	-24.79	-20.00	4.79	6.87	270	Horizontal

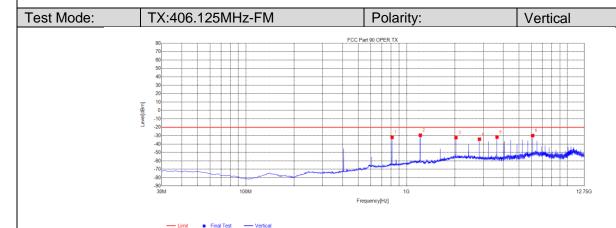

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	812.79	-69.41	-31.85	-20.00	11.85	37.56	325	Vertical
2	1218.5719	-25.33	-29.41	-20.00	9.41	-4.08	20	Vertical
3	2030.5781	-34.29	-32.24	-20.00	12.24	2.05	256	Vertical
4	2842.5843	-35.99	-34.15	-20.00	14.15	1.84	307	Vertical
5	3655.7656	-33.98	-31.62	-20.00	11.62	2.36	105	Vertical
6	6091.7842	-36.68	-29.81	-20.00	9.81	6.87	333	Vertical






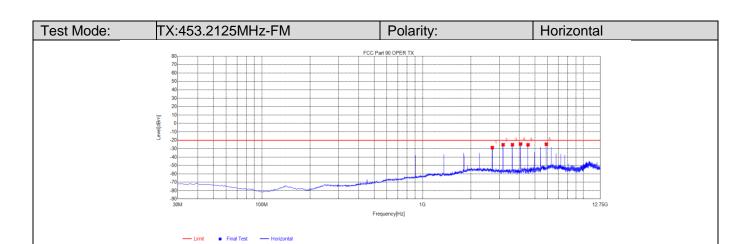


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	2719.1969	-30.79	-28.70	-20.00	8.70	2.09	0	Horizontal
2	3172.7923	-27.07	-25.28	-20.00	5.28	1.79	12	Horizontal
3	3626.3876	-27.55	-25.21	-20.00	5.21	2.34	274	Horizontal
4	4078.8079	-27.24	-24.44	-20.00	4.44	2.80	300	Horizontal
5	4532.4032	-29.85	-25.38	-20.00	5.38	4.47	308	Horizontal
6	5892.0142	-31.12	-24.62	-20.00	4.62	6.50	257	Horizontal

Test Mode:	TX:453.212	25MHz-FM	Polarity:	Vertica	al
	80 70 60 50 40 30 20 10 10 30 20 30 40 40 50 60 60 60 60 60 60 60 60 60 6	100M	at 90 OPER TX  1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	6	12.756


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	906.88	-78.38	-40.71	-20.00	20.71	37.67	309	Vertical
2	2719.1969	-39.43	-37.34	-20.00	17.34	2.09	317	Vertical
3	4078.8079	-36.60	-33.80	-20.00	13.80	2.80	266	Vertical
4	5438.4188	-40.88	-35.19	-20.00	15.19	5.69	300	Vertical
5	5892.0142	-31.49	-24.99	-20.00	4.99	6.50	334	Vertical
6	6345.6096	-37.76	-30.40	-20.00	10.40	7.36	266	Vertical






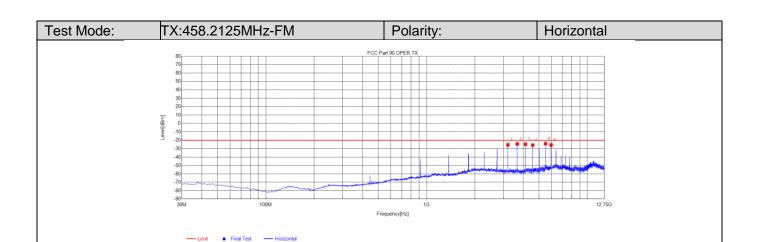


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	3208.0458	-27.17	-25.33	-20.00	5.33	1.84	275	Horizontal
2	3666.3416	-26.64	-24.28	-20.00	4.28	2.36	291	Horizontal
3	4124.6375	-27.66	-24.68	-20.00	4.68	2.98	300	Horizontal
4	4581.7582	-30.20	-25.68	-20.00	5.68	4.52	308	Horizontal
5	5498.3498	-29.69	-23.90	-20.00	3.90	5.79	258	Horizontal
6	5956.6457	-32.17	-25.56	-20.00	5.56	6.61	266	Horizontal

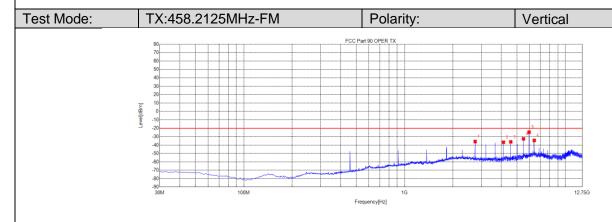


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	2749.75	-37.73	-35.70	-20.00	15.70	2.03	321	Vertical
2	4124.6375	-39.54	-36.56	-20.00	16.56	2.98	329	Vertical
3	4582.9333	-40.66	-36.14	-20.00	16.14	4.52	252	Vertical
4	5498.3498	-38.30	-32.51	-20.00	12.51	5.79	295	Vertical
5	5956.6457	-31.19	-24.58	-20.00	4.58	6.61	337	Vertical
6	6414.9415	-41.91	-34.42	-20.00	14.42	7.49	268	Vertical






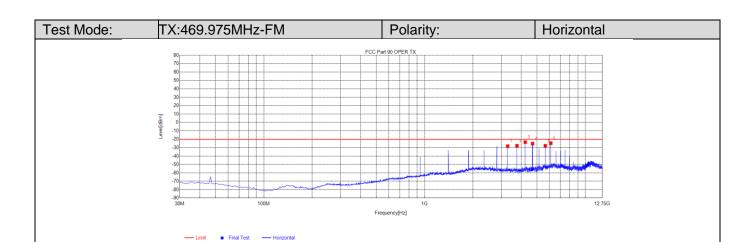


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	3290.304	-30.12	-28.15	-20.00	8.15	1.97	16	Horizontal
2	3760.351	-30.03	-27.63	-20.00	7.63	2.40	272	Horizontal
3	4230.398	-26.75	-23.36	-20.00	3.36	3.39	289	Horizontal
4	4700.445	-29.74	-25.09	-20.00	5.09	4.65	314	Horizontal
5	5639.3639	-33.68	-27.64	-20.00	7.64	6.04	255	Horizontal
6	6109.4109	-31.55	-24.65	-20.00	4.65	6.90	272	Horizontal

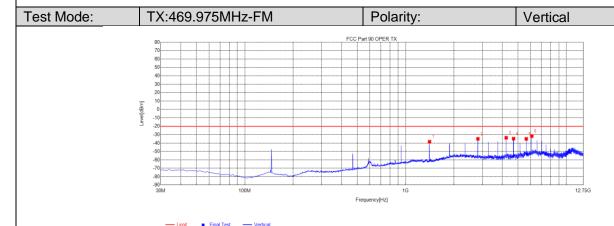


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1410.116	-34.22	-38.34	-20.00	18.34	-4.12	302	Vertical
2	2820.257	-36.76	-34.88	-20.00	14.88	1.88	310	Vertical
3	4230.398	-37.00	-33.61	-20.00	13.61	3.39	345	Vertical
4	4700.445	-39.35	-34.70	-20.00	14.70	4.65	310	Vertical
5	5639.3639	-41.00	-34.96	-20.00	14.96	6.04	319	Vertical
6	6109.4109	-38.57	-31.67	-20.00	11.67	6.90	268	Vertical






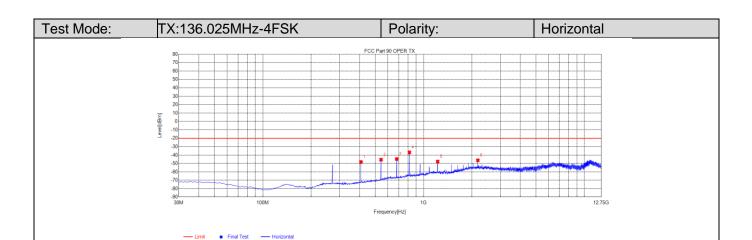


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	408.3	-78.06	-48.18	-20.00	28.18	29.88	179	Horizontal
2	544.1	-78.09	-45.39	-20.00	25.39	32.70	0	Horizontal
3	680.87	-79.57	-44.65	-20.00	24.65	34.92	110	Horizontal
4	816.67	-74.25	-36.73	-20.00	16.73	37.52	85	Horizontal
5	1224.4474	-43.52	-47.61	-20.00	27.61	-4.09	59	Horizontal
6	2176.2926	-48.36	-46.16	-20.00	26.16	2.20	351	Horizontal

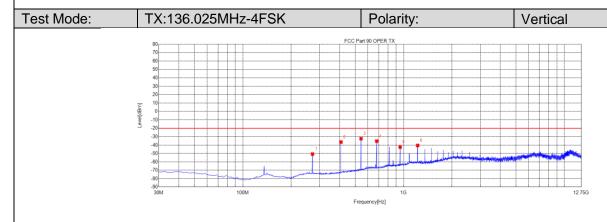

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	271.53	-79.03	-50.65	-20.00	30.65	28.38	1	Vertical
2	408.3	-66.25	-36.37	-20.00	16.37	29.88	326	Vertical
3	544.1	-64.99	-32.29	-20.00	12.29	32.70	326	Vertical
4	680.87	-70.16	-35.24	-20.00	15.24	34.92	360	Vertical
5	952.47	-80.85	-42.31	-20.00	22.31	38.54	27	Vertical
6	1224.4474	-36.33	-40.42	-20.00	20.42	-4.09	360	Vertical





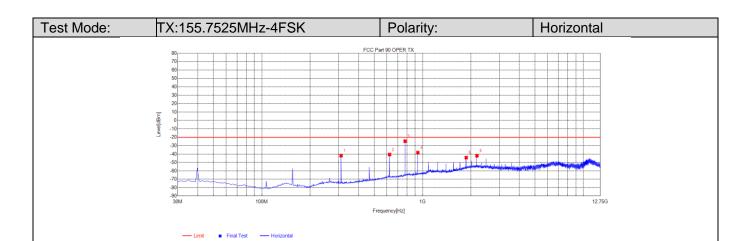

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	311.3	-69.96	-41.89	-20.00	21.89	28.07	138	Horizontal
2	623.64	-75.33	-40.54	-20.00	20.54	34.79	284	Horizontal
3	778.84	-61.44	-24.60	-20.00	4.60	36.84	9	Horizontal
4	935.01	-76.53	-38.31	-20.00	18.31	38.22	190	Horizontal
5	1869.587	-44.60	-44.18	-20.00	24.18	0.42	104	Horizontal
6	2180.9931	-44.22	-42.02	-20.00	22.02	2.20	9	Horizontal

Test Mode: TX:155.7525MHz-4FSK Polarity: Vertical	
FCC Part 90 OPER TX    Part   Part	2.75G

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	311.3	-72.18	-44.11	-20.00	24.11	28.07	76	Vertical
2	467.47	-71.86	-40.56	-20.00	20.56	31.30	33	Vertical
3	623.64	-66.38	-31.59	-20.00	11.59	34.79	316	Vertical
4	778.84	-61.91	-25.07	-20.00	5.07	36.84	7	Vertical
5	935.01	-69.65	-31.43	-20.00	11.43	38.22	7	Vertical
6	1246.7747	-32.71	-36.80	-20.00	16.80	-4.09	342	Vertical