



Report No.: FCC 1901223 File reference No.: 2019-03-01

Applicant: FORM ELECTRONICS CO., LTD.

Product: WIRELESS ICON SPEAKER

Model No.: FM0011S, SK SPEAKERICON1, SK SPEAKERICON2,

SK SPEAKERICON3

Trademark: SUCK UK

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: March 01, 2019

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1901223 Page 2 of 81

Date: 2019-03-01



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Page 3 of 81

Report No.: FCC1901223

Date: 2019-03-01



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
5.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth	25
8.0	Maximum Output Power.	37
9.0	Carrier Frequency Separation.	40
10.0	Number of Hopping Channel.	44
11.0	Time of Occupancy (Dwell Time).	48
12.0	Out of Band Measurement.	55
13.0	Antenna Requirement.	72
14.0	FCC ID Label	73
15.0	Photo of Test Setup and EUT View	74

Report No.: FCC1901223

Date: 2019-03-01



Page 4 of 81

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: FORM ELECTRONICS CO., LTD.

Address: 4F Bldg E, JunFeng Industrial Park, Lezhujiao, Xixiang, Bao'an Dist, Shenzhen China

Telephone: 86-13902920187 Fax: 86-755-84193911

1.3 Description of EUT

Product: WIRELESS ICON SPEAKER

Manufacturer: FORM ELECTRONICS CO., LTD.

Address: 4F Bldg E, JunFeng Industrial Park, Lezhujiao, Xixiang, Bao'an Dist, Shenzhen

China

Brand Name: SUCK UK
Model Number: FM0011S

Additional Model Number: SK SPEAKERICON1, SK SPEAKERICON2, SK SPEAKERICON3

Type of Modulation GFSK, 月/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: PCB Antenna. The gain of the antennas is 1.7dBi.

Software Version: D56AD58C(SK-ICON)

Hardware Version: FM0011S-V1.2 2018-11-14

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2019-01-24 to 2019-03-01

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1901223 Page 5 of 81

Date: 2019-03-01



Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty =6.0dB Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 81

Report No.: FCC1901223

Date: 2019-03-01



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2018-06-22	2019-06-21
Ultra Broadband ANT	R&S	HL562	100157	2018-06-18	2019-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2018-06-22	2019-06-21
Loop Antenna	EMCO	6507	00078608	2018-06-25	2019-06-24
Spectrum	R&S	FSIQ26	100292	2018-06-22	2019-06-21
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2018-06-25	2019-06-24
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-08-24	2019-08-23
Power meter	Anritsu	ML2487A	6K00003613	2018-08-22	2019-08-21
Power sensor	Anritsu	MA2491A	32263	2018-08-22	2019-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2019-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2018-06-22	2019-06-21
EMI Test Receiver	RS	ESH3	860904/006	2018-06-22	2019-06-21
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2018-06-22	2019-06-21
Spectrum	HP/Agilent	E4407B	MY50441392	2018-03-27	2019-03-26
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2018-05-24	2019-05-23
RF Cable	Zhengdi	7m		2018-03-17	2019-03-16
RF Switch	EM	EMSW18	060391	2018-06-22	2019-06-21
Pre-Amplifier	Schwarebeck	BBV9743	#218	2018-06-22	2019-06-21
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2018-08-05	2019-08-04
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Page 7 of 81

Report No.: FCC1901223

Date: 2019-03-01



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(c)	PASS	Complies
Maximum Peak Out Power	15.247 (a1), (b1)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a) , 15.209 (a)	PASS	Complies
Conducted Emissions	15.207(a)	PASS	Complies

Note: Test according to ANSI C63.10-2013

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 81


Report No.: FCC1901223

Date: 2019-03-01



5. Power Line Conducted Emission Test

5.1 Schematics of the test

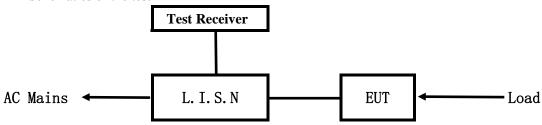


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

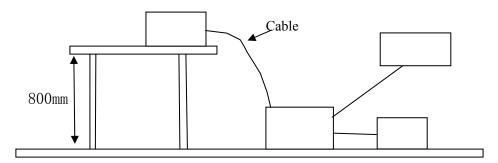

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Page 9 of 81

Report No.: FCC1901223

Date: 2019-03-01



A. EUT

Device	Manufacturer	Model	FCC ID
WIRELESS ICON SPEAKER	FORM ELECTRONICS CO., LTD.	FM0011S	2AAL7-FM0011S

B. Internal Device

Device	Manufacturer	Model Rating			

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	BSY	BSY01J30500150V U1	Input:100-240V~, 50/60Hz, 0.2A,;
			Output: DC5V, 1.5A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

Frequency	Class A Lim	its (dB μ V)	Class B Limits (dB µ V)			
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0		
5.00 ~ 30.00	73.0	60.0	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1901223

Date: 2019-03-01



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

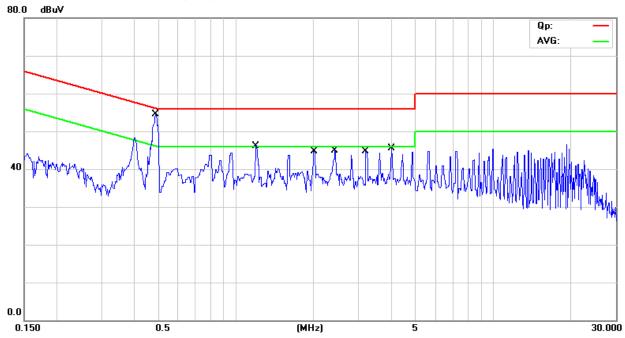

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBu∨	dB	dBu∨	dBu∨	dB	Detector	Comment
1 *	0.4828	40.60	9.77	50.37	56.29	-5.92	QP	
2	0.4828	5.80	9.77	15.57	46.29	-30.72	AVG	
3	1.1971	18.10	9.79	27.89	56.00	-28.11	QP	
4	1.1971	-7.80	9.79	1.99	46.00	-44.01	AVG	
5	2.0131	24.40	9.80	34.20	56.00	-21.80	QP	
6	2.0131	-1.10	9.80	8.70	46.00	-37.30	AVG	
7	2.4200	29.10	9.82	38.92	56.00	-17.08	QP	
8	2.4200	5.00	9.82	14.82	46.00	-31.18	AVG	
9	3.1918	21.70	9.85	31.55	56.00	-24.45	QP	
10	3.1918	-11.10	9.85	-1.25	46.00	-47.25	AVG	
11	4.0292	17.80	9.89	27.69	56.00	-28.31	QP	
12	4.0292	-9.50	9.89	0.39	46.00	-45.61	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-03-01



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

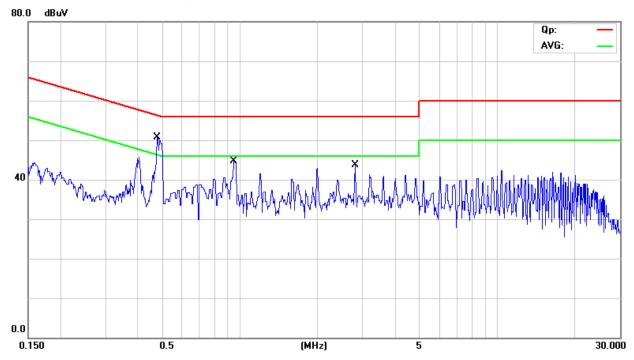

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBu∨	dB	dBu∨	dBu∨	dB	Detector	Comment
1	0.4757	23.20	9.77	32.97	56.41	-23.44	QP	
2	0.4757	1.90	9.77	11.67	46.41	-34.74	AVG	
3	0.9421	24.10	9.79	33.89	56.00	-22.11	QP	
4	0.9421	-7.20	9.79	2.59	46.00	-43.41	AVG	
5 *	2.7940	24.50	9.83	34.33	56.00	-21.67	QP	
6	2.7940	-11.60	9.83	-1.77	46.00	-47.77	AVG	
-								

Report No.: FCC1901223 Page 12 of 81


Date: 2019-03-01



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

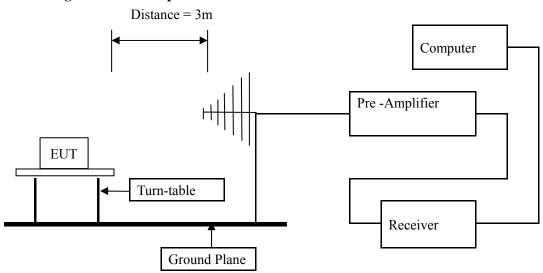

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1901223 Page 13 of 81

Date: 2019-03-01



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. 8DPSK was the worse case because it has highest output power

Report No.: FCC1901223

Date: 2019-03-01



Page 14 of 81

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass


Page 15 of 81 Report No.: FCC1901223

Date: 2019-03-01



Test Figure:

H

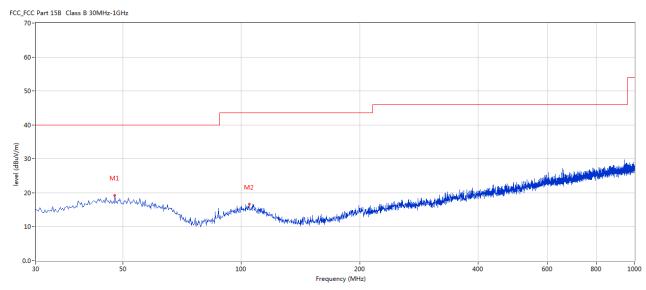

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	47.698	19.27	-11.34	40.0	-20.73	Peak	260.00	100	Н	Pass
2	104.671	16.67	-13.25	43.5	-26.83	Peak	230.00	100	Н	Pass


Page 16 of 81 Report No.: FCC1901223

Date: 2019-03-01



Test Figure:



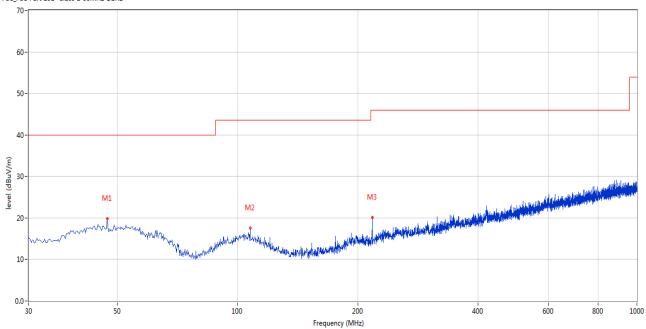

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	47.213	19.77	-11.41	40.0	-20.23	Peak	9.00	100	V	Pass
2	107.581	17.59	-13.40	43.5	-25.91	Peak	273.00	100	V	Pass
3	217.406	20.10	-13.47	46.0	-25.90	Peak	212.00	100	٧	Pass

Report No.: FCC1901223 Page 17 of 81

Date: 2019-03-01



Operation Mode: Transmitting under Low Channel (2402MHz)

	0	,	
Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4804		Н	74(Peak)/ 54(AV)
4804		V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4882	-	Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323		H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205	-	H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: FCC1901223 Page 18 of 81

Date: 2019-03-01



Operation Mode: Transmitting under High Channel (2480MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured

Page 19 of 81 Report No.: FCC1901223


Date: 2019-03-01



Please refer to the following test plots for details:

Low Channel: Vertical

FCC Part 15B Class B 1GHz-18GHz - 2

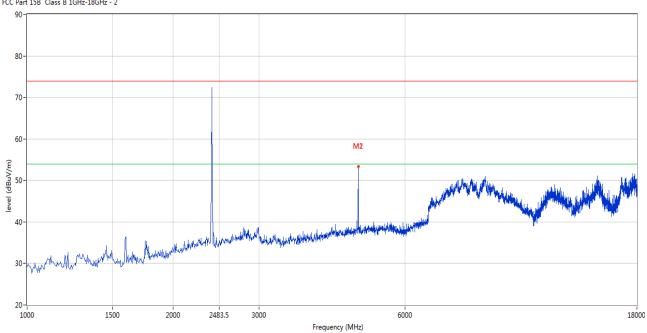


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	4803.799	53.29	3.12	74.0	-20.71	Peak	95.00	100	V	Pass
2	4803.799	41.67	3.12	54.0	-12.33	AV	95.00	100	V	Pass

Page 20 of 81 Report No.: FCC1901223

Date: 2019-03-01



Low Channel: Horizontal

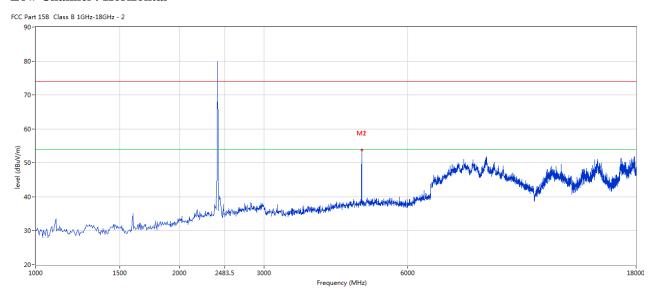


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4803.799	53.74	3.12	74.0	-20.26	Peak	0.00	100	Н	Pass
2	4803.799	41.89	3.12	74.0	-12.11	AV	0.00	100	Н	Pass

Page 21 of 81 Report No.: FCC1901223

Date: 2019-03-01



Middle Channel: Horizontal

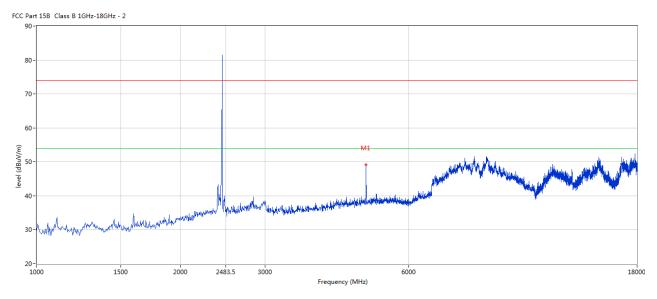


No.	Frequenc	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	y (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4882.080	49.10	3.20	74.0	-24.90	Peak	236.00	100	Н	Pass

Page 22 of 81 Report No.: FCC1901223

Date: 2019-03-01



Middle Channel: Vertical

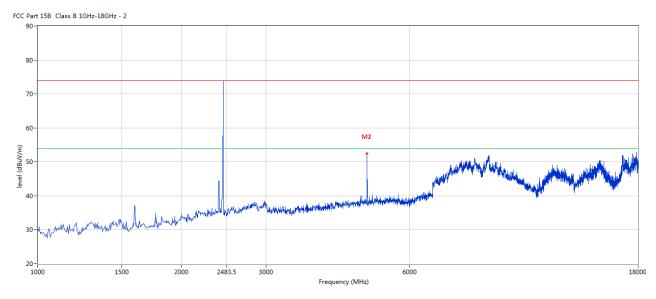


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4882.080	52.41	3.20	74.0	-21.59	Peak	187.00	100	V	Pass
2	4882.080	39.55	3.20	54.0	-14.45	AV	187.00	100	V	Pass

Page 23 of 81 Report No.: FCC1901223

Date: 2019-03-01



High Channel: Horizontal

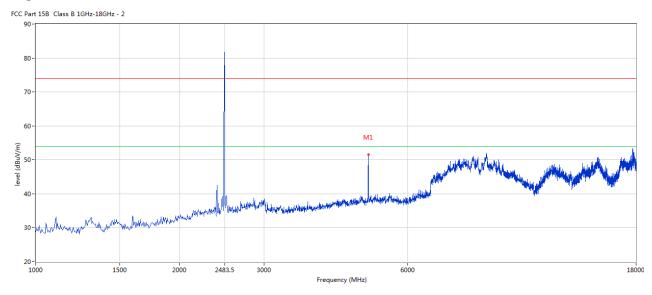


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4960.010	51.60	3.36	74.0	-22.40	Peak	27.00	100	Н	Pass

Report No.: FCC1901223 Page 24 of 81

Date: 2019-03-01



High Channel: Vertical

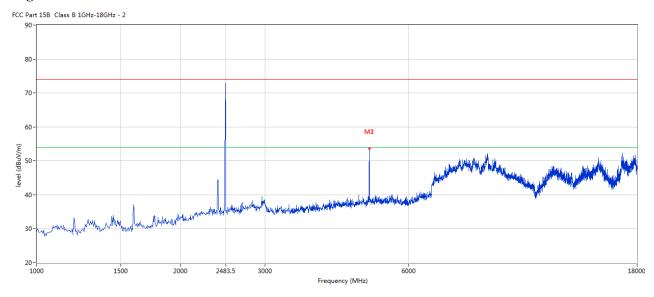

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4960.010	53.67	3.36	74.0	-20.33	Peak	113.00	100	V	Pass
2	4960.010	41.23	3.36	54.0	-12.77	AV	113.00	100	V	Pass

Note: for the radiated emissions above 18G, it is the floor noise.

Report No.: FCC1901223

Date: 2019-03-01



Page 25 of 81

7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

-3 PC 01 1:1	oddiadon. Of bix			
EUT	WIRELE	SS ICON SPEAKER	Model	FM0011S
Mode	Ke	ep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail
Low	2402	908		Pass
Middle	2441	902		Pass
High	2480	896		Pass


Report No.: FCC1901223 Page 26 of 81

Date: 2019-03-01



Test Figure:

1. Condition: Low Channel

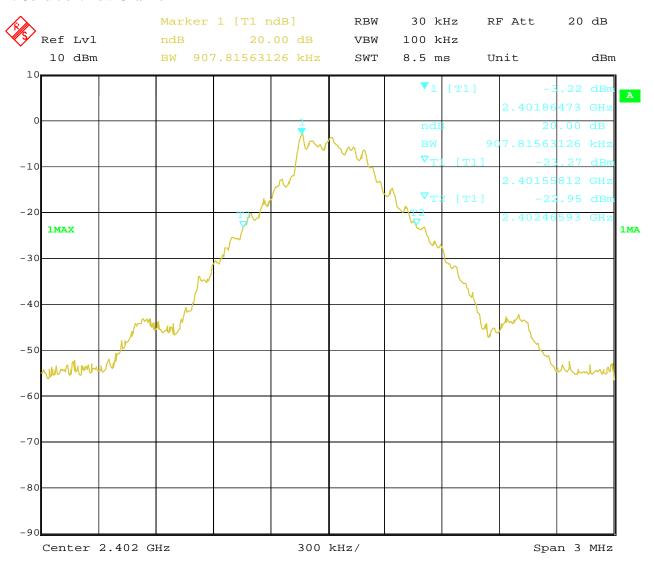


Date: 26.FEB.2019 15:16:49

Page 27 of 81 Report No.: FCC1901223

Date: 2019-03-01



2. Condition: Middle Channel

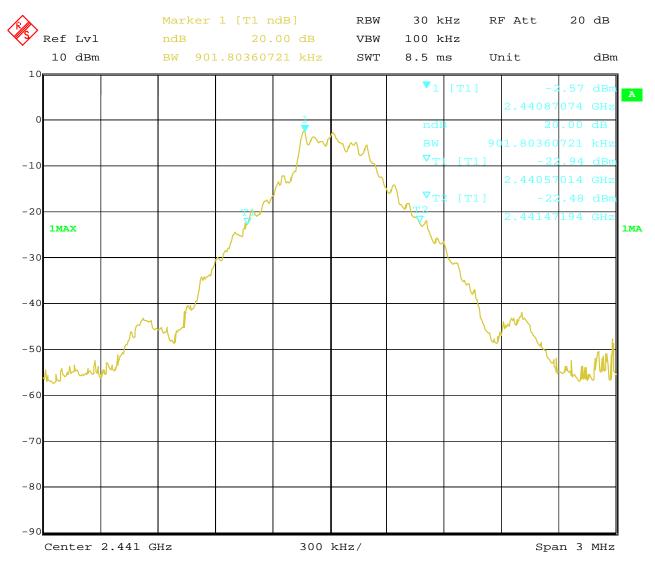


26.FEB.2019 Date: 15:12:55 Report No.: FCC1901223 Page 28 of 81

Date: 2019-03-01



3. High Channel

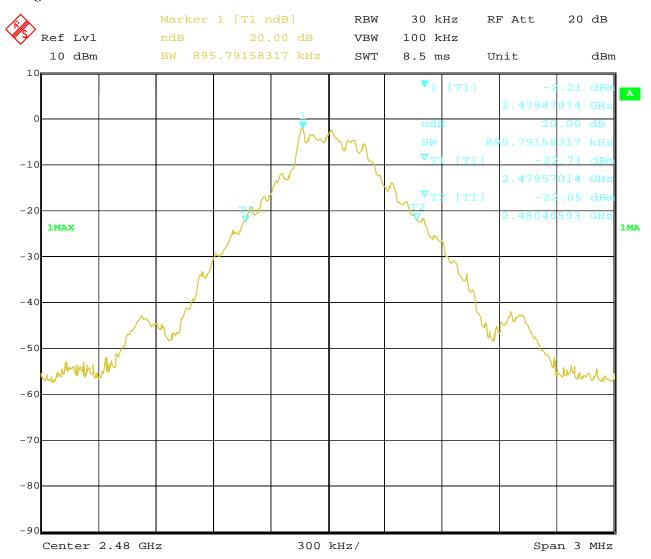

26.FEB.2019 15:21:34 Date:

Page 29 of 81 Report No.: FCC1901223

Date: 2019-03-01



Test Result

Type of Modulation: JI/4DQPSK

EUT	WIREL	ESS ICON SPEAKER	Model	FM0011S
Mode	K	eep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1238		Pass
Middle	2441	1232		Pass
High	2480	1269		Pass


Report No.: FCC1901223 Page 30 of 81

Date: 2019-03-01



Test Figure:

1. Condition: Low Channel

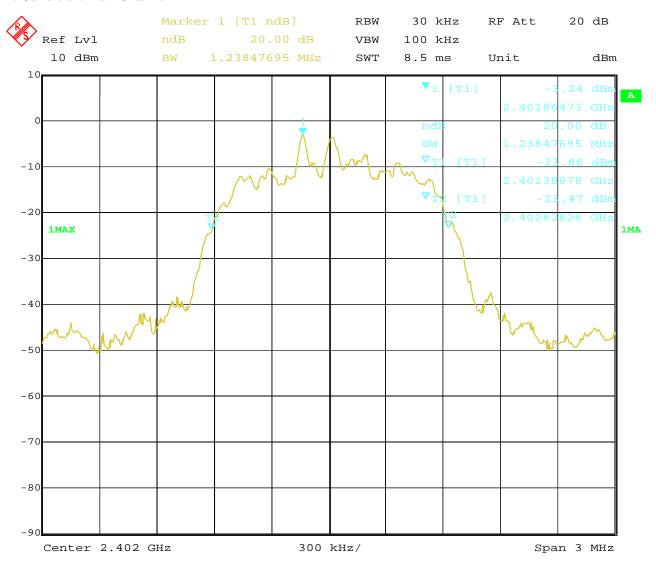


Date: 26.FEB.2019 15:17:43

Page 31 of 81 Report No.: FCC1901223

Date: 2019-03-01



2. Condition: Middle Channel

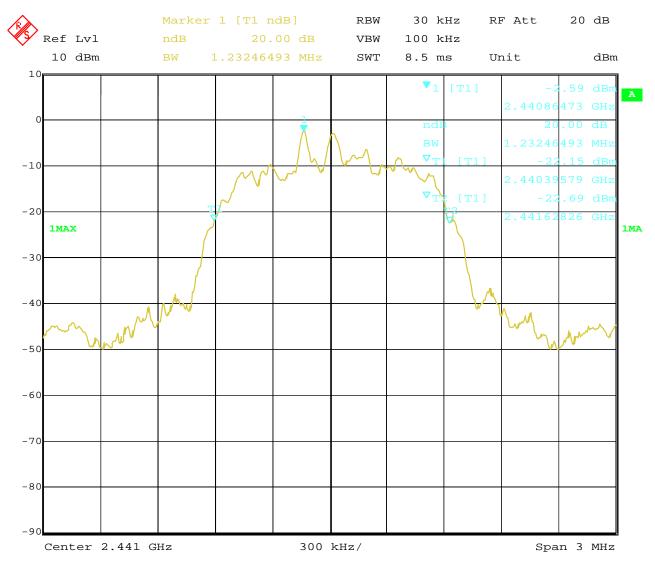


26.FEB.2019 Date: 15:13:58 Report No.: FCC1901223 Page 32 of 81

Date: 2019-03-01



3. High Channel

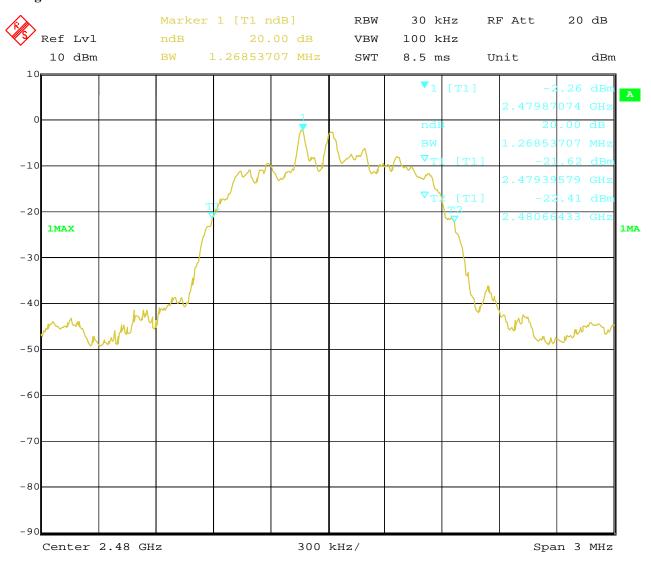

26.FEB.2019 15:20:21 Date:

Page 33 of 81 Report No.: FCC1901223

Date: 2019-03-01



Test Result

Type of Modulation: 8DPSK

EUT	WIREL	ESS ICON SPEAKER	Model	FM0011S
Mode	K	eep Transmitting	Input Voltage	DC3.7V
Temperati	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1232		Pass
Middle	2441	1275		Pass
High	2480	1269		Pass


Report No.: FCC1901223 Page 34 of 81

Date: 2019-03-01



Test Figure:

1. Condition: Low Channel

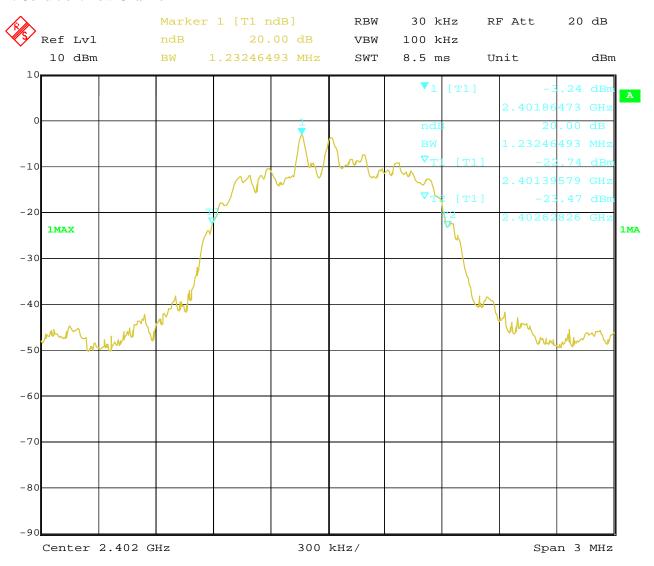


Date: 26.FEB.2019 15:18:37

Page 35 of 81 Report No.: FCC1901223

Date: 2019-03-01



2. Condition: Middle Channel

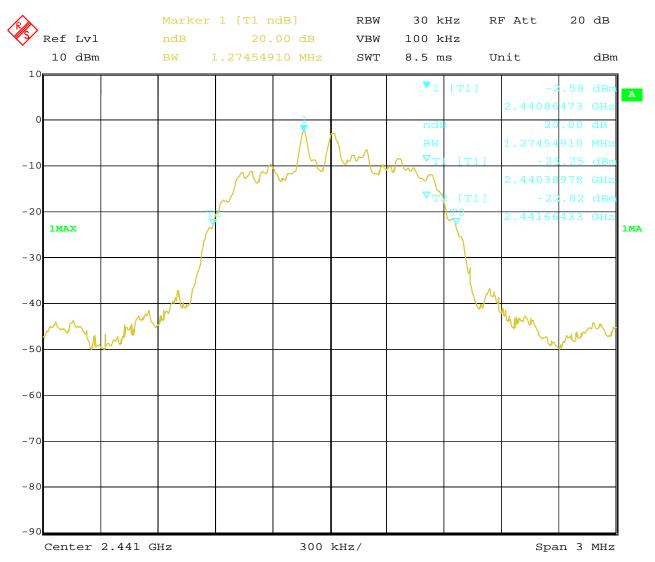


26.FEB.2019 Date: 15:15:10 Report No.: FCC1901223 Page 36 of 81

Date: 2019-03-01



3. High Channel

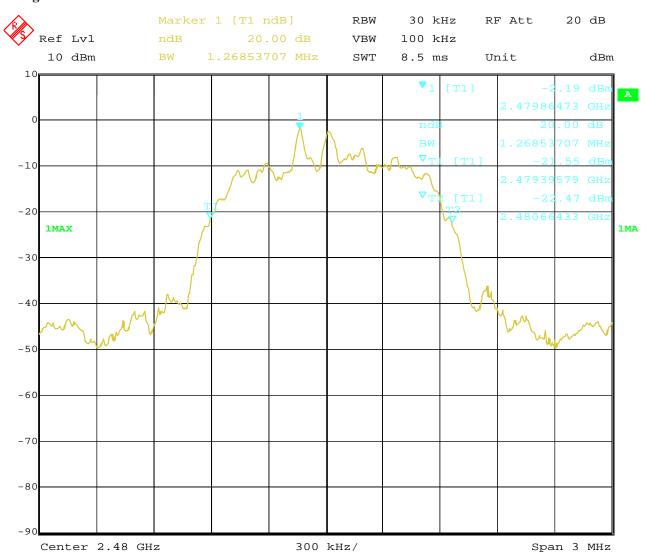

26.FEB.2019 15:19:40 Date:

Report No.: FCC1901223

Date: 2019-03-01



Page 37 of 81

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = 60s; Detector function = PK; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 38 of 81

Report No.: FCC1901223

Date: 2019-03-01



8.4Test Results

Type of Modulation: GFSK

EUT	WIRELESS ICON SPEAKER Model		el	FM0011S			
Mode	de Keep Transmitting Input		Input Voltage		ep Transmitting Input Voltage		DC3.7V
Temperature	emperature 24 deg. C, Hum		Humidity		56% RH		
Channel	Channel Frequency (MHz) Max. Power Output (dBm))	Peak Power Limit	Pass/ Fail		
		Peak		(dBm)			
Low	2402	-1.28		30	Pass		
Middle	2441	-0.65		30	Pass		
High	2480	-0.34		30	Pass		

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

EUT WIRELESS ICON SPEAKER		ESS ICON SPEAKER	Model		FM0011S
Mode	Mode Keep Transmitting In		Input Voltage		DC3.7V
Temperature	emperature 24 deg. C, Humi		Humi	dity	56% RH
Channel Frequency		Max. Power Output (dBm)	Peak Power	Pass/ Fail
Chamer	(MHz)	(MHz)		Limit (dBm)	
Low	2402	0.05		30	Pass
Middle	2441	0.71		30	Pass
High	2480	0.44		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 39 of 81 Report No.: FCC1901223

Date: 2019-03-01



Type of Modulation: 8DPSK

EUT	WIRELI	WIRELESS ICON SPEAKER		Model	FM0011S	
Mode	Ke	Keep Transmitting		Keep Transmitting Input Voltage		DC3.7V
Temperature	e 24 deg. C, H		Нι	umidity	56% RH	
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail	
Low	2402	0.06		30	Pass	
Middle	2441	0.71		30	Pass	
High	2480	0.47		30	Pass	

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Report No.: FCC1901223

Date: 2019-03-01



Page 40 of 81

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Report No.: FCC1901223

Date: 2019-03-01




9.4Test Result

Type of Modulation: GFSK

EUT	WIRELESS ICON S	Model		FM0011S	
Mode	Hopping O	Input Voltage		DC3.7V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3	3 of the 20 dB ban	dwidth	Pass

Test Plots

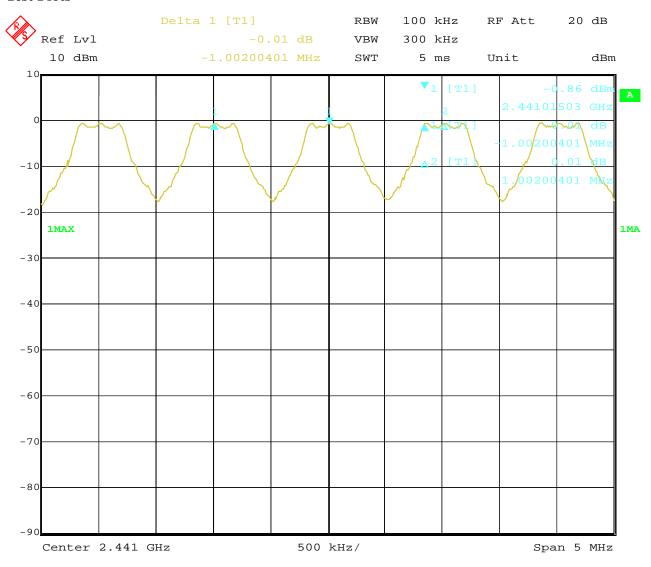

26.FEB.2019 14:29:10 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1901223 Page 42 of 81


Date: 2019-03-01



Type of Modulation: Л/4DQPSK

EUT	WIRELESS ICON S	Model		FM0011S	
Mode	Hopping O	Input Voltage		DC3.7V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2	2/3 of 20 dB bandy	width	Pass

Test Plots

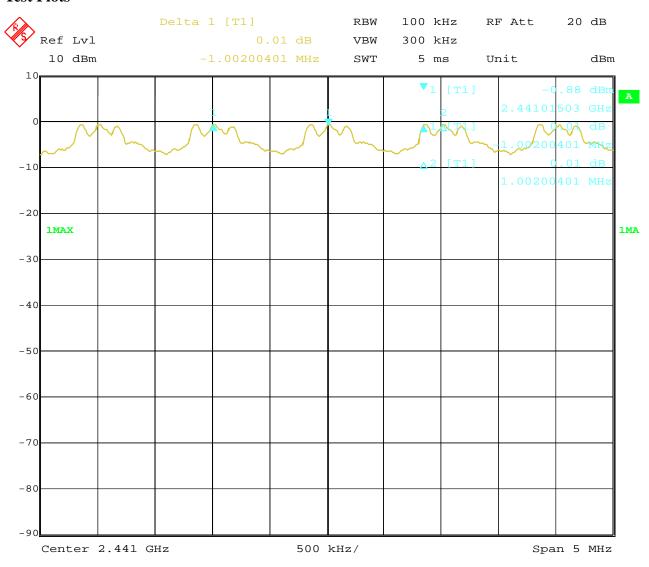

26.FEB.2019 14:31:50 Report No.: FCC1901223 Page 43 of 81


Date: 2019-03-01



Type of Modulation: 8DPSK

EUT	WIRELESS ICON S	Model		FM0011S	
Mode	Hopping O	Input Voltage		DC3.7V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation			Limit		
	1.000MHz	≥ 25 kHz or 2	2/3 of 20 dB bands	width	Pass

Test Plots

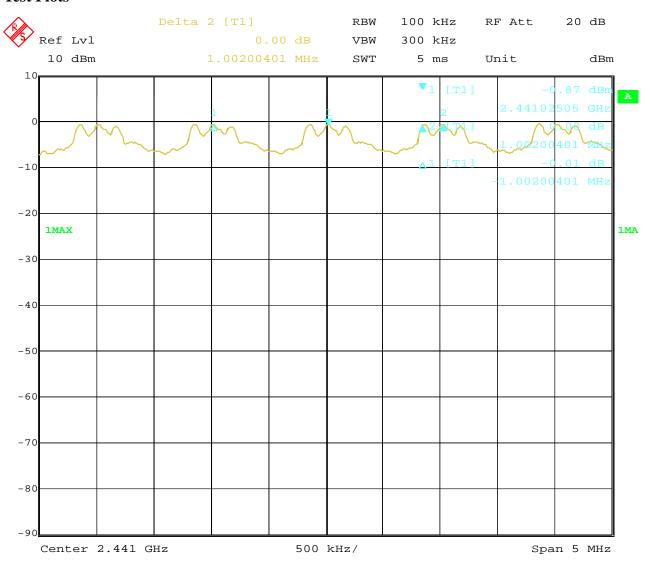

26.FEB.2019 14:33:02 Report No.: FCC1901223

Date: 2019-03-01



Page 44 of 81

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 45 of 81

Report No.: FCC1901223

Date: 2019-03-01




10.4Test Result

Type of Modulation: GFSK

EUT	WIRELESS ICON SPEAKER		Model		FM0011S	
Mode	Hopping On		Input Voltage	DC3.7V		
Temperature	2	24 deg. C,	Humidity	56% RH		
Operating Frequency		Number of hopp	oing channels	Limit	Pass/ Fail	
2402-2480MHz		79		≥ 15	Pass	

Test Plot

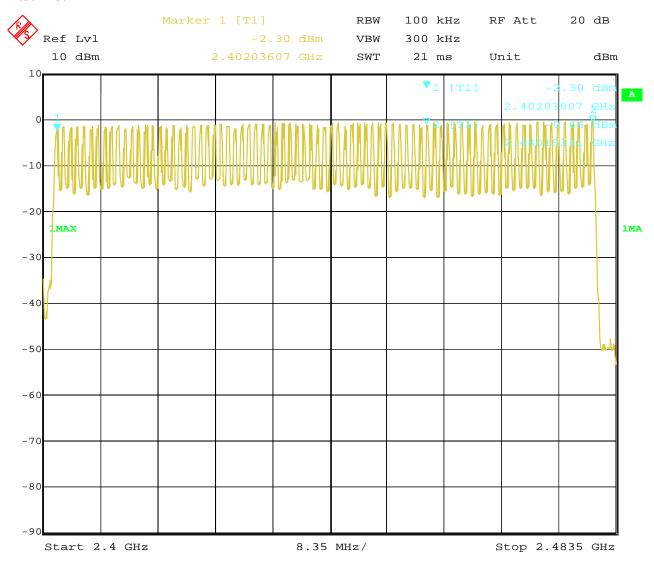

Date: 26.FEB.2019 14:35:40

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 46 of 81

Report No.: FCC1901223


Date: 2019-03-01



Type of Modulation: Л/4DQPSK

EUT	WIRELESS ICON SPEAKER		Mode	el	FM0011S		
Mode	Hopping On		Input Voltage			DC3.7V	
Temperature	24 deg. C,		Humidity			56% RH	
Operating Frequency		Number of hopping channels		Lir	nit	Pass/ Fail	
2402-2480MHz		79		<u>></u>	15	Pass	

Test Plot

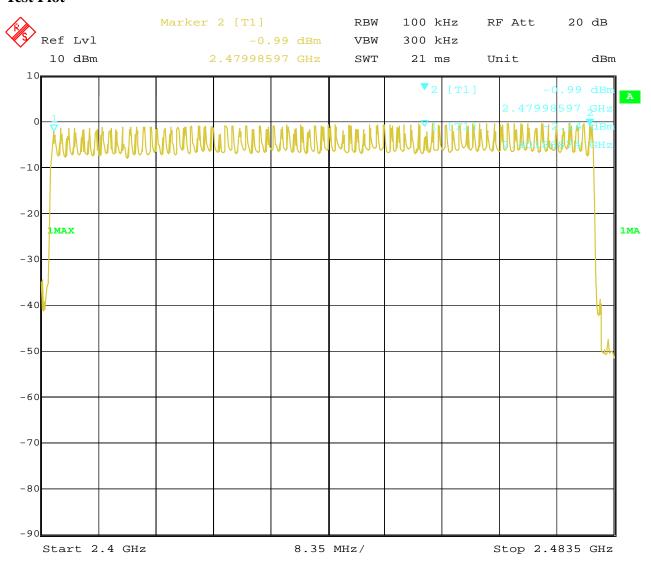

Date: 26.FEB.2019 14:38:35

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1901223 Page 47 of 81


Date: 2019-03-01



Type of Modulation: 8DPSK

EUT	WIRELESS ICON SPEAKER		Model			FM0011S	
Mode	Hopping On		Input V	oltage		DC3.7V	
Temperature	2	4 deg. C,	Humidi	ty		56% RH	
Operating Frequency		Number of hopp channels	oing	Liı	mit	Pass/ Fail	
2402-2480MHz		79		>	15	Pass	

Test Plot

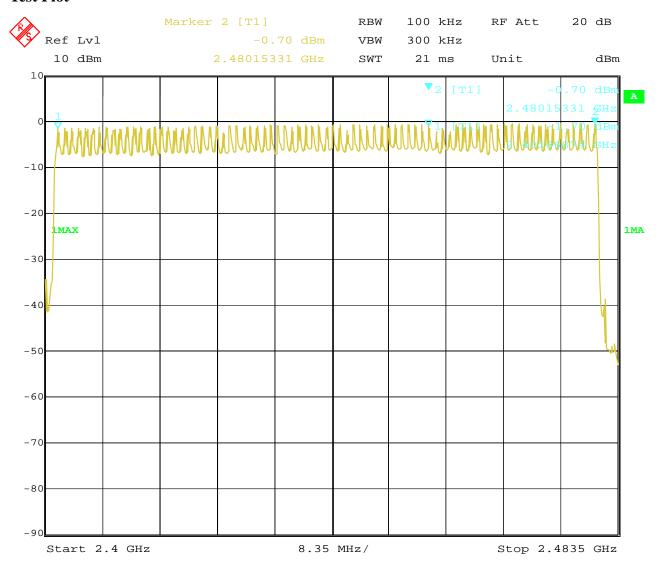

26.FEB.2019 14:42:06 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1901223

Date: 2019-03-01



Page 48 of 81

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: FCC1901223 Page 49 of 81

Date: 2019-03-01



11.4 Test Result

Type of Modulation: GFSK

-1, po 01 110 duamion 01 511								
EUT	WIRELESS IO	CON SPEAKER	Model	F	M0011S			
Mode	Keep Tr	ansmitting	Input Voltage	I	DC3.7V			
Temperatur	re 24 d	leg. C,	Humidity	5	56% RH			
Channel	Reading	Hoping	g Rate	Actual	Limit			
DH5								
Middle	2.926ms	266.667	7 hop/s	0.312s	0.4s			

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of $625\mu s$ with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: DH5 was the worst case.

Page 50 of 81


Report No.: FCC1901223

Date: 2019-03-01



Test Plots:

DH5

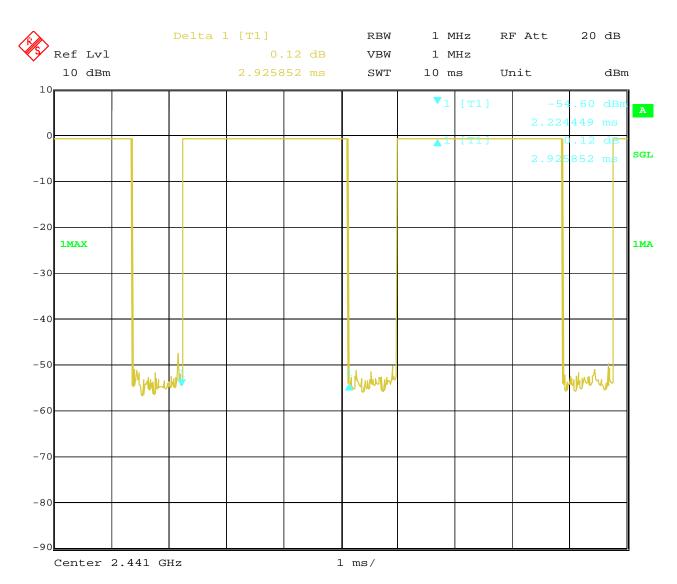

26.FEB.2019 15:10:06 Date:

Report No.: FCC1901223 Page 51 of 81

Date: 2019-03-01



Test Result

Type of Modulation: Л/4DQPSK

EUT	WIRELESS I	CON SPEAKER	Model	F	M0011S	
Mode	Keep Tr	ansmitting	Input Voltage	I	DC3.7V	
Temperatur	re 24 d	leg. C,	Humidity	5	66% RH	
Channel	Reading	Hoping	g Rate	Actual	Limit	
	DH5					
Middle	2.946ms	266.667	7 hop/s	0.314s	0.4s	

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 2DH5 was the worst case.

Page 52 of 81


Report No.: FCC1901223

Date: 2019-03-01



Test Plots:

2DH5

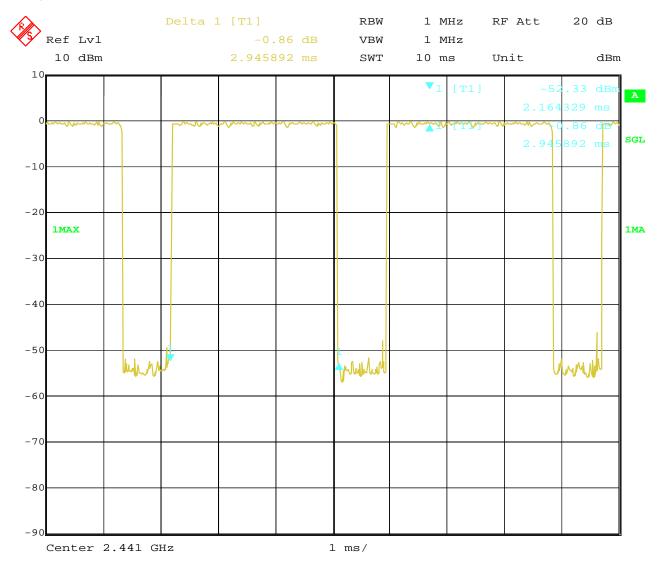

Date: 26.FEB.2019 15:10:39 Report No.: FCC1901223 Page 53 of 81

Date: 2019-03-01



Type of Modulation: 8DPSK

EUT	WIRELESS I	CON SPEAKER	Model	F	M0011S
Mode	Keep Tr	ransmitting Input Voltage		I	DC3.7V
Temperatur	re 24 d	leg. C,	Humidity	5	66% RH
Channel	Reading	Hoping	g Rate	Actual	Limit
	DH5				
Middle	2.946ms	266.667	7 hop/s	0.314s	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 3DH5 was the worst case.

Page 54 of 81


Report No.: FCC1901223

Date: 2019-03-01



Test Plots:

3DH5

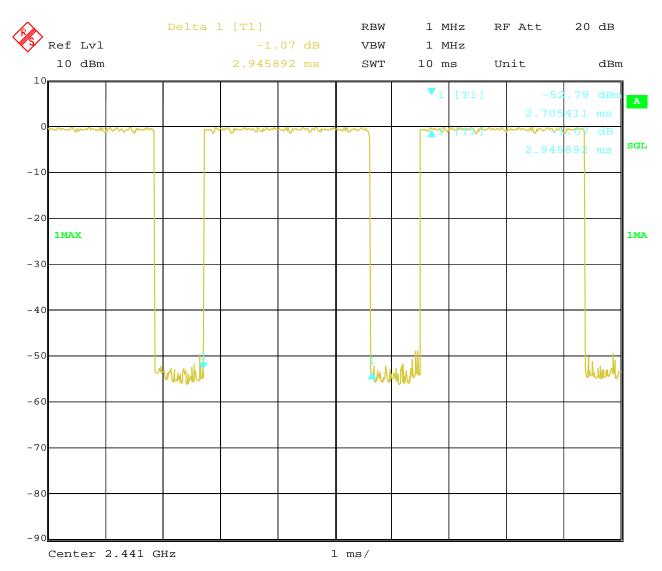

26.FEB.2019 15:11:11 Date:

Report No.: FCC1901223


Date: 2019-03-01



Page 55 of 81

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

- Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.
- 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No.: FCC1901223 Page 56 of 81

Date: 2019-03-01




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	WIRELESS ICON SPEAKER	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

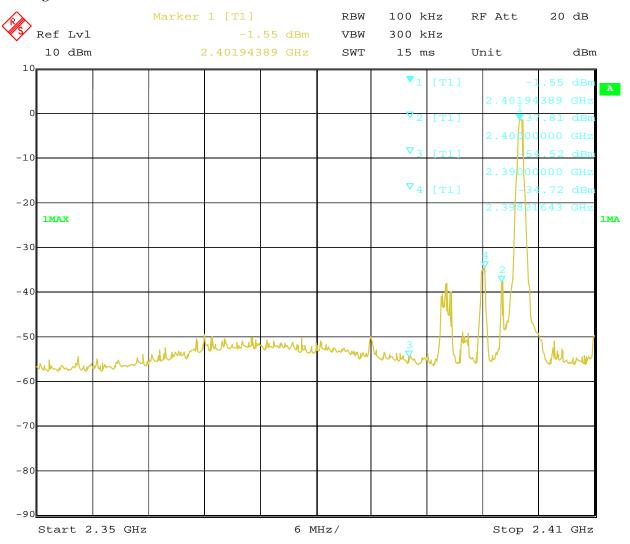

Date: 26.FEB.2019 14:46:24

Page 57 of 81

Report No.: FCC1901223

Date: 2019-03-01




Type of Modulation: GFSK

12.4 Band Edge Test Result

Product:	WIRELESS ICON SPEAKER	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

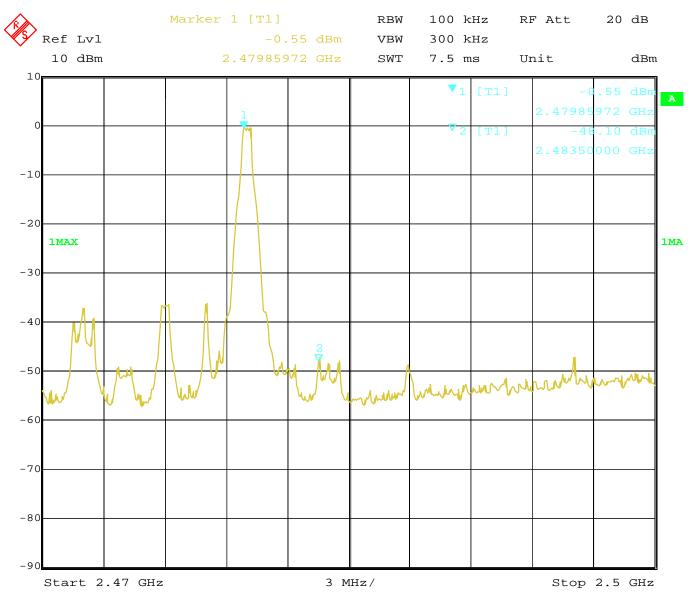

26.FEB.2019 14:56:00 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1901223 Page 58 of 81

Date: 2019-03-01




Type of Modulation: GFSK

Band Edge Test Result

Product:	WIRELESS ICON SPEAKER	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

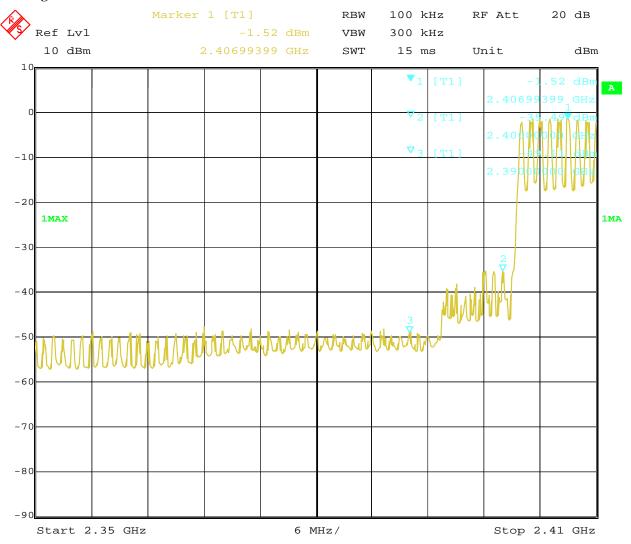

Date: 26.FEB.2019 14:44:47 Report No.: FCC1901223 Page 59 of 81

Date: 2019-03-01




Type of Modulation: GFSK

Band Edge Test Result

Product:	WIRELESS ICON SPEAKER	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

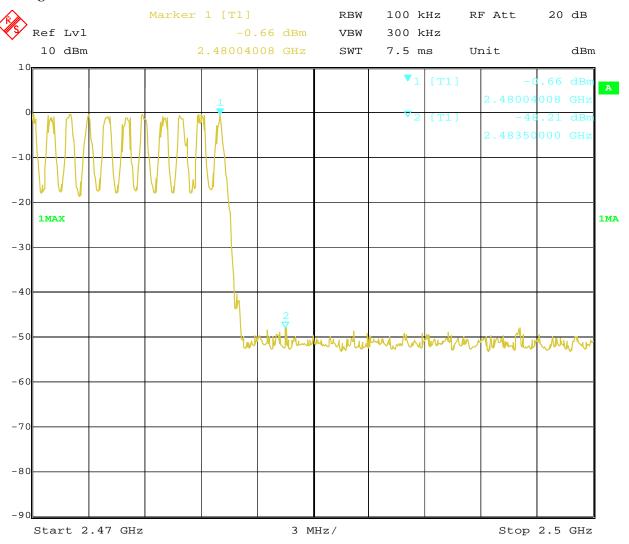

26.FEB.2019 15:00:35 Date:

Page 60 of 81

Report No.: FCC1901223

Date: 2019-03-01




Type of Modulation: Л/4DQPSK

12.4 Out of Band Test Result

Product:	WIRELESS ICON SPEAKER	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

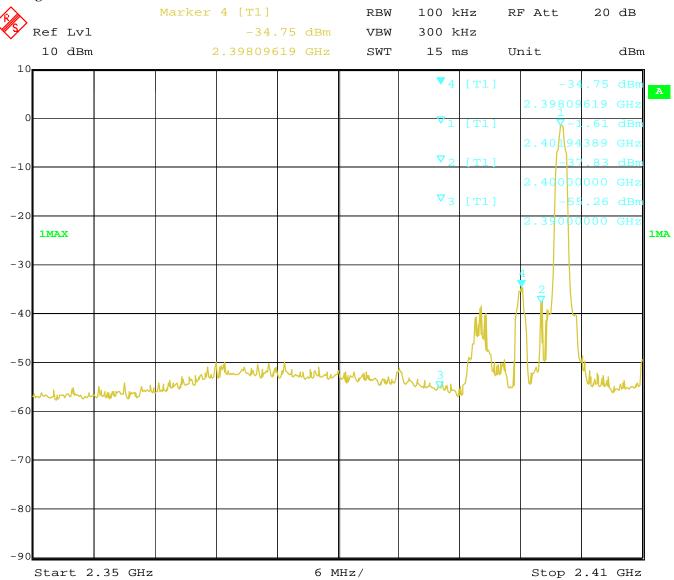

Date: 26.FEB.2019 14:48:01

Page 61 of 81

Report No.: FCC1901223

Date: 2019-03-01




Type of Modulation: Л/4DQPSK

Band Edge Test Result 12.4

Product:	WIRELESS ICON SPEAKER	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

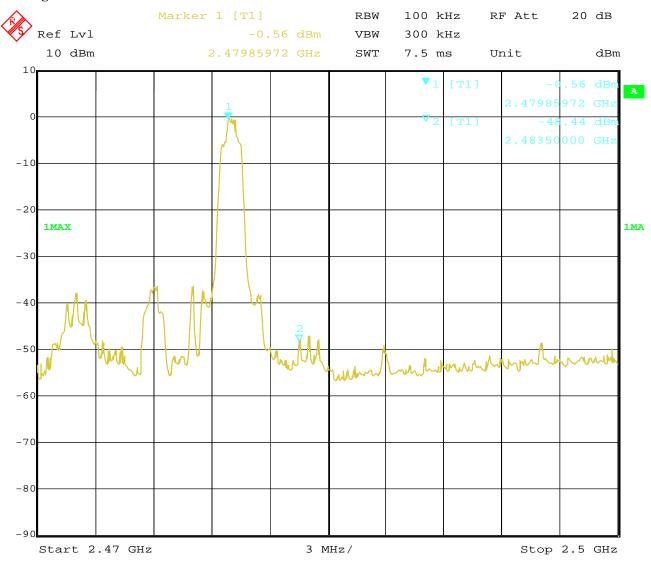

Date: 26.FEB.2019 14:57:50 Report No.: FCC1901223 Page 62 of 81

Date: 2019-03-01




Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:	WIRELESS ICON SPEAKER	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

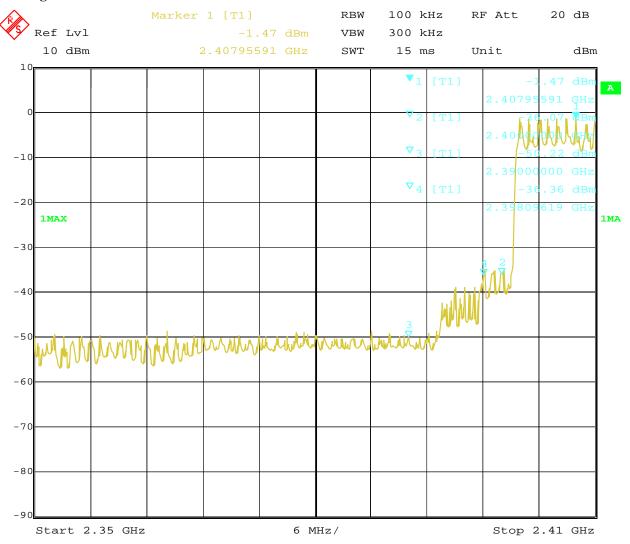

Date: 26.FEB.2019 14:50:32 Report No.: FCC1901223 Page 63 of 81

Date: 2019-03-01




Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:	WIRELESS ICON SPEAKER	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

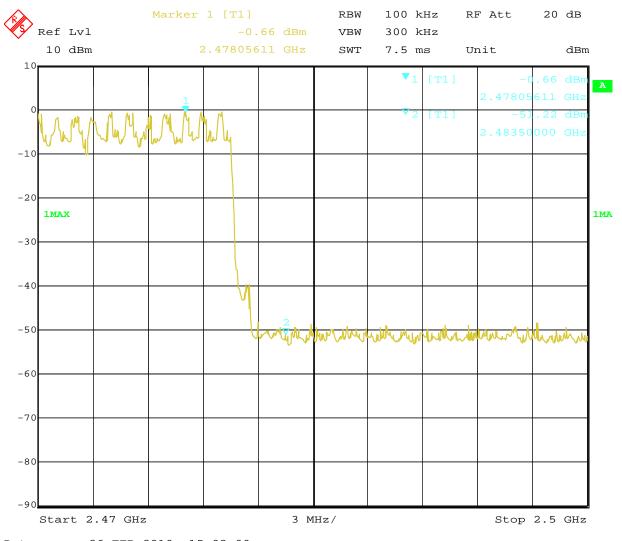

Date: 26.FEB.2019 15:03:00

Page 64 of 81

Report No.: FCC1901223

Date: 2019-03-01




Type of Modulation: 8DPSK

12.4 Band Edge Test Result

Product:	WIRELESS ICON SPEAKER	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

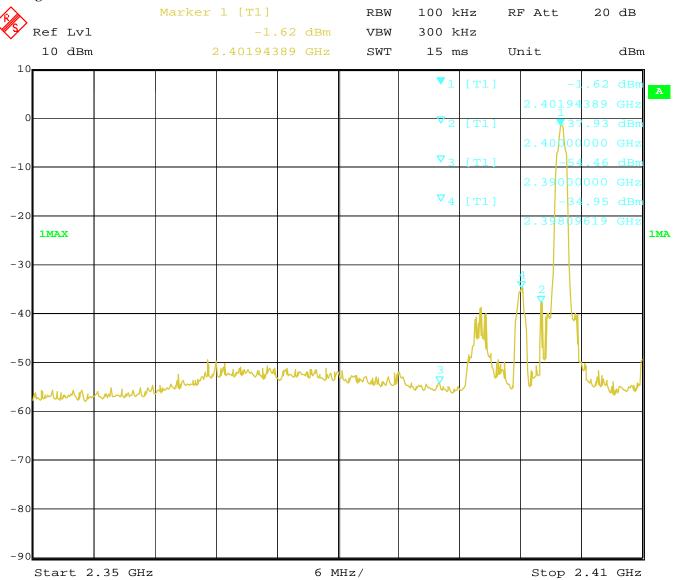

Date: 26.FEB.2019 14:54:19

Page 65 of 81

Report No.: FCC1901223

Date: 2019-03-01




Type of Modulation: 8DPSK

12.4 Band Edge Test Result

Product:	WIRELI	ESS ICON SPEAKER	Test Mode:	High Channel
Mode	Kee	ping Transmitting	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK (dBμV/m)	44.8		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

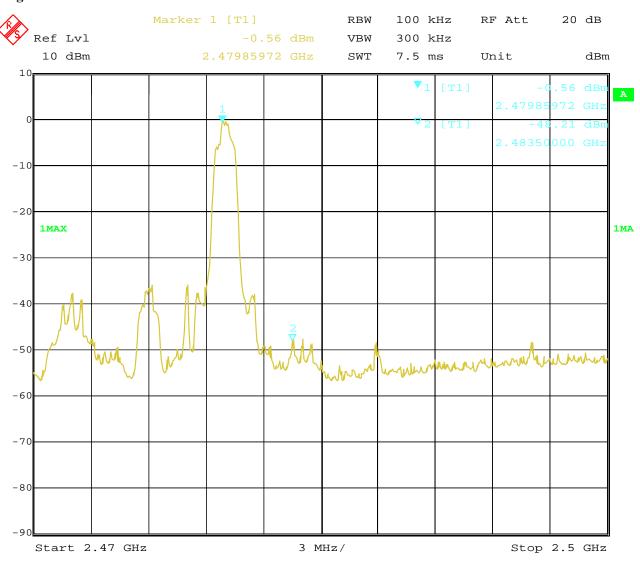

26.FEB.2019 Date: 14:59:05

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1901223 Page 66 of 81

Date: 2019-03-01




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	WIRELESS ICON SPEAKER	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

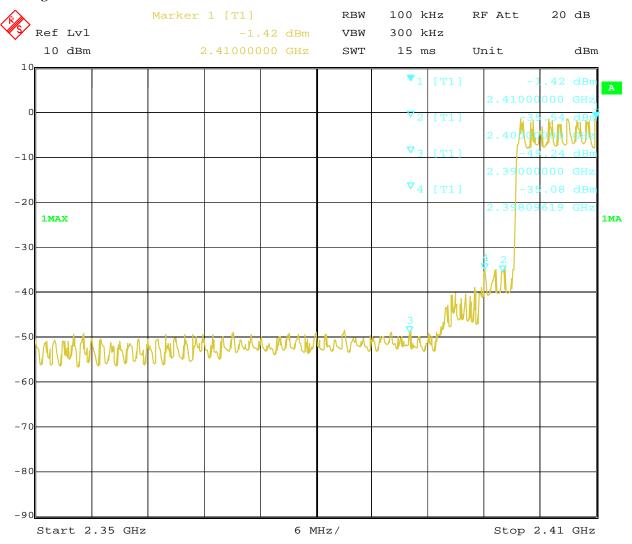

Date: 26.FEB.2019 14:53:00 Report No.: FCC1901223 Page 67 of 81

Date: 2019-03-01




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	WIRELESS ICON SPEAKER	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

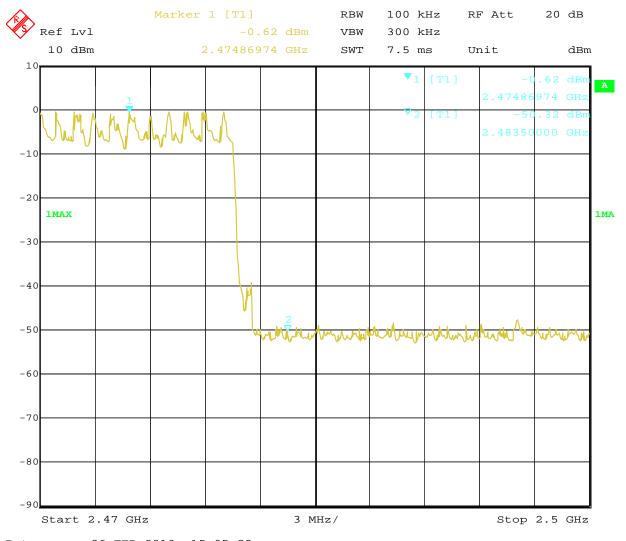

26.FEB.2019 15:05:23 Date:

Page 68 of 81 Report No.: FCC1901223

Date: 2019-03-01



12.4 Restrict Band Measurement

	EUT	WIRELE	ESS ICON	SPEAKER		Model			FM001	1S
N	Mode	Ke	ep Transn	nitting		Input Volta	age		DC3.7	V
Tem	perature		24 deg. (Ξ,		Humidity	y		56% R	Н
Test	t Result:		Pass		N	Iodulation '	Туре		8DPS1	K
	Class B 1GHz-18GHz - 2									
90-										
80-									M	
									$\int $	
70-										
									1	
60-									/	
									\	
<u> </u>								- 44		
50-							יאנו.	v. /W		
							ga p ^{al}	W		
50-		. n nin . tarah bud		derdhyddanadhapalyd			garaga ay ay ay ay ay a	\		Marin Land
40-	ikaya aftara di dalah kalashiri asalika asalika	at following white yearly		de alignida na depola	ir kalip ja liin dalip ja ja kalip ja ja kalip ja	Malahilik Manada	gapet Amerikanish spekasish	_\ ^W		And the same
	ini panjua, distribus kaj aptini, aptini	at the broken the orbital states		der derekter virtebeligt	Frequency (M	AND HAD BEEN AND AND AND AND AND AND AND AND AND AN	garante in the second of the second			2410
40-	ikappantingundishi dashiyay nirika asyeling	nt short and short head of the		derdesekkeredespelie	Frequency (M	Hz)	gapet and a special sp			2410
30- 2350			Factor	Limit	1			Height	ANT	
40-	Frequency	Results	Factor	Limit	Over	H ₂)	Table (o)	Height	ANT	2410 Verdict
30- 2350			Factor (dB)	(dBuV/m	Over Limit			Height (cm)	ANT	
30- 2350	Frequency	Results			Over			_	ANT	

Page 69 of 81 Report No.: FCC1901223

Date: 2019-03-01



12.4 Restrict Band Measurement

E	EUT	WIRELI	ESS ICON	SPEAKER		Model			FM0011S	
N	lode	Ke	ep Transn	nitting	In	put Voltage			DC3.7V	
Temp	perature		24 deg. (C,		Humidity			56% RH	
Test	Result:		Pass		Mo	dulation Ty	pe		8DPSK	
	Class B 1GHz-18GHz - 2									
90-										
80-										
									m	
70-									-/	
									/ \	
€ 60-									+	
60 - 60 - 60 - 60 - 60 - 60 - 60 - 60 -									+	
50-								المسلم	$\overline{}$	
						,	his the state of the state of the state of	And the same of th	\	\
40-	l artina ara	مترينا والمراجع	itani tile ar an		maalilii lis mitti	dear franchistration				Vink. man
30-				A STATE OF THE PERSON AND PARTY OF THE PERSON AND PART		The state of the s				Alexanical defenda
30- 2350					Frequency (M	IHz)				2410
No.	Frequenc	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	y (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
	'` ')	` ′)	(dB)					
			•	1 .		1	1	1		

Page 70 of 81 Report No.: FCC1901223

Date: 2019-03-01



12.4 Restrict Band Measurement

EU	T	WIRELE	ESS ICON	SPEAKER		Model			FM001	11S
Mo	de	Ke	ep Transn	nitting		Input Volt	age		DC3.7	7V
Temper	rature		24 deg. (Ξ,		Humidit	ty		56% F	RH
Test R	esult:		Pass]	Modulation	Туре		8DPS	SK
CC Part 15B Clas	s B 1GHz-18GHz - 2									
80-										
70-										
600 - 600										
50-	ш	المع ويدييد								
H		A Property of the Park of the			Mark Control				La	
	Note the later	*			Mahan	ALL MAN				
40-	TO PER									
AL DEP	ul _l ili			24	83.5					2500
30-				24	83.5 Frequency (M	Hz)				2500
30-2470	Frequency	Results	Factor	24 Limit		Hz) Detector	Table (o)	Height	ANT	2500 Verdict
30- 2470	Frequency (MHz)	Results (dBuV/m	Factor (dB)	T	Frequency (M		Table (o)	Height (cm)	ANT	
30- 2470 No.				Limit	Over		Table (o)	_	ANT	

Page 71 of 81 Report No.: FCC1901223

Date: 2019-03-01



12.4 Restrict Band Measurement

	EUT	WIRELE	ESS ICON	SPEAKER		Model			FM001	1S
N	Mode	Ke	ep Transn	nitting		Input Volta	age		DC3.7	V
Tem	nperature		24 deg. (C,		Humidit	y		56% R	Н
Test	t Result:		Pass		N	Iodulation '	Туре		8DPSI	K
	3 Class B 1GHz-18GHz - 2									
90-										
80-										
70-				No.						
€ 60-			\longrightarrow	$\overline{}$						
(m/\mu/\mu) = 60 - 60 - 60 - 60 - 60 - 60 - 60 - 60			-/	$\overline{}$						
₹ 50-			J.	No.						
40-	Ladja Marika Maria Ladia	al and the second second	/		Marial	I harde d be	. The said	عد ماماند الد	olici sika ada a a cara si sakili	د مار دو و المصالح دود
40-	hadan daribada kanada	and the second second	/		A STATE OF THE PARTY OF THE PAR		h dia partual ang ang balling saligan	والمار والمراجع والمار	the the sail and a sail a stable	
	and the second second	and the state of t	/	24	183.5 Frequency (M		king pat and an desiremity and	بالقيامة والخواطية والمجالمة والمجالمة والمتابعة والمتاب	Habitation language and be	2500
40- 30-	ing day benderada kanangan daran	and the second second	/	24	183.5		Market and a substitute of the	eddigay'i yaldish isate badda	والمراجع المراجع المرا	
40- 30-	Frequency	Results	Factor	24 Limit	183.5 Frequency (M				ANT	
30- 2470	Frequency (MHz)			Limit	183.5	Hz)	Table (o)	Height		2500
30- 2470	Frequency (MHz)	Results (dBuV/m	Factor (dB)		Frequency (M	Hz)				2500

Note: For Restricted band test, only the worst case was reported.

Report No.: FCC1901223

Date: 2019-03-01



Page 72 of 81

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

PCB Antenna. The gain of the antennas is 1.7dBi.

Report No.: FCC1901223 Page 73 of 81

Date: 2019-03-01




14.0 FCC ID Label

FCC ID: 2AAL7-FM0011S

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

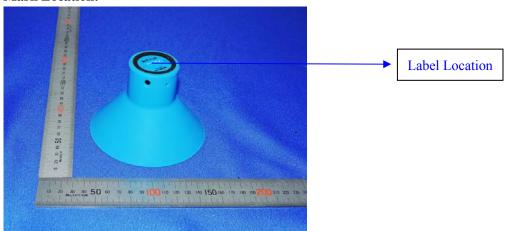

Report No.: FCC1901223 Page 74 of 81

Date: 2019-03-01



15.0 Photo of testing

Conducted Emission Test Setup:




Page 75 of 81


Report No.: FCC1901223

Date: 2019-03-01



Radiated Emission Test Setup:

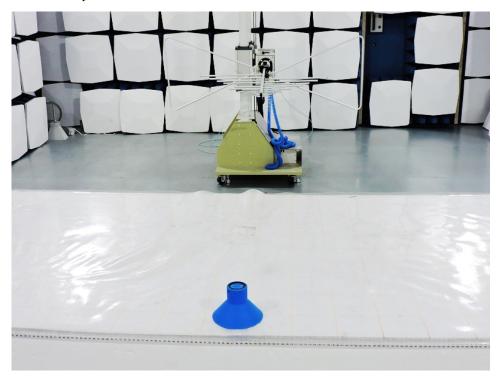

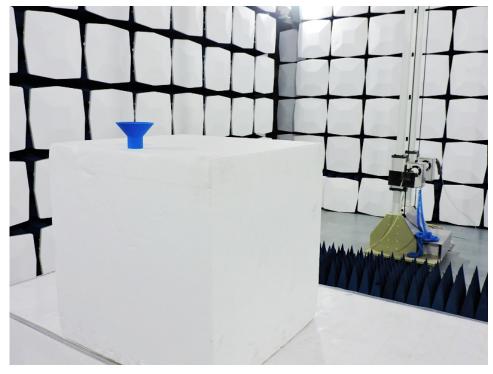

Page 76 of 81

Report No.: FCC1901223

Date: 2019-03-01



Photographs - EUT





The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 77 of 81


Report No.: FCC1901223

Date: 2019-03-01



Photographs - EUT

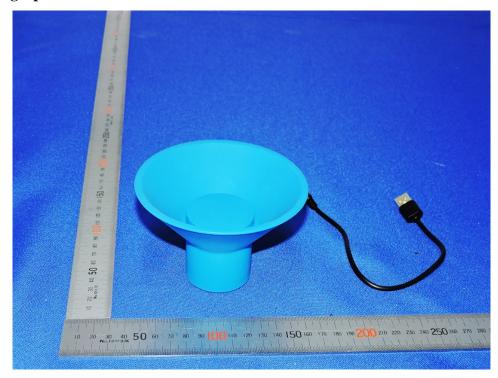


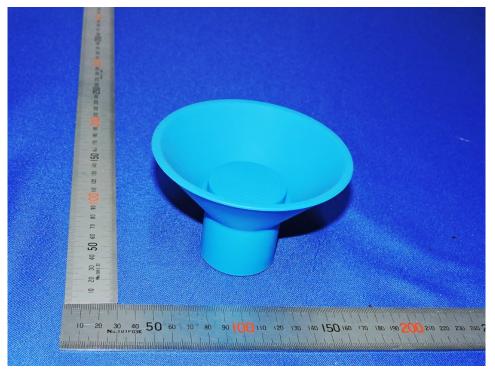

Report No.: FCC1901223

Date: 2019-03-01



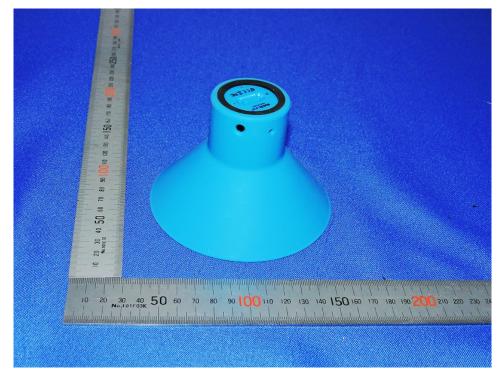





Page 79 of 81

Report No.: FCC1901223

Date: 2019-03-01



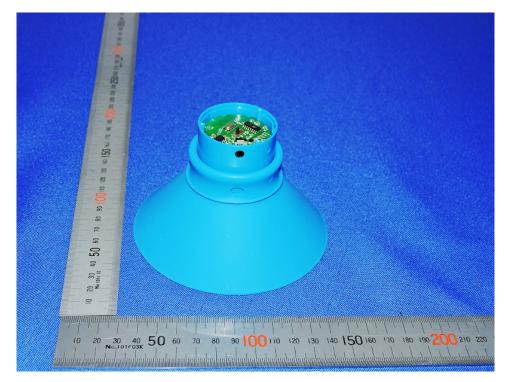

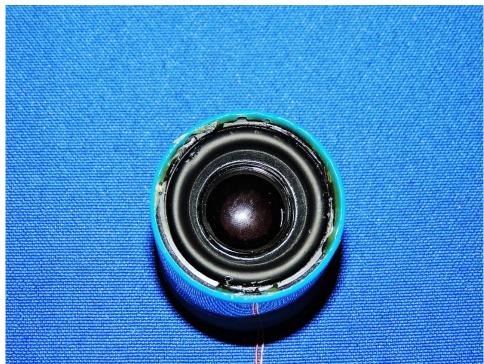

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 80 of 81

Report No.: FCC1901223

Date: 2019-03-01



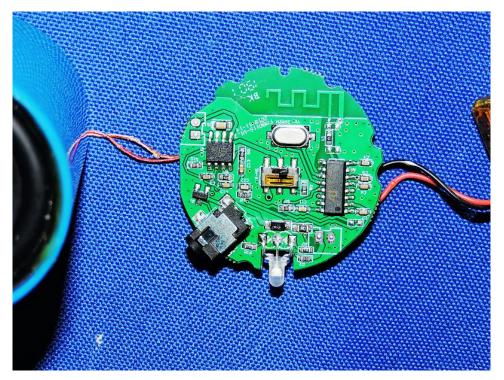

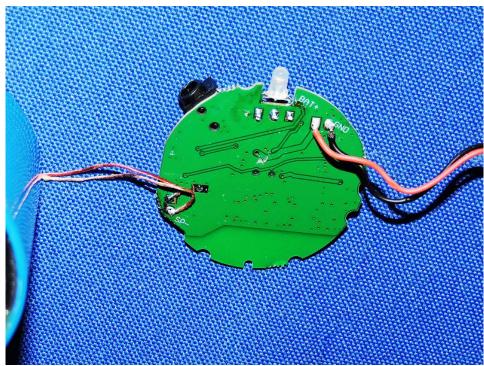

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 81 of 81 Report No.: FCC1901223

Date: 2019-03-01



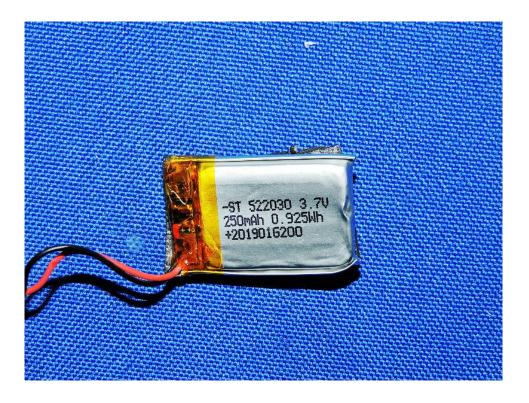

End of Report