

FCC - TEST REPORT

Report Number : **709502100606-00** Date of Issue: November 1, 2021

Model : **FOTRIC 348A etc. (Details refer to page 4)**

Product Type : **Infrared Thermal Camera**

FCC ID : **2AZTCFALCON**

Applicant : **FOTRIC INC.**

Address : **No. 14, Lane 2500, Xiupu Road, Pudong, 201201 Shanghai,
PEOPLE'S REPUBLIC OF CHINA**

Manufacturer : **FOTRIC INC.**

Address : **No. 14, Lane 2500, Xiupu Road, Pudong, 201201 Shanghai,
PEOPLE'S REPUBLIC OF CHINA**

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **38**

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards	6
5	Summary of Test Results.....	7
6	General Remarks.....	8
7	Test Setups.....	9
8	Systems test configuration.....	12
9	Technical Requirement.....	13
9.1	Conducted Emission	13
9.2	Conducted peak output power	16
9.3	6dB Occupied Bandwidth	18
9.4	Power spectral density	20
9.5	Conducted Band Edge and Out-of-Band Emissions	22
9.6	Spurious radiated emissions for transmitter	30
10	Test Equipment List.....	35
11	System Measurement Uncertainty.....	36
12	Photographs of Test Set-ups	37
13	Photographs of EUT	38



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
No.16 Lane, 1951 Du Hui Road,
Shanghai 201108,
P.R. China

Test Firm Registration
Number: 820234
Telephone: +86 21 6141 0123
Fax: +86 21 6140 8600

3 Description of the Equipment Under Test

Product:	Infrared Thermal Camera
Model no.:	FOTRIC 343G, FOTRIC 343P, FOTRIC 343A, FOTRIC 343M, FOTRIC 343E, FOTRIC 343X, FOTRIC 343T, FOTRIC 343B, FOTRIC 343G+, FOTRIC 343P+, FOTRIC 343A+, FOTRIC 343M+, FOTRIC 343E+, FOTRIC 343X+, FOTRIC 343T+, FOTRIC 343B+, FOTRIC 344G, FOTRIC 344P, FOTRIC 344A, FOTRIC 344M, FOTRIC 344E, FOTRIC 344X, FOTRIC 344T, FOTRIC 344B, FOTRIC 344G+, FOTRIC 344P+, FOTRIC 344A+, FOTRIC 344M+, FOTRIC 344E+, FOTRIC 344X+, FOTRIC 344T+, FOTRIC 344B+, FOTRIC 345G, FOTRIC 345P, FOTRIC 345A, FOTRIC 345M, FOTRIC 345E, FOTRIC 345X, FOTRIC 345T, FOTRIC 345B, FOTRIC 345G+, FOTRIC 345P+, FOTRIC 345A+, FOTRIC 345M+, FOTRIC 345E+, FOTRIC 345X+, FOTRIC 345T+, FOTRIC 345B+, FOTRIC 346G, FOTRIC 346P, FOTRIC 346A, FOTRIC 346M, FOTRIC 346E, FOTRIC 346X, FOTRIC 346T, FOTRIC 346B, FOTRIC 346G+, FOTRIC 346P+, FOTRIC 346A+, FOTRIC 346M+, FOTRIC 346E+, FOTRIC 346X+, FOTRIC 346T+, FOTRIC 346B+, FOTRIC 347G, FOTRIC 347P, FOTRIC 347A, FOTRIC 347M, FOTRIC 347E, FOTRIC 347X, FOTRIC 347T, FOTRIC 347B, FOTRIC 347G+, FOTRIC 347P+, FOTRIC 347A+, FOTRIC 347M+, FOTRIC 347E+, FOTRIC 347X+, FOTRIC 347T+, FOTRIC 347B+, FOTRIC 348G, FOTRIC 348P, FOTRIC 348A, FOTRIC 348M, FOTRIC 348E, FOTRIC 348X, FOTRIC 348T, FOTRIC 348B, FOTRIC 348G+, FOTRIC 348P+, FOTRIC 348A+, FOTRIC 348M+, FOTRIC 348E+, FOTRIC 348X+, FOTRIC 348T+, FOTRIC 348B+
Sample(s) Tested:	FOTRIC 348A
FCC ID:	2AZTCFALCON
Options and accessories:	Test harness
Rating:	AC 100-240V, 50/60Hz for adapter DC 12V for Camera
RF Transmission Frequency:	2402~2480MHz for Bluetooth For 2.4G & 5G Wi-Fi For 802.11b/g/n-HT20: 2412~2462 MHz For 802.11n-HT40: 2422~2452 MHz 5180~5240 MHz (U-NII-1) 5260~5320 MHz (U-NII-2A) 5500~5720 MHz (U-NII-2C) 5745~5825 MHz (U-NII-3)

No. of Operated Channel: 79 channels for Bluetooth 4.2+EDR
40 channels for Bluetooth 4.2 BLE
For 2.4GHz Wi-Fi

Operation Frequency each of channel For 802.11b/g/n(H20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel For 802.11n(H40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
		4	2427MHz	7	2442MHz		
		5	2432MHz	8	2447MHz		
3	2422MHz	6	2437MHz	9	2452MHz		

5180~5240 MHz (U-NII-1)
5260~5320 MHz (U-NII-2A)
5500~5720 MHz (U-NII-2C)
5745~5825 MHz (U-NII-3)

Modulation: Bluetooth 4.2+EDR FHSS: GFSK, $\pi/4$ DQPSK, 8DPSK
Bluetooth 4.2 BLE DHSS: GFSK
For Wi-Fi: Direct Sequence Spread Spectrum (DSSS) for 802.11b
Orthogonal Frequency Division Multiplexing (OFDM) for 802.11a/b/g/n/ac

Hardware Version: V02A

Software Version: 2.0.4

Data speed: 1. Bluetooth 4.2+EDR FHSS: 1Mbps, 2Mbps, 3Mbps
2. Bluetooth 4.2 BLE DHSS: 1Mbps
3. Wi-Fi: 11b 1 ~ 11Mbps,
11g/a 6 ~ 54Mbps, 11n HT20 6.5 ~ 72.2Mbps,
11n HT 40 13.5 ~ 150Mbps,
11ac VHT40 13.5 ~ 200Mbps,
11ac VHT80 29.3 ~ 433.3Mbps

Duty Cycle: 100%

Antenna Type: PIFA Antenna

Antenna Gain: 2.5dBi

Description of the EUT: The Equipment Under Test (EUT) is an Infrared Thermal Camera with Bluetooth and Wi-Fi Module. The EUT support Bluetooth 4.2+EDR and support BLE function and Wi-Fi operated at 5GHz and 2.4GHz.
Only 2.4G Bluetooth 4.2 BLE included in this report.

Test sample no.: SHA-564832-1

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment, antenna gain or any information supplied.



4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2020 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 and ANSI C63.10 (2013).

5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C						
Test Condition		Pages	Test Site	Test Result		
				Pass	Fail	N/A
§15.207	Conducted emission AC power port	13-15	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247 (b) (1)	Conducted peak output power	16-17	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(1)	20dB bandwidth	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)	Carrier frequency separation	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Number of hopping frequencies	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Dwell Time	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(2)	6dB Occupied Bandwidth	18-19	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(e)	Power spectral density	20-21	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Conducted Band Edge and Out-of-Band Emissions	22-29	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & §15.209	Spurious radiated emissions for transmitter	30-34	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203	Antenna requirement	See note 1		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note 1: The EUT uses a patch antenna, which gain is 2.5dBi. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.

15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AZTCFALCON, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules.

This report is only for Bluetooth Low Energy. The TX and RX range is 2402MHz-2480MHz.

According to the client's declaration, all the models have the same electrical circuit board and mechanical structure, except pixel, or shell color differences, so we chose the FOTRIC 348A to perform all the tests.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: April 26, 2021

Testing Start Date: April 27, 2021


Testing End Date: August 9, 2021

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Reviewed by:

Prepared by:

Tested by:

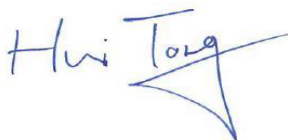

Hui TONG
Review Engineer


Zhining ZHANG
Project Engineer



Wenqiang LU
Test Engineer


7 Test Setups

7.1 AC Power Line Conducted Emission test setups

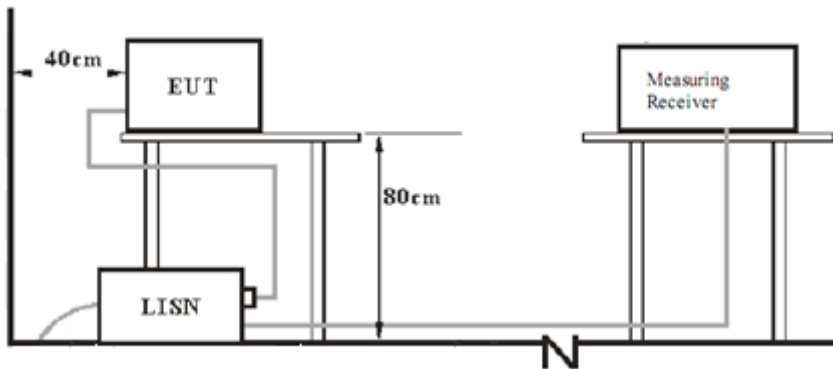


7.2 Radiated test setups


9kHz ~ 30MHz Test Setup:

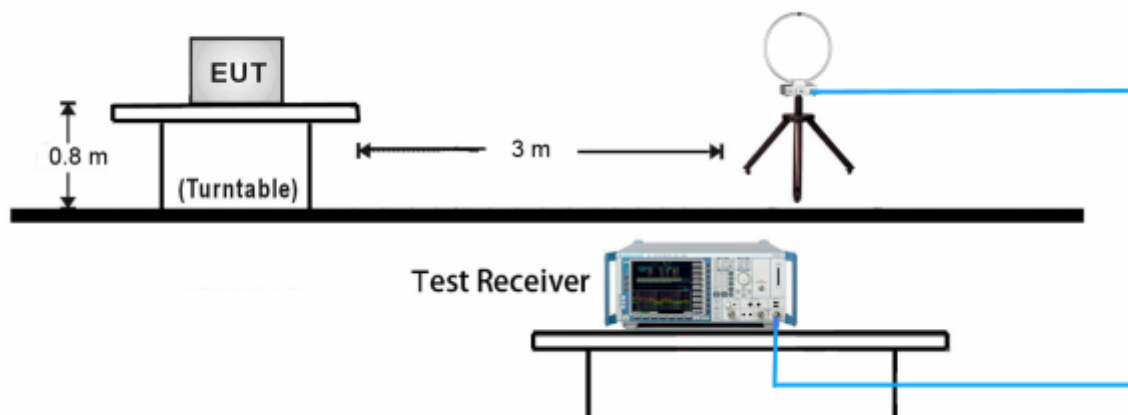


30MHz ~ 1GHz Test Setup:

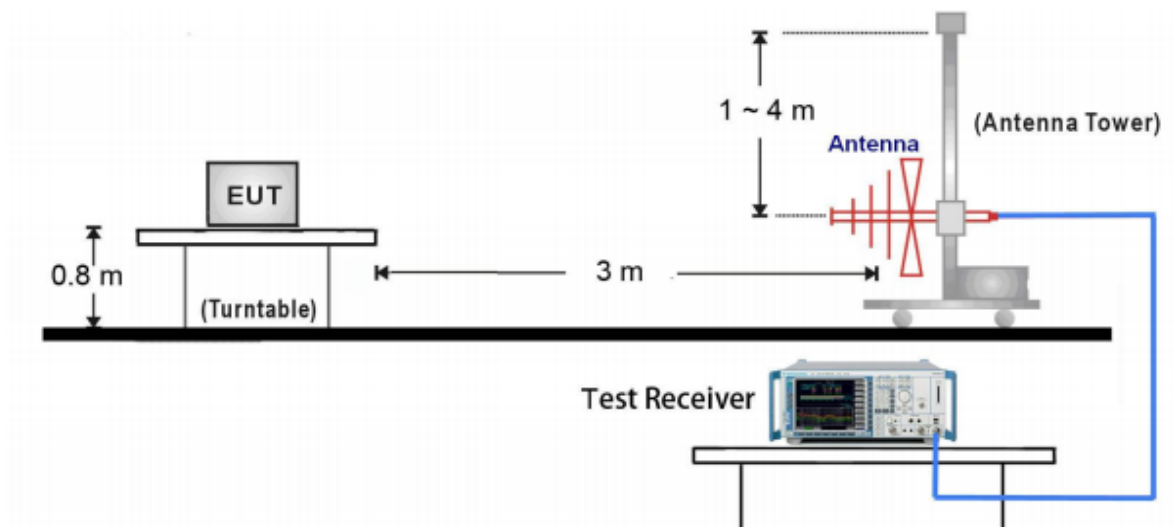


1GHz ~ 18GHz Test Setup:

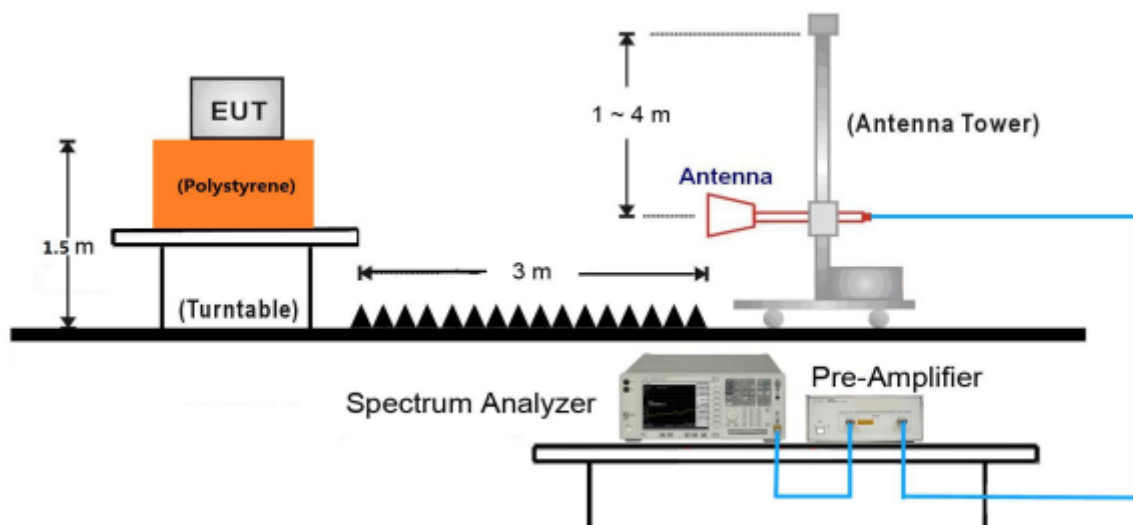

18GHz ~ 25GHz Test Setup:

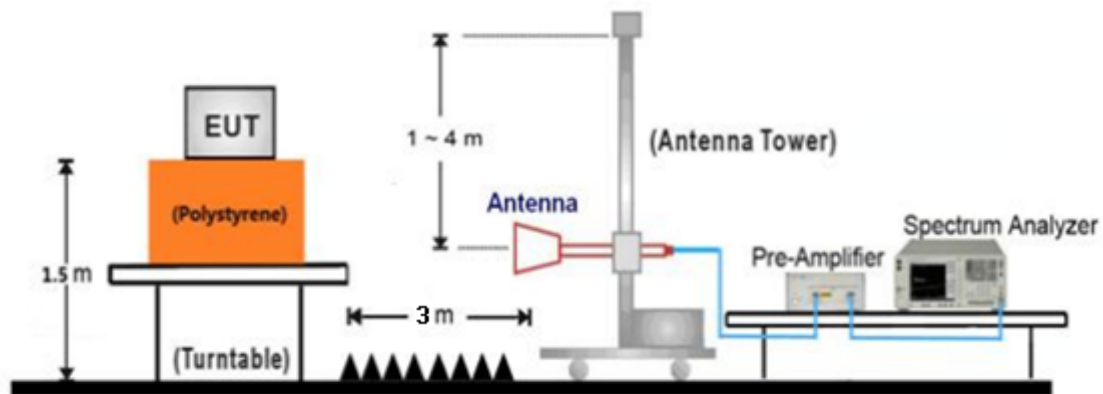

7.3 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
Notebook	Lenove	X240	--

Test software: QRCT.exe, which used to control the EUT in continues transmitting mode.

The system was configured to channel 0, 19, and 39 for the test.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

Conducted Emission


Product Type : Infrared Thermal Camera
 M/N : FOTRIC 348A
 Operating Condition : Mode 1: Tx_2480MHz
 Test Specification : L-Line
 Comment : AC 120V/60Hz (charging mode)

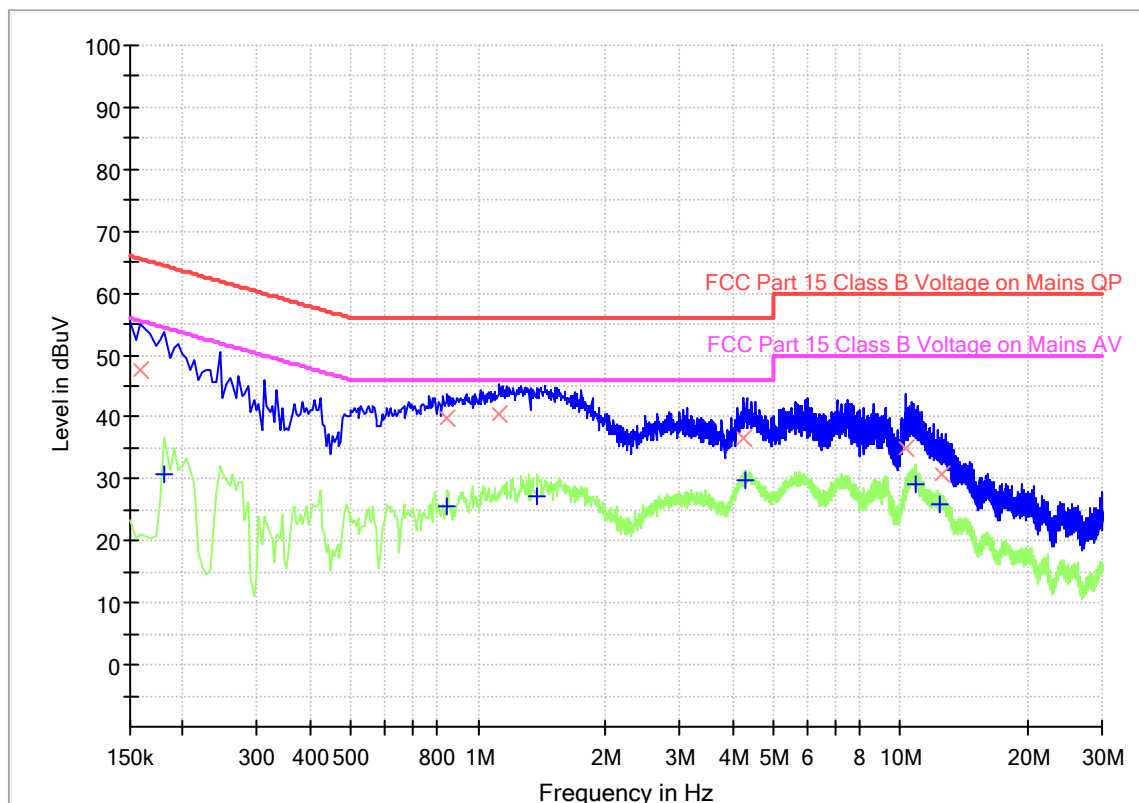

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.159000	47.50	---	65.52	18.02	1000.0	9.000	L1	19.5
0.181500	---	30.74	54.42	23.68	1000.0	9.000	L1	19.5
0.843000	---	25.69	46.00	20.31	1000.0	9.000	L1	19.5
0.843000	39.72	---	56.00	16.28	1000.0	9.000	L1	19.5
1.122000	40.61	---	56.00	15.39	1000.0	9.000	L1	19.5
1.383000	---	27.35	46.00	18.65	1000.0	9.000	L1	19.5
4.231500	36.59	---	56.00	19.41	1000.0	9.000	L1	19.5
4.308000	---	29.64	46.00	16.36	1000.0	9.000	L1	19.5
10.315500	34.90	---	60.00	25.10	1000.0	9.000	L1	19.7
10.806000	---	29.27	50.00	20.73	1000.0	9.000	L1	19.7
12.408000	---	26.04	50.00	23.96	1000.0	9.000	L1	19.7
12.561000	30.62	---	60.00	29.38	1000.0	9.000	L1	19.7

Product Type : Infrared Thermal Camera
 M/N : FOTRIC 348A
 Operating Condition : Mode 1: Tx_2480MHz
 Test Specification : N-Line
 Comment : AC 120V/60Hz (charging mode)

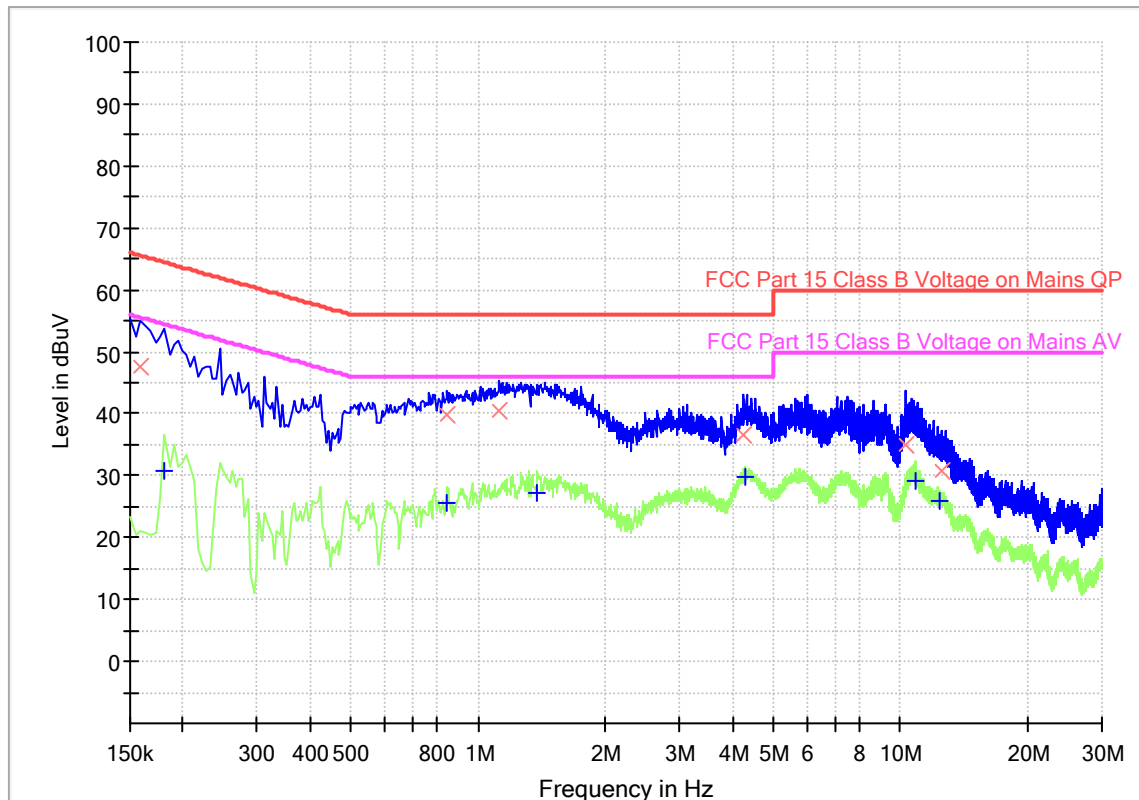

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.159000	47.50	---	65.52	18.02	1000.0	9.000	L1	19.5
0.181500	---	30.74	54.42	23.68	1000.0	9.000	L1	19.5
0.843000	---	25.69	46.00	20.31	1000.0	9.000	L1	19.5
0.843000	39.72	---	56.00	16.28	1000.0	9.000	L1	19.5
1.122000	40.61	---	56.00	15.39	1000.0	9.000	L1	19.5
1.383000	---	27.35	46.00	18.65	1000.0	9.000	L1	19.5
4.231500	36.59	---	56.00	19.41	1000.0	9.000	L1	19.5
4.308000	---	29.64	46.00	16.36	1000.0	9.000	L1	19.5
10.315500	34.90	---	60.00	25.10	1000.0	9.000	L1	19.7
10.806000	---	29.27	50.00	20.73	1000.0	9.000	L1	19.7
12.408000	---	26.04	50.00	23.96	1000.0	9.000	L1	19.7
12.561000	30.62	---	60.00	29.38	1000.0	9.000	L1	19.7

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)
 Factor (dB) = Cable Loss (dB) + LISN Factor (dB) + 10dB Attenuator

9.2 Conducted peak output power

Test Method


1. Use the following spectrum analyzer settings:
RBW > the 6 dB bandwidth of the emission being measured, VBW \geq 3RBW, Span \geq 3RBW
Sweep = auto, Detector function = peak, Trace = max hold.
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

Limits


Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30

Test result as below table

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-1.68	≤ 30	PASS
		2440	-1.4	≤ 30	PASS
		2480	-1.21	≤ 30	PASS

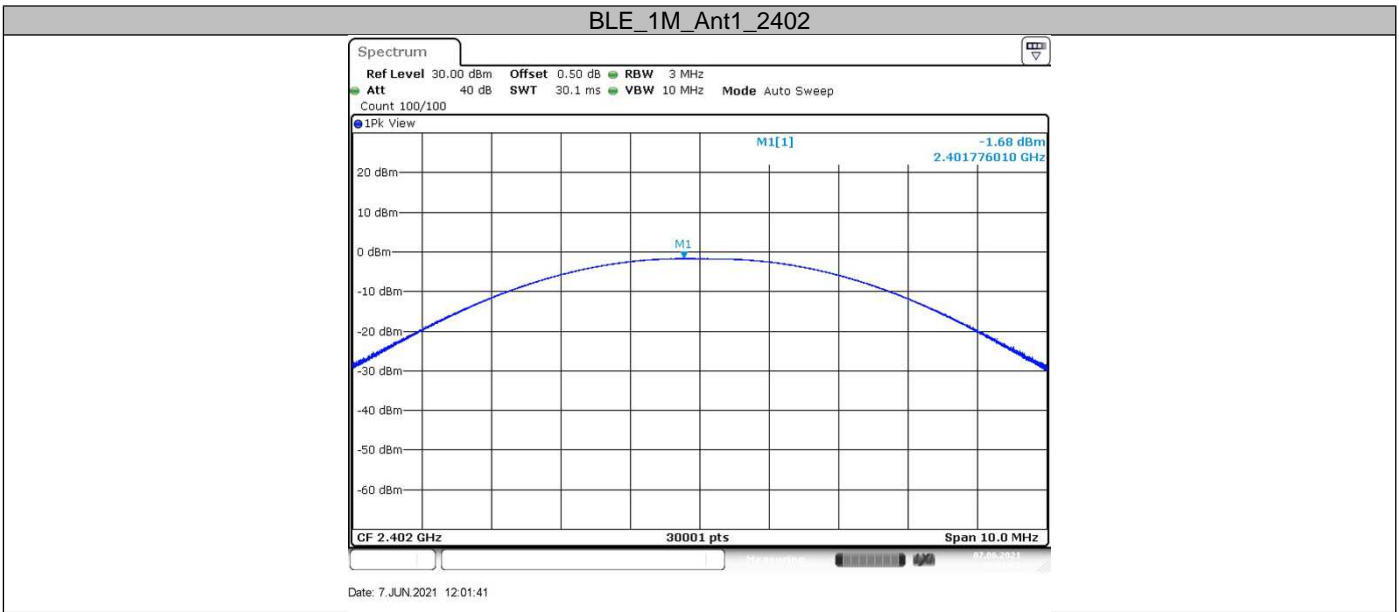


BLE_1M_Ant1_2440

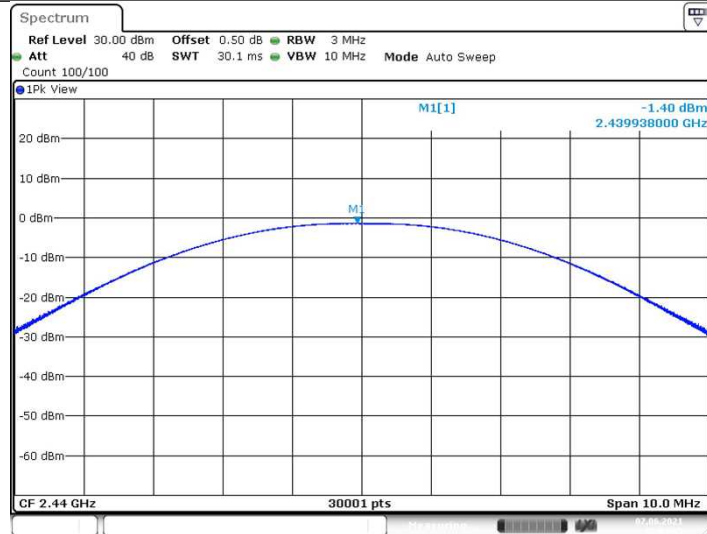

Date: 7.JUN.2021 12:03:45

BLE_1M_Ant1_2480

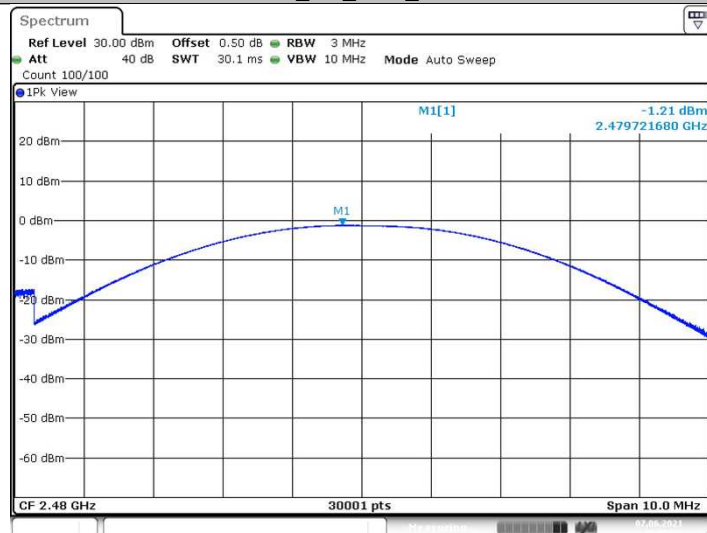

Date: 7.JUN.2021 12:05:29

9.3 6dB Occupied Bandwidth

Test Method

1. Use the following spectrum analyzer settings:
RBW=100K, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
3. Allow the trace to stabilize, record the 6 dB Bandwidth value.


Limit

Limit [kHz]

≥500

Test result


TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.683	2401.640	2402.323	0.5	PASS
		2440	0.687	2439.645	2440.332	0.5	PASS
		2480	0.685	2479.639	2480.324	0.5	PASS

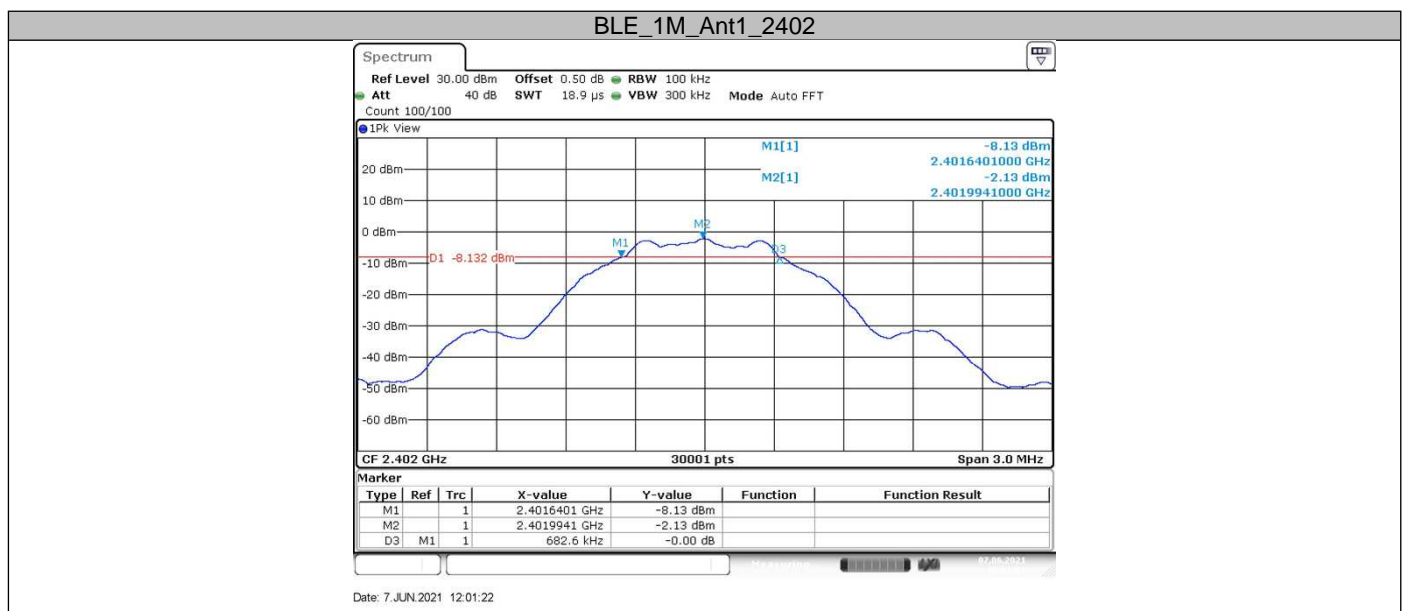




China

BLE_1M_Ant1_2440

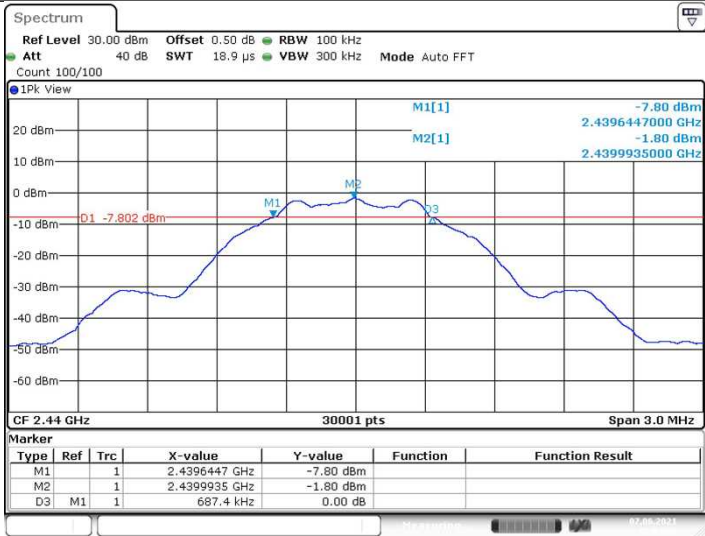

Date: 7.JUN.2021 12:03:26

BLE_1M_Ant1_2480

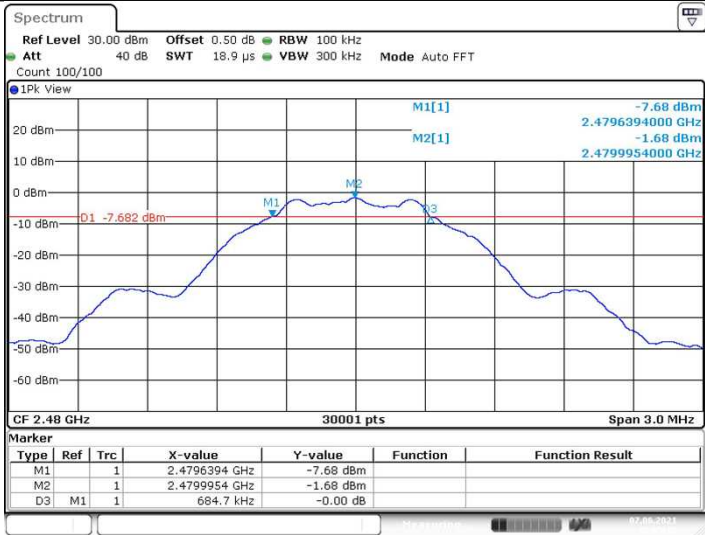

Date: 7.JUN.2021 12:05:10

9.4 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency.
RBW=3kHz,VBW≥3RBW,Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.


Limit

Limit [dBm]


≤8

Test result


TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-17.01	≤8	PASS
		2440	-16.8	≤8	PASS
		2480	-16.76	≤8	PASS

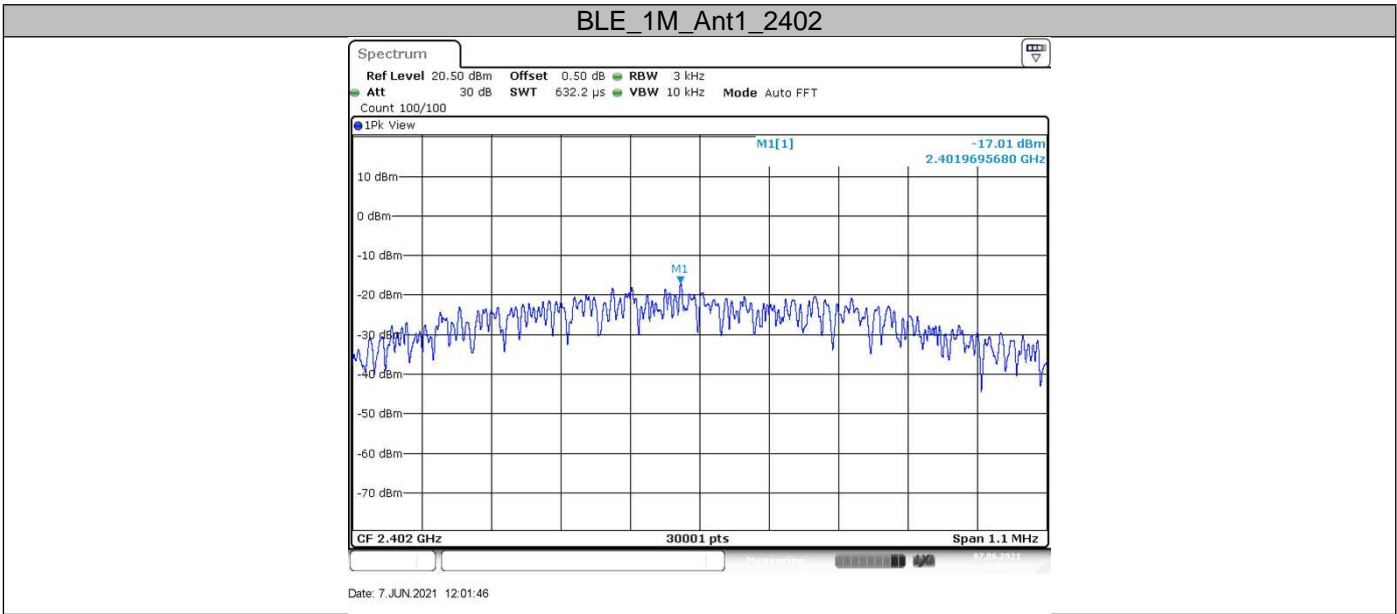

BLE_1M_Ant1_2440

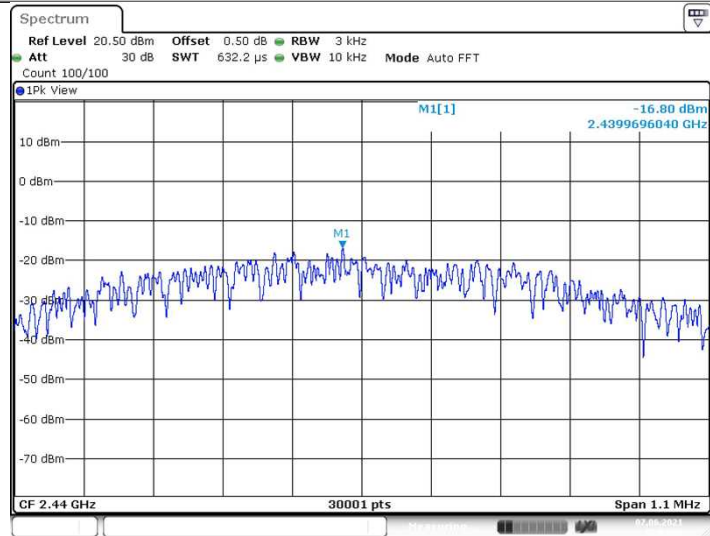

BLE_1M_Ant1_2480

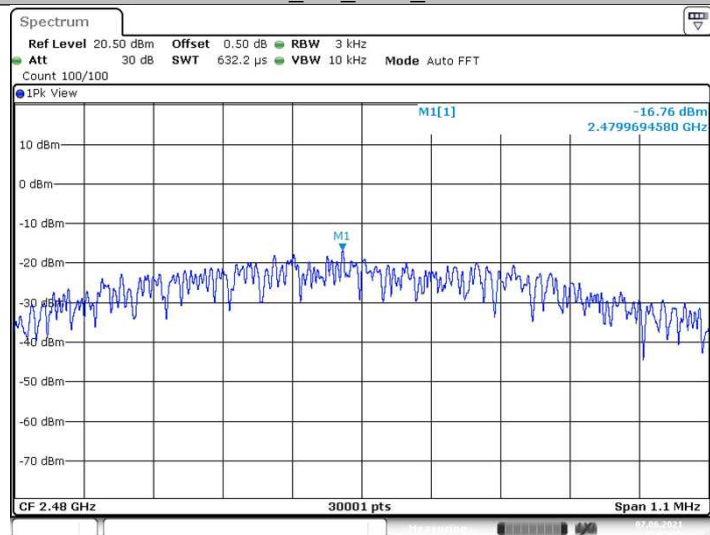

9.5 Conducted Band Edge and Out-of-Band Emissions

Test Method

1. Establish a reference level by using the following procedure:
 - a. Set RBW=100 kHz. VBW \geq 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
 - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
 - a. Set the center frequency and span to encompass frequency range to be measured.
 - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.

Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

Test result:

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-2.15	-57.94	≤ -22.15	PASS
		High	2480	-1.87	-58.83	≤ -21.87	PASS


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-2.08	-2.08	---	PASS
			30~1000	-2.08	-59.23	≤ -22.08	PASS
			1000~5000	-2.08	-56.33	≤ -22.08	PASS
			5000~26500	-2.08	-52.79	≤ -22.08	PASS
		2440	Reference	-1.85	-1.85	---	PASS
			30~1000	-1.85	-58.98	≤ -21.85	PASS
			1000~5000	-1.85	-55.91	≤ -21.85	PASS
			5000~26500	-1.85	-53.19	≤ -21.85	PASS
		2480	Reference	-1.82	-1.82	---	PASS
			30~1000	-1.82	-58.28	≤ -21.82	PASS
			1000~5000	-1.82	-55.4	≤ -21.82	PASS
			5000~26500	-1.82	-52.77	≤ -21.82	PASS

BLE_1M_Ant1_Low_2402

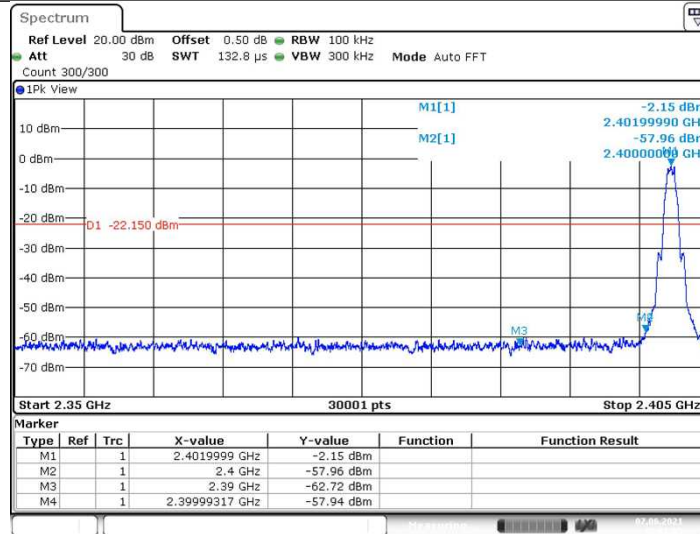

Date: 7.JUN.2021 12:01:55

BLE_1M_Ant1_High_2480

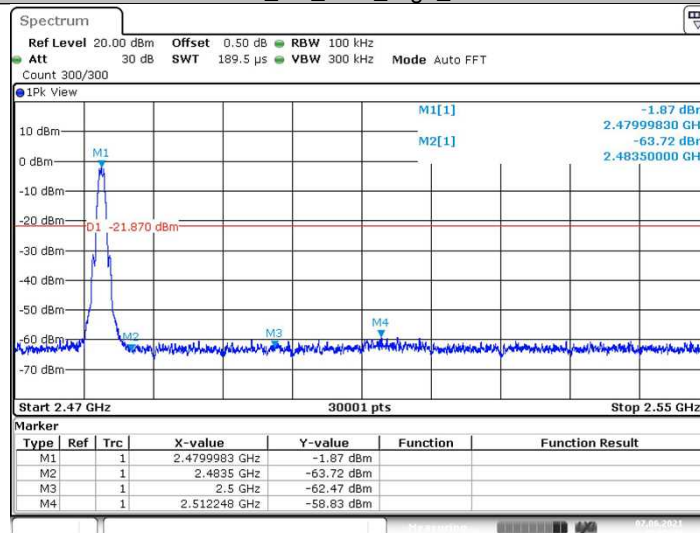


Date: 7.JUN.2021 12:05:44

BLE_1M_Ant1_2402_0~Reference




Date: 7.JUN.2021 12:02:00

BLE_1M_Ant1_2402_30~1000

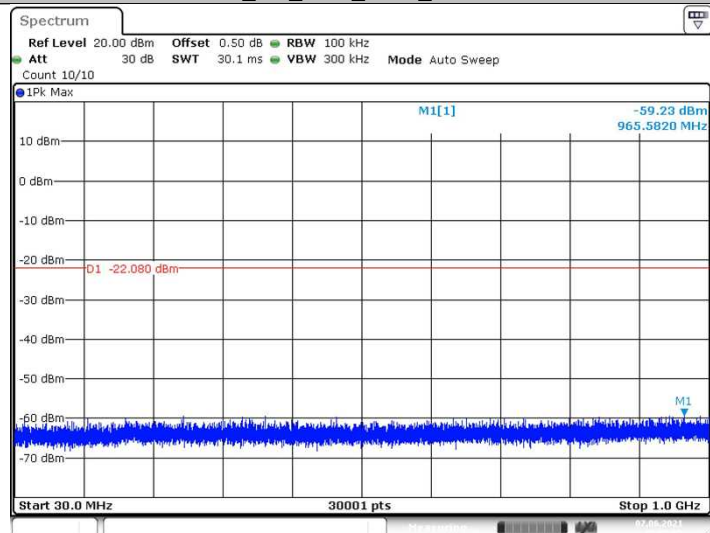


Date: 7.JUN.2021 12:02:05

BLE_1M_Ant1_2402_1000~5000

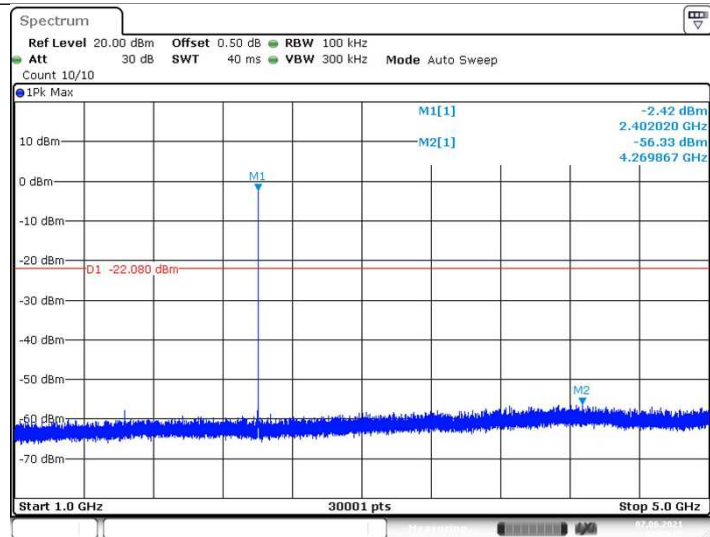


Date: 7.JUN.2021 12:02:17

BLE_1M_Ant1_2402_5000~26500

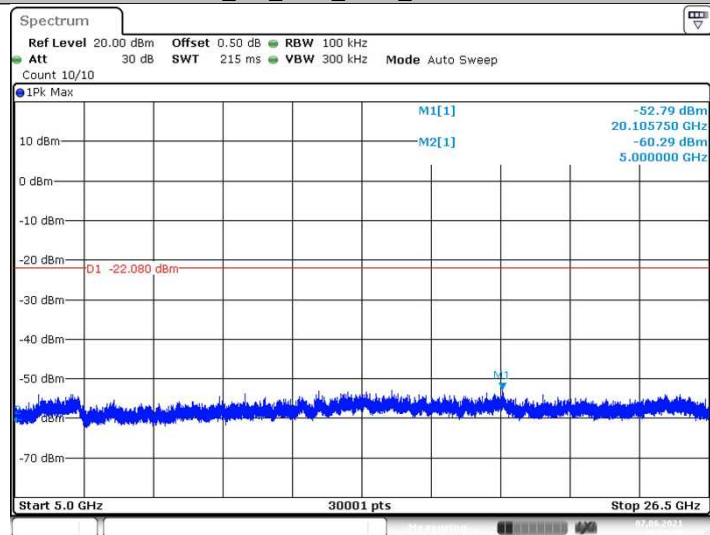


Date: 7.JUN.2021 12:02:48

BLE_1M_Ant1_2440_0~Reference

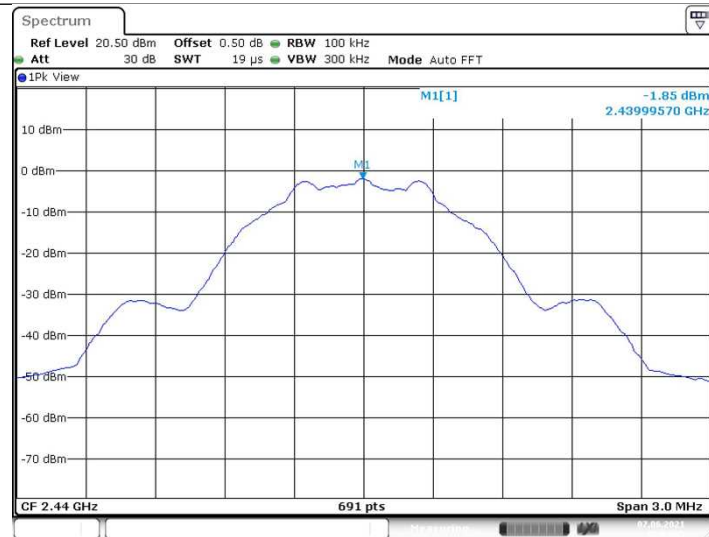


Date: 7.JUN.2021 12:03:56

BLE_1M_Ant1_2440_30~1000

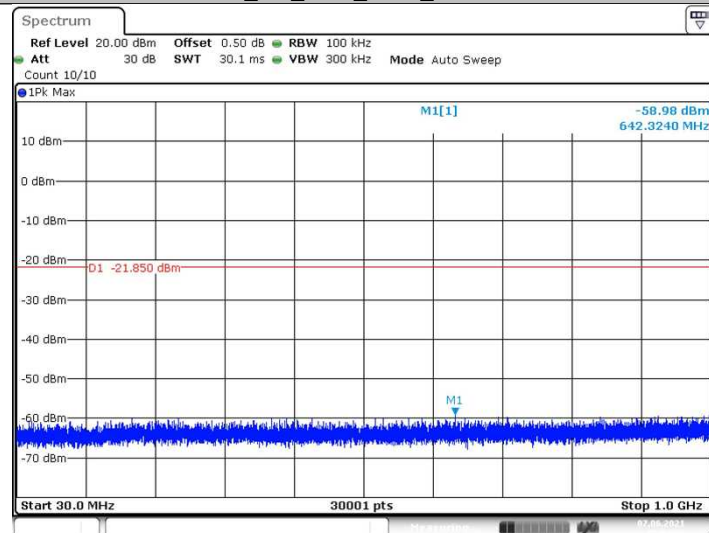


Date: 7.JUN.2021 12:04:00

BLE_1M_Ant1_2440_1000~5000

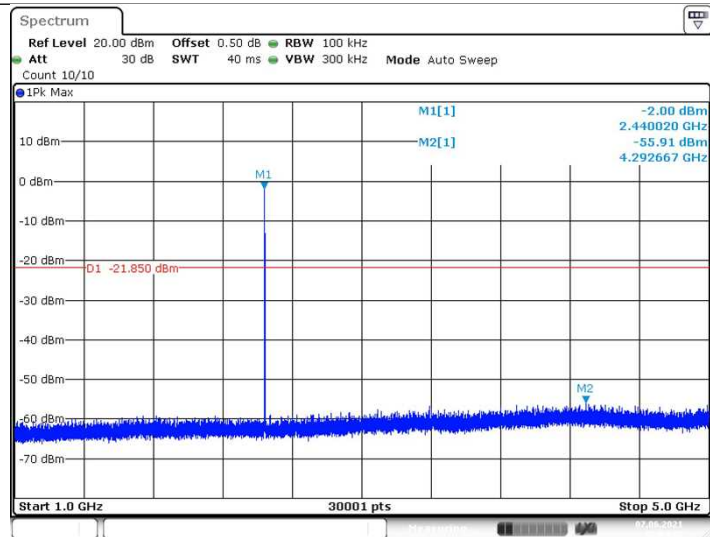


Date: 7.JUN.2021 12:04:12

BLE_1M_Ant1_2440_5000~26500

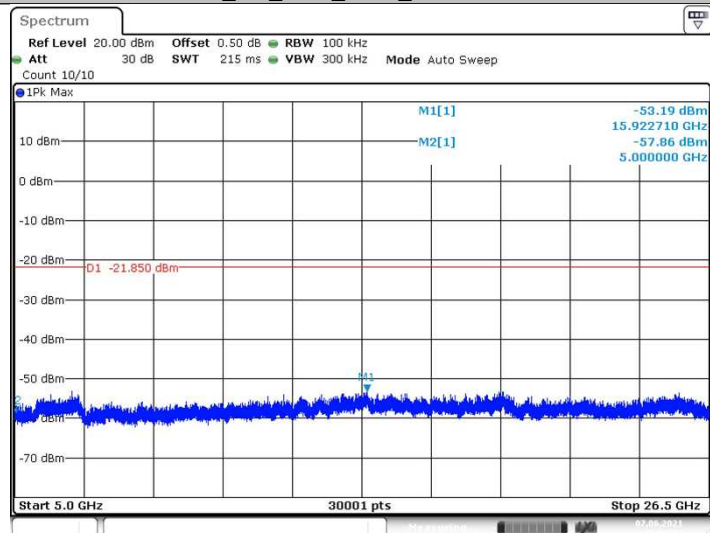


Date: 7.JUN.2021 12:04:43

BLE_1M_Ant1_2480_0~Reference

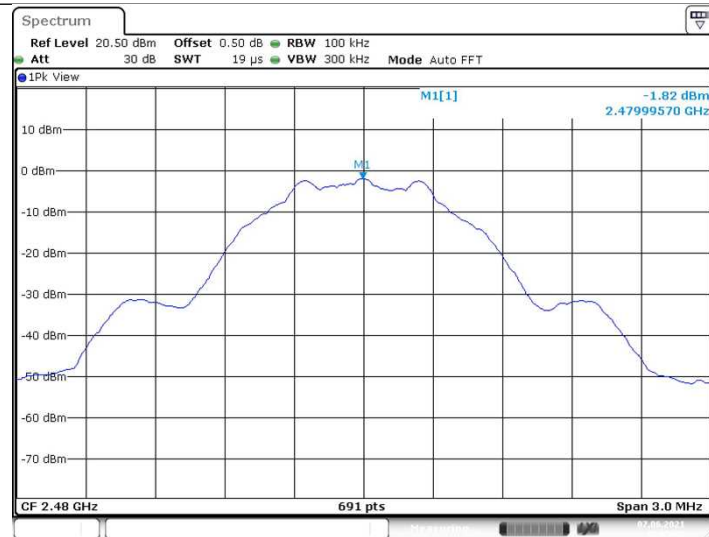


Date: 7.JUN.2021 12:05:49

BLE_1M_Ant1_2480_30~1000

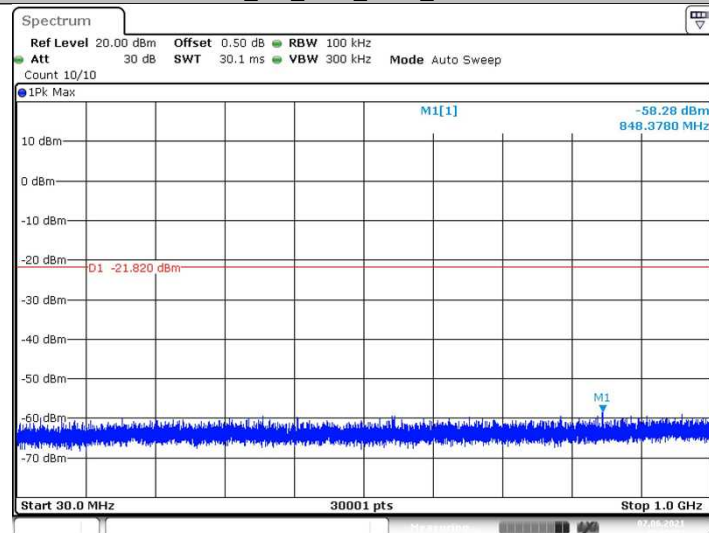


Date: 7.JUN.2021 12:05:53

BLE_1M_Ant1_2480_1000~5000

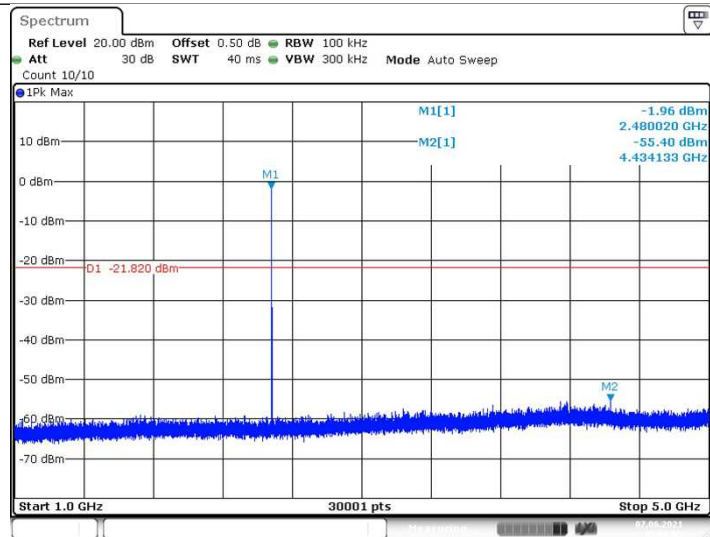

Date: 7.JUN.2021 12:06:05

BLE_1M_Ant1_2480_5000~26500

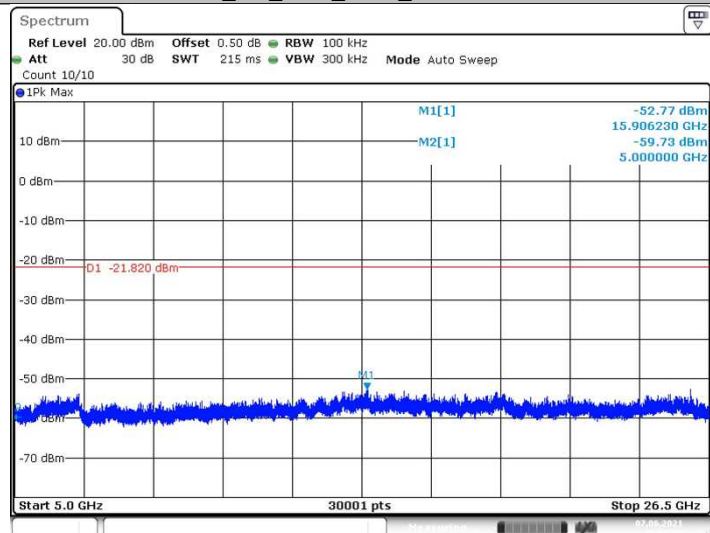

Date: 7.JUN.2021 12:06:36

9.6 Spurious radiated emissions for transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious

RBW = 100 kHz to 120 kHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious

RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) $VBW \geq [3 \times RBW]$.

c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq RBW / 2$.

Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the

emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Measured Distance Meters
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30	30	30

Frequency MHz	Field Strength uV/m	Field Strength dBμV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Pre-scan with three orthogonal axis and the worst case as X axis.

Test results are listed in the report.

Transmitting spurious emission test result as below:

BLE Mode 2402MHz Test Result

Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
MHz	dBuV/m		dBuV/m		dBuV/m	
2384.3	44.13	H	74	PK	29.87	Pass
4804	46.99	H	74	PK	27.01	Pass
2383.5	43.19	V	74	PK	30.81	Pass
4804	44.12	V	74	PK	29.88	Pass

BLE Mode 2440MHz Test Result

Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
MHz	dBuV/m		dBuV/m		dBuV/m	
4882	47.78	H	74	PK	26.22	Pass
4882	45.12	V	74	PK	28.88	Pass

BLE Mode 2480MHz Test Result

Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
MHz	dBuV/m		dBuV/m		dBuV/m	
2483.6	45.20	H	74	PK	28.80	Pass
4960	45.47	H	74	PK	28.53	Pass
2483.6	47.23	V	74	PK	26.77	Pass
4960	46.20	V	74	PK	27.80	Pass

Remark:


- (1) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Pre-amplifier
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 Emission Level = Reading level + Correction Factor

(The Reading Level is recorded by software which is not shown in the sheet)

The worst case of Radiated Emission below 1GHz:

Site: 3 meter chamber	Time: 2021/06/15 - 14:31
Limit: FCC_Part15.109_RE(3m)_ClassB	Engineer: Wenqiang LU
Probe: VULB9168	Polarity: Horizontal
EUT: Infrared Thermal Camera, Model no: FOTRIC 348A	Power: 120VAC, 60Hz for charger
Note: Transmit by at channel 2480MHz.	
Note: Pre-scan with three orthogonal axis and the worst case as X axis.	

RE_VULB9168_pre_Cont_30-1000

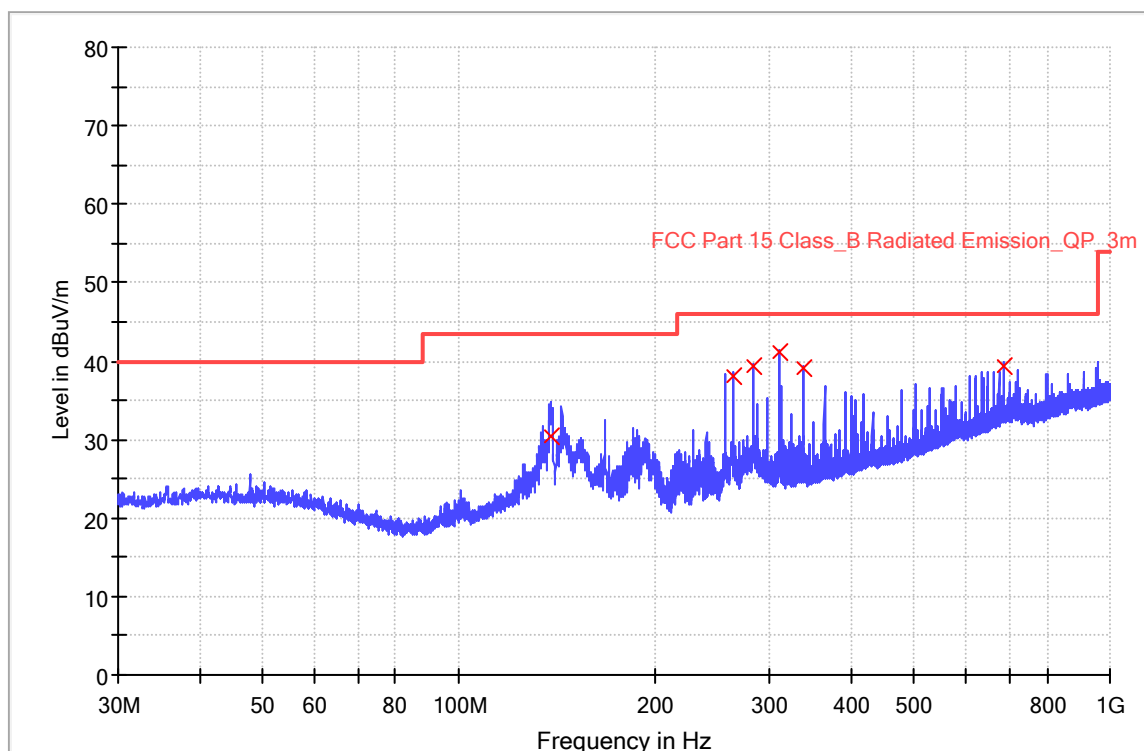


Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
138.200000	30.4	1000.0	120.000	100.2	H	147.0	14.8	13.1	43.5
263.960000	38.2	1000.0	120.000	100.2	H	0.0	13.9	7.8	46.0
283.480000	39.4	1000.0	120.000	100.2	H	48.0	14.6	6.6	46.0
310.520000	41.3	1000.0	120.000	100.2	H	95.0	15.2	4.7	46.0
337.520000	39.1	1000.0	120.000	100.2	H	206.0	16.0	6.9	46.0
688.520000	39.4	1000.0	120.000	100.2	H	301.0	23.1	6.6	46.0

The worst case of Radiated Emission below 1GHz:

Site: 3 meter chamber	Time: 2021/06/15 - 14:35
Limit: FCC_Part15.109_RE(3m)_ClassB	Engineer: Wenqiang LU
Probe: VULB9168	Polarity: Vertical
EUT: Infrared Thermal Camera, Model no: FOTRIC 348A	Power: 120VAC, 60Hz for charger
Note: Transmit by at channel 2480MHz.	
Note: Pre-scan with three orthogonal axis and the worst case as X axis.	

RE_VULB9168_pre_Cont_30-1000

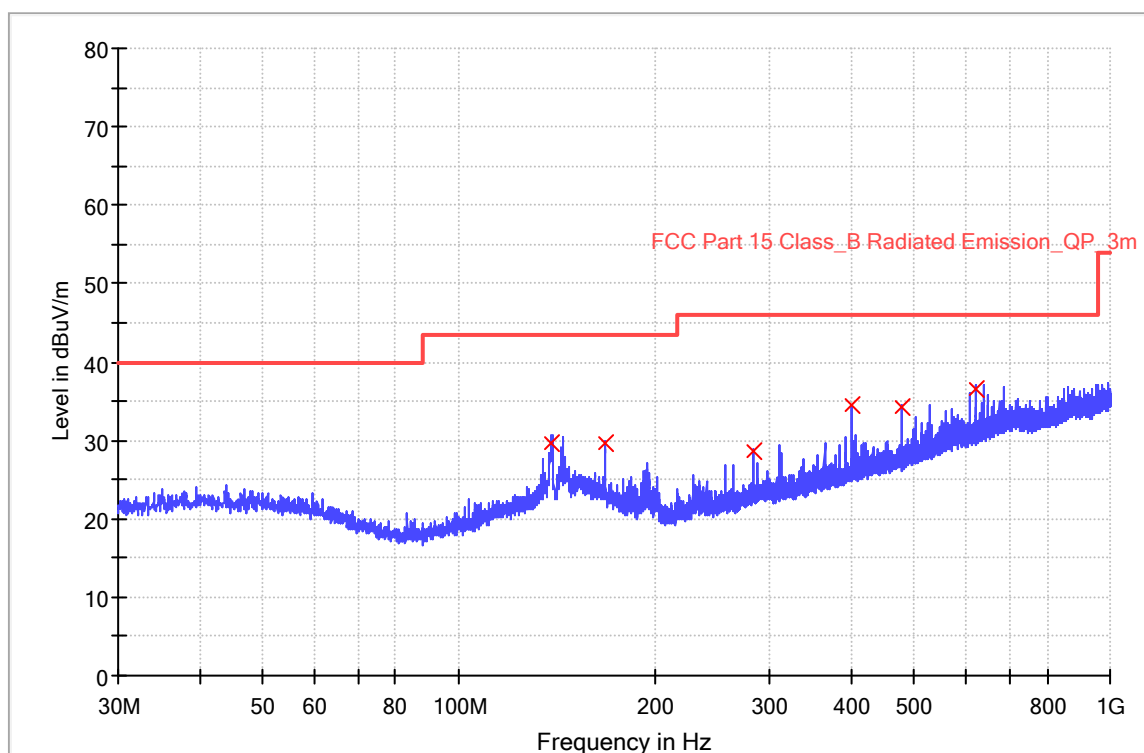

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
139.040000	29.7	1000.0	120.000	100.2	V	36.0	14.9	13.8	43.5
167.920000	29.7	1000.0	120.000	100.2	V	208.0	14.9	13.8	43.5
283.480000	28.5	1000.0	120.000	100.2	V	118.0	14.6	17.5	46.0
399.960000	34.5	1000.0	120.000	100.2	V	157.0	17.4	11.5	46.0
480.000000	34.3	1000.0	120.000	100.2	V	2.0	19.1	11.7	46.0
623.960000	36.7	1000.0	120.000	100.2	V	92.0	22.0	9.3	46.0

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

10 Test Equipment List

List of Test Instruments

Test Site1

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE	CAL. DUE DATE
C	Wideband power sensor	Rohde & Schwarz	NRP-Z81	104782	2020-12-23	2021-12-22
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2020-8-4	2021-8-3
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2021-8-2	2022-8-1
RE	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2020-8-4	2021-8-3
	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2021-8-2	2022-8-1
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2020-8-4	2021-8-3
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2021-8-2	2022-8-1
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	961	2019-3-16	2022-3-15
	Horn Antenna	Rohde & Schwarz	HF907	102393	2021-3-15	2022-3-14
	Pre-amplifier	Rohde & Schwarz	SCU-18D	19006451	2020-8-4	2021-8-3
	Pre-amplifier	Rohde & Schwarz	SCU-18D	19006451	2021-8-2	2022-8-1
	Loop antenna	Rohde & Schwarz	HFH2-Z2	100443	2020-5-23	2021-5-22
	Loop antenna	Rohde & Schwarz	HFH2-Z2	100443	2021-5-21	2022-5-20
	DOUBLE-RIDGED WAVEGUIDE HORN WITH PRE-AMPLIFIER (18 GHZ - 40 GHZ)	ETS-Lindgren	3116C-PA	002222727	2020-9-23	2023-9-22
	3m Semi-anechoic chamber	TDK	9X6X6	----	2018-5-11	2021-5-10
	3m Semi-anechoic chamber	TDK	9X6X6	----	2021-5-8	2024-5-7
CE	EMI Test Receiver	Rohde & Schwarz	ESR3	101907	2020-8-4	2021-8-3
	EMI Test Receiver	Rohde & Schwarz	ESR3	101907	2021-8-2	2022-8-1
	LISN	Rohde & Schwarz	ENV216	101924	2020-8-4	2021-8-3
	LISN	Rohde & Schwarz	ENV216	101924	2021-8-2	2022-8-1

Measurement Software Information			
Test Item	Software	Manufacturer	Version
C	Bluetooth and WiFi Test System	Shenzhen JS tonscent co.,ltd	2.6.77.0518
RE	EMC 32	Rohde & Schwarz	V9.15.00
CE	EMC 32	Rohde & Schwarz	V9.15.03

C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth and 99% Occupied Bandwidth
- Power spectral density*
- Spurious RF conducted emissions
- Band edge

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Items	Extended Uncertainty
Conducted Disturbance at Mains Terminals	150kHz to 30MHz, LISN, $\pm 3.16\text{dB}$
Radiated Disturbance	30MHz to 1GHz, $\pm 5.03\text{dB}$ (Horizontal) $\pm 5.12\text{dB}$ (Vertical) 1GHz to 18GHz, $\pm 5.49\text{dB}$ 18GHz to 25GHz, $\pm 5.63\text{dB}$
Carrier power conducted measurement	50MHz~18GHz, $\pm 1.238\text{dB}$
Spurious Emission Conducted Measurement	9kHz ~40GHz, $\pm 1.224\text{dB}$

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.



12 Photographs of Test Set-ups

Refer to the < Test Setup photos >.



13 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

THE END