

Certification of Compliance

CFR 47 Part 15 Subpart B

Test Report File No.	04-IST-0331	Date of Issue	November 15, 2004
Model (s)	RV4000 (Cinevision) SV294 (SENSORY SCIENCE) DF-S04 (DAEWOO) VR2940 (Go-Video) VR2945 (Go-Video) DVR-S04 (DAEWOO) DF-L71N (DAEWOO)	<input type="radio"/> Basic <input checked="" type="radio"/> Alternated <input type="radio"/> Basic <input checked="" type="radio"/> Alternated <input type="radio"/> Basic <input checked="" type="radio"/> Alternated <input type="radio"/> Basic <input checked="" type="radio"/> Alternated <input type="radio"/> Basic <input checked="" type="radio"/> Alternated <input type="radio"/> Basic <input checked="" type="radio"/> Alternated <input type="radio"/> Basic <input checked="" type="radio"/> Alternated	
Kind of Product	DVD Recorder + VCR		
Applicant	Daewoo Electronics Corporation. 543, Dangjung-Dong, Kunpo-City, Kyounggi-DO, Korea		
Manufacturer	Daewoo Electronics Corporation. 295, Gondan-dong, Kumi-city, Kyungsangbuk-do, Korea.		

Test Result

☒ **Positive**

☐ **Negative**

Reviewed By

Approved By



J.H.LEE / EMC Group Manager



G. Chung / Chief

- Investigations requested : Measurement to the relevant clauses of F.C.C rules and regulations Part 15 Subpart B - Unintentional Radiations
- The test report with appendix consists of 85 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST EMC Laboratory.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4 2001.



TABLE OF CONTENTS

Table of contents	2
Information of test laboratory, Environmental condition, Power used	3
Descriptions of test	4-6
Information of Model Name	4
Conducted Emission	5
Radiated Emission	6
Summary	7
Test Conditions and Data - Emission	
Conducted Emission	0.15MHz - 30MHz
Test equipment / Data and Plots	8-72
Radiated Emission	30MHz - 1GHz
Test equipment / Data and Plots	73-81
Appendix	
A. The DUT Photos	82-83
B. The Test Setup Photos	84-85

Information of Tuners

Manufacture	Manufacture Name
LG Innotek Co., Ltd.	TADM-H201F
Korea ALPS	TMZH2-030A

Information of Loader

Manufacture	Manufacture Name
LITE-ON IT CORP.	DDW-451S
BTC corp.	BDR-L04P

Information of Fan

Manufacture	Manufacture Name
XINRVIAN	RDL6015S

INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd. (*FCC Filing Lab*)
San 21-8, Goan-Ri, Baekam-Myun, Yongin-City
Kyonggi-Do, 449-860, Korea
TEL : +82 31 333 4093 FAX : +82 31 333 4094

ENVIRONMENTAL CONDITIONS

Temperature	20 °C
Humidity	49 %
Atmospheric pressure	1002 mbar

POWER SUPPLY SYSTEM USED

Power supply system	120Vac , 60Hz
---------------------	---------------

PRODUCT INFORMATIONS

Power requirements	120Vac , 60Hz
Power consumption	34W
Operating conditions	41°F to 95°F(5°C to 35°C) , 5% to 90%(humidity)
Mass(approx.)	13.5lbs(6.18kg)
Dimensions(approx.)	16.9X3.54X14.0 inches(430X91X354mm) (wXhXd)
Signal system	NTSC
Antenna IN / RF OUT	Antenna or CATV input,75Ω / Channel 3 or 4 (Switchable)
Signal-to-noise ratio	43dB(VCR) , More than 95dB(DVD)
Head system	4 Head Video, 2 Head Hi-Fi helical scan azimuth system
Laser system	Semiconductor laser, wavelength 650nm
Inputs	Video/Audio(RCA jack)
Outputs	Video/Audio(RCA jack), S-video, component(RCA jack)

- EMC suppression device is not used during the test.
- Please refer to user's manual.

INFORMATIONS OF MODEL NAMES

Model Name	Model description	TCB Issued Date	Applied Loader	Applied Tuner
RV4000 SV294 DF-S04 VR2940 VR2945	Basic Model	06/07/2004	BTC	LG, Alps
RV4000 SV294 DF-S04 VR2940 VR2945	Permissive II Change (Loader change)	09/02/2004	LITE-ON	LG, Alps
DVR-S04 DF-L71N	Permissive II Change (front PCB change)	09/02/2004	BTC	Alps
DVR-S04 DF-L71N	Permissive II Change (Front change)	10/20/2004	LITE-ON	Alps
RV4000 SV294 DF-S04 VR2940 VR2945	Permissive II Change (Fan add)		LITE-ON BTC	LG, Alps
DVR-S04 DF-L71N	Permissive II Change (Fan add)		LITE-ON BTC	LG, Alps


DESCRIPTIONS OF TEST

Conducted Emissions:

The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50 Ω /50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within an bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

- Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1m X 1.5m wooden table 80cm height is placed 40cm away from the vertical wall and 1.5m away from the other wall of the shielded room. The R/S ESH3-Z5 and EMCO 3825/2 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80cm from the LISN and powered from the EMCO LISN .The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.15 to 30MHz. The bandwidth of the receiver was set to 10kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

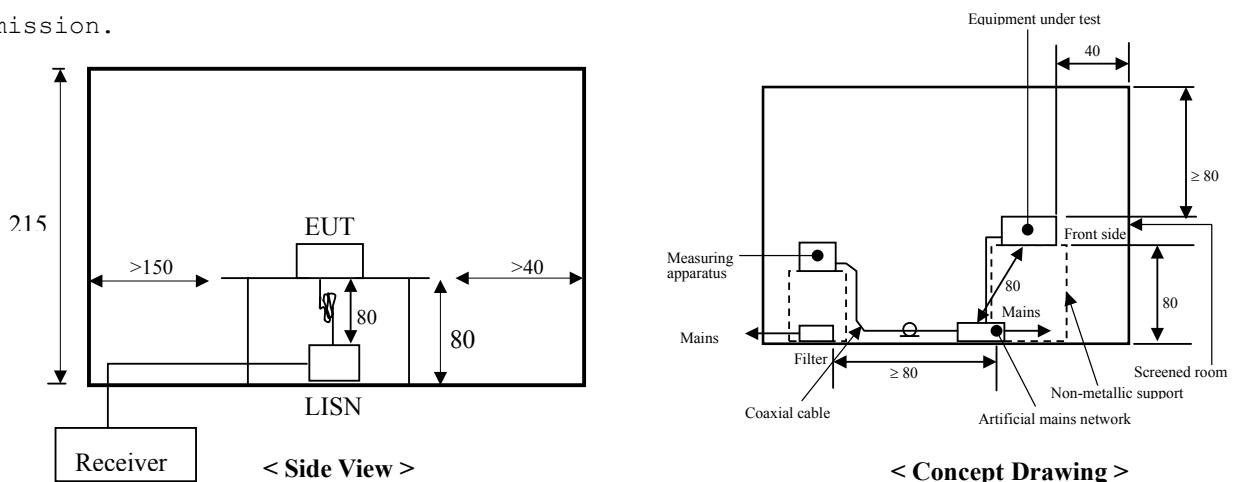

DESCRIPTION OF TEST



Radiated Emissions:

The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120KHz.

- Procedure of Test

Preliminary measurements were made at 3 meter using bi-conical and log-periodic antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 40MHz to 300MHz using S/B bi-conical antenna and 300 to 1000MHz using S/B log-periodic antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made at open site with 3-meters test distance using S/B bi-log antenna or horn antenna. The OATS have been verified in regular for its normalized site attenuations. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

.

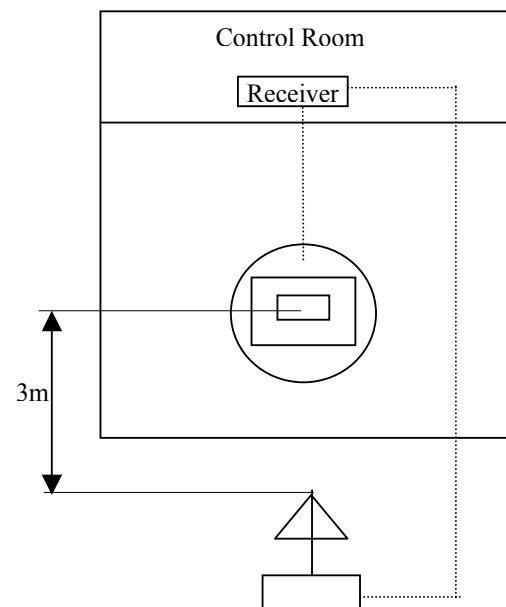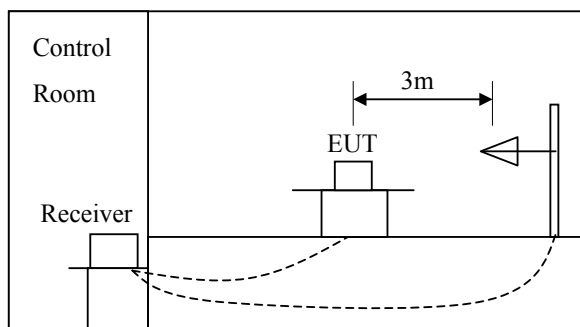

SUMMARY

■ Conducted Emission

The requirements are

● MET ○ Not MET

Minimum limit margin

3.1 dB at 0.530 MHz

Maximum limit exceeding

Remarks : **With live phase, for average detect mode – RV4000**
(RF Receiving + DVD REC mode, Tuner : Alps , Loader : BTC)

■ Radiated Emission

The requirements are

● MET ○ Not MET

Minimum limit margin

6.8 dB at 254.8 MHz

Maximum limit exceeding

Remarks : **RV4000**
RF Receiving + DVD REC mode , Tuner : Alps , Loader : Lite-on)

☐ Output Signal Level Measurements

The requirements are

○ MET ○ Not MET

Minimum limit margin

Maximum limit exceeding

Remarks :

☐ Output Terminal Conducted Spurious Emission

The requirements are

○ MET ○ Not MET

Minimum limit margin

Maximum limit exceeding

Remarks :

☐ Transfer Switch Isolation Measurements

The requirements are

○ MET ○ Not MET

Minimum limit margin

Maximum limit exceeding

Remarks :

Note :

Prepared By



I.Y.Lee / EMC Engineer

- ■ means the test is applicable, □ is not applicable.

TEST CONDITIONS AND DATA

Conducted Emissions

[Applicable]

◆ Test Equipment Used

The test equipment used is calibrated in regular for every year.

<u>Model Name</u>	<u>Manufacturer</u>	<u>Descriptions</u>	<u>Calibration Date</u>	<u>Serial Number</u>
ESH3	Rohde & Schwarz	Test Receiver	July 15, 2004	892108/018
ESH3-Z5	Rohde & Schwarz	LISN	July 15, 2004	862770/025
ESH3-Z2	Rohde & Schwarz	Pulse Limiter	July 15, 2004	357.8810.52
PM5418	FLUKE	Pattern Generator	May 10, 2004	L0796009

◆ Auxiliary Equipment Used

<u>Model Name</u>	<u>Manufacturer</u>	<u>Descriptions</u>
14C5T	Daewoo Electronics.	Color TV Receiver

◆ Accessories including cables

<u>Name</u>	<u>Length</u>	<u>Port and Descriptions</u>
RCA	1m	Audio/Video Out

◆ Environmental Conditions

Temperature	20 °C
Humidity	49 %
Atmosphere pressure	1008 mbar

◆ Test Program

DVD Playback + VCR REC, VCR Playback + DVD REC,
RF Receiving + VCR REC, RF Receiving + DVD REC


◆ Test Area

Shielded Room #1

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

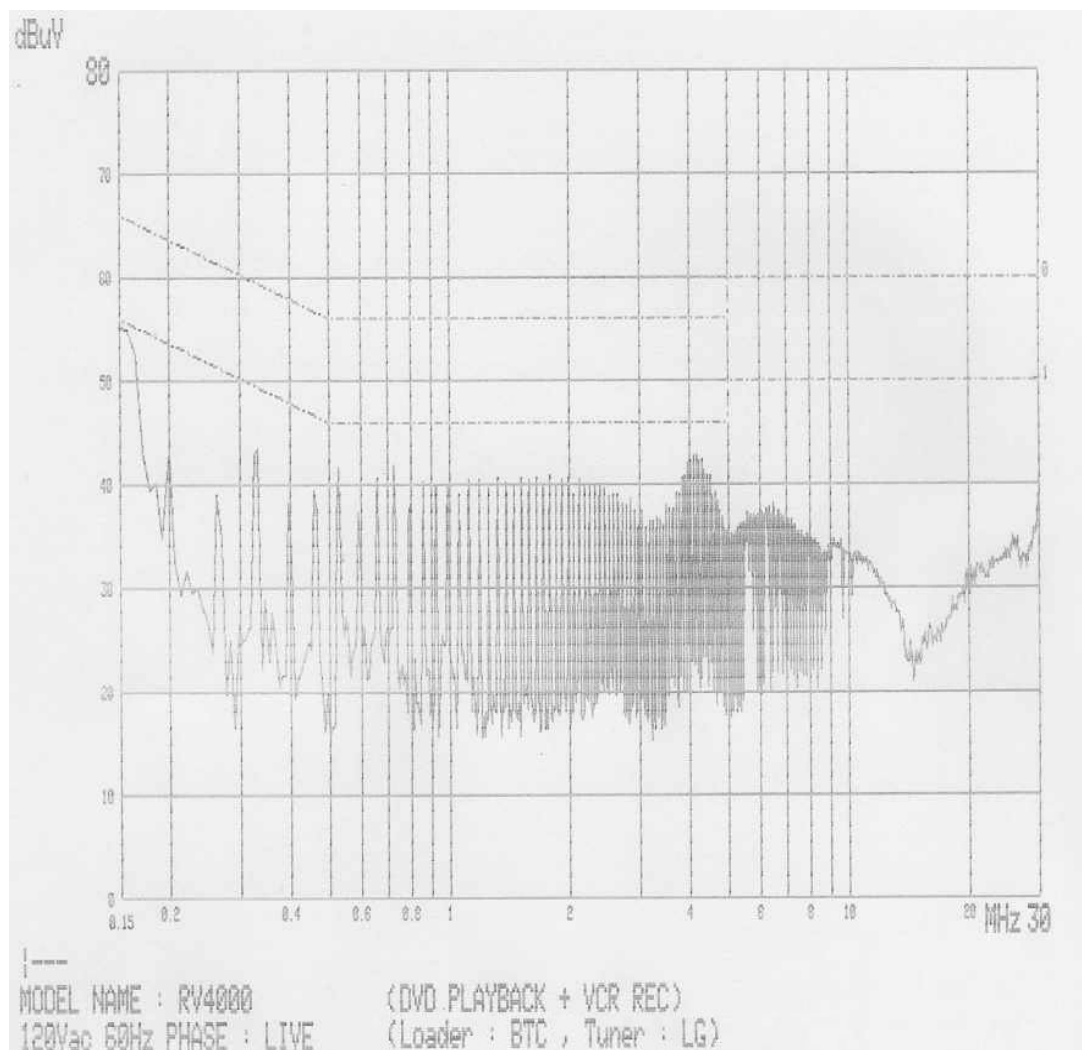

Tuner : TADM-H201F (LG)


Loader : BDR-L04P (BTC)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.6	15.3	66.0	56.0	11.4	40.7
0.329	42.6	41.6	59.5	49.5	16.9	7.9
0.527	41.6	40.9	56.0	46.0	14.4	5.1
4.216	42.3	40.2	56.0	46.0	13.7	5.8

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

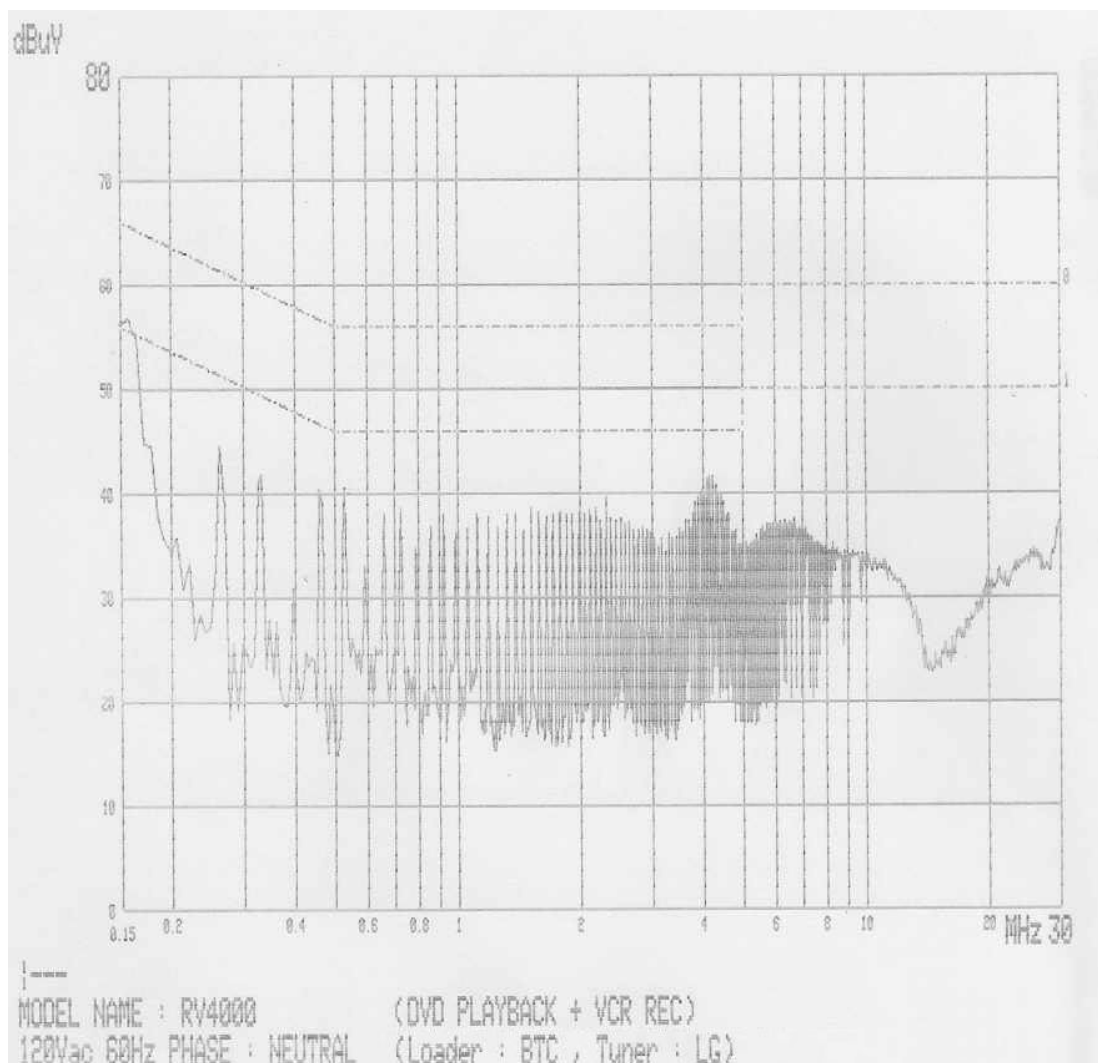

Tuner : TADM-H201F (LG)


Loader : BDR-L04P (BTC)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.3	15.5	66.0	56.0	11.7	40.5
0.263	44.3	43.6	61.3	51.3	17.0	7.7
0.329	42.7	41.6	59.5	49.5	16.8	7.9
4.215	41.3	38.9	56.0	46.0	14.7	7.1

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

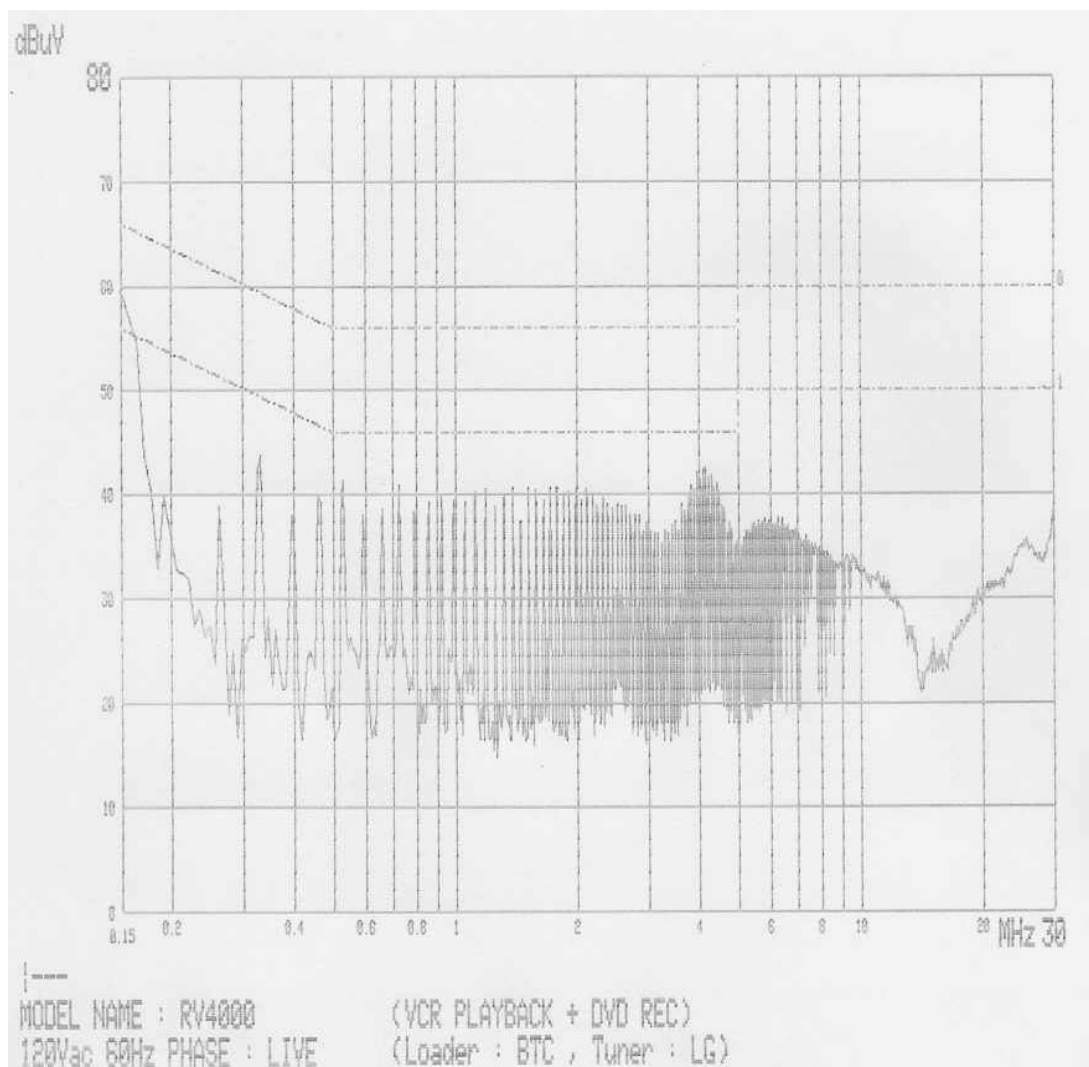

Tuner : TADM-H201F (LG)


Loader : BDR-L04P (BTC)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.1	15.2	66.0	56.0	11.9	40.8
0.329	42.5	41.5	59.5	49.5	17.0	8.0
0.527	41.5	40.9	56.0	46.0	14.5	5.1
4.285	41.6	39.7	56.0	46.0	14.4	6.3

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

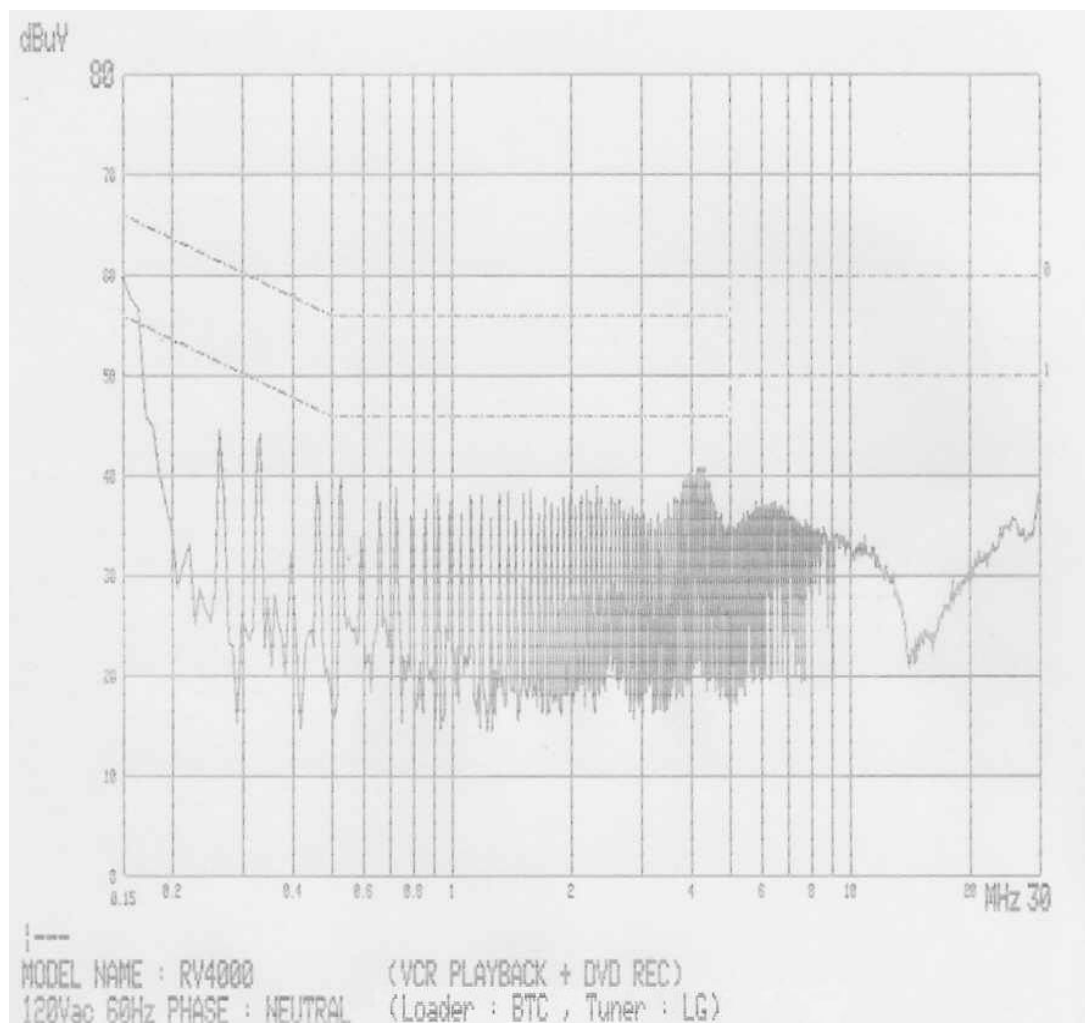

Tuner : TADM-H201F (LG)


Loader : BDR-L04P (BTC)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.7	15.3	66.0	56.0	11.3	40.7
0.263	44.1	43.3	61.3	51.3	17.2	8.0
0.329	42.6	41.6	59.5	49.5	16.9	7.9
4.283	39.9	38.8	56.0	46.0	16.1	7.2

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

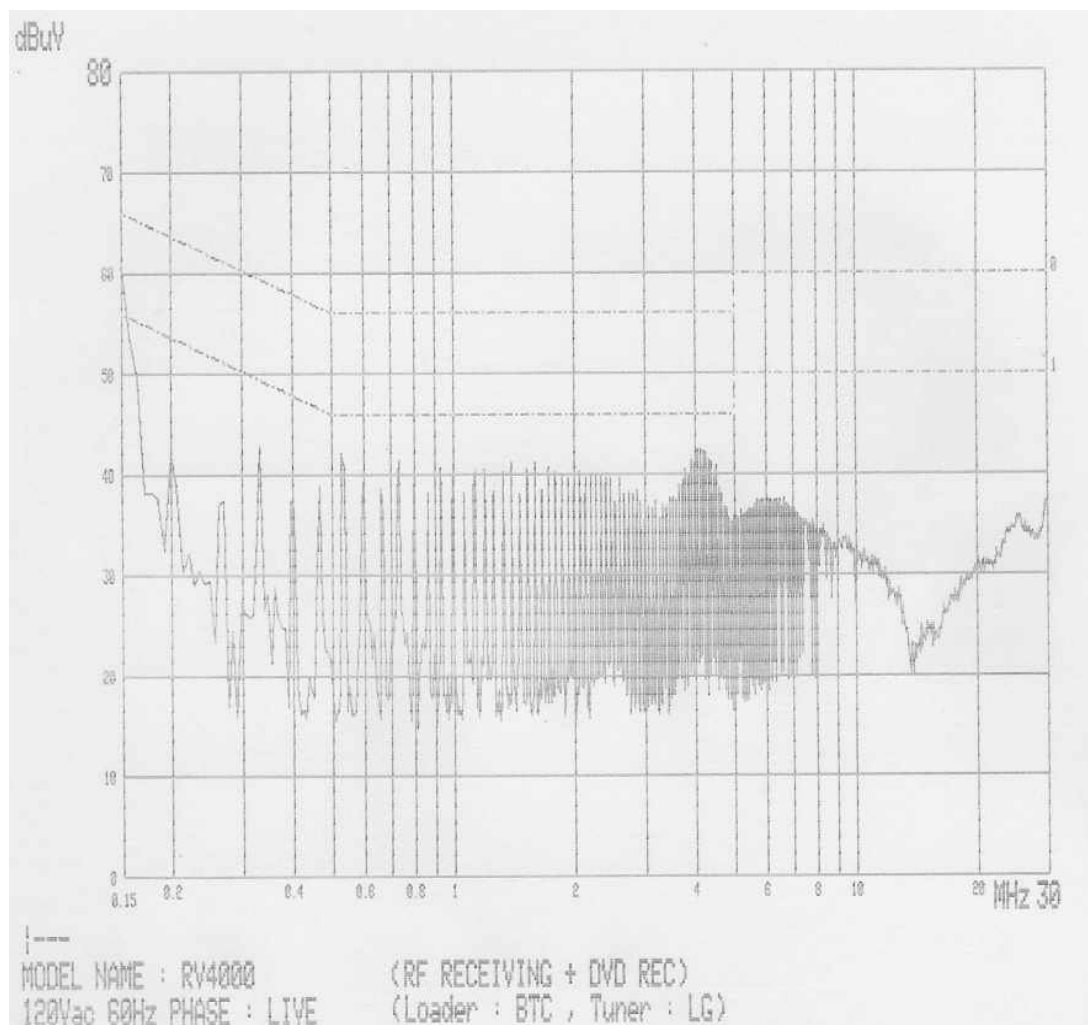

Tuner : TADM-H201F (LG)


Loader : BDR-L04P (BTC)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.3	14.4	66.0	56.0	11.7	41.6
0.329	42.5	41.6	59.5	49.5	17.0	7.9
0.527	41.6	41.0	56.0	46.0	14.4	5.0
4.087	41.8	40.2	56.0	46.0	14.2	5.8

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

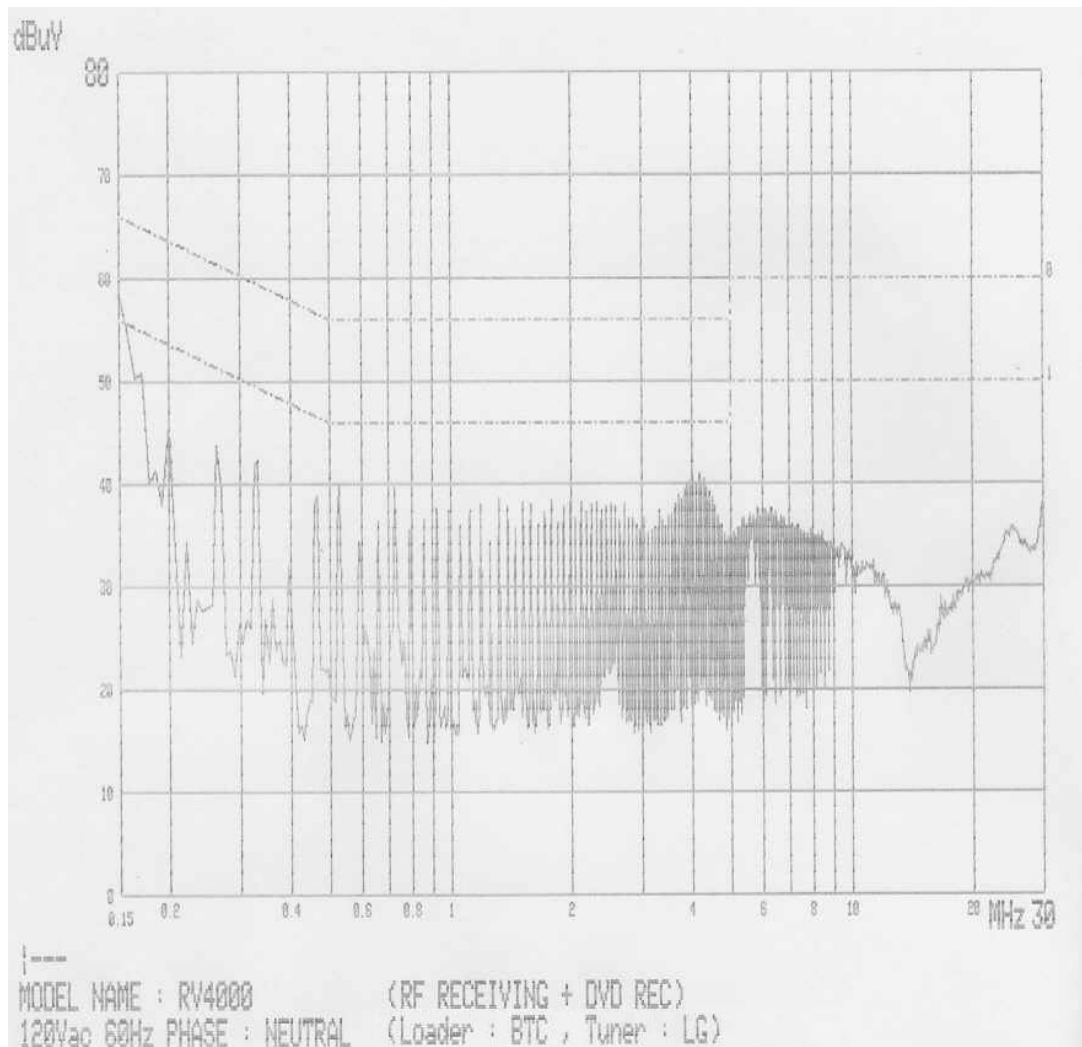

Tuner : TADM-H201F (LG)


Loader : BDR-L04P (BTC)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.3	14.7	66.0	56.0	11.7	41.3
0.198	43.7	30.1	63.7	53.7	20.0	23.6
0.263	44.0	43.2	61.3	51.3	17.3	8.1
4.218	40.5	37.3	56.0	46.0	15.5	8.7

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

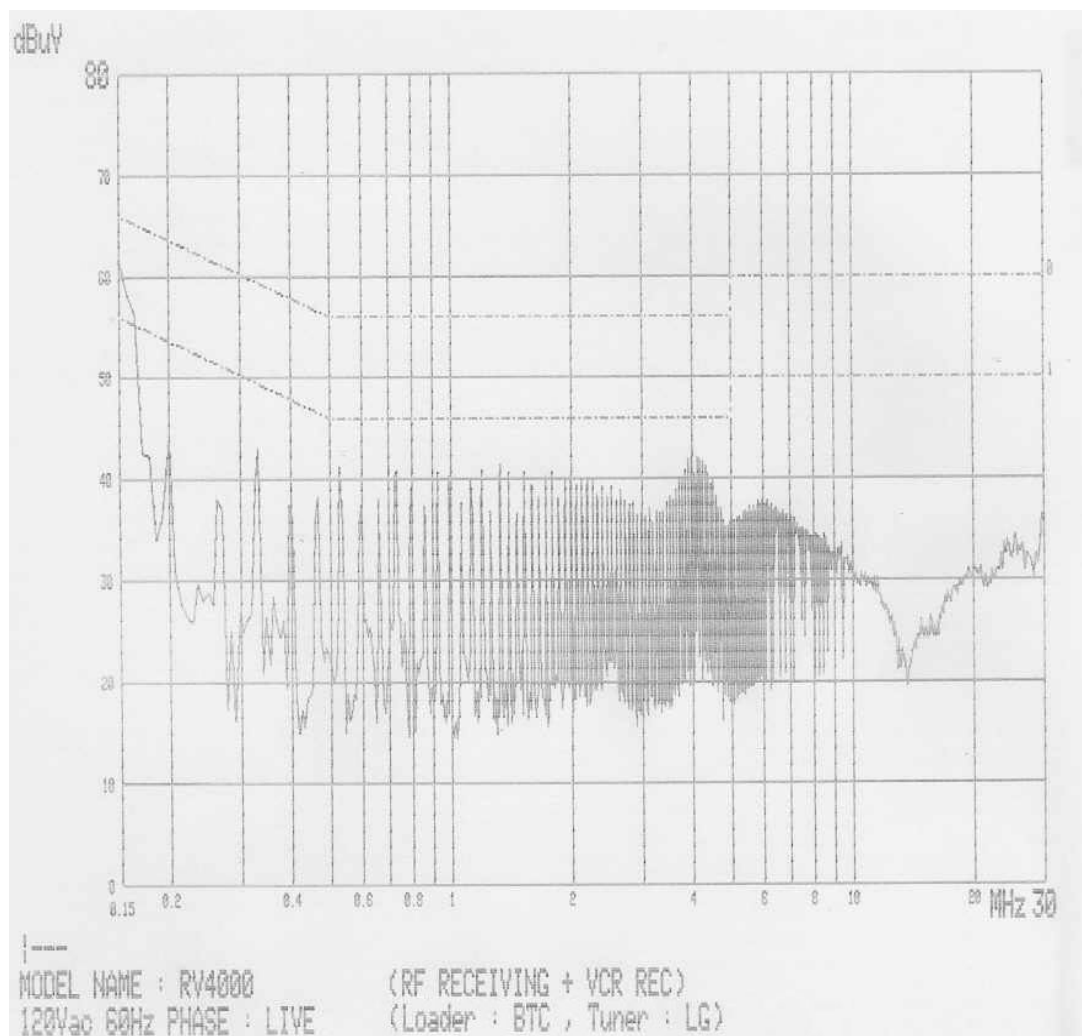

Tuner : TADM-H201F (LG)


Loader : BDR-L04P (BTC)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.5	15.0	66.0	56.0	11.5	41.0
0.199	40.4	35.0	63.7	53.7	23.3	18.7
0.331	42.4	41.5	59.4	49.4	17.0	7.9
4.173	41.8	39.7	56.0	46.0	14.2	6.3

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

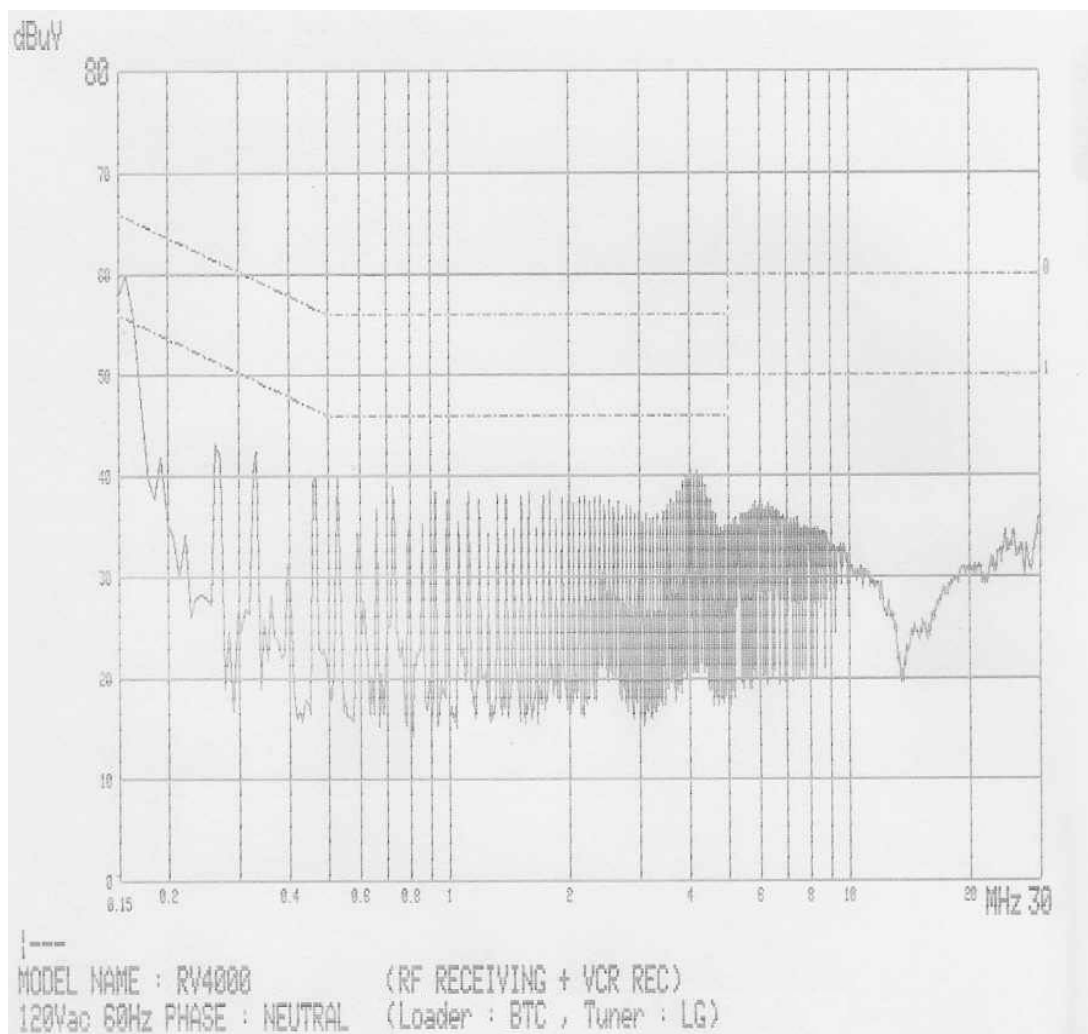

Tuner : TADM-H201F (LG)


Loader : BDR-L04P (BTC)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.2	15.0	66.0	56.0	11.8	41.0
0.264	43.8	42.9	61.3	51.3	17.5	8.4
0.331	42.4	41.6	59.4	49.4	17.0	7.8
4.171	40.8	38.5	56.0	46.0	15.2	7.5

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

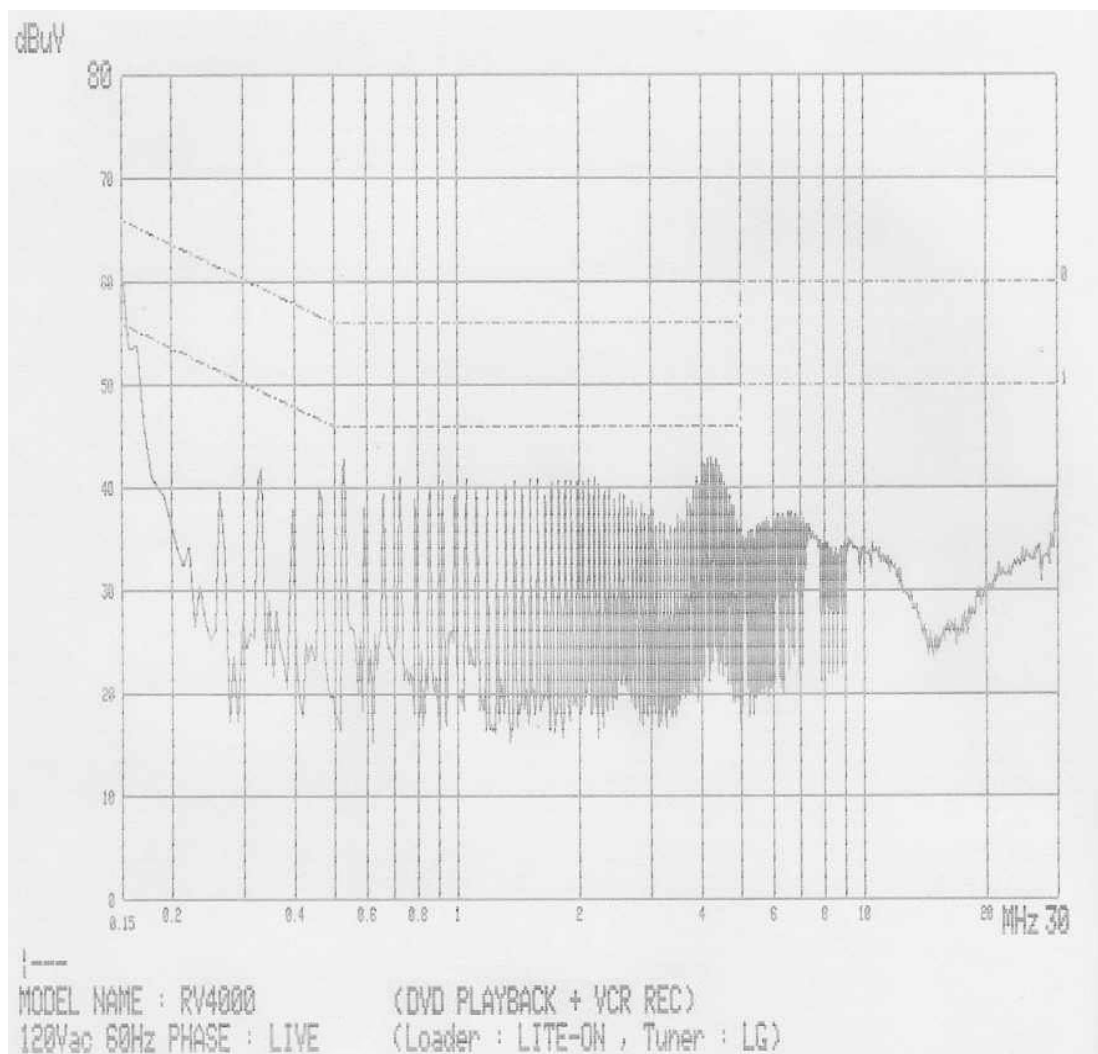

Tuner : TADM-H201F (LG)


Loader : DDW-451S (LITE-ON)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.8	15.0	66.0	56.0	11.2	41.0
0.329	42.7	41.6	59.5	49.5	16.8	7.9
0.525	41.7	40.9	56.0	46.0	14.3	5.1
4.203	42.4	40.5	56.0	46.0	13.6	5.5

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

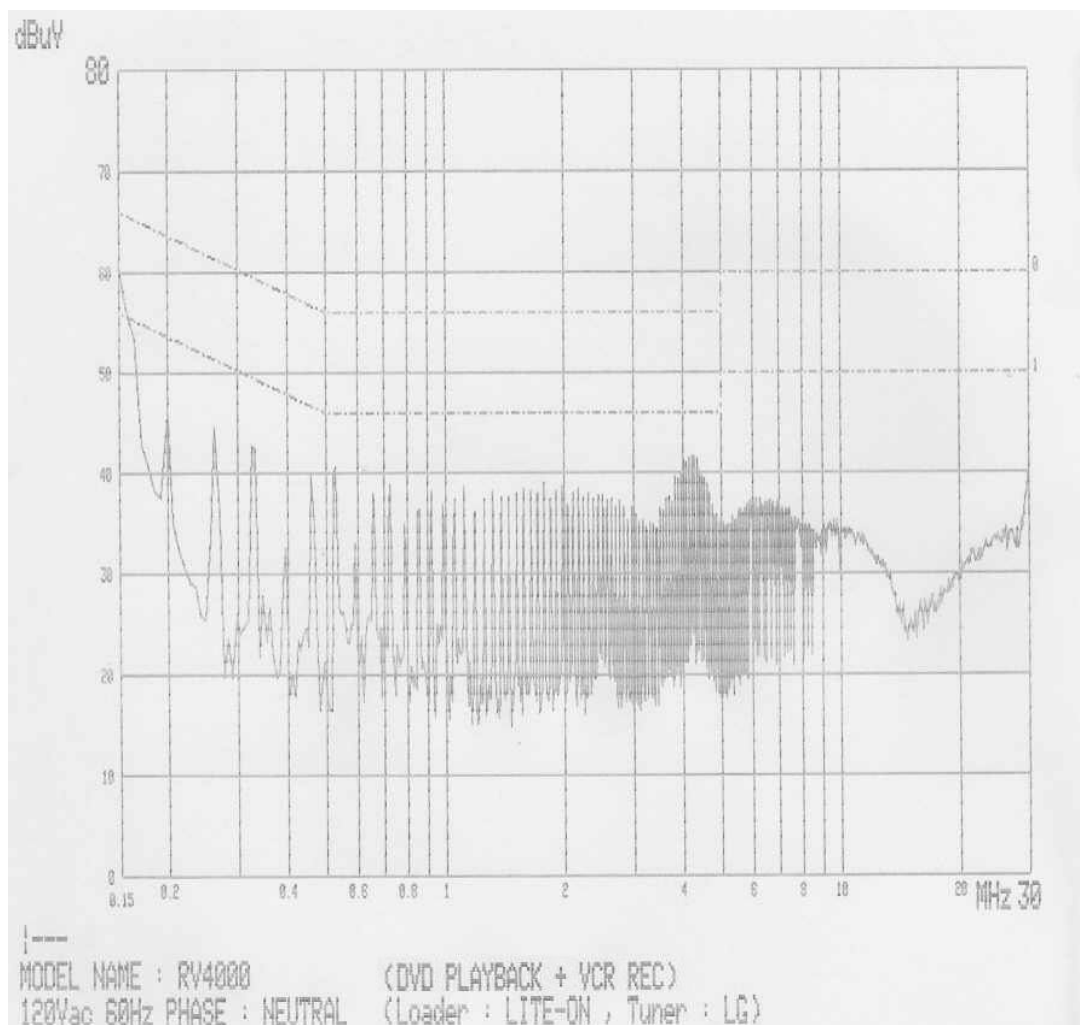

Tuner : TADM-H201F (LG)


Loader : DDW-451S (LITE-ON)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.7	15.5	66.0	56.0	11.3	40.5
0.263	44.6	43.9	61.3	51.3	16.7	7.4
0.329	42.9	41.8	59.5	49.5	16.6	7.7
4.278	41.5	39.3	56.0	46.0	14.5	6.7

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

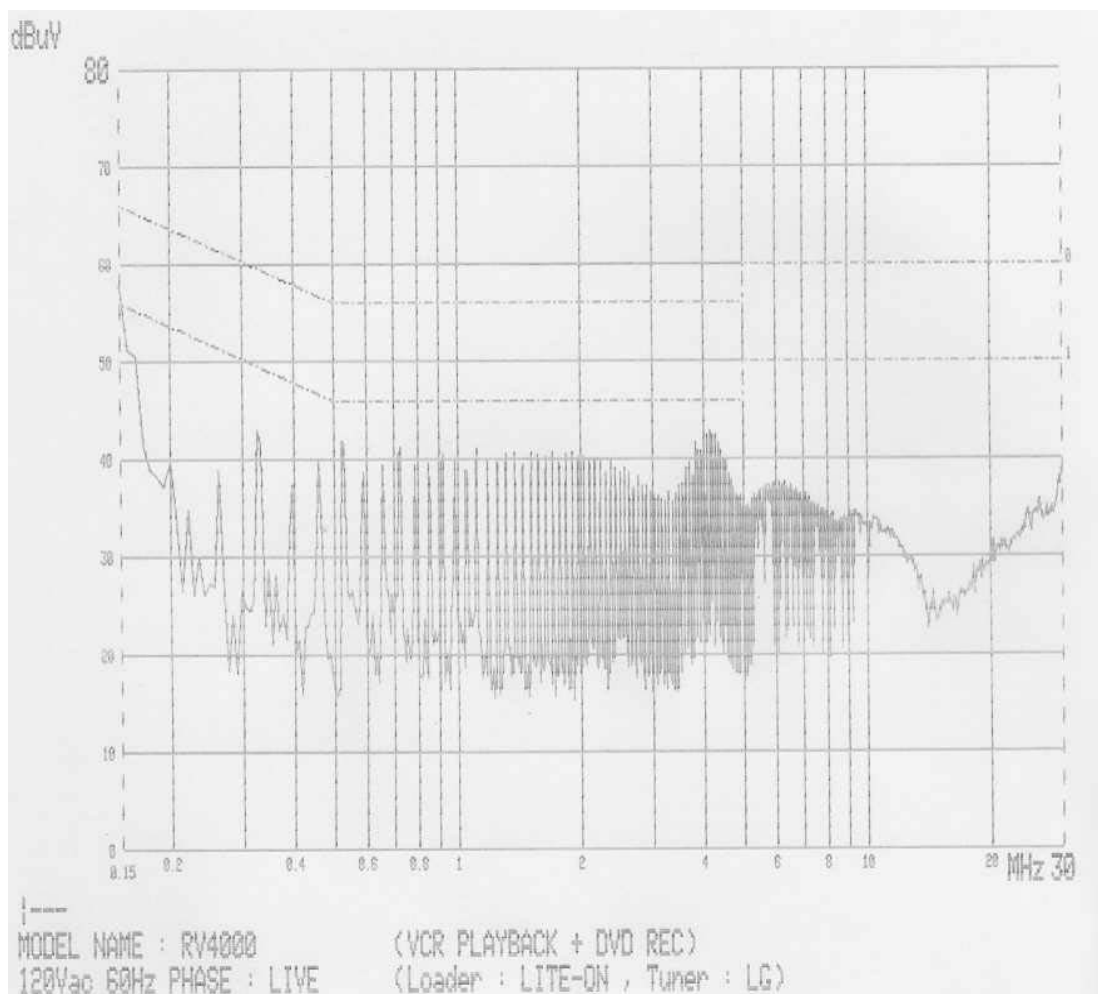

Tuner : TADM-H201F (LG)


Loader : DDW-451S (LITE-ON)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.8	15.0	66.0	56.0	11.2	41.0
0.327	42.6	41.5	59.5	49.5	16.9	8.0
0.523	41.0	40.4	56.0	46.0	15.0	5.6
4.266	42.0	40.2	56.0	46.0	14.0	5.8

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

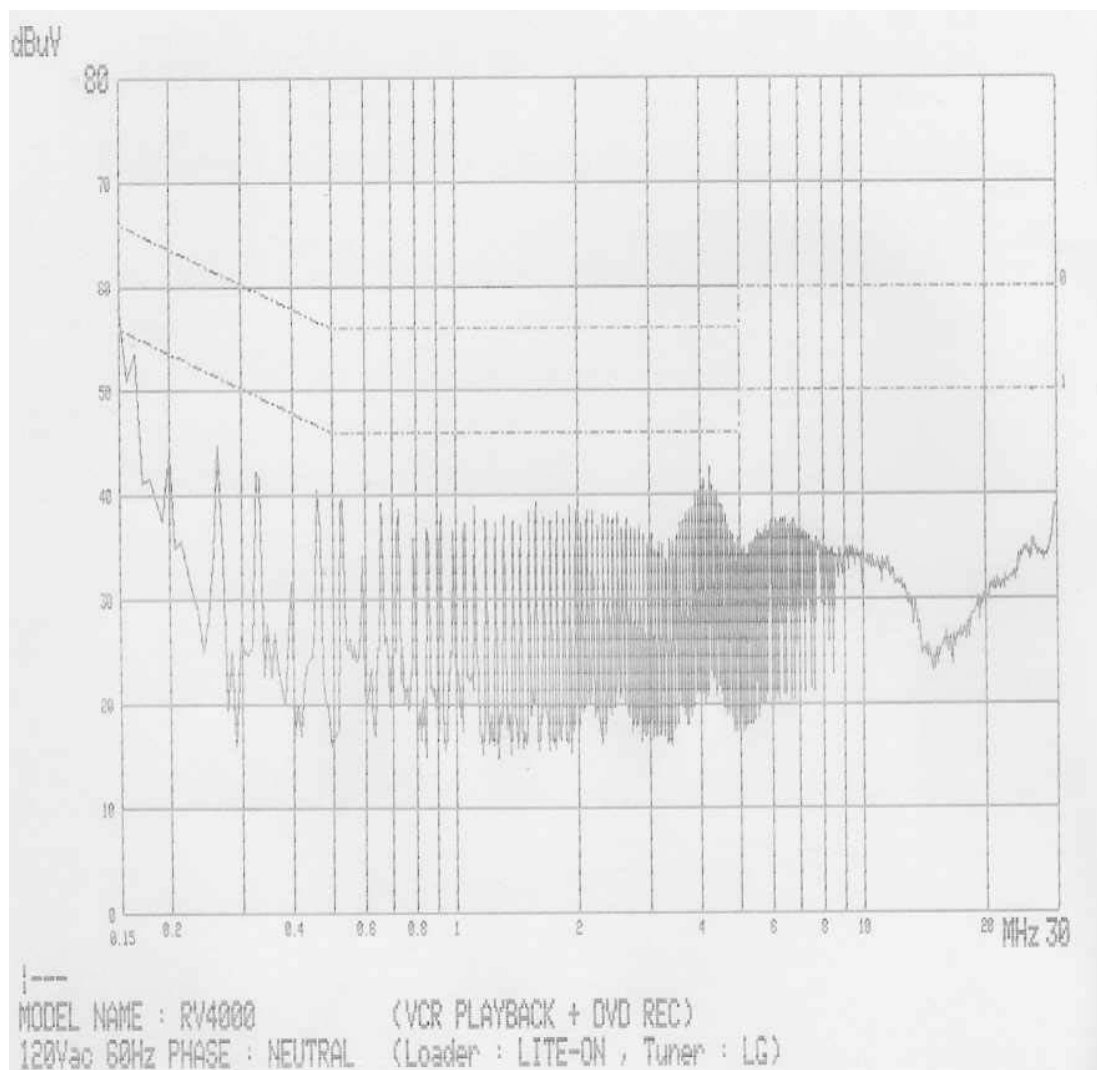

Tuner : TADM-H201F (LG)


Loader : DDW-451S (LITE-ON)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.9	14.9	66.0	56.0	11.1	41.1
0.262	44.5	43.7	61.4	51.4	16.9	7.7
0.324	40.5	39.7	59.6	49.6	19.1	9.9
4.263	41.2	38.8	56.0	46.0	14.8	7.2

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

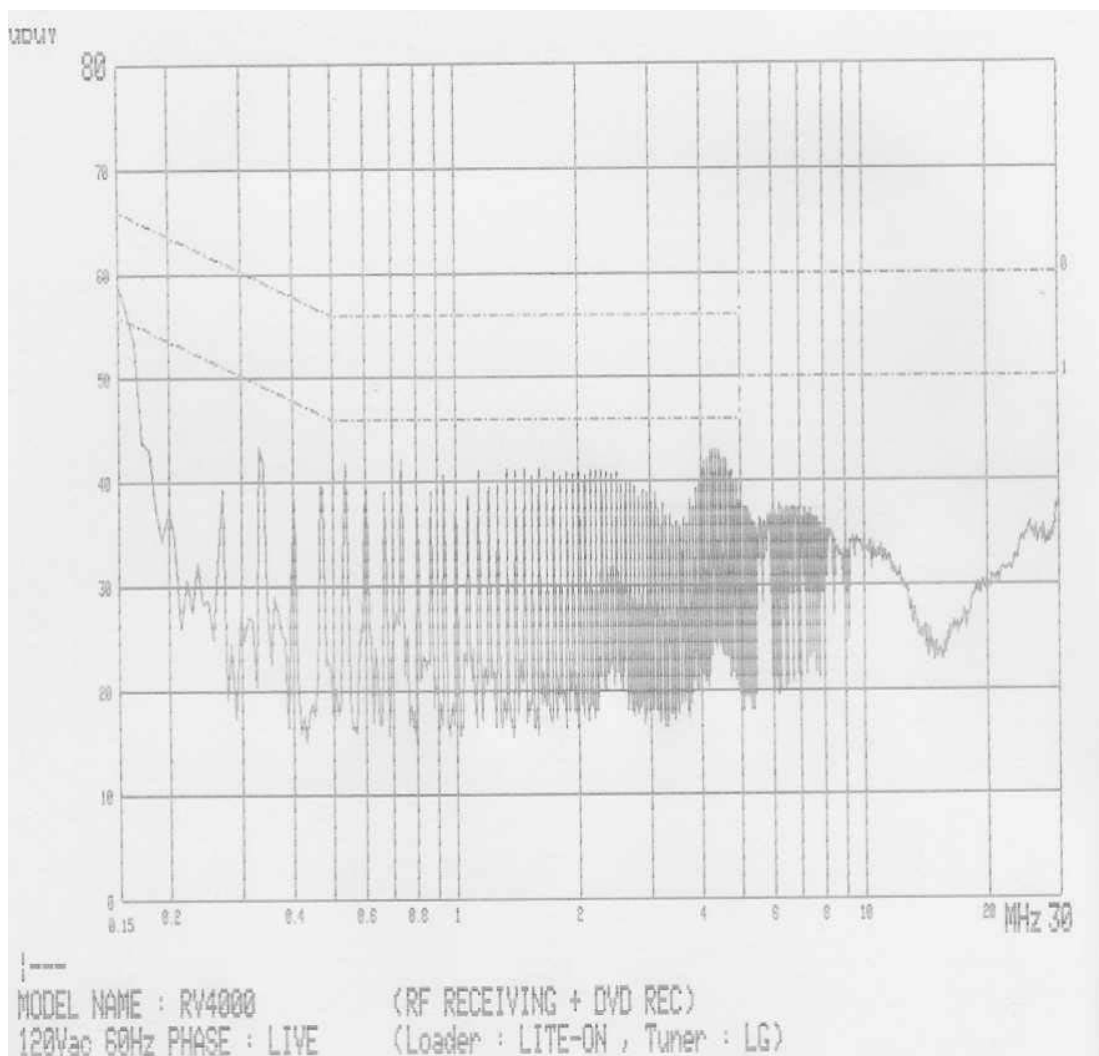

Tuner : TADM-H201F (LG)


Loader : DDW-451S (LITE-ON)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.8	14.6	66.0	56.0	11.2	41.4
0.331	42.7	41.8	59.4	49.4	16.7	7.6
0.529	41.8	41.1	56.0	46.0	14.2	4.9
4.304	42.6	40.7	56.0	46.0	13.4	5.3

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

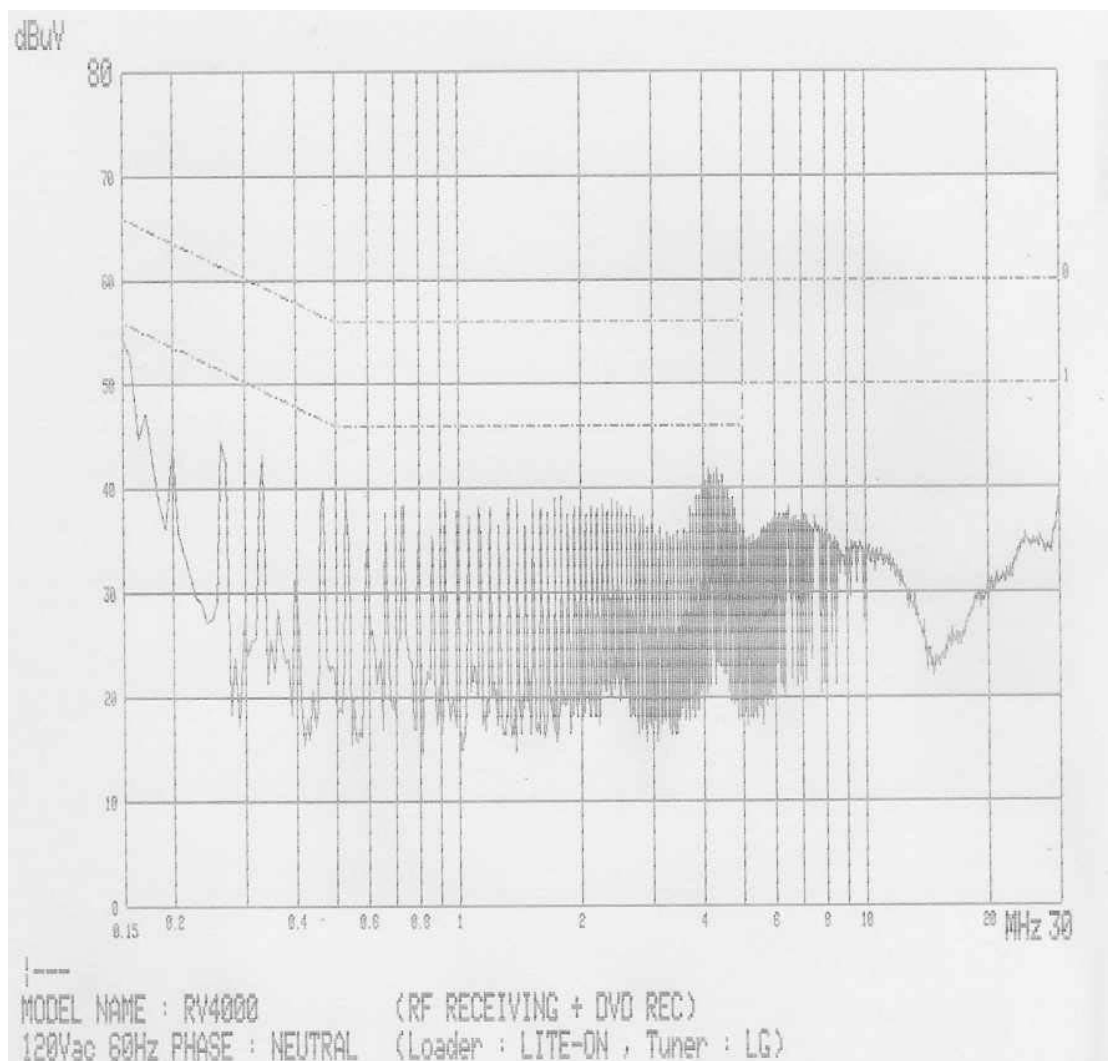

Tuner : TADM-H201F (LG)


Loader : DDW-451S (LITE-ON)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.7	14.6	66.0	56.0	11.3	41.4
0.264	44.4	43.7	61.3	51.3	16.9	7.6
0.330	43.0	42.1	59.5	49.5	16.5	7.4
4.292	41.5	39.3	56.0	46.0	14.5	6.7

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

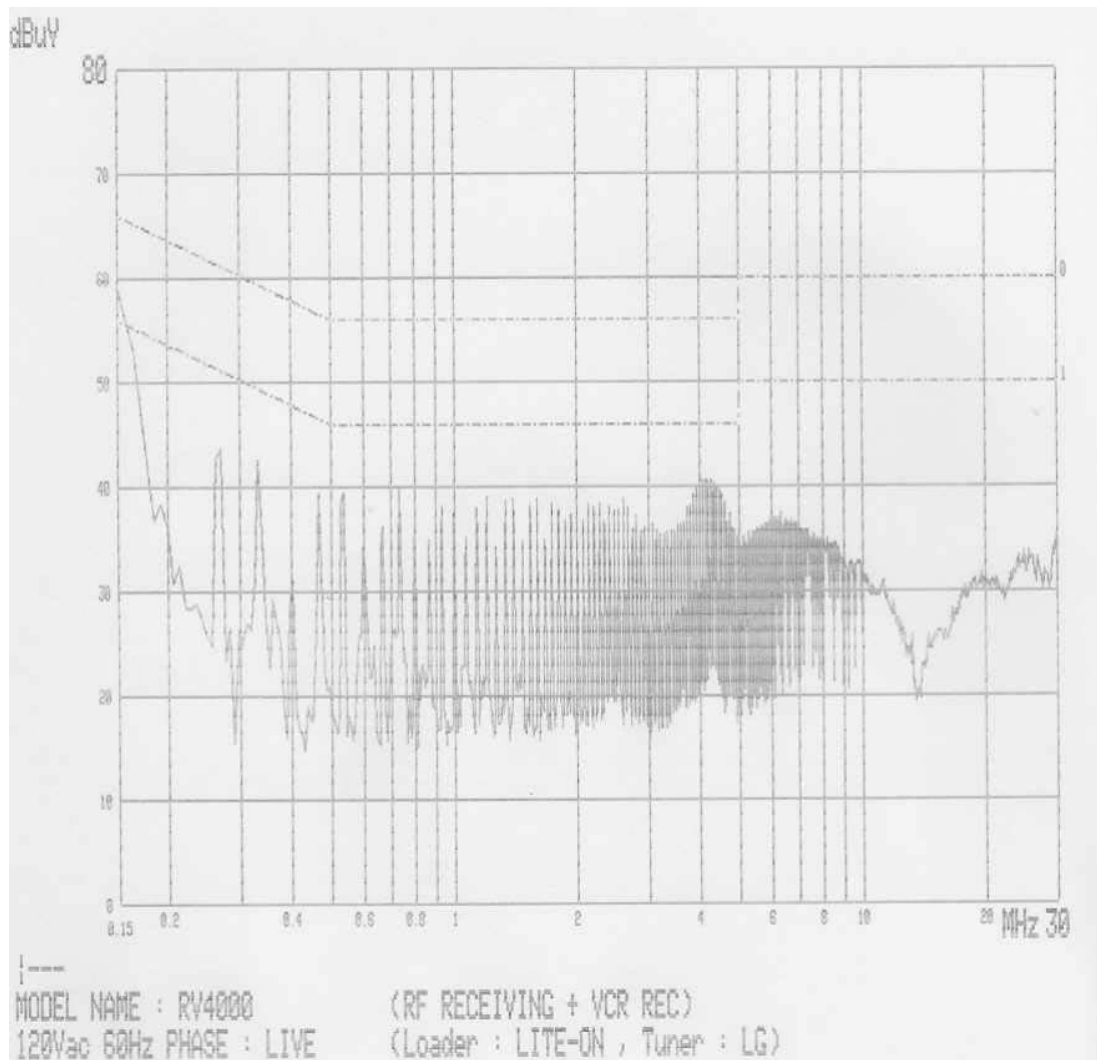

Tuner : TADM-H201F (LG)


Loader : DDW-451S (LITE-ON)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.3	14.6	66.0	56.0	11.7	41.4
0.265	43.8	43.0	61.3	51.3	17.5	8.3
0.332	42.6	41.8	59.4	49.4	16.8	7.6
4.316	40.4	37.8	56.0	46.0	15.6	8.2

Note :

Conducted Emissions

(Mains Terminal Disturbance Voltages)

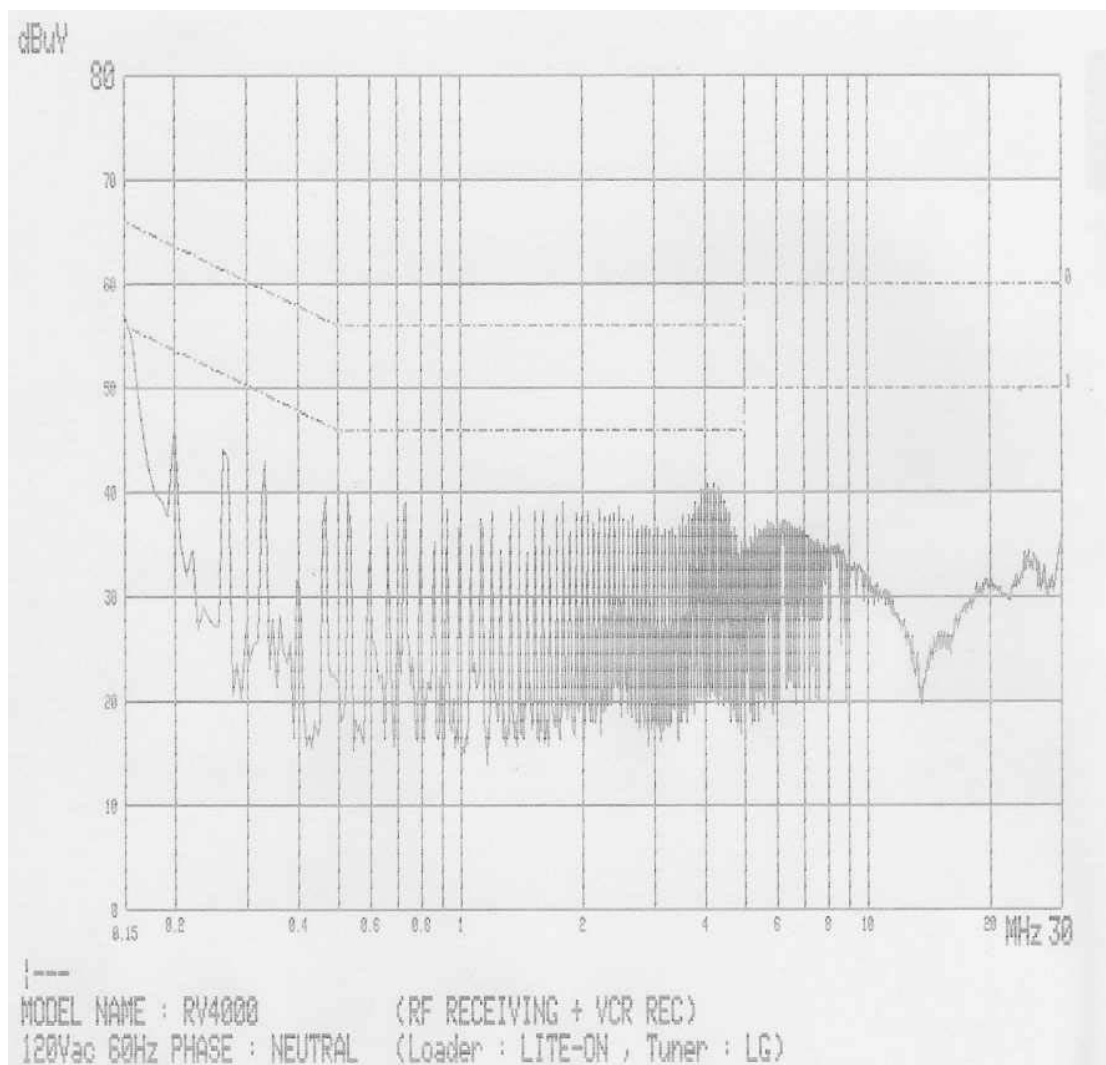

Tuner : TADM-H201F (LG)

Loader : DDW-451S (LITE-ON)

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average	Q-peak	Average
0.150	54.1	14.5	66.0	56.0	11.9	41.5
0.199	43.6	29.2	63.7	53.7	20.1	24.5
0.265	43.9	43.1	61.3	51.3	17.4	8.2
4.174	41.1	38.6	56.0	46.0	14.9	7.4

Note :