

承认书

SPECIFICATION FOR APPROVAL

客户:

CUSTOMER: _____

客户料号:

CUST P/N: _____

产品型号: J-WLD9351A28BHL350

DESC: _____

日期: 20230715

DATE: _____

版本:

VERSION: A.0 _____

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
杨茂新	刘惜姜	文鹏	

惠州市万联达电子有限公司

地址: 惠州市博罗县石湾镇工业东路 9 号 A 栋 2 楼

电话: 07526988533

邮箱: voicecoil@139.com

版本变更履历


Version Change History

[illegible]

SPECIFICATION

产品型号 DESC	JO93*51.5-9TS-20mm 双线圈	版本 REV:A.O	客户 CUST	
			客户料号 CUST P/N	120702087

一、尺寸 DIMENSION(MM)

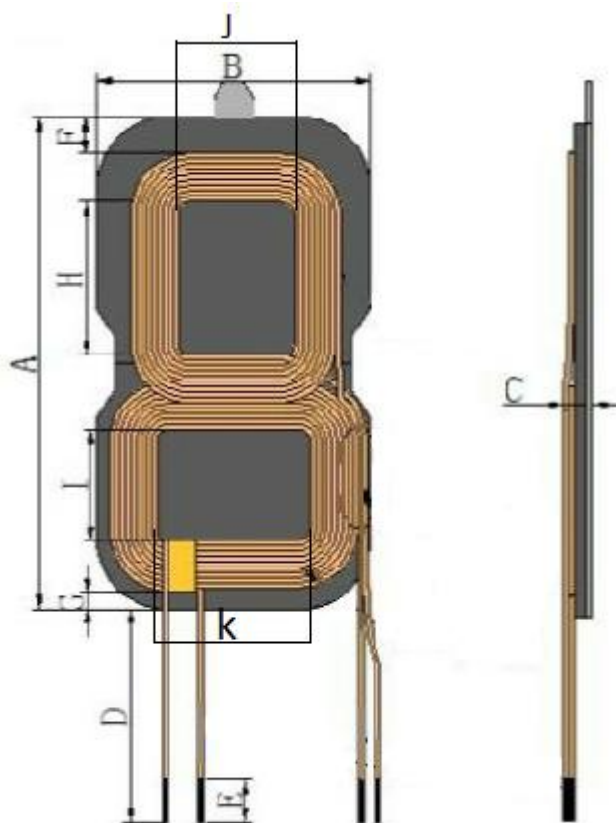

A 93.0 ± 1.0

B 51.5 ± 0.5

C 3.9 Max

D 350 ± 5

E 3 ± 2

F 6.0 ± 1

G 3 ± 1

H 26 ± 1.5

I 17 ± 1

J 17 ± 1

K 26 ± 1.5

Note: 1. Apply 5mm high-temperature tape 1.5~2 turns at the outlet of the coil lead
 2. The front of the magnetic separator is pasted with black film, and the back is pasted with ordinary double-sided tape at the manual tear position
 3. The lead wire is too long and needs to be welded. The welding position should not exceed the edge of the magnetic separator by 15mm, and the welding position should be covered with a heat shrink tube
 4. Dual or integrated magnetic disks can be used for magnetic disks, with dimensions of 93 * 51 * 1.0

三、绕线参数 Winding Specification:

序号 NO	线 材 Wire	圈 数 Turns	绕线方向 Winding Direction
L1	丝包线 0.08*105P	9TS	CCW
L2	丝包线 0.08*105P	9TS	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, 湿度 RELATIVE HUMIDITY : $65 \pm 20\%$

序号 NO	项目 TIEM	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
L1	IND	$7 \pm 10\%$	100 KHZ/1.0V	LCZ METER 1062B
L2	IND	$7 \pm 10\%$	100 KHZ/1.0V	LCZ METER 1062B
L1	DCR	55m Ω Max		LCZ METER 1062B
L2	DCR	55m Ω Max		LCZ METER 1062B

拟制	PREPARED BY	审核	CHECKED BY	日期	DATE
	杨茂新		刘惜姜		20230715