

Appendix C - Highest Measurement Plots

Test Date : 2024-01-02 | Ambient Temp : 22.9 °C | Tissue Temp : 22.4 °C

Test Mode**1_WCDMA Band II_RMC12.2K_Rear Face_0mm_Ch9262_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 2	WCDMA, 10011 - CAC	1852.400, 9262	7.25	1.41	40.8

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.773	0.889
psSAR-10g [W/kg]	0.411	0.423
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		66.2
Dist 3dB Peak [mm]		8.7

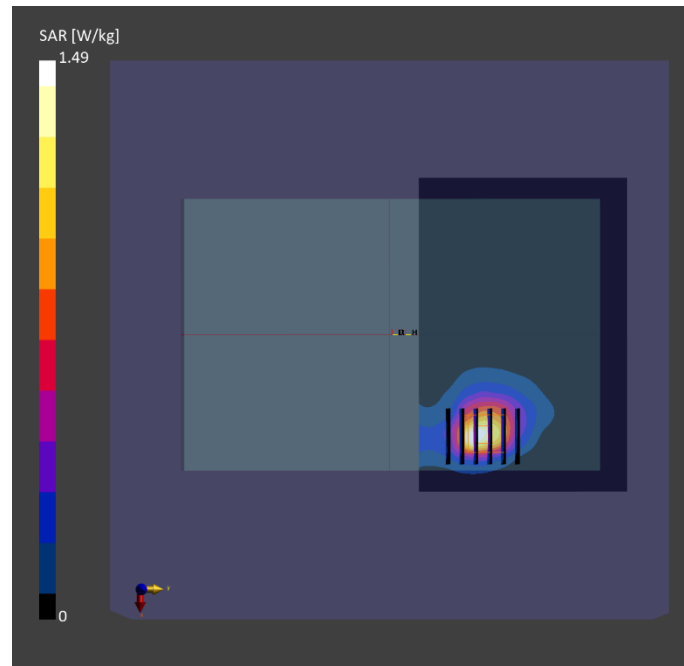

Test Date : 2024-01-02 | Ambient Temp : 22.9 °C | Tissue Temp : 22.4 °C

Test Mode**2_WCDMA Band IV_RMC12.2K_Rear Face_0mm_Ch1312_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 4	WCDMA, 10011 - CAC	1712.400, 1312	7.53	1.33	40.9

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.895	0.949
psSAR-10g [W/kg]	0.383	0.399
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		57.6
Dist 3dB Peak [mm]		9.6

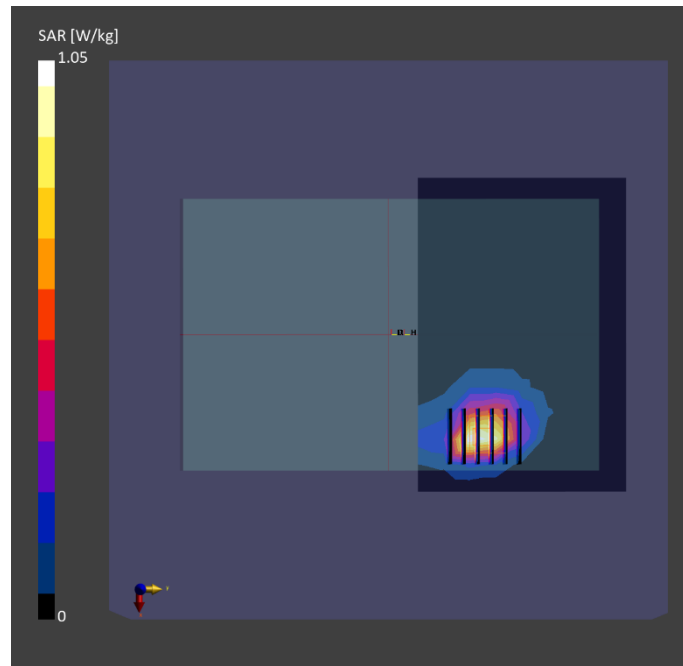

Test Date : 2024-01-03 | Ambient Temp : 22.4 °C | Tissue Temp : 22.0 °C

Test Mode**3_WCDMA Band V_RMC12.2K_Rear Face_0mm_Ch4132_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 5	WCDMA, 10011 - CAC	826.400, 4132	8.91	0.935	43.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.852	0.868
psSAR-10g [W/kg]	0.552	0.522
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		62.3
Dist 3dB Peak [mm]		9.6

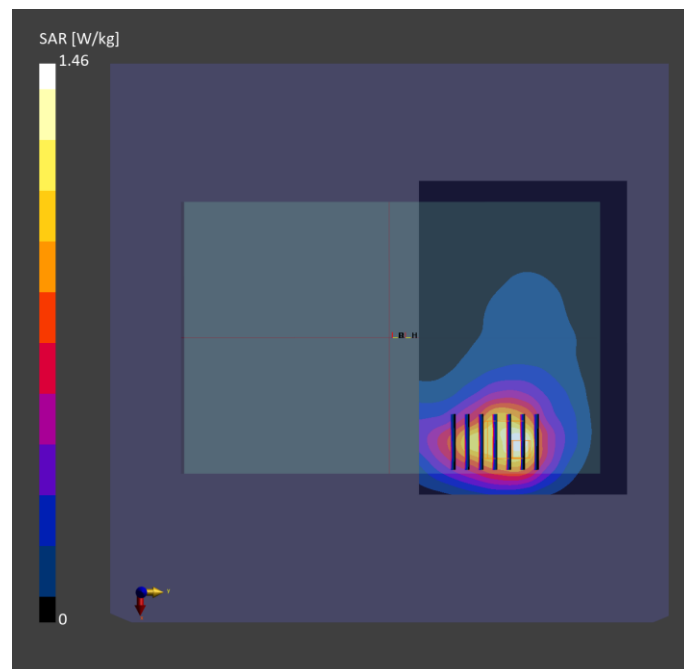

Test Date : 2024-01-02 | Ambient Temp : 22.9 °C | Tissue Temp : 22.4 °C

Test Mode**4_LTE Band 2_QPSK20M_Rear Face_0mm_Ch18900_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 2	LTE-FDD, 10169 - CAF	1880.000, 18900	7.25	1.43	40.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.828	0.949
psSAR-10g [W/kg]	0.435	0.448
Power Drift [dB]		-0.11
TSL Correction	Positive only	Positive only
M2 / M1 [%]		65.3
Dist 3dB Peak [mm]		8.7

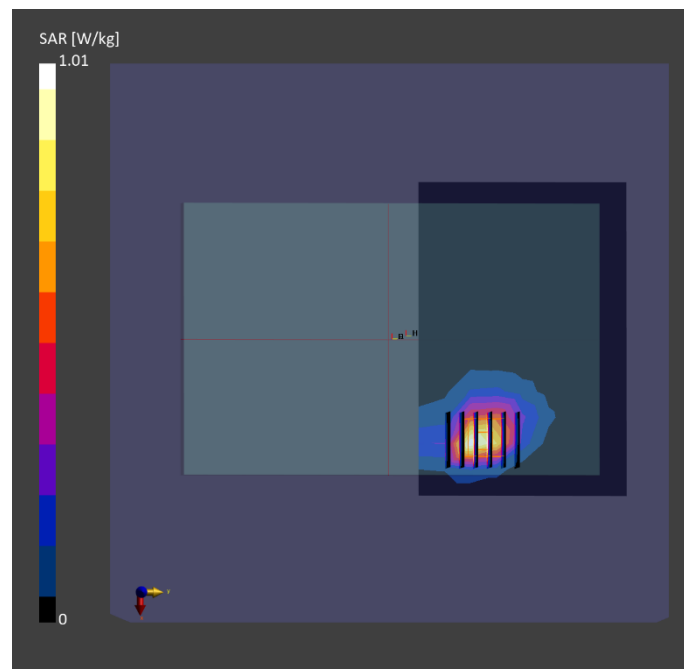

Test Date : 2024-01-02 | Ambient Temp : 22.9 °C | Tissue Temp : 22.4 °C

Test Mode**5_LTE Band 4_QPSK20M_Rear Face_0mm_Ch20300_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 4	LTE-FDD, 10169 - CAF	1745.000, 20300	7.53	1.35	40.9

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.894	0.950
psSAR-10g [W/kg]	0.480	0.478
Power Drift [dB]		-0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		67.3
Dist 3dB Peak [mm]		9.6

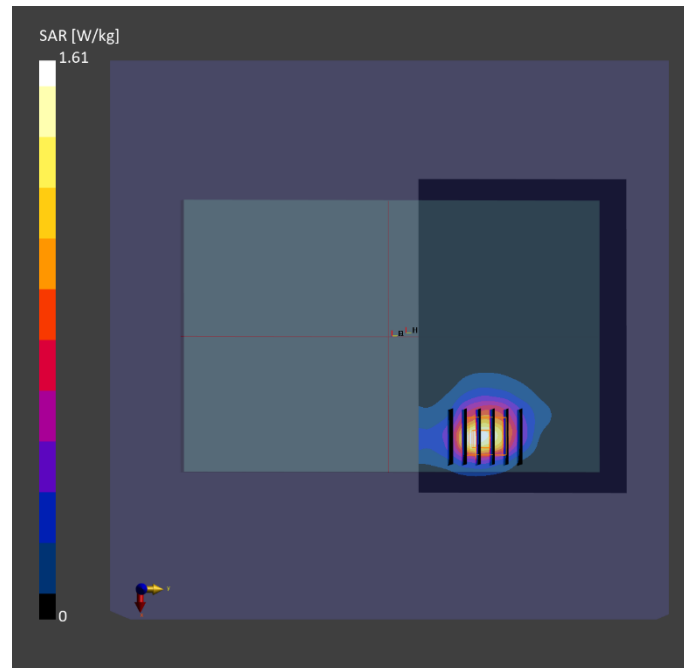

Test Date : 2024-01-03 | Ambient Temp : 22.4 °C | Tissue Temp : 22.0 °C

Test Mode**6_LTE Band 5_QPSK10M_Rear Face_0mm_Ch20525_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 5	LTE-FDD, 10175 - CAH	836.500, 20525	8.91	0.939	43.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.766	0.876
psSAR-10g [W/kg]	0.510	0.496
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		66.1
Dist 3dB Peak [mm]		9.6

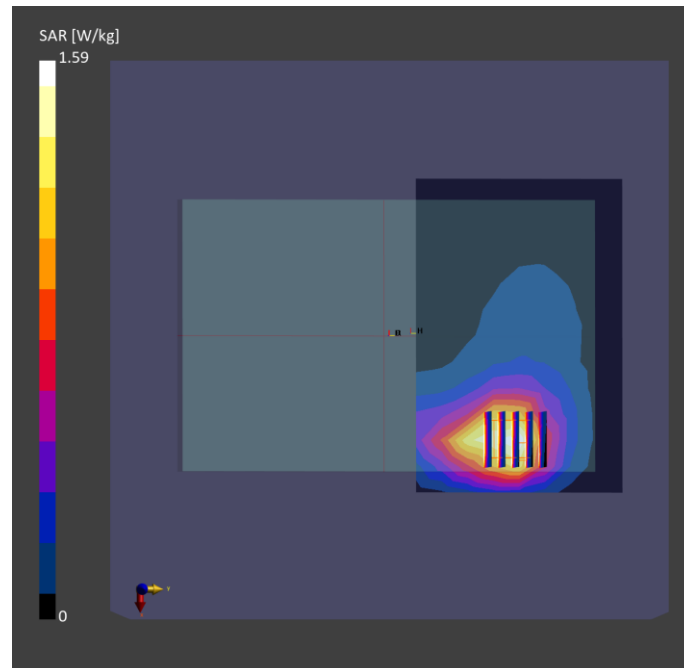

Test Date : 2024-01-05 | Ambient Temp : 22.6 °C | Tissue Temp : 22.3 °C

Test Mode**7_LTE Band 7_QPSK20M_Rear Face_0mm_Ch21100_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 7	LTE-FDD, 10169 - CAF	2535.000, 21100	6.95	1.86	39.3

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.589	0.602
psSAR-10g [W/kg]	0.278	0.280
Power Drift [dB]		0.05
TSL Correction	Positive only	Positive only
M2 / M1 [%]		70.5
Dist 3dB Peak [mm]		9.5

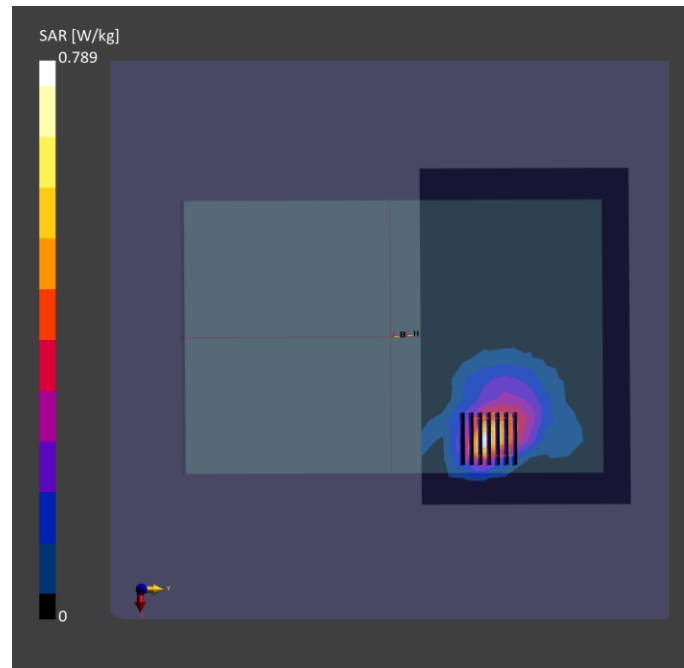

Test Date : 2024-01-04 | Ambient Temp : 22.4 °C | Tissue Temp : 21.9 °C

Test Mode**8_LTE Band 12_QPSK10M_Rear Face_0mm_Ch23130_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 12	LTE-FDD, 10175 - CAH	711.000, 23130	9.1	0.884	42.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.448	0.475
psSAR-10g [W/kg]	0.296	0.289
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		68.9
Dist 3dB Peak [mm]		11.2

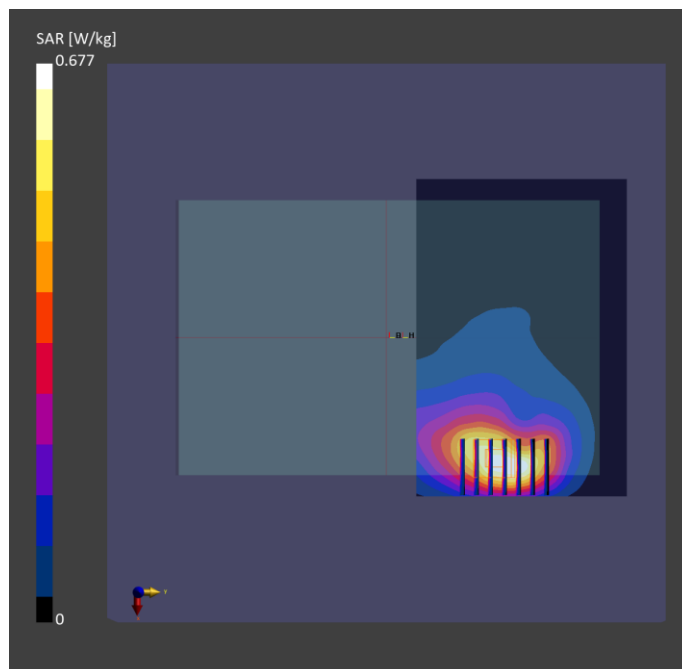

Test Date : 2024-01-04 | Ambient Temp : 22.4 °C | Tissue Temp : 21.9 °C

Test Mode**9_LTE Band 13_QPSK10M_Rear Face_0mm_Ch23230_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 13	LTE-FDD, 10175 - CAH	782.000, 23230	9.1	0.908	42.3

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.555	0.590
psSAR-10g [W/kg]	0.366	0.350
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		66.3
Dist 3dB Peak [mm]		11.7

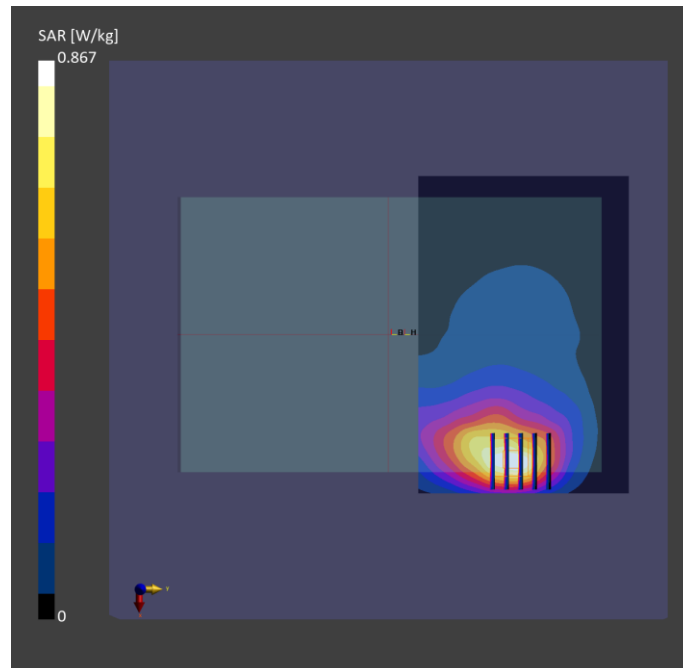

Test Date : 2024-01-04 | Ambient Temp : 22.4 °C | Tissue Temp : 21.9 °C

Test Mode**10_LTE Band 14_QPSK10M_Rear Face_0mm_Ch23330_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 14	LTE-FDD, 10175 - CAH	793.000, 23330	9.1	0.912	42.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.448	0.481
psSAR-10g [W/kg]	0.296	0.285
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		65.6
Dist 3dB Peak [mm]		11.7

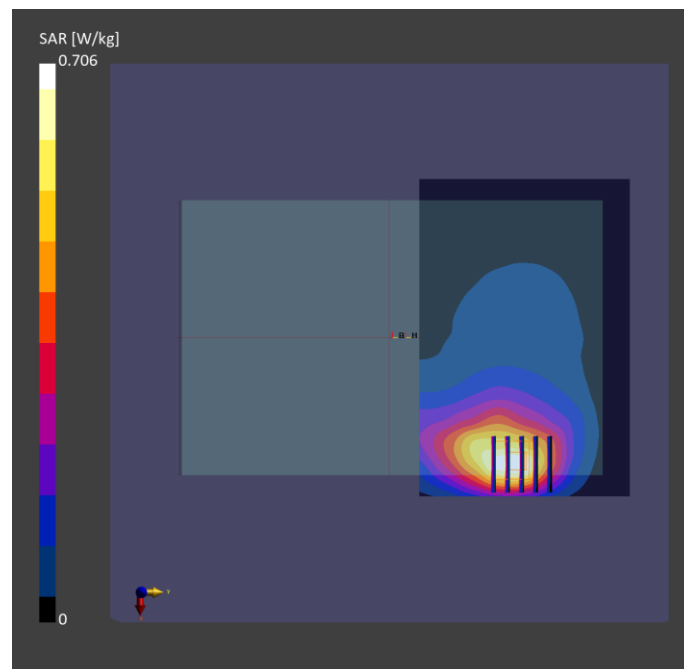

Test Date : 2024-01-04 | Ambient Temp : 22.4 °C | Tissue Temp : 21.9 °C

Test Mode**11_LTE Band 17_QPSK10M_Rear Face_0mm_Ch23790_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 17	LTE-FDD, 10175 - CAH	710.000, 23790	9.1	0.884	42.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.556	0.623
psSAR-10g [W/kg]	0.375	0.361
Power Drift [dB]		-0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		63.5
Dist 3dB Peak [mm]		12.5

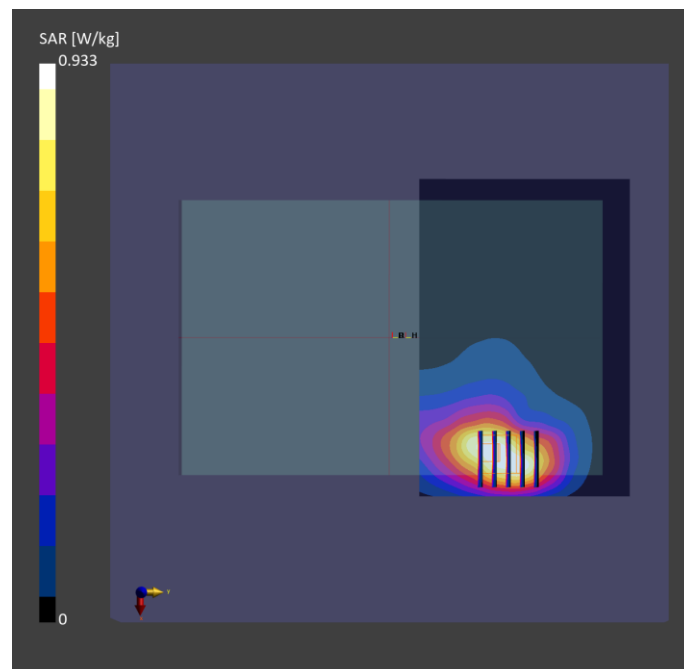

Test Date : 2024-01-02 | Ambient Temp : 22.9 °C | Tissue Temp : 22.4 °C

Test Mode**12_LTE Band 25_QPSK20M_Rear Face_0mm_Ch26590_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 25	LTE-FDD, 10169 - CAF	1905.000, 26590	7.25	1.45	40.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.941	0.950
psSAR-10g [W/kg]	0.344	0.386
Power Drift [dB]		-0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		66.8
Dist 3dB Peak [mm]		9.1

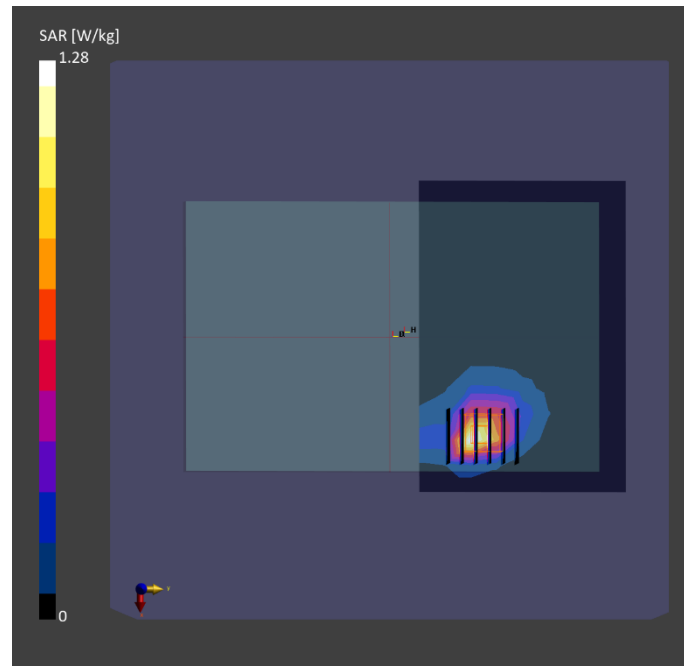

Test Date : 2024-01-03 | Ambient Temp : 22.4 °C | Tissue Temp : 22.0 °C

Test Mode**13_LTE Band 26_QPSK15M_Rear Face_0mm_Ch26865_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 26	LTE-FDD, 10181 - CAF	831.500, 26865	8.91	0.937	43.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.605	0.682
psSAR-10g [W/kg]	0.409	0.394
Power Drift [dB]		-0.05
TSL Correction	Positive only	Positive only
M2 / M1 [%]		66.7
Dist 3dB Peak [mm]		8.2

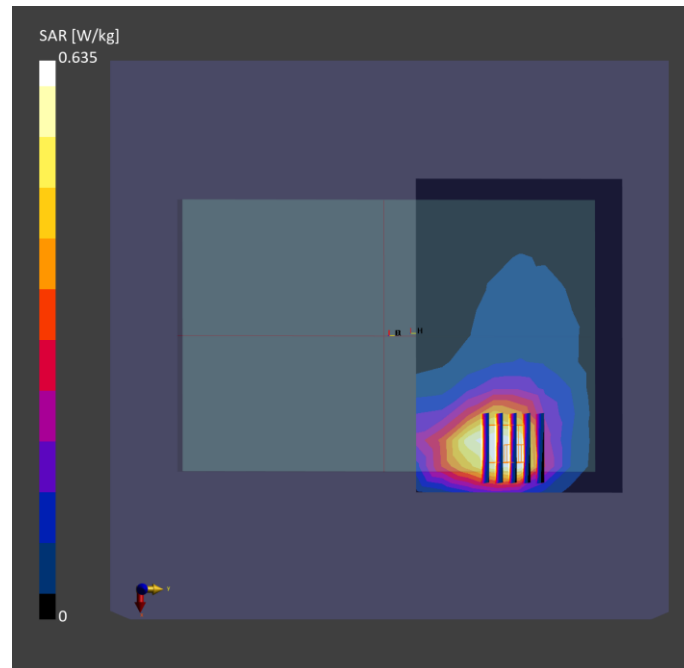

Test Date : 2024-01-05 | Ambient Temp : 22.6 °C | Tissue Temp : 22.3 °C

Test Mode**14_LTE Band 38_QPSK20M_Rear Face_0mm_Ch37850_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 38	LTE-TDD, 10172 - CAH	2580.000, 37850	6.95	1.89	39.3

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.895	0.936
psSAR-10g [W/kg]	0.425	0.422
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		68.8
Dist 3dB Peak [mm]		9.5

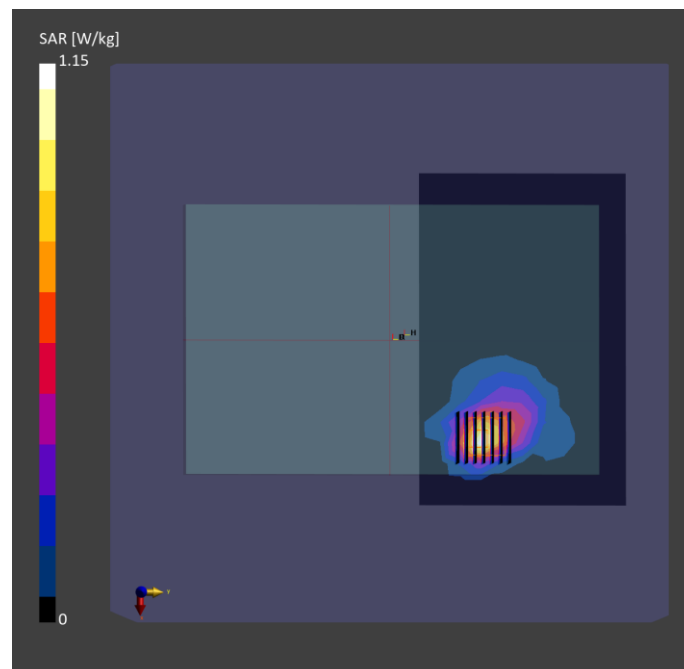

Test Date : 2024-01-05 | Ambient Temp : 22.6 °C | Tissue Temp : 22.3 °C

Test Mode**15_LTE Band 41_QPSK20M_Rear Face_0mm_Ch40185_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 41	LTE-TDD, 10172 - CAH	2549.500, 40185	6.95	1.88	39.3

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.383	0.404
psSAR-10g [W/kg]	0.181	0.181
Power Drift [dB]		0.17
TSL Correction	Positive only	Positive only
M2 / M1 [%]		69.4
Dist 3dB Peak [mm]		9.5

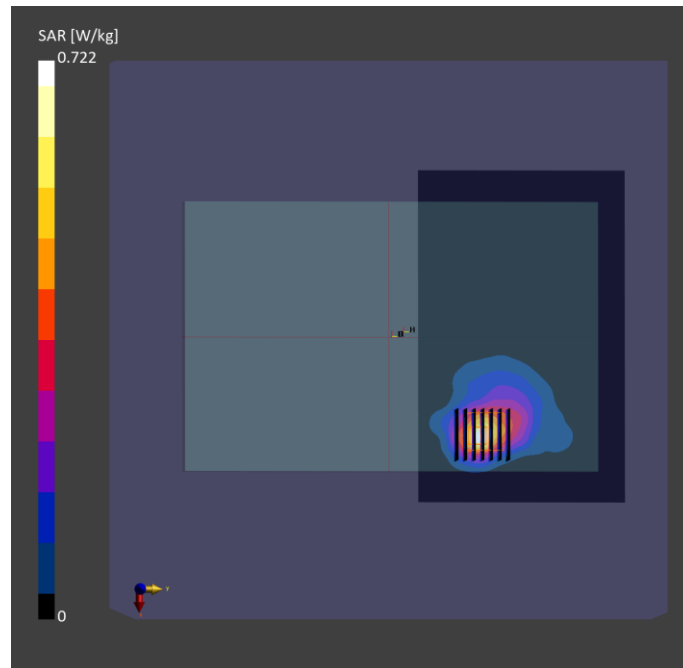

Test Date : 2024-01-05 | Ambient Temp : 22.6 °C | Tissue Temp : 22.3 °C

Test Mode**16_LTE Band 42_QPSK20M_Rear Face_0mm_Ch43490_1RB_Offset0_Ant MIMO 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A004	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 42	LTE-TDD, 10172 - CAH	3590.000, 43490	6.87	2.82	38.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.342	0.439
psSAR-10g [W/kg]	0.145	0.162
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		62.5
Dist 3dB Peak [mm]		6.0

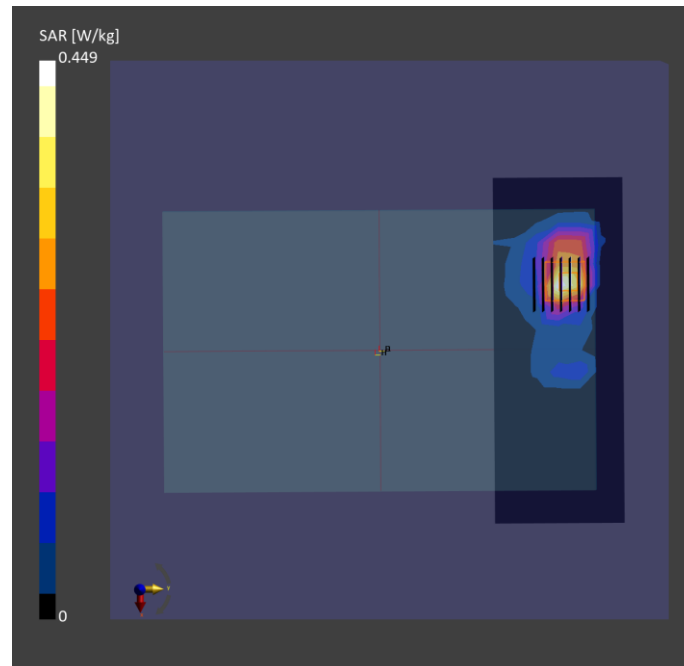

Test Date : 2024-01-08 | Ambient Temp : 22.4 °C | Tissue Temp : 22.1 °C

Test Mode**17_LTE Band 43_QPSK20M_Rear Face_0mm_Ch44340_1RB_Offset0_Ant MIMO 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A004	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 43	LTE-TDD, 10172 - CAH	3675.000, 44340	6.8	2.89	38.6

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.551	0.805
psSAR-10g [W/kg]	0.229	0.263
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		57.8
Dist 3dB Peak [mm]		5.2

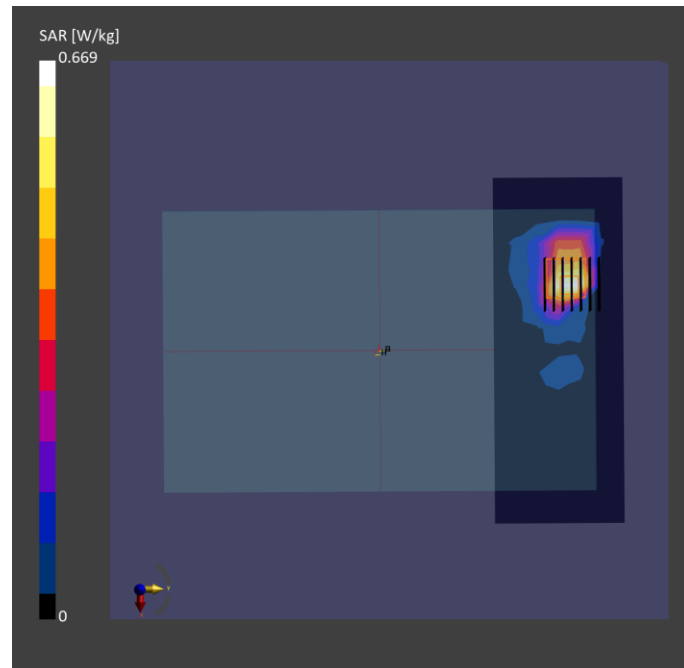

Test Date : 2024-01-08 | Ambient Temp : 22.4 °C | Tissue Temp : 22.1 °C

Test Mode**18_LTE Band 48_QPSK20M_Rear Face_0mm_Ch56207_1RB_Offset0_Ant MIMO 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A004	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 48	LTE-TDD, 10172 - CAH	3646.700, 56207	6.8	2.87	38.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.296	0.420
psSAR-10g [W/kg]	0.122	0.141
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.9
Dist 3dB Peak [mm]		5.1

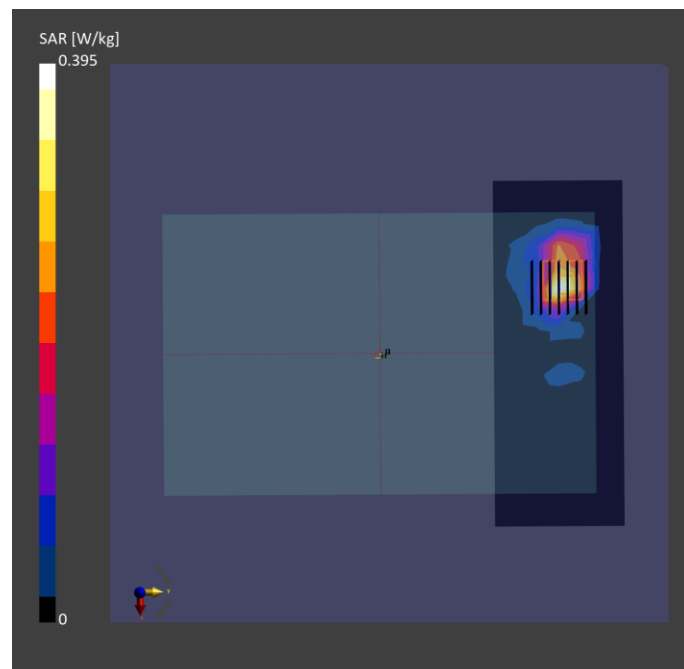

Test Date : 2024-01-02 | Ambient Temp : 22.9 °C | Tissue Temp : 22.4 °C

Test Mode**19_LTE Band 66_QPSK20M_Rear Face_0mm_Ch132322_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 66	LTE-FDD, 10169 - CAF	1745.000, 132322	7.53	1.35	40.9

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.912	0.949
psSAR-10g [W/kg]	0.492	0.407
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		67.3
Dist 3dB Peak [mm]		9.8

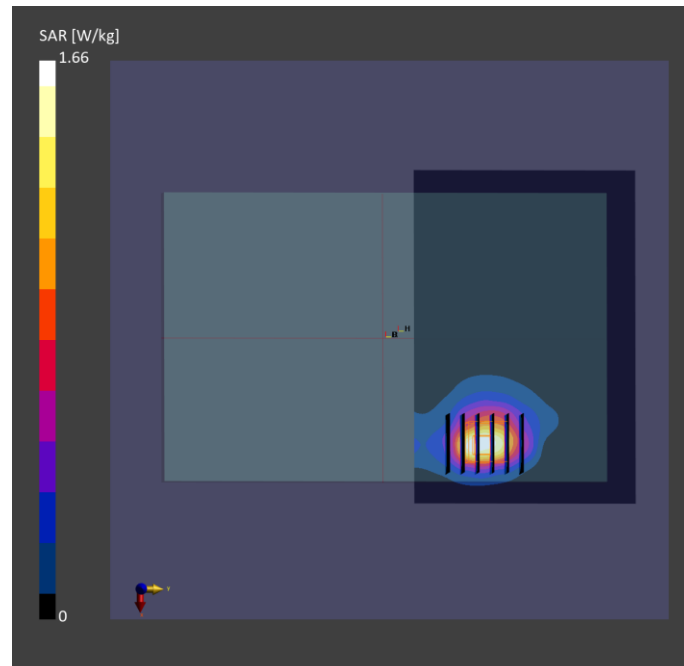

Test Date : 2024-01-04 | Ambient Temp : 22.4 °C | Tissue Temp : 21.9 °C

Test Mode**20_LTE Band 71_QPSK20M_Rear Face_0mm_Ch133322_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 71	LTE-FDD, 10169 - CAF	683.000, 133322	9.1	0.874	42.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.721	0.826
psSAR-10g [W/kg]	0.479	0.461
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		68.0
Dist 3dB Peak [mm]		11.4

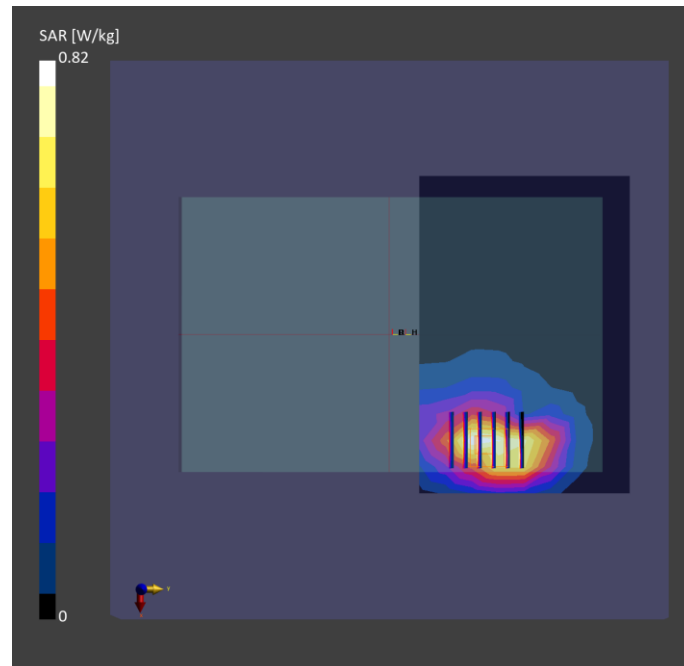

Test Date : 2024-01-09 | Ambient Temp : 22.6 °C | Tissue Temp : 22.4 °C

Test Mode**21_NR Band n2_DFT-s QPSK20M_Rear Face_0mm_Ch372000_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A004	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n2	5G NR FR1 FDD, 10931 - AAC	1860.000, 372000	7.7	1.42	41.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.831	0.937
psSAR-10g [W/kg]	0.432	0.443
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		44.1
Dist 3dB Peak [mm]		8.6

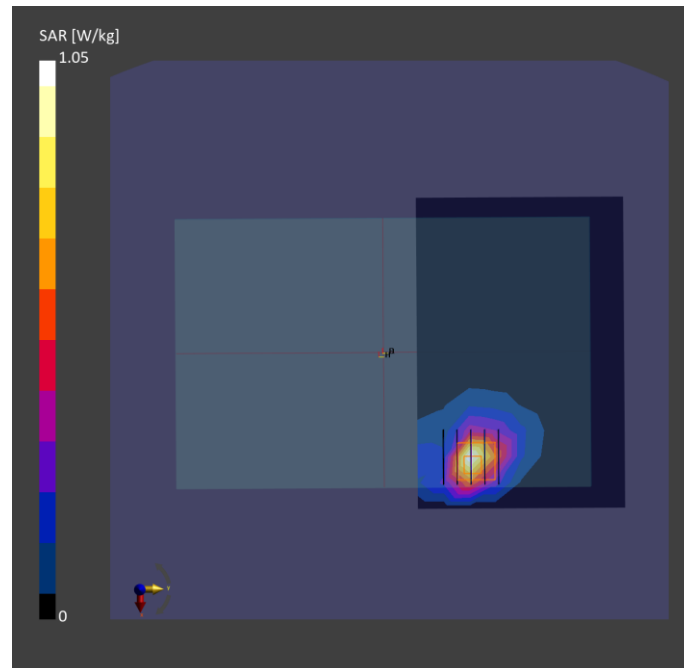

Test Date : 2024-01-03 | Ambient Temp : 22.4 °C | Tissue Temp : 22.0 °C

Test Mode**22_NR Band n5_DFT-s QPSK20M_Rear Face_0mm_Ch167300_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n5	5G NR FR1 FDD, 10931 - AAC	836.500, 167300	8.91	0.939	43.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.691	0.750
psSAR-10g [W/kg]	0.468	0.455
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		68.9
Dist 3dB Peak [mm]		10.2

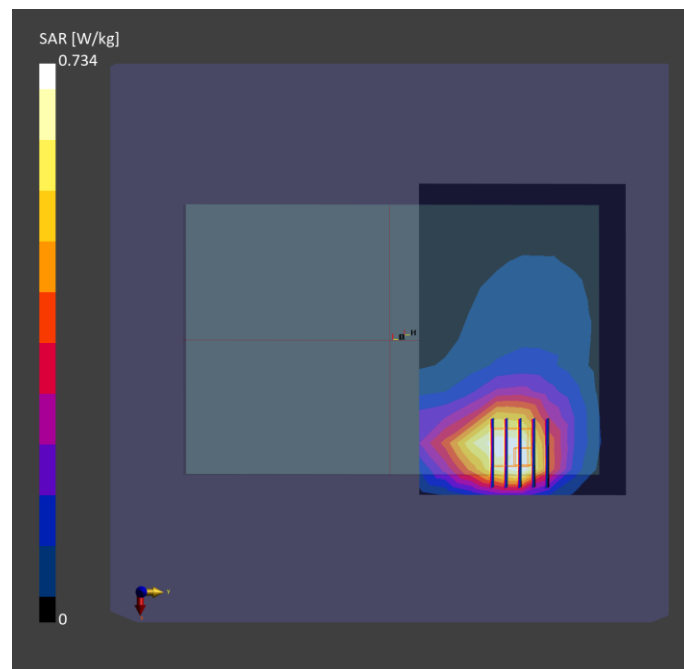

Test Date : 2024-01-05 | Ambient Temp : 22.6 °C | Tissue Temp : 22.3 °C

Test Mode**23_NR Band n7_DFT-s QPSK20M_Rear Face_0mm_Ch507000_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n7	5G NR FR1 FDD, 10931 - AAC	2535.000, 507000	6.95	1.86	39.3

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.954	0.911
psSAR-10g [W/kg]	0.445	0.408
Power Drift [dB]		-0.08
TSL Correction	Positive only	Positive only
M2 / M1 [%]		69.5
Dist 3dB Peak [mm]		9.5

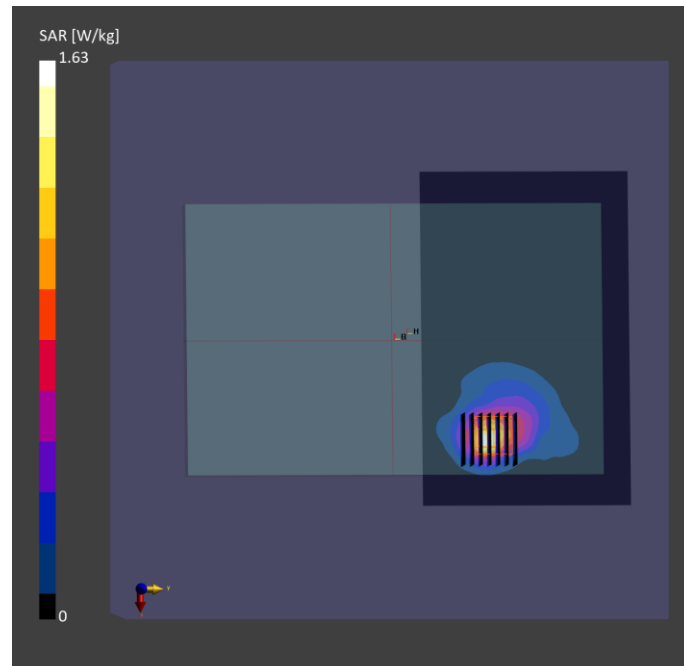

Test Date : 2024-01-09 | Ambient Temp : 22.6 °C | Tissue Temp : 22.4 °C

Test Mode**24_NR Band n25_DFT-s QPSK20M_Rear Face_0mm_Ch376500_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A004	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n25	5G NR FR1 FDD, 10931 - AAC	1882.500, 376500	7.7	1.44	41.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.897	0.941
psSAR-10g [W/kg]	0.441	0.444
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		47.7
Dist 3dB Peak [mm]		8.7

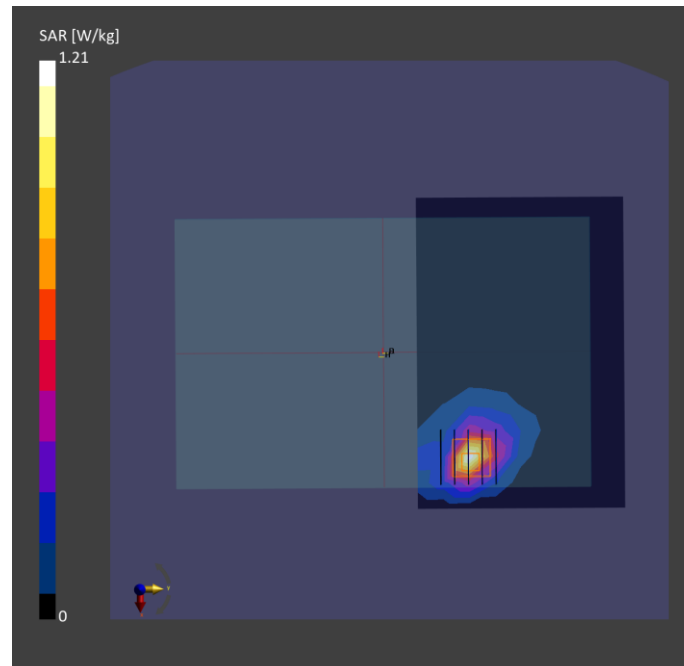

Test Date : 2024-01-09 | Ambient Temp : 22.6 °C | Tissue Temp : 22.4 °C

Test Mode**25_NR Band n30_DFT-s QPSK10M_Rear Face_0mm_Ch462000_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A004	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n30	5G NR FR1 FDD, 10929 - AAD	2310.000, 462000	7.32	1.71	40.9

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.750	0.772
psSAR-10g [W/kg]	0.346	0.355
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		45.1
Dist 3dB Peak [mm]		8.7

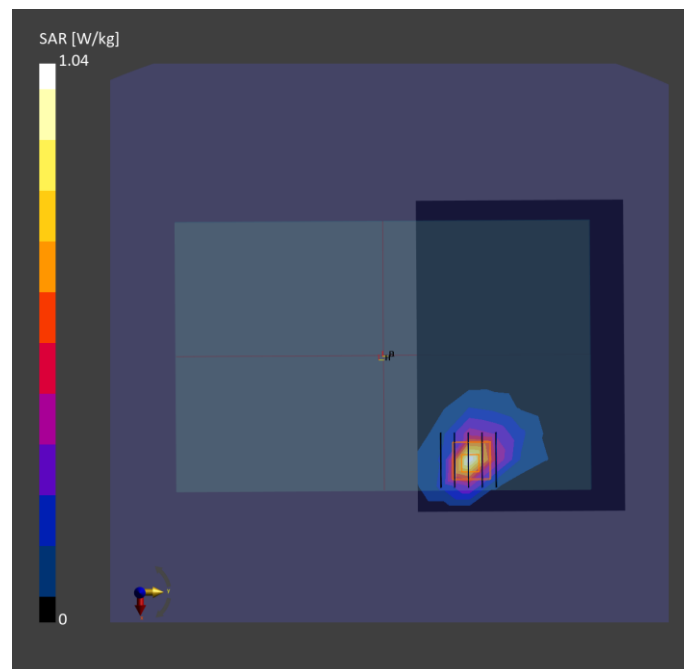

Test Date : 2024-01-06 | Ambient Temp : 22.7 °C | Tissue Temp : 22.4 °C

Test Mode**26_NR Band n38_DFT-s QPSK20M_Rear Face_0mm_Ch519000_1RB_Offset1_Ant Aux****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A004	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n38	5G NR FR1 TDD, 10900 - AAC	2595.000, 519000	7.17	1.95	40.9

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.226	0.254
psSAR-10g [W/kg]	0.113	0.119
Power Drift [dB]		0.04
TSL Correction	Positive only	Positive only
M2 / M1 [%]		48.2
Dist 3dB Peak [mm]		9.3

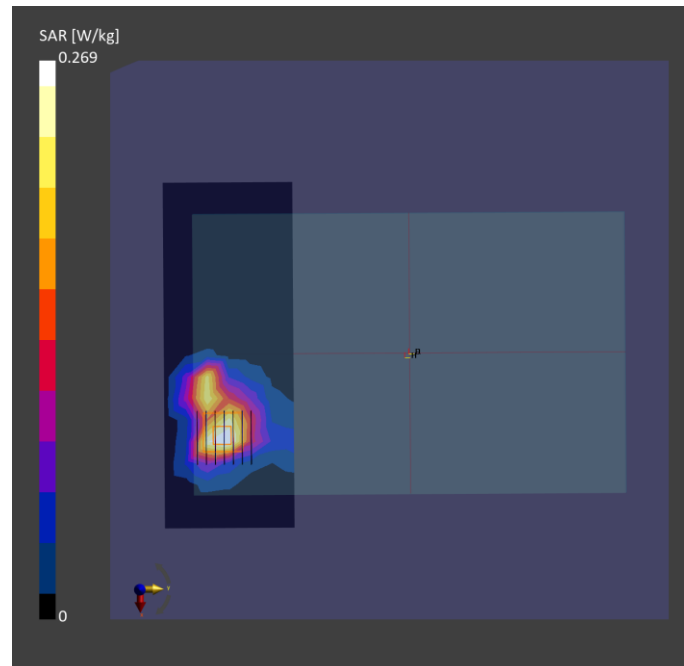

Test Date : 2024-01-09 | Ambient Temp : 22.6 °C | Tissue Temp : 22.4 °C

Test Mode**27_NR Band n41_DFT-s QPSK100M_Rear Face_0mm_Ch518598_1RB_Offset1_Ant Aux****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A004	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n41	5G NR FR1 TDD, 10866 - AAF	2592.990, 518598	7.17	1.95	40.9

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.492	0.537
psSAR-10g [W/kg]	0.236	0.227
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		41.3
Dist 3dB Peak [mm]		6.8

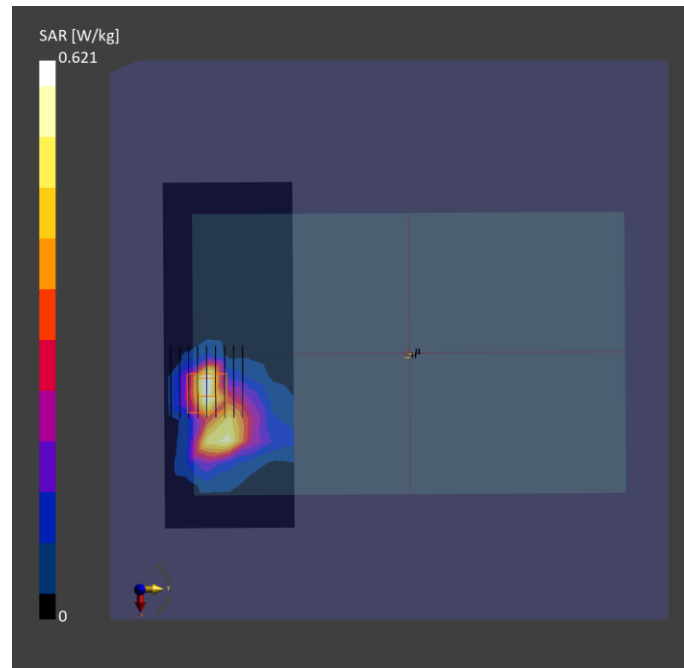

Test Date : 2024-01-08 | Ambient Temp : 22.4 °C | Tissue Temp : 22.1 °C

Test Mode**28_NR Band n48_DFT-s QPSK40M_Rear Face_0mm_Ch642888_1RB_Offset1_Ant MIMO 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n48	5G NR FR1 TDD, 10903 - AAD	3643.320, 642888	6.87	2.86	38.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.676	0.937
psSAR-10g [W/kg]	0.285	0.319
Power Drift [dB]		-0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.0
Dist 3dB Peak [mm]		6.8

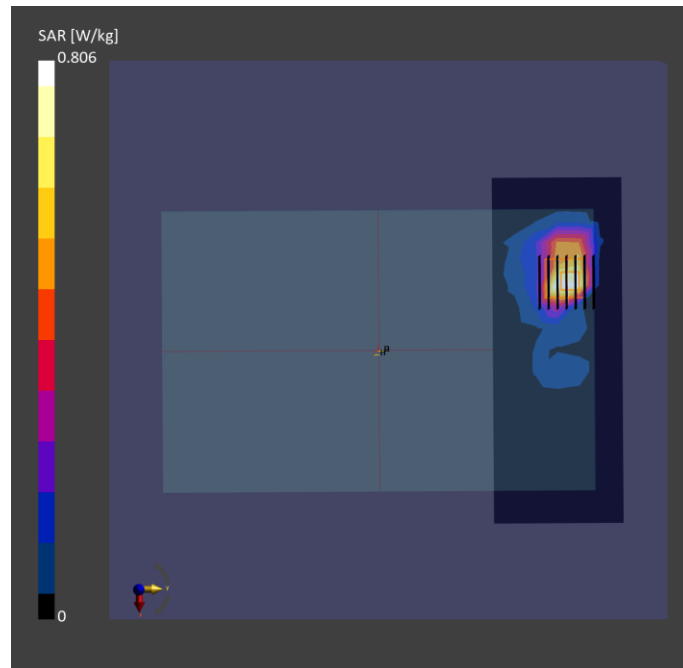

Test Date : 2024-01-09 | Ambient Temp : 22.6 °C | Tissue Temp : 22.4 °C

Test Mode**29_NR Band n66_DFT-s QPSK20M_Rear Face_0mm_Ch344000_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n66	5G NR FR1 FDD, 10931 - AAC	1720.000, 344000	8.03	1.34	41.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.926	0.950
psSAR-10g [W/kg]	0.385	0.415
Power Drift [dB]		-0.13
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.4
Dist 3dB Peak [mm]		9.4

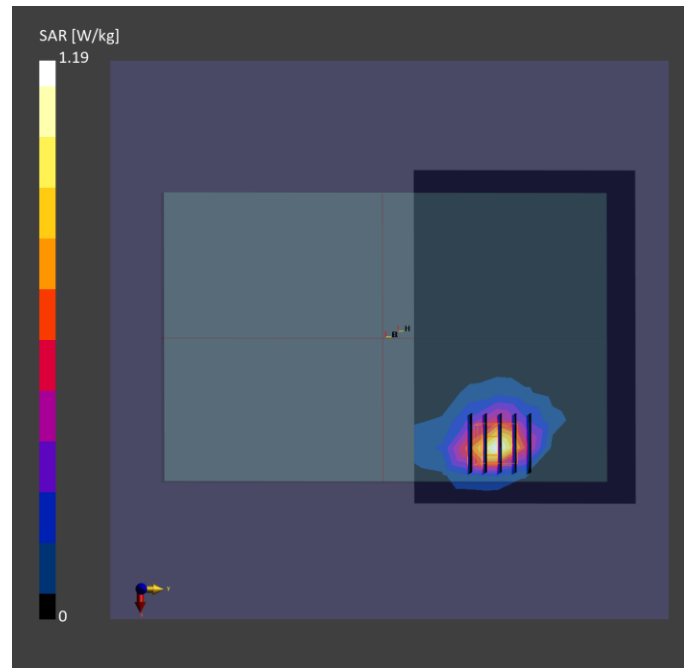

Test Date : 2024-01-04 | Ambient Temp : 22.4 °C | Tissue Temp : 21.9 °C

Test Mode**30_NR Band 71_DFT-s QPSK20M_Rear Face_0mm_50RB_Offset28_Ch136100_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n71	5G NR FR1 FDD, 10931 - AAC	680.500, 136100	9.1	0.868	43.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.624	0.743
psSAR-10g [W/kg]	0.413	0.436
Power Drift [dB]		0
TSL Correction	Positive only	Positive only
M2 / M1 [%]		54.4
Dist 3dB Peak [mm]		11.6

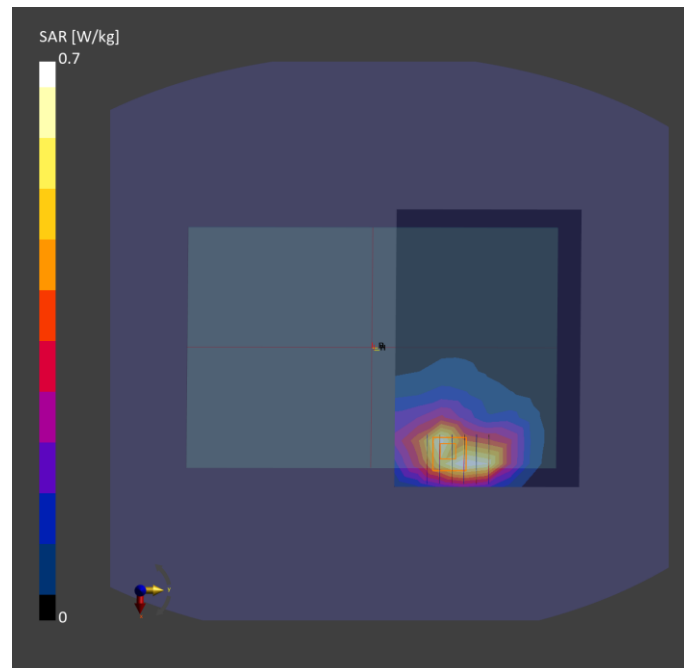

Test Date : 2024-01-10 | Ambient Temp : 22.6 °C | Tissue Temp : 22.2 °C

Test Mode**31_NR Band n77_DFT-s QPSK100M_Rear Face_0mm_Ch650000_1RB_Offset1_Ant MIMO 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A004	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n77	5G NR FR1 TDD, 10866 - AAF	3750.000, 650000	6.68	3.00	39.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.921	0.936
psSAR-10g [W/kg]	0.298	0.307
Power Drift [dB]		0.08
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.6
Dist 3dB Peak [mm]		5.1

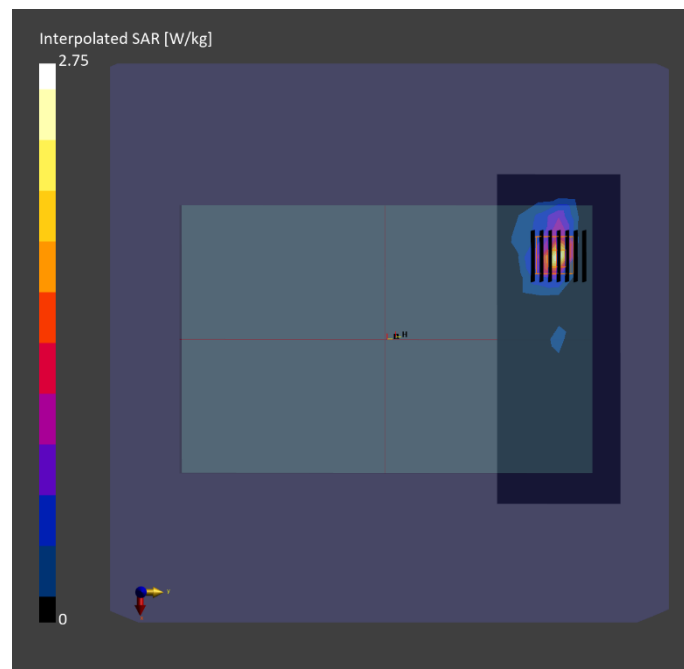

Test Date : 2024-01-10 | Ambient Temp : 22.6 °C | Tissue Temp : 22.2 °C

Test Mode**33_NR Band n78_DFT-s QPSK100M_Rear Face_0mm_Ch650000_1RB_Offset1_Ant MIMO 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n78	5G NR FR1 TDD, 10866 - AAF	3750.000, 650000	6.68	3.00	39.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.942	0.949
psSAR-10g [W/kg]	0.299	0.304
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.2
Dist 3dB Peak [mm]		5.5

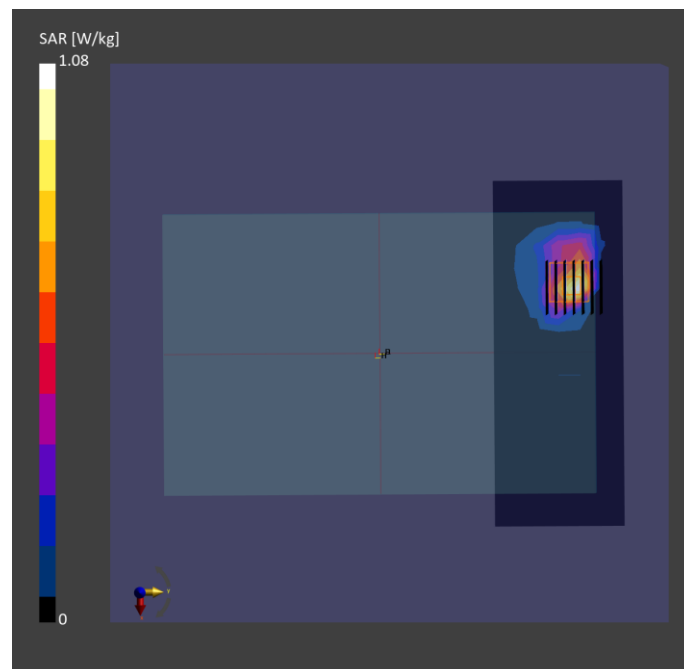

Test Date : 2023-12-29 | Ambient Temp : 22.2 °C | Tissue Temp : 21.9 °C

Test Mode**41_WLAN2.4G_802.11n HT40_Rear Face_0mm_Ch3_Ant 1+2****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 2.4GHz	WLAN, 10599 - AAC	2422.000, 3	7.05	1.79	40.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.804	0.856
psSAR-10g [W/kg]	0.299	0.315
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		63.6
Dist 3dB Peak [mm]		6.0

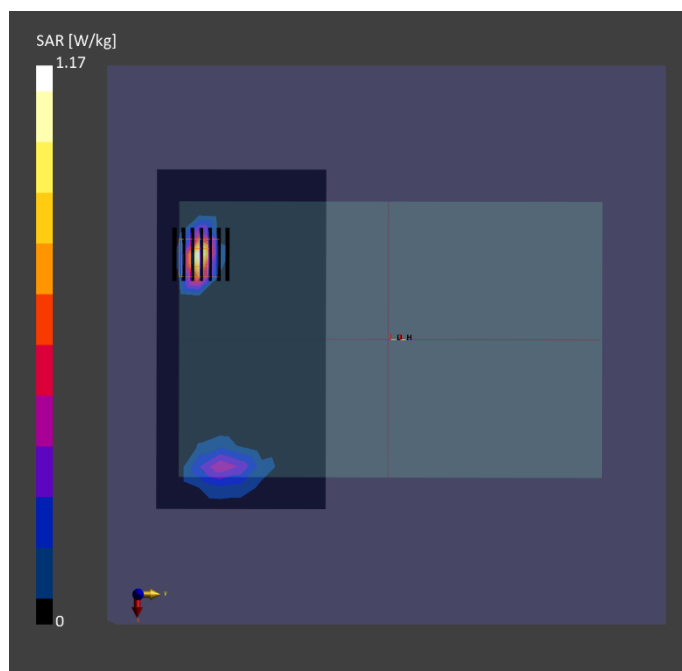

Test Date : 2023-12-30 | Ambient Temp : 22.5 °C | Tissue Temp : 22.1 °C

Test Mode

42_WLAN5.3G_802.11ac VHT160_Rear Face_0mm_Ch50_Ant 2

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10554 - AAD	5250.000, 50	5.02	4.60	35.8

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.876	0.959
psSAR-10g [W/kg]	0.231	0.236
Power Drift [dB]		-0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		62.4
Dist 3dB Peak [mm]		4.4

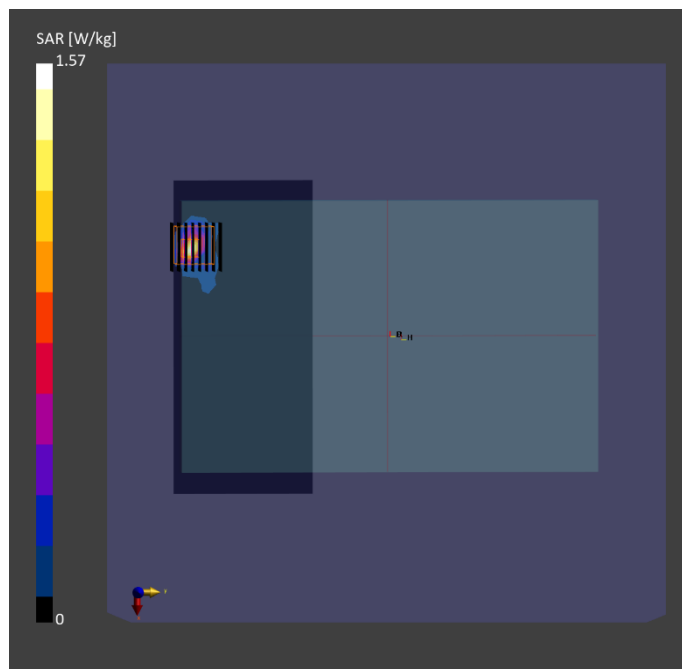

Test Date : 2023-12-30 | Ambient Temp : 22.5 °C | Tissue Temp : 22.1 °C

Test Mode**43_WLAN5.6G_802.11ac VHT160_Rear Face_0mm_Ch114_Ant 1+2**Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10554 - AAD	5570.000, 114	4.29	4.95	35.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.939	1.06
psSAR-10g [W/kg]	0.268	0.297
Power Drift [dB]		-0.14
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.5
Dist 3dB Peak [mm]		4.6

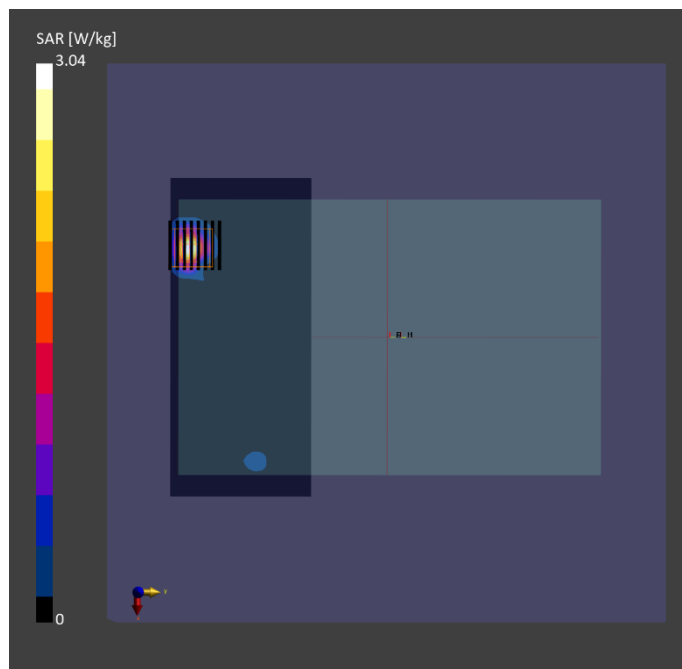

Test Date : 2023-12-30 | Ambient Temp : 22.5 °C | Tissue Temp : 22.1 °C

Test Mode**45_WLAN5.8G_802.11ac VHT160_Rear Face_0mm_Ch155_Ant 2****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10544 - AAC	5775.000, 155	4.36	5.19	34.9

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.949	0.942
psSAR-10g [W/kg]	0.297	0.306
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		56.8
Dist 3dB Peak [mm]		5.4

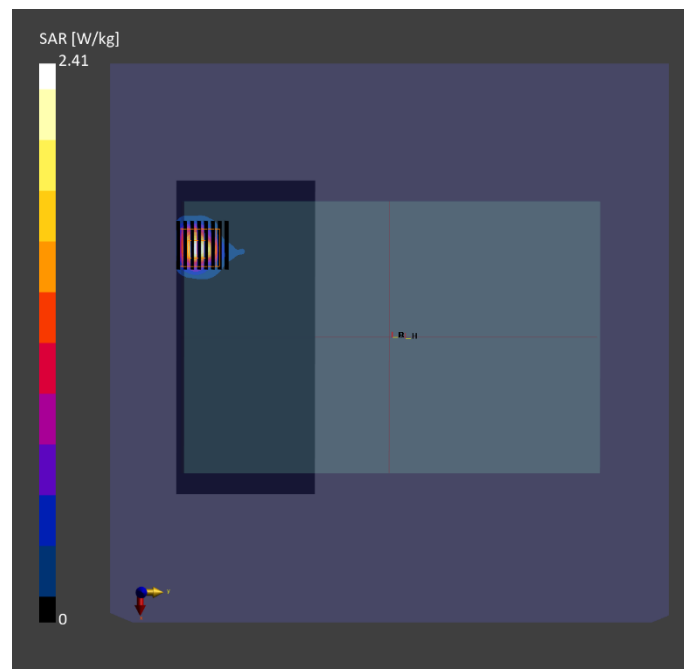

Test Date : 2023-12-29 | Ambient Temp : 22.2 °C | Tissue Temp : 21.9 °C

Test Mode**46_Bluetooth_8-DPSK_Rear Face_0mm_Ch39_Ant 2**Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	ISM 2.4 GHz Band	Bluetooth, 10032 - CAA	2441.000, 39	7.05	1.80	40.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.229	0.238
psSAR-10g [W/kg]	0.085	0.086
Power Drift [dB]		-0.13
TSL Correction	Positive only	Positive only
M2 / M1 [%]		63.5
Dist 3dB Peak [mm]		6.0

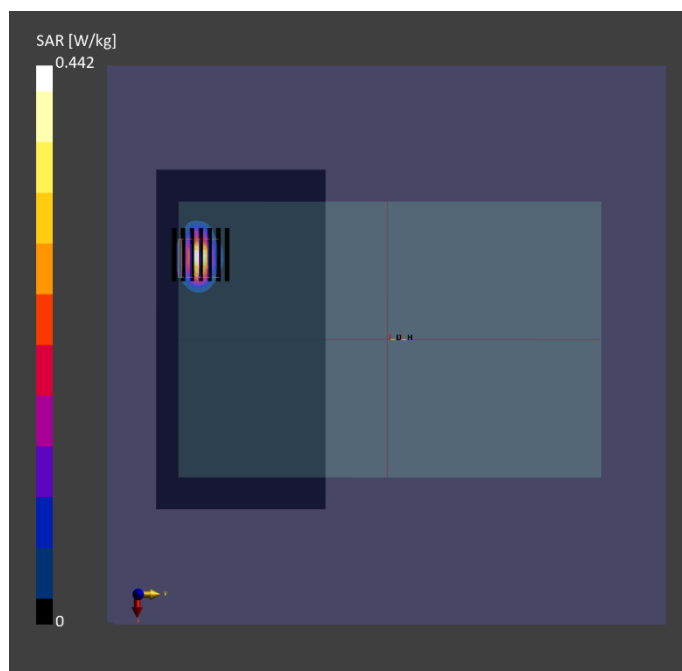

Test Date : 2023-12-29 | Ambient Temp : 22.2 °C | Tissue Temp : 21.9 °C

Test Mode**47_UNII-5_802.11ax HE160_Rear Face_0mm_Ch15_Ant 2****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	U-NII-5	WLAN, 10755 - AAC	6025.000, 15	4.47	5.44	34.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2141	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2023-05-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	187.0 x 85.0	23.8 x 23.8 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.879	0.944
psSAR-10g [W/kg]	0.275	0.318
psAPD (1.0 cm ² , sq) [W/m ²]		8.44
psAPD (4.0 cm ² , sq) [W/m ²]		5.17
Power Drift [dB]		0.08
TSL Correction	Positive only	Positive only
M2 / M1 [%]		53.6
Dist 3dB Peak [mm]		4.6

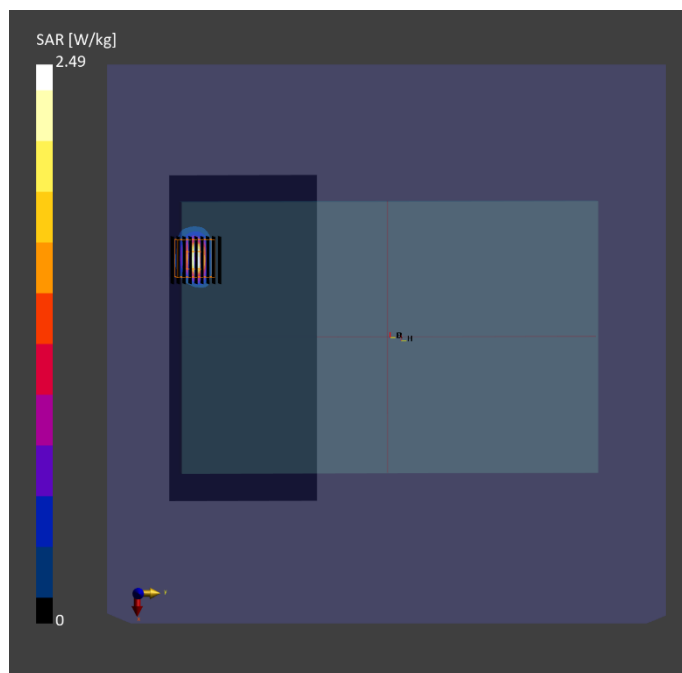

Test Date : 2024-01-11 | Ambient Temp : 22.6 °C

Test Mode**47_UNII-5_802.11ax HE160_Rear Face_0mm_Ch15_Ant 2****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A004	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	U-NII-5	WLAN, 10755 - AAC	6025.0, 15	1.0

Hardware Setup

Phantom	Medium	Probe Calibration Date	DAE Calibration Date
mmWave - 1102	Air	EUmmWV4 - SN9639_F1-55GHz / 2023-08-18	DAE4 Sn1743 / 2023-08-17

Scan Setup

	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [mm]	0.0502 x 0.0502
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Avg. Area [cm ²]	4.00
psPD n+ [W/m ²]	2.59
psPD tot+ [W/m ²]	2.68
psPD mod+ [W/m ²]	3.03
E max [V/m]	47.1
Power Drift [dB]	-0.10

