



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




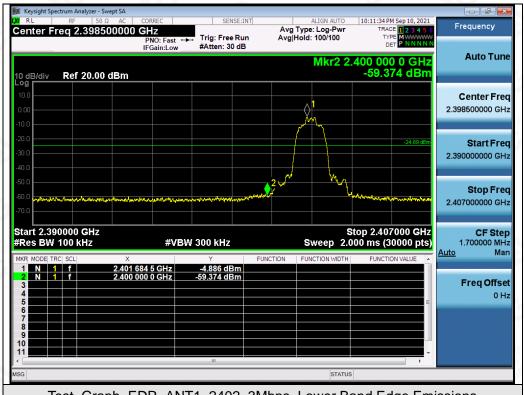


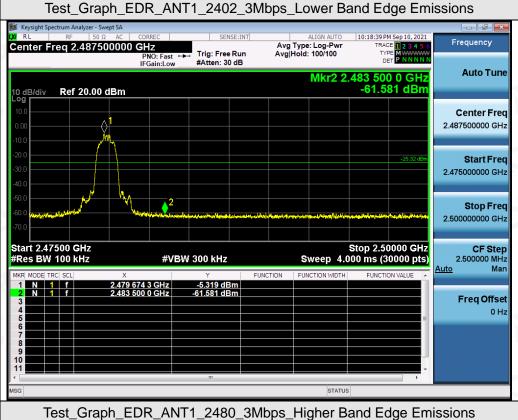

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




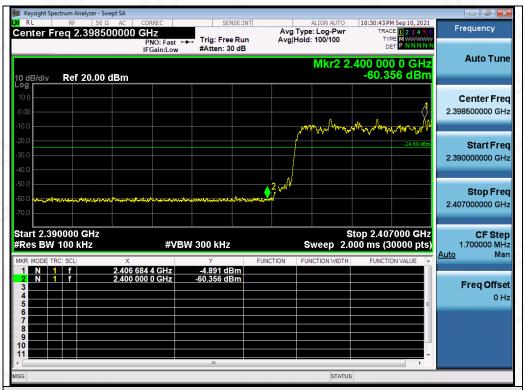

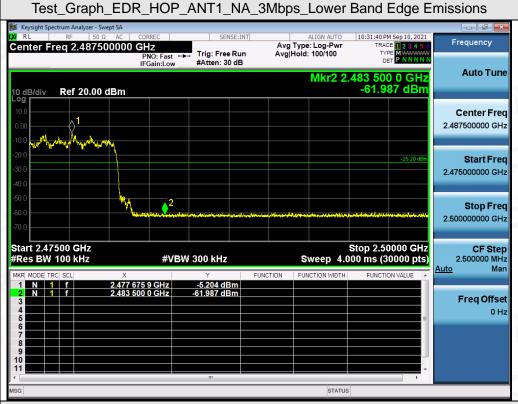

Test\_Graph\_EDR\_HOP\_ANT1\_NA\_3Mbps\_Higher Band Edge Emissions

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





### 10. RADIATED EMISSION

#### 10.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestud/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC09665210803FE03

Page 47 of 77

# The following table is the setting of spectrum analyzer and receiver.

	Spectrum Parameter	Setting
	Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
8	Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
100	Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
0	Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




## 10.2. TEST SETUP


## Radiated Emission Test-Setup Frequency Below 30MHz

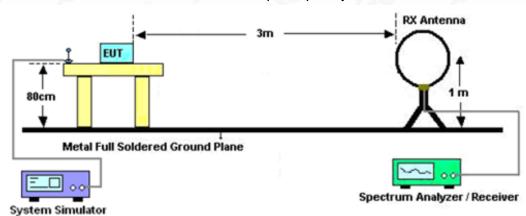

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

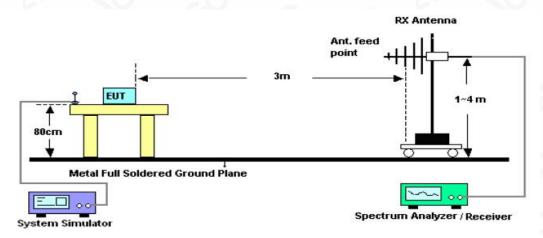

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

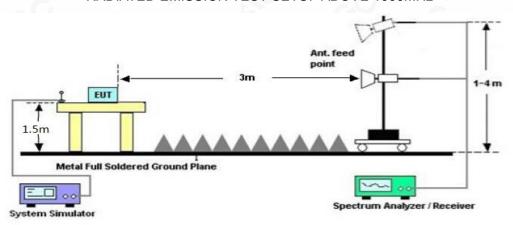

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC09665210803FE03

Page 49 of 77

#### 10.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 10.4. TEST RESULT

#### Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## Radiated emission from 30MHz to 1000MHz

EUT	LinearFlux Headphones-Charging Box	Model Name	HyperSonic
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

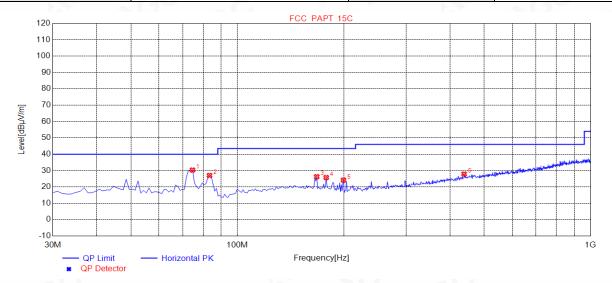

NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Delegitu
NO.	[MHz]	[dBuV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity
1	74.6200	30.31	8.27	40.00	9.69	100	359	Horizontal
2	83.3500	27.06	7.18	40.00	12.94	100	185	Horizontal
3	167.7400	26.29	14.17	43.50	17.21	100	346	Horizontal
4	178.4100	25.77	13.15	43.50	17.73	100	359	Horizontal
5	199.7500	24.17	12.07	43.50	19.33	100	359	Horizontal
6	438.3700	27.88	20.71	46.00	18.12	100	357	Horizontal

**RESULT: PASS** 


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Psychological Psycholo

/Inspection The test results

he test report.



EUT	LinearFlux Headphones-Charging Box	Model Name	HyperSonic
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

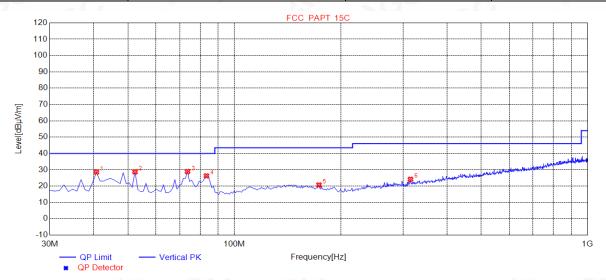


NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Polarity
NO.	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dB]	[cm]	[°]	Polatity
1	40.6700	28.55	11.91	40.00	11.45	100	72	Vertical
2	52.3100	28.76	11.49	40.00	11.24	100	67	Vertical
3	73.6500	28.93	8.47	40.00	11.07	100	244	Vertical
4	83.3500	26.30	7.18	40.00	13.70	100	244	Vertical
5	173.5600	20.73	13.61	43.50	22.77	100	38	Vertical
6	315.1800	24.20	16.48	46.00	21.80	100	233	Vertical

## **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

2. All test modes had been pre-tested. The mode 4 is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated restamp? is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter permitted without the writter permitted in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



c/Inspection
The test results
the test report.



Radiated emission above 1GHz


EUT	LinearFlux Headphones-Charging Box	Model Name	HyperSonic
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4804.000	47.62	0.08	47.7	74	-26.3	peak
4804.000	37.52	0.08	37.6	54	-16.4	AVG
7206.000	44.16	2.21	46.37	74	-27.63	peak
7206.000	34.72	2.21	36.93	54	-17.07	AVG
		(8)				(8)
			©			
emark:			0			0
actor = Anter	nna Factor + Cabl	e Loss – Pre-	-amplifier.	8		

EUT	LinearFlux Headphones-Charging Box	Model Name	HyperSonic
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	48.62	0.08	48.7	74	-25.3	peak
4804.000	36.12	0.08	36.2	54	-17.8	AVG
7206.000	44.69	2.21	46.9	74	-27.1	peak
7206.000	33.72	2.21	35.93	54	-18.07	AVG
8	8		G <sup>U</sup>	C		
mark:		(R)				

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesture Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





Frequency

EUT	LinearFlux Headphones-Charging Box	Model Name	HyperSonic
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4882.000	49.75	0.14	49.89	74	-24.11	peak
4882.000	37.51	0.14	37.65	54	-16.35	AVG 。
7323.000	45.32	2.36	47.68	74	-26.32	peak
7323.000	33.41	2.36	35.77	54	-18.23	AVG
om orle			104	-60	8	
emark:						

EUT	LinearFlux Headphones-Charging Box	Model Name	HyperSonic
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna	Vertical

(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	50.34	0.14	50.48	74	-23.52	peak
4882.000	38.16	0.14	38.3	54	-15.7	AVG
7323.000	45.82	2.36	48.18	74	-25.82	peak
7323.000	35.09	2.36	37.45	54	-16.55	AVG
			60		0	
temark:						8
actor = Antenr	na Factor + Cabl	e Loss – Pre-a	mplifier.			8

**Emission Level** 


Limits

Margin

Factor

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Meter Reading





EUT	LinearFlux Headphones-Charging Box	Model Name	HyperSonic
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	48.76	0.22	48.98	74	-25.02	peak
4960.000	38.12	0.22	38.34	54	-15.66	AVG 🏻
7440.000	44.62	2.64	47.26	74	-26.74	peak
7440.000	35.14	2.64	37.78	54	-16.22	AVG
z.O				20	9	
emark:			(8)			
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			

EUT	LinearFlux Headphones-Charging Box	Model Name	HyperSonic
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Vertical

(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
49.85	0.22	50.07	74	-23.93	peak
38.61	0.22	38.83	54	-15.17	AVG
46.27	2.64	48.91	74	-25.09	peak
34.95	2.64	37.59	54	-16.41	AVG
		160		8	
	49.85 38.61 46.27	49.85     0.22       38.61     0.22       46.27     2.64	49.85     0.22     50.07       38.61     0.22     38.83       46.27     2.64     48.91	49.85     0.22     50.07     74       38.61     0.22     38.83     54       46.27     2.64     48.91     74	49.85     0.22     50.07     74     -23.93       38.61     0.22     38.83     54     -15.17       46.27     2.64     48.91     74     -25.09

## **RESULT: PASS**

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The  $\pi$  /4-DQPSKSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter portionization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued by the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

g/Inspection The test results


the test report.




## Test result for band edge emission at restricted bands

EUT	LinearFlux Headphones-Charging Box	Model Name	HyperSonic
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

# Test Graph for Peak Measurement

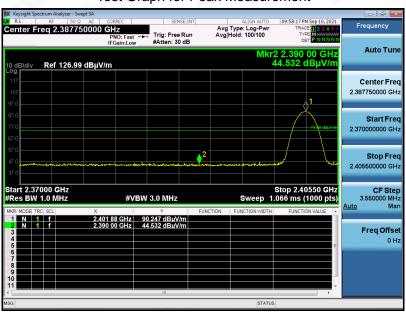

#### Test Graph for Average Measurement

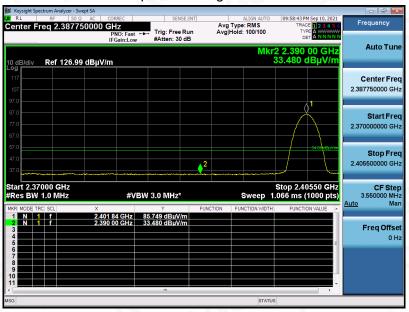


**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated feet Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	LinearFlux Headphones-Charging Box	Model Name	HyperSonic
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

### Test Graph for Peak Measurement

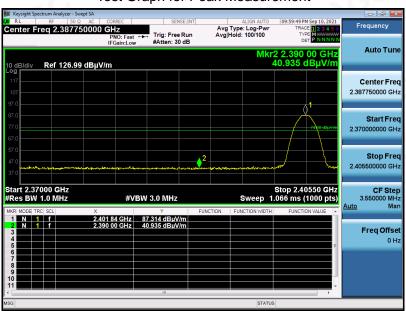

## Test Graph for Average Measurement



**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




EUT	LinearFlux Headphones-Charging Box	Model Name	HyperSonic
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Horizontal

#### Test Graph for Peak Measurement



## Test Graph for Average Measurement

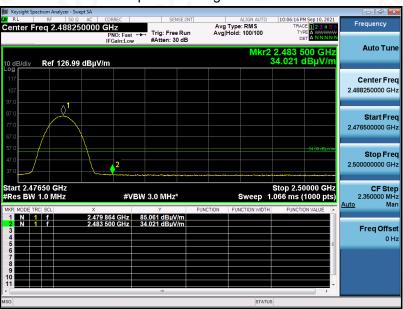


**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter perhorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




EUT	LinearFlux Headphones-Charging Box	Model Name	HyperSonic
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Vertical

Test Graph for Peak Measurement

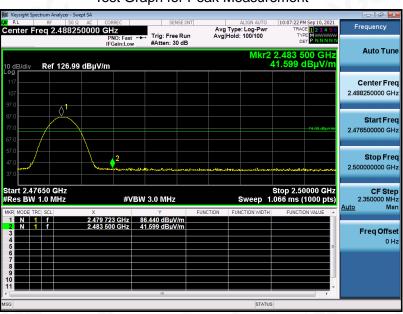

Test Graph for Average Measurement

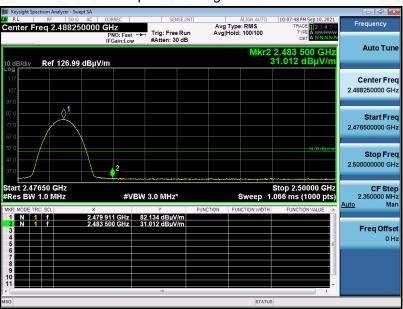

#### **RESULT: PASS**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer. The  $\pi$  /4-DQPSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient responsible to the stamp? Is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# 11. NUMBER OF HOPPING FREQUENCY

#### 11.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3. VBW RBW. Sweep: Auto. Detector function: Peak. Trace: Max hold.
- 4. Allow the trace to stabilize.

## 11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2


#### 11.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

#### 11.4. LIMITS AND MEASUREMENT RESULT

Test Data of Number of Hopping Frequency					
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail		
GFSK Hopping	79	>=15	Pass		

## **Test Graphs of Number of Hopping Frequency**

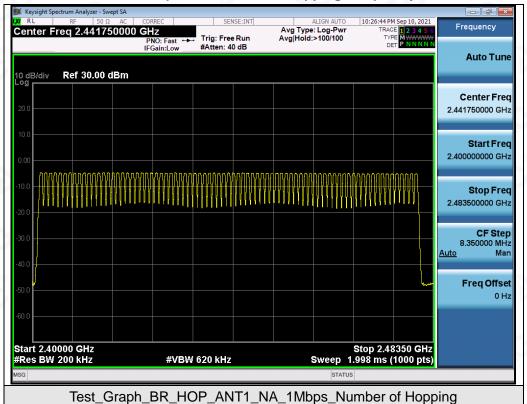

Note: The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Period/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC09665210803FE03 Page 60 of 77

12. TIME OF OCCUPANCY (DWELL TIME)

### 12.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Zero span, centered on a hopping channel.
- 2. RBW shall be ≤ channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- 4. Detector function: Peak. Trace: Max hold.
- 5. Use the marker-delta function to determine the transmit time per hop.
- 6. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer)  $\times$  (period specified in the requirements / analyzer sweep time).

7. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

## 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

#### 12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

## 12.4. LIMITS AND MEASUREMENT RESULT


Test Data of Dwell Time								
Channel	Time of Pulse for DH5 (ms)	Number of hops in the period specified in the requirements	Sweep Time (ms)	Limit (ms)	Pass or Fail			
2402	2.866	26.0*4	298.064	400	Pass			
2441	2.866	26.0*4	298.064	400	Pass			
2480	2.866	27.0*4	309.528	400	Pass			


Note: The  $\pi$  /4-DQPSK modulation is the worst case and recorded in the report.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Post of Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **Test Graphs of Dwell Time**

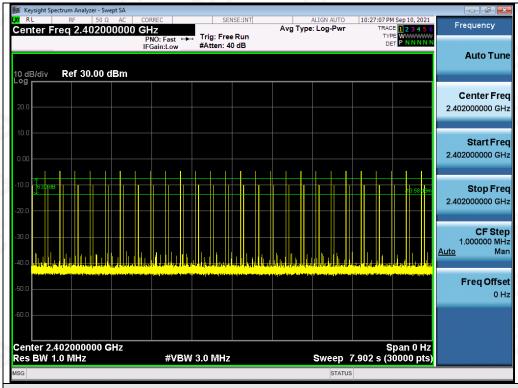




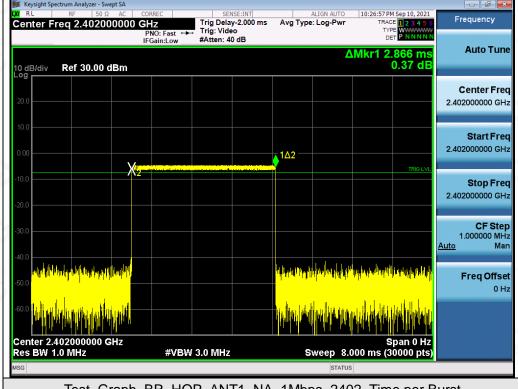


Test\_Graph\_BR\_HOP\_ANT1\_NA\_1Mbps\_2402\_Time per Burst

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




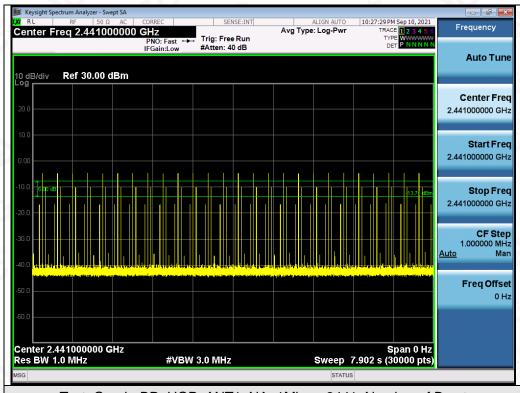


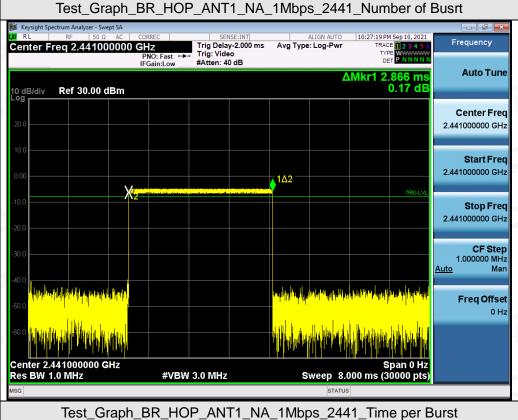

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Posting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



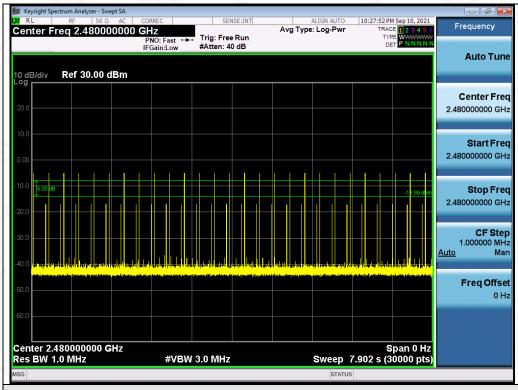

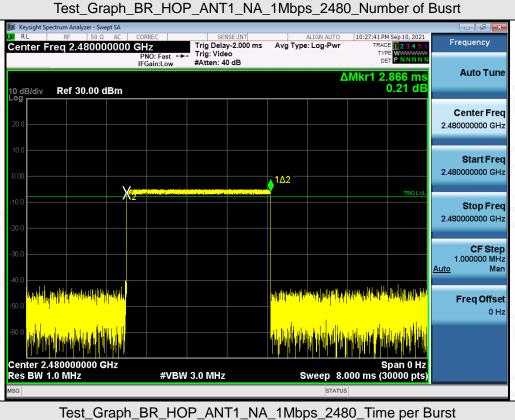

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exchorization of AGC The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## 13. FREQUENCY SEPARATION

#### 13.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW) ≥ RBW.
- 4. Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

## 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2


#### 13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

#### 13.4. LIMITS AND MEASUREMENT RESULT

Test Data of Frequency Separation							
Test Mode	Channel Separation (MHz)	Limits	Pass or Fail				
GFSK Hopping	1.001	>= 2/3 -20dB BW	Pass				

## **Test Graphs of Number of Hopping Frequency**

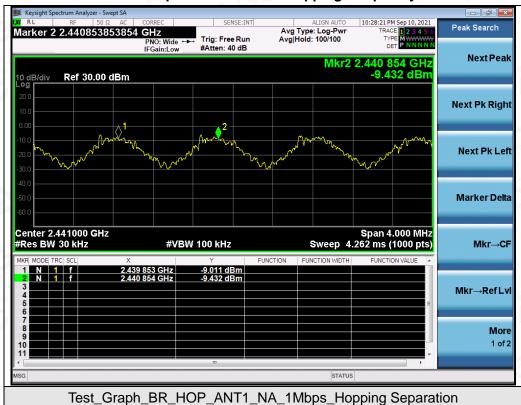

100CCIQPILES (101 \_ 111 \_ 111 \_ 111 \_ 110 \_ 110 PPING COPAR

Note: The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestud/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



## 14. LINE CONDUCTED EMISSION TEST


## 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage				
Frequency	Q.P. (dBμV)	Average (dBμV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			


Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

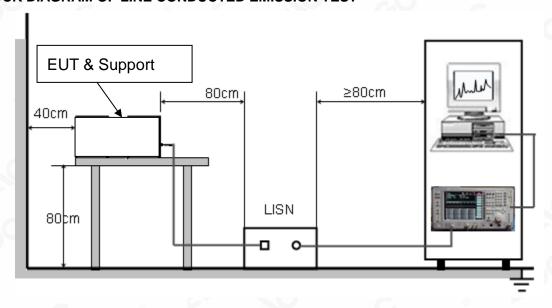

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient report is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter permitted without the writter permitted without the writter permitted in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





#### 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from PC adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

#### Line Conducted Emission Test Line 1-L

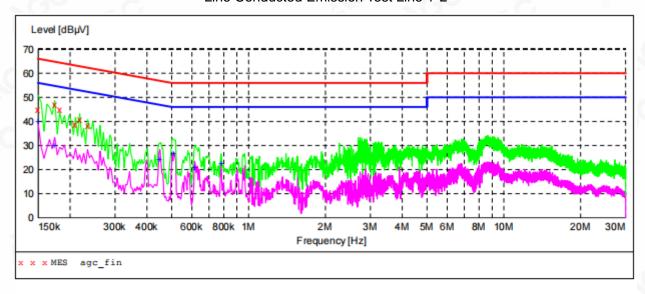

## MEASUREMENT RESULT: "agc fin"

1/8/18 Frequenc	4		Limit dBµV	Margin dB	Detector	Line	PE
0.15000 0.17400 0.18200 0.21000 0.21800	0 46.90 0 45.10 0 38.70	6.7 6.7 6.5	66 65 64 63	20.9 17.9 19.3 24.5 22.0	QP QP QP QP QP	L1 L1 L1 L1	GND GND GND GND GND
0.23400	0 38.20	6.3	62	24.1	QP	L1	GND

## MEASUREMENT RESULT: "agc fin2"


2021/8/18 0:19 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	39.90	6.9	56	16.1	AV	L1	GND
0.174000	30.00	6.7	55	24.8	AV	L1	GND
0.450000	23.90	5.5	47	23.0	AV	L1	GND
0.510000	26.40	5.4	46	19.6	AV	L1	GND
0.614000	20.80	5.4	46	25.2	AV	L1	GND
0.782000	22.30	5.4	46	23.7	AV	L1	GND

**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## Line Conducted Emission Test Line 2-N

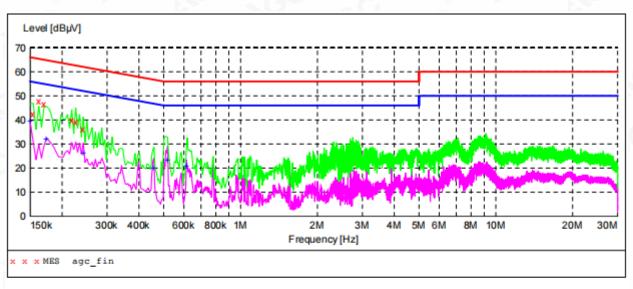

## MEASUREMENT RESULT: "agc\_fin"

2021/8/18 0:17 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.154000	42.30	6.9	66	23.5	QP	N	GND
0.162000	47.70	6.8	65	17.7	QP	N	GND
0.170000	46.50	6.8	65	18.5	QP	N	GND
0.218000	39.70	6.4	63	23.2	QP	N	GND
0.226000	39.10	6.4	63	23.5	QP	N	GND
0.242000	36.20	6.3	62	25.8	QP	N	GND

## MEASUREMENT RESULT: "agc fin2"

2021/8/18 0:17 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	39.30	6.9	56	16.7	AV	N	GND
0.174000	32.00	6.7	55	22.8	AV	N	GND
0.242000	26.10	6.3	52	25.9	AV	N	GND
0.458000	19.80	5.5	47	26.9	AV	N	GND
0.518000	23.50	5.4	46	22.5	AV	N	GND
0.614000	20.90	5.4	46	25.1	AV	N	GND

**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

RADIATED EMISSION TEST SETUP BELOW 1GHz



RADIATED EMISSION TEST SETUP ABOVE 1GHz




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## CONDUCTED EMISSION TEST SETUP



CONDUCTED TEST SETUP

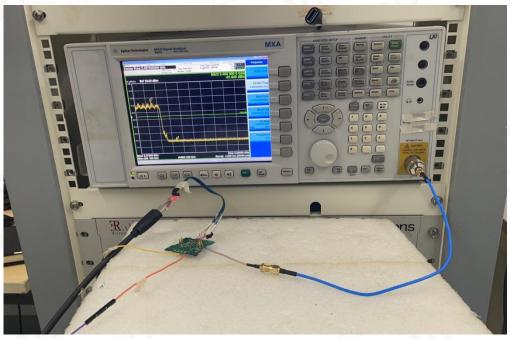

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **APPENDIX B: PHOTOGRAPHS OF EUT**

WHOLE VIEW OF EUT



TOP VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesthov/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15days after the sesures of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **BOTTOM VIEW OF EUT**



FRONT VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the content of the report is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **BACK VIEW OF EUT**



LEFT VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condition of the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **RIGHT VIEW OF EUT**



**VIEW OF EUT PORT-1** 



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stadied restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.