



Report No.: FCC 1901033 File reference No.: 2019-01-21

Applicant: FORM ELECTRONICS CO., LTD.

Product: Waterproof Bluetooth Speaker

Model No.: FM0190

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

# Jack Chung

Jack Chung

Manager

Dated: January 21,2019

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1901033 Page 2 of 75

Date: 2019-01-21



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Page 3 of 75

Report No.: FCC1901033

Date: 2019-01-21



# **Test Report Conclusion**

#### Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample.	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT.	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth	22
8.0	Maximum Output Power	34
9.0	Carrier Frequency Separation.	37
10.0	Number of Hopping Channel	41
11.0	Time of Occupancy (Dwell Time).	45
12.0	Out of Band Measurement	52
13.0	Antenna Requirement.	65
14.0	FCC ID Label	66
15.0	Photo of Test Setup and EUT View.	67

Report No.: FCC1901033 Page 4 of 75

Date: 2019-01-21



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

### 1.2 Applicant Details

Applicant: FORM ELECTRONICS CO., LTD.

Address: 4F Bldg E, JunFeng Industrial Park, Lezhujiao, Xixiang, Bao'an Dist, Shenzhen China

Telephone: 86-13902920187 Fax: 86-755-84193911

#### 1.3 Description of EUT

Product: Waterproof Bluetooth Speaker

Manufacturer: FORM ELECTRONICS CO., LTD.

Address: 4F Bldg E, JunFeng Industrial Park, Lezhujiao, Xixiang, Bao'an Dist,

Shenzhen China

Brand Name: N/A

Model Number: FM0190

Additional Model Number: N/A

Type of Modulation GFSK, 月/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: Integral Antenna and the maximum Gain of this antenna is 2.0dBi;

# 1.4 Submitted Sample: 1 Samples

# 1.5 Test Duration

2019-01-03 to 2019-01-19

# 1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1901033 Page 5 of 75

Date: 2019-01-21



Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 75

Report No.: FCC1901033

Date: 2019-01-21



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2018-06-22	2019-06-21
Ultra Broadband ANT	R&S	HL562	100157	2018-06-18	2019-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2018-06-22	2019-06-21
Loop Antenna	EMCO	6507	00078608	2018-06-25	2019-06-24
Spectrum	R&S	FSIQ26	100292	2018-06-22	2019-06-21
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2018-06-25	2019-06-24
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-08-24	2019-08-23
Power meter	Anritsu	ML2487A	6K00003613	2018-08-22	2019-08-21
Power sensor	Anritsu	MA2491A	32263	2018-08-22	2019-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2019-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2018-06-22	2019-06-21
EMI Test Receiver	RS	ESH3	860904/006	2018-06-22	2019-06-21
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2018-06-22	2019-06-21
Spectrum	HP/Agilent	E4407B	MY50441392	2018-03-27	2019-03-26
Spectrum	RS	FSP	1164.4391.38	2018-01-20	2019-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2018-05-24	2019-05-23
RF Cable	Zhengdi	7m		2018-03-17	2019-03-16
RF Switch	EM	EMSW18	060391	2018-06-22	2019-06-21
Pre-Amplifier	Schwarebeck	BBV9743	#218	2018-06-22	2019-06-21
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2018-08-05	2019-08-04

Report No.: FCC1901033 Page 7 of 75

Date: 2019-01-21



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

#### 4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: FCC1901033 Page 8 of 75

Date: 2019-01-21



#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test

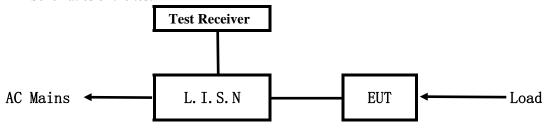


EUT: Equipment Under Test

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~60Hz Block diagram of Test setup

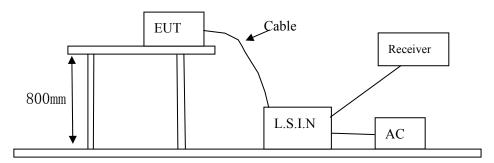

# 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Report No.: FCC1901033 Page 9 of 75

Date: 2019-01-21



#### A. EUT

Device	Manufacturer	Model	FCC ID
Waterproof Bluetooth Speaker	FORM ELECTRONICS CO., LTD.	FM0190	2AAL7-FM0190

#### B. Internal Device

Device	Manufacturer	Model	Rating

### C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	Smartab	TPA-9705100U1	Input: 100-240V~, 0.25A, 50/60Hz;
			Output: DC5V, 1A

# 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

### 5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level Average Level		Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

# 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2019-01-21



#### A: Conducted Emission on Live Terminal (150kHz to 30MHz)

### **EUT Operating Environment**


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

**EUT set Condition: Keep Bluetooth Transmitting** 

**Equipment Level: Class B** 

**Results: PASS** 

Please refer to following diagram for individual

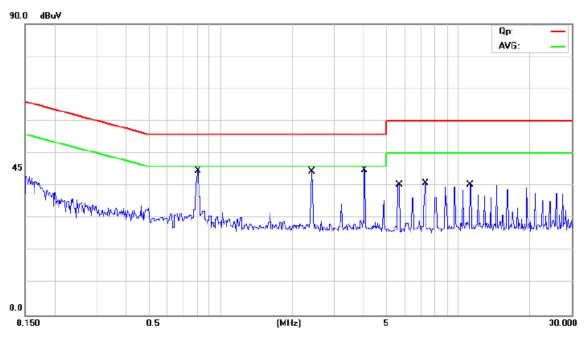

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.8073	31.90	10.66	42.56	56.00	-13.44	QP	
2		0.8073	26.50	10.66	37.16	46.00	-8.84	AVG	
3		2.4217	31.60	10.87	42.47	56.00	-13.53	QP	
4	*	2.4217	26.70	10.87	37.57	46.00	-8.43	AVG	
5		4.0304	30.80	10.84	41.64	56.00	-14.36	QP	
6		4.0304	26.30	10.84	37.14	46.00	-8.86	AVG	
7		5.6455	29.30	10.89	40.19	60.00	-19.81	QP	
8		5.6455	24.70	10.89	35.59	50.00	-14.41	AVG	
9		7.2606	28.20	11.08	39.28	60.00	-20.72	QP	
10		7.2606	24.80	11.08	35.88	50.00	-14.12	AVG	
11		11.2994	25.00	11.37	36.37	60.00	-23.63	QP	
12		11.2994	20.30	11.37	31.67	50.00	-18.33	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-01-21



#### B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

### **EUT Operating Environment**


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

**EUT set Condition: Keep Bluetooth Transmitting** 

**Equipment Level: Class B** 

**Results: Pass** 

Please refer to following diagram for individual

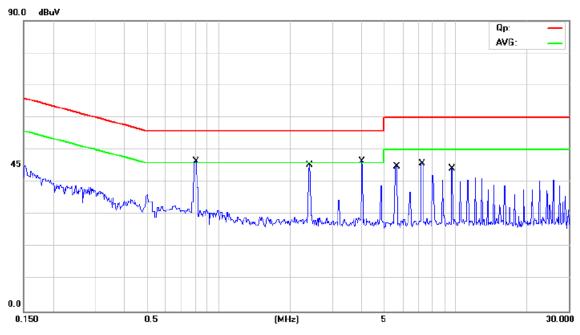

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.8043	34.60	10.66	45.26	56.00	-10.74	QP	
2		0.8043	30.30	10.66	40.96	46.00	-5.04	AVG	
3		2.4141	34.70	10.87	45.57	56.00	-10.43	QP	
4	*	2.4141	30.10	10.87	40.97	46.00	-5.03	AVG	
5		4.0255	34.30	10.84	45.14	56.00	-10.86	QP	
6		4.0255	28.10	10.84	38.94	46.00	-7.06	AVG	
7		5.6378	32.30	10.89	43.19	60.00	-16.81	QP	
8		5.6378	23.10	10.89	33.99	50.00	-16.01	AVG	
9		7.2543	28.70	11.08	39.78	60.00	-20.22	QP	
10		7.2543	17.70	11.08	28.78	50.00	-21.22	AVG	
11		9.6805	30.20	11.36	41.56	60.00	-18.44	QP	
12		9.6805	21.10	11.36	32.46	50.00	-17.54	AVG	

Report No.: FCC1901033 Page 12 of 75


Date: 2019-01-21



#### 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

#### **Block diagram of Test setup**

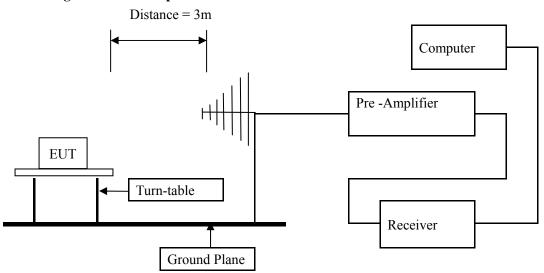

- 6.2 Configuration of The EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1901033 Page 13 of 75

Date: 2019-01-21



#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

### Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB $\mu$ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. GFSK was the worse case because it has highest output power

Date: 2019-01-21



Page 14 of 75

# Test result

# General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

**EUT set Condition:** Keep Bluetooth Transmitting

**Results: Pass** 


Page 15 of 75 Report No.: FCC1901033

Date: 2019-01-21



# Test Figure:

H

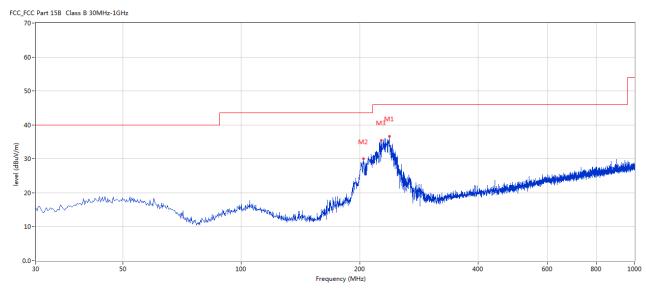

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	238.013	36.69	-12.46	46.0	-9.31	Peak	77.00	100	Н	Pass
2	204.314	30.01	-13.53	43.5	-13.49	Peak	251.00	200	Н	Pass
3	226.618	35.40	-12.81	46.0	-10.60	Peak	72.00	200	Н	Pass


Page 16 of 75 Report No.: FCC1901033

Date: 2019-01-21



# Test Figure:



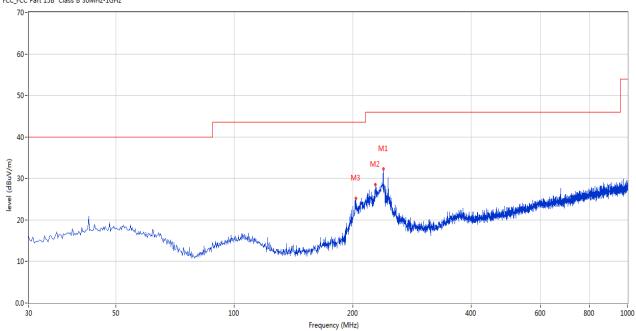

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	239.225	32.26	-12.38	46.0	-13.74	Peak	200.00	200	V	Pass
2	228.315	28.48	-12.75	46.0	-17.52	Peak	0.00	200	V	Pass
3	203.587	25.20	-13.48	43.5	-18.30	Peak	211.00	100	V	Pass

Report No.: FCC1901033 Page 17 of 75

Date: 2019-01-21



### Operation Mode: Transmitting under Low Channel (2402MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4804	ı	Н	74(Peak)/ 54(AV)
4804	1	V	74(Peak)/ 54(AV)
7206	1	H/V	74(Peak)/ 54(AV)
9608	1	H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814	-	H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618	1	H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

### **Operation Mode: Transmitting g under Middle Channel (2441MHz)**

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
4882	-	Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323		H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: FCC1901033 Page 18 of 75

Date: 2019-01-21



# Operation Mode: Transmitting under High Channel (2480MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


<sup>2.</sup> Remark "---" means that the emissions level is too low to be measured

Date: 2019-01-21




# Please refer to the following test plots for details:

### **Low Channel: Vertical**

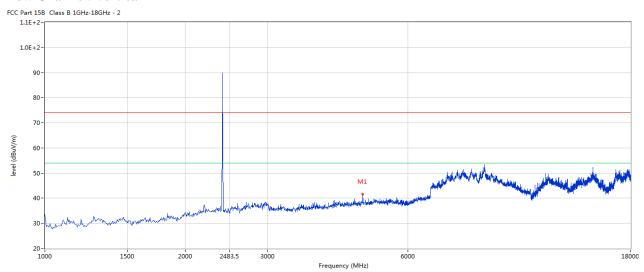

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4804.199	41.66	3.12	74.0	-32.34	Peak	173.00	100	Н	Pass

# **Low Channel: Horizontal**

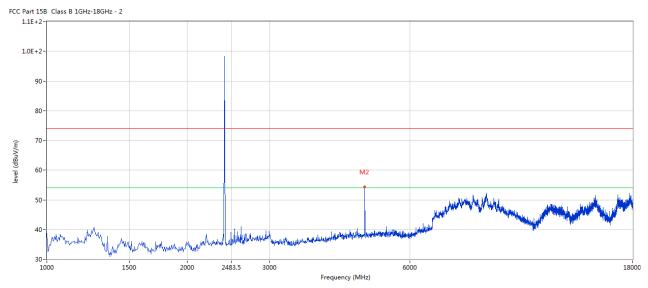

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	4804.199	40.68	3.12	54.0	-13.32	AV	248.00	100	Н	Pass
2	4804.199	54.40	3.12	74.0	-19.60	Peak	248.00	100	Н	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-01-21




#### **Middle Channel: Horizontal**

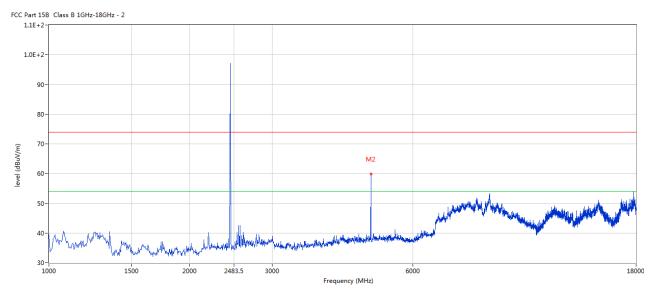

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4882.280	44.85	3.20	54.0	-9.15	AV	46.00	100	Н	Pass
2	4882.280	59.85	3.20	74.0	-14.15	Peak	46.00	100	Н	Pass

#### Middle Channel: Vertical

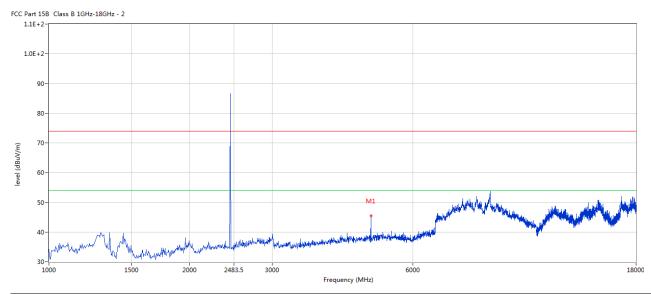

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4882.280	45.45	3.20	74.0	-28.55	Peak	104.00	100	V	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-01-21




#### **High Channel: Horizontal**

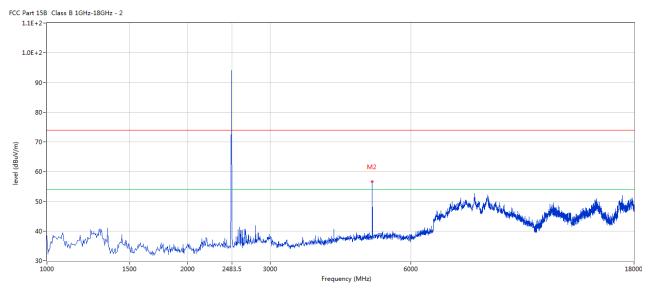

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4960.010	42.65	3.36	54.0	-11.35	AV	196.00	100	Н	Pass
2	4960.010	56.65	3.36	74.0	-17.35	Peak	196.00	100	Н	Pass

#### **High Channel: Vertical**

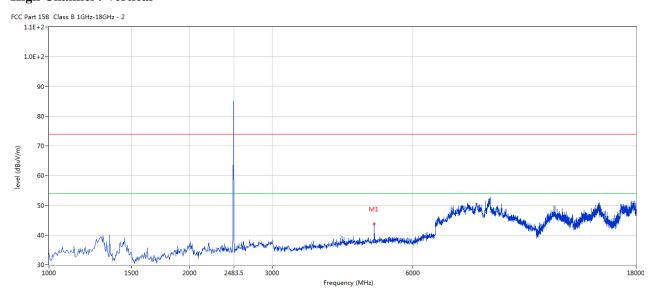

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4960.010	43.68	3.36	74.0	-30.32	Peak	345.00	100	V	Pass

# Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-01-21



Page 22 of 75

#### 7.0 20dB Bandwidth Measurement

# 7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 7.2 Limits of 20dB Bandwidth Measurement

N/A

#### 7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

#### 7.4 Test Result

#### **Type of Modulation: GFSK**

JF	oddiadioni G1 511		,	
EUT	Waterpro	of Bluetooth Speaker	Model	FM0190
Mode	Ke	Keep Transmitting Input Voltage		DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail
Low	2402	944		Pass
Middle	2441	944		Pass
High	2480	944		Pass


Report No.: FCC1901033 Page 23 of 75

Date: 2019-01-21



# Test Figure:

# 1. Condition: Low Channel

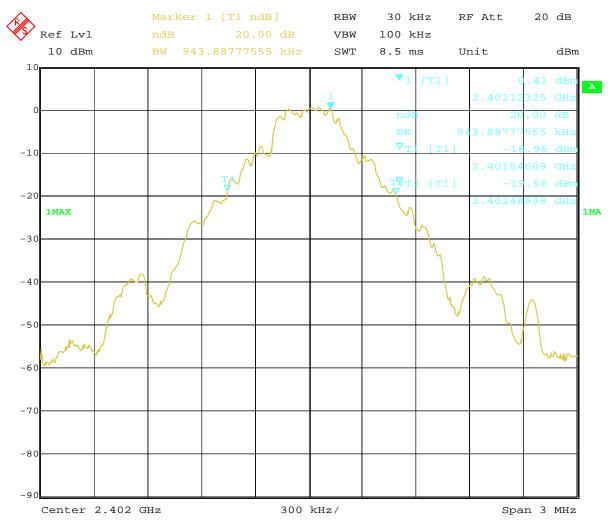


17.JAN.2019 09:27:46 Date:

Report No.: FCC1901033 Page 24 of 75

Date: 2019-01-21



#### 2. Condition: Middle Channel

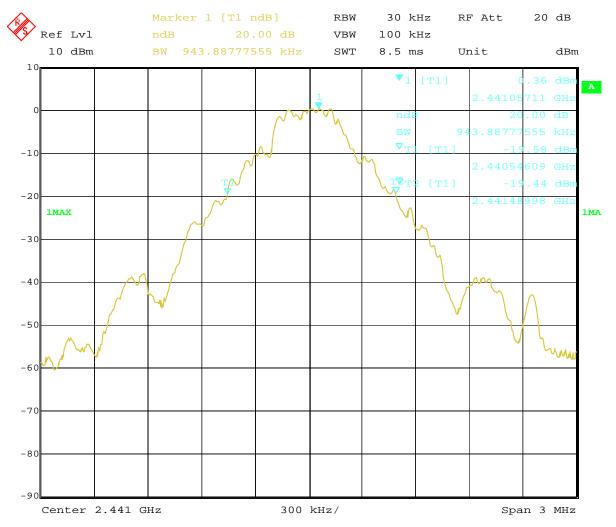


17.JAN.2019 09:28:56 Date:

Report No.: FCC1901033 Page 25 of 75

Date: 2019-01-21



### 3. High Channel

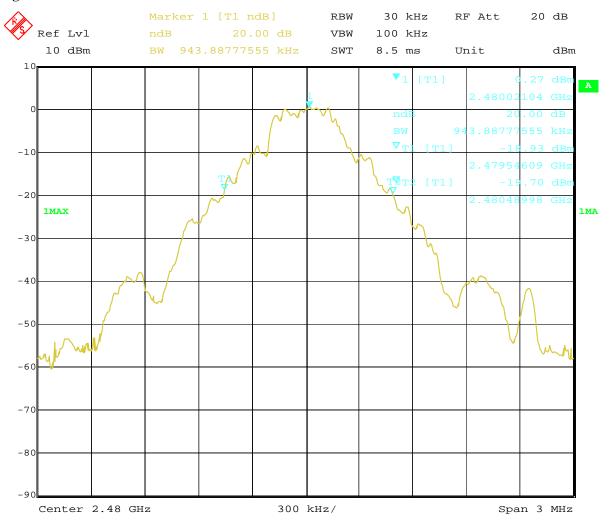

17.JAN.2019 09:30:26 Date:

Page 26 of 75 Report No.: FCC1901033

Date: 2019-01-21



### **Test Result**

Type of Modulation: JI/4DQPSK

EUT	Waterpr	roof Bluetooth Speaker	Model	FM0190
Mode	K	Keep Transmitting Input Voltage		
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1467		Pass
Middle	2441	1467		Pass
High	2480	1467		Pass


Report No.: FCC1901033 Page 27 of 75

Date: 2019-01-21



### Test Figure:

# 1. Condition: Low Channel

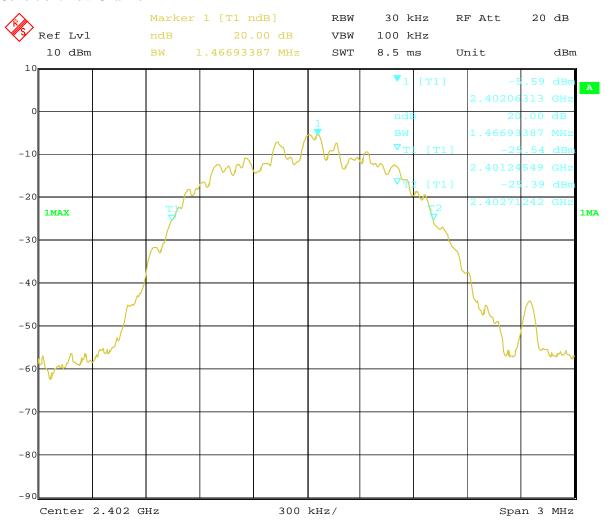


17.JAN.2019 09:33:22 Date:

Report No.: FCC1901033 Page 28 of 75

Date: 2019-01-21



#### 2. Condition: Middle Channel

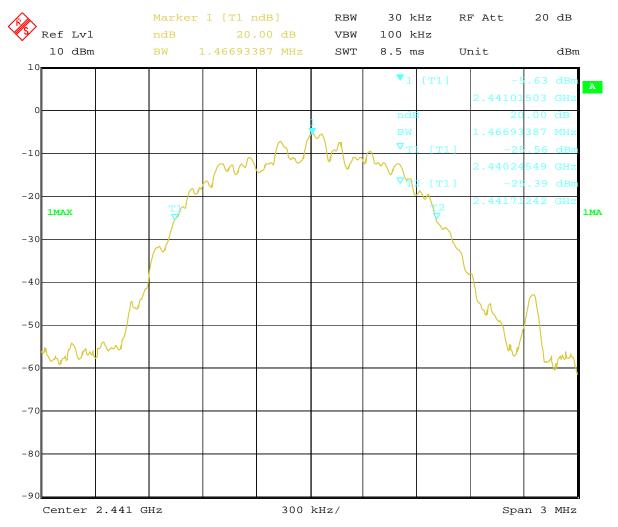


17.JAN.2019 09:32:20 Date:

Report No.: FCC1901033 Page 29 of 75

Date: 2019-01-21



### 3. High Channel

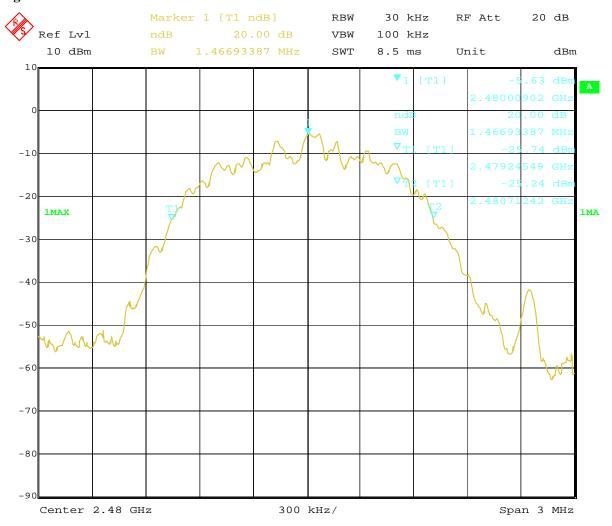

17.JAN.2019 09:31:08 Date:

Page 30 of 75 Report No.: FCC1901033

Date: 2019-01-21



#### **Test Result**

**Type of Modulation: 8DPSK** 

EUT	Waterpr	oof Bluetooth Speaker	Model	FM0190
Mode	K	eep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1485		Pass
Middle	2441	1479		Pass
High	2480	1485		Pass


Report No.: FCC1901033 Page 31 of 75

Date: 2019-01-21



# Test Figure:

# 1. Condition: Low Channel

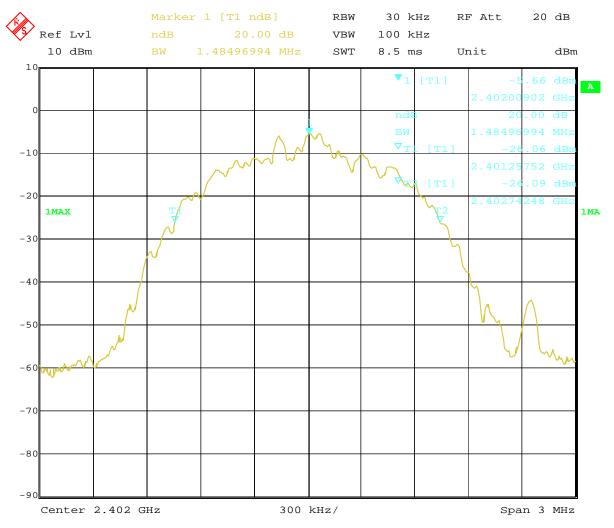


Report No.: FCC1901033 Page 32 of 75

Date: 2019-01-21



#### 2. Condition: Middle Channel

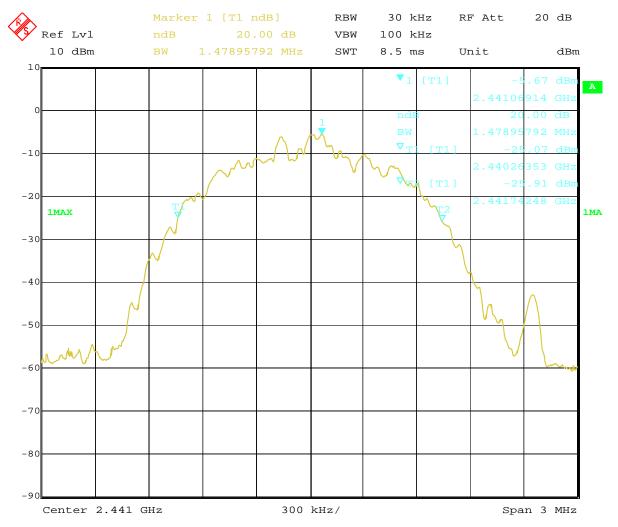


17.JAN.2019 09:35:36 Date:

Report No.: FCC1901033 Page 33 of 75

Date: 2019-01-21



### 3. High Channel

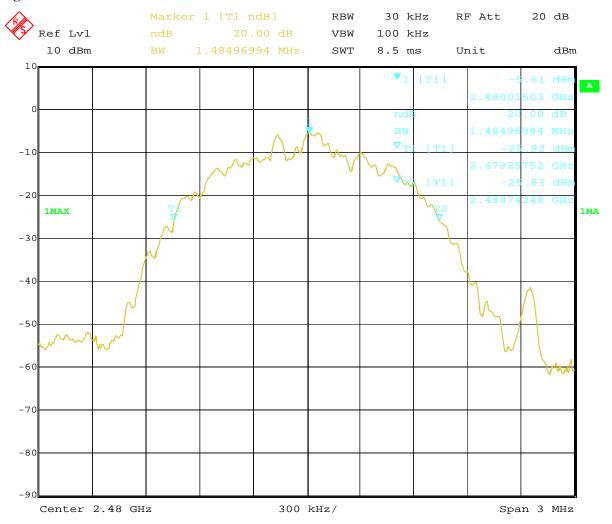

17.JAN.2019 09:36:50 Date:

Date: 2019-01-21



Page 34 of 75

## 8. Maximum Output Power

### 8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

## 8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

#### 8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = Auto; Detector function = PK; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Report No.: FCC1901033 Page 35 of 75

Date: 2019-01-21



#### **8.4Test Results**

### Type of Modulation: GFSK

EUT	Waterpr	Waterproof Bluetooth Speaker		Model	FM0190
Mode	K	Keep Transmitting		Voltage	DC3.7V
Temperature	е	24 deg. C,		dity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)		Peak Power Limit	Pass/ Fail
		Peak		(dBm)	
Low	2402	3.64		30	Pass
Middle	2441	3.80		30	Pass
High	2480	3.50		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

### Type of Modulation: Л/4DQPSK

EUT		Waterproof Bluetooth Speaker		Model		FM0190
Mode		Keep Transmitting		Input Voltage		DC3.7V
Temperature		24 deg. C,		Humidity		56% RH
Channel	Cł	nannel Frequency	Max. Power Output (dBm	Power		Pass/ Fail
	(MHz)		Peak		Limit (dBm)	
Low		2402	-0.86		30	Pass
Middle		2441	-0.86		30	Pass
High		2480	-0.97		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-01-21



Page 36 of 75

### **Type of Modulation: 8DPSK**

EUT	Waterpro	Waterproof Bluetooth Speaker		Model	FM0190
Mode	Ke	Keep Transmitting		t Voltage	DC3.7V
Temperature	e	24 deg. C,		umidity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm	)	Peak Power Limit (dBm)	Pass/ Fail
-0.80	2402	-0.71		30	Pass
-0.03	2441	-0.71		30	Pass
High	2480	-0.86		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Report No.: FCC1901033

Date: 2019-01-21



Page 37 of 75

## 9. Carrier Frequency Separation

## 9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

# 9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

#### 9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span; Video (or Average) Bandwidth (VBW)  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 38 of 75

Report No.: FCC1901033

Date: 2019-01-21




#### 9.4Test Result

## Type of Modulation: GFSK

EUT	Waterproof Bluetooth Speaker		Model		FM0190
Mode	Hopping On I		Input Voltage		DC3.7V
Temperature	24 deg. C,	24 deg. C,		56% RH	
Carrier Frequency Separation		Limit		Pass/ Fail	
	1.000MHz	≥ 25 kHz or 2/3	of the 20 dB ban	dwidth	Pass

## **Test Plots**

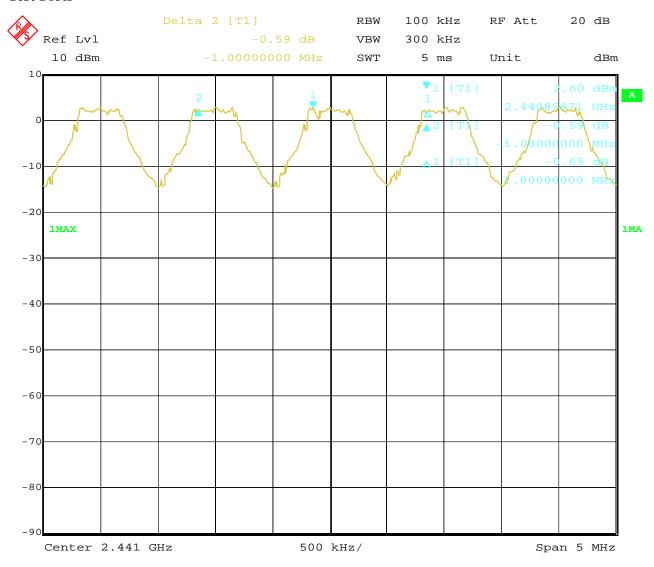

16.JAN.2019 15:45:41 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1901033 Page 39 of 75


Date: 2019-01-21



# Type of Modulation: Л/4DQPSK

EUT	Waterproof Bluetooth Speaker		Model		FM0190
Mode	Hopping On		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation		Limit		Pass/ Fail	
	1.000MHz	≥ 25 kHz or 2	≥ 25 kHz or 2/3 of 20 dB bandwidth		Pass

#### **Test Plots**

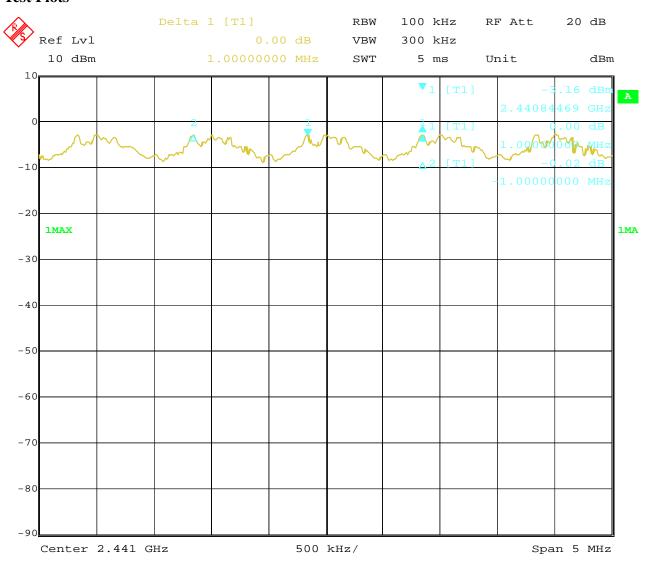

16.JAN.2019 16:31:38 Report No.: FCC1901033 Page 40 of 75


Date: 2019-01-21



## **Type of Modulation: 8DPSK**

EUT	Waterproof Bluetooth Speaker		Model		FM0190
Mode	Hopping On I		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier I	Carrier Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3 of 20 dB bandwidth		vidth	Pass

## **Test Plots**

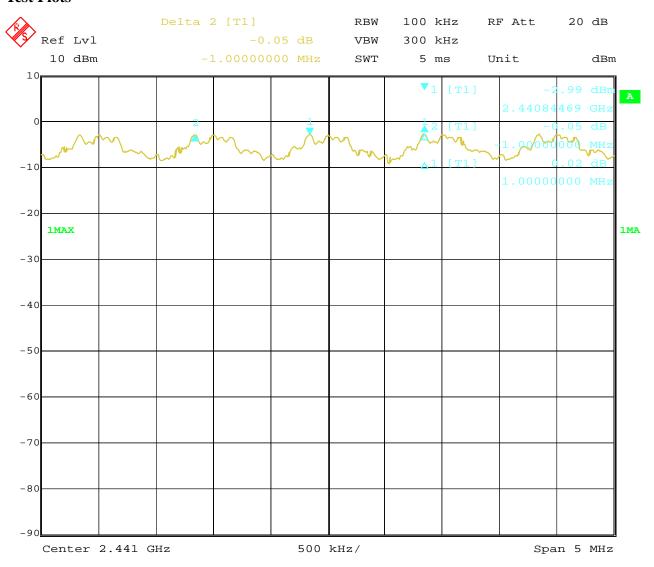

16.JAN.2019 17:36:01 Date:

Report No.: FCC1901033

Date: 2019-01-21



Page 41 of 75

## 10. Number of Hopping Channels

# 10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

#### 10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

#### **10.3 Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 42 of 75

Report No.: FCC1901033

Date: 2019-01-21




#### 10.4Test Result

## Type of Modulation: GFSK

EUT	Waterproof Bluetooth Speaker		Model	FM0190	
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature	2	24 deg. C,	Humidity	56% RH	
Operating Free	rating Frequency Number of hopping channels		Limit	Pass/ Fail	
2402-2480MHz 79			≥ 15	Pass	

## **Test Plot**

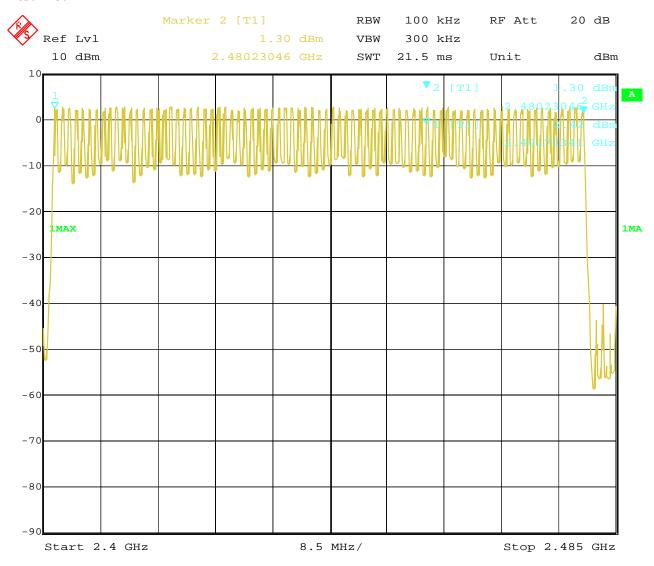

Date: 16.JAN.2019 15:12:03

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 43 of 75

Report No.: FCC1901033


Date: 2019-01-21



#### Type of Modulation: $\sqrt{1/4}$ DQPSK

EUT	Waterproof Bluetooth Speaker		M	Iodel		FM0190	
Mode	Hopping On		Input Voltage			DC3.7V	
Temperature	24 deg. C,		Hum	Iumidity		56% RH	
Operating Frequency		Number of hopping channels		Lin	nit	Pass/ Fail	
2402-2480MHz 79		79		<u>&gt;</u>	15	Pass	

#### **Test Plot**

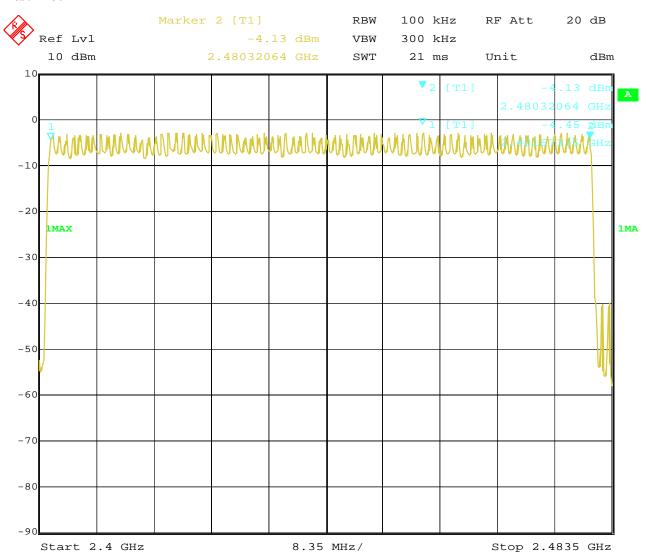

16.JAN.2019 16:59:56 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1901033 Page 44 of 75


Date: 2019-01-21



## **Type of Modulation: 8DPSK**

EUT	Waterproof Bluetooth Speaker		Мо	odel		FM0190	
Mode	Hopping On		Input V	oltage		DC3.7V	
Temperature	2	24 deg. C,		ity		56% RH	
Operating Frequency Nu		Number of hopp channels	oing	Liı	mit	Pass/ Fail	
2402-2480MHz		79		<u> </u>	15	Pass	

#### **Test Plot**

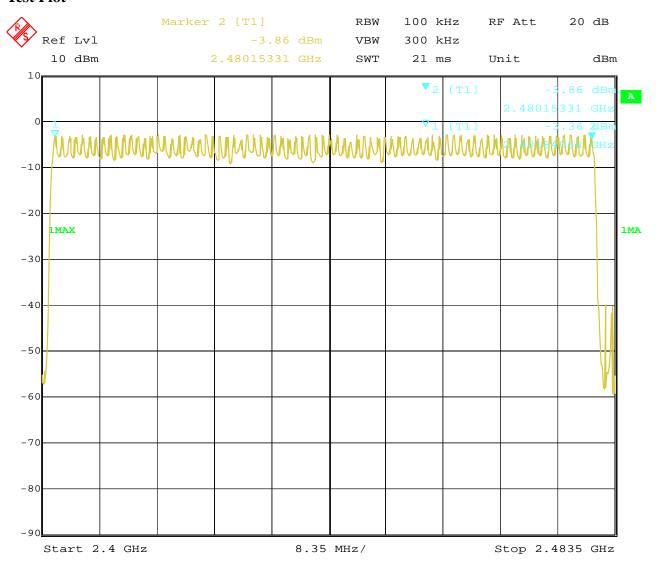

16.JAN.2019 17:04:17 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1901033

Date: 2019-01-21



Page 45 of 75

## 11. Time of Occupancy (Dwell Time)

## 11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

#### 11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: FCC1901033 Page 46 of 75

Date: 2019-01-21



#### 11.4 Test Result

## Type of Modulation: GFSK

EUT	Waterproof B	luetooth Speaker	Model	I	FM0190			
Mode	Keep Tr	ansmitting	Input Voltage	]	DC3.7V			
Temperatur	e 24 c	leg. C,	Humidity	4	66% RH			
Channel	Reading	Hoping	Hoping Rate		Limit			
	DH5							
Middle	3.05ms	266.66	7 hop/s	0.325s	0.4s			

Actual = Reading  $\times$  (Hopping rate / Number of channels)  $\times$  Test period, Test period = 0.4 [seconds / channel]  $\times$  79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 $\mu$ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: DH5 was the worst case.

Page 47 of 75


Report No.: FCC1901033

Date: 2019-01-21



Test Plots:

## DH5

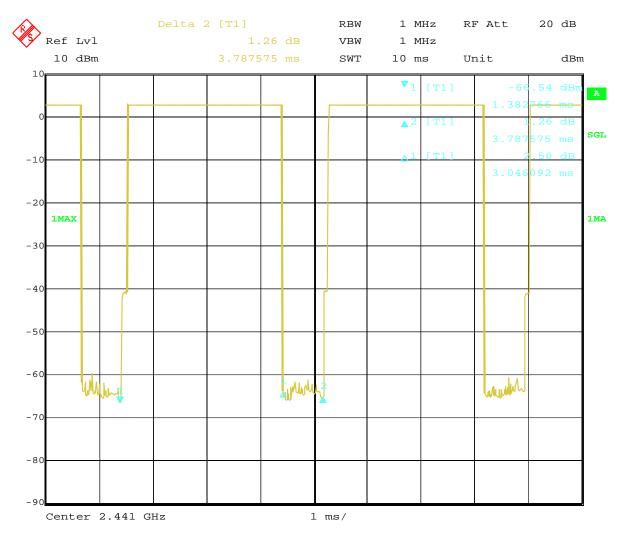

17.JAN.2019 09:44:36 Date:

Report No.: FCC1901033 Page 48 of 75

Date: 2019-01-21



#### **Test Result**

## Type of Modulation: Л/4DQPSK

EUT	Waterproof B	luetooth Speaker	Model	I	FM0190			
Mode	Keep Tr	ansmitting	Input Voltage	DC3.7V				
Temperatur	e 24 c	leg. C,	Humidity	5	66% RH			
Channel	Reading	Hoping	Hoping Rate		Limit			
	DH5							
Middle	3.03ms	266.66	7 hop/s	0.323s	0.4s			

Actual = Reading  $\times$  (Hopping rate / Number of channels)  $\times$  Test period, Test period = 0.4 [seconds / channel]  $\times$  79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 $\mu$ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 2DH5 was the worst case.

Page 49 of 75


Report No.: FCC1901033

Date: 2019-01-21



Test Plots:

**2DH5** 

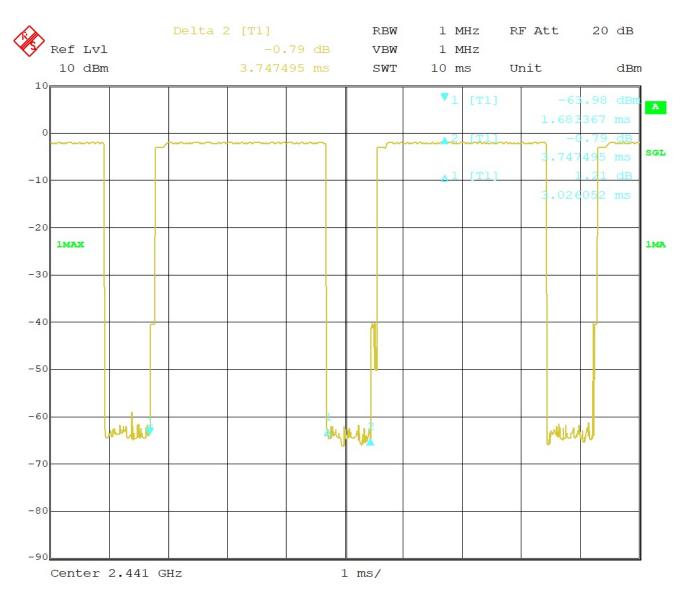

Date: 17.JAN.2019 09:47:37 Report No.: FCC1901033 Page 50 of 75

Date: 2019-01-21



# **Type of Modulation: 8DPSK**

EUT	Waterproof Bl	uetooth Speaker	ooth Speaker Model		FM0190			
Mode	Keep Tr	ansmitting	Input Voltage	I	DC3.7V			
Temperatur	e 24 d	24 deg. C,		5	66% RH			
Channel	Reading	Hoping	g Rate	Actual	Limit			
	DH5							
Middle	3.05ms	266.66	7 hop/s	0.325s	0.4s			

Actual = Reading  $\times$  (Hopping rate / Number of channels)  $\times$  Test period, Test period = 0.4 [seconds / channel]  $\times$  79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 $\mu$ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 3DH5 was the worst case.

Page 51 of 75


Report No.: FCC1901033

Date: 2019-01-21



Test Plots:

## **3DH5**

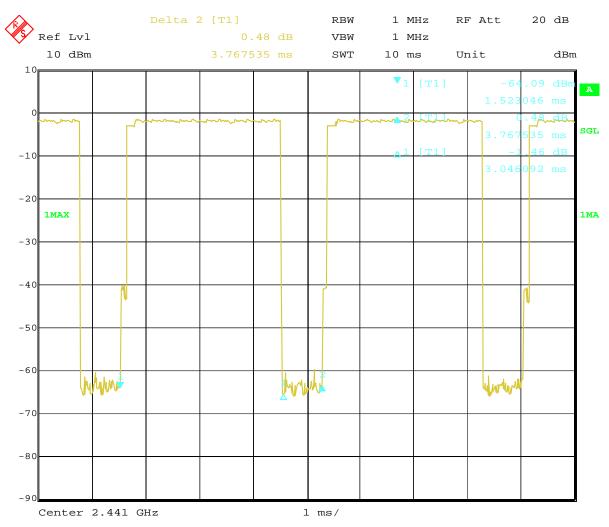

17.JAN.2019 09:50:20 Date:

Report No.: FCC1901033


Date: 2019-01-21



Page 52 of 75

#### 12 Out of Band Measurement

# 12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

#### 12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### 12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

- Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.
- 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 53 of 75

Report No.: FCC1901033

Date: 2019-01-21




## Type of Modulation: GFSK

#### Out of Band Test Result 12.4

Product:	Waterproof Bluetooth Speaker		Test Mode:	Low Channel
Mode	Kee	ping Transmitting	Input Voltage	DC3.7V
Temperature		24 deg. C	Humidity	56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK (dBµV/m)	42.9		$74(dB\mu V/m)$
Restrict Band	$AV(dB\mu V/m)$		Limit	54(dBµV/m)
2390MHz				

## **Test Figure:**

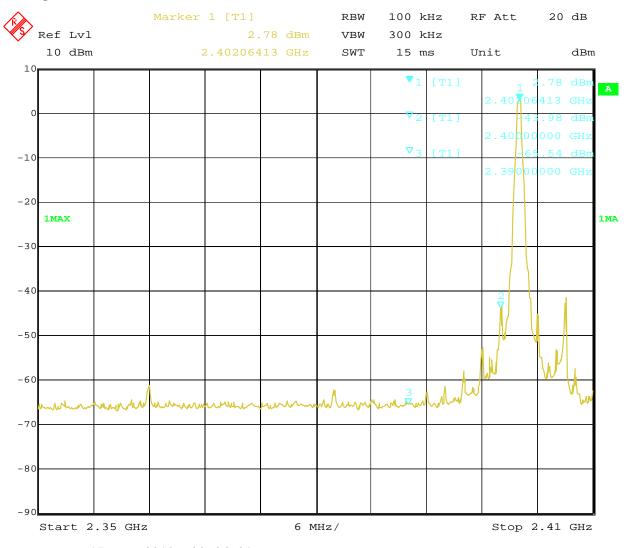

17.JAN.2019 09:26:01 Date:

Page 54 of 75

Report No.: FCC1901033

Date: 2019-01-21




# Type of Modulation: GFSK

#### 12.4 Out of Band Test Result

Product:	Waterproof Bluetooth Speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK (dBμV/m)	45.9		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

## **Test Figure:**

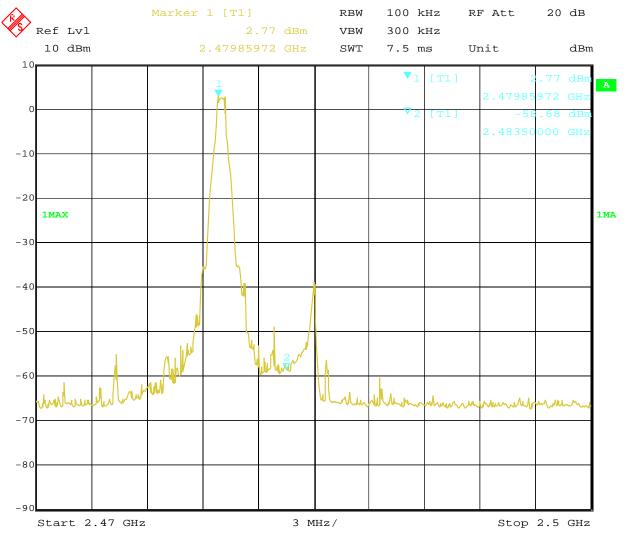

17.JAN.2019 09:16:05 Date:

Page 55 of 75

Report No.: FCC1901033

Date: 2019-01-21




# Type of Modulation: GFSK

## Out of Band Test Result

Product:	Waterproof Bluetooth Speaker		Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:		Pass		PK
The Max. FS in	PK (dBμV/m)	43.3		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2390MHz				

## **Test Figure:**

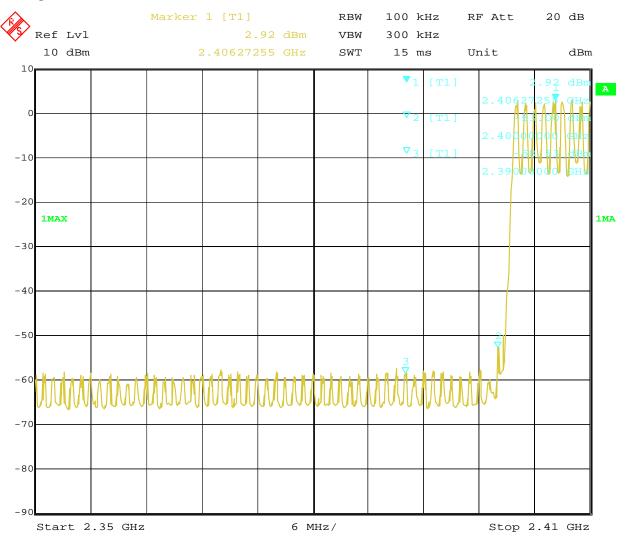

17.JAN.2019 09:09:48 Date:

Page 56 of 75

Report No.: FCC1901033

Date: 2019-01-21




## Type of Modulation: GFSK

## Out of Band Test Result

Product:	Waterpro	oof Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 45.1			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

## **Test Figure:**

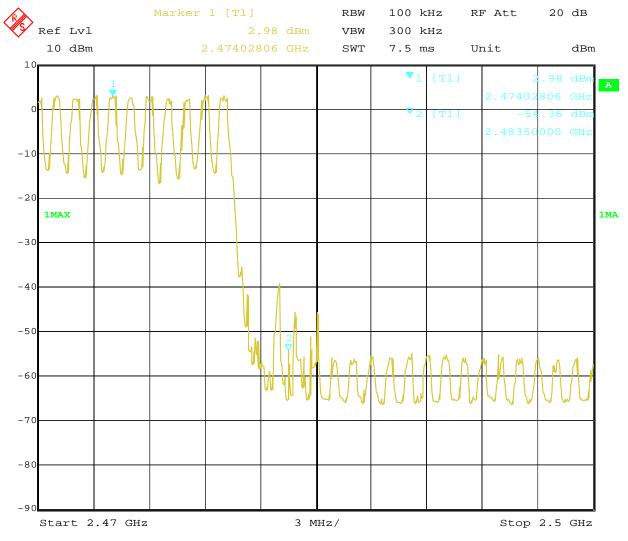

17.JAN.2019 09:14:43 Date:

Page 57 of 75

Report No.: FCC1901033

Date: 2019-01-21




# Type of Modulation: $\sqrt{1/4}$ DQPSK

#### Out of Band Test Result 12.4

Product:	Waterproof Bluetooth Speaker		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 42.6			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2390MHz				

## **Test Figure:**

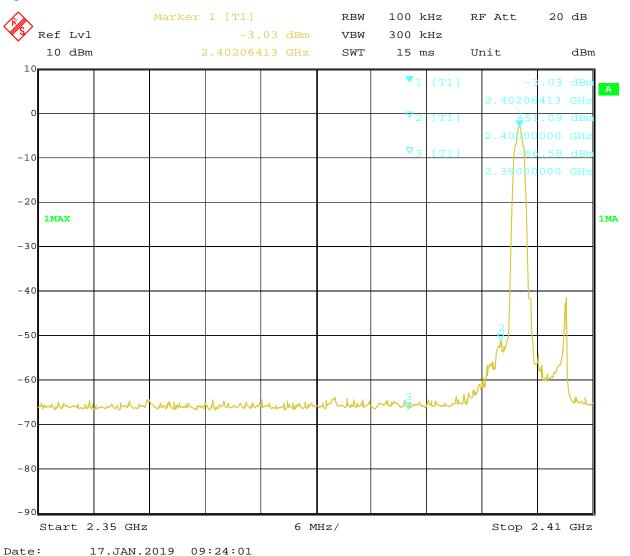

Page 58 of 75

Report No.: FCC1901033

Date: 2019-01-21




# Type of Modulation: Л/4DQPSK

#### Out of Band Test Result 12.4

Product:	Waterproof Bluetooth Speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 44.9			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2483.5MHz				

## **Test Figure:**

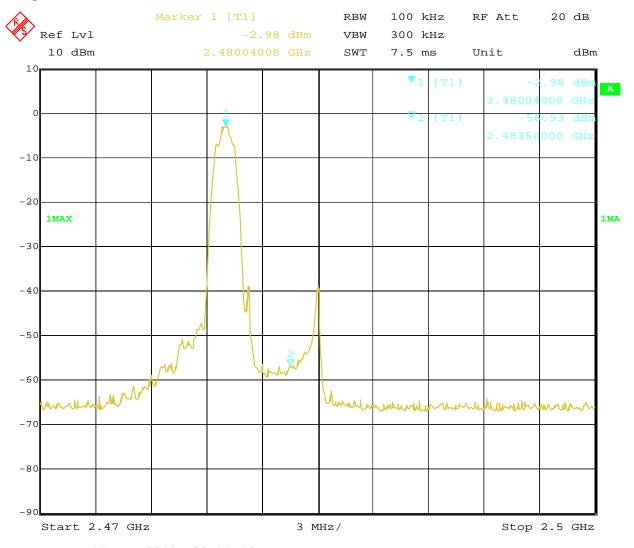

17.JAN.2019 Date: 09:17:54

Page 59 of 75

Report No.: FCC1901033

Date: 2019-01-21




# Type of Modulation: $\sqrt{1/4}$ DQPSK

# 12.4 Out of Band Test Result

Product:	Waterproof Bluetooth Speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 42.1			74(dBμV/m)
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

## **Test Figure:**

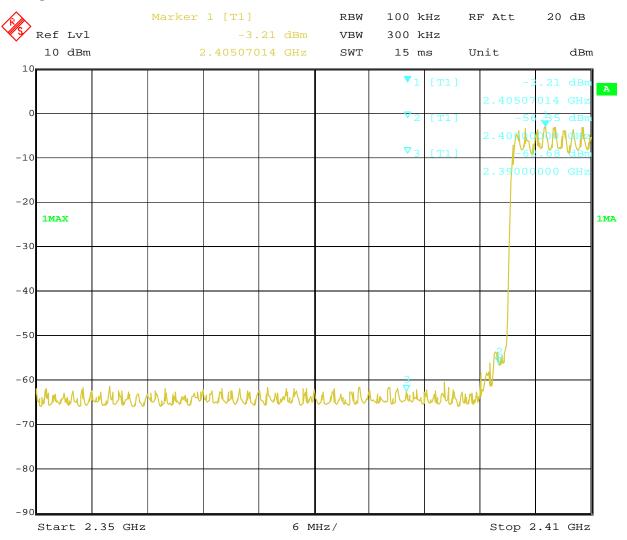

Date: 16.JAN.2019 18:00:47

Page 60 of 75

Report No.: FCC1901033

Date: 2019-01-21




# Type of Modulation: $\sqrt{1/4}$ DQPSK

# Out of Band Test Result

Product:	Waterproof Bluetooth Speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 45.1			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

# **Test Figure:**

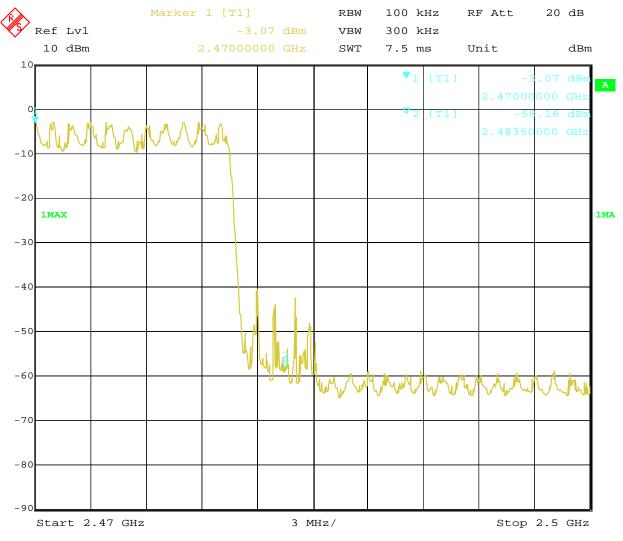

16.JAN.2019 18:05:22 Date:

Page 61 of 75

Report No.: FCC1901033

Date: 2019-01-21




## **Type of Modulation: 8DPSK**

#### 12.4 Out of Band Test Result

Product:	Waterproof Bluetooth Speaker		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 41.9			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

## **Test Figure:**

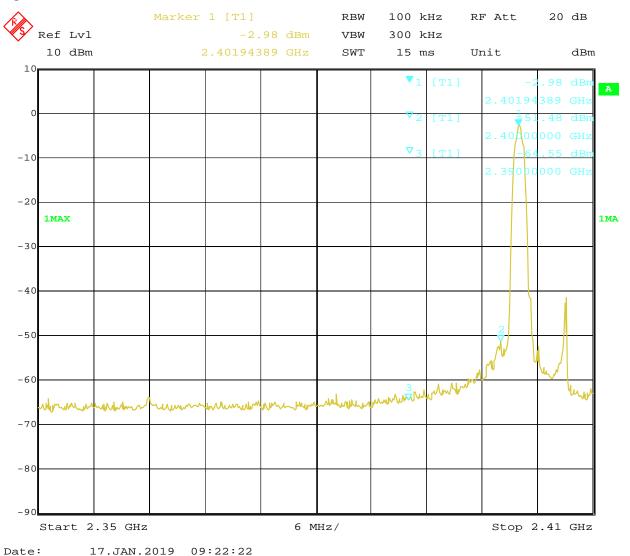

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 62 of 75

Report No.: FCC1901033

Date: 2019-01-21




## **Type of Modulation: 8DPSK**

#### 12.4 Out of Band Test Result

Product:	Waterproof Bluetooth Speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 44.8			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2483.5MHz				

## **Test Figure:**

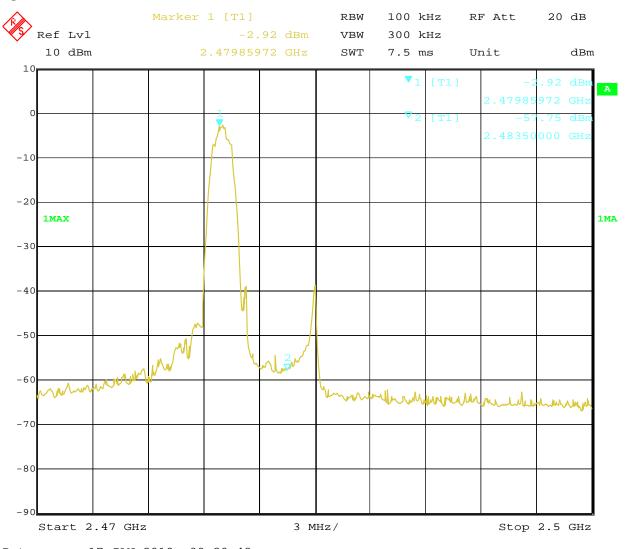

17.JAN.2019 09:20:48 Date:

Report No.: FCC1901033 Page 63 of 75

Date: 2019-01-21




## **Type of Modulation: 8DPSK**

## Out of Band Test Result

Product:	Waterproof Bluetooth Speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 42.6			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

## **Test Figure:**

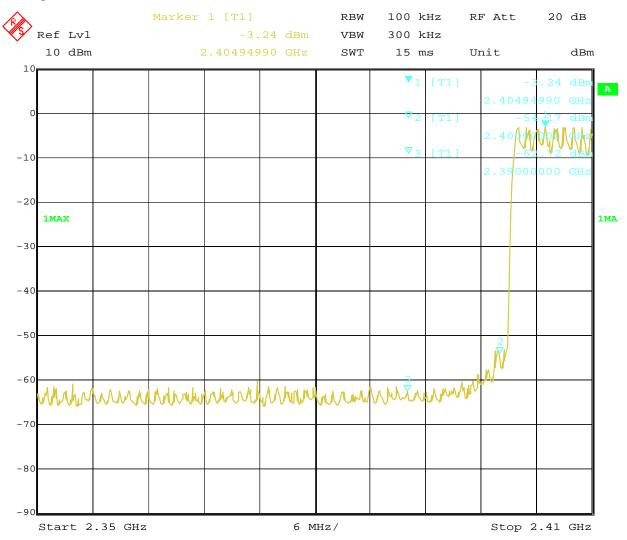

16.JAN.2019 17:58:07 Date:

Page 64 of 75

Report No.: FCC1901033

Date: 2019-01-21




## **Type of Modulation: 8DPSK**

## Out of Band Test Result

Product:	Waterpro	oof Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 44.9			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

# **Test Figure:**

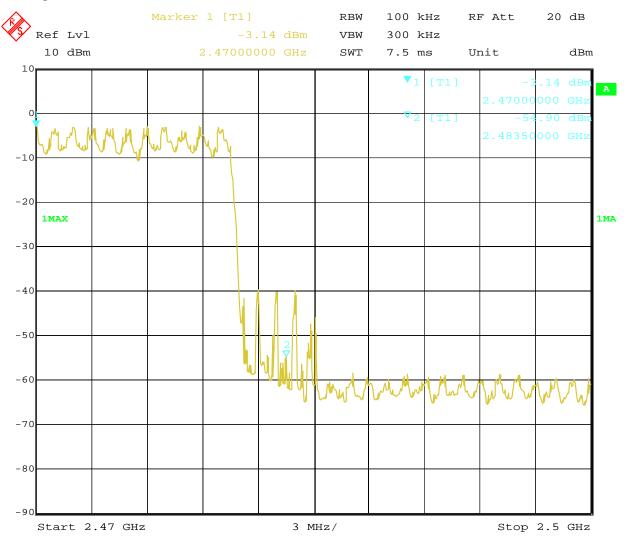

16.JAN.2019 17:53:48 Date:

Report No.: FCC1901033

Date: 2019-01-21



Page 65 of 75

# 13.0 Antenna Requirement

# 13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 13.2 Antenna Connected constructions

Integral antenna used. The maximum Gain of the antennas is 2.0dBi.

Report No.: FCC1901033 Page 66 of 75

Date: 2019-01-21




#### 14.0 FCC ID Label

# **FCC ID: 2AAL7-FM0190**

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**

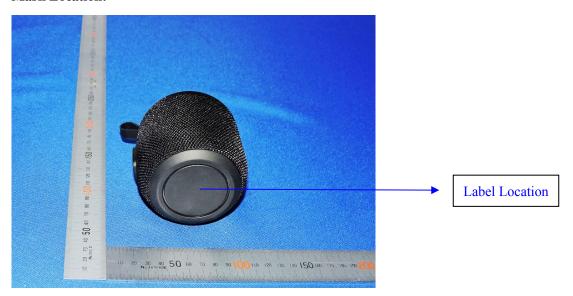


Page 67 of 75 Report No.: FCC1901033

Date: 2019-01-21



#### 15.0 Photo of testing

Conducted Emission Test Setup:

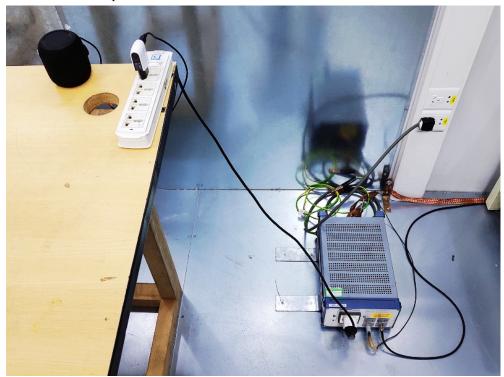


Page 68 of 75


Report No.: FCC1901033

Date: 2019-01-21



## Radiated Emission Test Setup:

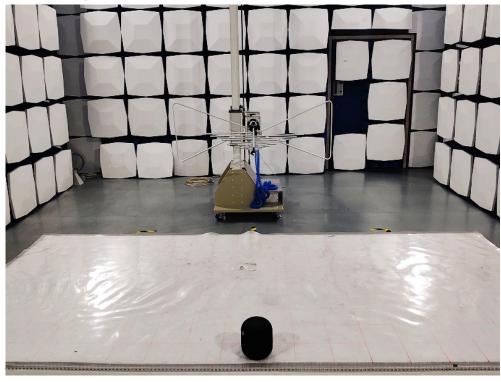

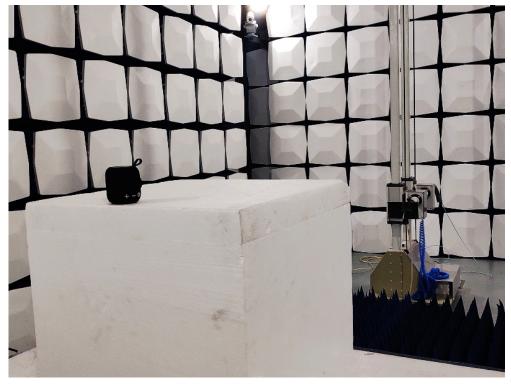

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 69 of 75

Report No.: FCC1901033

Date: 2019-01-21



# Photographs - EUT

# Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 70 of 75

Report No.: FCC1901033

Date: 2019-01-21



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 71 of 75

Report No.: FCC1901033

Date: 2019-01-21



Inside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property. discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1901033 Page 72 of 75

Date: 2019-01-21



Inside View

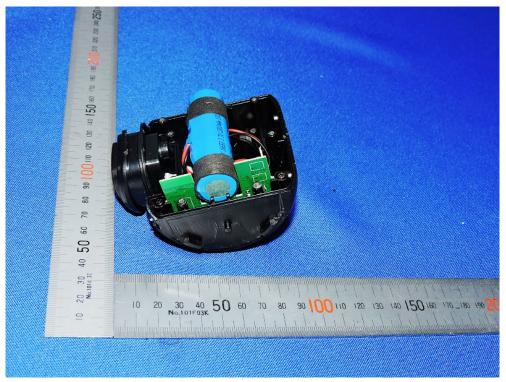



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 73 of 75


Report No.: FCC1901033

Date: 2019-01-21



Inside View

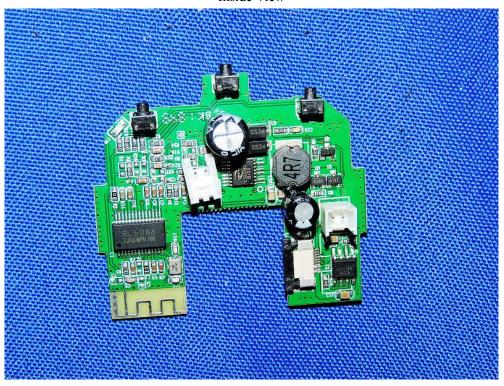

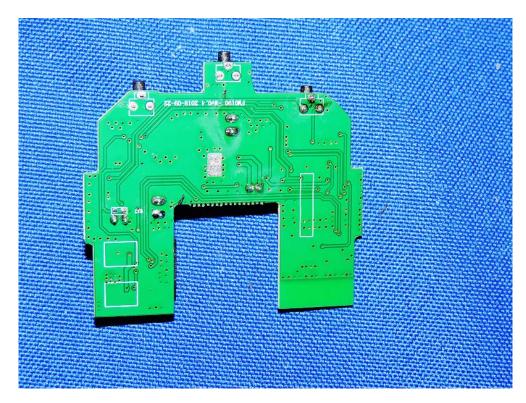

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 74 of 75


Report No.: FCC1901033

Date: 2019-01-21



Inside View

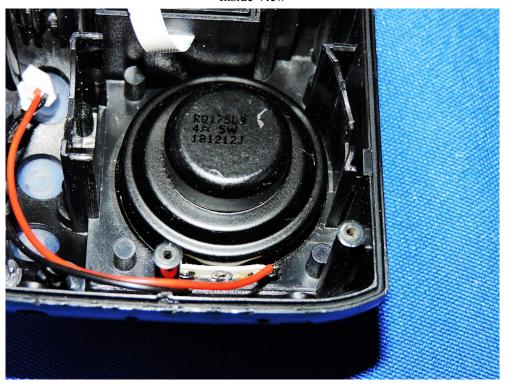

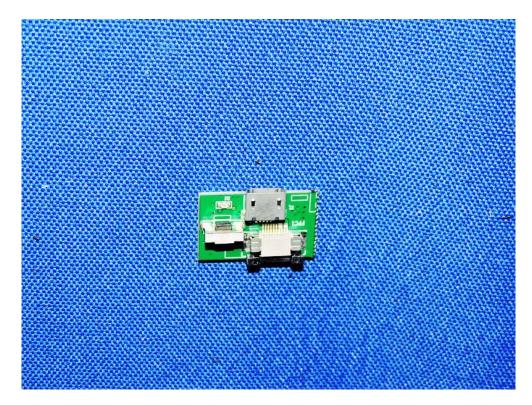

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 75 of 75 Report No.: FCC1901033

Date: 2019-01-21



Inside View



**End of Report**