

Applicant: Distribution Axessorize Inc

Product: Wireless Earphone

Model No.: G99B

Trademark: AT&T

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 & FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility



Manager

Dated: March 27, 2025

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2503143E Page 2 of 52

Date: 2025-03-27



# **Special Statement:**

# FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

# Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

# A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Date: 2025-03-27



# Test Report Conclusion Content

|      | Content                             |    |
|------|-------------------------------------|----|
| 1.0  | General Details                     | 4  |
| 1.1  | Test Lab Details                    | 4  |
| 1.2  | Applicant Details                   | 4  |
| 1.3  | Description of EUT                  | 4  |
| 1.4  | Submitted Sample                    | 4  |
| 1.5  | Test Duration.                      | 5  |
| 1.6  | Test Uncertainty                    | 5  |
| 1.7  | Test By                             | 5  |
| 2.0  | List of Measurement Equipment       | 6  |
| 3.0  | Technical Details                   | 7  |
| 3.1  | Summary of Test Results             | 7  |
| 3.2  | Test Standards.                     | 7  |
| 4.0  | EUT Modification                    | 7  |
| 5.0  | Power Line Conducted Emission Test. | 8  |
| 5.1  | Schematics of the Test.             | 8  |
| 5.2  | Test Method and Test Procedure.     | 8  |
| 5.3  | Configuration of the EUT            | 8  |
| 5.4  | EUT Operating Condition.            | 9  |
| 5.5  | Conducted Emission Limit.           | 9  |
| 5.6  | Test Result.                        | 9  |
| 6.0  | Radiated Emission test.             | 12 |
| 6.1  | Test Method and Test Procedure.     | 12 |
| 6.2  | Configuration of the EUT            | 13 |
| 6.3  | EUT Operation Condition.            | 13 |
| 6.4  | Radiated Emission Limit.            | 13 |
| 6.5  | Test Result.                        | 15 |
| 7.0  | Band Edge                           | 23 |
| 7.1  | Test Method and Test Procedure      | 23 |
| 7.2  | Radiated Test Setup                 | 23 |
| 7.3  | Configuration of the EUT            | 23 |
| 7.4  | EUT Operating Condition             | 23 |
| 7.5  | Band Edge Limit.                    | 23 |
| 7.6  | Band Edge Test Result               | 24 |
| 8.0  | Antenna Requirement                 | 28 |
| 9.0  | 20dB bandwidth measurement          | 29 |
| 10.0 | FCC ID Label                        | 36 |
| 11.0 | Photo of Test Setup and EUT View    | 37 |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2503143E Page 4 of 52

Date: 2025-03-27



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

#### 1.2 Applicant Details

Applicant: Distribution Axessorize Inc

Address: 3800 St-Patrick, Suite 315 Montreal QC H4E 1A4 Canada

#### 1.3 Description of EUT

Product: Wireless Earphone

Manufacturer: Glory Star Technology Industrial Co., Ltd.

Address: Room2102, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District,

Shenzhen, China

Trademark: AT&T

Model Number: G99B

Additional Model Name N/A

Rating: Input: DC3.7V

Battery: DC3.7V, 50mAh Li-ion battery for earphones and Built-in DC3.7V, 400mAh

Li-ion battery for charger base.

Serial No.: 0001-3000 Hardware Version: V01-20240918

Software Version: V6.0

Operation Frequency: 2402-2480 MHzModulation Type: GFSK,  $\pi/4DQPSK$ 

Number of Channels: 79 Channel Separation: 1MHz

Antenna Designation Chip antenna with gain 2.5dBi maximum (Get from the antenna specification)

#### 1.4 Submitted Sample: 3 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2503143E Page 5 of 52

Date: 2025-03-27



#### 1.5 Test Duration

2025-03-14 to 2025-03-27

# 1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

# 1.7 Test Engineer

The sample tested by

Print Name: Andy

Page 6 of 52

Report No.: TW2503143E

Date: 2025-03-27



| 2.0 Test Equipment |              |                  |              |              |            |
|--------------------|--------------|------------------|--------------|--------------|------------|
| Instrument Type    | Manufacturer | Model            | Serial No.   | Date of Cal. | Due Date   |
| ESPI Test Receiver | R&S          | ESPI 3           | 100379       | 2024-07-12   | 2025-07-11 |
| LISN               | R&S          | EZH3-Z5          | 100294       | 2024-07-12   | 2025-07-11 |
| LISN               | R&S          | EZH3-Z5          | 100253       | 2024-07-12   | 2025-07-11 |
| Impuls-Begrenzer   | R&S          | ESH3-Z2          | 100281       | 2024-07-12   | 2025-07-11 |
| Loop Antenna       | EMCO         | 6507             | 00078608     | 2022-07-18   | 2025-07-17 |
| Spectrum           | R&S          | FSIQ26           | 100292       | 2024-07-12   | 2025-07-11 |
| Horn Antenna       | A-INFO       | LB-180400-KF     | J211060660   | 2022-07-18   | 2025-07-17 |
| Horn Antenna       | R&S          | BBHA 9120D       | 9120D-631    | 2022-07-18   | 2025-07-17 |
| Power meter        | Anritsu      | ML2487A          | 6K00003613   | 2024-07-12   | 2025-07-11 |
| Power sensor       | Anritsu      | MA2491A          | 32263        | 2024-07-12   | 2025-07-11 |
| Bilog Antenna      | Schwarebeck  | VULB9163         | 9163/340     | 2022-07-18   | 2025-07-17 |
| 9*6*6 Anechoic     |              |                  | N/A          | 2022-07-26   | 2025-07-25 |
| EMI Test Receiver  | RS           | ESVB             | 826156/011   | 2024-07-12   | 2025-07-11 |
| EMI Test Receiver  | RS           | ESCS 30          | 834115/006   | 2024-07-12   | 2025-07-11 |
| Spectrum           | HP/Agilent   | E4407B           | MY50441392   | 2024-07-12   | 2025-07-11 |
| Spectrum           | RS           | FSP              | 1164.4391.38 | 2024-07-12   | 2025-07-11 |
| RF Cable           | Zhengdi      | ZT26-NJ-NJ-8M/FA |              | 2024-07-12   | 2025-07-11 |
| RF Cable           | Zhengdi      | 7m               |              | 2024-07-12   | 2025-07-11 |
| Pre-Amplifier      | Schwarebeck  | BBV9743          | #218         | 2024-07-12   | 2025-07-11 |
| Pre-Amplifier      | HP/Agilent   | 8449B            | 3008A00160   | 2024-07-12   | 2025-07-11 |
| LISN               | SCHAFFNER    | NNB42            | 00012        | 2024-07-12   | 2025-07-11 |
| ESPI Test Receiver | R&S          | ESPI 3           | 100379       | 2024-07-12   | 2025-07-11 |
| LISN               | R&S          | EZH3-Z5          | 100294       | 2024-07-12   | 2025-07-11 |

# 2.2 Automation Test Software

#### For Conducted Emission Test

| Name   | Version           |
|--------|-------------------|
| EZ-EMC | Ver.EMC-CON 3A1.1 |

#### For Radiated Emissions

| Name  | Version |
|---|---------|
| EMI Test Software BL410-EV18.91                 | V18.905 |
| EMI Test Software BL410-EV18.806 High Frequency | V18.06  |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it , or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2503143E Page 7 of 52

Date: 2025-03-27



#### 3.0 Technical Details

#### 3.1 Summary of test results

# The EUT has been tested according to the following specifications:

| Standard  | Test Type                           | Result | Notes    |
|---|-------------------------------------|--------|----------|
| FCC Part 15, Paragraph 15.203                               | Antenna<br>Requirement              | Pass   | Complies |
| FCC Part 15, Paragraph 15.207                               | Conducted<br>Emission Test          | Pass   | Complies |
| FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit | Field Strength<br>of<br>Fundamental | Pass   | Complies |
| FCC Part 15, Paragraph 15.209                               | Radiated<br>Emission Test           | Pass   | Complies |
| FCC Part 15 Subpart C Paragraph 15.249(d) Limit             | Band Edge<br>Test                   | Pass   | Complies |
| FCC Part 15.215(c)  | 20dB<br>bandwidth                   | Pass   | Complies |

#### 3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

#### 4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2025-03-27



#### 5.0 Power Line Conducted Emission Test

#### 5.1 Schematics of the test

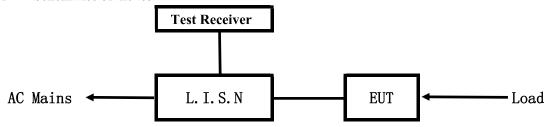


**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

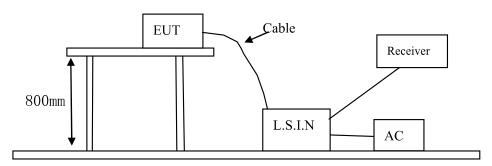

## 5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

#### A. EUT

| Device            | Manufacturer                                  | Model | FCC ID       |
|-------------------|---|-------|--------------|
| Wireless Earphone | Glory Star Technology<br>Industrial Co., Ltd. | G99B  | 2AK3OATTG99B |

#### B. Internal Device

| Device | Manufacturer | Model | FCC ID/DOC |
|--------|--------------|-------|------------|
| N/A    |              |       |            |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2503143E Page 9 of 52

Date: 2025-03-27



# C. Peripherals

| Device       | Manufacturer | Model   | Rating                             |
|--------------|--------------|---------|------------------------------------|
| Power Supply | Xiaomi       | CDQ02ZM | Input: 100-240V~, 50/60Hz, 1.2A;   |
|              |              |         | Output: DC5V, 3A; DC9V, 3A; DC12V, |
|              |              |         | 3A; DC15V, 3A; DC20V, 2.25A;       |

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

| Frequency         | Limits (dB $\mu$ V) |               |  |  |
|-------------------|---------------------|---------------|--|--|
| (MHz)             | Quasi-peak Level    | Average Level |  |  |
| $0.15 \sim 0.50$  | 66.0~56.0*          | 56.0~46.0*    |  |  |
| $0.50 \sim 5.00$  | 56.0                | 46.0          |  |  |
| $5.00 \sim 30.00$ | 60.0                | 50.0          |  |  |

Notes: 1. \*D

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results:

Date: 2025-03-27



# A: Conducted Emission on Live Terminal (150kHz to 30MHz)


#### **EUT Operating Environment**

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Charging and Communication by BT** 

**Results: Pass** 

Please refer to following diagram for individual

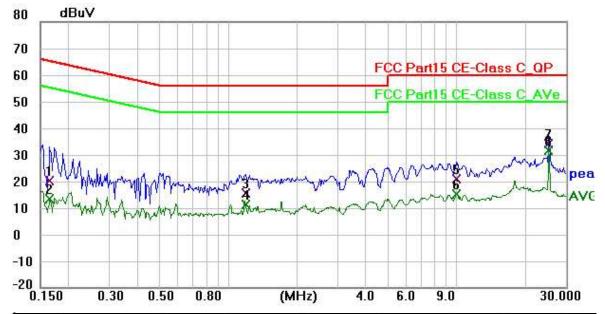

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB)       | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------------|-----------------|-----------------|----------------|----------|-----|
| 1   | 0.1655             | 10.02             | 10.33                | 20.35           | 65.18           | -44.83         | QP       | Р   |
| 2   | 0.1655             | 2.96              | 1 <mark>0</mark> .33 | 13.29           | 55.18           | -41.89         | AVG      | Р   |
| 3   | 1.1873             | 4.84              | 10.65                | 15.49           | 56.00           | -40.51         | QP       | Р   |
| 4   | 1.1873             | 0.48              | 10.65                | 11.13           | 46.00           | -34.87         | AVG      | Р   |
| 5   | 9.9381             | 7.12              | 13.80                | 20.92           | 60.00           | -39.08         | QP       | Р   |
| 6   | 9.9381             | 1.21              | 13.80                | 15.01           | 50.00           | -34.99         | AVG      | Р   |
| 7   | 25.2300            | 18.91             | 15.29                | 34.20           | 60.00           | -25.80         | QP       | Р   |
| 8   | 25.2300            | 16.46             | 15.29                | 31.75           | 50.00           | -18.25         | AVG      | Р   |

Report No.: TW2503143E Page 11 of 52

Date: 2025-03-27



# B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Charging and Communication by BT** 

**Results: Pass** 

Please refer to following diagram for individual

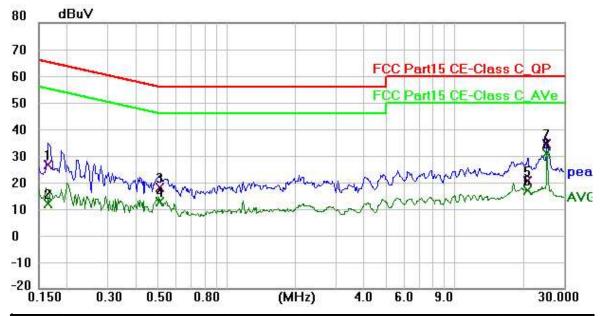

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1   | 0.1655             | 16.22             | 10.33          | 26.55           | 65.18           | -38.63         | QP       | Р   |
| 2   | 0.1655             | 1.71              | 10.33          | 12.04           | 55.18           | -43.14         | AVG      | Р   |
| 3   | 0.5127             | 7.76              | 10.40          | 18.16           | 56.00           | -37.84         | QP       | Р   |
| 4   | 0.5127             | 2.14              | 10.40          | 12.54           | 46.00           | -33.46         | AVG      | Р   |
| 5   | 20.9049            | 4.33              | 16.24          | 20.57           | 60.00           | -39.43         | QP       | Р   |
| 6   | 20.9049            | 0.63              | 16.24          | 16.87           | 50.00           | -33.13         | AVG      | Р   |
| 7   | 25.2300            | 19.03             | 15.29          | 34.32           | 60.00           | -25.68         | QP       | Р   |
| 8   | 25.2300            | 15.66             | 15.29          | 30.95           | 50.00           | -19.05         | AVG      | Р   |

Page 12 of 52

Report No.: TW2503143E

Date: 2025-03-27



#### **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 9kHz to 25 GHz was investigated. The frequency spectrum is set as follows:


| Frequency    | Detector   | RBW    | VBW    | Value      |
|--------------|------------|--------|--------|------------|
| 9KHz-150KHz  | Quasi-peak | 200Hz  | 600Hz  | Quasi-peak |
| 150KHz-30MHz | Quasi-peak | 9KHz   | 30KHz  | Quasi-peak |
| 30MHz-1GHz   | Quasi-peak | 120KHz | 300KHz | Quasi-peak |
| Above 40Up   | Peak       | 1MHz   | 3MHz   | Peak       |
| Above 1GHz   | Peak       | 1MHz   | 10Hz   | Average    |

(Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.

- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

#### Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

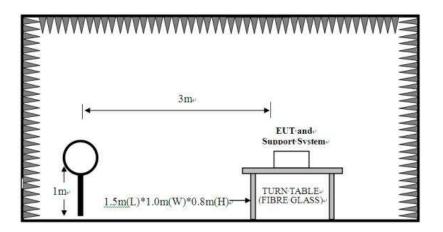


Date: 2025-03-27



For radiated emissions from 30MHz to1GHz

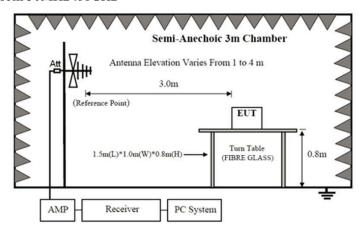

For radiated emissions above 1GHz

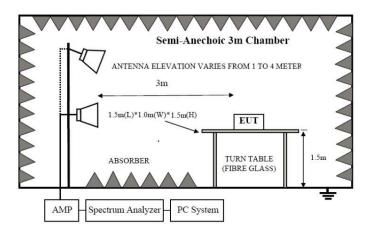

- 6.2 Configuration of the EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

#### A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

| Fundamental Frequency | Field Stre | ength of Fundamental (3m) | Field Strength of Harmonics (3m) |        |  |  |
|-----------------------|------------|---------------------------|----------------------------------|--------|--|--|
| (MHz)                 | mV/m       | dBuV/m                    | uV/m                             | dBuV/m |  |  |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2503143E Page 14 of 52

Date: 2025-03-27



| 2400-2483.5 50 | 94 (Average) | 114 (Peak) | 500 | 54 (Average) | 74 (Peak) |
|----------------|--------------|------------|-----|--------------|-----------|
|----------------|--------------|------------|-----|--------------|-----------|

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

# B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

|                       | 1            | 8 1                               |
|-----------------------|--------------|-----------------------------------|
| Frequency Range (MHz) | Distance (m) | Field strength (dB $\mu$ V/m)     |
| 0.009-0.490           | 3            | 20log(2400/F(kHz)) +40log (300/3) |
| 0.490-1.705           | 3            | 20log(24000/F(kHz)) +40log (30/3) |
| 1.705-30              | 3            | 69.5                              |
| 30-80                 | 3            | 40.                               |
| 88-216                | 3            | 43.5                              |
| 216-960               | 3            | 46.0                              |
| Above 960             | 3            | 54.0                              |

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. The two modulation modes of GFSK, Pi/4D-QPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.
- 6. Battery was fully charged during test

Report No.: TW2503143E Page 15 of 52

Date: 2025-03-27




#### 6.5 Test result

# A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

#### Horizontal

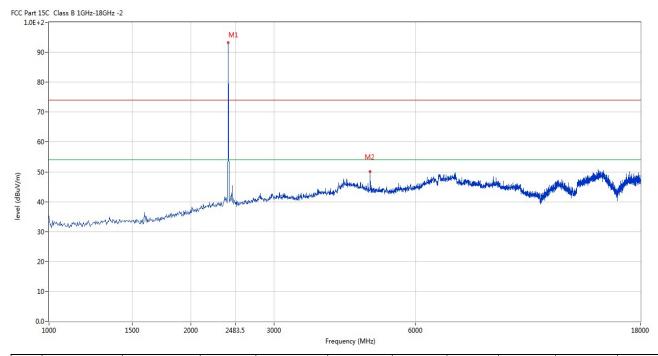


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |            |         |
| 1   | 2402      | 93.21    | -3.57  | 114.0    | -20.79     | Peak     | 145.00 | 100    | Horizontal | Pass    |
| 2   | 4802.799  | 50.05    | 3.12   | 74.0     | -23.95     | Peak     | 180.00 | 100    | Horizontal | Pass    |

Report No.: TW2503143E Page 16 of 52

Date: 2025-03-27



#### Vertical

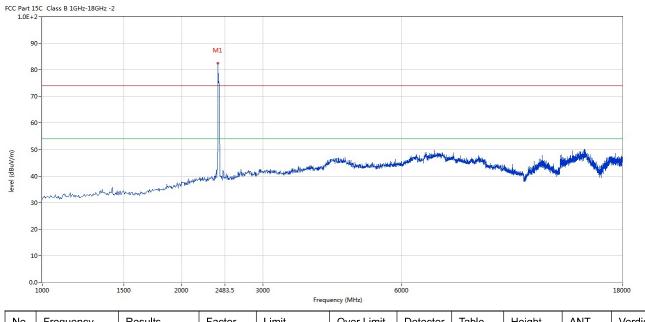

| Ī | No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT      | Verdict |
|---|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
|   |     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |          |         |
|   | 1   | 2402      | 82.41    | -3.57  | 114.0    | -31.59     | Peak     | 179.00 | 100    | Vertical | Pass    |


Report No.: TW2503143E Page 17 of 52

Date: 2025-03-27



Please refer to the following test plots for details: Middle Channel-2441MHz

#### Horizontal

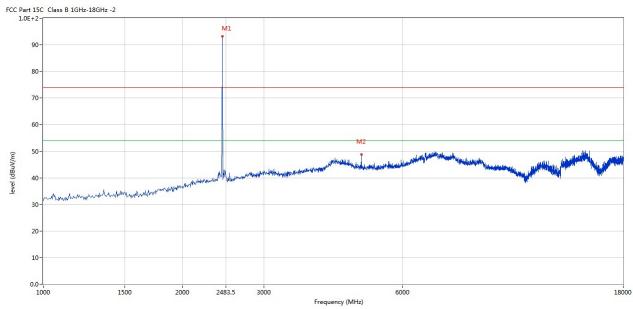


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |            |         |
| 1   | 2441      | 93.21    | -3.57  | 114.0    | -20.79     | Peak     | 148.00 | 100    | Horizontal | Pass    |
| 2   | 4883.529  | 48.71    | 3.20   | 74.0     | -25.29     | Peak     | 154.00 | 100    | Horizontal | Pass    |

Report No.: TW2503143E Page 18 of 52

Date: 2025-03-27



#### Vertical

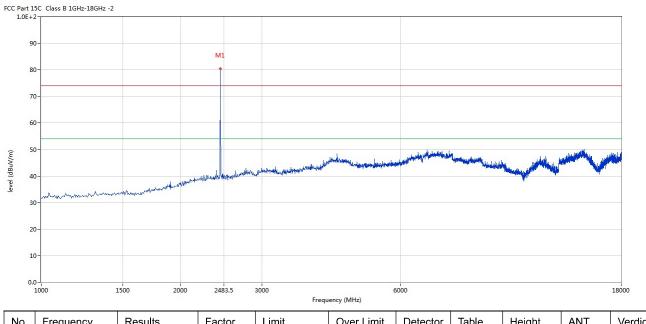

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |          |         |
| 1   | 2441      | 80.45    | -3.57  | 114.0    | -33.55     | Peak     | 237.00 | 100    | Vertical | Pass    |


Report No.: TW2503143E Page 19 of 52

Date: 2025-03-27



Please refer to the following test plots for details: High Channel-2480MHz

#### Horizontal

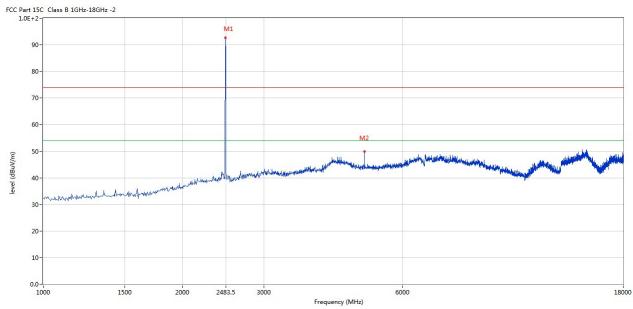

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |            |         |
| 1   | 2480      | 92.58    | -3.57  | 114.0    | -21.42     | Peak     | 176.00 | 100    | Horizontal | Pass    |
| 2   | 4960.010  | 49.98    | 3.36   | 74.0     | -24.02     | Peak     | 181.00 | 100    | Horizontal | Pass    |