

Prepared (also subject responsible if other)

**Nick Cooke**

Approved

Checked

Company Internal  
MARKING DRAWING

No.

Date

24 Jul 03

Rev

Reference

## **Type:**

Z600

### **1 Label**

The label used for marking is defined in the prod. Specification.

### **2 Placing**


The label shall be placed on the back of the telephone according to the Assembly Drawing, A-3627-821-A

### **3 Print layout**

Printing area 34.5 x 21.1 mm. Conceptual picture below.

Line No.

- 1.
- 2.
- 3.
- 4.
- 5.
- 6.
- 7.
- 8.

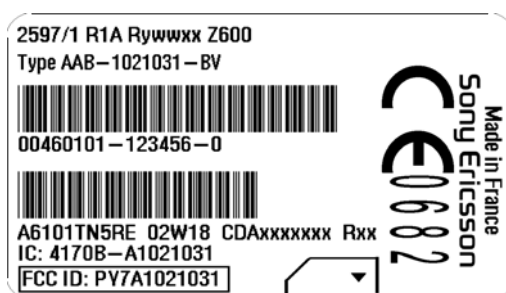

- 9.
- 10.
- 11.

Line	Text	Text height
1.	Model name, Reduced DPY-number incl. R-state and CDA number incl. R-state.	Min 1,2 mm
2.	Type number, Factory code of actual flash-DC.	Min 1,2 mm
3.	IMEI number as bar code	Min 1,2 mm
4.	Serial number as characters, production year + week.	Min 1,2 mm
5.	Serial number as bar code	Min 2,5 mm
6.	IMEI number as characters, Repair week.	Min 1,2 mm
7.	Country approval mark 2 (IC).	Min 1,2 mm



Prepared (also subject responsible if other)

Nick Cooke

Approved

Checked

Company Internal  
MARKING DRAWING

No.

Date

Rev

Reference

24 Jul 03

8.	Country approval mark 1 (FCC ID), G-, H-, Y <sub>1</sub> -, Y <sub>2</sub> -, Y <sub>3</sub> -field.	Min 1,2 mm
9.	Approval mark.	Min 5,0 mm
10.	Sony Ericsson Stylized name.	Min 1,5 mm
11.	Marking of origin.	Min 1,2 mm

## 4 Definitions

- Model name  
Reduced DPY-number incl. R-state

Actual model name of the included phone e.g. Z600  
The product number including the R-state, according to the 1095- for the DPY, without "DPY 101" e.g. if DPY 101 2541/1 R3A is produced the printing should be: "2541/1 R3A".
- CDA number incl. R-state  
Sony Ericsson Type number  
Flash DC

The product number of the CDA file loaded including R-state.  
"Type: AAB-1021031-BV".  
Unit code according to Ericsson group Standard 0012-101 and SEMC document 1050-LZT 108 6537 Uen.
- IMEI number as bar code

See below for definition of IMEI-number. The bar code shall only contain the digits of the IMEI number (no dash). According to Ericsson corporate standard 102 01-109.  
Code 128 symbology, code C subset. If uneven number of digits, code B subset shall be used for the last digit.
- Serial number as characters  
Production week

"S/N:XXXXXXXXXX"  
According to Ericsson group standard 0012-101 and SEMC document 1050-LZT 108 6537 Uen.  
The production week shall be given as yyWww (yy = year, ww = week) according to the ISO 8601 standard.
- Serial number as bar code

According to Ericsson corporate standard 102 01 – 109. Code 128 symbology.
- IMEI number as characters

"XXXXXXXX-XXXXXX-X"  
The IMEI number has format:  
TAC-SNR-CD  
TAC = XXXXXXXX (Type approval code) according to the Marking drawing 3/151 86- for the SVV.  
SNR = Serial number from 000000 to 999999  
CD = A check digit, from 0-9, calculated according to the Luhn formula



Prepared (also subject responsible if other)

Nick Cooke

Approved

Checked

Company Internal  
MARKING DRAWING

No.

Date

Rev

Reference

24 Jul 03

- |     |                                 |  |
|-----|---------------------------------|--|
|     |                                 | (ISO/IEC 7812), GSM 02.16.   |
|     | Repair week                     | The field shall be left blank unless a repair centre repairs the unit. The repair week shall then be given as Rywwxx. (R = repair, y = year, ww = week, xx = R-state e.g. 1A). |
| 7.  | Country approval mark 2         | "IC: 4170B-A1021031"   |
| 8.  | Country approval mark 1         | "FCC ID: PY7A1021031"  |
|     | G-field                         | R-state identification of the type approved CXC-module according to the marking drawing 3/151 86- for the SVV.   |
|     | H-field                         | R-state identification of the type approved HW according to the Marking drawing 3/151 86- for the SVV.   |
|     | Y <sub>1</sub> -field           | R-state identification of the actual KRH according to the Marking drawing 3/151 86- for the SVV.   |
|     | Y <sub>2</sub> -field           | ROA structure identification according to the Marking drawing 3/151 86- for the SVV.   |
|     | Y <sub>3</sub> -field           | R-state identification of the actual ROA according to the Marking drawing 3/151 86- for the SVV.   |
| 9.  | Approval mark + the text "0682" | According to 1424 - SVF 930 52 Ux followed by the text "0682".<br>The Notified body number 0682 according to the RTTE directive.   |
| 10. | Sony Ericsson Stylized name     | The print height for Notified body number and approval mark CE is a regulatory requirement.<br>According to corporate standard 190 89 - EN/LZT 108 5347 Ux.                    |
| 11. | Marking of origin               | The field shall be left blank unless otherwise stated in a separate 1/151 86- according to 1095- of the actual SVV.  |

## 5 Print regulations

The printing shall be well readable and permanent.

Typeface	OCR-B
Type size	min 1.2 mm
Trademark	min 2.25 mm
Approval marks	min 5.0 mm