



No. I22Z61533-SEM03

For

Wingtech Mobile Communications Co.,Ltd.

5G Mobile Phone

Model name: Celero5G+

With

Hardware Version: V1.0

Software Version: Celero5GPlus_0.01.03

FCC ID: 2APXW-CELERO5GPLUS

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

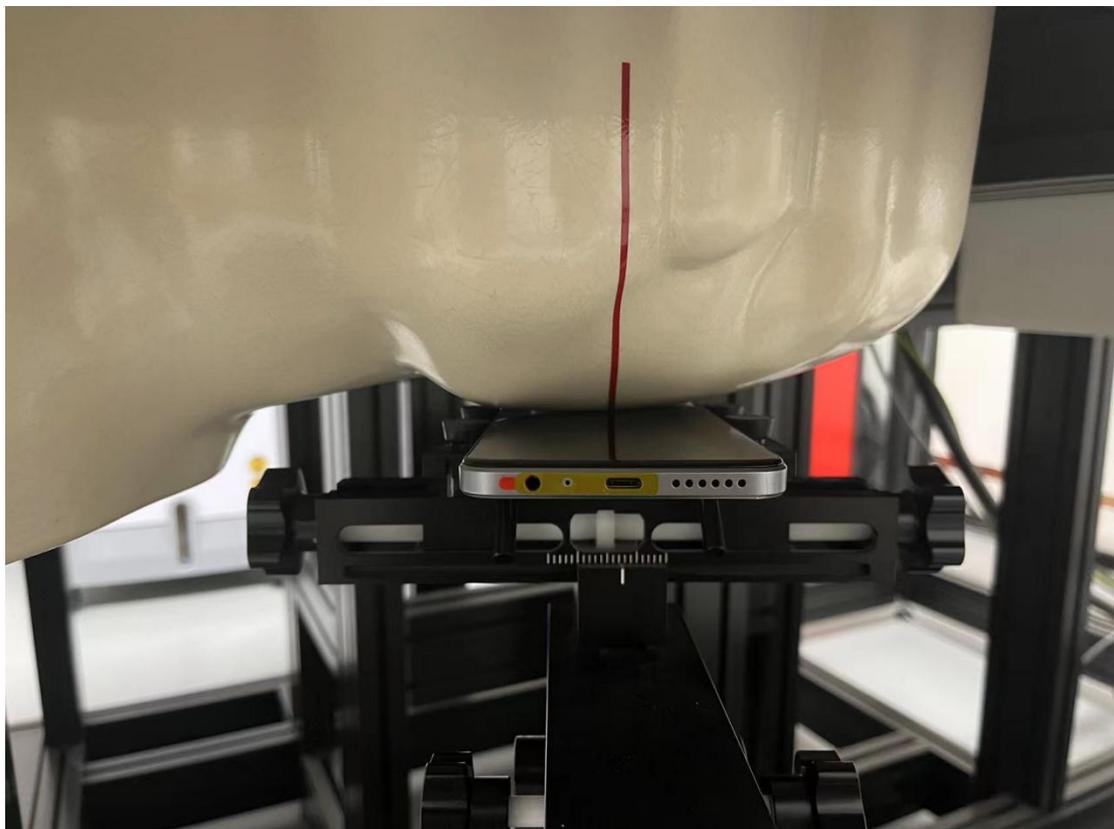


Picture 2: Left Hand Touch Cheek Position

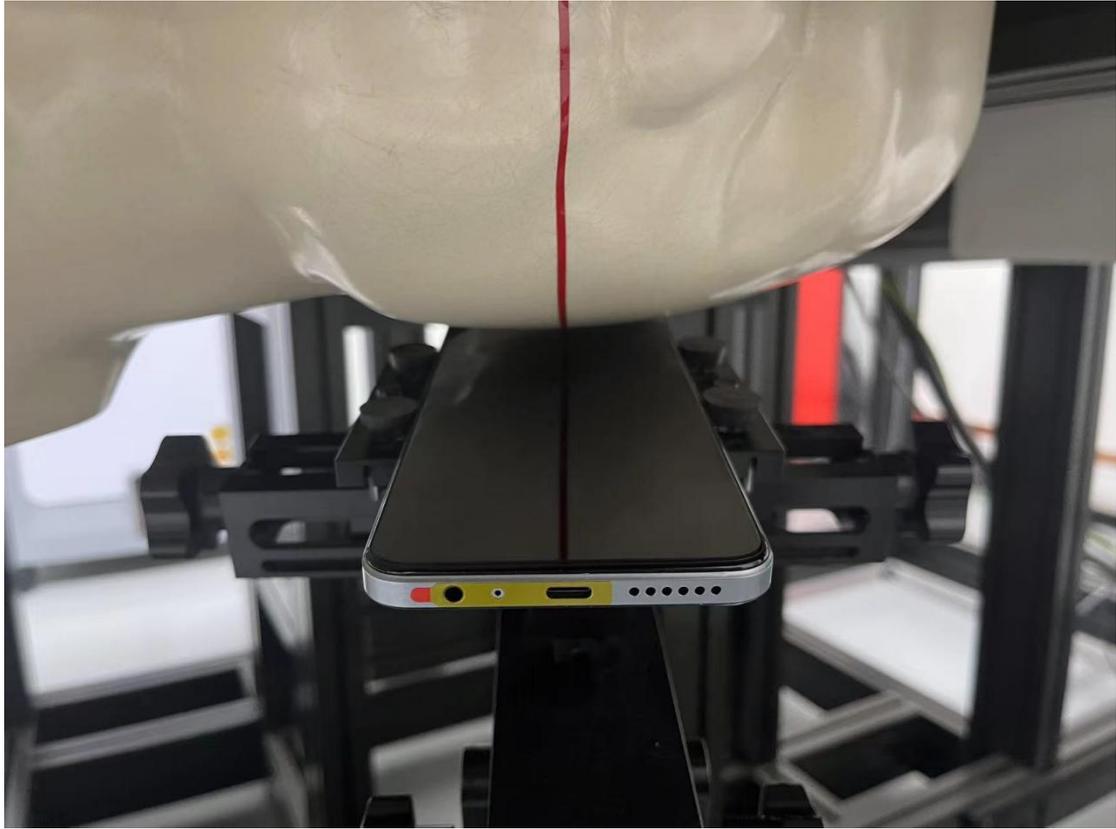

Picture 3: Left Hand Tilt 15° Position

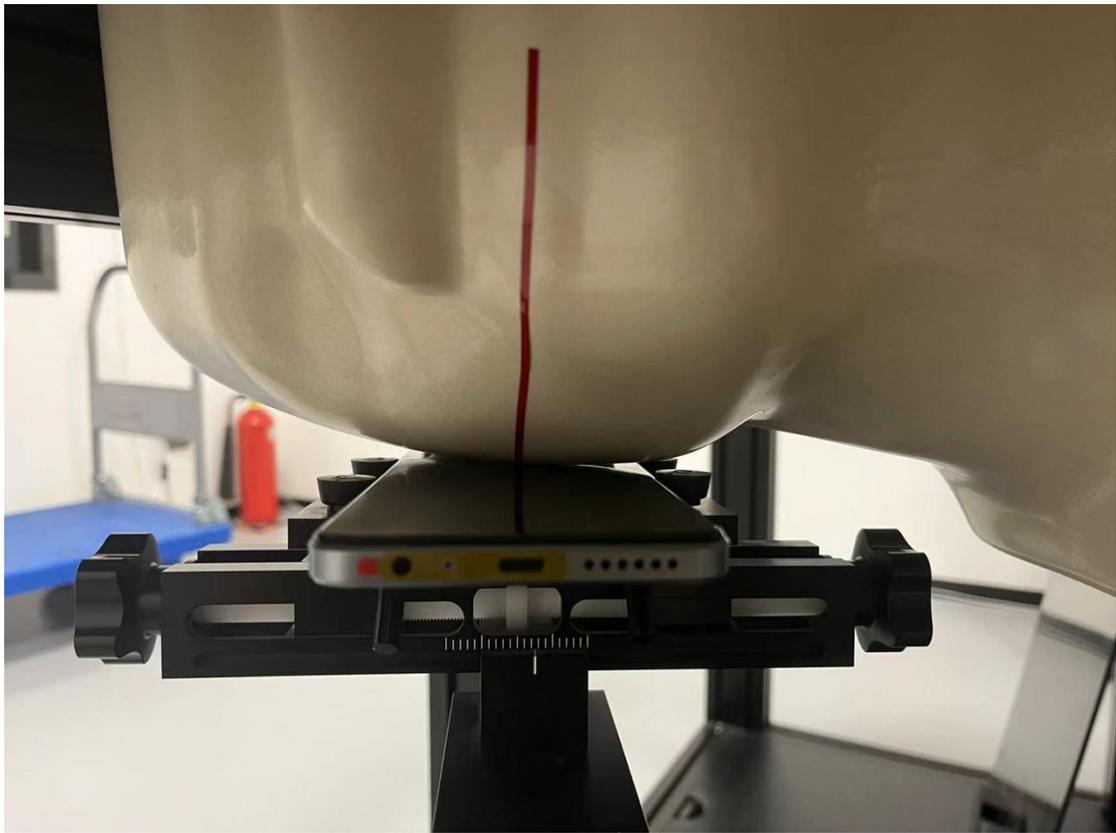


Picture 4: Right Hand Touch Cheek Position

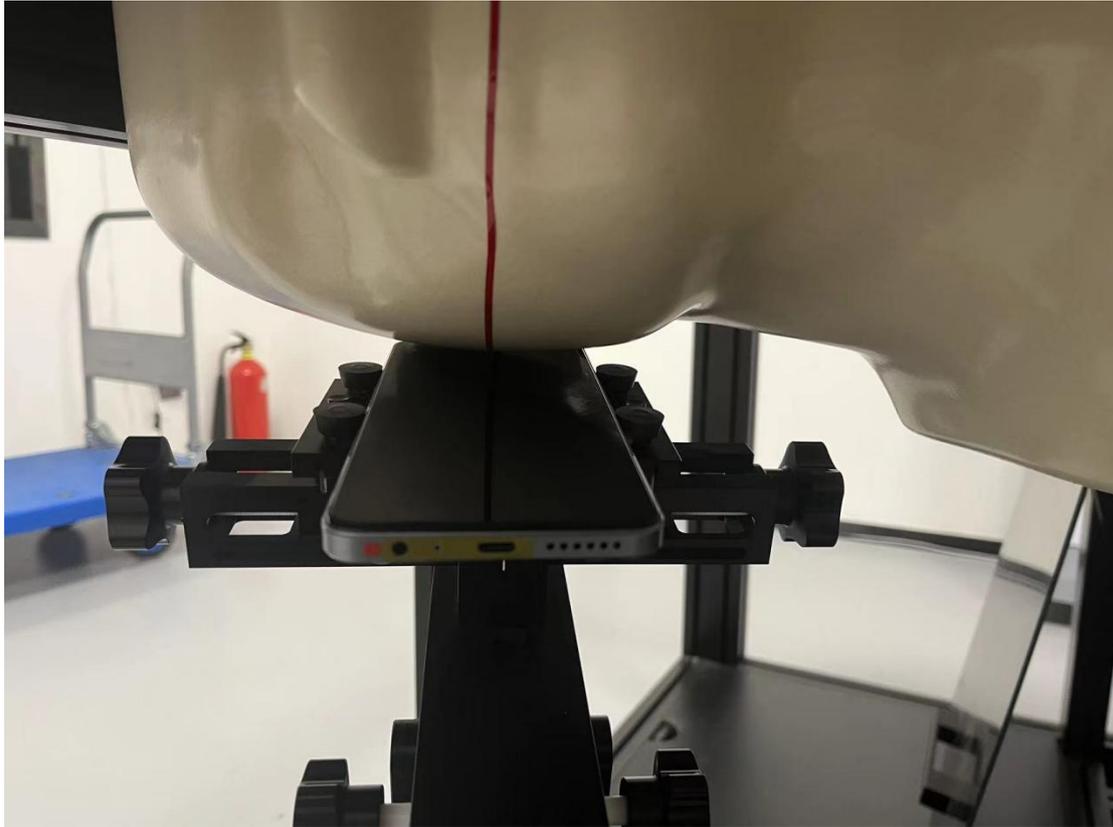


Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 17 test positions all with the distance =10mm/13mm/16mm/19mm/20mm//21mm/22mm/23mm/24mm between the EUT and the phantom bottom:

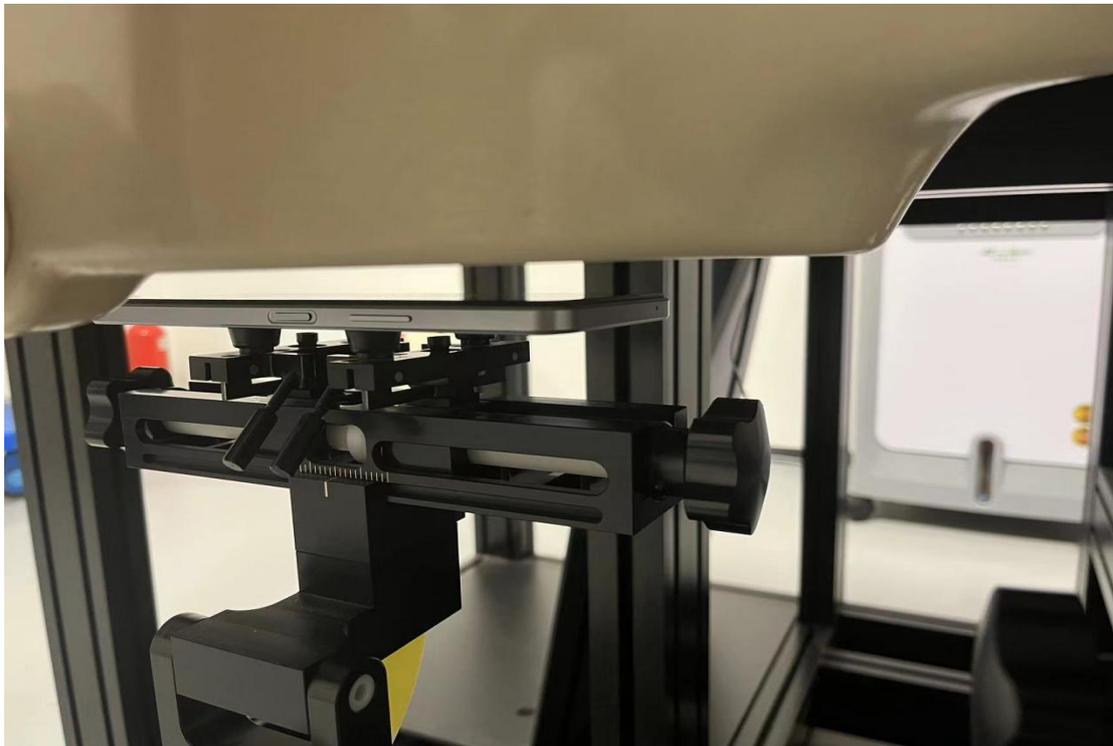


Picture 6: Front 10mm

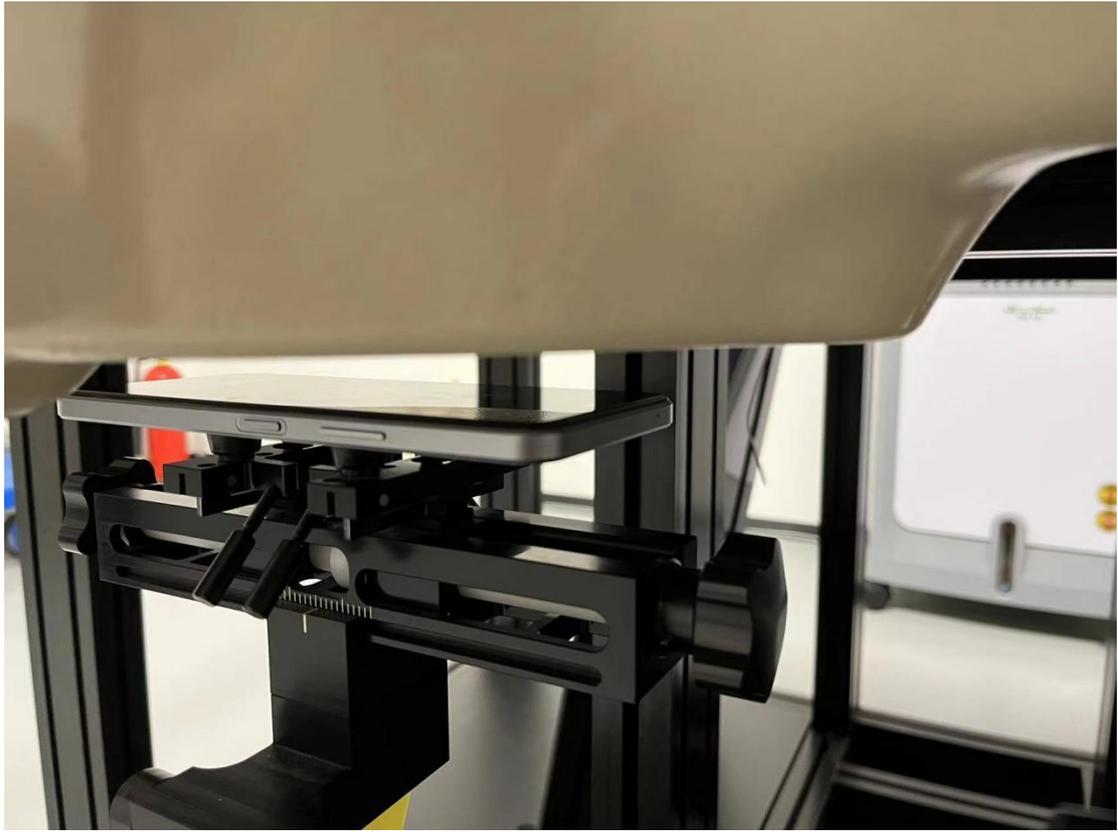


Picture 7: Front 17mm

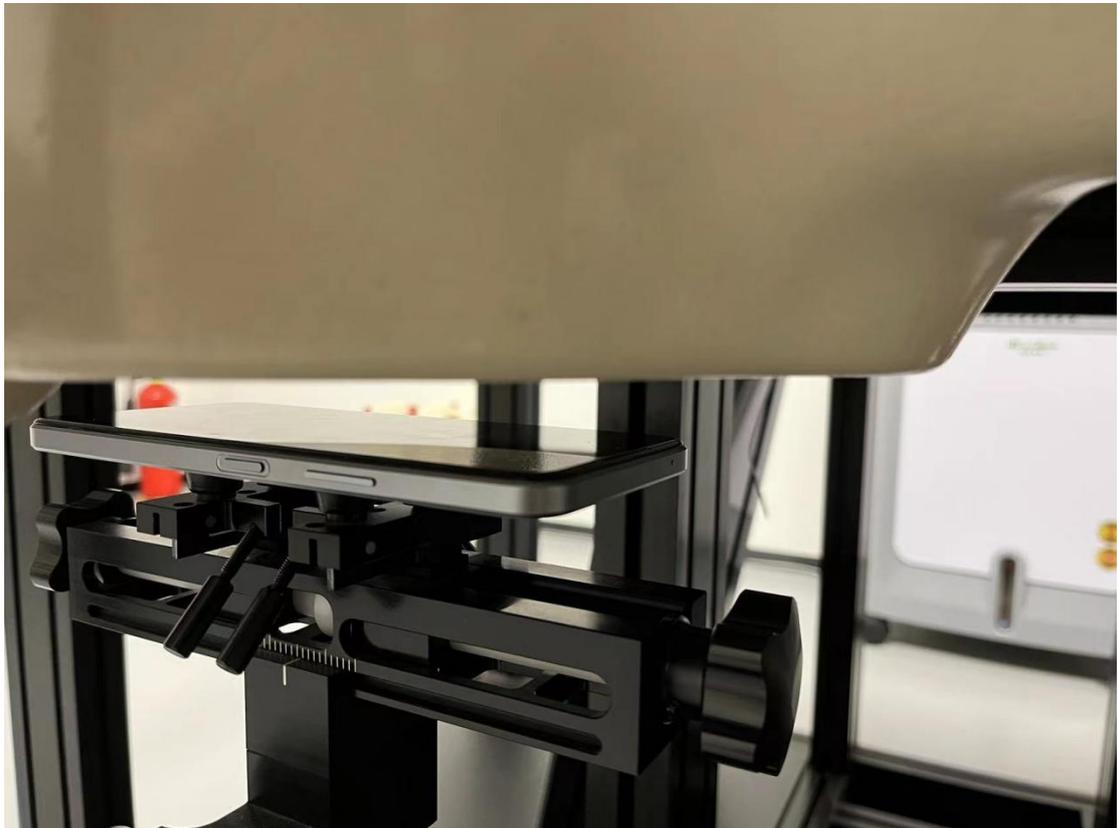


Picture 8: Front 20mm

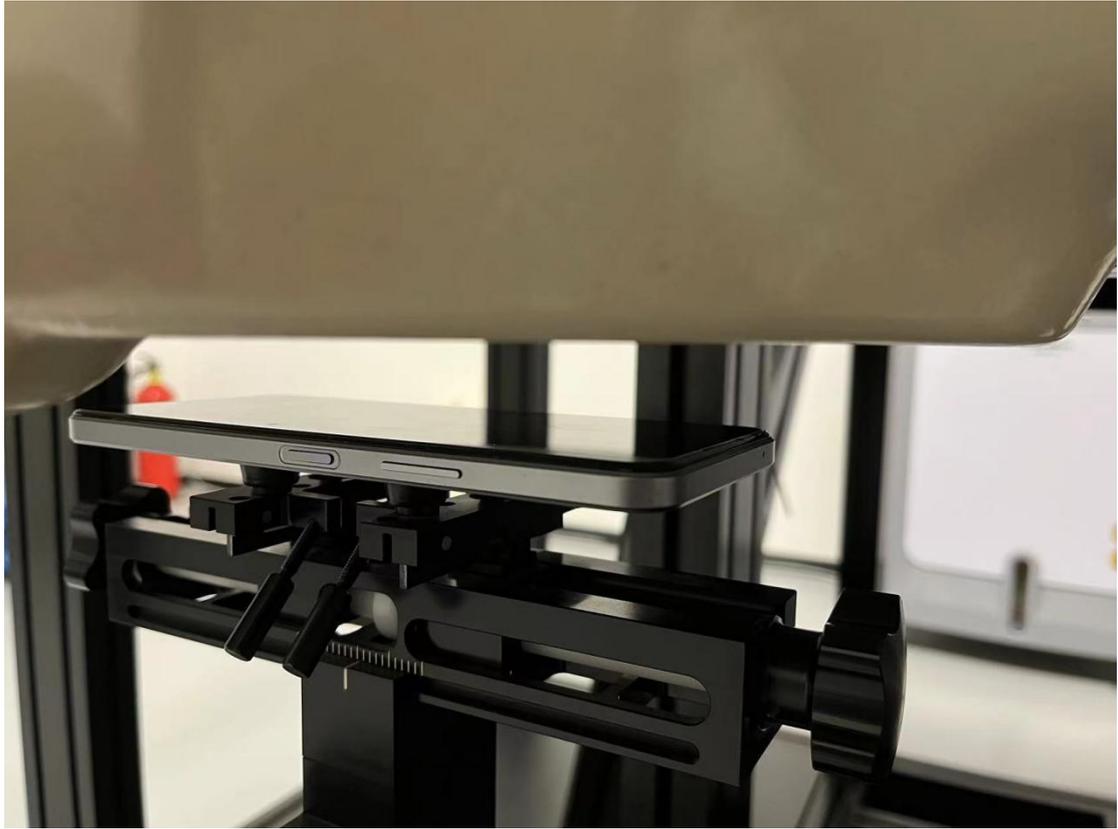


Picture 9: Front 22mm

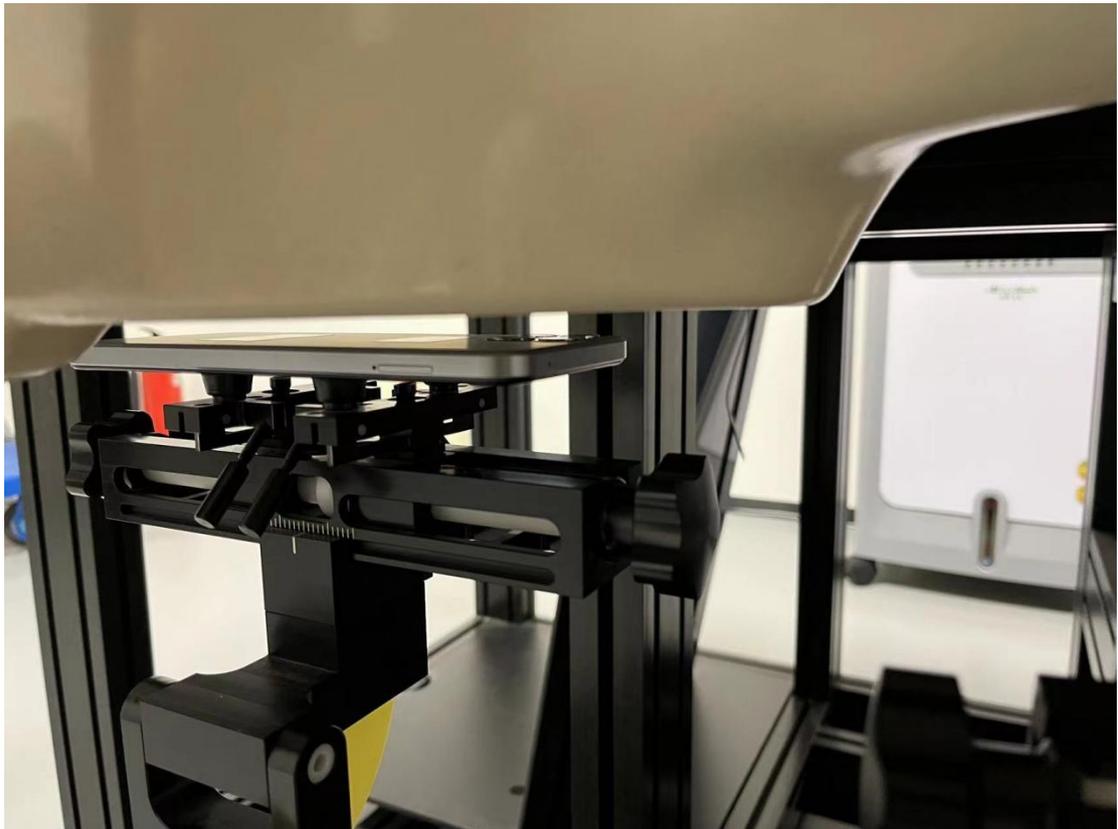


Picture10: Rear 10mm

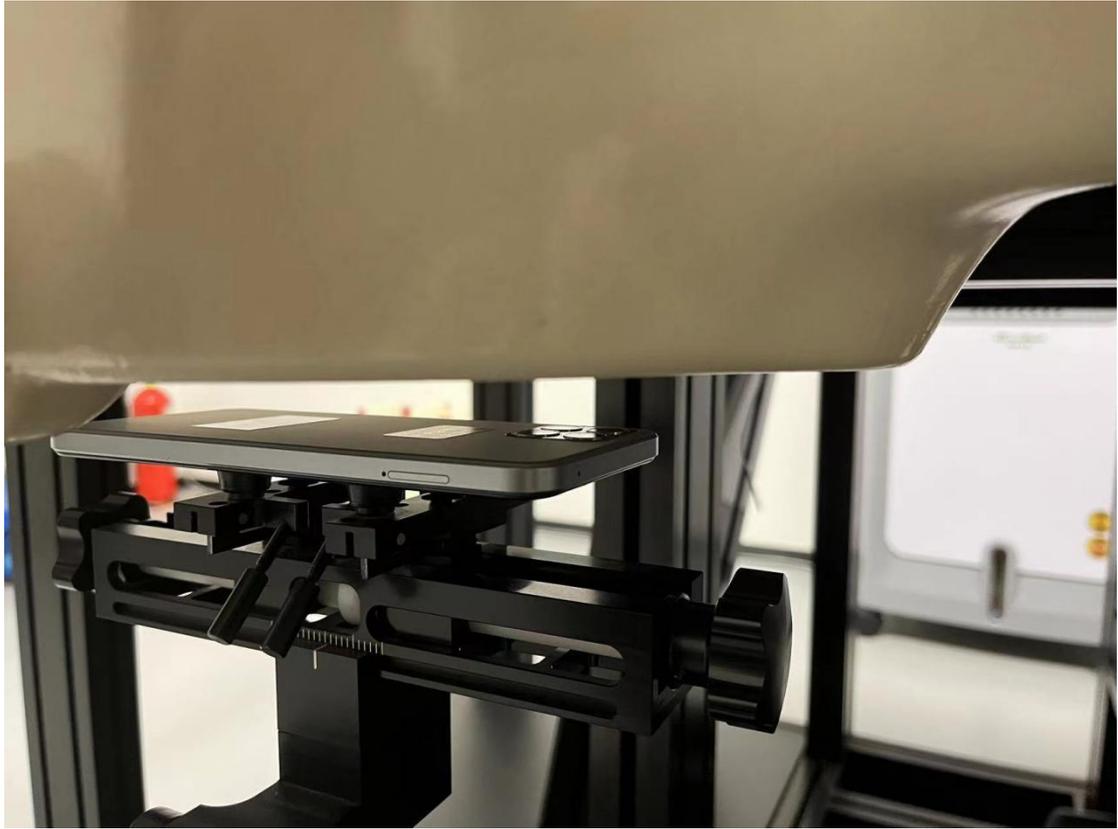


Picture11: Rear 21mm

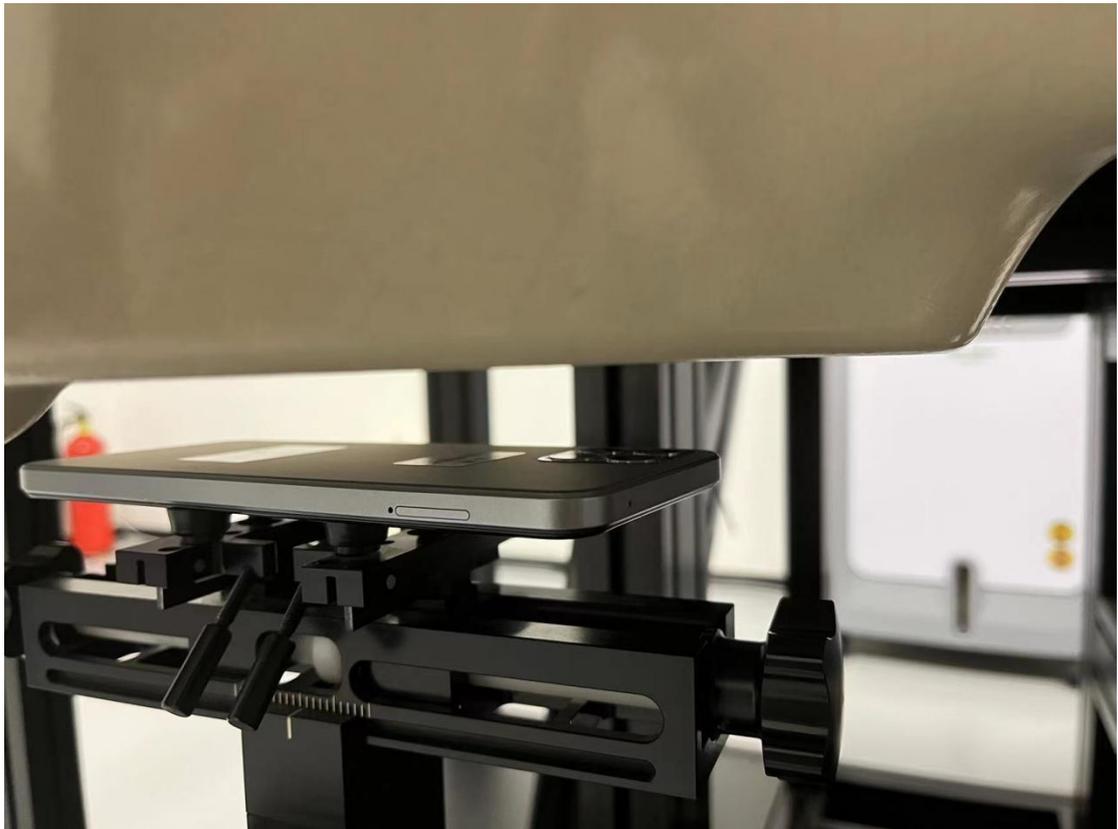


Picture12: Rear 23mm

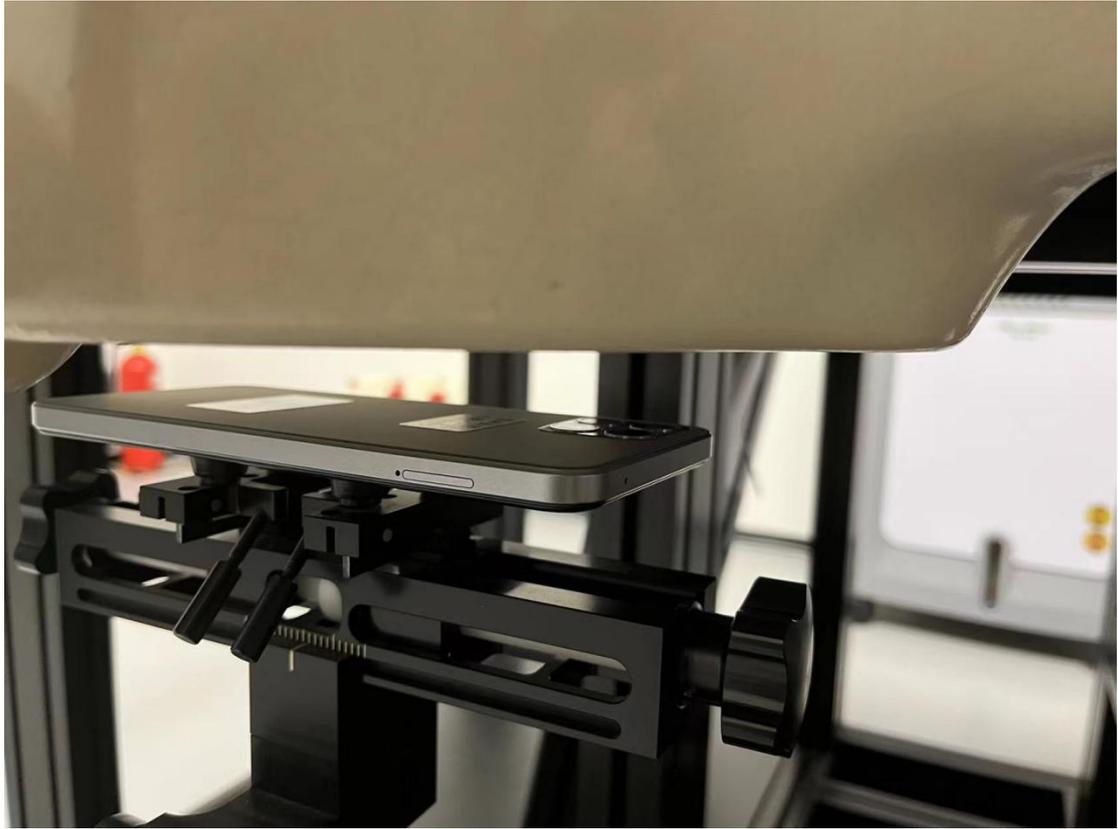


Picture13: Rear 24mm

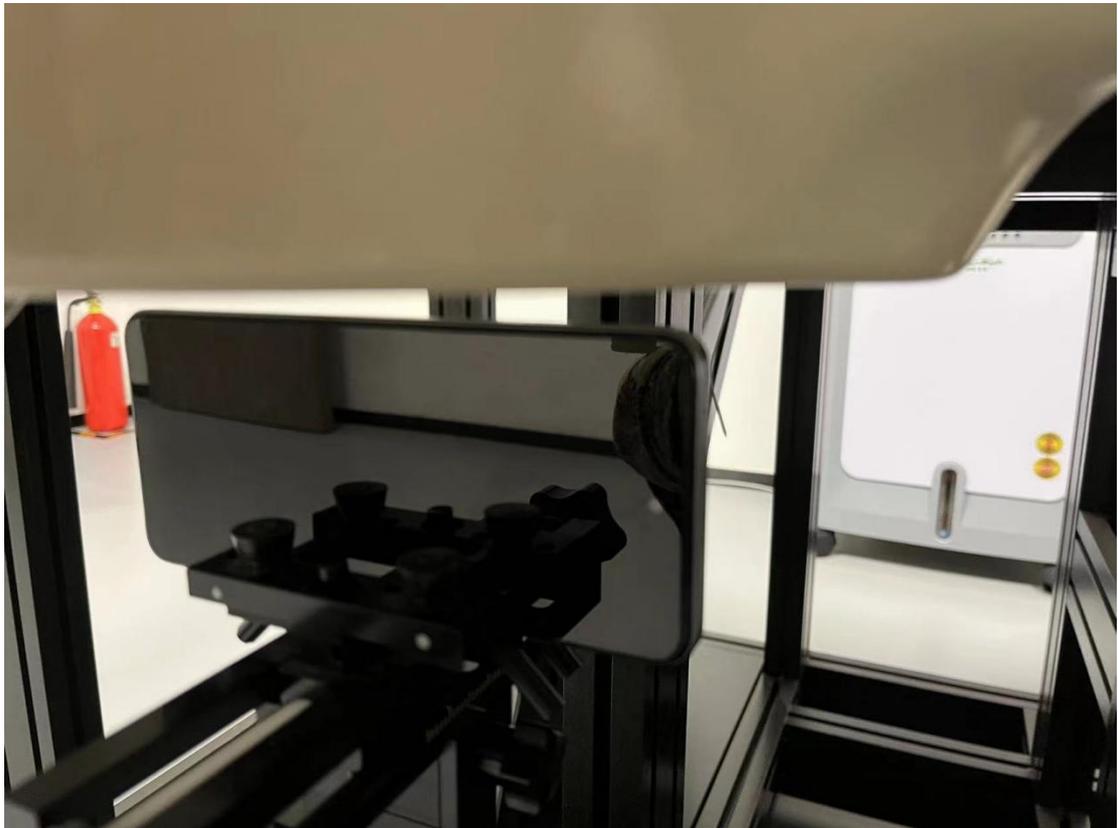


Picture 14: Left 10mm

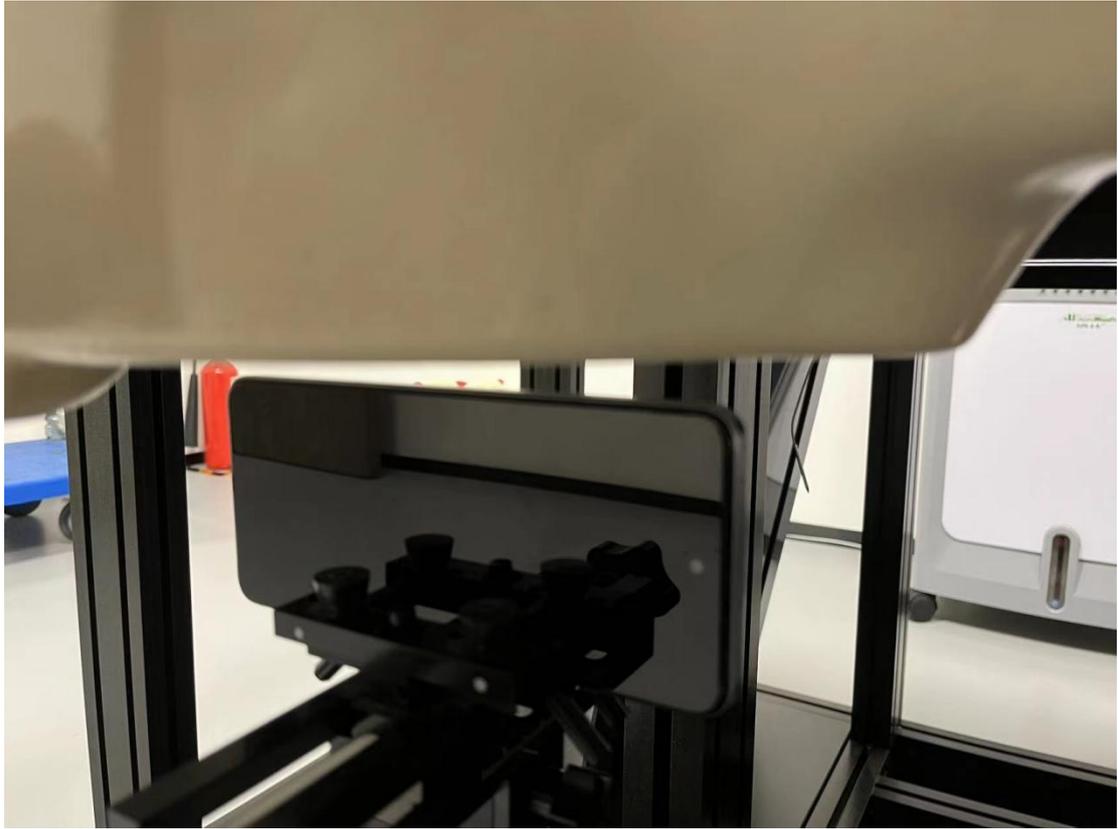

Picture 15: Left 14mm

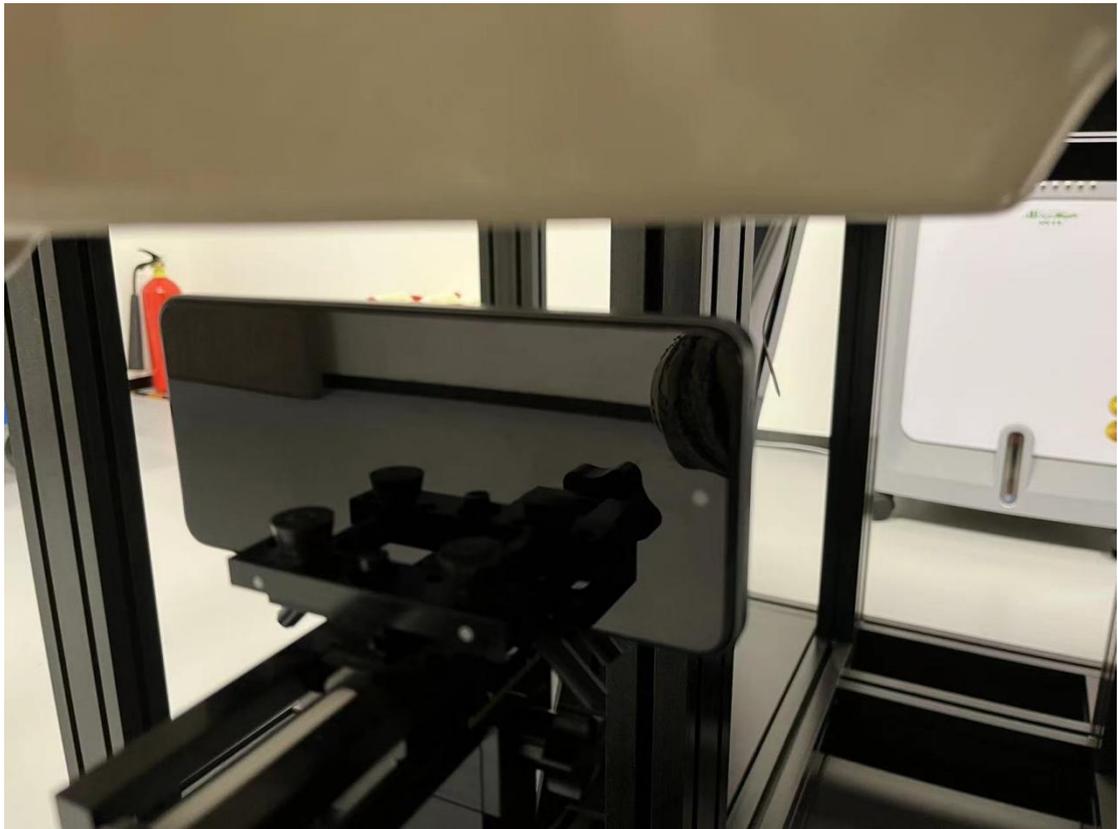


Picture 16: Left 20mm

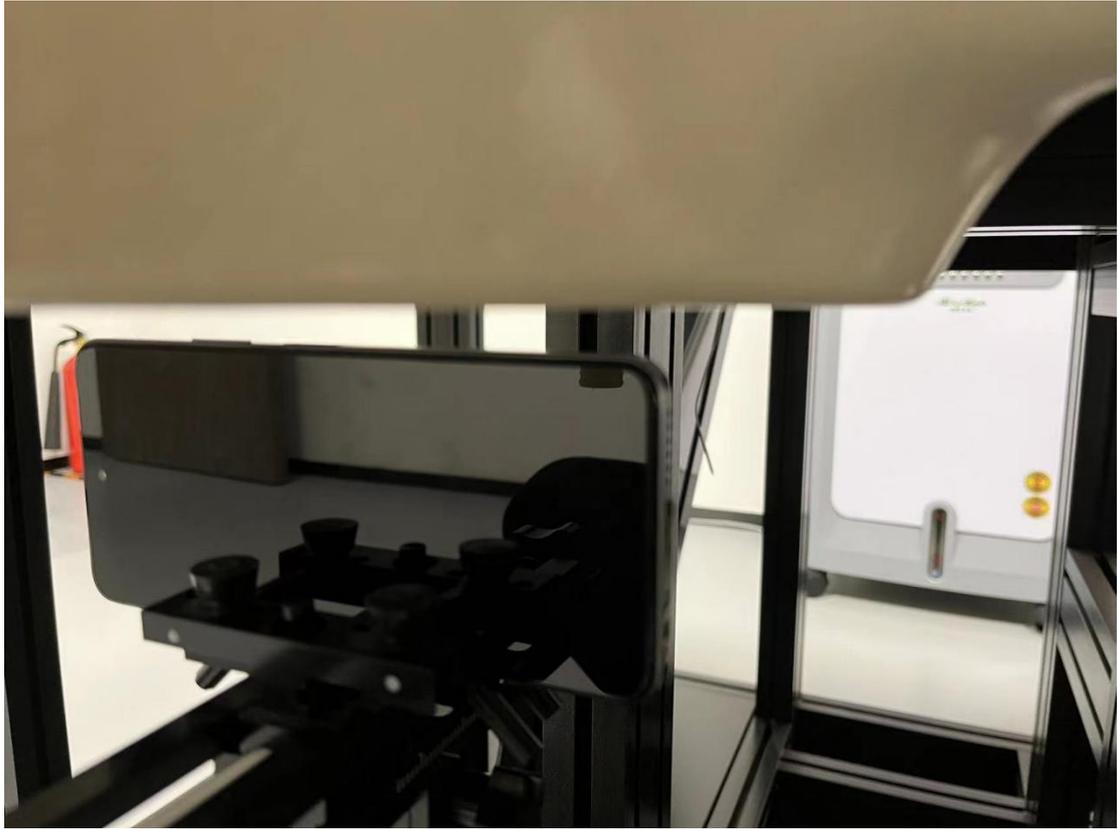

Picture 17: Right 10mm



Picture 18: Top 10mm

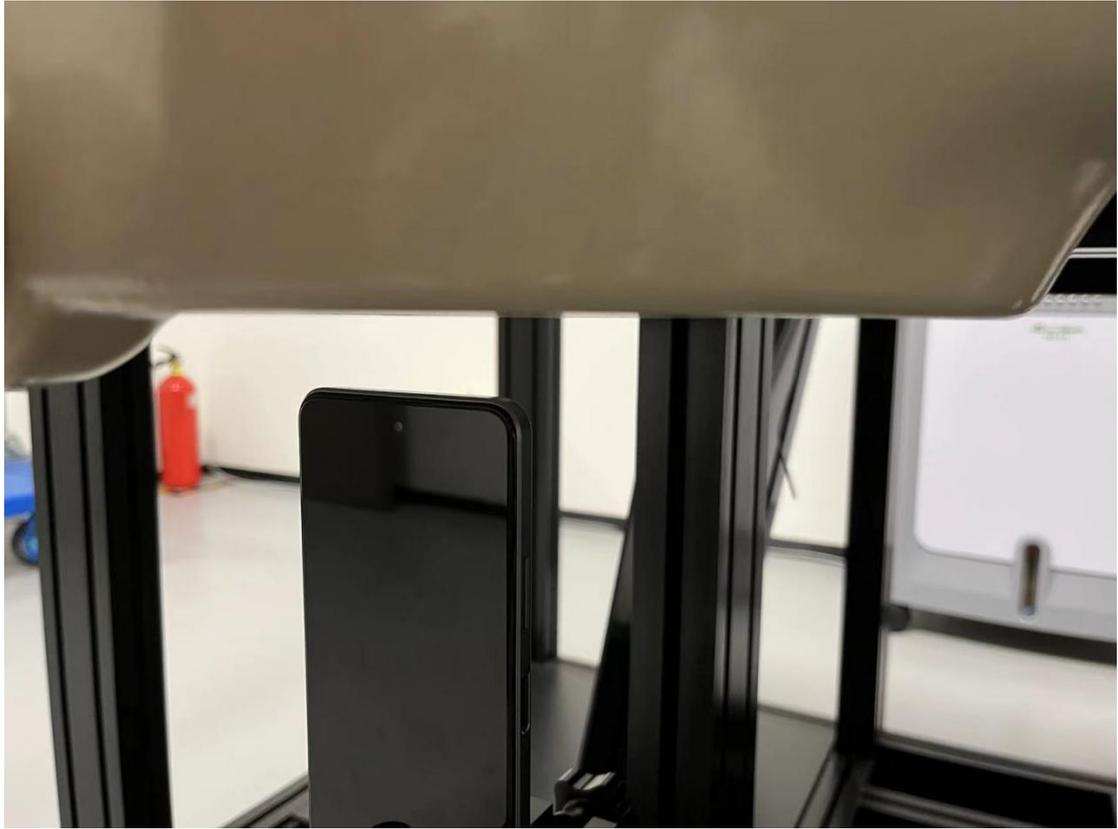

Picture 19: Top 22mm



Picture 20: Top 25mm



Picture 21: Bottom 10mm



Picture 22: Bottom 20mm