

Date: 2024-10-11

System Check_Head_750MHz**DUT: D750V3 - SN1117**

Communication System: CW; Frequency: 750.000 MHz

Medium: HSL_750_241011 Medium parameters used: $f = 750.000$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.4, 9.22, 10.93); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.436 W/kg; SAR (10g) = 0.290 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.426 W/kg; SAR (8g) = 0.296 W/kg; SAR (10g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 87.6 %

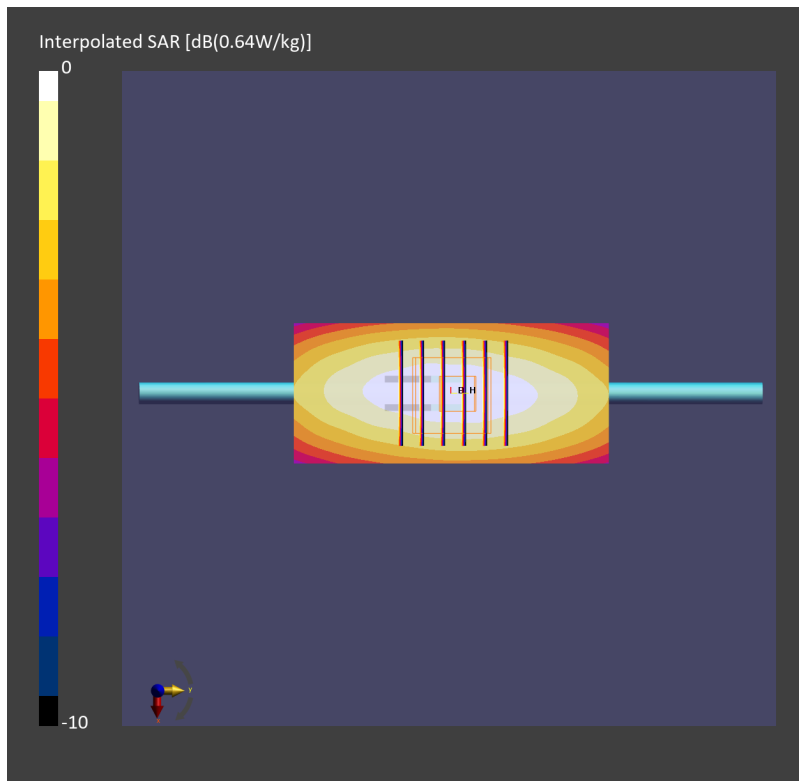

Date: 2024-10-20

System Check_Head_750MHz**DUT: D750V3 - SN1117**

Communication System: CW; Frequency: 750.000 MHz

Medium: HSL_750_241020 Medium parameters used: $f = 750.000$ MHz; $\sigma = 0.890$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.4, 9.22, 10.93); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.431 W/kg; SAR (10g) = 0.288 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.429 W/kg; SAR (8g) = 0.298 W/kg; SAR (10g) = 0.282 W/kg

Smallest distance from peaks to all points 3 dB below = 19.7 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

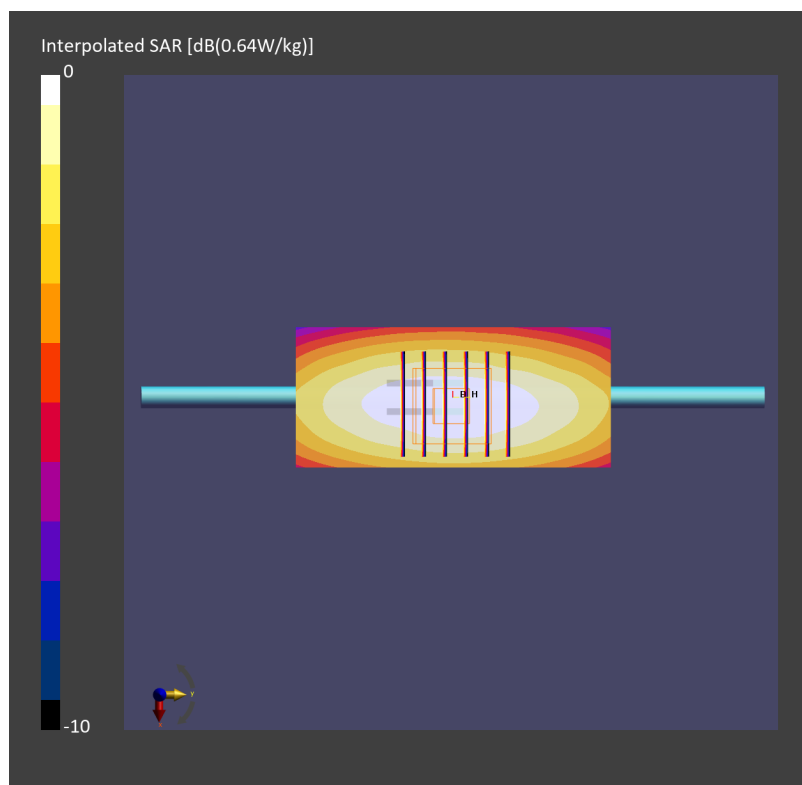

Date: 2024-10-23

System Check_Head_750MHz**DUT: D750V3 - SN1117**

Communication System: CW; Frequency: 750.000 MHz

Medium: HSL_750_241023 Medium parameters used: $f = 750.000$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.4, 9.22, 10.93); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.423 W/kg; SAR (10g) = 0.284 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.424 W/kg; SAR (8g) = 0.295 W/kg; SAR (10g) = 0.280 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 87.9 %

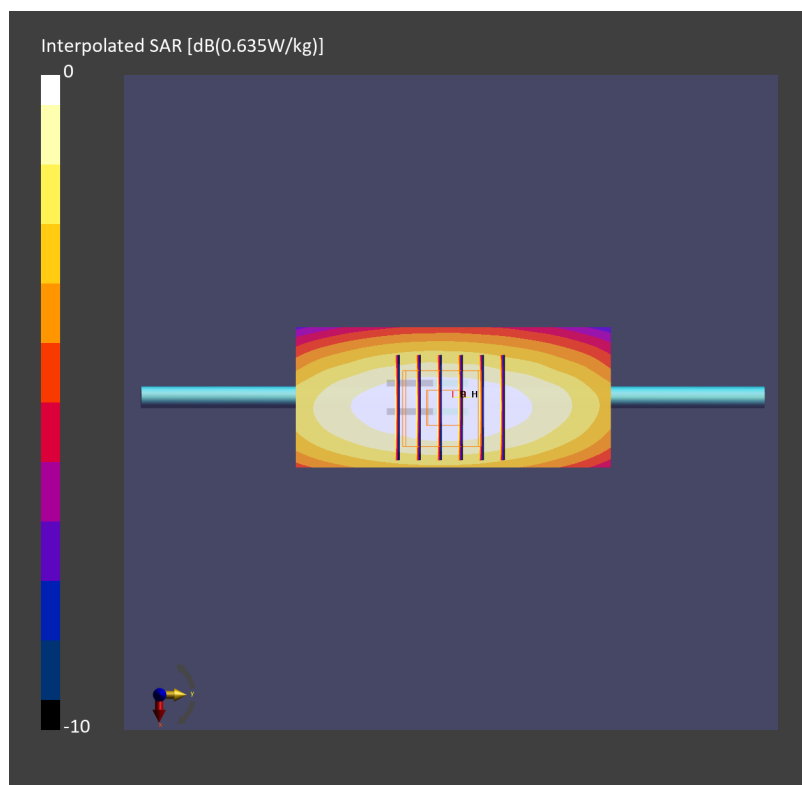

Date: 2024-10-11

System Check_Head_850MHz

DUT: D835V2 - SN4d060

Communication System: CW; Frequency: 835.000 MHz

Medium: HSL_850_241011 Medium parameters used: $f = 835.000$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.06, 8.88, 10.53); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.510 W/kg; SAR (10g) = 0.334 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.504 W/kg; SAR (8g) = 0.346 W/kg; SAR (10g) = 0.328 W/kg

Smallest distance from peaks to all points 3 dB below = 22.1 mm

Ratio of SAR at M2 to SAR at M1 = 88.7 %

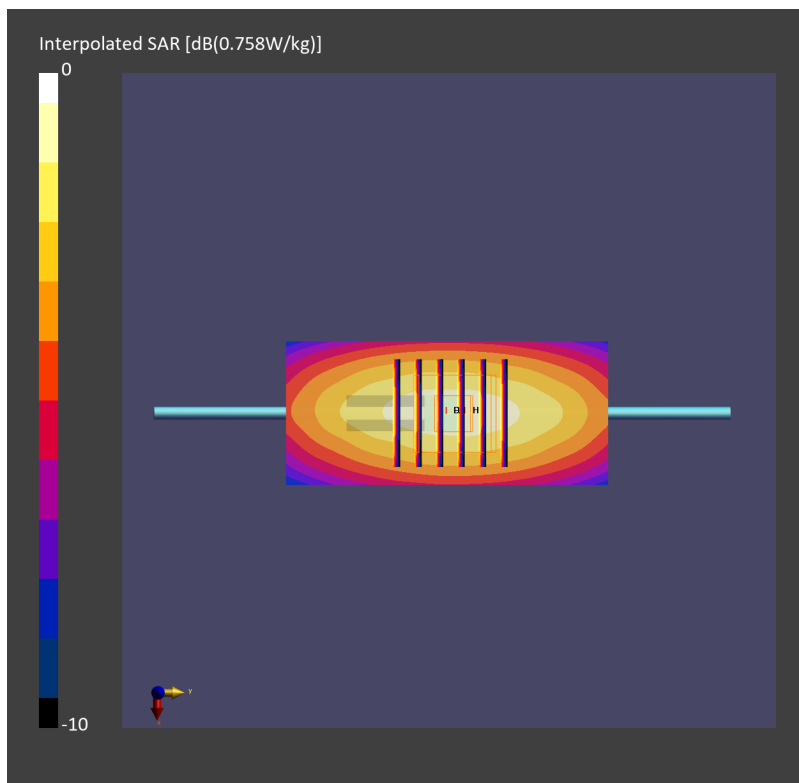

Date: 2024-10-20

System Check_Head_850MHz

DUT: D835V2 - SN4d060

Communication System: CW; Frequency: 835.000 MHz

Medium: HSL_850_241020 Medium parameters used: $f = 835.000$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.06, 8.88, 10.53); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.511 W/kg; SAR (10g) = 0.335 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.506 W/kg; SAR (8g) = 0.347 W/kg; SAR (10g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 22.2 mm

Ratio of SAR at M2 to SAR at M1 = 88.6 %

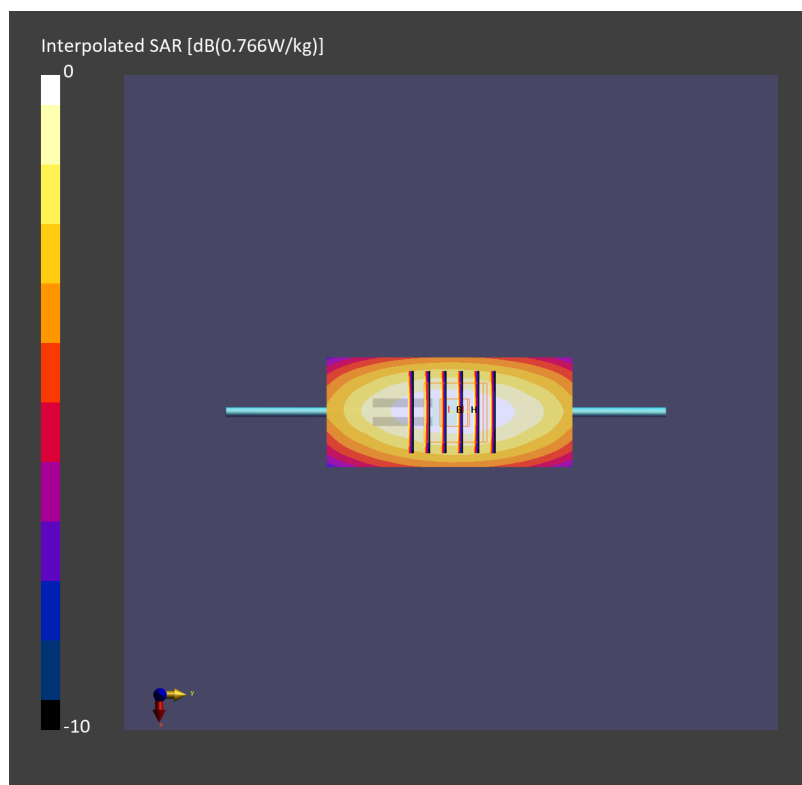

Date: 2024-10-23

System Check_Head_850MHz

DUT: D835V2 - SN4d060

Communication System: CW; Frequency: 835.000 MHz

Medium: HSL_850_241023 Medium parameters used: $f = 835.000$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.06, 8.88, 10.53); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.506 W/kg; SAR (10g) = 0.332 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.498 W/kg; SAR (8g) = 0.343 W/kg; SAR (10g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 21.3 mm

Ratio of SAR at M2 to SAR at M1 = 89.5 %

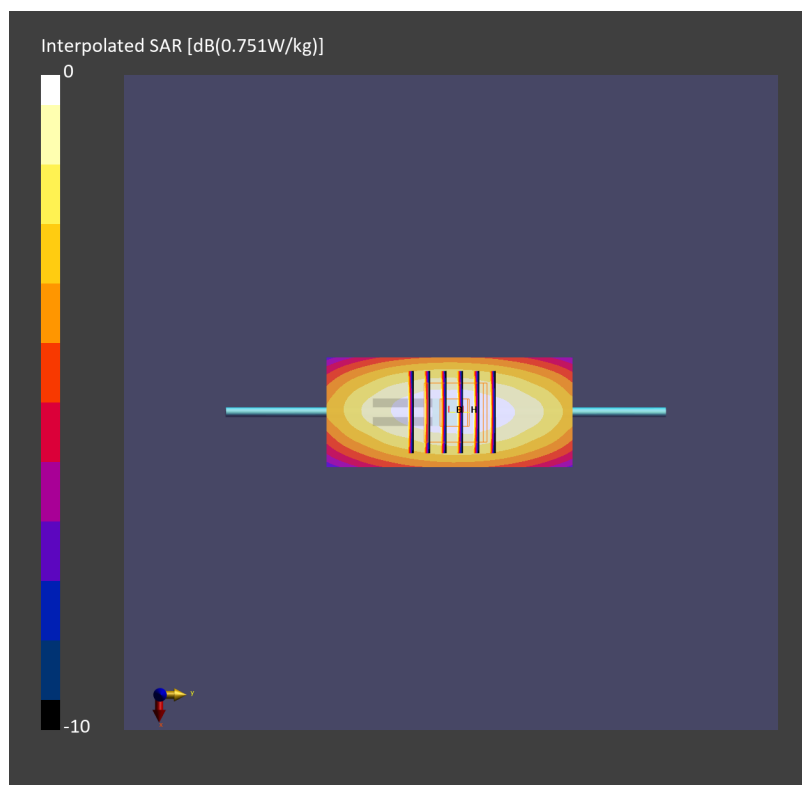

Date: 2024-10-12

System Check_Head_1750MHz**DUT: D1750V2 - SN1068**

Communication System: CW; Frequency: 1750.000 MHz

Medium: HSL_1750_241012 Medium parameters used: $f = 1750.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.98, 7.83, 9.28); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 1.78 W/kg; SAR (10g) = 0.956 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 1.77 W/kg; SAR (8g) = 1.02 W/kg; SAR (10g) = 0.945 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 85.4 %

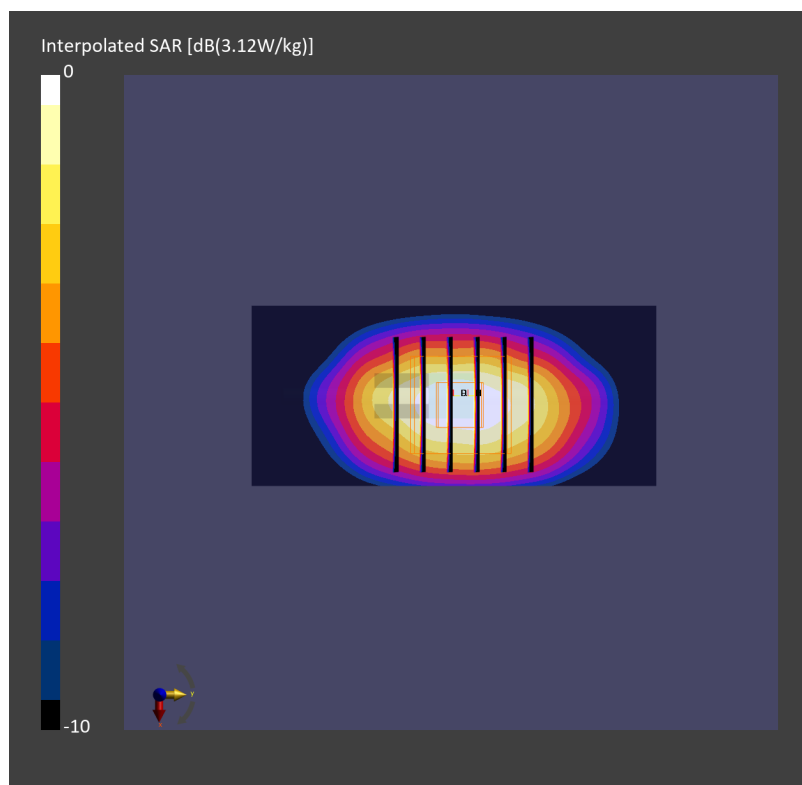

Date: 2024-10-15

System Check_Head_1750MHz**DUT: D1750V2 - SN1068**

Communication System: CW; Frequency: 1750.000 MHz

Medium: HSL_1750_241015 Medium parameters used: $f = 1750.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.98, 7.83, 9.28); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 1.78 W/kg; SAR (10g) = 0.958 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 1.78 W/kg; SAR (8g) = 1.03 W/kg; SAR (10g) = 0.950 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 85.6 %

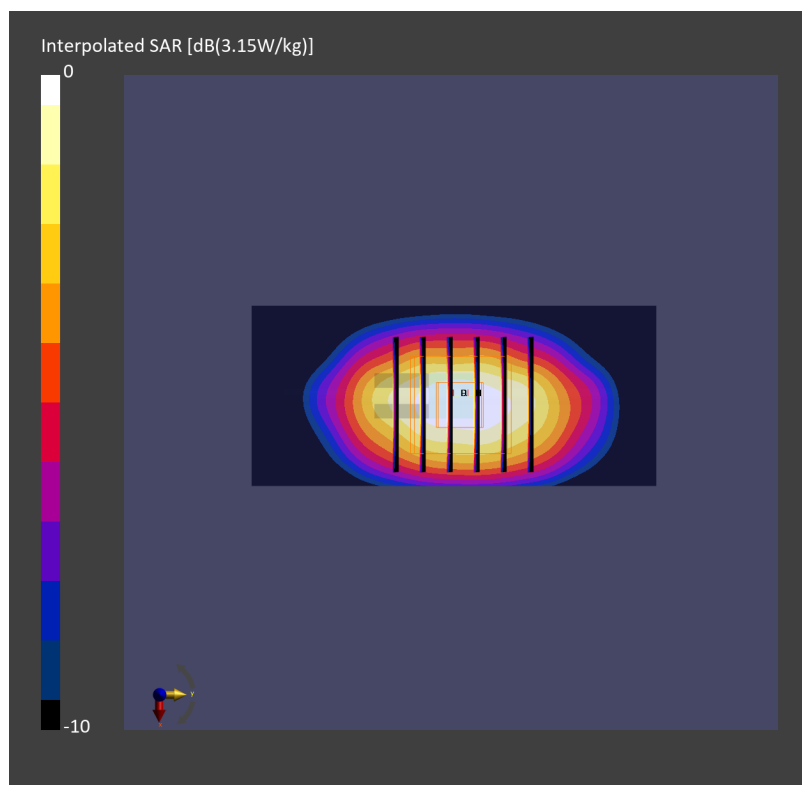

Date: 2024-10-24

System Check_Head_1750MHz**DUT: D1750V2 - SN1068**

Communication System: CW; Frequency: 1750.000 MHz

Medium: HSL_1750_241024 Medium parameters used: $f = 1750.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.98, 7.83, 9.28); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 1.83 W/kg; SAR (10g) = 0.967 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 1.84 W/kg; SAR (8g) = 1.09 W/kg; SAR (10g) = 1.01 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 86.2 %

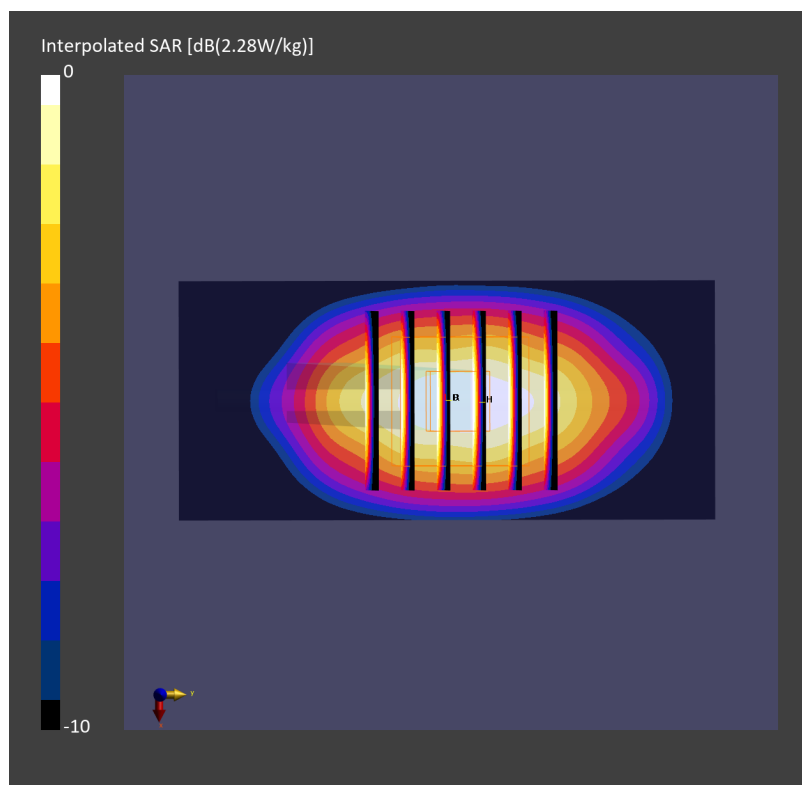

Date: 2024-10-28

System Check_Head_1750MHz**DUT: D1750V2 - SN1068**

Communication System: CW; Frequency: 1750.000 MHz

Medium: HSL_1750_241028 Medium parameters used: $f = 1750.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.98, 7.83, 9.28); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 1.78 W/kg; SAR (10g) = 0.968 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 1.92 W/kg; SAR (8g) = 1.04 W/kg; SAR (10g) = 0.950 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

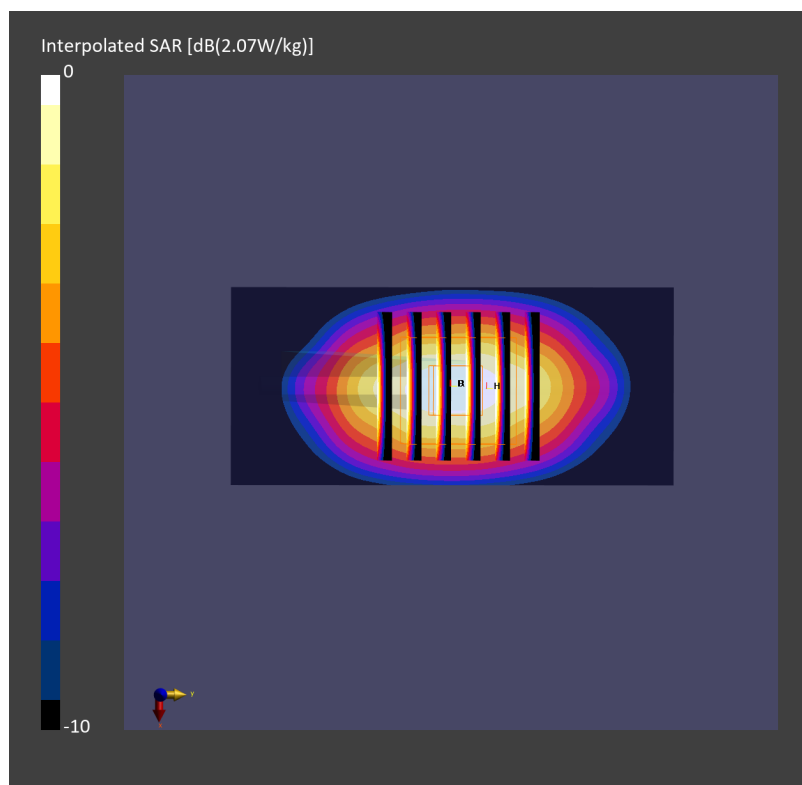

Date: 2024-10-12

System Check_Head_1900MHz**DUT: D1900V2 - SN5d041**

Communication System: CW; Frequency: 1900.000 MHz

Medium: HSL_1900_241012 Medium parameters used: $f = 1900.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.74, 7.59, 9.0); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 1.88 W/kg; SAR (10g) = 0.972 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 1.85 W/kg; SAR (8g) = 1.05 W/kg; SAR (10g) = 0.969 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 85.3 %

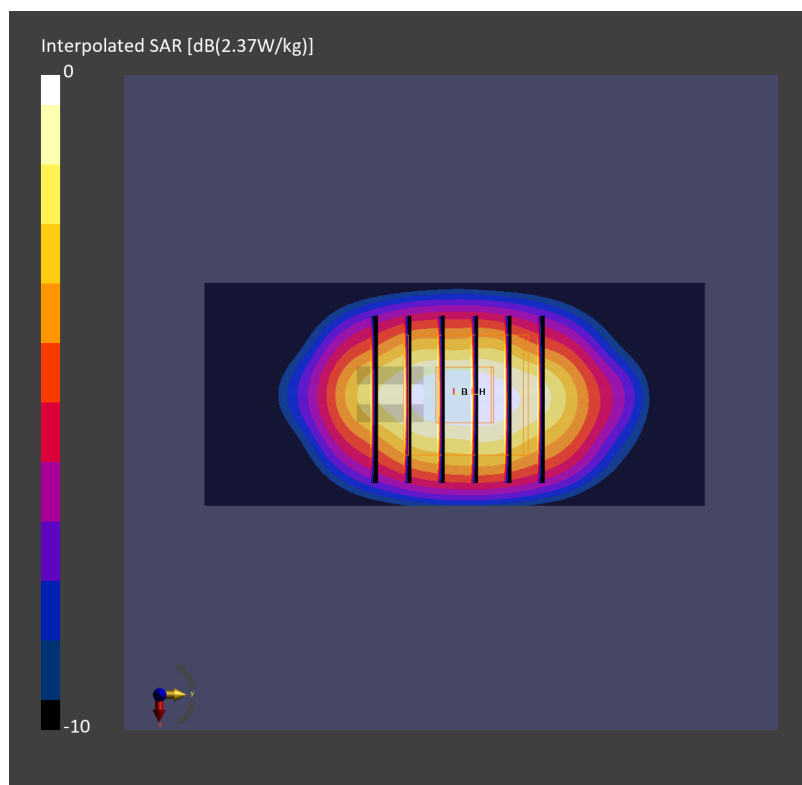

Date: 2024-10-15

System Check_Head_1900MHz**DUT: D1900V2 - SN5d041**

Communication System: CW; Frequency: 1900.000 MHz

Medium: HSL_1900_241015 Medium parameters used: $f = 1900.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.74, 7.59, 9.0); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 1.88 W/kg; SAR (10g) = 0.970 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 1.85 W/kg; SAR (8g) = 1.05 W/kg; SAR (10g) = 0.967 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 85.1 %

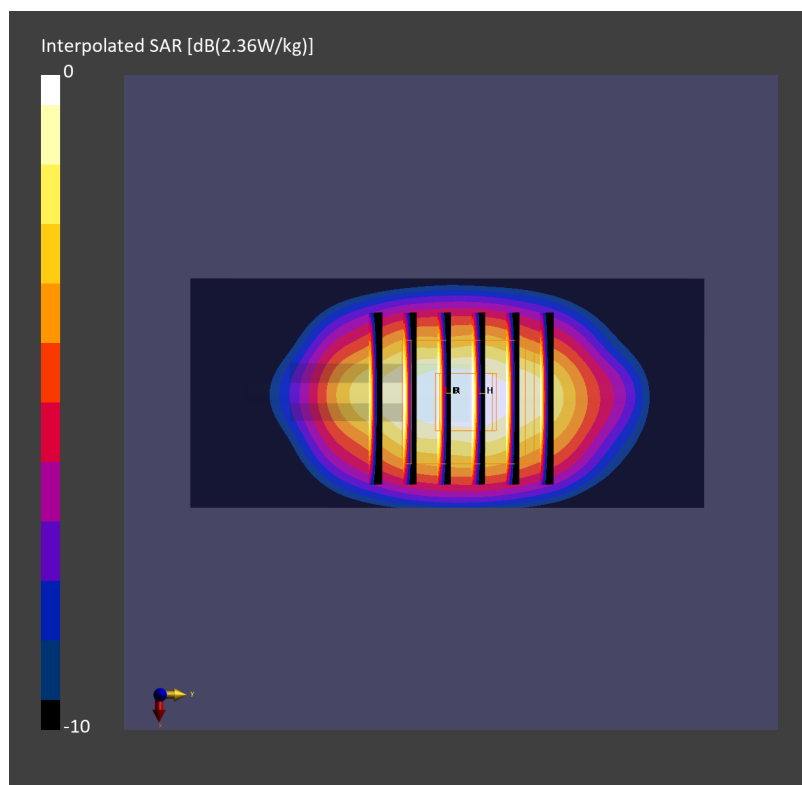

Date: 2024-10-24

System Check_Head_1900MHz**DUT: D1900V2 - SN5d041**

Communication System: CW; Frequency: 1900.000 MHz

Medium: HSL_1900_241024 Medium parameters used: $f = 1900.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.74, 7.59, 9.0); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 1.88 W/kg; SAR (10g) = 0.970 W/kg;


Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 1.85 W/kg; SAR (8g) = 1.05 W/kg; SAR (10g) = 0.967 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 85.1 %

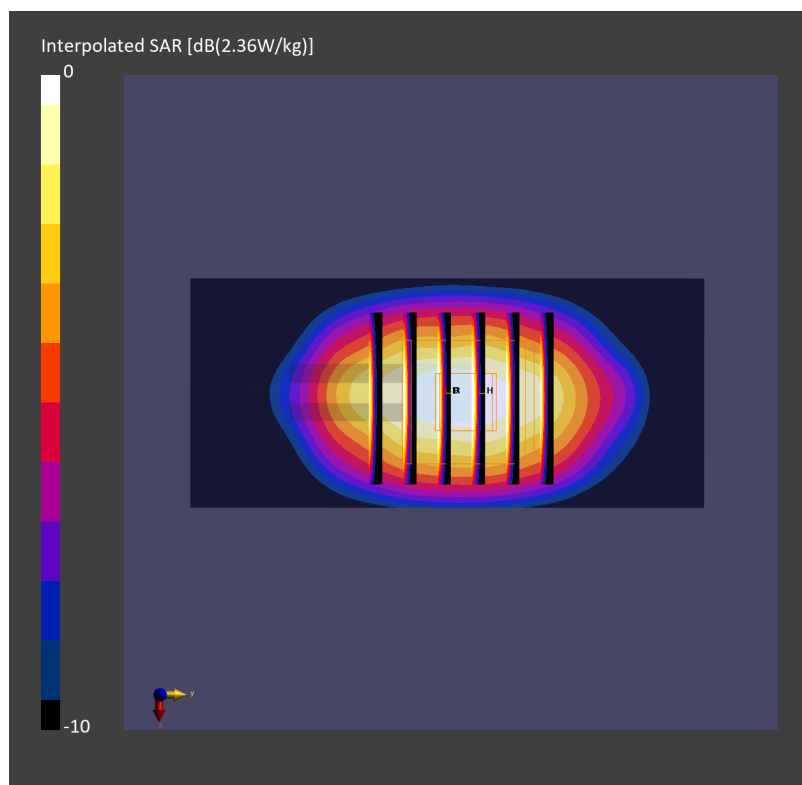

Date: 2024-10-13

System Check_Head_2300MHz**DUT: D2300V2 - SN1088**

Communication System: CW; Frequency: 2300.000 MHz

Medium: HSL_2300_241013 Medium parameters used: $f = 2300.000$ MHz; $\sigma = 1.65$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.63, 7.48, 8.87); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 4.99 W/kg; SAR (10g) = 2.36 W/kg;


Pin=20.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 4.90 W/kg; SAR (8g) = 2.60 W/kg; SAR (10g) = 2.36 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

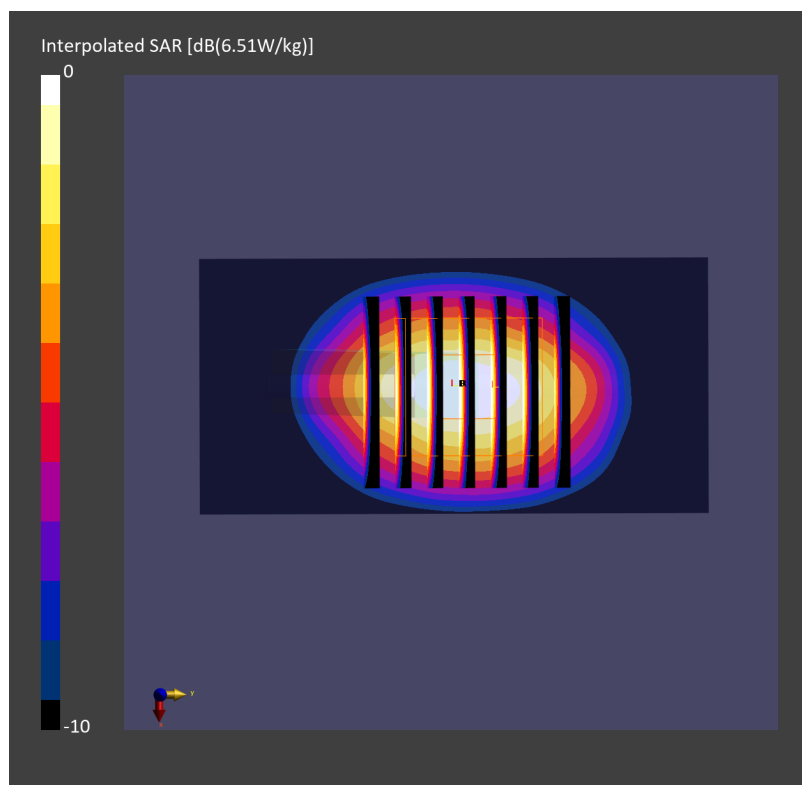

Date: 2024-10-16

System Check_Head_2300MHz**DUT: D2300V2 - SN1088**

Communication System: CW; Frequency: 2300.000 MHz

Medium: HSL_2300_241016 Medium parameters used: $f = 2300.000$ MHz; $\sigma = 1.63$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.63, 7.48, 8.87); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 4.92 W/kg; SAR (10g) = 2.33 W/kg;


Pin=20.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 4.84 W/kg; SAR (8g) = 2.57 W/kg; SAR (10g) = 2.33 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.1 %

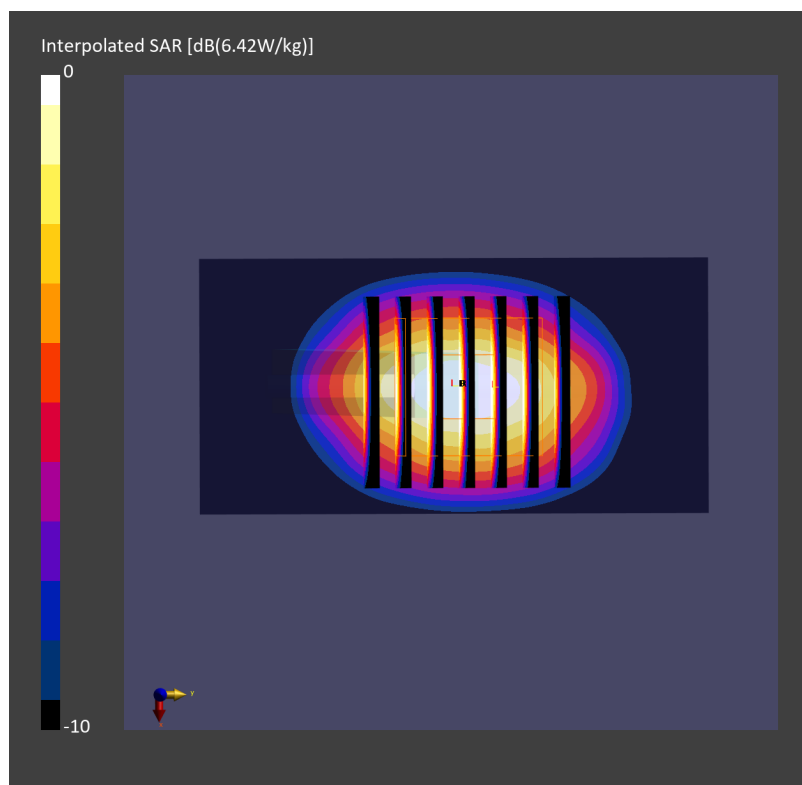

Date: 2024-10-25

System Check_Head_2300MHz**DUT: D2300V2 - SN1088**

Communication System: CW; Frequency: 2300.000 MHz

Medium: HSL_2300_241025 Medium parameters used: $f = 2300.000$ MHz; $\sigma = 1.65$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.63, 7.48, 8.87); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 4.41 W/kg; SAR (10g) = 2.17 W/kg;


Pin=20.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.18 dB

SAR (1g) = 4.49 W/kg; SAR (8g) = 2.48 W/kg; SAR (10g) = 2.26 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 86.1 %

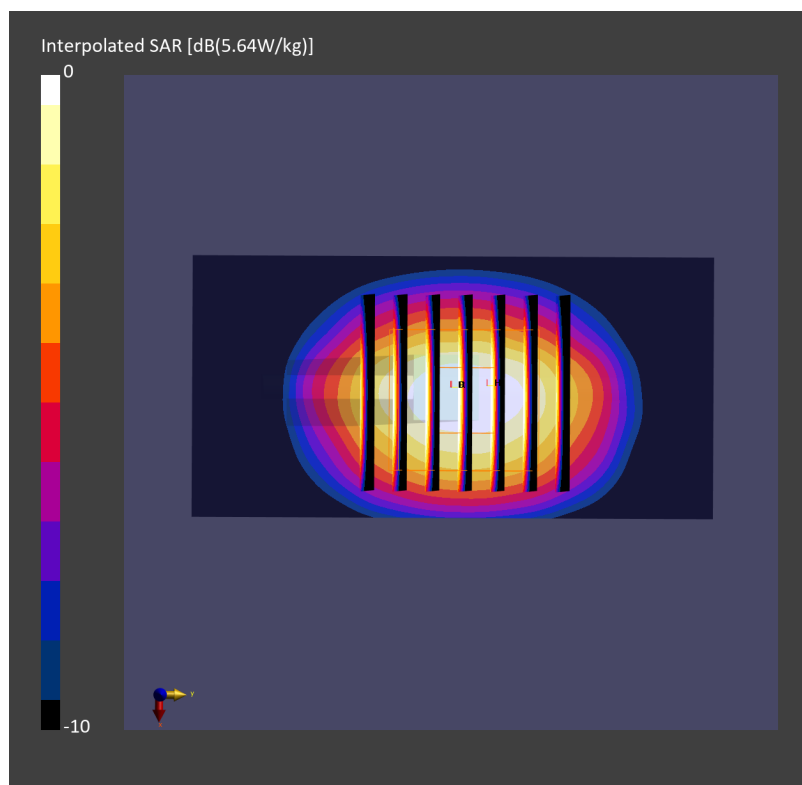

Date: 2024-10-14

System Check_Head_2600MHz**DUT: D2600V2 - SN1008**

Communication System: CW; Frequency: 2600.000 MHz

Medium: HSL_2600_241014 Medium parameters used: $f = 2600.000$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.45, 7.3, 8.66); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.63 W/kg; SAR (10g) = 2.53 W/kg;


Pin=20.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.12 dB

SAR (1g) = 5.65 W/kg; SAR (8g) = 2.82 W/kg; SAR (10g) = 2.55 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

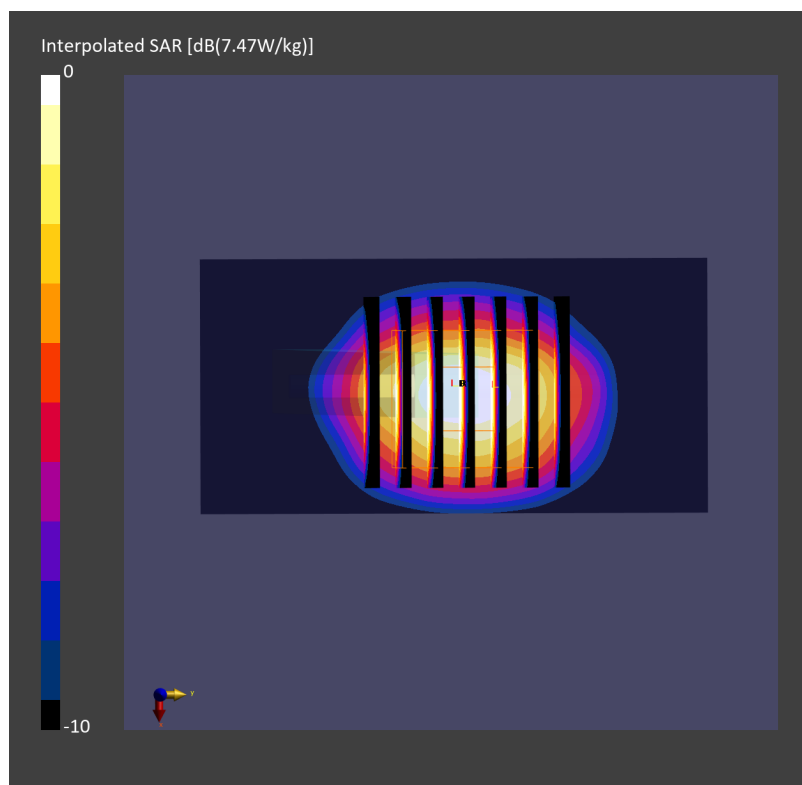

Date: 2024-10-17

System Check_Head_2600MHz**DUT: D2600V2 - SN1008**

Communication System: CW; Frequency: 2600.000 MHz

Medium: HSL_2600_241017 Medium parameters used: $f = 2600.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.45, 7.3, 8.66); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.57 W/kg; SAR (10g) = 2.50 W/kg;


Pin=20.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 5.59 W/kg; SAR (8g) = 2.79 W/kg; SAR (10g) = 2.52 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

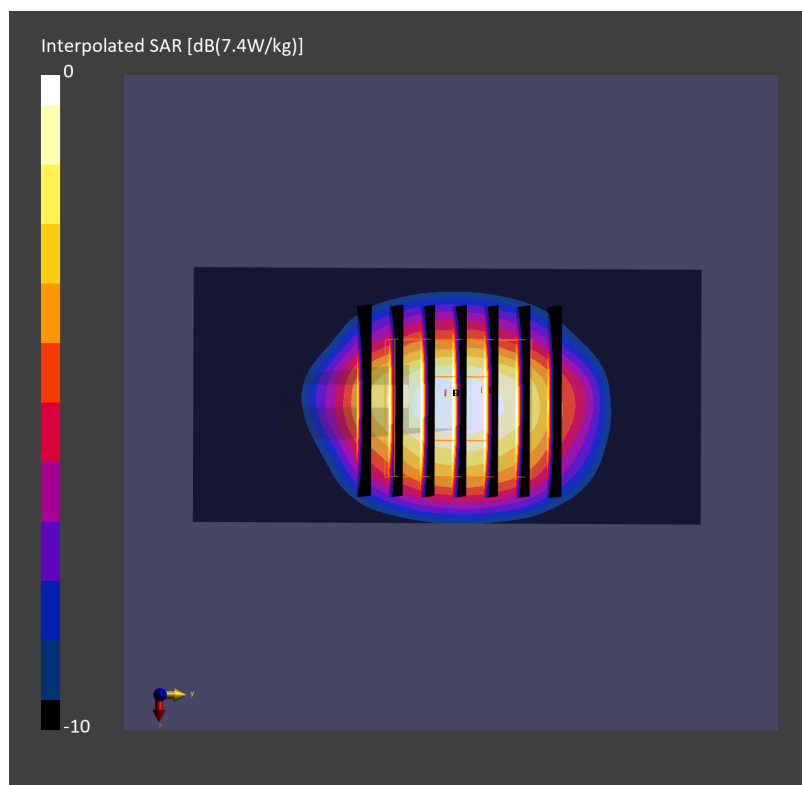

Date: 2024-10-25

System Check_Head_2600MHz**DUT: D2600V2 - SN1008**

Communication System: CW; Frequency: 2600.000 MHz

Medium: HSL_2600_241025 Medium parameters used: $f = 2600.000$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.45, 7.3, 8.66); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.56 W/kg; SAR (10g) = 2.52 W/kg;


Pin=20.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 5.67 W/kg; SAR (8g) = 2.91 W/kg; SAR (10g) = 2.63 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.9 %

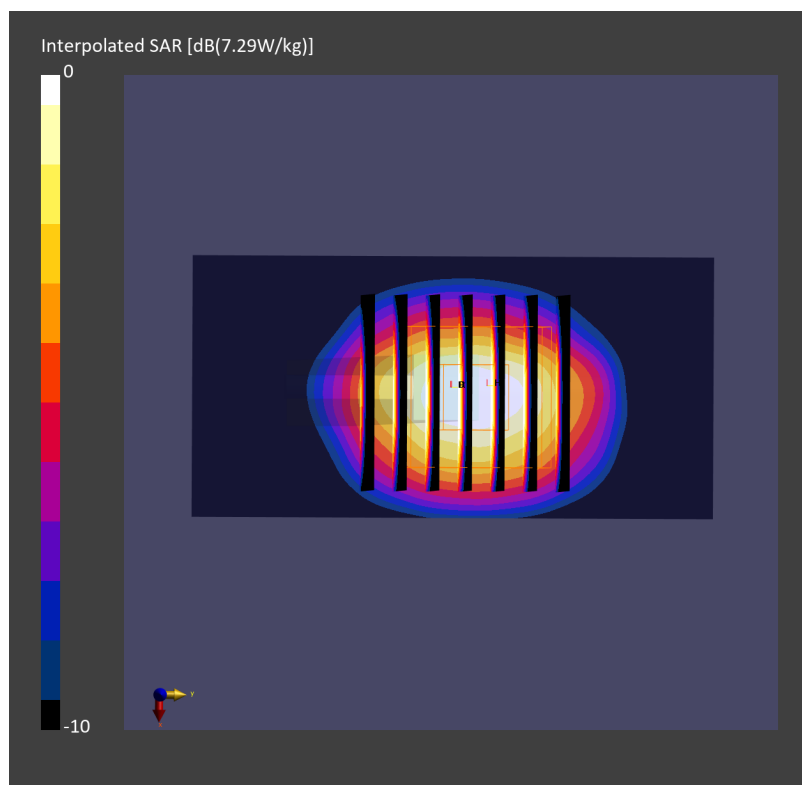

Date: 2024-10-18

System Check_Head_3500MHz**DUT: D3500V2 - SN1036**

Communication System: CW; Frequency: 3500.000 MHz

Medium: HSL_3500_241018 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.86$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.69, 6.56, 7.78); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.72 W/kg; SAR (10g) = 2.58 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 6.79 W/kg; SAR (8g) = 2.97 W/kg; SAR (10g) = 2.63 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

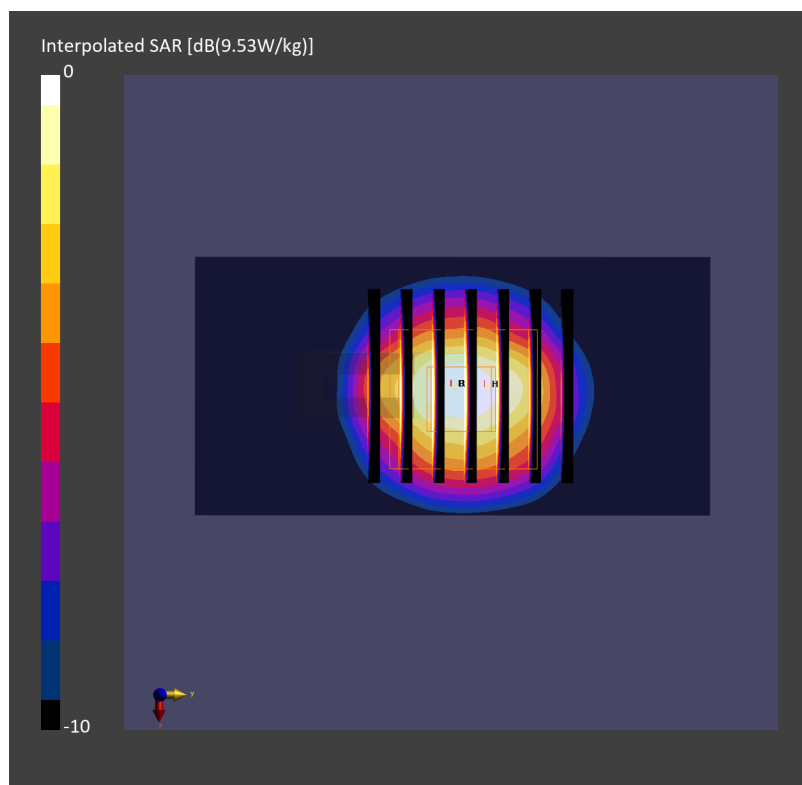

Date: 2024-10-19

System Check_Head_3500MHz**DUT: D3500V2 - SN1036**

Communication System: CW; Frequency: 3500.000 MHz

Medium: HSL_3500_241019 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.84$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.69, 6.56, 7.78); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.22 W/kg; SAR (10g) = 2.39 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 6.28 W/kg; SAR (8g) = 2.75 W/kg; SAR (10g) = 2.44 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

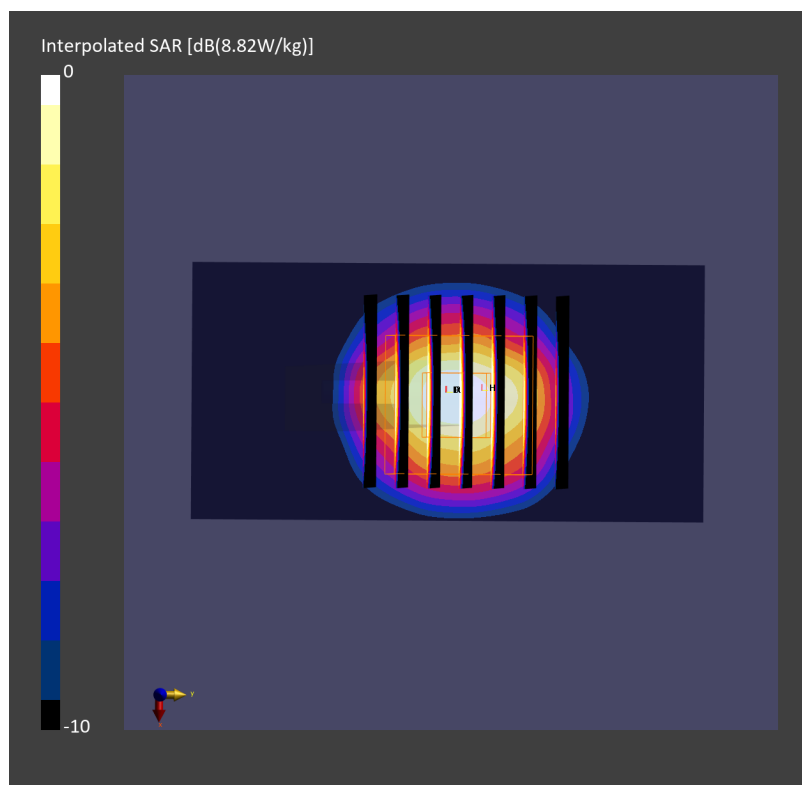

Date: 2024-10-21

System Check_Head_3500MHz**DUT: D3500V2 - SN1036**

Communication System: CW; Frequency: 3500.000 MHz

Medium: HSL_3500_241021 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.85$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.69, 6.56, 7.78); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.40 W/kg; SAR (10g) = 2.46 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 6.45 W/kg; SAR (8g) = 2.82 W/kg; SAR (10g) = 2.50 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

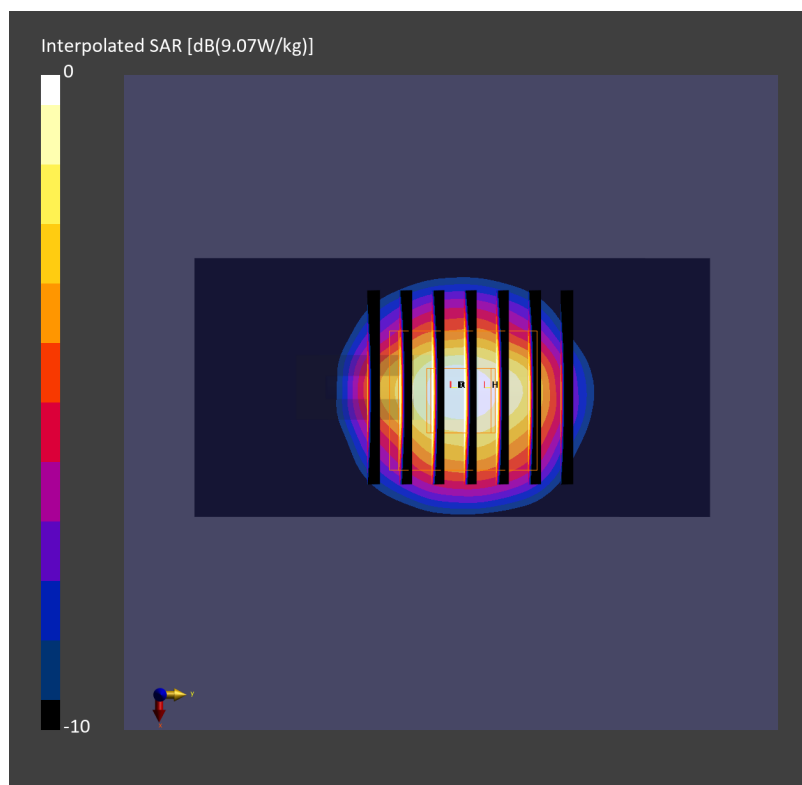

Date: 2024-10-22

System Check_Head_3500MHz**DUT: D3500V2 - SN1036**

Communication System: CW; Frequency: 3500.000 MHz

Medium: HSL_3500_241022 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.87$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.69, 6.56, 7.78); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.42 W/kg; SAR (10g) = 2.47 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 6.48 W/kg; SAR (8g) = 2.84 W/kg; SAR (10g) = 2.51 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

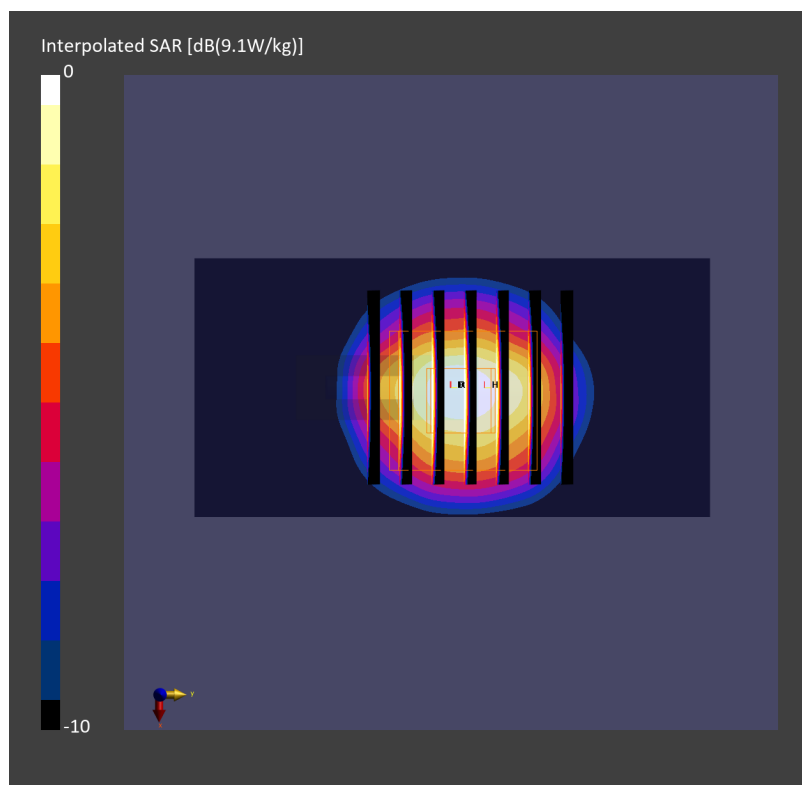

Date: 2024-10-26

System Check_Head_3500MHz**DUT: D3500V2 - SN1036**

Communication System: CW; Frequency: 3500.000 MHz

Medium: HSL_3500_241026 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.91$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.69, 6.56, 7.78); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.47 W/kg; SAR (10g) = 2.55 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 6.75 W/kg; SAR (8g) = 3.02 W/kg; SAR (10g) = 2.69 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

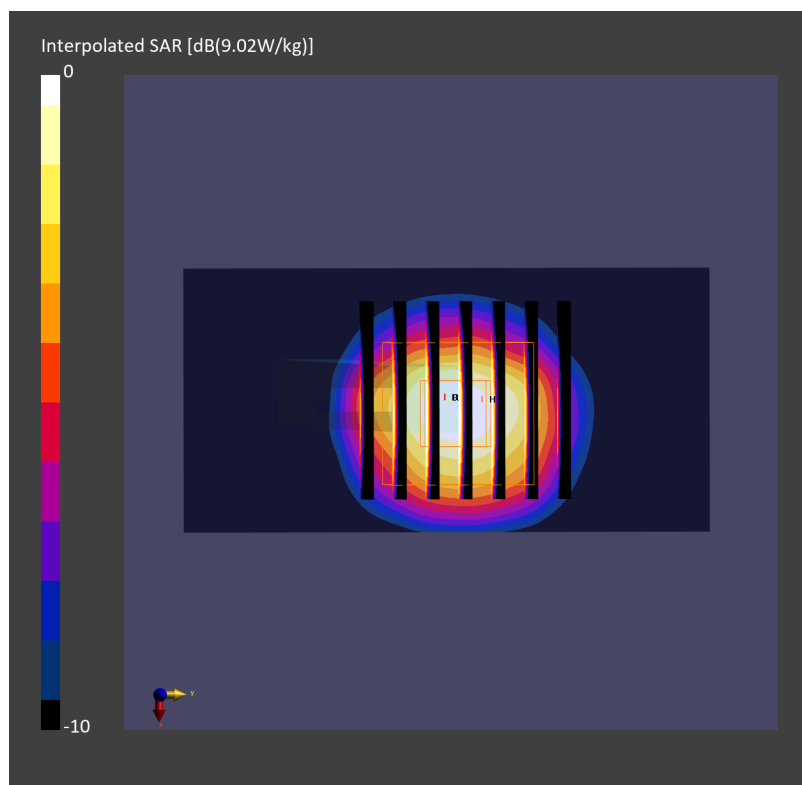

Date: 2024-10-27

System Check_Head_3500MHz**DUT: D3500V2 - SN1036**

Communication System: CW; Frequency: 3500.000 MHz

Medium: HSL_3500_241027 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.92$ S/m; $\epsilon_r = 38.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.69, 6.56, 7.78); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.42 W/kg; SAR (10g) = 2.54 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 6.38 W/kg; SAR (8g) = 2.86 W/kg; SAR (10g) = 2.54 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

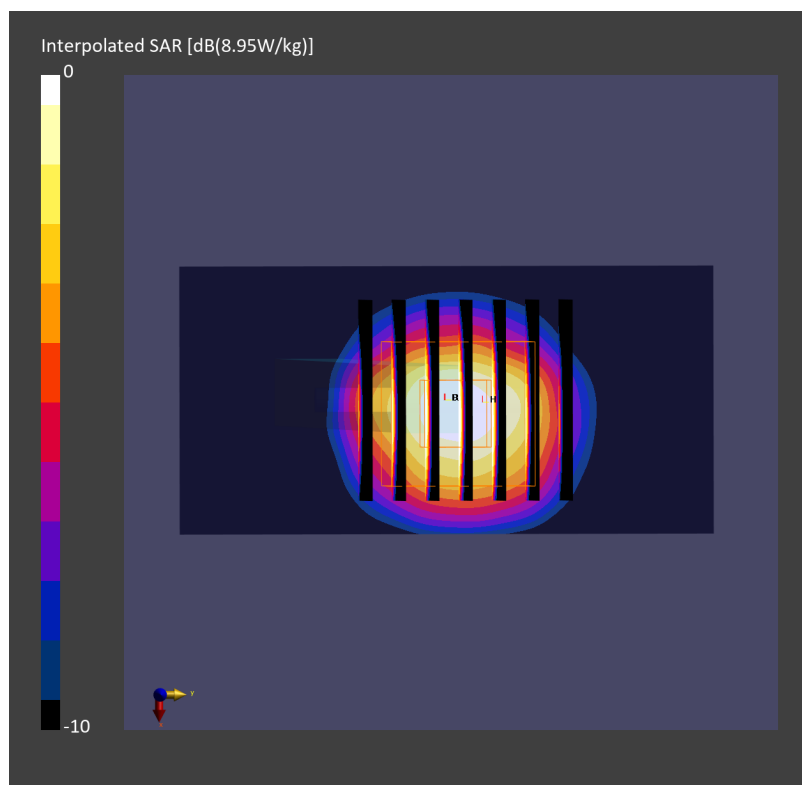

Date: 2024-10-18

System Check_Head_3700MHz**DUT: D3700V2 - SN1006**

Communication System: CW; Frequency: 3700.000 MHz

Medium: HSL_3700_241018 Medium parameters used: $f = 3700.000$ MHz; $\sigma = 3.06$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.5, 6.37, 7.55); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.60 W/kg; SAR (10g) = 2.45 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 6.70 W/kg; SAR (8g) = 2.84 W/kg; SAR (10g) = 2.50 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.1 %

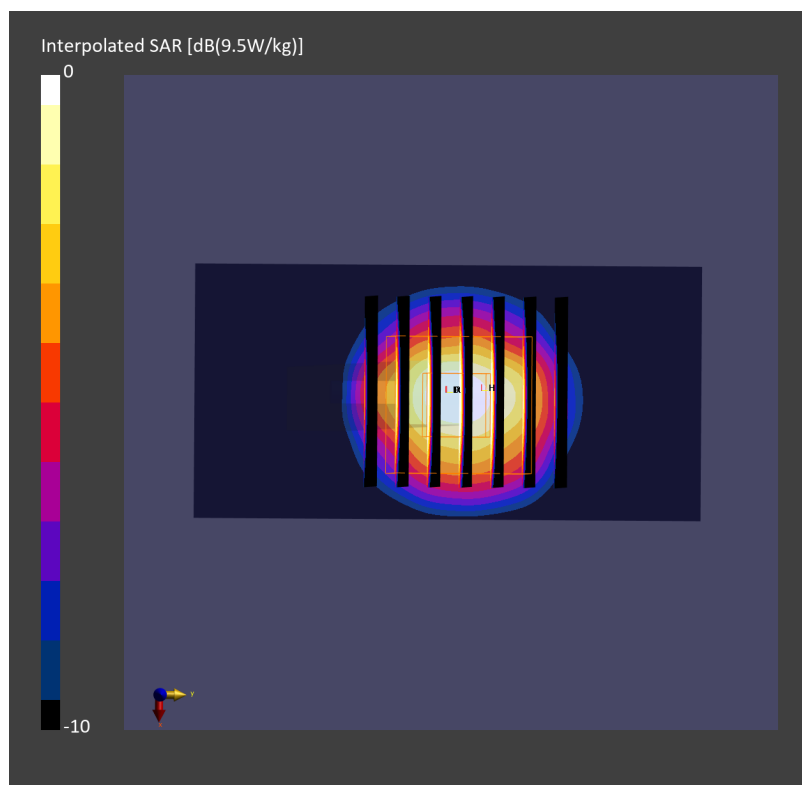

Date: 2024-10-19

System Check_Head_3700MHz**DUT: D3700V2 - SN1006**

Communication System: CW; Frequency: 3700.000 MHz

Medium: HSL_3700_241019 Medium parameters used: $f = 3700.000$ MHz; $\sigma = 3.04$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.5, 6.37, 7.55); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.55 W/kg; SAR (10g) = 2.43 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.11 dB

SAR (1g) = 6.66 W/kg; SAR (8g) = 2.82 W/kg; SAR (10g) = 2.48 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.1 %

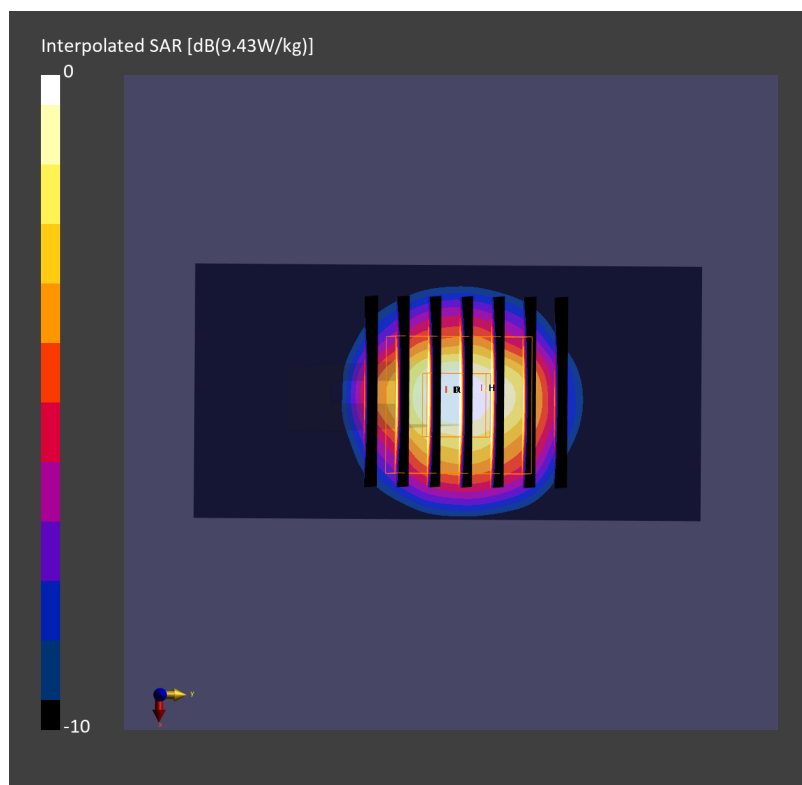

Date: 2024-10-21

System Check_Head_3700MHz**DUT: D3700V2 - SN1006**

Communication System: CW; Frequency: 3700.000 MHz

Medium: HSL_3700_241021 Medium parameters used: $f = 3700.000$ MHz; $\sigma = 3.05$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.5, 6.37, 7.55); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.14 W/kg; SAR (10g) = 2.28 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 6.23 W/kg; SAR (8g) = 2.64 W/kg; SAR (10g) = 2.33 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.1 %

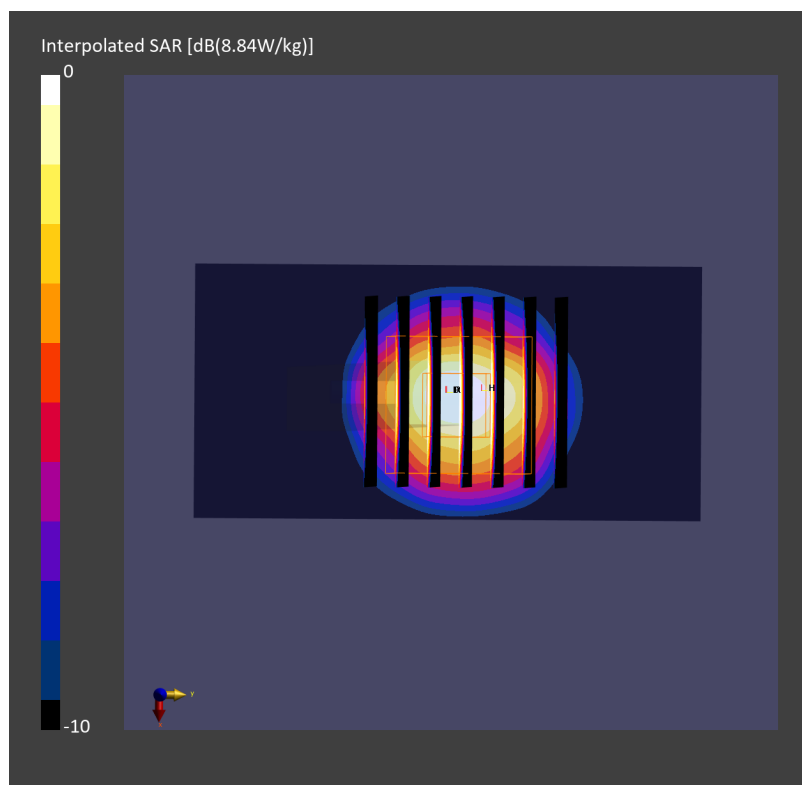

Date: 2024-10-22

System Check_Head_3700MHz**DUT: D3700V2 - SN1006**

Communication System: CW; Frequency: 3700.000 MHz

Medium: HSL_3700_241022 Medium parameters used: $f = 3700.000$ MHz; $\sigma = 3.07$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.5, 6.37, 7.55); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.58 W/kg; SAR (10g) = 2.42 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 6.63 W/kg; SAR (8g) = 2.80 W/kg; SAR (10g) = 2.47 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.8 %

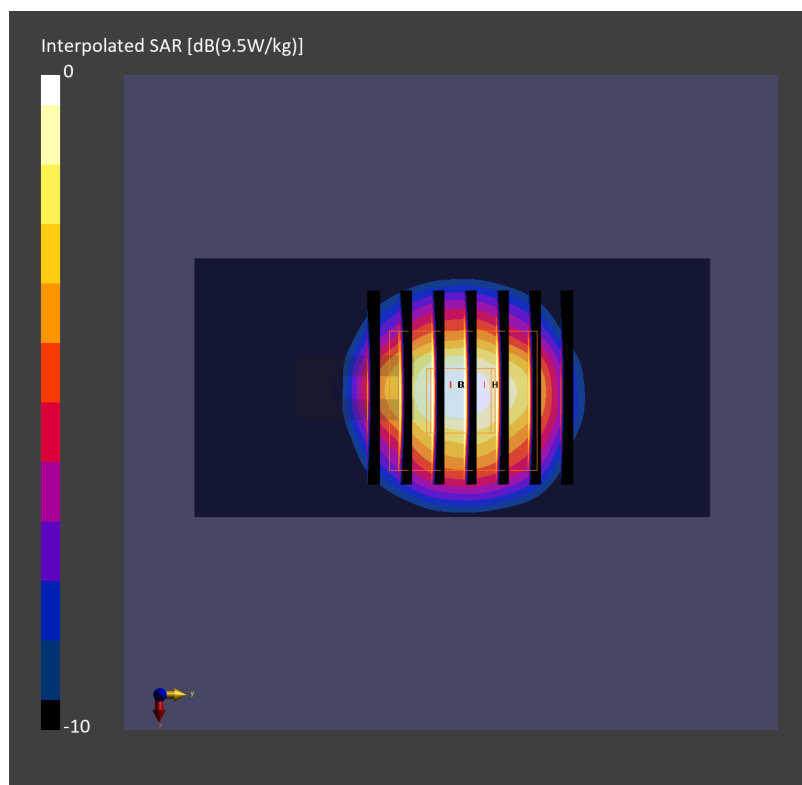

Date: 2024-10-26

System Check_Head_3700MHz**DUT: D3700V2 - SN1006**

Communication System: CW; Frequency: 3700.000 MHz

Medium: HSL_3700_241026 Medium parameters used: $f = 3700.000$ MHz; $\sigma = 3.11$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.5, 6.37, 7.55); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.27 W/kg; SAR (10g) = 2.36 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.14 dB

SAR (1g) = 6.61 W/kg; SAR (8g) = 2.87 W/kg; SAR (10g) = 2.44 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

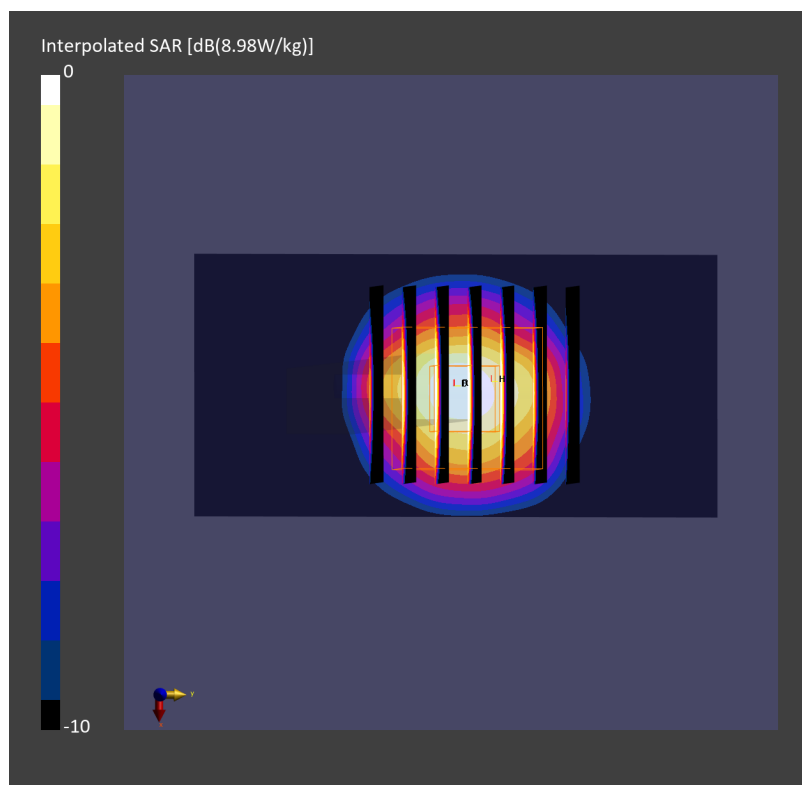

Date: 2024-10-27

System Check_Head_3700MHz**DUT: D3700V2 - SN1006**

Communication System: CW; Frequency: 3700.000 MHz

Medium: HSL_3700_241027 Medium parameters used: $f = 3700.000$ MHz; $\sigma = 3.12$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.5, 6.37, 7.55); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.58 W/kg; SAR (10g) = 2.43 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 6.65 W/kg; SAR (8g) = 2.91 W/kg; SAR (10g) = 2.49 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.1 %

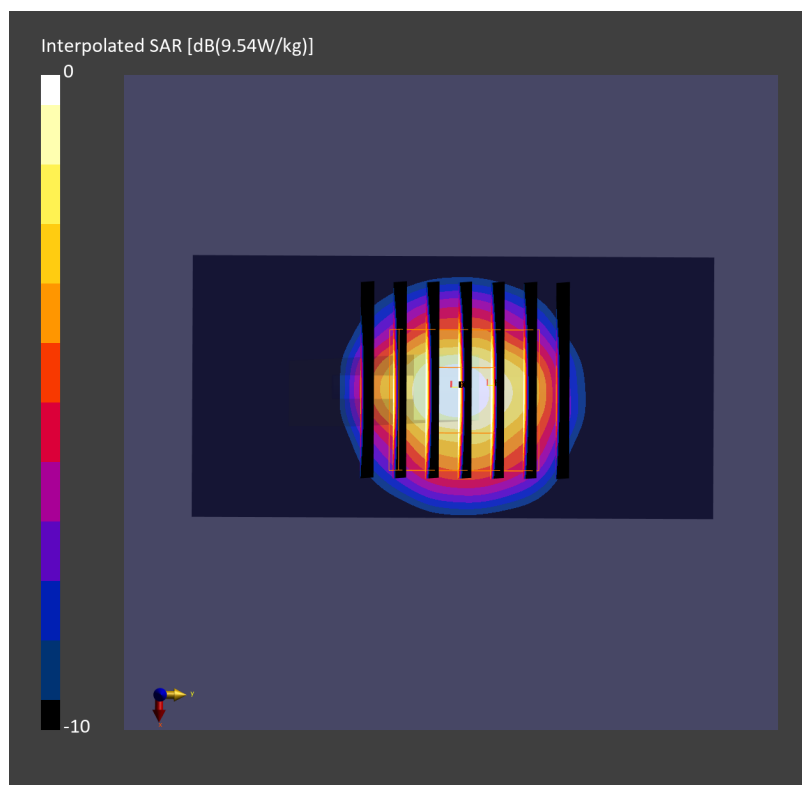

Date: 2024-10-21

System Check_Head_3900MHz**DUT: D3900V2 - SN1017**

Communication System: CW; Frequency: 3900.000 MHz

Medium: HSL_3900_241021 Medium parameters used: $f = 3900.000$ MHz; $\sigma = 3.25$ S/m; $\epsilon_r = 37.4$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.55, 6.42, 7.61); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.58 W/kg; SAR (10g) = 2.33 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 6.76 W/kg; SAR (8g) = 2.73 W/kg; SAR (10g) = 2.40 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.8 %

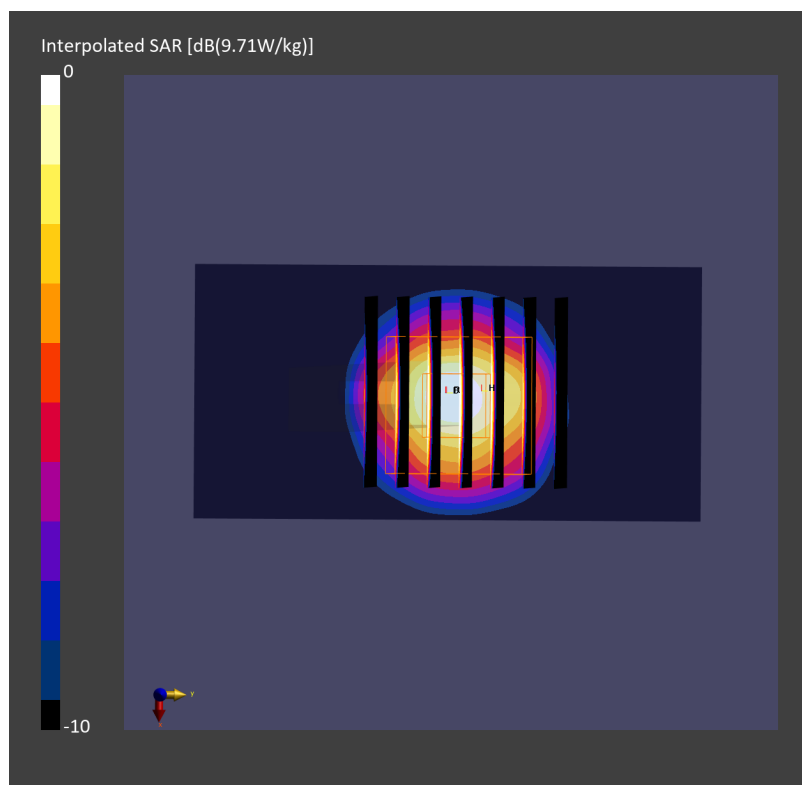

Date: 2024-10-22

System Check_Head_3900MHz**DUT: D3900V2 - SN1017**

Communication System: CW; Frequency: 3900.000 MHz

Medium: HSL_3900_241022 Medium parameters used: $f = 3900.000$ MHz; $\sigma = 3.28$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.55, 6.42, 7.61); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.41 W/kg; SAR (10g) = 2.27 W/kg;


Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 6.59 W/kg; SAR (8g) = 2.66 W/kg; SAR (10g) = 2.33 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.0 %

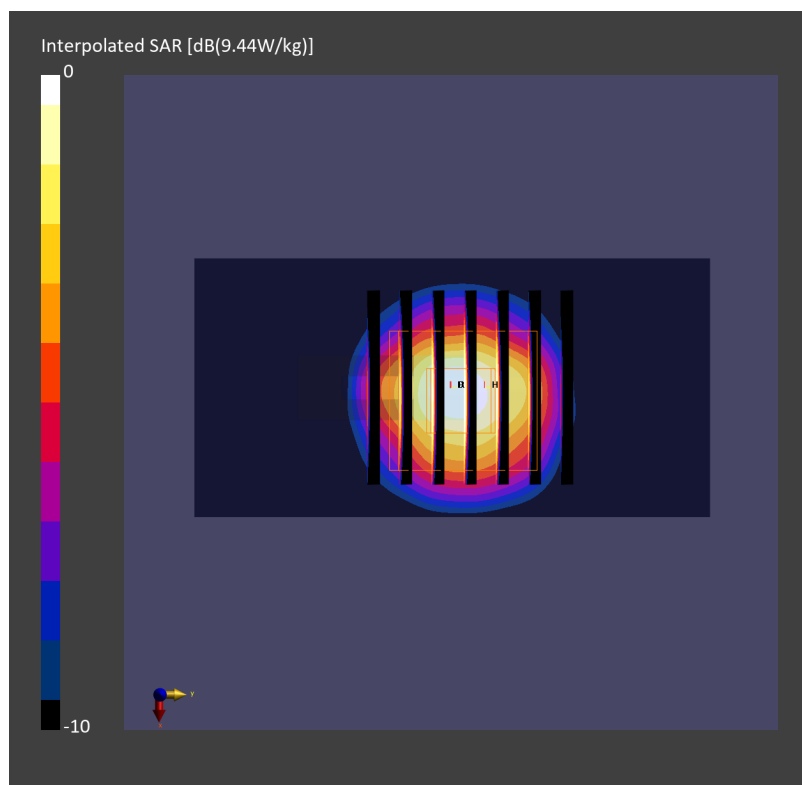

Date: 2024-10-27

System Check_Head_3900MHz**DUT: D3900V2 - SN1017**

Communication System: CW; Frequency: 3900.000 MHz

Medium: HSL_3900_241027 Medium parameters used: $f = 3900.000$ MHz; $\sigma = 3.33$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(6.55, 6.42, 7.61); Calibrated: 2024-09-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2024-07-15
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1041; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.43 W/kg; SAR (10g) = 2.31 W/kg;

Pin=20.0dBm/Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 6.81 W/kg; SAR (8g) = 2.82 W/kg; SAR (10g) = 2.48 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

