



## Test Mode: Traffic mode


## PCS1900 (EGPRS 1 link)

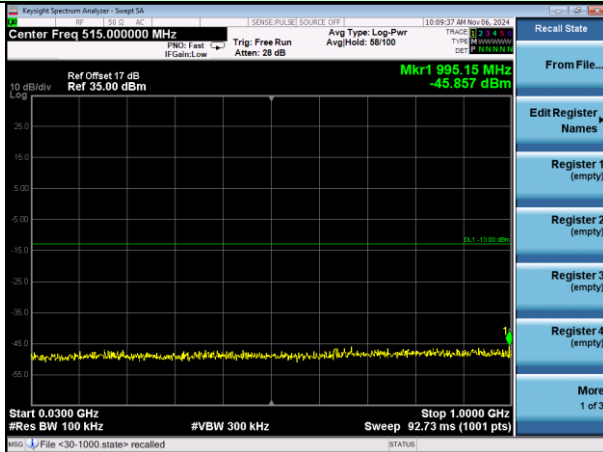

## Lowest channel

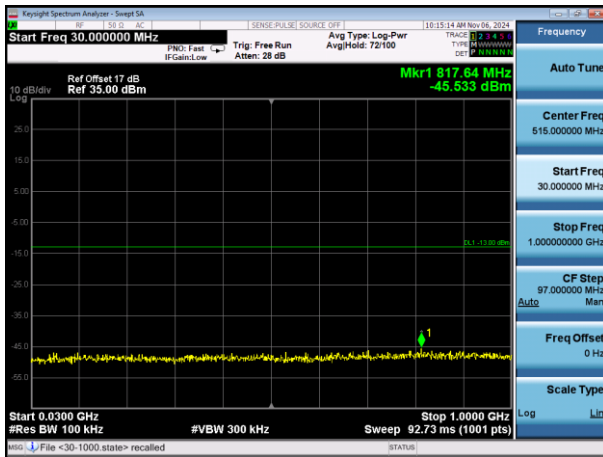


## Middle channel

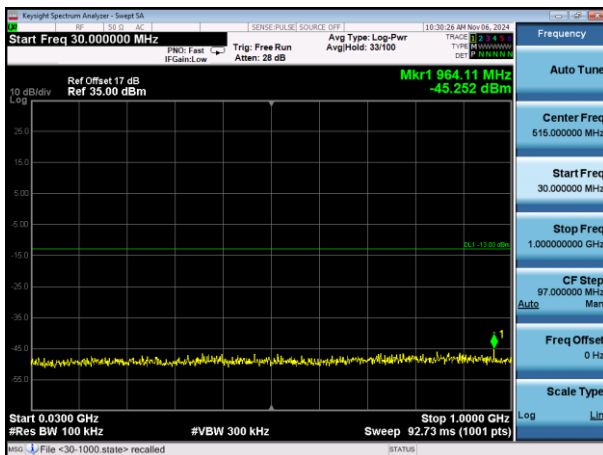


## Highest channel

## Test Mode: Traffic mode


## WCDMA Band V (RMC 12.2Kbps link)

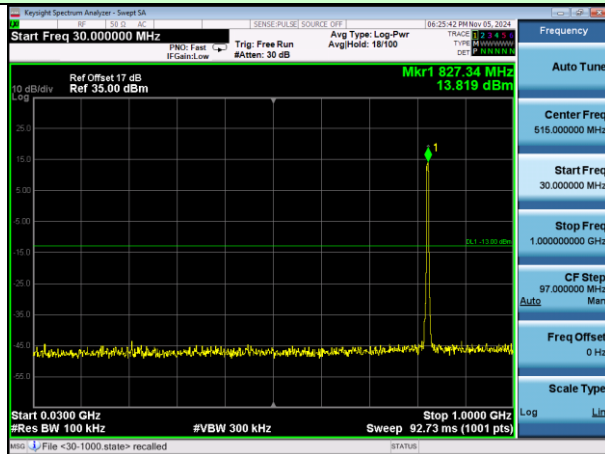

Lowest channel

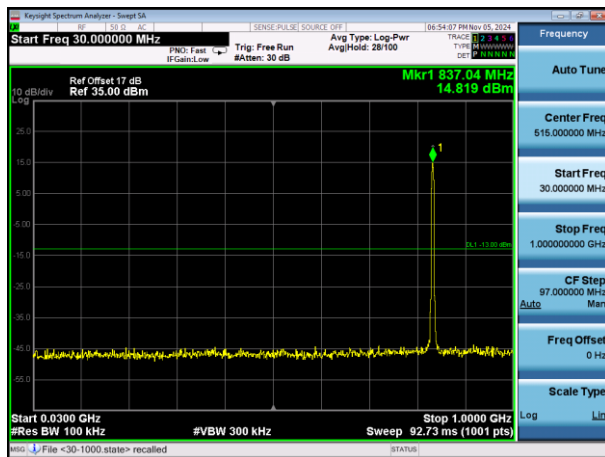


Middle channel

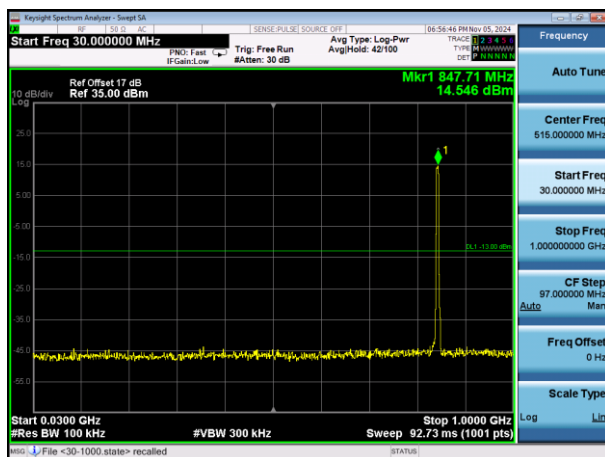


Highest channel

## Test Mode: Traffic mode


## WCDMA Band II (RMC 12.2Kbps link)

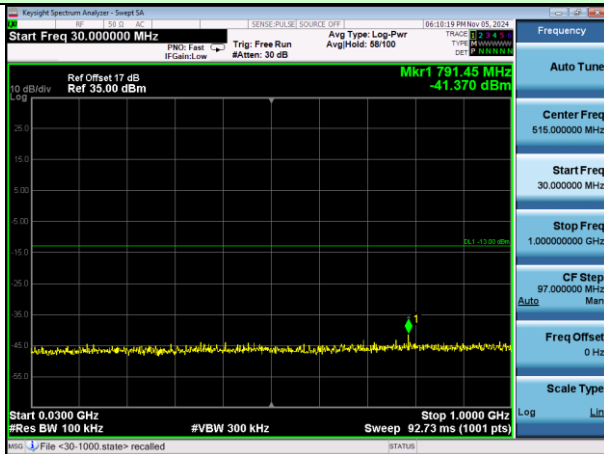

## Lowest channel

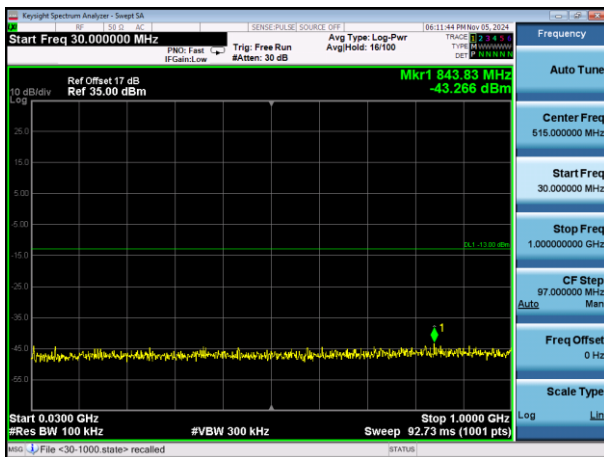


## Middle channel

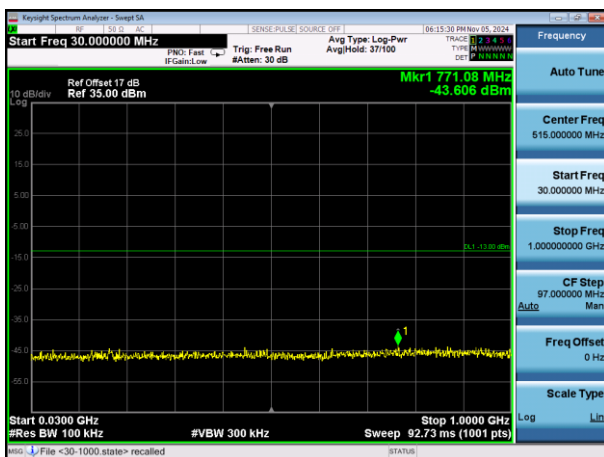

## Highest channel

## Test Mode: Traffic mode


## WCDMA Band IV (RMC 12.2Kbps link)

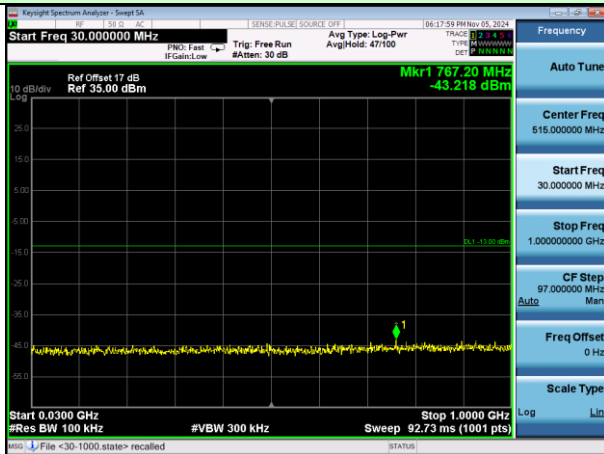

## Lowest channel



## Middle channel

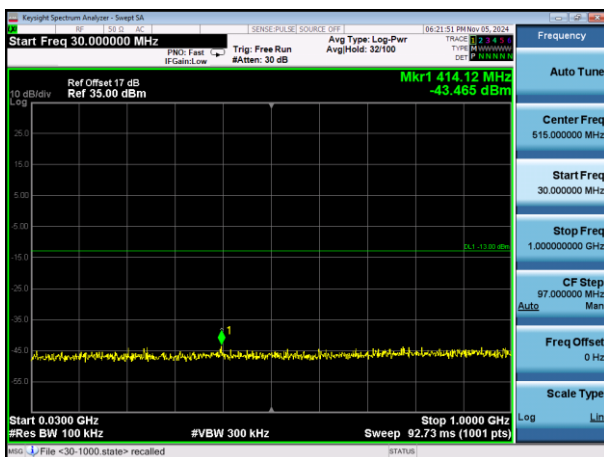


## Highest channel


Band Edge:

Test Mode: Traffic mode

GSM850 (GPRS 1 link)

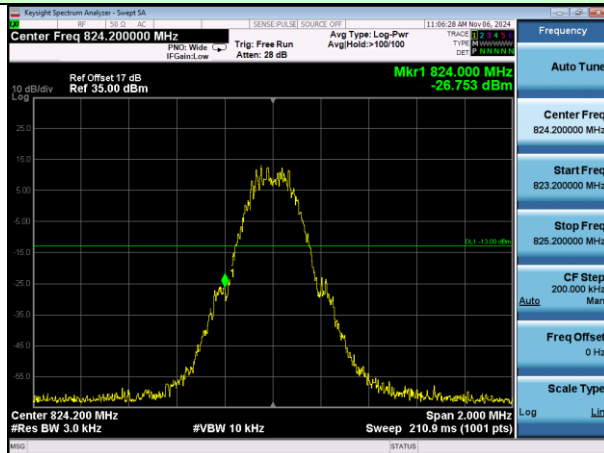


Lowest channel

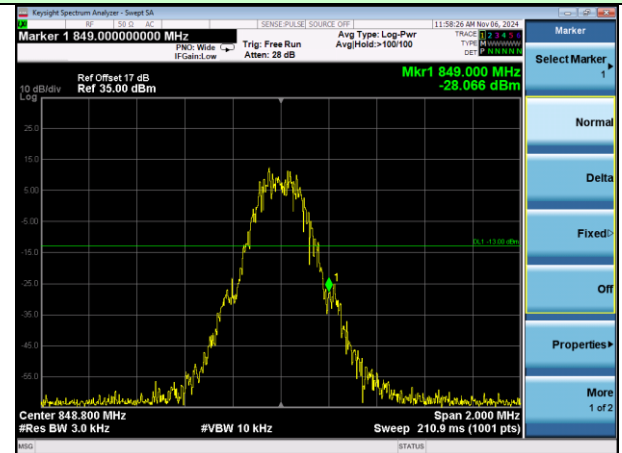


Highest channel

Test Mode: Traffic mode

GSM850 (EGPRS 1 link)

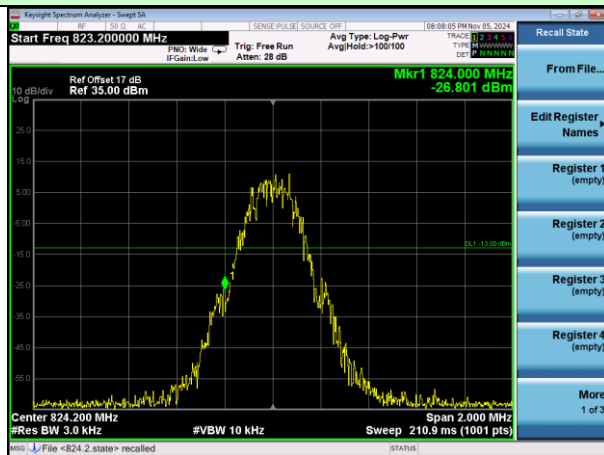


Lowest channel

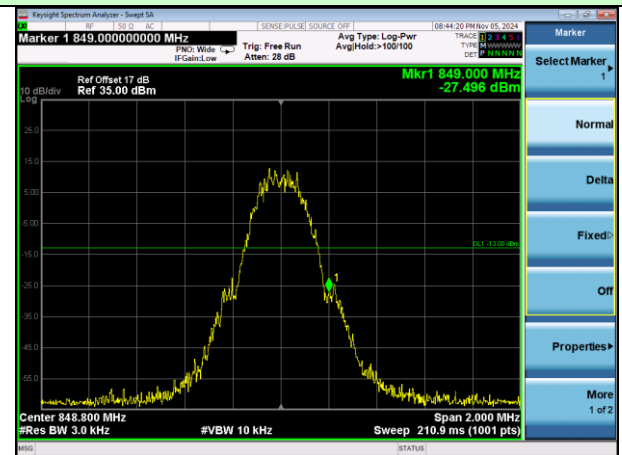


Highest channel

Test Mode: Traffic mode

PCS1900 (GPRS 1 link)

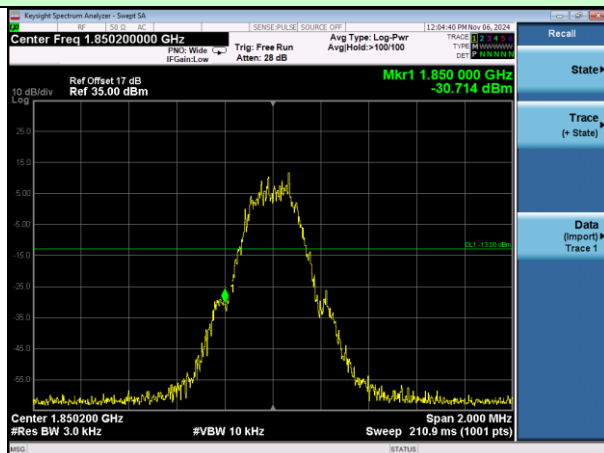


Lowest channel

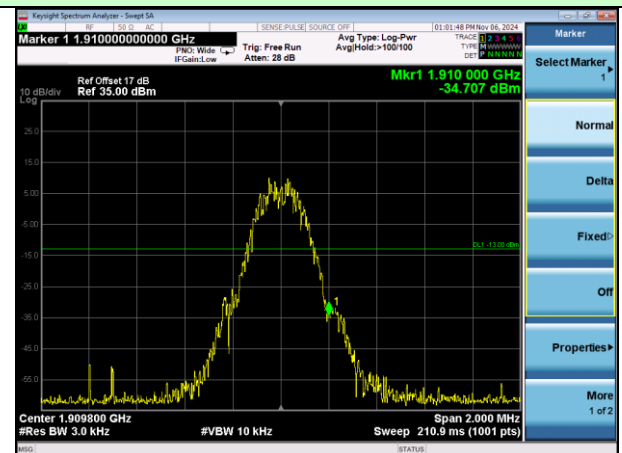


Highest channel

## Test Mode: Traffic mode

## PCS1900 (EGPRS 1 link)

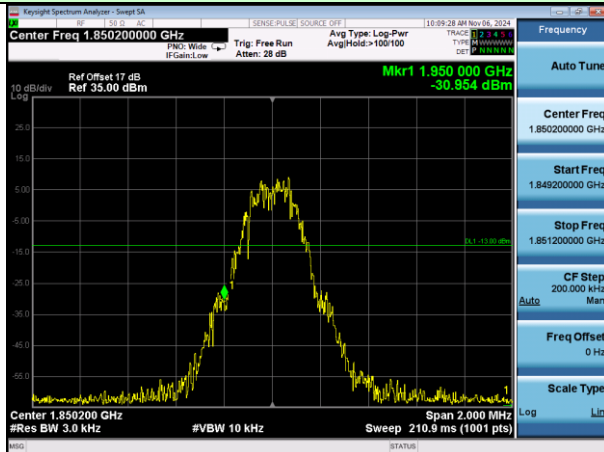


Lowest channel

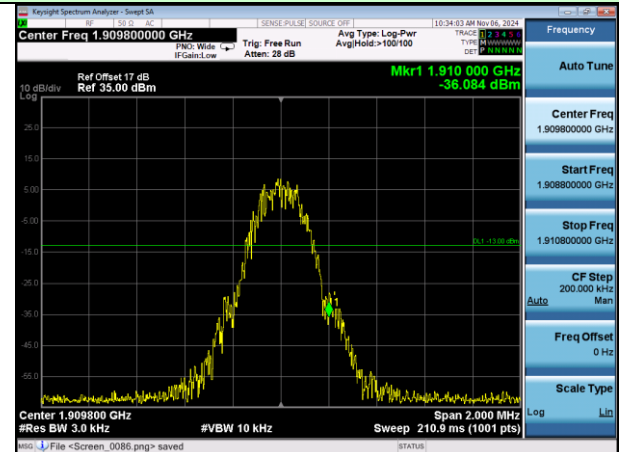

Highest channel

## Test Mode: Traffic mode

## WCDMA Band V (RMC 12.2Kbps link)

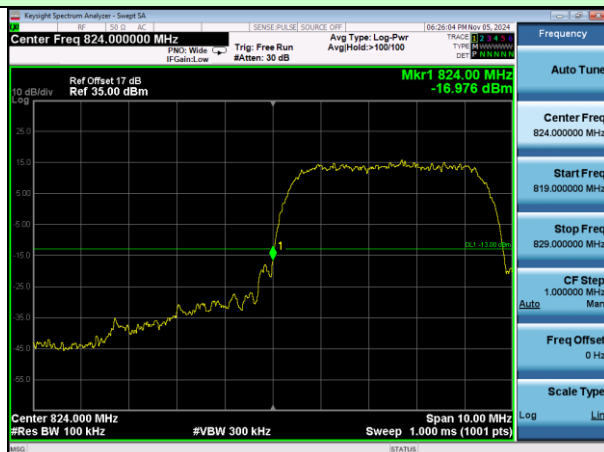

Lowest channel



Highest channel

## Test Mode: Traffic mode

## WCDMA Band II (RMC 12.2Kbps link)



Lowest channel




Highest channel

## Test Mode: Traffic mode

## WCDMA Band IV (RMC 12.2Kbps link)






Lowest channel

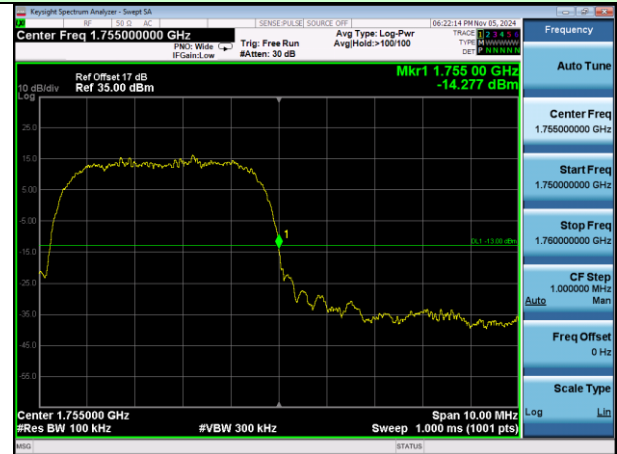

Highest channel

#### 4.8 ERP, EIRP Measurement

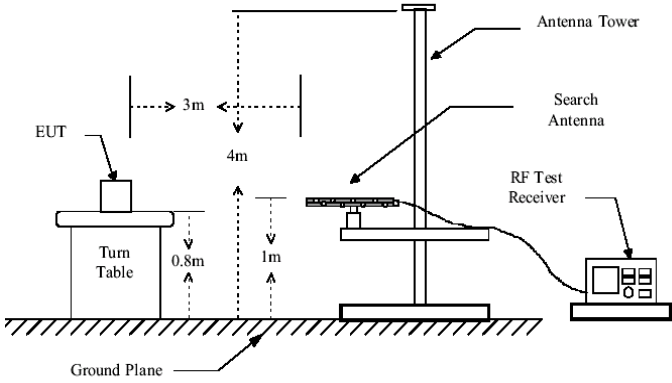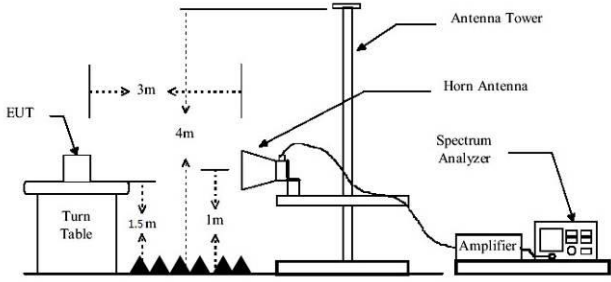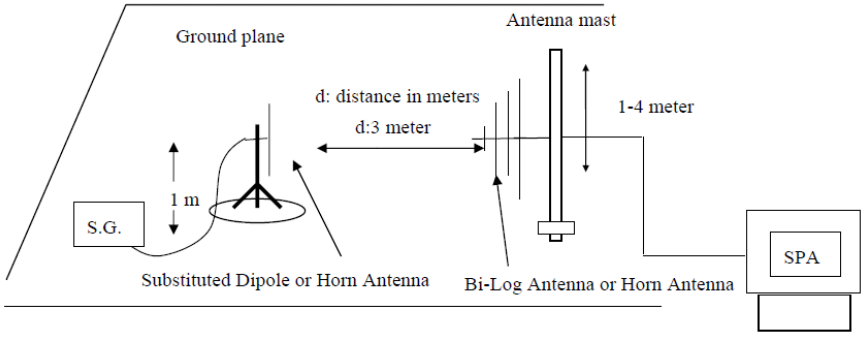Test Requirement:	FCC part22.913(a) and FCC part24.232(b) , Part 27.54(h)
Test Method:	FCC part2.1046
Limit:	GSM850, WCDMA Band V: 7W PCS1900, WCDMA Band II: 2W WCDMA Band IV: 1W
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p> 

Test Procedure:	<ol style="list-style-type: none"><li>1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.</li><li>2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.</li><li>3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows: <math display="block">\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}</math></li><li>4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: <math display="block">\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}</math></li></ol>
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850 (GPRS 1 link)	Lowest	H	V	29.11	38.45	Pass
			H	29.98		
		E1	V	29.49		
			H	29.53		
		E2	V	30.47		
			H	29.23		
	Middle	H	V	30.46	38.45	Pass
			H	30.90		
		E1	V	29.09		
			H	29.30		
		E2	V	30.83		
			H	31.08		
	Highest	H	V	29.80	38.45	Pass
			H	30.58		
		E1	V	31.18		
			H	30.44		
		E2	V	29.58		
			H	29.45		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850 (EGPRS 1 link)	Lowest	H	V	27.46	38.45	Pass
			H	27.59		
		E1	V	28.10		
			H	27.57		
		E2	V	27.46		
			H	27.99		
	Middle	H	V	27.10	38.45	Pass
			H	27.13		
		E1	V	28.66		
			H	28.93		
		E2	V	28.17		
			H	27.91		
	Highest	H	V	29.12	38.45	Pass
			H	28.88		
		E1	V	27.18		
			H	27.65		
		E2	V	27.31		
			H	28.85		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP (dBm)	Limit (dBm)	Result
PCS1900 (GPRS 1 link)	Lowest	H	V	30.59	33.01	Pass
			H	30.51		
		E1	V	30.27		
			H	29.97		
		E2	V	31.10		
			H	30.41		
	Middle	H	V	30.94	33.01	Pass
			H	29.36		
		E1	V	29.24		
			H	29.62		
		E2	V	29.42		
			H	30.05		
	Highest	H	V	30.84	33.01	Pass
			H	30.57		
		E1	V	30.92		
			H	29.00		
		E2	V	31.16		
			H	30.41		




EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP (dBm)	Limit (dBm)	Result
PCS1900 (EGPRS 1 link)	Lowest	H	V	27.58	33.01	Pass
			H	28.46		
		E1	V	27.09		
			H	27.42		
		E2	V	27.37		
			H	29.15		
	Middle	H	V	28.28	33.01	Pass
			H	26.90		
		E1	V	28.88		
			H	27.15		
		E2	V	29.17		
			H	28.90		
	Highest	H	V	28.11	33.01	Pass
			H	28.45		
		E1	V	28.27		
			H	28.66		
		E2	V	27.39		
			H	27.88		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
WCDMA Band V	Lowest	H	V	22.12	38.45	Pass
			H	22.47		
		E1	V	22.61		
			H	22.48		
		E2	V	22.85		
			H	23.47		
	Middle	H	V	21.88	38.45	Pass
			H	23.48		
		E1	V	22.09		
			H	22.08		
		E2	V	23.56		
			H	21.34		
	Highest	H	V	21.63	38.45	Pass
			H	21.55		
		E1	V	22.70		
			H	22.86		
		E2	V	22.73		
			H	22.00		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
WCDMA Band II	Lowest	H	V	23.64	33.01	Pass
			H	23.04		
		E1	V	23.11		
			H	22.11		
		E2	V	22.48		
			H	23.21		
	Middle	H	V	22.58	33.01	Pass
			H	22.11		
		E1	V	23.69		
			H	23.10		
		E2	V	22.36		
			H	22.88		
	Highest	H	V	23.25	33.01	Pass
			H	22.63		
		E1	V	23.58		
			H	22.01		
		E2	V	23.22		
			H	22.72		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
WCDMA Band IV	Lowest	H	V	21.50	33.01	Pass
			H	21.35		
		E1	V	23.62		
			H	23.01		
		E2	V	23.63		
			H	23.01		
	Middle	H	V	22.98	33.01	Pass
			H	23.03		
		E1	V	21.86		
			H	23.14		
		E2	V	23.44		
			H	21.61		
	Highest	H	V	22.18	33.01	Pass
			H	23.01		
		E1	V	23.00		
			H	21.82		
		E2	V	22.03		
			H	23.45		

#### 4.9 Field strength of spurious radiation measurement

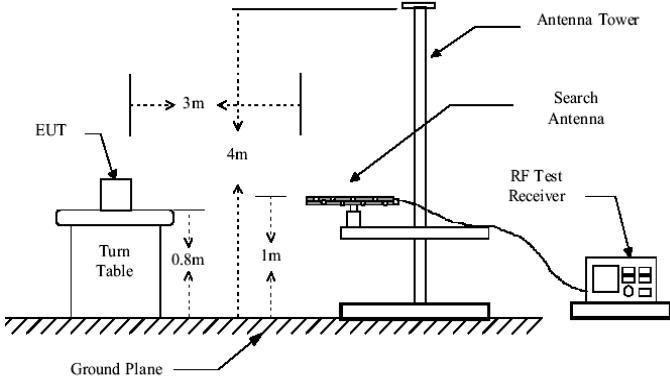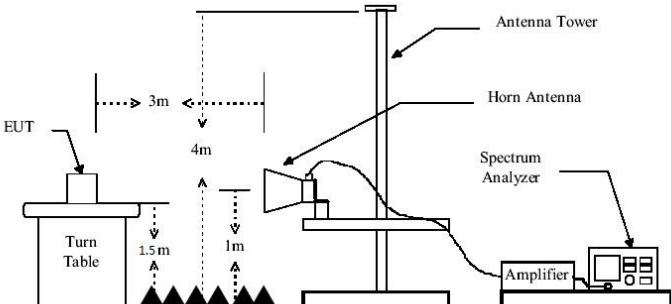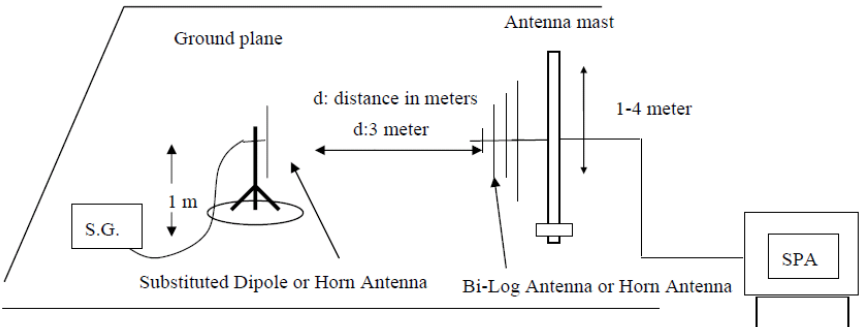Test Requirement:	FCC part22.917(a) and FCC part24.238(a), Part 27.54(h)
Test Method:	FCC part2.1053
Limit:	-13dBm
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p> 

Test Procedure:	<ol style="list-style-type: none"><li>1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.</li><li>2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.</li><li>3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.</li><li>4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. <math display="block">\text{ERP / EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}</math></li></ol>
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

## Measurement Data

Test mode:	GPRS850		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1698.27	V	-38.52	-13.00	Pass
2546.67	V	-38.60		
3394.48	V	-35.18		
4243.34	V	-34.27		
5092.43	V	-30.39		
1696.93	H	-39.98	-13.00	Pass
2546.01	H	-36.43		
3394.34	H	-36.72		
4243.76	H	-32.51		
5093.11	H	-30.61		
Test mode:	EGPRS850		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1696.50	V	-39.13	-13.00	Pass
2545.17	V	-37.72		
3394.27	V	-34.63		
4242.92	V	-33.53		
5092.52	V	-31.19		
1697.61	H	-38.49	-13.00	Pass
2546.51	H	-38.47		
3395.52	H	-36.48		
4243.55	H	-32.39		
5092.55	H	-29.17		

## Remark :

1. The emission behaviour belongs to narrowband spurious emission.
2. The above table only shows the worst case channel of each mode.
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	GPRS1900		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3819.34	V	-39.36	-13.00	Pass
5729.22	V	-37.21		
7639.31	V	-35.86		
9548.61	V	-33.88		
11459.39	V	-30.13		
3819.65	H	-39.68	-13.00	Pass
5729.19	H	-37.67		
7640.39	H	-34.85		
9547.99	H	-33.49		
11457.87	H	-30.14		
Test mode:	EGPRS1900		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3818.90	V	-38.42	-13.00	Pass
5730.29	V	-37.79		
7640.00	V	-35.19		
9548.71	V	-33.47		
11458.96	V	-32.14		
3819.48	H	-38.85	-13.00	Pass
5728.64	H	-38.37		
7638.02	H	-36.90		
9548.68	H	-31.95		
11457.83	H	-28.36		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. The above table only shows the worst case channel of each mode.
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	WCDMA Band V		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1653.78	V	-38.13	-13.00	Pass
2478.57	V	-37.50		
3305.84	V	-34.18		
4132.65	V	-33.72		
4958.05	V	-31.56		
1654.21	H	-38.91	-13.00	Pass
2478.93	H	-38.34		
3306.01	H	-34.59		
4130.74	H	-34.05		
4958.83	H	-30.37		
Test mode:	WCDMA Band V		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.05	V	-38.10	-13.00	Pass
2509.46	V	-37.60		
3346.23	V	-35.05		
4183.08	V	-34.25		
5018.15	V	-31.59		
1673.26	H	-38.21	-13.00	Pass
2508.69	H	-37.71		
3346.43	H	-35.28		
4183.08	H	-33.75		
5018.80	H	-29.24		
Test mode:	WCDMA Band V		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1693.50	V	-40.19	-13.00	Pass
2539.24	V	-37.88		
3385.39	V	-36.08		
4232.45	V	-32.29		
5078.61	V	-32.29		
1693.92	H	-39.06	-13.00	Pass
2539.41	H	-36.32		
3385.92	H	-36.06		
4234.08	H	-32.86		
5079.13	H	-30.05		

Remark :

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	WCDMA Band II		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3703.90	V	-39.17	-13.00	Pass
5556.83	V	-36.86		
7408.98	V	-35.55		
9261.09	V	-34.04		
11114.55	V	-31.19		
3704.23	H	-37.96	-13.00	Pass
5557.23	H	-37.96		
7409.85	H	-35.95		
9262.12	H	-32.44		
11115.06	H	-30.44		
Test mode:	WCDMA Band II		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3759.83	V	-40.04	-13.00	Pass
5639.67	V	-37.12		
7518.76	V	-34.55		
9399.67	V	-32.39		
11281.13	V	-30.65		
3760.22	H	-39.91	-13.00	Pass
5639.91	H	-37.85		
7520.77	H	-35.62		
9399.79	H	-32.21		
11279.11	H	-30.59		
Test mode:	WCDMA Band II		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3815.45	V	-38.08	-13.00	Pass
5722.23	V	-37.63		
7630.52	V	-36.18		
9537.06	V	-33.15		
11445.06	V	-31.69		
3813.67	H	-38.86	-13.00	Pass
5723.55	H	-37.90		
7630.46	H	-35.27		
9537.72	H	-33.13		
11446.30	H	-30.86		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	WCDMA Band IV		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3424.02	V	-39.88	-13.00	Pass
5136.99	V	-37.93		
6848.48	V	-36.78		
8561.12	V	-33.30		
10275.11	V	-32.50		
3425.34	H	-39.14	-13.00	Pass
5137.79	H	-36.70		
6849.09	H	-35.61		
8562.92	H	-33.57		
10273.36	H	-29.96		
Test mode:	WCDMA Band IV		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3480.32	V	-38.34	-13.00	Pass
5220.11	V	-38.15		
6960.12	V	-35.52		
8699.04	V	-33.31		
10441.02	V	-31.32		
3481.21	H	-39.76	-13.00	Pass
5221.15	H	-38.10		
6960.23	H	-36.83		
8699.87	H	-32.16		
10440.49	H	-30.51		
Test mode:	WCDMA Band IV		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3504.93	V	-40.31	-13.00	Pass
5257.95	V	-37.30		
7009.32	V	-36.41		
8762.95	V	-34.14		
10515.03	V	-29.98		
3505.43	H	-39.16	-13.00	Pass
5257.53	H	-37.84		
7011.06	H	-34.54		
8762.99	H	-33.59		
10515.31	H	-29.81		

## Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

#### 4.10 Frequency stability V.S. Temperature measurement

Test Requirement:	FCC Part2.1055(a)(1)(b)
Test Method:	FCC Part2.1055(a)(1)(b)
Limit:	2.5ppm
Test setup:	<p style="text-align: center;"> </p> <p style="text-align: center;">Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> <li>1. The equipment under test was connected to an external DC power supply and input rated voltage.</li> <li>2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.</li> <li>3. The EUT was placed inside the temperature chamber.</li> <li>4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.</li> <li>5. Turn EUT off and set the chamber temperature to –20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.</li> <li>6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.</li> </ol>
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass


## Measurement Data

Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-20	13	0.0161	2.5	Pass
	-10	-8	-0.0091		
	0	27	0.0322		
	10	-6	-0.0074		
	20	14	0.0170		
	30	12	0.0139		
	40	15	0.0178		
	50	8	0.0100		
	60	16	0.0186		
Reference Frequency: GSM850 (EGPRS 1 link) Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-20	27	0.0324	2.5	Pass
	-10	-5	-0.0055		
	0	24	0.0281		
	10	-6	-0.0073		
	20	17	0.0199		
	30	16	0.0189		
	40	16	0.0195		
	50	13	0.0156		
	60	17	0.0206		

Reference Frequency: PCS1900 (GPRS 1 link) Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
12	-20	23	0.0122	2.5	Pass
	-10	-6	-0.0030		
	0	20	0.0108		
	10	0	-0.0002		
	20	24	0.0130		
	30	15	0.0078		
	40	14	0.0074		
	50	10	0.0052		
	60	16	0.0085		
Reference Frequency: PCS1900 (EGPRS 1 link) Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
12	-20	25	0.0134	2.5	Pass
	-10	-11	-0.0060		
	0	26	0.0137		
	10	-7	-0.0039		
	20	23	0.0122		
	30	20	0.0106		
	40	13	0.0067		
	50	4	0.0022		
	60	15	0.0081		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-20	14	0.0172	2.5	Pass
	-10	-17	-0.0201		
	0	24	0.0289		
	10	-1	-0.0014		
	20	23	0.0273		
	30	7	0.0088		
	40	16	0.0190		
	50	9	0.0108		
	60	10	0.0122		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880.0MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-20	29	0.0154	2.5	Pass
	-10	-9	-0.0046		
	0	23	0.0124		
	10	-5	-0.0029		
	20	15	0.0079		
	30	20	0.0107		
	40	10	0.0051		
	50	10	0.0054		
	60	14	0.0076		
Reference Frequency: WCDMA Band IV Middle channel=1450 channel=1740.0MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.8	-20	21	0.0122	2.5	Pass
	-10	-11	-0.0063		
	0	22	0.0127		
	10	-6	-0.0033		
	20	25	0.0141		
	30	11	0.0061		
	40	9	0.0052		
	50	15	0.0087		
	60	7	0.0043		

## 4.11 Frequency stability V.S. Voltage measurement

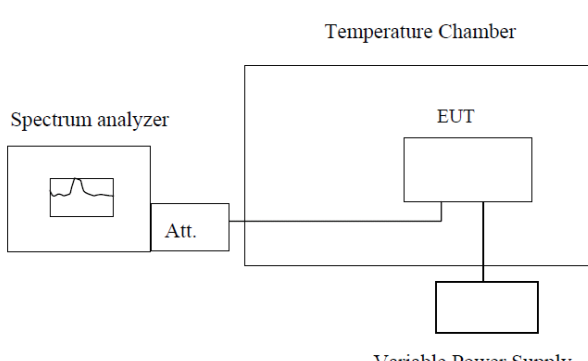Test Requirement:	FCC Part2.1055(d)(1)(2)
Test Method:	FCC Part2.1055(d)(1)(2)
Limit:	2.5ppm
Test setup:	<p style="text-align: center;">  </p> <p style="text-align: center;">Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> <li>1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage.</li> <li>2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.</li> <li>3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.</li> </ol>
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass



## Measurement Data

Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	20	0.0243	2.5	Pass
	24	-15	-0.0175		
	9	24	0.0288		
Reference Frequency: GSM850 (EGPRS 1 link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	20	0.0238	2.5	Pass
	24	-5	-0.0059		
	9	21	0.0252		
Reference Frequency: PCS1900 (GPRS 1 link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	15	0.0078	2.5	Pass
	24	-15	-0.0082		
	9	29	0.0154		
Reference Frequency: PCS1900 (EGPRS 1 link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	27	0.0145	2.5	Pass
	24	-15	-0.0082		
	9	29	0.0157		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	20	0.0243	2.5	Pass
	24	-13	-0.0159		
	9	23	0.0276		
Reference Frequency: WCDMA Band II Middle channel=940 channel=1880.0MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	23	0.0121	2.5	Pass
	24	-4	-0.0020		
	9	27	0.0141		
Reference Frequency: WCDMA Band IV Middle channel=1450 channel=1740.0MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	13	0.0077	2.5	Pass
	24	-15	-0.0089		
	9	19	0.0108		

## 5 Test Setup Photo

Radiated Emission

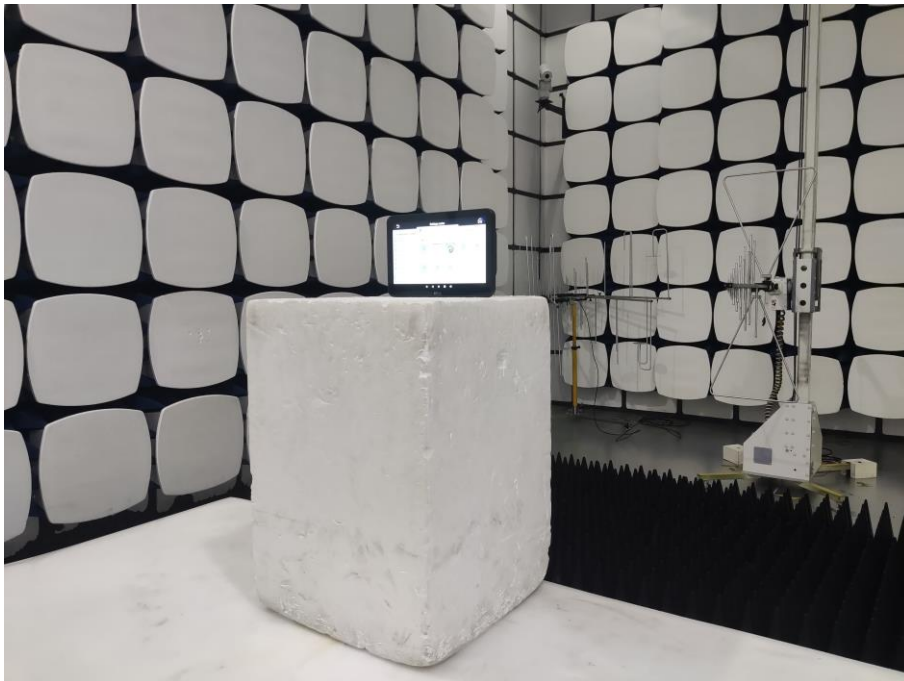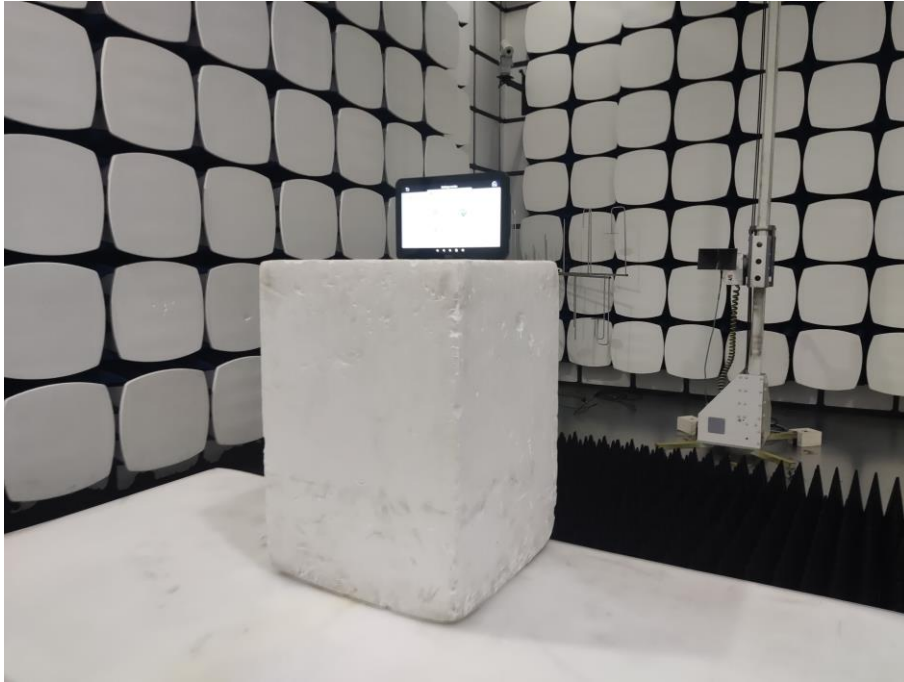

-----END OF REPORT-----