

acknowledgment

Customer name:Shenzhen Woyade

Customer Item:A11

Our model:YC-G50-6.5UH-20MM

Date of sample delivery: November 19, 2024

Supplier: Dongguan jieruisi technology co., ltd

draw	check	approve
Wang lizhi	Deng xianggui	Lu Ru St.

Customer acknowledges that:

qualified	Unqualified / disqualification	admission
remarks		

Dongguan jieruisi technology co., ltd


Tel:0769-83030315

Fax: 86+13632701380

Address: No.96, Langhu Road, Dalingshan Town, Dongguan
(3rd floor, Building L, Jinxiongda Science Park)

Customer name	Customer item	Model of our company	version	date
Shenzhen Woyade	A11	YC-G50-6.5UH-20MM	A0	2024.11.19

I. Plane Structure Diagram: Unit: MM

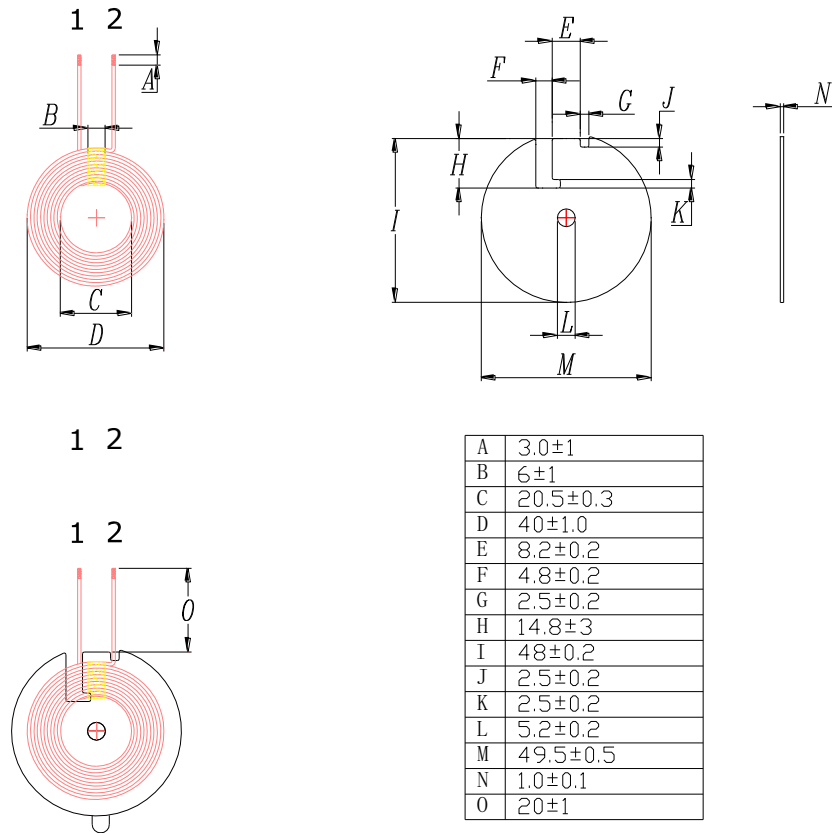

Second, the product parameters:

foot position	Wire Diameter	cylinder number	rema rks
1 - 2	0.08*105	10	Self-adhesive covered wire

Third, the technical requirements:

1. Attach 6MM high-temperature adhesive tape to the corresponding position of the coil, and fix the thread end to prevent the thread from loosening.
2. According to customer's requirements, the excessively long thread ends are cut off and plated with tin, and the depth of tin plating is 3 1 mm.
3. Put appropriate white glue on the magnetic disk and attach the coil, and ensure that the surface of the product is clean and tidy during the process.
4. The use magnetic sheet is slotted with round hole, Model G50, size 50X5.2X1.0, undamaged.
5. Additional conditions: paste corresponding double-sided delivery according to customer's requirements.

Four, electrical parameters:

1. Inductance value:

$$PIN \quad 1 \text{---} \quad 2 = 6.5\mu H \pm 0.3\mu H$$

The above inductance values are based on Quanhua 1062 instrument,
1KHZ/0.25Vrms is a standard or equivalent
instrument.

V. List of materials:

serial num ber	name	texture of wood	supplier	remarks
one	Self-adhesive covered wire	2UEW UDATC/130 0.08*105P	Huaye or equivalent	
2	mag netic sheet	G50 PC95 timber	Go core or equivalent	
three	High temperature adhesive tape	6MM-280°C	Philosophy or equivalence	
four	tin	High temperature and environmental protection	Taitin or equivalent	
five	White latex	BY882	Bao Yue or equivalent.	
six	gum	48MM		Ordinary white
seven				
eight				
nine				
10				