



TopSeed Technology Corp.

9F-3, No. 16, Jain Ba Rd., Chung Ho City,
Taipei Hsien, Taiwan 235, R.O.C.

TEL: +886-2-8226-3811

FAX: +886-2-8226-3822

APPROVAL SHEET

No: _____

Date: 2002/08/01

.....

Customer: _____

Customer Part No: _____

Parts Name: RF Optical Mouse

Part No.: MSBG0002-902

Spec. No.: TSBG-901

Note: _____

.....

Signature For Return

APP' D

CHK' D

DSG' D

SPECIFICATION FOR
RF Optical Mouse

PAGE: 2/15
DATE: 2002/08/01

TABLE OF CONTENTS

- 0. Table of date revision
- 1. FCC GUIDELINES
- 2. Description
- 3. Physical Description and Specification
 - 3-1 Dimensions
 - 3-2 Weight
- 4. RF Mouse Specification
 - 4-1 Main Feature
 - 4-2 System Requirement
 - 4-3 RF Optical Mouse Characteristics
 - 4-4 RF Characteristics
- 5. Electronical Block Diagram
 - 5-1 FSK (912MHZ) Transmitter
 - 5-2 FSK (912MHZ) Receiver

Table of date-revision

						APPD.	CHKD.	DSGD.	SPEC. NO.	RF Optical Mouse FSK (912MHZ)
									MSBG0002-902	
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.					

SPECIFICATION FOR
RF Optical Mouse

PAGE: 3/15
DATE: 2002/08/01

TABLE OF CONTENTS

- 6. Electrical Characteristics
 - 6-1 GENERAL SPECIFICATION
 - 6-2 Operational Range
 - 6-3 Electrostatic Discharge (ESD) Sensitivity
 - 6-4 AC/DC Characteristics
- 7. Mechanical Spec.
- 8. Endurance Test
 - 8-1 Tracking life Test
 - 8-2 Left and right button life test
 - 8-3 High Temperature Test
 - 8-4 Wheel scroll button life test
 - 8-5 Drop test
 - 8-6 ESD test
 - 8-7 Drop Test
 - 8-8 Scrolling life Test
- 9. Environmental Tests
 - 9-1 Heat load test
 - 9-2 Humidity load test
 - 9-3 Cold test
 - 9-4 Vibration test
 - 9-5 HEAT CYCLE TEST
- 10. Assembly & Packing Drawing

						APPD.	CHKD.	DSGD.	SPEC. NO.	RF Optical Mouse FSK (912MHZ)
									MSBG0002-902	
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.					

SPECIFICATION FOR RF Optical Mouse

PAGE: 4/15

DATE: 2002/08/01

FCC GUIDELINES

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

						APPD.	CHKD.	DSGD.	SPEC. NO.	RF Optical Mouse FSK (912MHZ)
									MSBG0002-902	
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.					

SPECIFICATION FOR
RF Optical Mouse

PAGE: 5/15

DATE: 2002/08/01

2. Description:

The RF Optical Mouse is a FSK (Frequency Shift Key) Transmitter for the frequency band 902-928 MHz. The RF Optical Mouse offers a full-integrated PLL synthesizer and a high efficiency power amplifier to drive a loop antenna; A special circuit design and an unique power amplifier design are used to save current consumption and to save battery live.

This RF Optical Mouse is a three button designed with **3D** scrolling design, scroll wheel, lets you scroll up and down as desired, when browsing the Internet or scrolling through any Windows documents With 800 dots-per-inch (DPI) gives reliable control and accuracy.

For the Receiver Modular use with USB 1.1 compliant can be easily actuated without affecting the position of the mouse.

The Radio Frequency designed in this Version of RF Mouse is FSK 912MHz and can be use in a range to 5-7 Meter from the Receiver at any directions. The Mouse can operate for 2 months with two AAA Alkaline batteries.




Note that the Channel button (Red button) on the receiver should flash any time the Cordless device is moved or a button is pressed. Then, it will remember your product ID and Channel ID

						APPD.	CHKD.	DSGD.	SPEC. NO.	RF Optical Mouse FSK (912MHZ)
									MSBG0002-902	
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.					

SPECIFICATION FOR
RF Optical Mouse

PAGE: 6/15
DATE:2002/08/01

3. Physical Description and Specification:

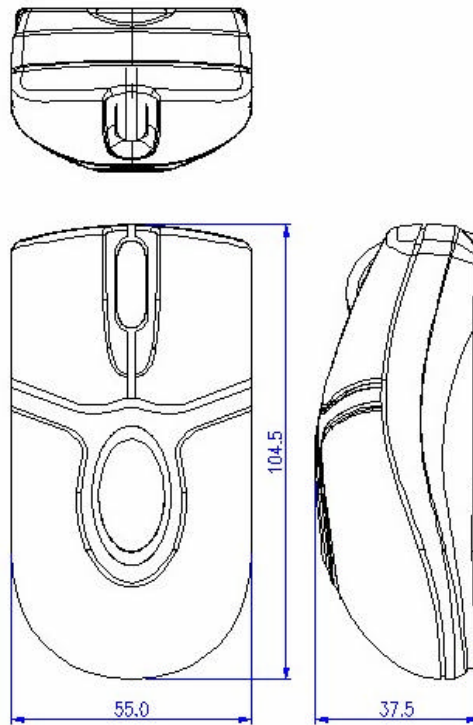

3.1 Dimensions

The approximate dimensions of the mouse' s transmitter is as follows:

Length	104.5 mm
Width	55 mm
Height	37.5 mm

3.2 Weight

The approximate dimensions of the mouse' s transmitter is as follows:

Weight of the RF Mouse not to exceed 65 grams (without batteries).

						APPD.	CHKD.	DSGD.	SPEC. NO.	RF Optical Mouse FSK (912MHZ)
									MSBG0002-902	
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.					

**SPECIFICATION FOR
RF Optical Mouse**

PAGE: 7/15
DATE:2002/08/01

4.RF Optical Mouse Specification

4-1 Main Feature

The RF Optical Mouse consists of three major parts; a baseband controller-The New HP ADNS-2030 Chip offers extra high 800 Dpi resolution, a radio that suitable for America available 902–928 MHz frees ISM band applications, and a low power uC-controlled, includes RF antenna supporting circuitry, together with basic RF software level.

4- 1 Range in meters: 5-7 Meter from the Receiver

4- 2 Frequency Range: 912MHz+/-50KHz (64 channels ID for Mouse)

4- 3 Data transmitting by transistor module

4- 4 Operational voltage: 3.0 V

4-5 Low power consumption: on normal operation 25 mA and 150 uA on sleep mode.

4-6 Mouse resolution: 800 DPI

4-7 Support Power down Mode and high efficiency power amplifier.

4-8 Receiver Fully Compliant Low Speed (1.5Mbps) USB 1.1 Interface

4-9 Suspend/resume operation and device remote wakeup

4-2 System Requement

Windows-based PC

To use RF Optical Mouse with the scroll wheel and all customizable buttons, you need:

4-2-1 One of the following: Microsoft Windows 98, Windows Me, Windows 2000, or Windows XP Home Edition or Professional operating systems

4-2-2 An available Universal Serial Bus (USB) port on your PC

Macintosh-based PC

To use RF Optical Mouse with the scroll wheel and all customizable buttons, you need:

4-2-3 Mac OS 8.6 , 9.x or 10.1.2-10.1.3

4-2-4 An available Universal Serial Bus (USB) port

						APPD.	CHKD.	DSGD.	SPEC. NO.	RF Optical Mouse FSK (912MHZ)
									MSBG0002-902	
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.					

**SPECIFICATION FOR
RF Optical Mouse**

PAGE: 8/15

DATE:2002/08/01

4.RF Optical Mouse Specification**4-3 RF Optical Mouse Characteristics****Wireless Freedom**

Free yourself from desktop clutter and extra cables. The 64 Channel ID common radio frequency reduces interference and allows you to place the receiver out of sight.

USB Connector

Plugs into the rectangular Universal Serial Bus (USB) port on either a Windows- or Macintosh-based computer

PC- or Macintosh-Compatible

The rectangular Universal Serial Bus (USB) plug connects to a Windows or Macintosh-based computer (Supported on Mac OS 8.6 or 9.X)

Power Saving Features

Power saving technology conserves battery life. when you remove your hand , it will enter save mode and puts the mouse into "sleep" mode. And Simply awaken with a move of the mouse .

Ergonomic Design

Ergonomic Designed , provides support in a natural,comfortable position .

						APPD.	CHKD.	DSGD.	SPEC. NO.	RF Optical Mouse FSK (912MHZ)
									MSBG0002-902	
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.					

SPECIFICATION FOR
RF Optical Mouse

PAGE: 9/15

DATE: 2002/08/01

4.RF Optical Mouse Specification


4-4 RF Characteristics

Frequency Range	912 MHz
Modulation	FSK
Channel No.	1
Channel I.D	6 bits → 64
Operation Voltage	3V
Battery	AAA*2 Alkaline batteries.
Batter Life	2 months
TX Power	< 0dBm (1mW)
Transmission rate	6K bps
TX FM frequency deviation	60-120 KHz
Frequency tolerance	+/- 20ppm
Hardware Resolution	800dpi
Button	3
Transmission Distance	5-7 Meter

						APPD.	CHKD.	DSGD.	SPEC. NO.	RF Optical Mouse FSK (912MHZ)
									MSBG0002-902	
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.					

5. Electrical Block Diagram

5-1 FSK (912MHZ) Transmitter

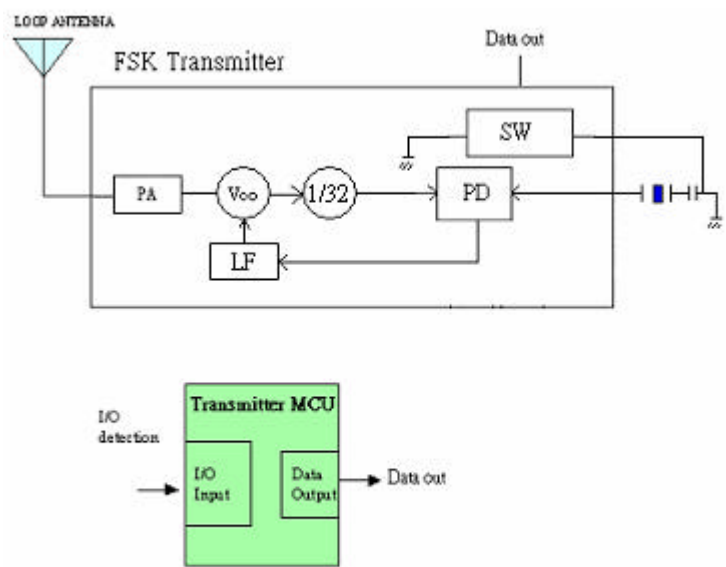


						APPD.	CHKD.	DSGD.	SPEC. NO.	RF Optical Mouse FSK (912MHZ)
									MSBG0002-902	
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.					

SPECIFICATION FOR
RF Optical Mouse

PAGE: 11/15

DATE: 2002/08/01

5-2 FSK (912MHZ) Receiver

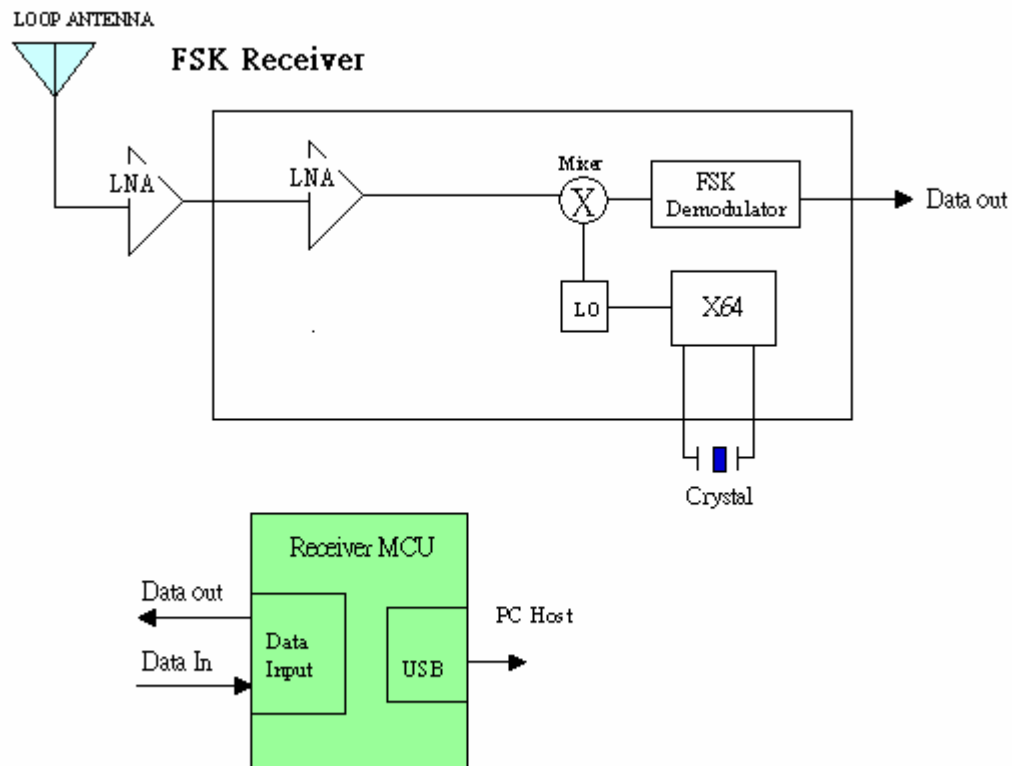

USB 1.1 compliant The module is a USB high-speed class device (12 Mbps) and has the full functionality of a USB slave

						APPD.	CHKD.	DSGD.	SPEC. NO.	RF Optical Mouse FSK (912MHZ)
									MSBG0002-902	
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.					

SPECIFICATION FOR RF Optical Mouse

PAGE: 12/15

DATE: 2002/08/01

6. Electrical Characteristics:

6.1 GENERAL SPECIFICATION

6.1.1 Operation temperature range : -10 ~ + 55

6.1.2 Storage temperature range : - 25 ~ + 65

6.1.3 Relative humidity range : 10 %~ 95 % RH

6.2 Operational Range

Parameter	Min	Max	Unit
Supply Voltage	3.0	3.6	V
Frequency (US)	912MHz+/-50KHz		MHZ
Ambient temperature	-10	60	

6.3 Electrostatic Discharge (ESD) Sensitivity

Direct discharge:

Test Voltage: Not less than 8 KV for Air discharge

Not less than 4 KV for Contact discharge

Indirect discharge:

Test Voltage: Not less than 4 KV for HCP

Not less than 4 KV for VCP

						APPD.	CHKD.	DSGD.	SPEC. NO.	RF Optical Mouse FSK (912MHZ)
									MSBG0002-902	
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.					

SPECIFICATION FOR
RF Optical Mouse

PAGE: 13/15

DATE: 2002/08/01

6.4 AC/DC Characteristics

Supply Voltage: VS= 3.0 V

Parameter		Min	Typ	Max	Unit
Current Consumption	Sleep mode		140	180	uA
	Stand by mode		1.6	2	mA
	Transmit Mode		25	35	mA
Data rate			6K		bps
Sensitivity			-102		dbm
Transmitter settling time			2.2		ms
Power amplifier output		-4	0	2	dbm
Output power (Transmit mode)			1		mW

7.Mechanical Specification

ITEM	SPECIFICATION
7.1 Mouse Operating force	Max. 150gf in any direction.
7.2 Button operating force	(1) Left and right button Max. 150gf (2) Scroll button Max. 300gf
7.3 Button stroke	0.1 ~ 2.5mm
7.4 Operation speed	Max. 200 mm/sec
7.5 Scrolling operation force	Max. 50gf in tangent direction.

						APPD.	CHKD.	DSGD.	SPEC. NO.	RF Optical Mouse FSK (912MHZ)
									MSBG0002-902	
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.					

SPECIFICATION FOR RF Optical Mouse

PAGE: 14/15

DATE: 2002/08/01

8.Endurance

ITEM	SPECIFICATION
8.1 Left and right button life test	(1) Switching frequency 1~2cycles/sec (2) Switch Actuation force: 50-100 gram force (3) Minimum Actuation per Switch 500,000 actuation
8.2 Wheel scroll button life test	(1) Switching frequency 1~2cycles/sec (2) Switch Actuation force: 50-100 gram force (3) Minimum Actuation per Switch 500,000 actuation s
8.3 Drop test	(1)Height 700 $\pm$ 20mm (2) Test surface concrete (3) Direction free (4) Test times 3 times
8.3 ESD test	(1) Air Discharge: over 8KV (2) Contact Discharge: over 4KV
8.4 Scrolling life Test	(1) Load 50gf tangent load (2)Speed 200 $\pm$ 20mm/sec (3) Travel 10Km


						APPD.	CHKD.	DSGD.	SPEC. NO.
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.				MSBG0002-902 RF Optical Mouse FSK (912MHZ)

SPECIFICATION FOR RF Optical Mouse

PAGE: 15/15

DATE: 2002/08/01

9. Environmental Tests

ITEM	SPECIFICATION
9.1 Heat load test	Measure initial value at standard testing conditions. Leave samples in 60 ± 2 °C for 96 ± 5 hours, and in standard testing conditions for 2 hours, then take measurements within 1 hour.
9.2 Humidity load test	Leave samples in 40 ± 5 °C for 24 ± 2 hours, and in standard testing conditions for 2 hours, then take measurements. Leave samples in 40 ± 5 °C, 90~95%RH, for 96 ± 5 hours, and in standard testing conditions for 2 hours, then take measurements within 1 hour.
9.3 Cold test	Measure initial value at standard testing conditions. Leave samples in -15 ± 2 °C for 96 ± 5 hours, and in Standard testing conditions for 2 hours, then take Measurements within 1 hour.
9.4 Vibration test	Vibration test fixture is used to vibrate the tuner with a total amplitude 1mm and frequency ranging from 10 to 55Hz, once per minute onsecutively, for 40 minutes in each of three directions. X. Y and Z
9.5 HEAT CYCLE TEST	Measure initial value at standard testing conditions. 1. Conditions 

NOTE: When using RF products, keep away from hi-frog electric products.

						APPD.	CHKD.	DSGD.	SPEC. NO.
SYMB.	PAGE	DATE	APPD.	SHKD.	OSGD.				MSBG0002-902 RF Optical Mouse FSK (912MHZ)