



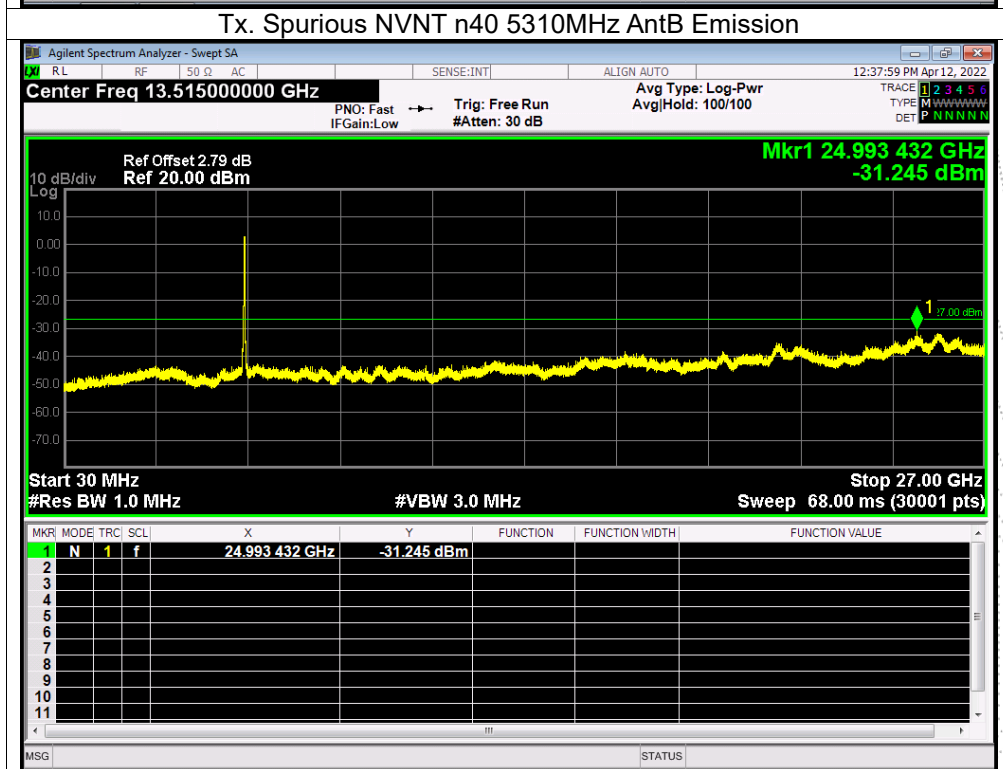
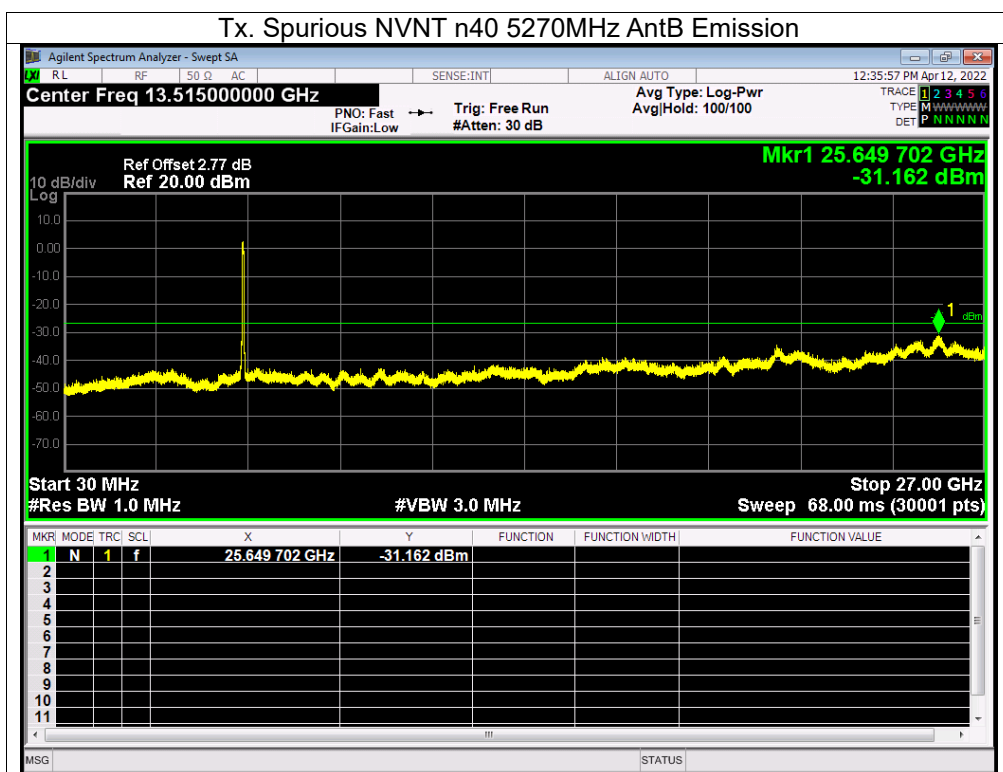
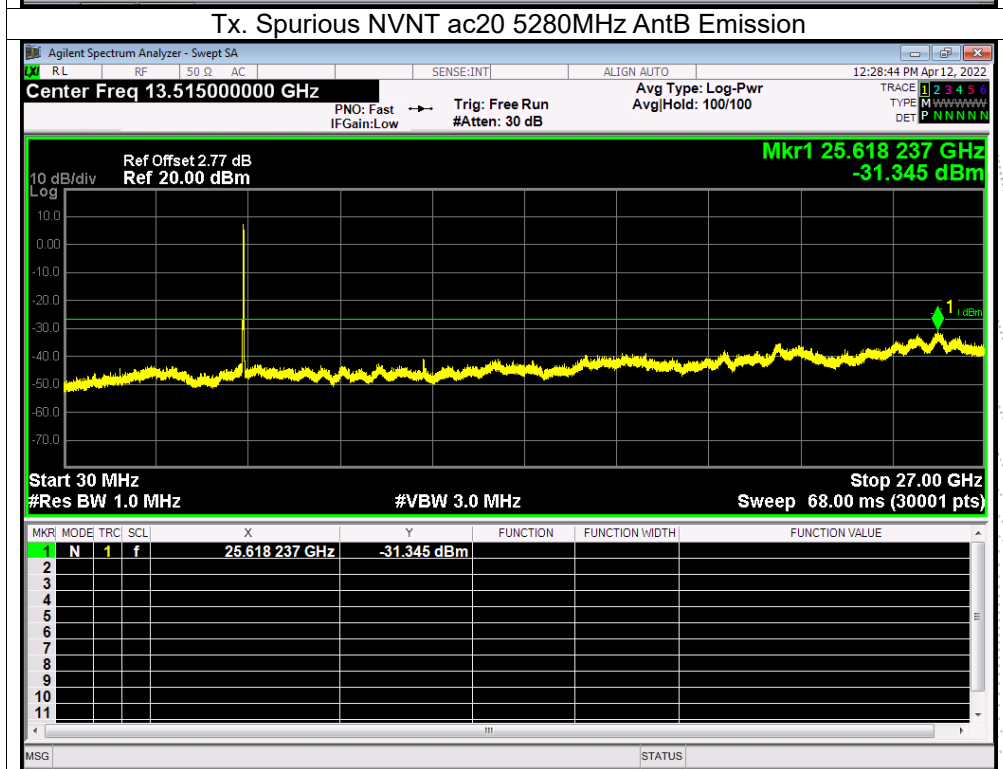
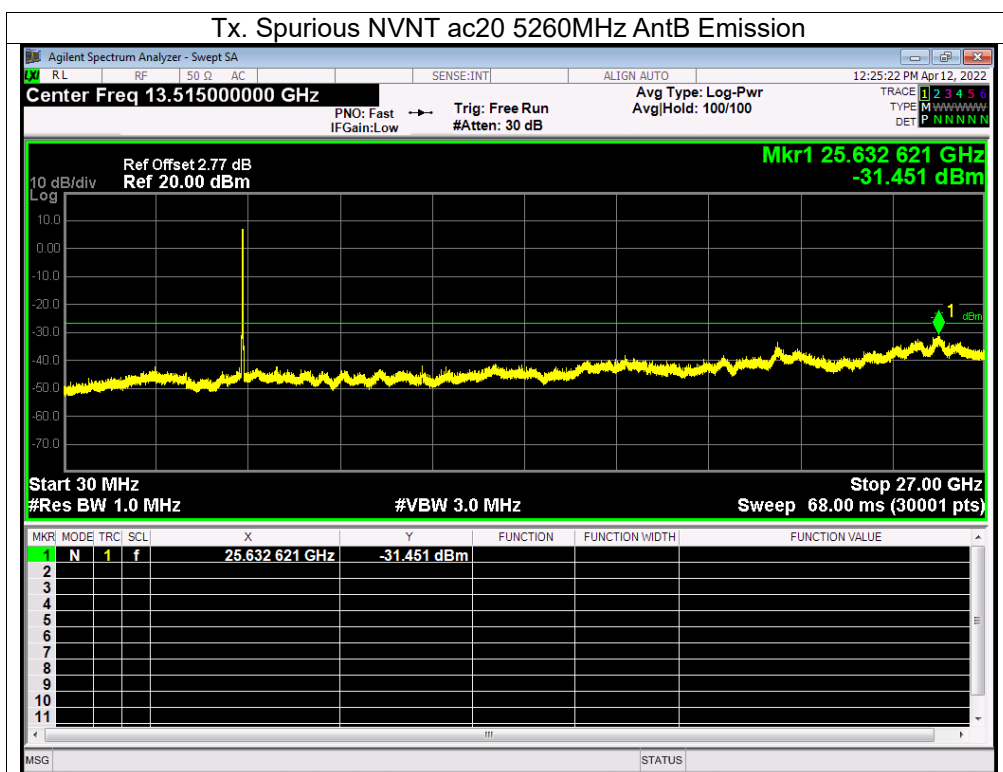


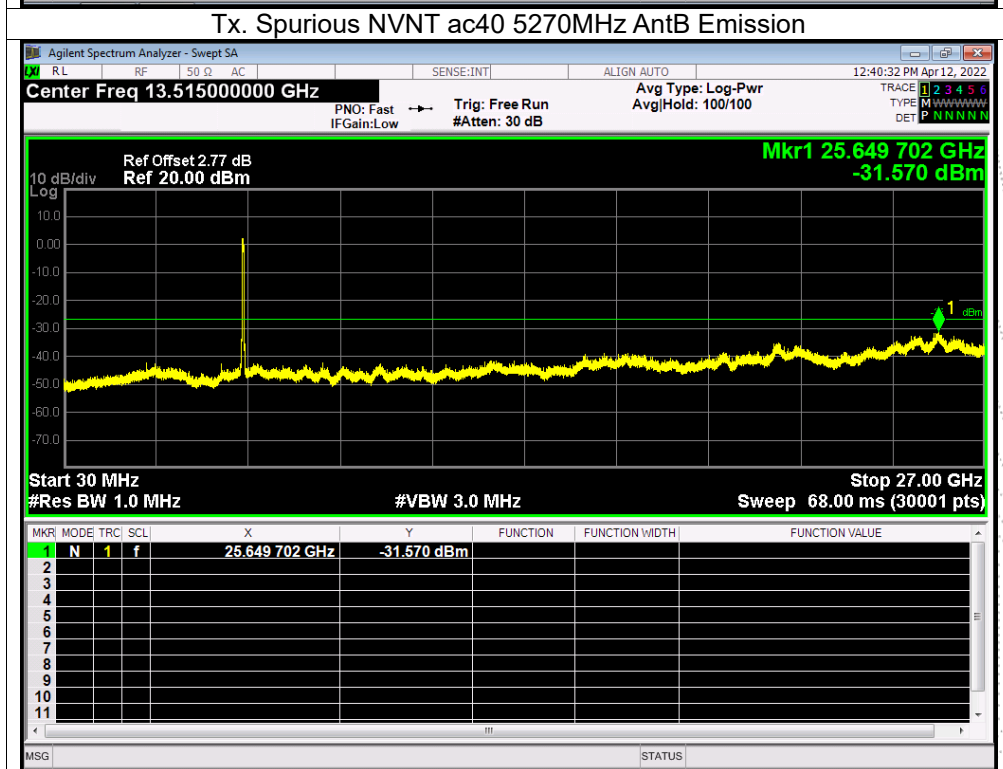



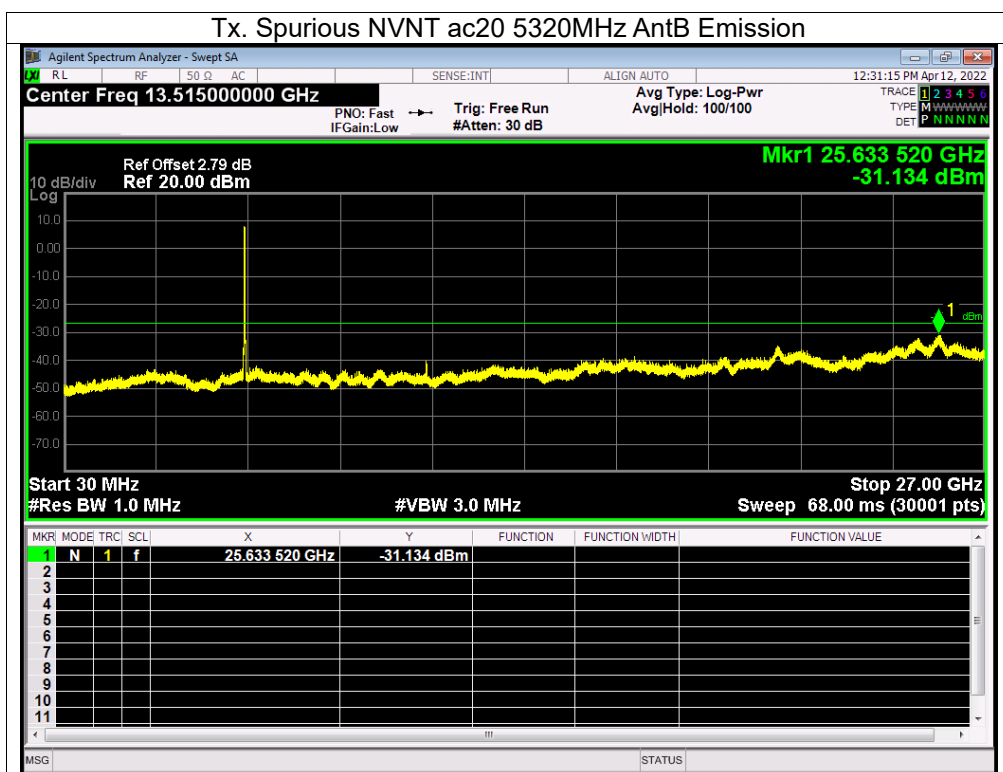



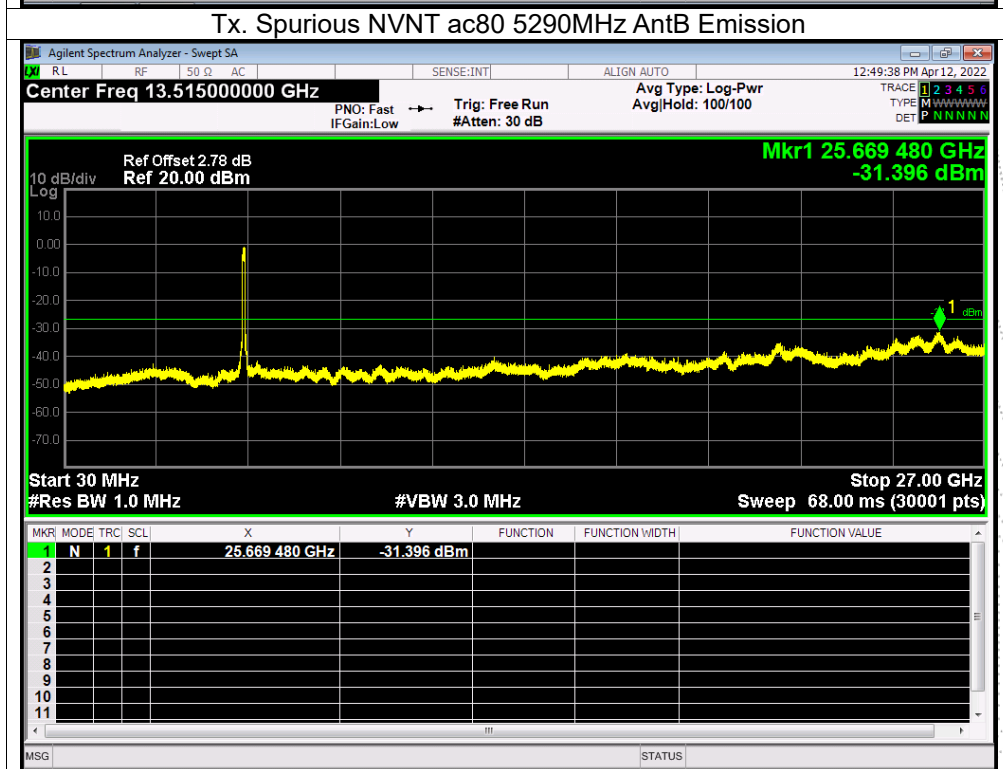



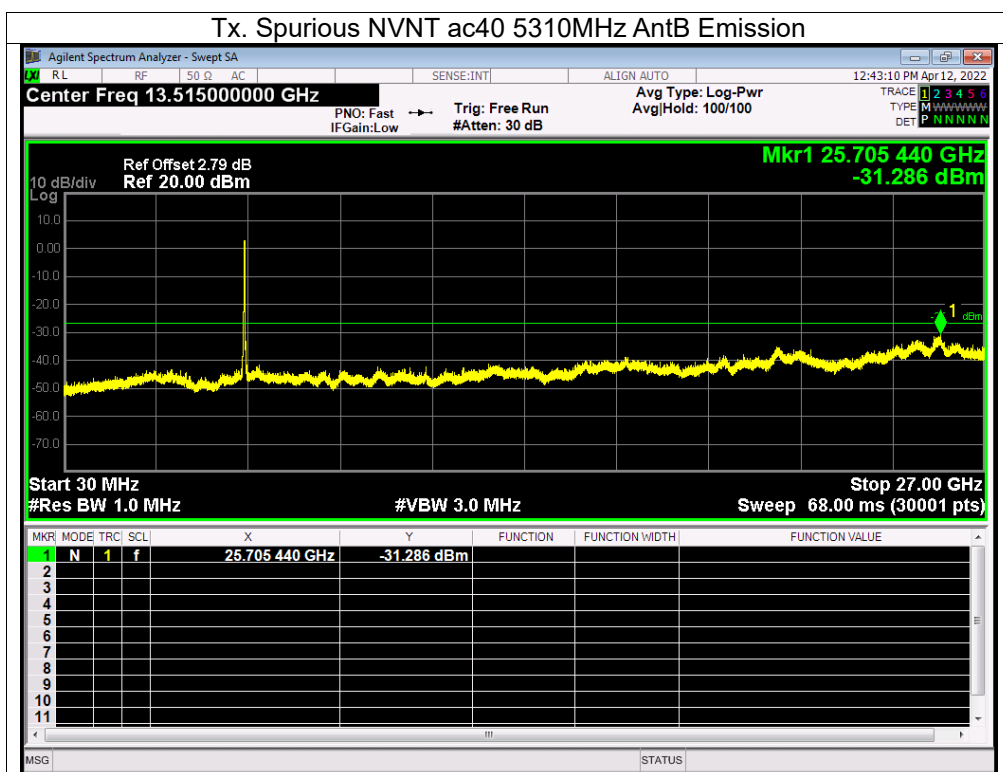




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A.
Antenna A: 5500-5700MHz


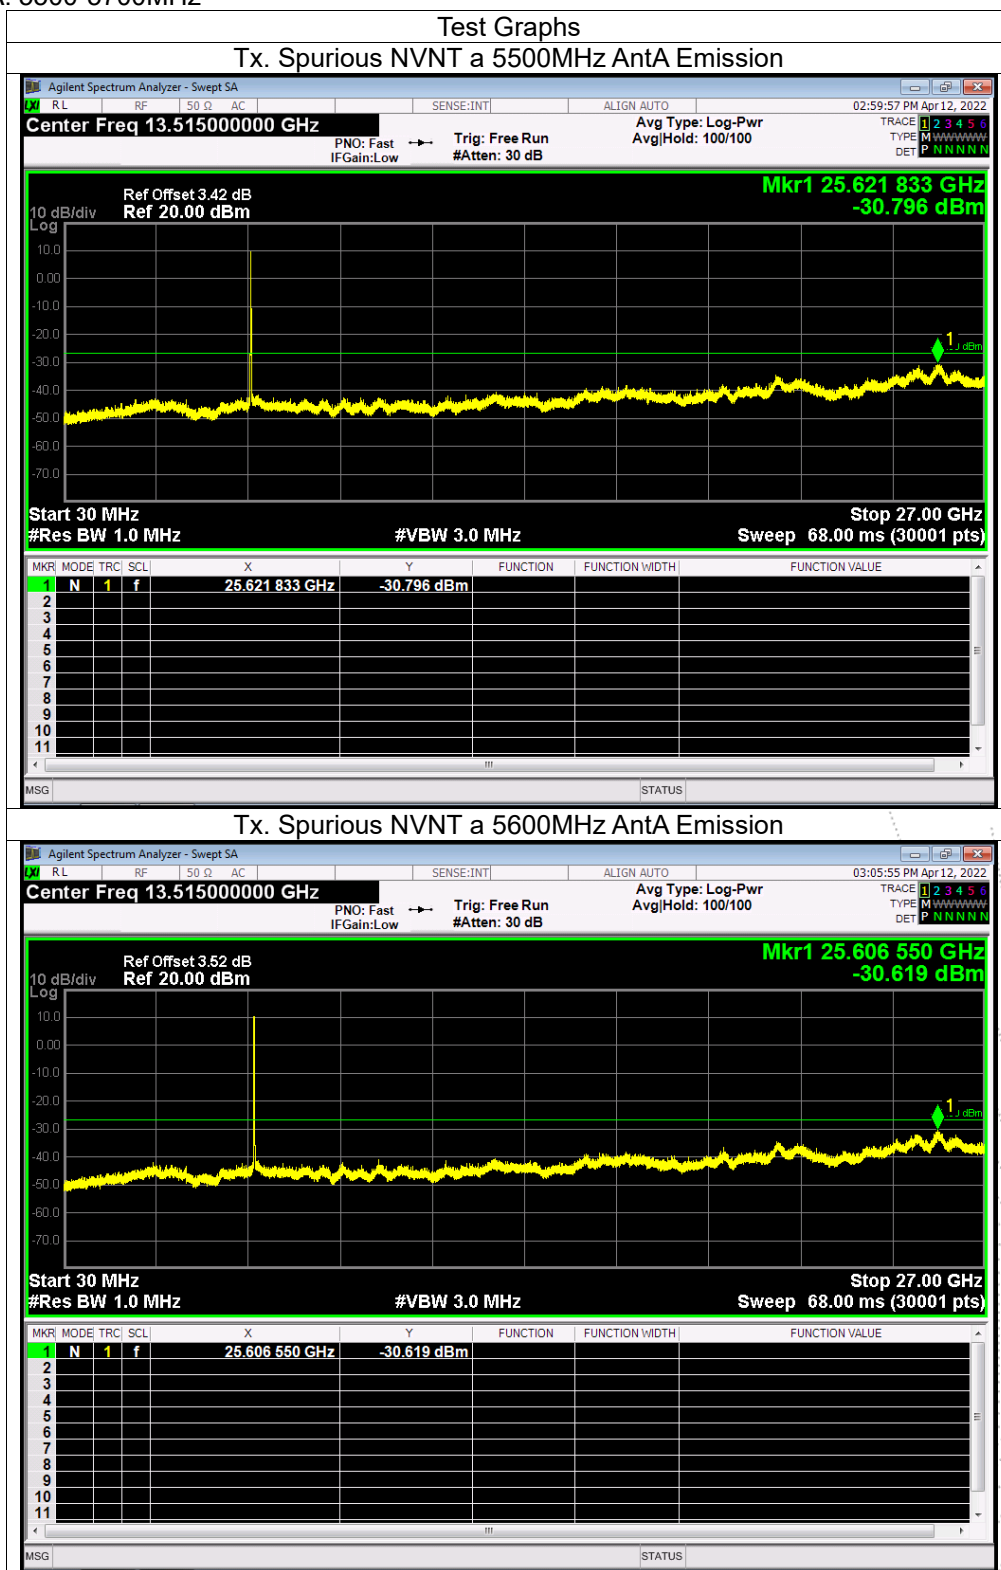


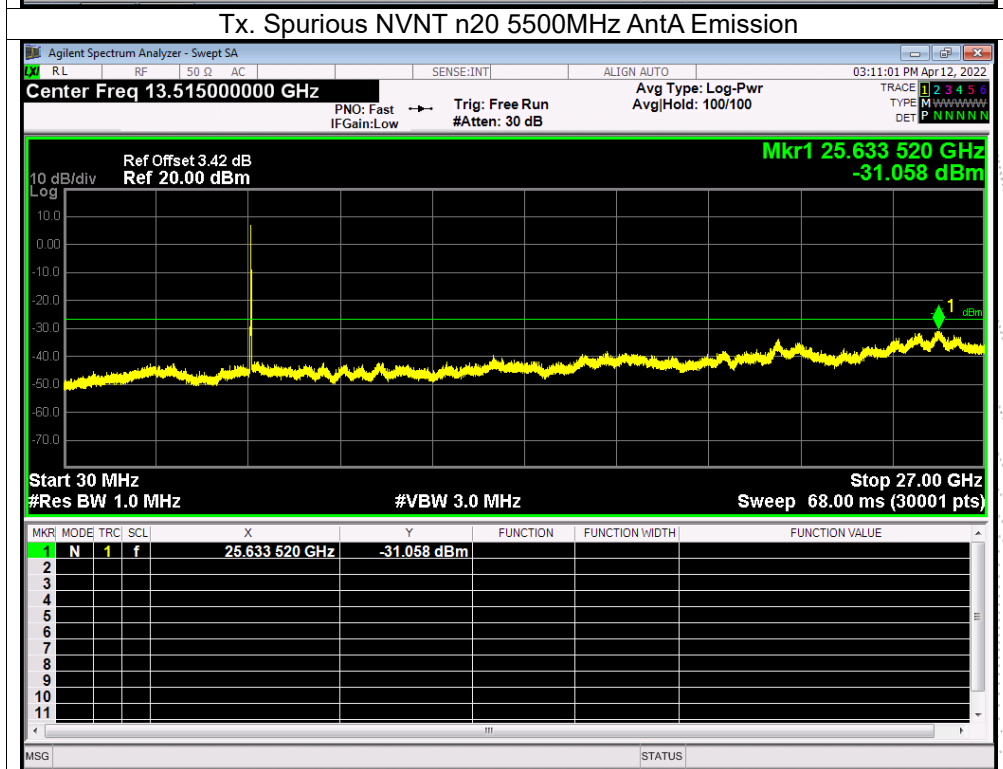
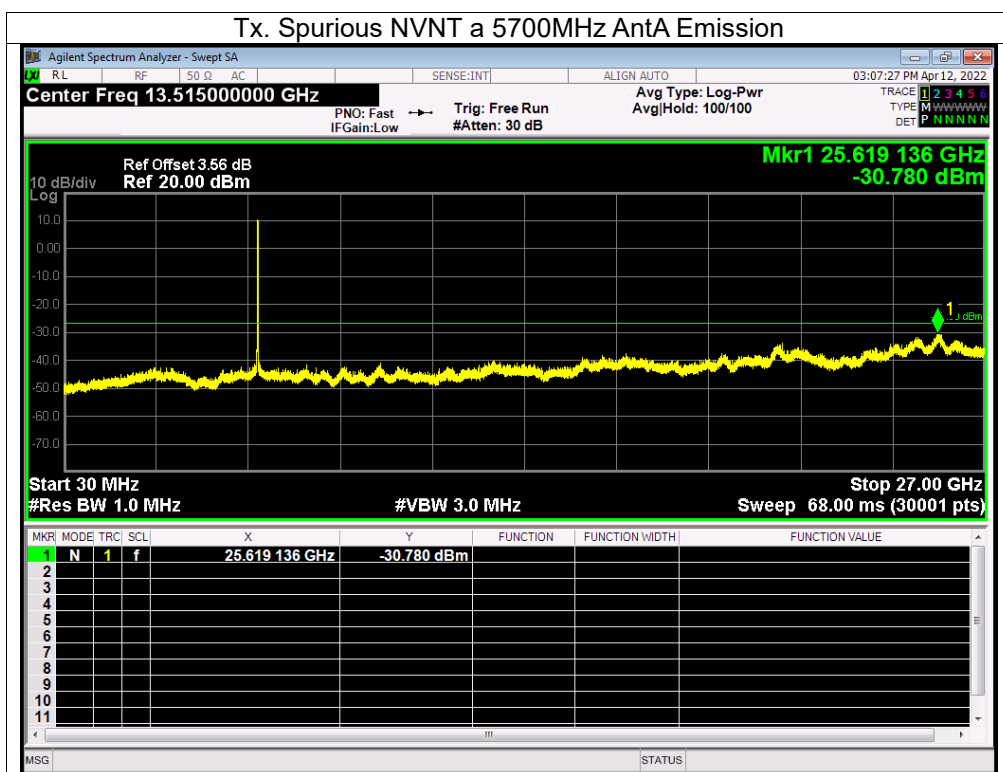


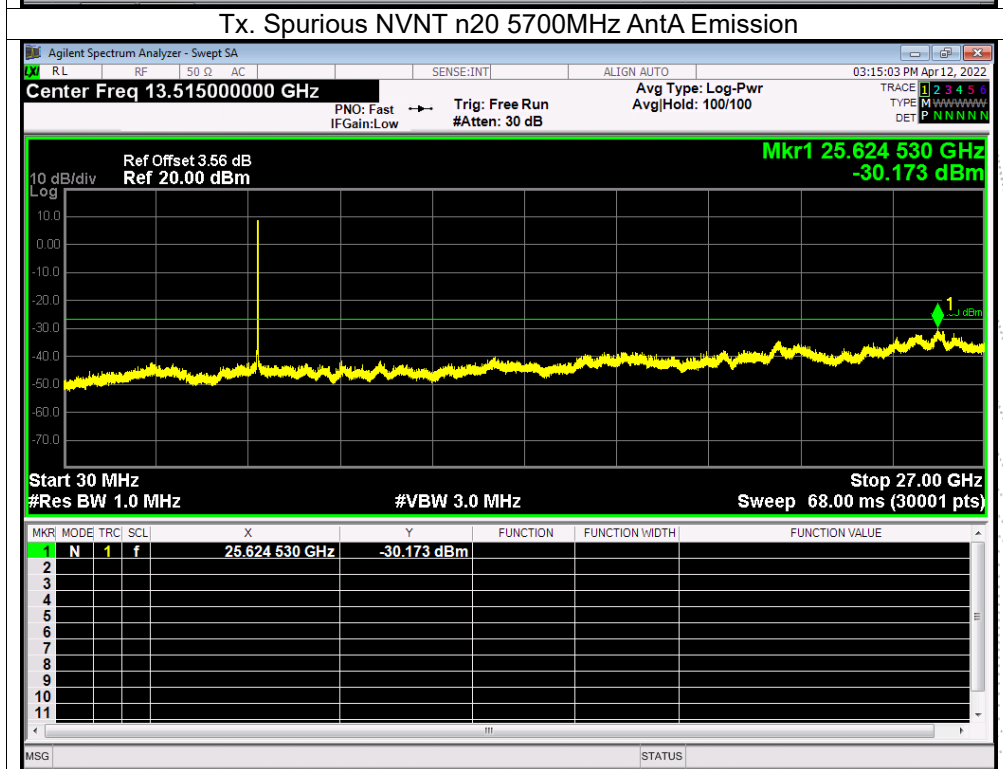
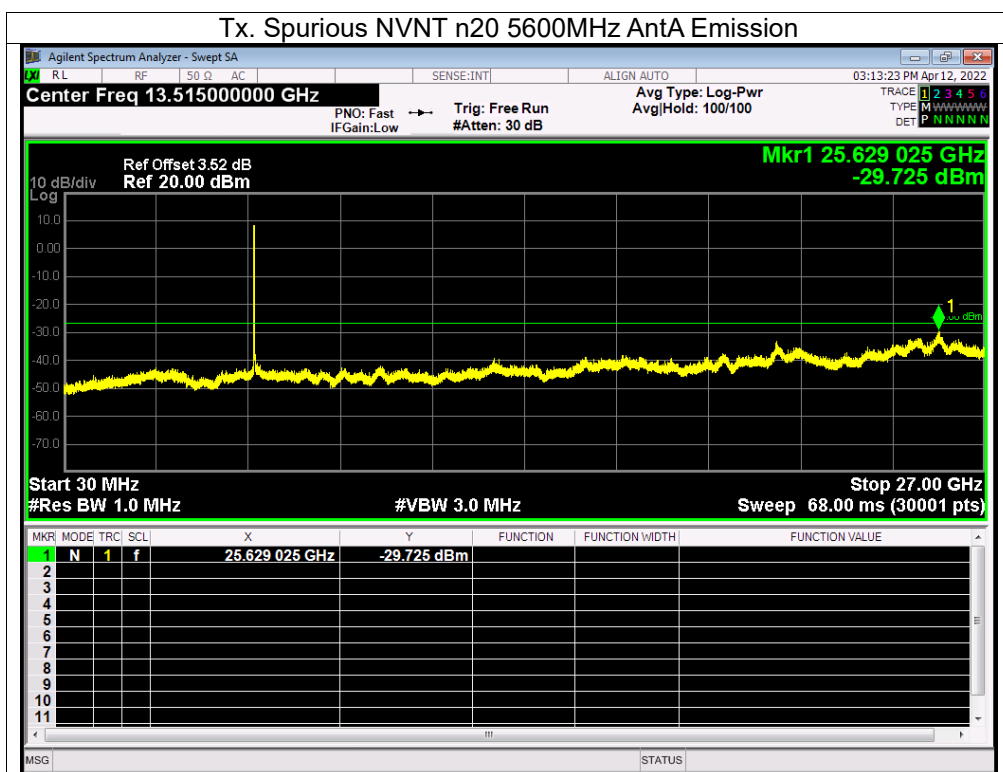


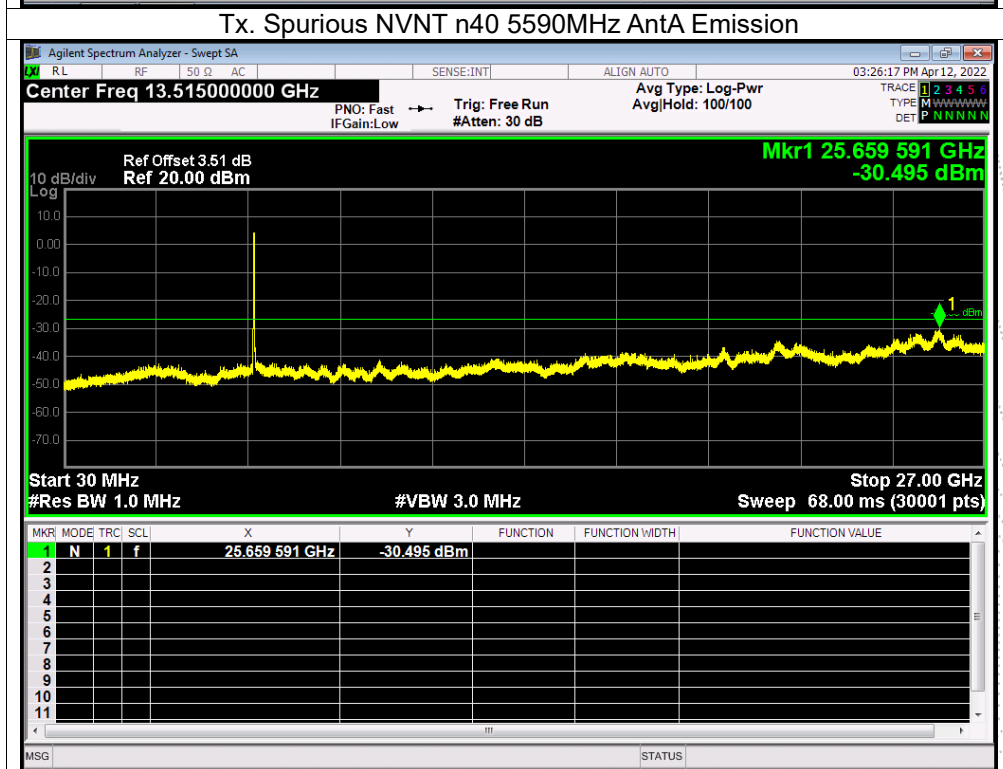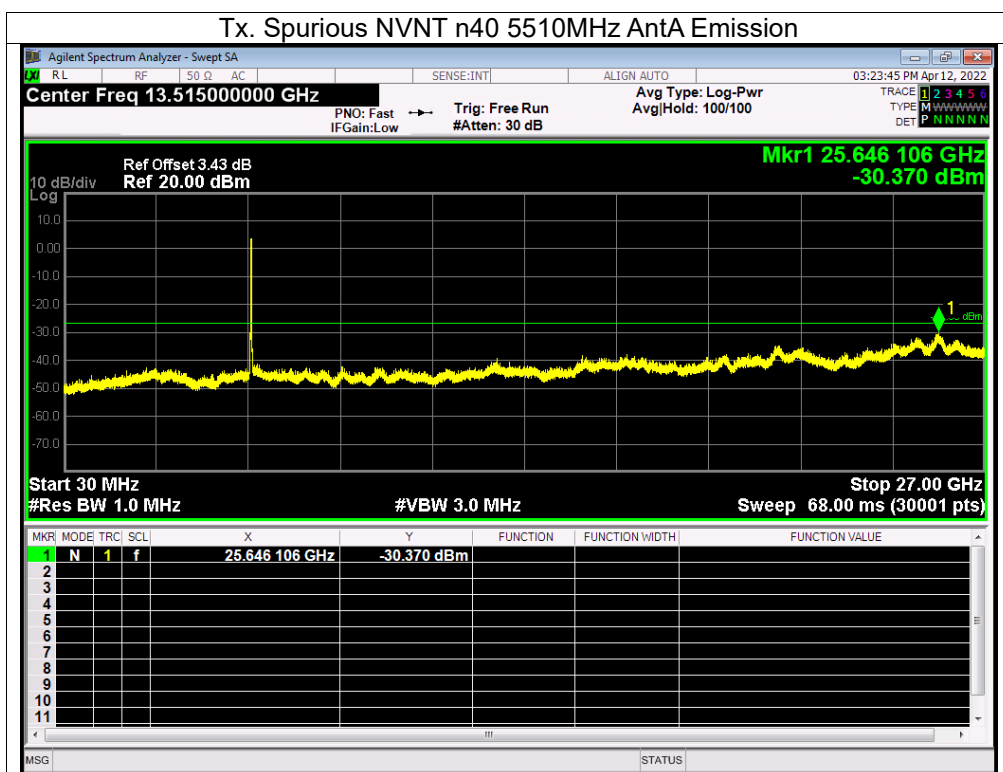


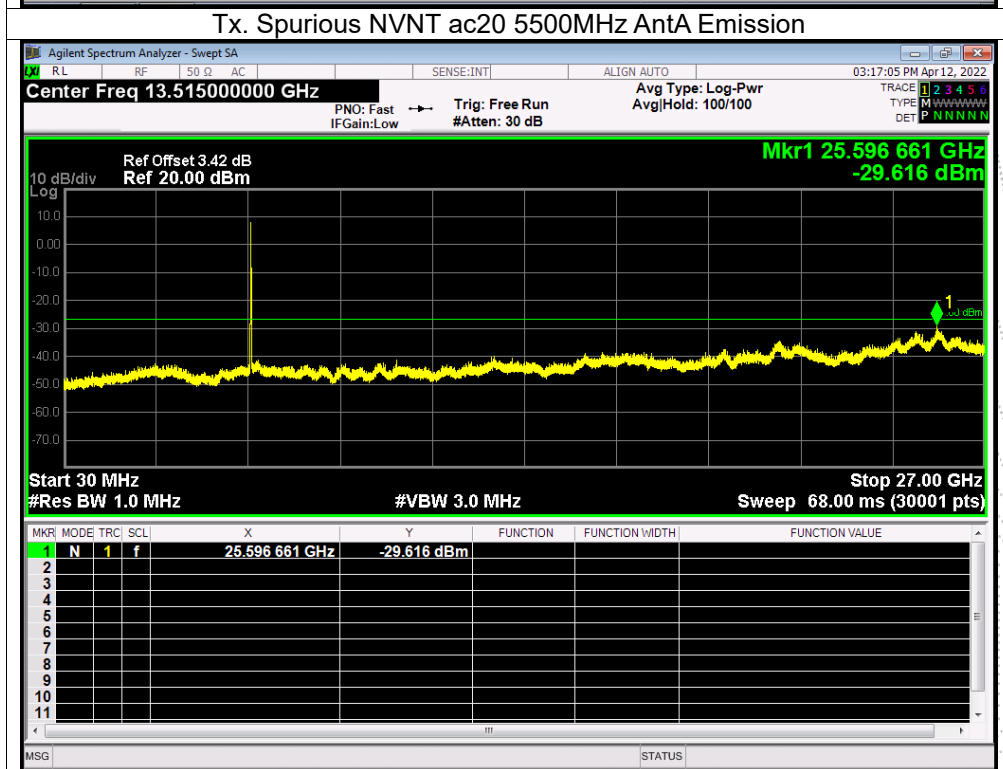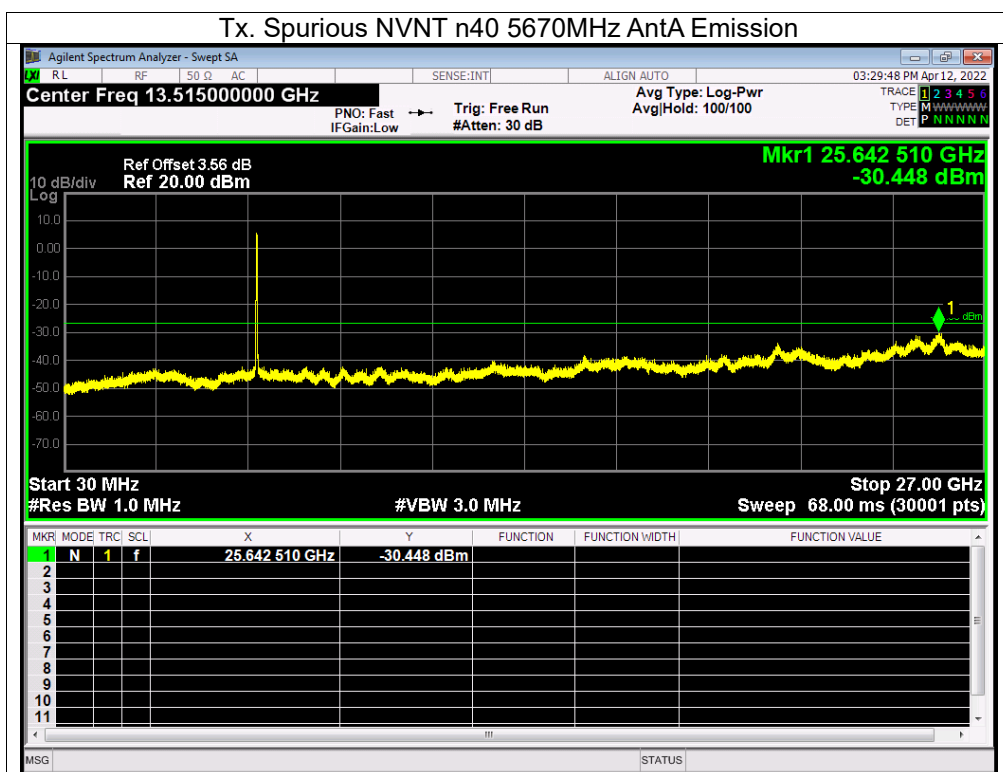

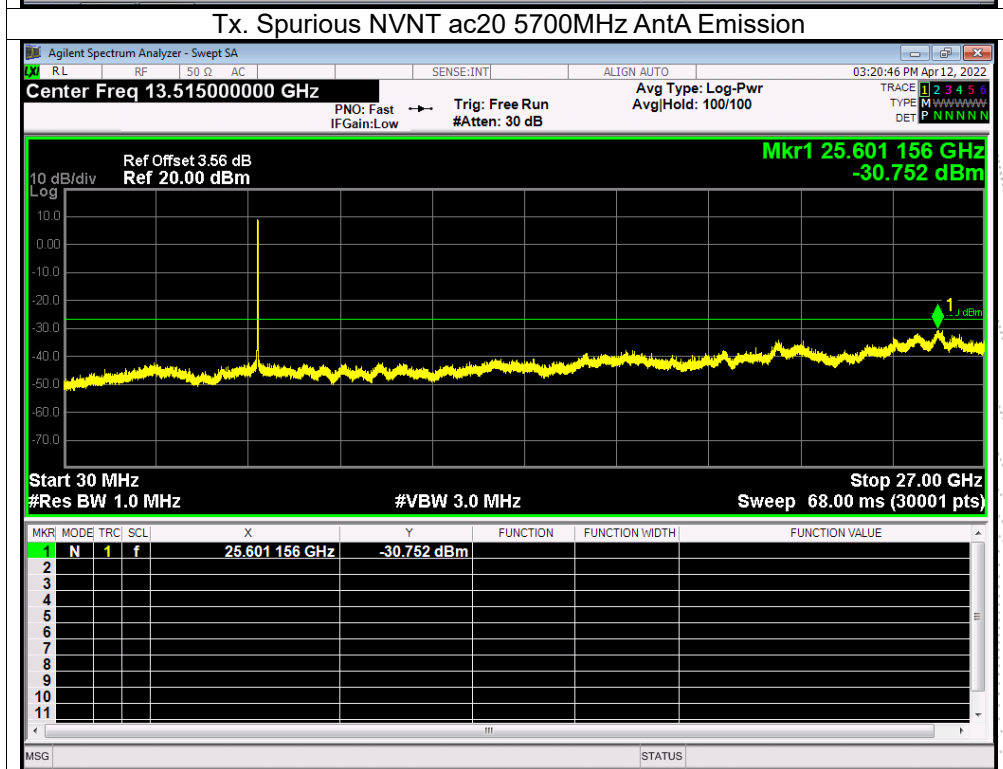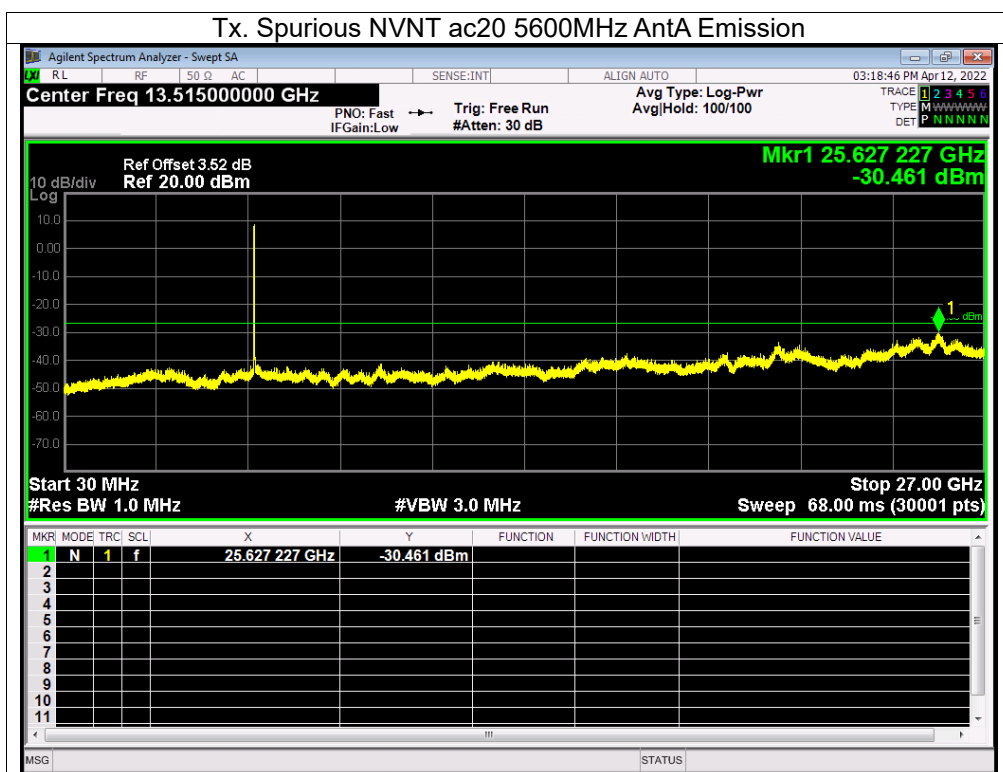


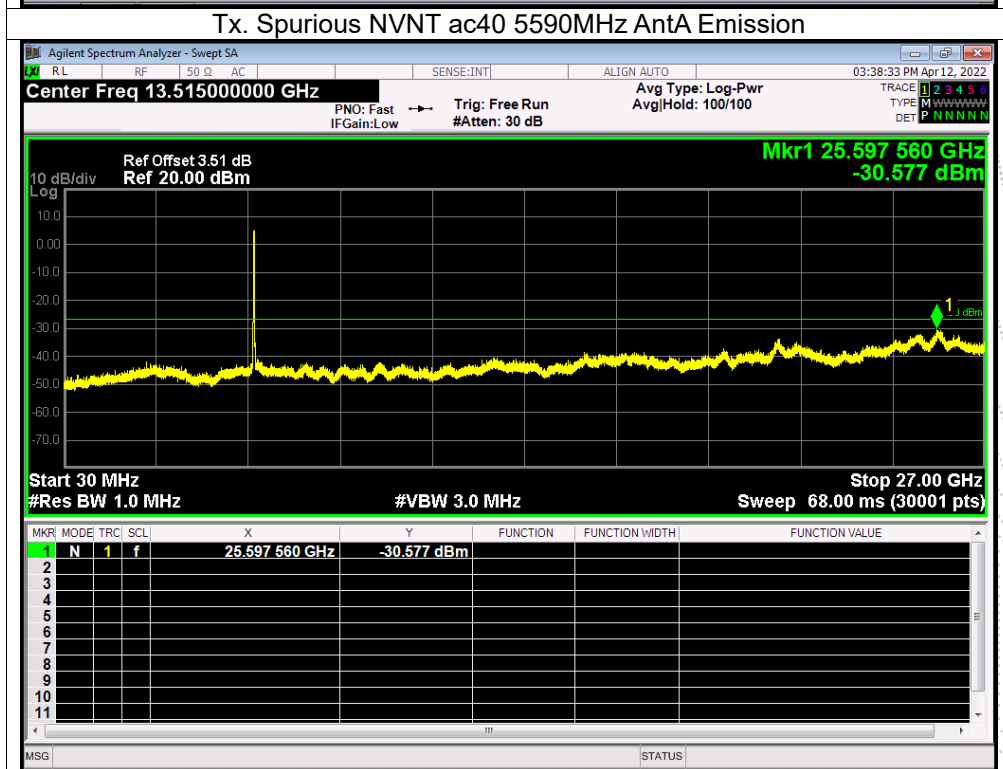
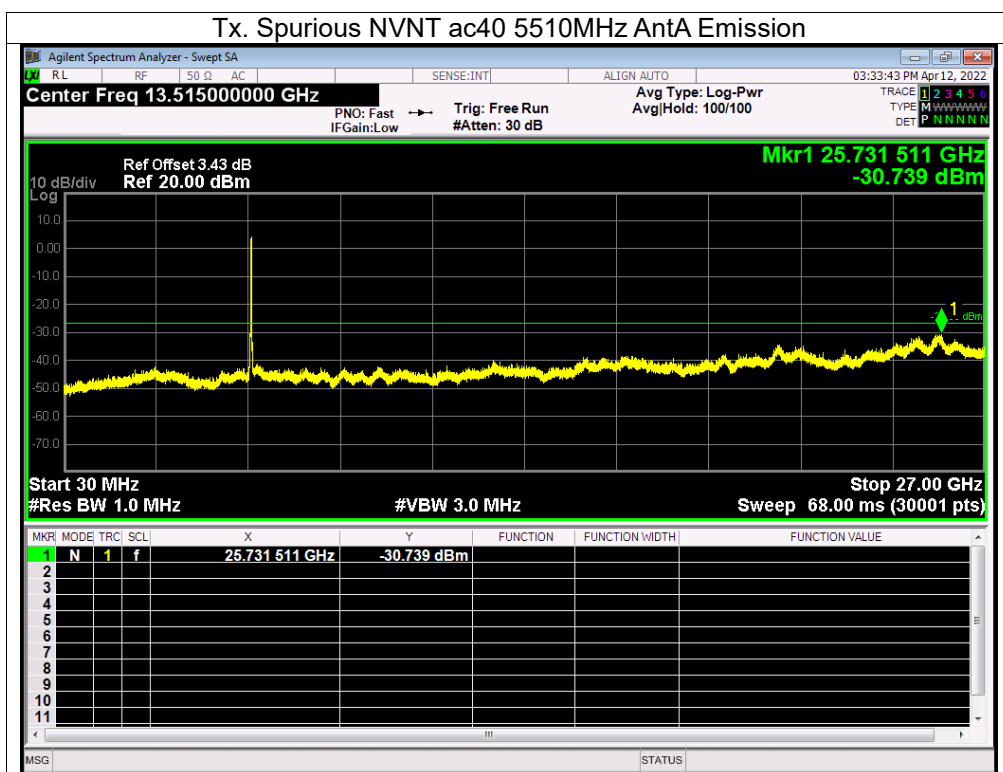


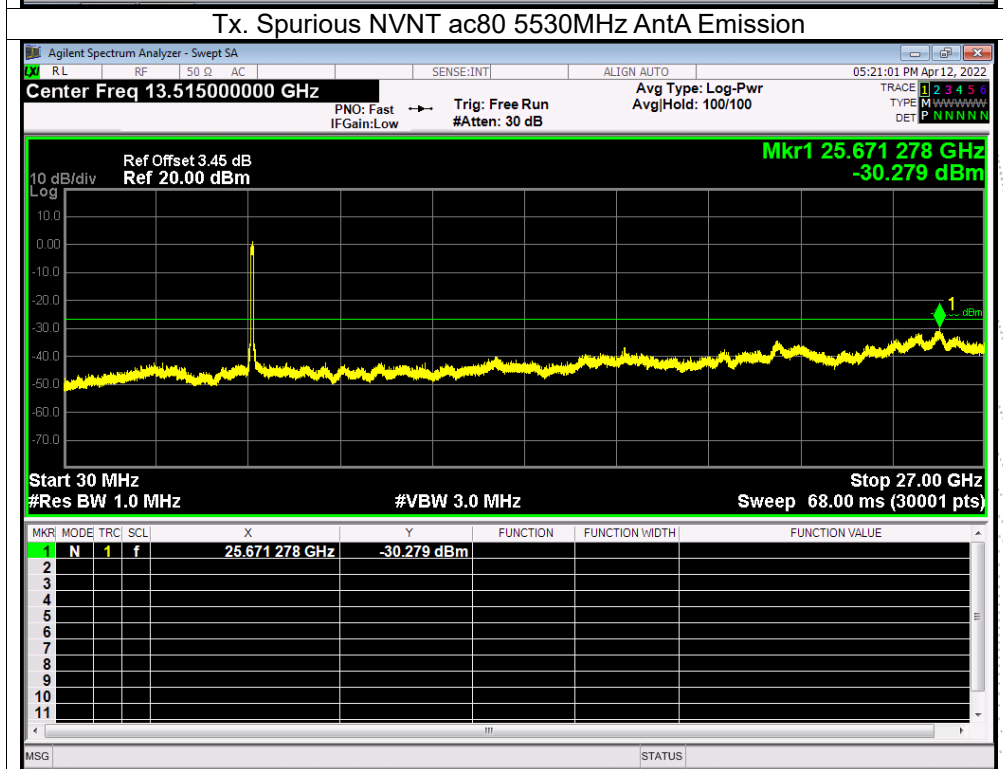
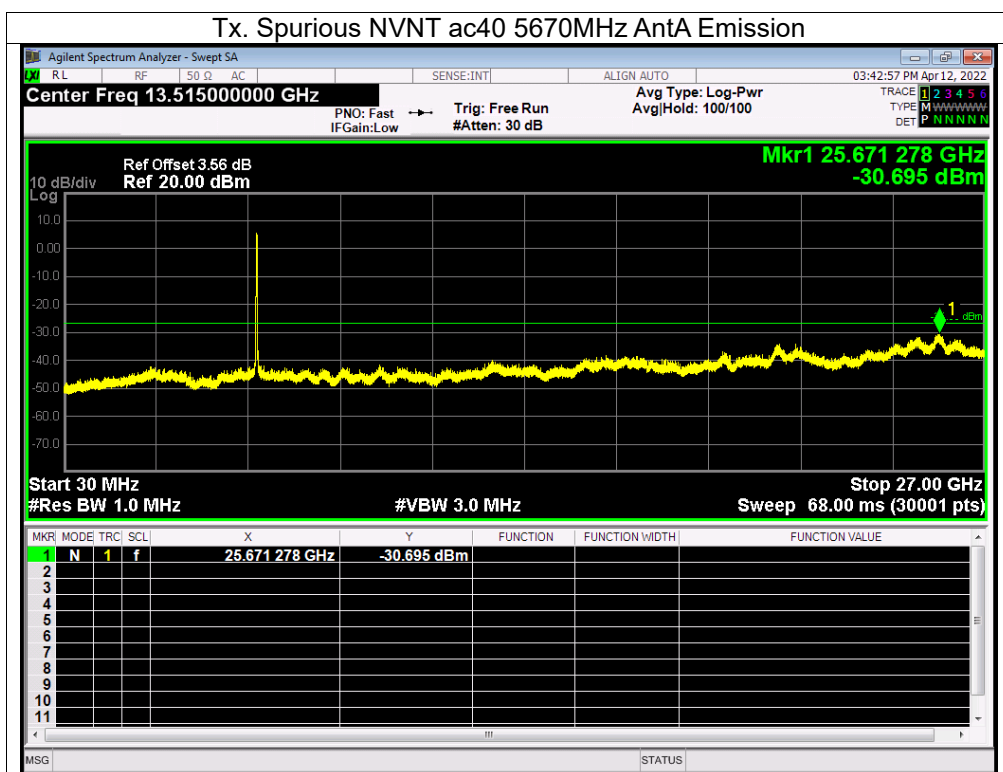



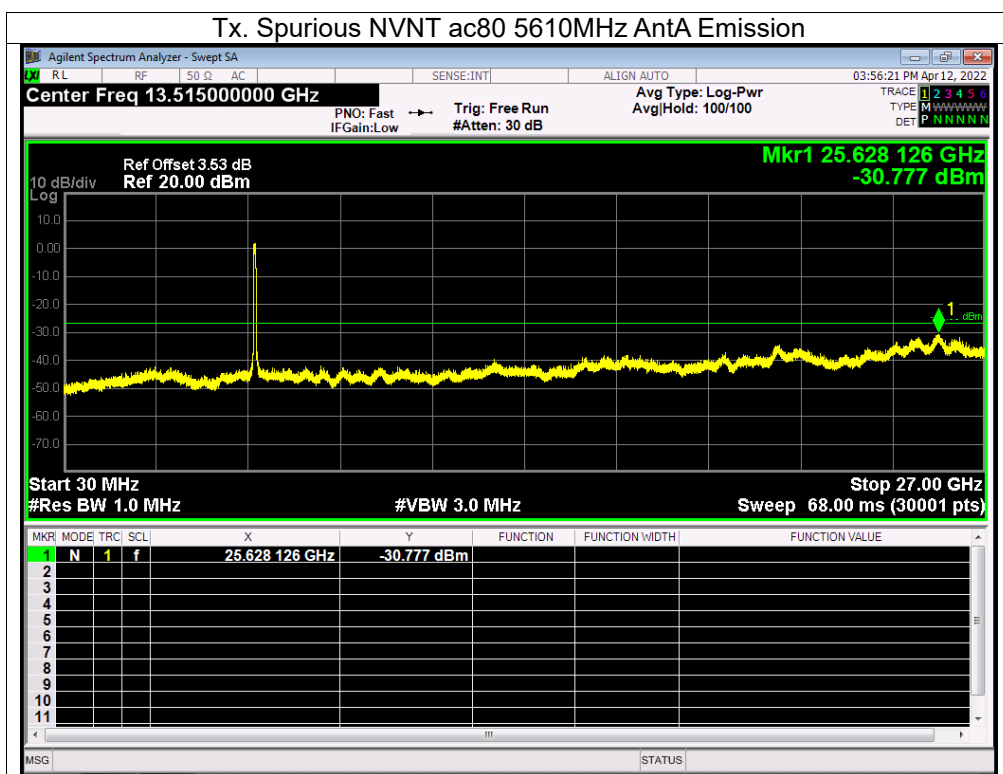




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A.
Antenna A: 5745-58250MHz


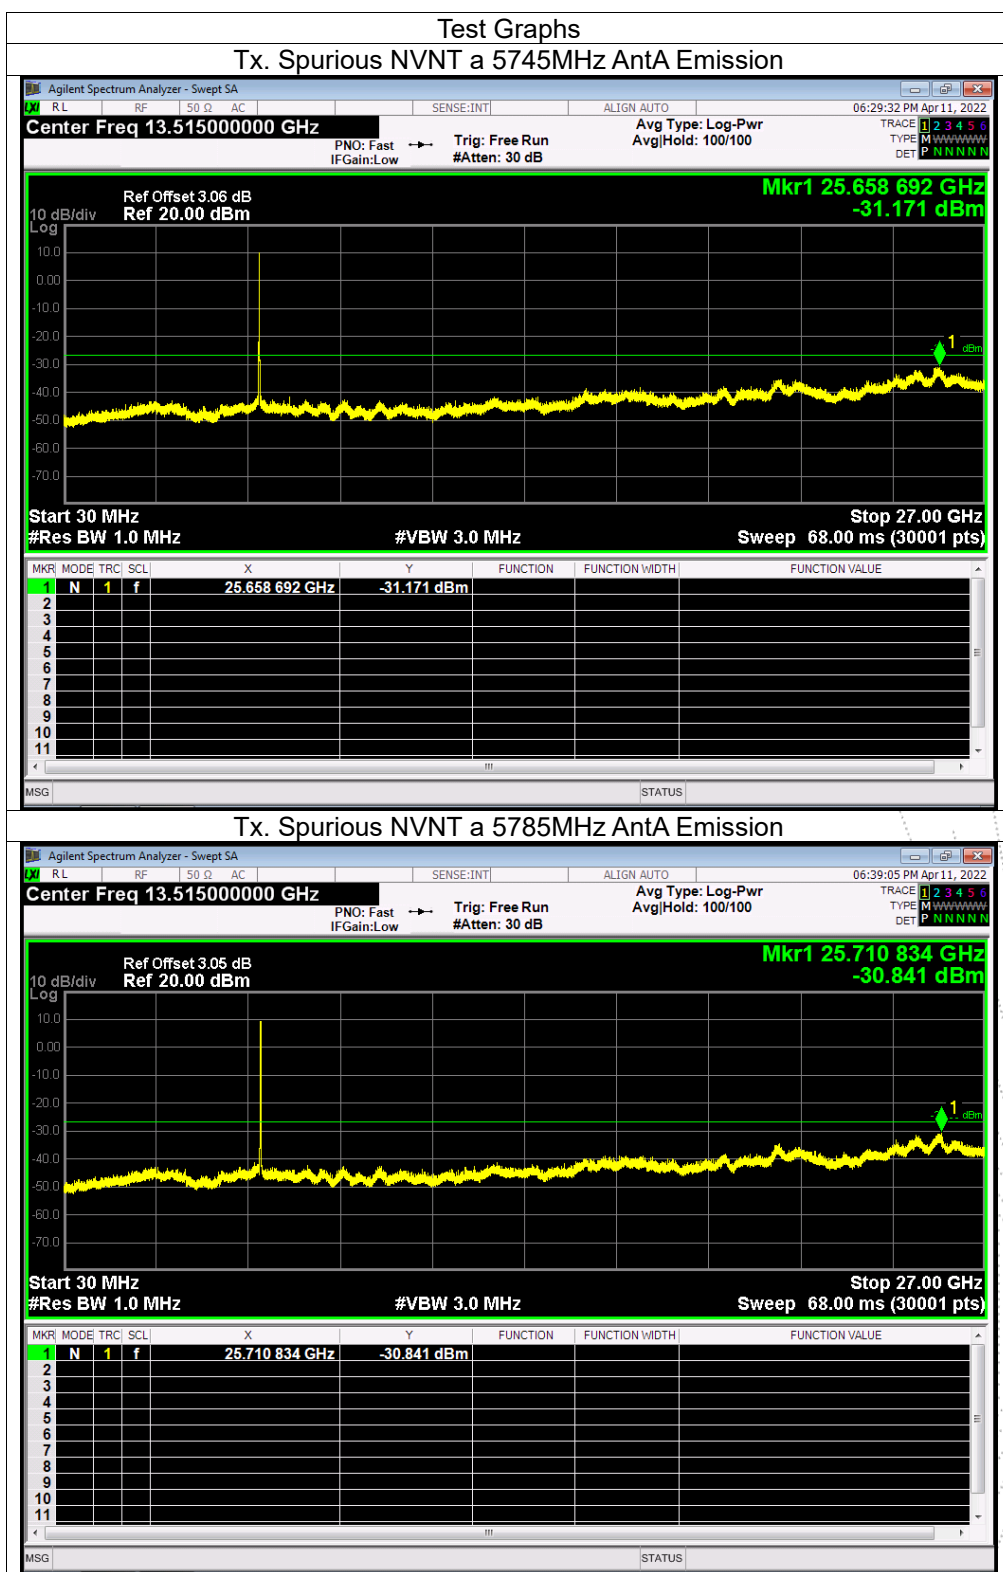


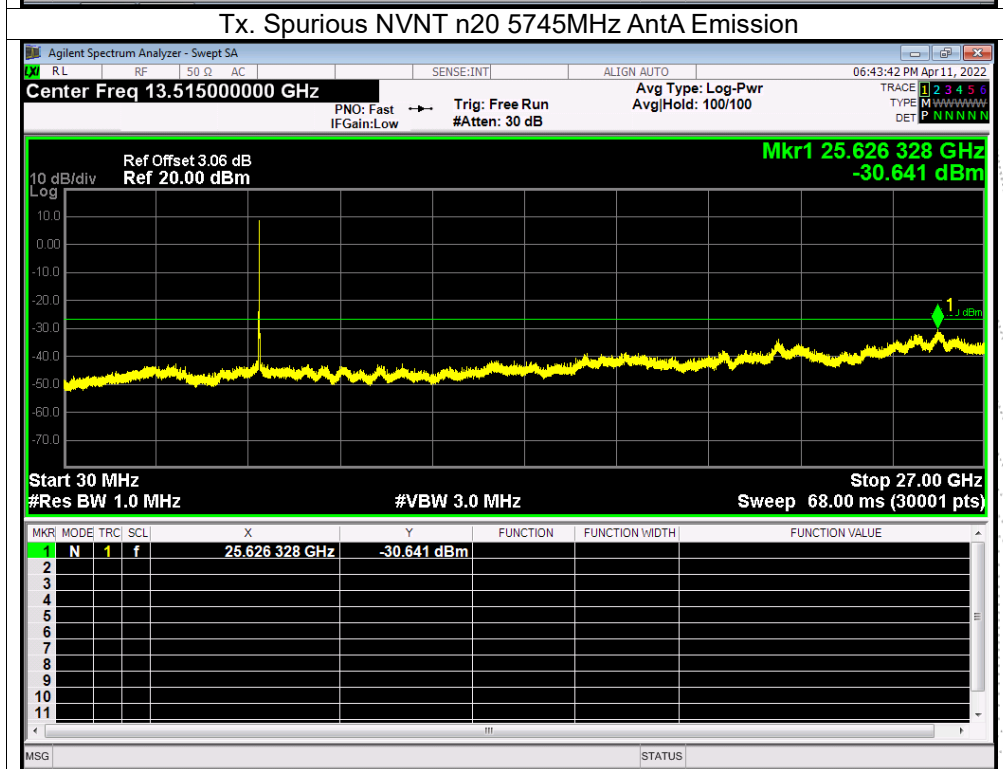
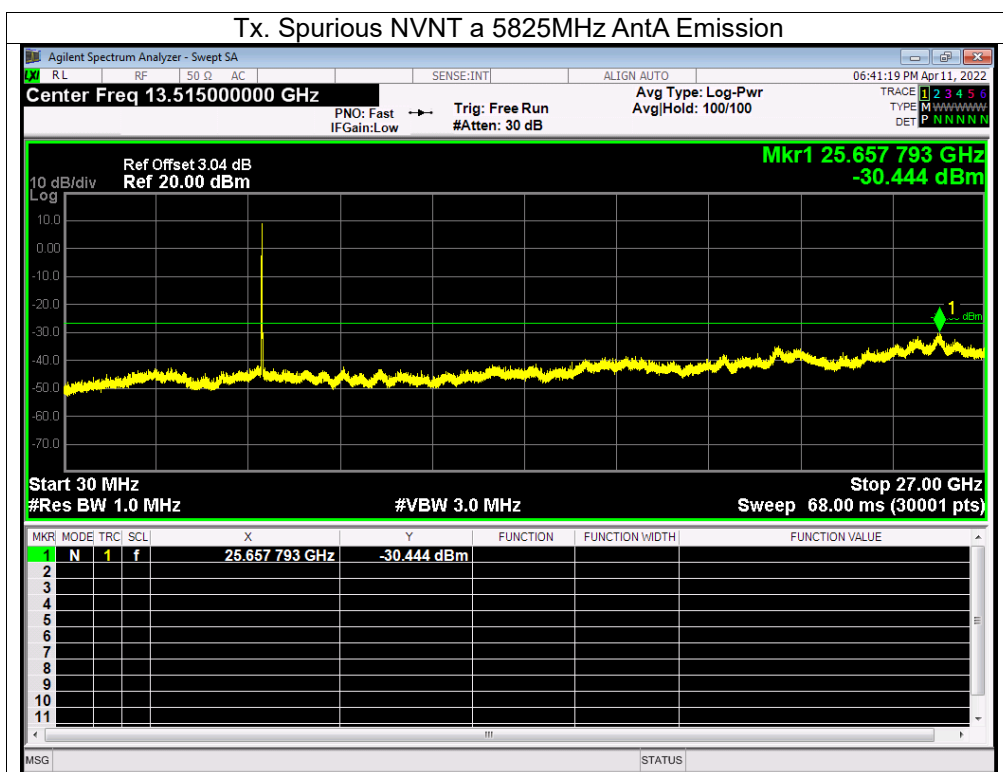


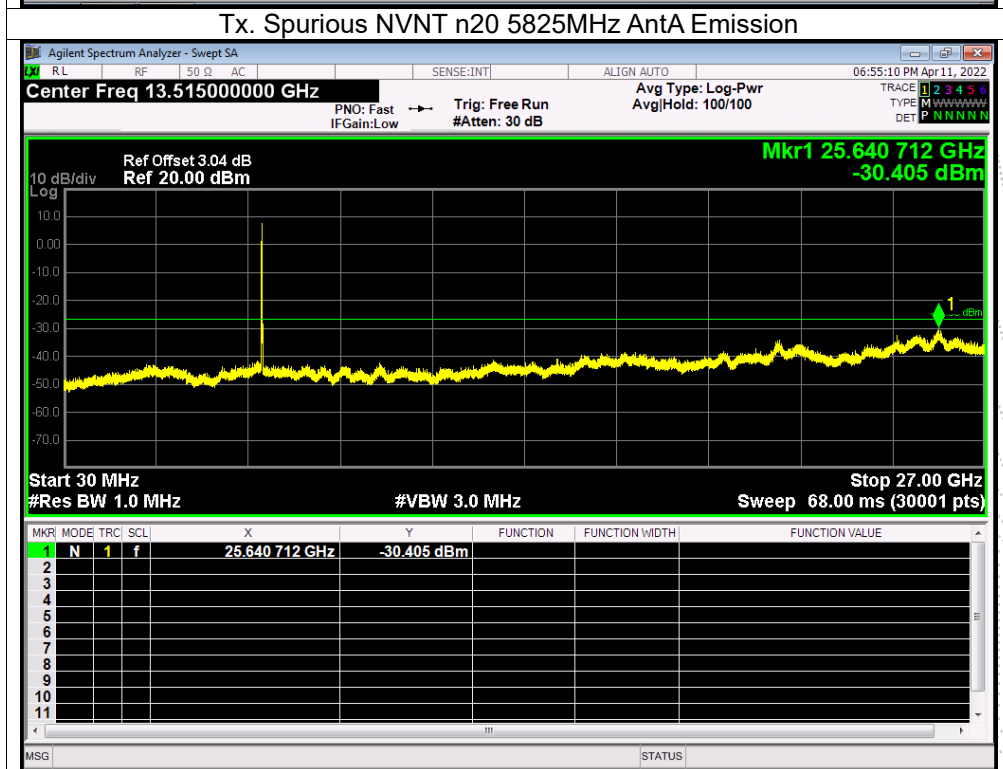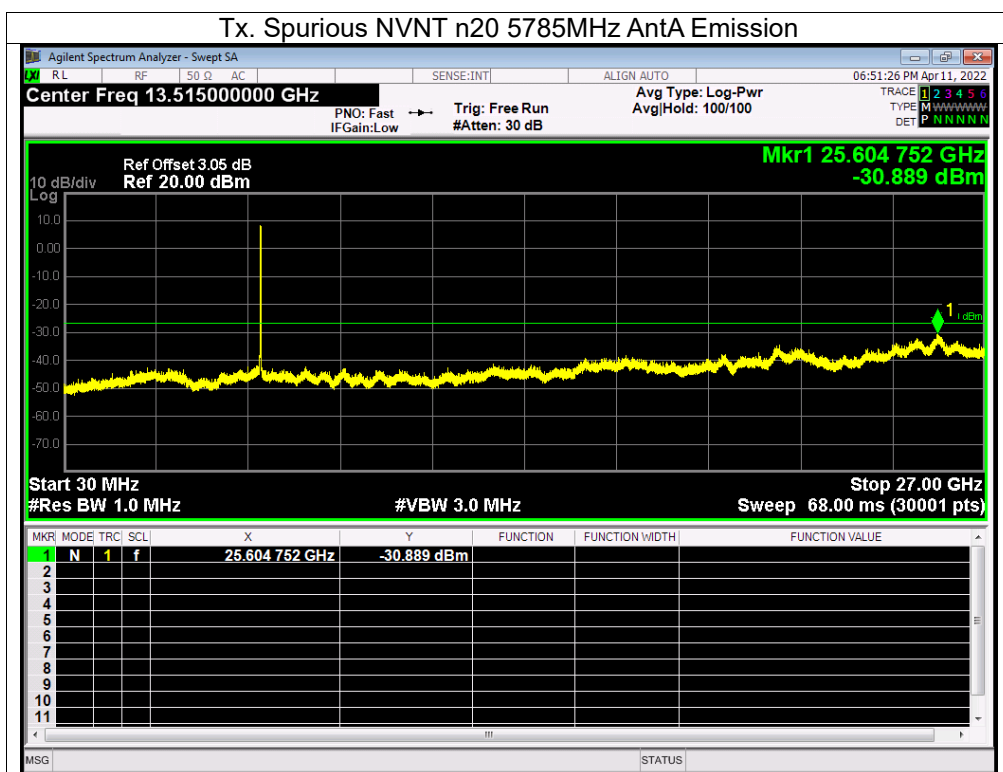

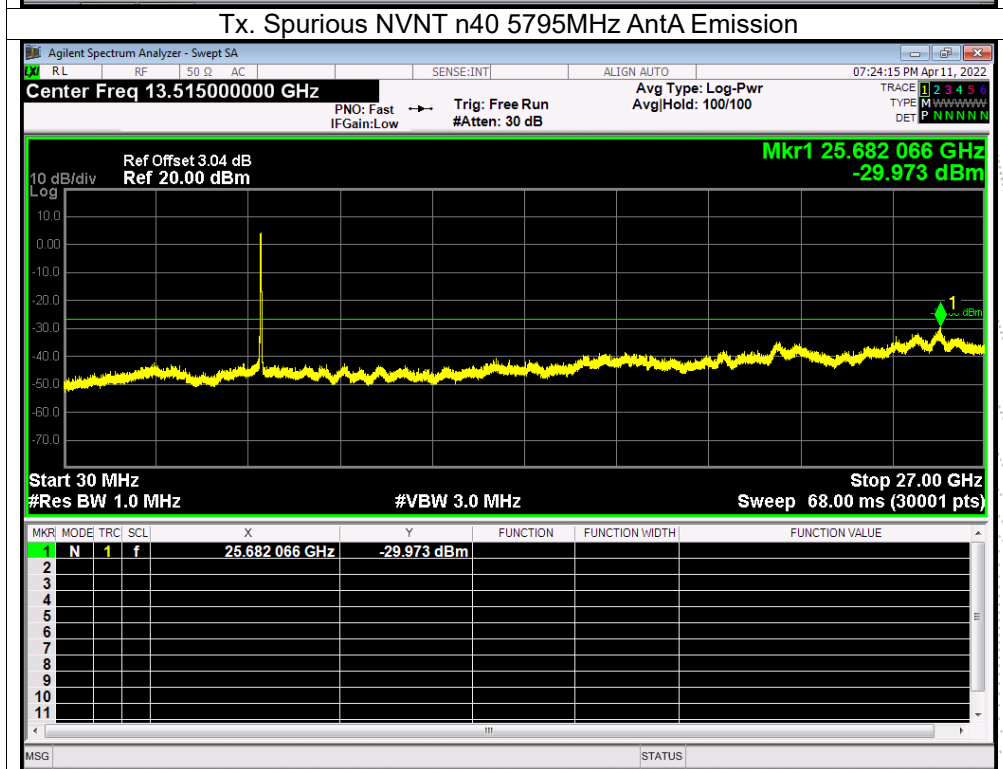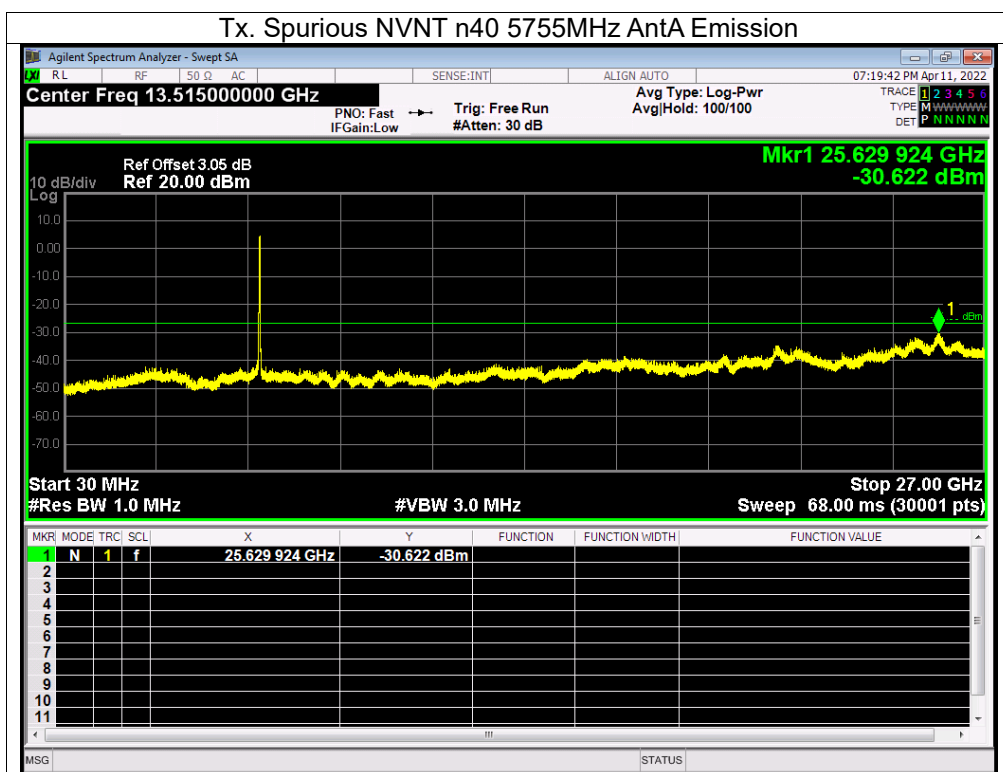

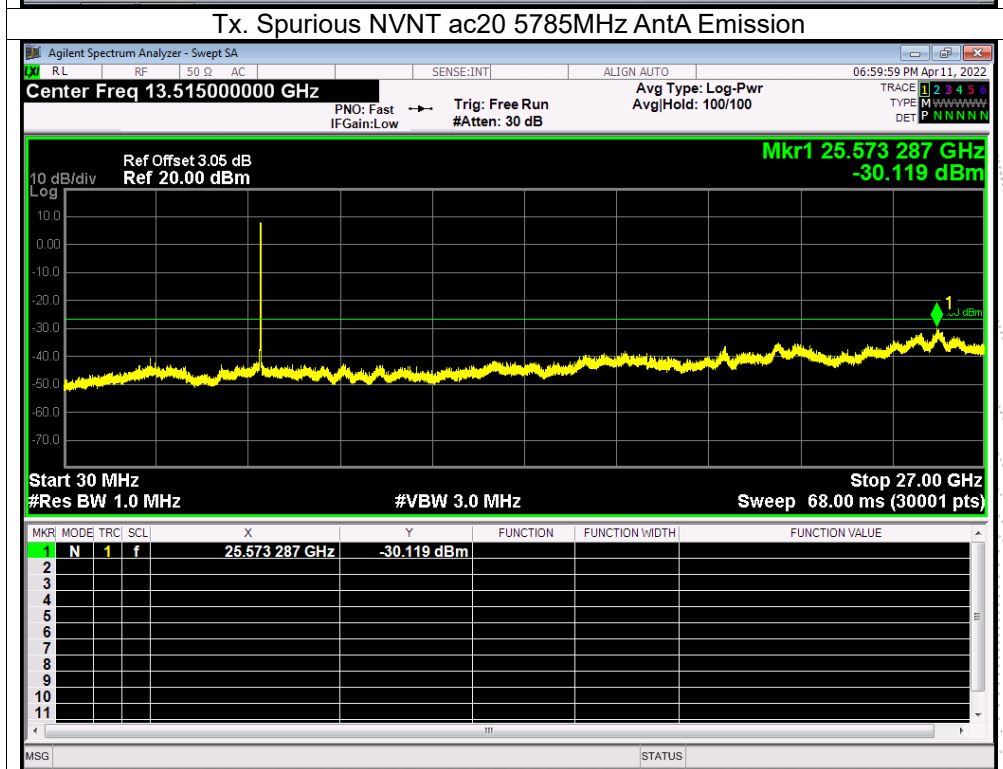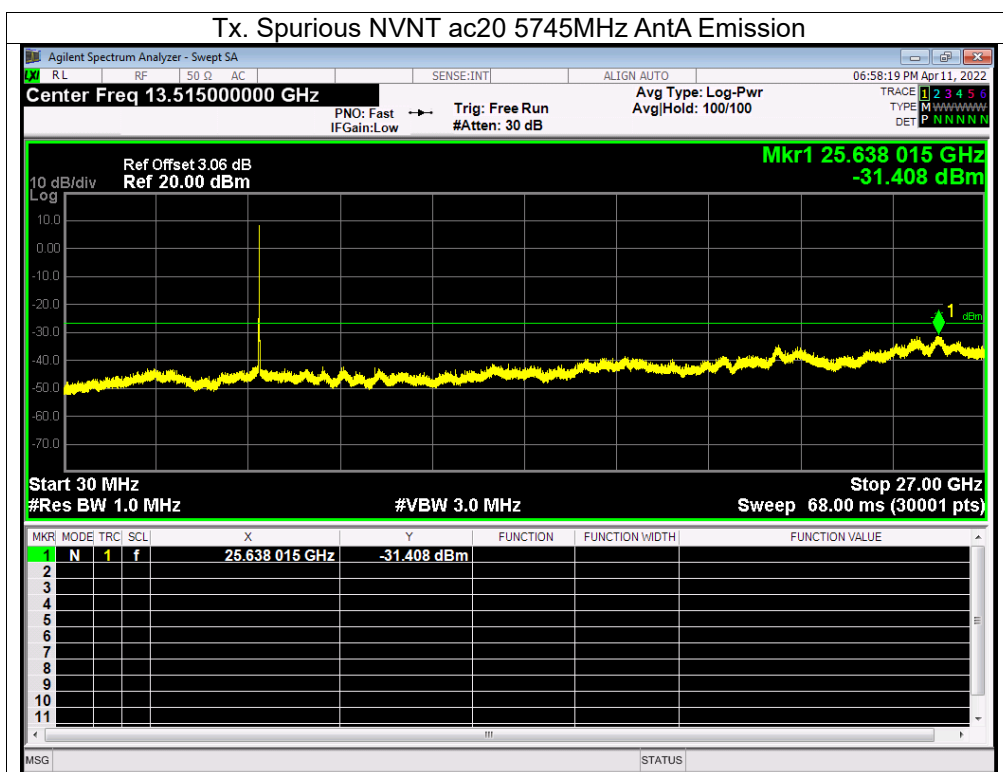

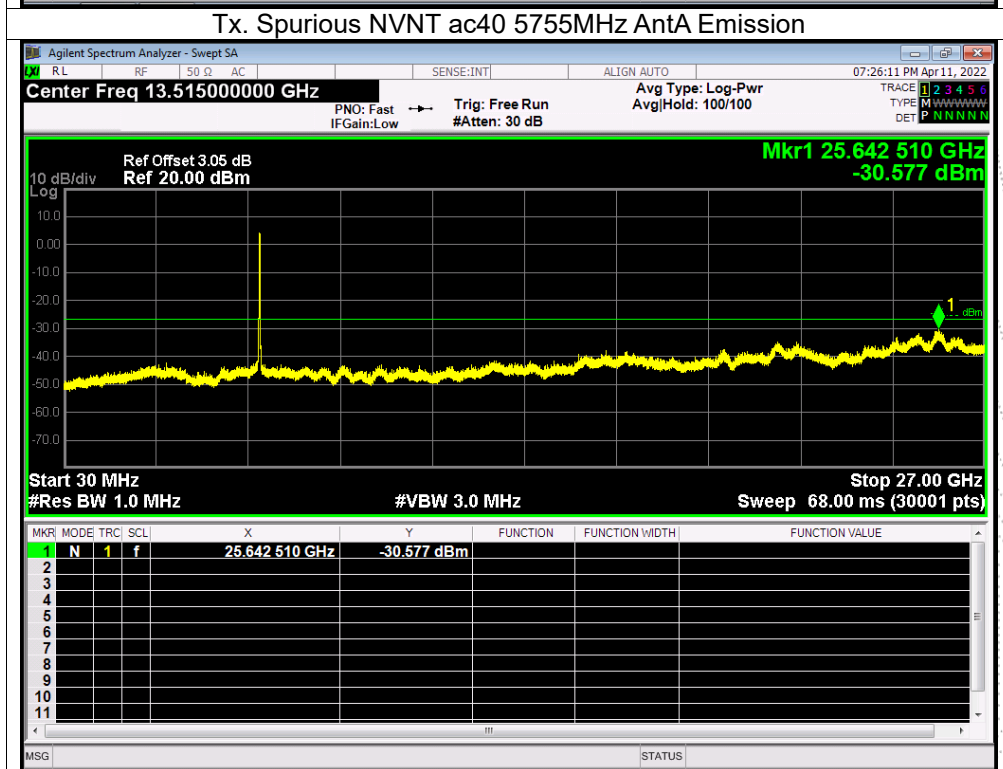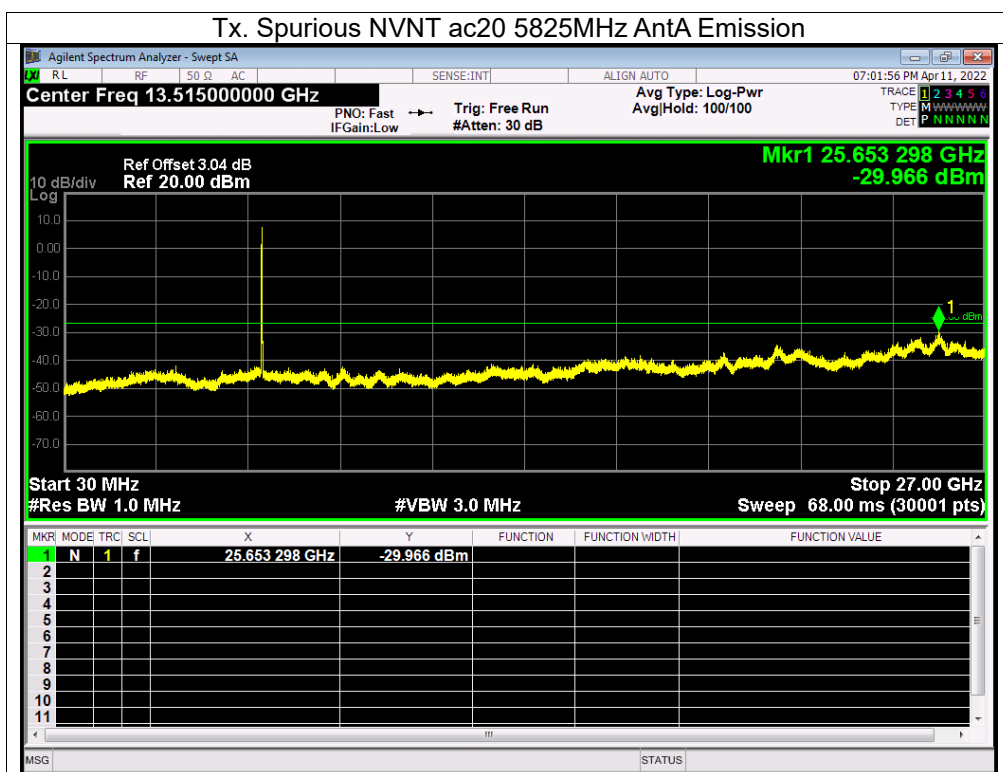

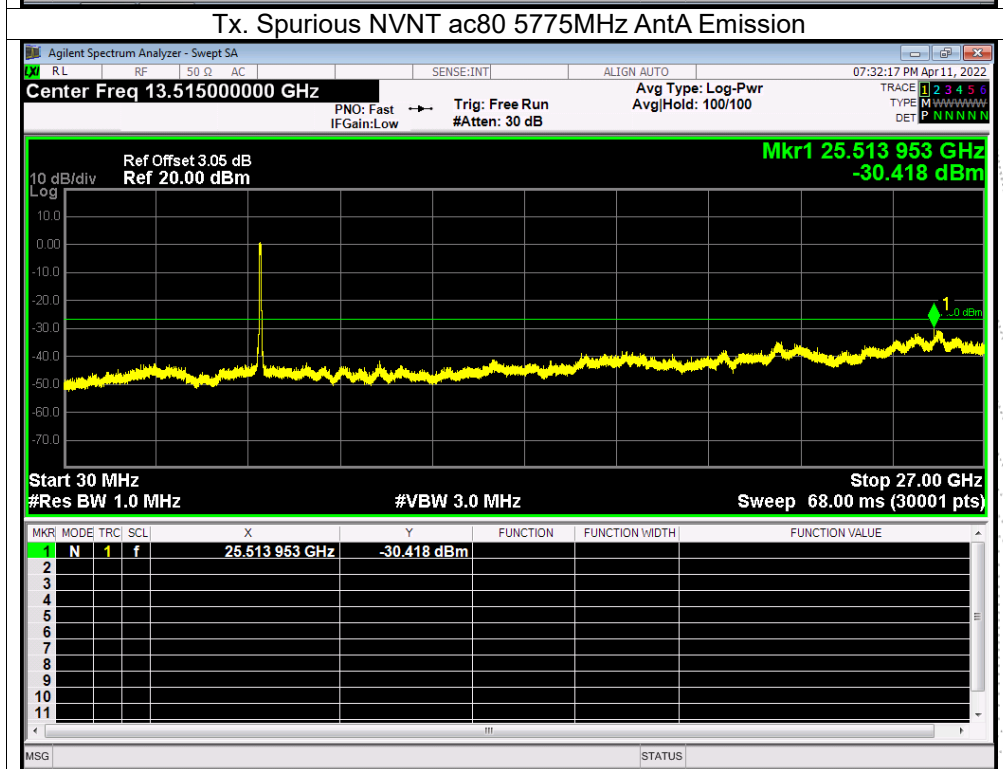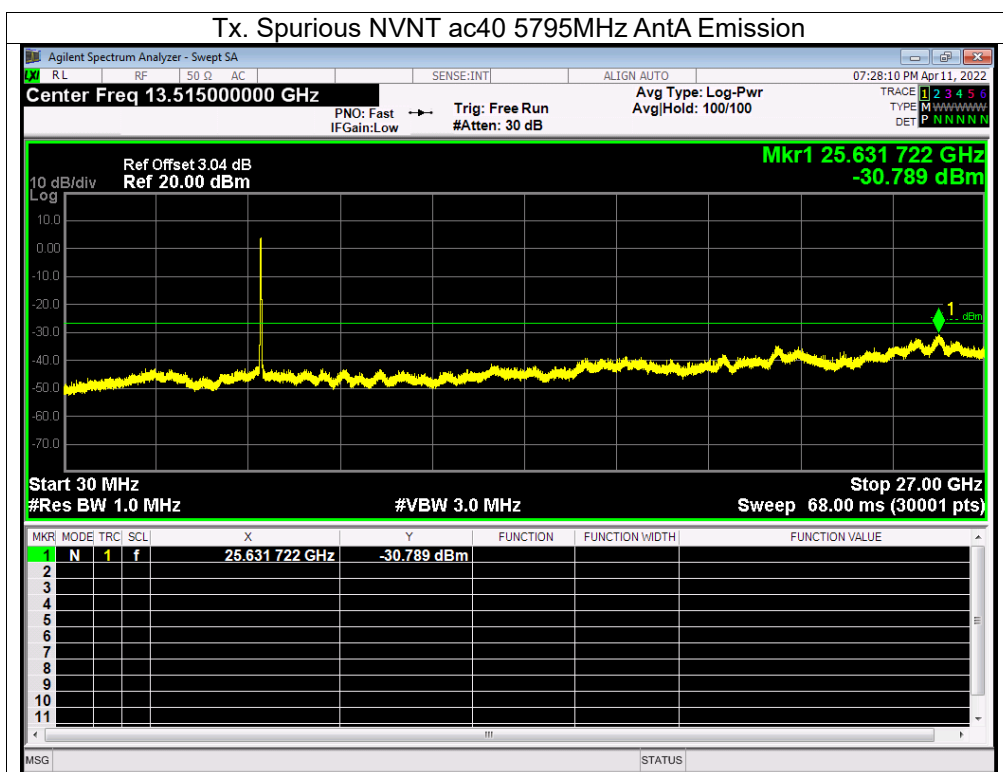

13. Frequency Stability Measurement

13.1 Block Diagram Of Test Setup



13.2 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification)..

13.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and he limit is less than ± 20 ppm (IEEE 802.11nspecification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.

13.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5180.0046	5180	0.0046	0.8839
		V max (V)	138.00	5180.0151	5180	0.0151	2.9116
		V min (V)	102.00	5180.0096	5180	0.0096	1.8436
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5180.0062	5180	0.0062	1.2008
		T (°C)	-10	5180.0007	5180	0.0007	0.1317
		T (°C)	0	5180.0027	5180	0.0027	0.5281
		T (°C)	10	5180.0066	5180	0.0066	1.2739
		T (°C)	20	5180.0114	5180	0.0114	2.1991
		T (°C)	30	5180.0133	5180	0.0133	2.5743
		T (°C)	40	5180.0074	5180	0.0074	1.4254
		T (°C)	50	5180.0031	5180	0.0031	0.6018
		T (°C)	60	5180.0054	5180	0.0054	1.0387
		T (°C)	70	5180.0012	5180	0.0012	0.2330
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5200.0114	5200	0.0114	2.1966
		V max (V)	138.00	5200.0110	5200	0.0110	2.1095
		V min (V)	102.00	5200.0105	5200	0.0105	2.0260
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5200.00734	5200	0.00734	1.4124
		T (°C)	-10	5200.01113	5200	0.01113	2.1412
		T (°C)	0	5200.01086	5200	0.01086	2.0888
		T (°C)	10	5200.00001	5200	0.00001	0.0025
		T (°C)	20	5200.01043	5200	0.01043	2.0050
		T (°C)	30	5200.00505	5200	0.00505	0.9708
		T (°C)	40	5200.00841	5200	0.00841	1.6173
		T (°C)	50	5200.00186	5200	0.00186	0.3575
		T (°C)	60	5200.01146	5200	0.01146	2.2033
		T (°C)	70	5200.00503	5200	0.00503	0.9672
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5240.0115	5240	0.0115	2.1924
		V max (V)	138.00	5240.0054	5240	0.0054	1.0301
		V min (V)	102.00	5240.0121	5240	0.0121	2.3063
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5240.0029	5240	0.0029	0.5489
		T (°C)	-10	5240.0028	5240	0.0028	0.5437
		T (°C)	0	5240.0064	5240	0.0064	1.2215
		T (°C)	10	5240.0017	5240	0.0017	0.3297
		T (°C)	20	5240.0094	5240	0.0094	1.7860
		T (°C)	30	5240.0068	5240	0.0068	1.2980
		T (°C)	40	5240.0070	5240	0.0070	1.3452
		T (°C)	50	5240.0077	5240	0.0077	1.4695
		T (°C)	60	5240.0068	5240	0.0068	1.2944
		T (°C)	70	5240.0053	5240	0.0053	1.0196
Limits				5150-5250 MHz			
Result				Complies			

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	TX (5.3G) Mode Frequency U-NII-2A (5260-5320MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5260.0130	5260	0.0130	2.4654
		V max (V)	138.00	5260.0209	5260	0.0209	3.9748
		V min (V)	102.00	5260.0124	5260	0.0124	2.3644
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5260.0046	5260	0.0046	0.8736
		T (°C)	-10	5260.0103	5260	0.0103	1.9567
		T (°C)	0	5260.0068	5260	0.0068	1.2950
		T (°C)	10	5260.0084	5260	0.0084	1.5915
		T (°C)	20	5260.0065	5260	0.0065	1.2340
		T (°C)	30	5260.0022	5260	0.0022	0.4124
		T (°C)	40	5260.0069	5260	0.0069	1.3105
		T (°C)	50	5260.0068	5260	0.0068	1.3008
		T (°C)	60	5260.0056	5260	0.0056	1.0561
		T (°C)	70	5260.0029	5260	0.0029	0.5456
Limits				5260-5320 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5280.0028	5280	0.0028	0.5333
		V max (V)	138.00	5280.0004	5280	0.0004	0.0723
		V min (V)	102.00	5280.0120	5280	0.0120	2.2637
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5280.01266	5280	0.01266	2.3977
		T (°C)	-10	5280.00722	5280	0.00722	1.3668
		T (°C)	0	5280.00638	5280	0.00638	1.2091
		T (°C)	10	5280.00712	5280	0.00712	1.3487
		T (°C)	20	5280.00341	5280	0.00341	0.6466
		T (°C)	30	5280.01029	5280	0.01029	1.9490
		T (°C)	40	5280.00039	5280	0.00039	0.0747
		T (°C)	50	5280.01307	5280	0.01307	2.4753
		T (°C)	60	5280.00564	5280	0.00564	1.0673
		T (°C)	70	5280.00813	5280	0.00813	1.5401
Limits				5260-5320 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5320.0131	5320	0.0131	2.4590
		V max (V)	138.00	5320.0086	5320	0.0086	1.6157
		V min (V)	102.00	5320.0089	5320	0.0089	1.6683
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5320.0024	5320	0.0024	0.4562
		T (°C)	-10	5320.0028	5320	0.0028	0.5331
		T (°C)	0	5320.0050	5320	0.0050	0.9379
		T (°C)	10	5320.0066	5320	0.0066	1.2455
		T (°C)	20	5320.0040	5320	0.0040	0.7489
		T (°C)	30	5320.0133	5320	0.0133	2.5042
		T (°C)	40	5320.0042	5320	0.0042	0.7953
		T (°C)	50	5320.0088	5320	0.0088	1.6632
		T (°C)	60	5320.0017	5320	0.0017	0.3252
		T (°C)	70	5320.0000	5320	0.0000	0.0075
Limits				5260-5320 MHz			
Result				Complies			

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	TX (5.6G) Mode Frequency U-NII-2C (5500-5700MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5500.0190	5500	0.0190	3.4499
		V max (V)	138.00	5500.0040	5500	0.0040	0.7196
		V min (V)	102.00	5500.0131	5500	0.0131	2.3900
Limits				5500-5700 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5500.0029	5500	0.0029	0.5203
		T (°C)	-10	5500.0056	5500	0.0056	1.0098
		T (°C)	0	5500.0002	5500	0.0002	0.0402
		T (°C)	10	5500.0084	5500	0.0084	1.5219
		T (°C)	20	5500.0099	5500	0.0099	1.7971
		T (°C)	30	5500.0037	5500	0.0037	0.6773
		T (°C)	40	5500.0059	5500	0.0059	1.0654
		T (°C)	50	5500.0132	5500	0.0132	2.3944
		T (°C)	60	5500.0103	5500	0.0103	1.8638
		T (°C)	70	5500.0042	5500	0.0042	0.7561
Limits				5500-5700 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5600.0051	5600	0.0051	0.9100
		V max (V)	138.00	5600.0082	5600	0.0082	1.4696
		V min (V)	102.00	5600.0024	5600	0.0024	0.4336
Limits				5500-5700 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5600.01060	5600	0.01060	1.8933
		T (°C)	-10	5600.00903	5600	0.00903	1.6123
		T (°C)	0	5600.00211	5600	0.00211	0.3765
		T (°C)	10	5600.00516	5600	0.00516	0.9210
		T (°C)	20	5600.01182	5600	0.01182	2.1108
		T (°C)	30	5600.00724	5600	0.00724	1.2928
		T (°C)	40	5600.01062	5600	0.01062	1.8958
		T (°C)	50	5600.00061	5600	0.00061	0.1091
		T (°C)	60	5600.00047	5600	0.00047	0.0848
		T (°C)	70	5600.01245	5600	0.01245	2.2227
Limits				5500-5700 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5700.0091	5700	0.0091	1.5982
		V max (V)	138.00	5700.0109	5700	0.0109	1.9069
		V min (V)	102.00	5700.0061	5700	0.0061	1.0756
Limits				5500-5700 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5700.0022	5700	0.0022	0.3844
		T (°C)	-10	5700.0020	5700	0.0020	0.3422
		T (°C)	0	5700.0001	5700	0.0001	0.0118
		T (°C)	10	5700.0091	5700	0.0091	1.5973
		T (°C)	20	5700.0097	5700	0.0097	1.6981
		T (°C)	30	5700.0005	5700	0.0005	0.0895
		T (°C)	40	5700.0055	5700	0.0055	0.9564
		T (°C)	50	5700.0062	5700	0.0062	1.0868
		T (°C)	60	5700.0005	5700	0.0005	0.0914
		T (°C)	70	5700.0086	5700	0.0086	1.5169
Limits				5500-5700 MHz			
Result				Complies			

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

Voltage vs. Frequency Stabilit

TEST CONDITIONS				Reference Frequency : 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5745.01081	5745	0.01081	1.8808
		V max (V)	138.00	5745.00975	5745	0.00975	1.6963
		V min (V)	102.00	5745.00370	5745	0.00370	0.6443
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5745.01242	5745	0.01242	2.1625
		T (°C)	-10	5745.00616	5745	0.00616	1.0721
		T (°C)	0	5745.00161	5745	0.00161	0.2795
		T (°C)	10	5745.00732	5745	0.00732	1.2742
		T (°C)	20	5745.00128	5745	0.00128	0.2232
		T (°C)	30	5745.01274	5745	0.01274	2.2169
		T (°C)	40	5745.00798	5745	0.00798	1.3896
		T (°C)	50	5745.00458	5745	0.00458	0.7981
		T (°C)	60	5745.00791	5745	0.00791	1.3776
		T (°C)	70	5745.00246	5745	0.00246	0.4274
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5785.00807	5785	0.00807	1.3942
		V max (V)	138.00	5785.00289	5785	0.00289	0.4991
		V min (V)	102.00	5785.00764	5785	0.00764	1.3201
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5785.00496	5785	0.00496	0.8581
		T (°C)	-10	5785.00725	5785	0.00725	1.2535
		T (°C)	0	5785.00214	5785	0.00214	0.3691
		T (°C)	10	5785.01090	5785	0.01090	1.8836
		T (°C)	20	5785.00337	5785	0.00337	0.5818
		T (°C)	30	5785.00548	5785	0.00548	0.9469
		T (°C)	40	5785.00776	5785	0.00776	1.3422
		T (°C)	50	5785.00133	5785	0.00133	0.2307
		T (°C)	60	5785.00119	5785	0.00119	0.2050
		T (°C)	70	5785.00196	5785	0.00196	0.3380
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5825.00105	5825	0.00105	0.1794
		V max (V)	138.00	5825.00211	5825	0.00211	0.3621
		V min (V)	102.00	5825.00182	5825	0.00182	0.3121
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency : 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5825.00487	5825	0.00487	0.8352
		T (°C)	-10	5825.00610	5825	0.00610	1.0474
		T (°C)	0	5825.00217	5825	0.00217	0.3724
		T (°C)	10	5825.01059	5825	0.01059	1.8185
		T (°C)	20	5825.00293	5825	0.00293	0.5033
		T (°C)	30	5825.01337	5825	0.01337	2.2955
		T (°C)	40	5825.00433	5825	0.00433	0.7439
		T (°C)	50	5825.00186	5825	0.00186	0.3190
		T (°C)	60	5825.00023	5825	0.00023	0.0396
		T (°C)	70	5825.00283	5825	0.00283	0.4863
Limits				5725-5850 MHz			
Result				Complies			

14. Duty Cycle Of Test Signal

14.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

14.2 Formula


Duty Cycle = $T_{on} / (T_{on} + T_{off})$



14.3 Test Procedure



1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak



14.4 Test Result



Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	AntA	100	0	0
NVNT	a	5200	AntA	100	0	0
NVNT	a	5240	AntA	100	0	0
NVNT	n20	5180	AntA	100	0	0
NVNT	n20	5200	AntA	100	0	0
NVNT	n20	5240	AntA	100	0	0
NVNT	n40	5190	AntA	100	0	0
NVNT	n40	5230	AntA	100	0	0
NVNT	ac20	5180	AntA	100	0	0
NVNT	ac20	5200	AntA	100	0	0
NVNT	ac20	5240	AntA	100	0	0
NVNT	ac40	5190	AntA	100	0	0
NVNT	ac40	5230	AntA	100	0	0
NVNT	ac80	5210	AntA	100	0	0


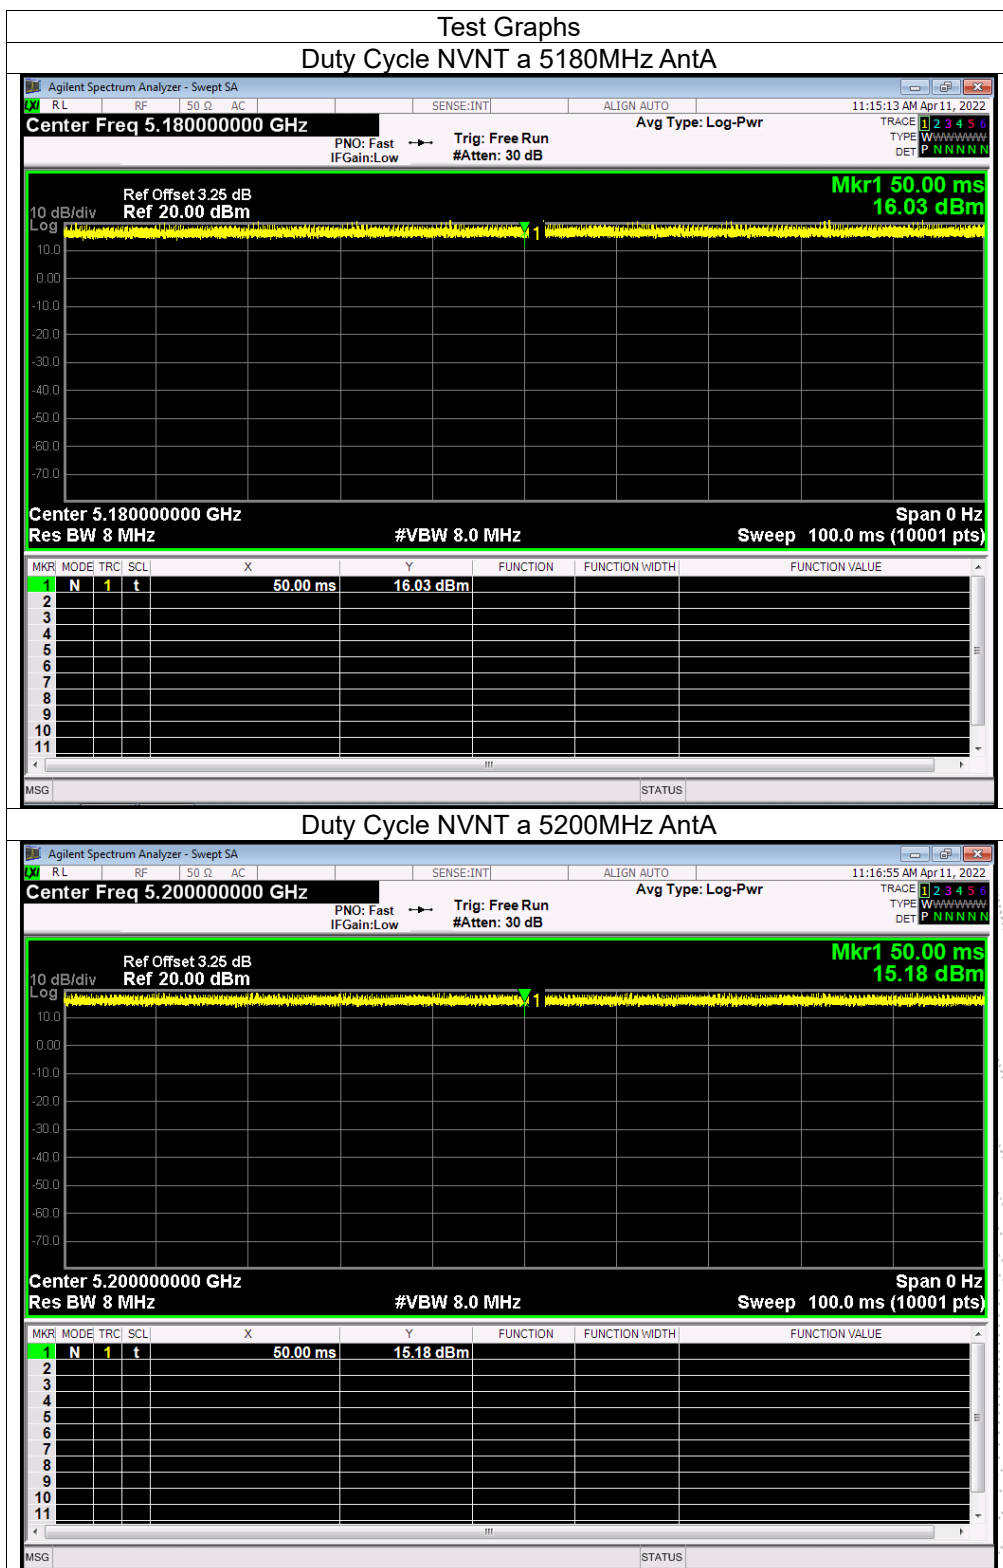


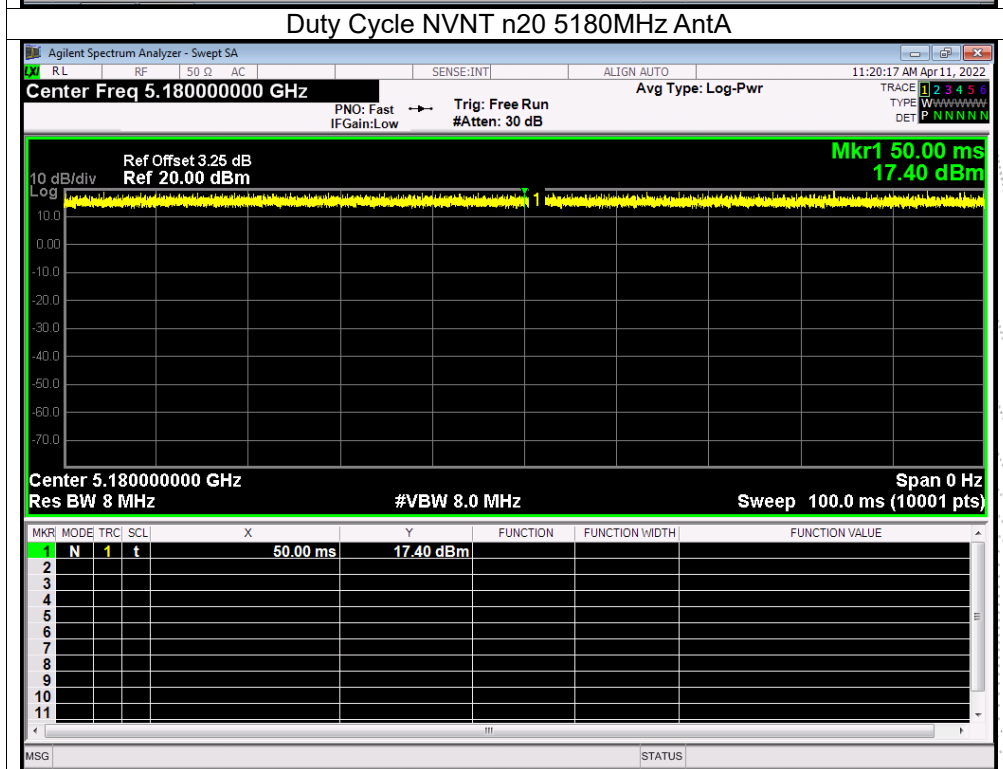
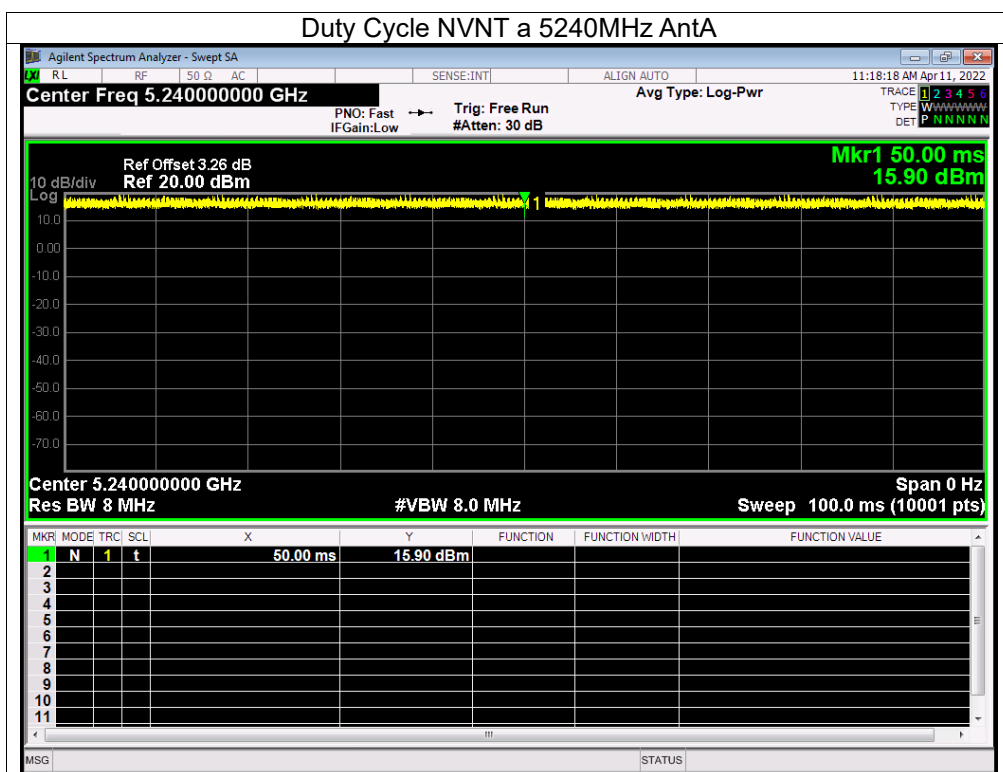


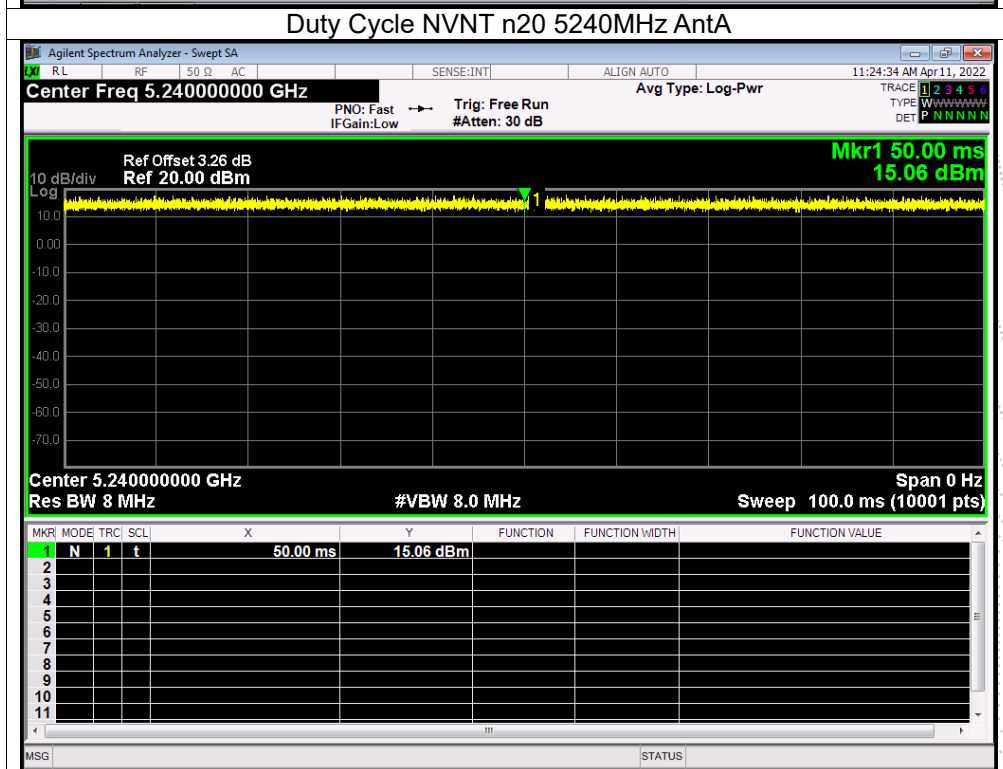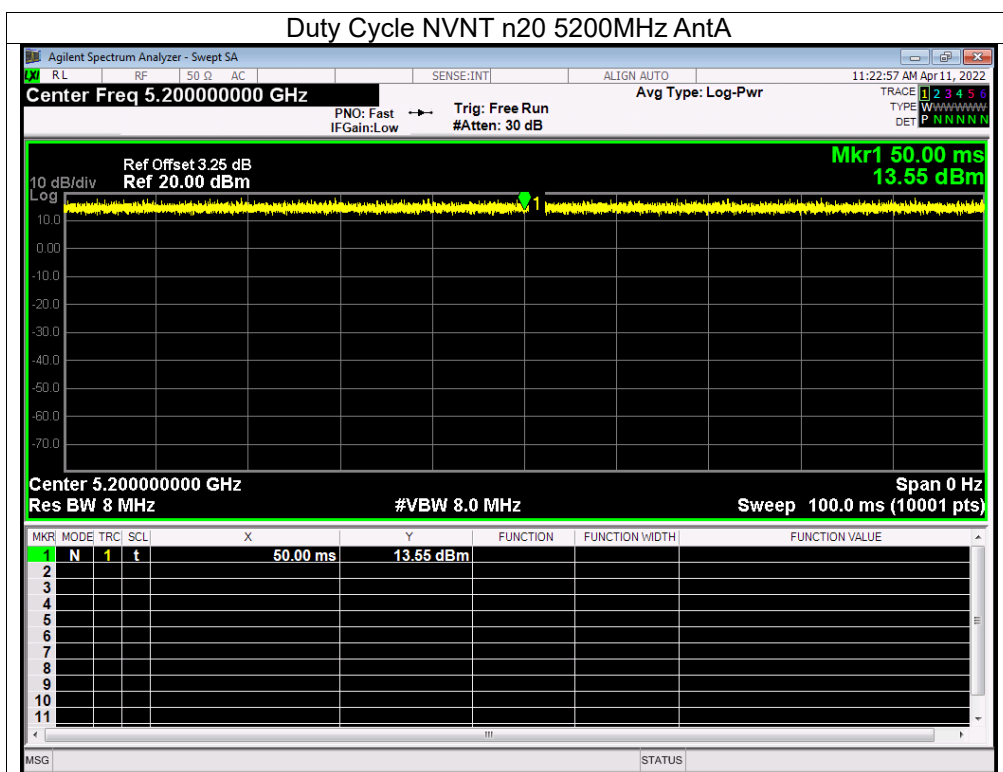

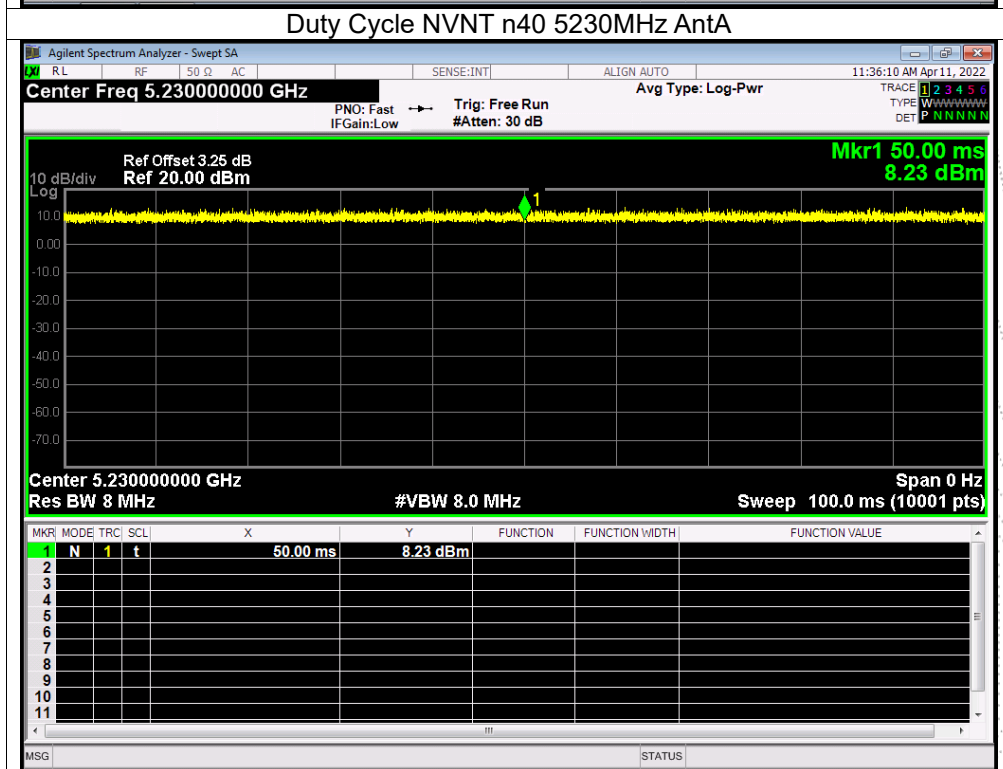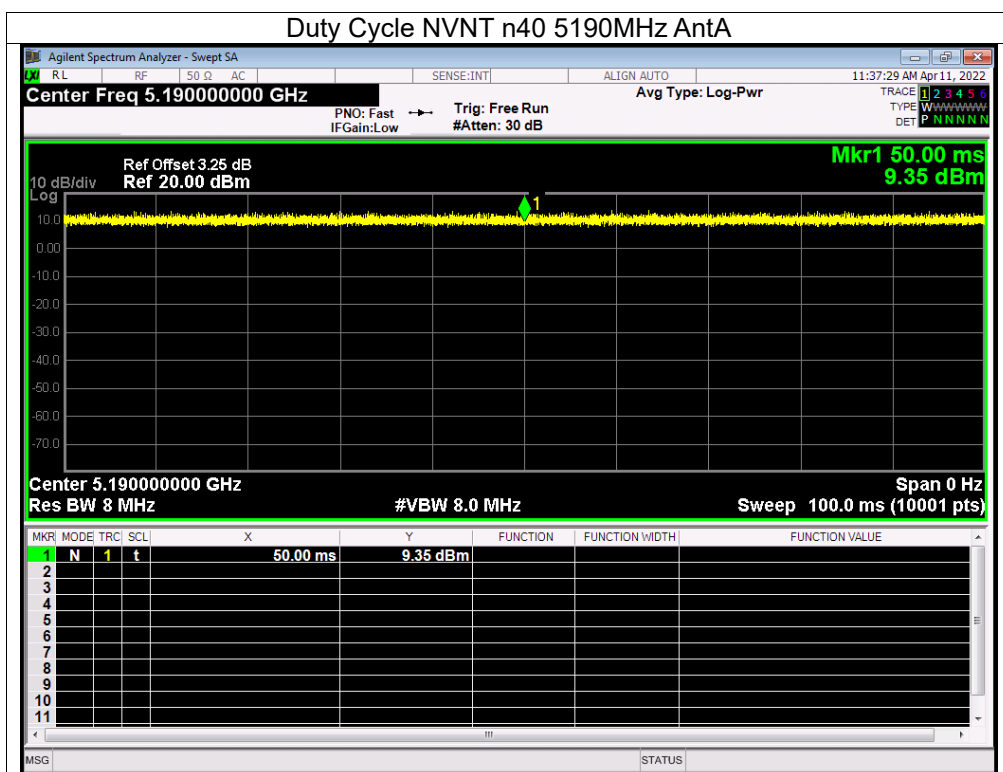


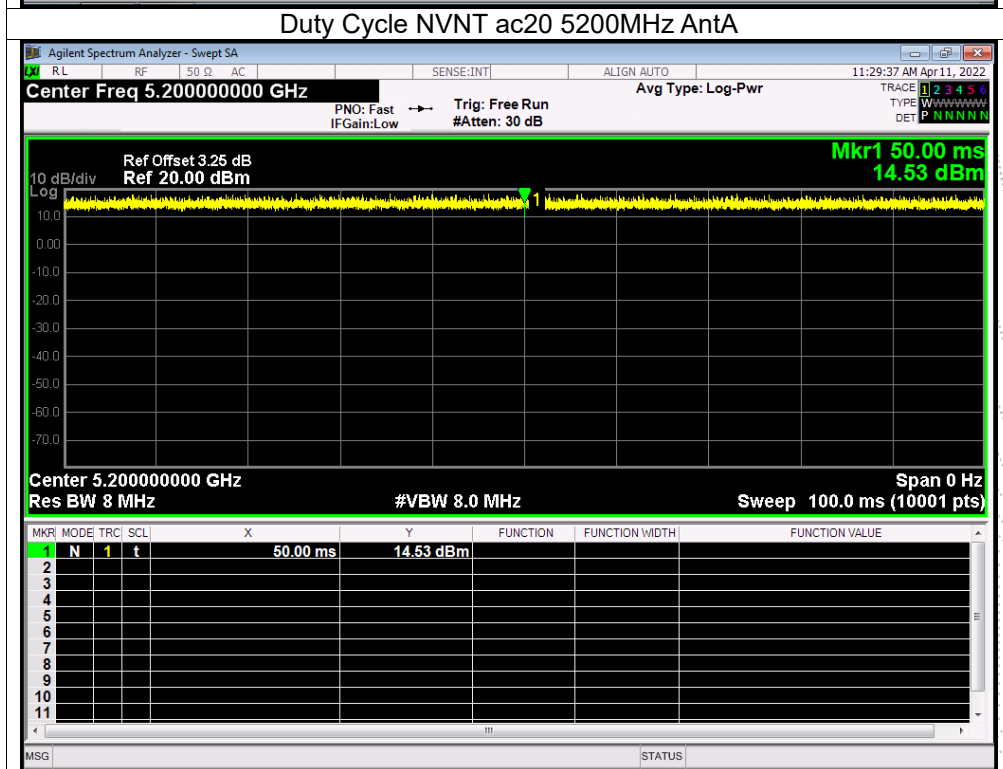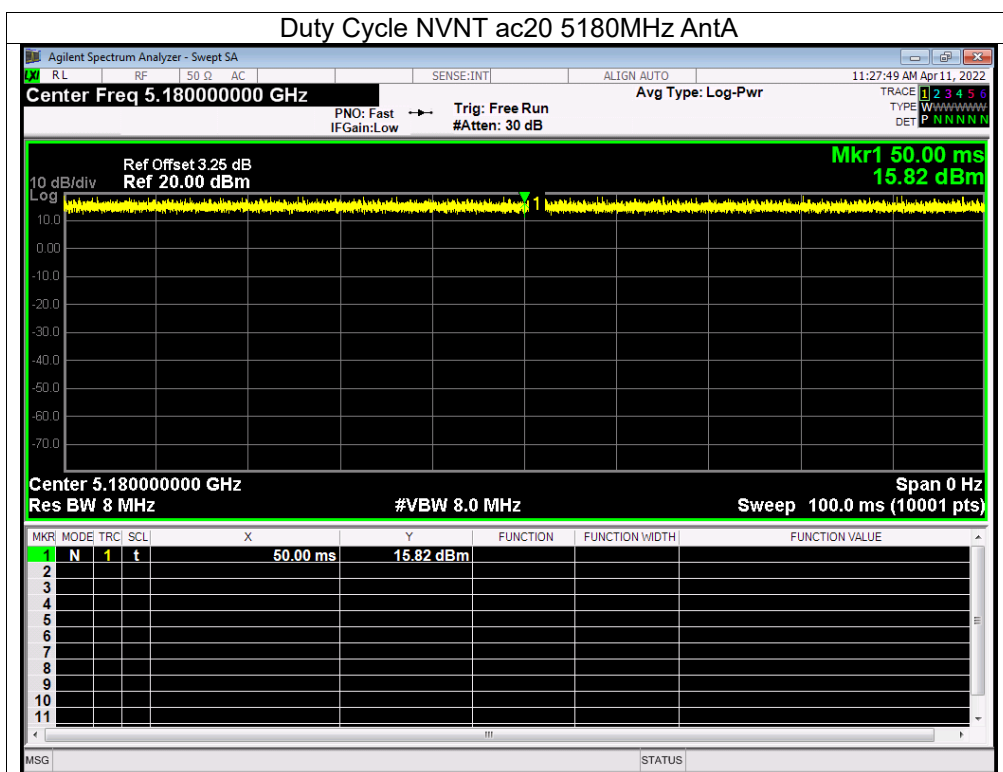


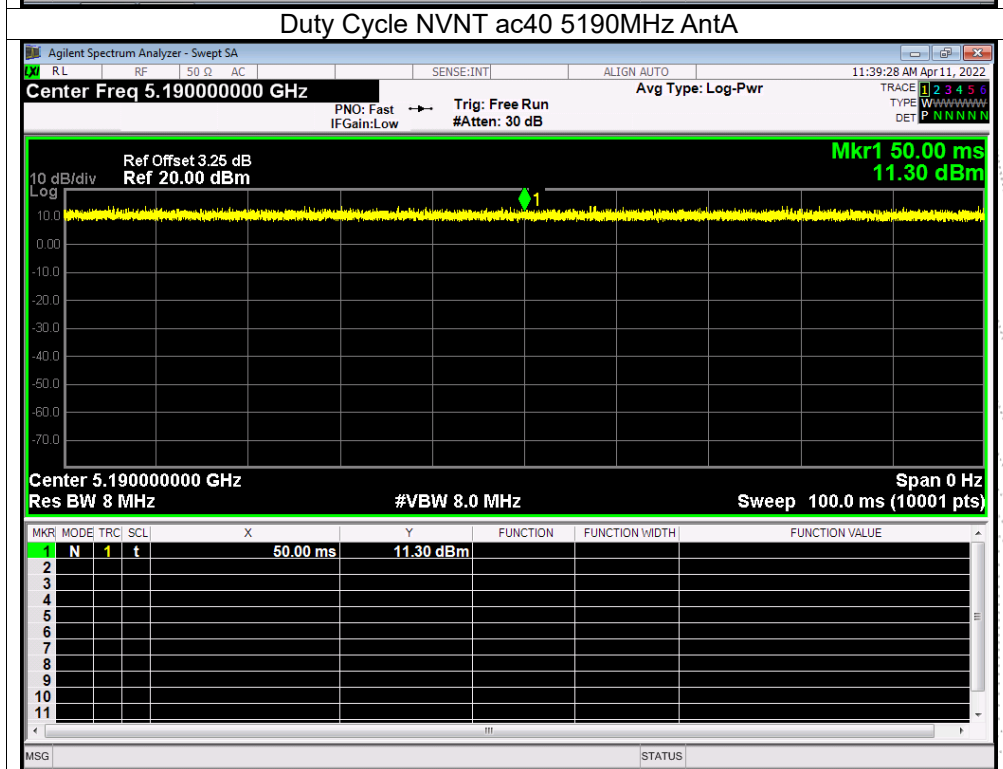
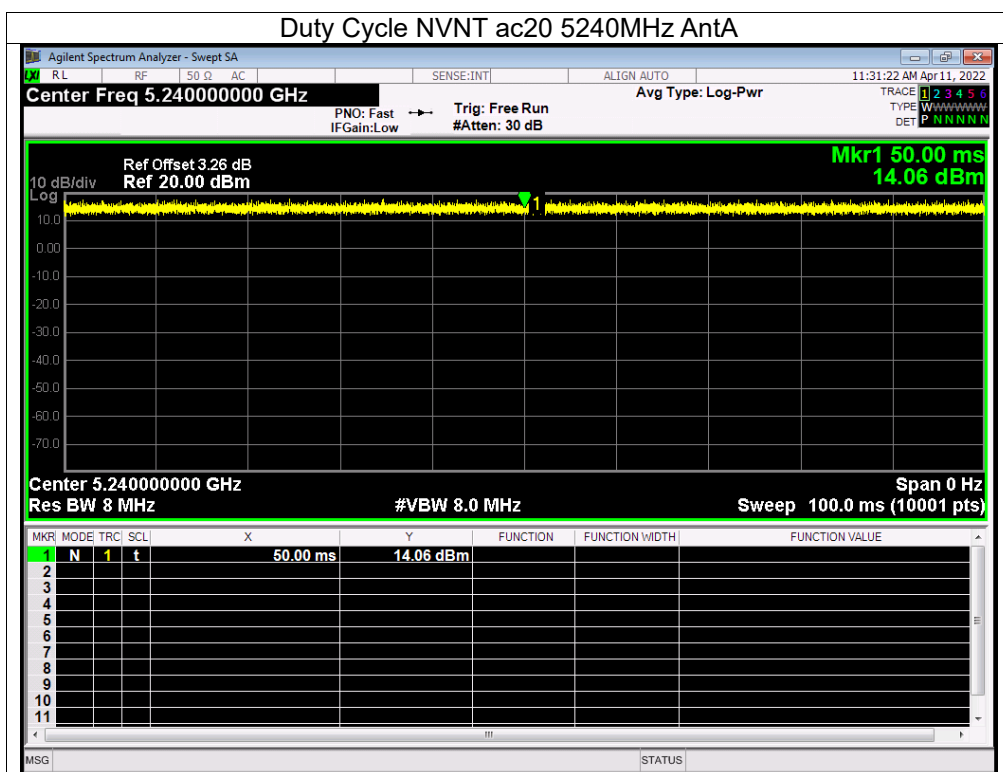


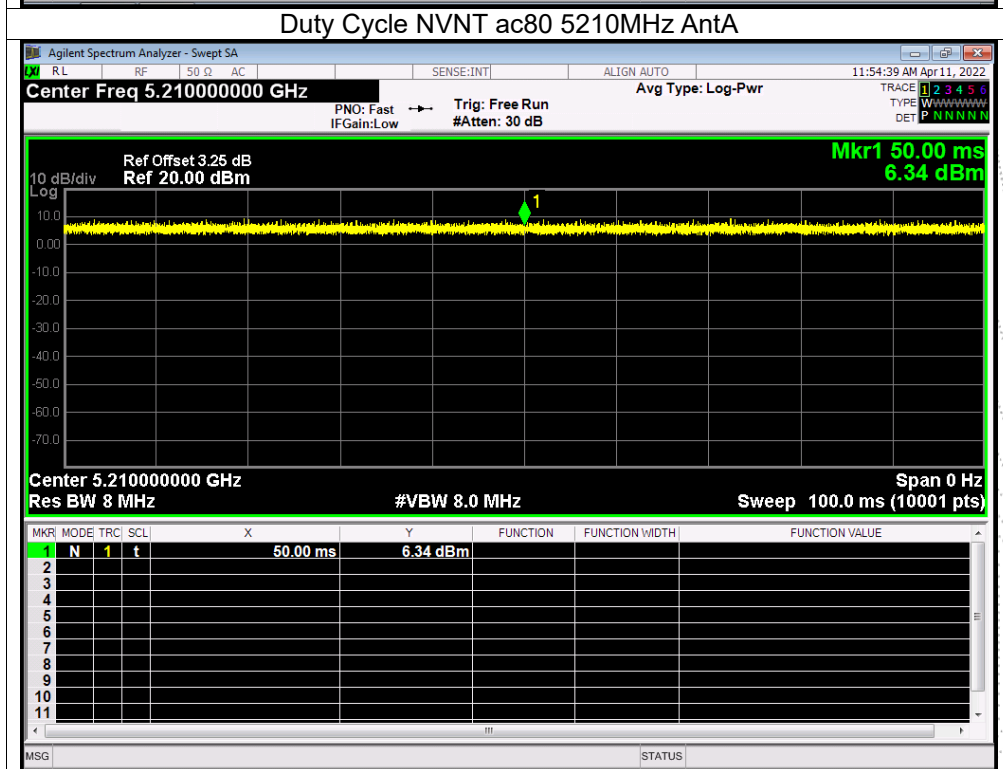
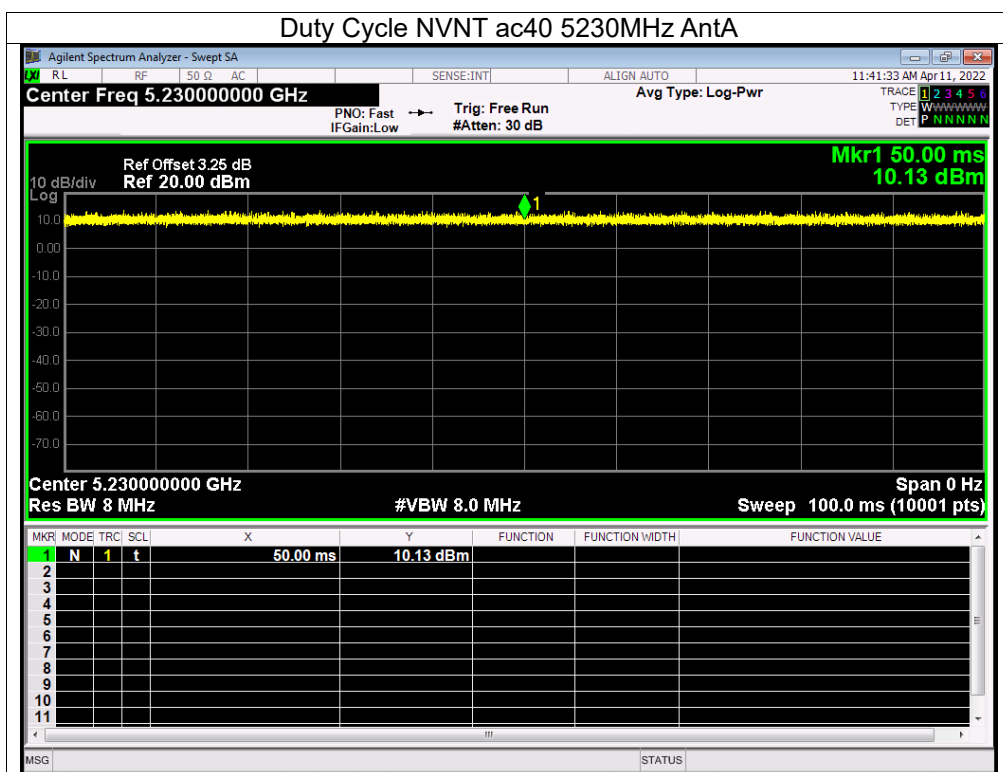




Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	AntB	100	0	0
NVNT	a	5200	AntB	100	0	0
NVNT	a	5240	AntB	100	0	0
NVNT	n20	5180	AntB	100	0	0
NVNT	n20	5200	AntB	100	0	0
NVNT	n20	5240	AntB	100	0	0
NVNT	n40	5190	AntB	100	0	0
NVNT	n40	5230	AntB	100	0	0
NVNT	ac20	5180	AntB	100	0	0
NVNT	ac20	5200	AntB	100	0	0
NVNT	ac20	5240	AntB	100	0	0
NVNT	ac40	5190	AntB	100	0	0
NVNT	ac40	5230	AntB	100	0	0
NVNT	ac80	5210	AntB	100	0	0


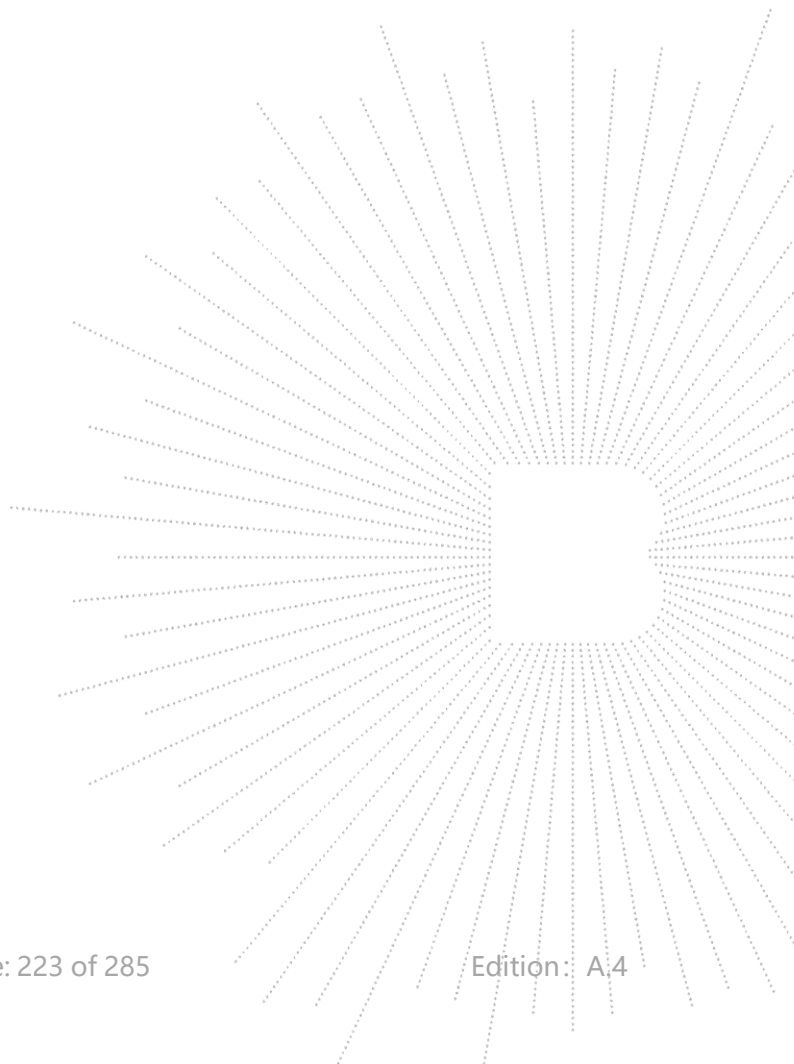



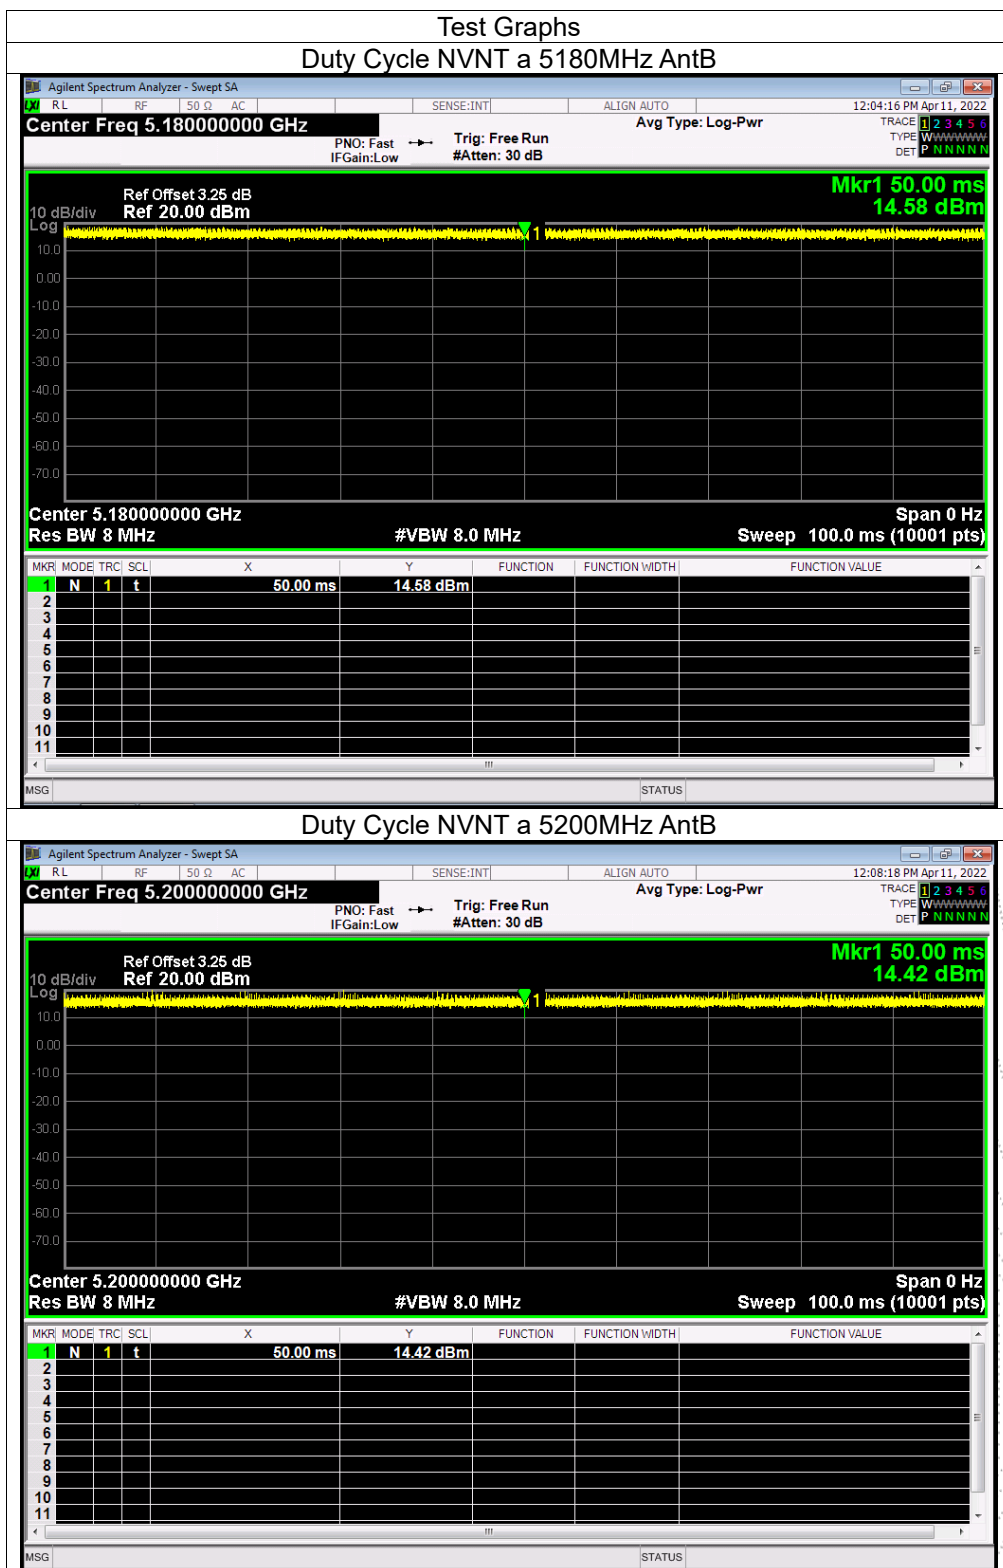


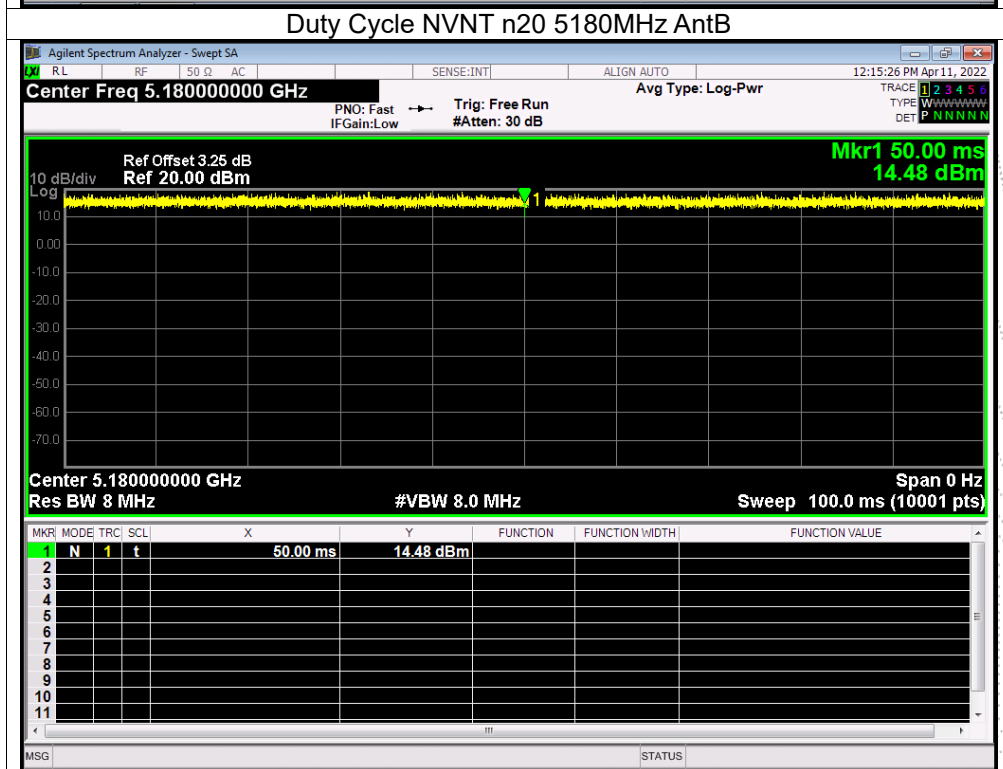
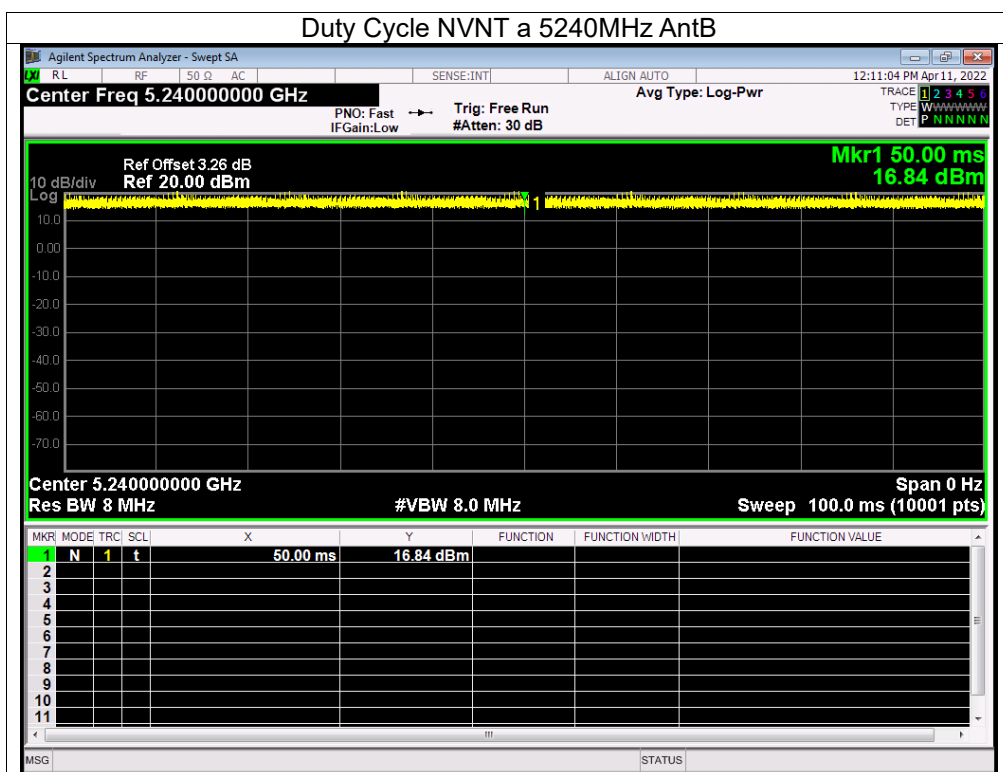


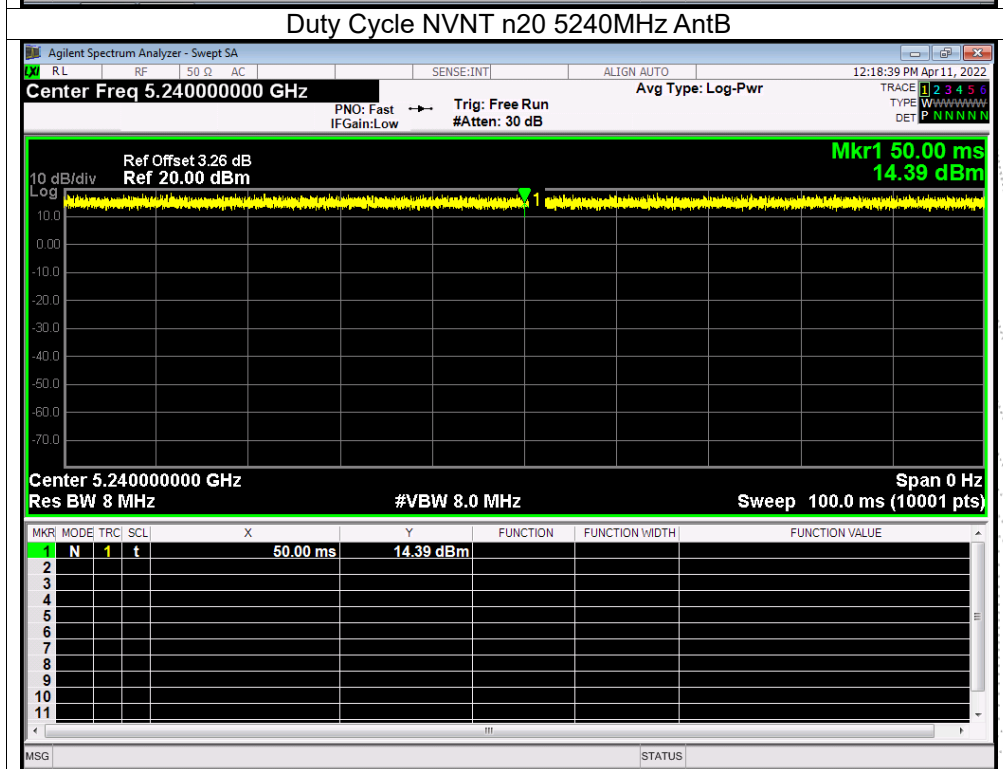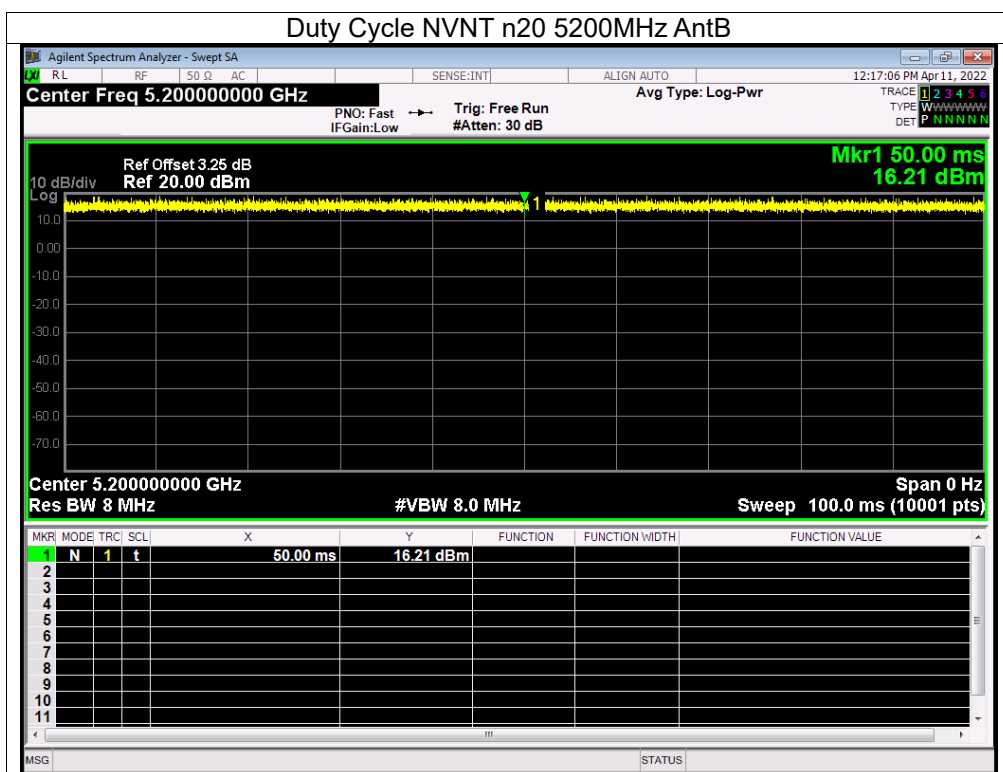

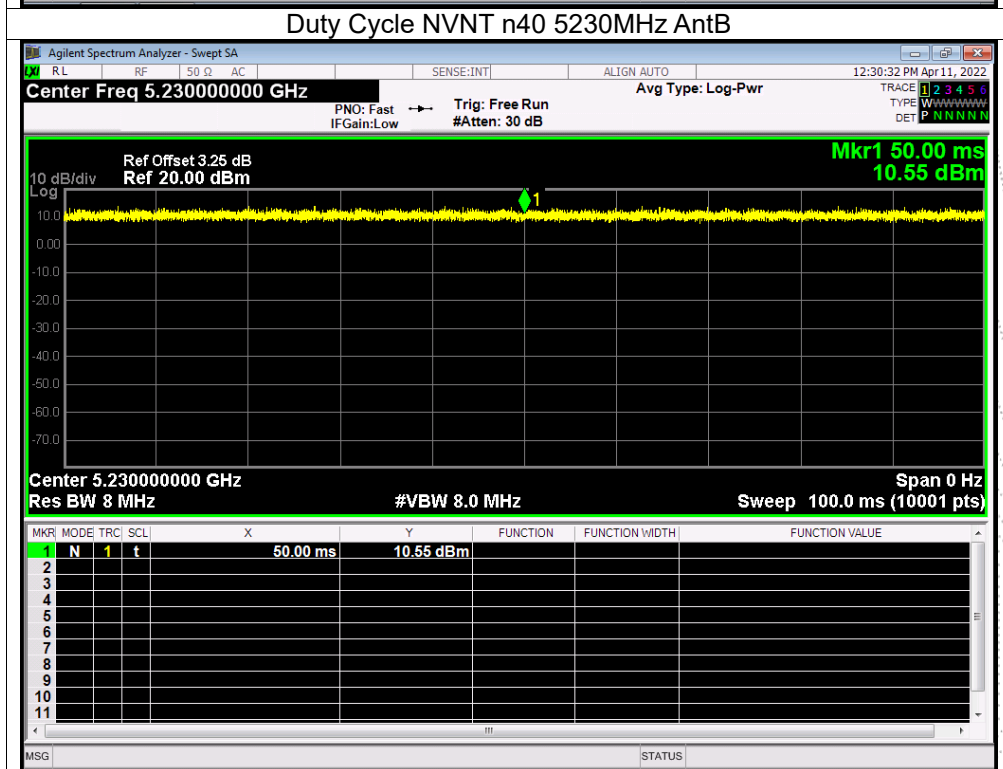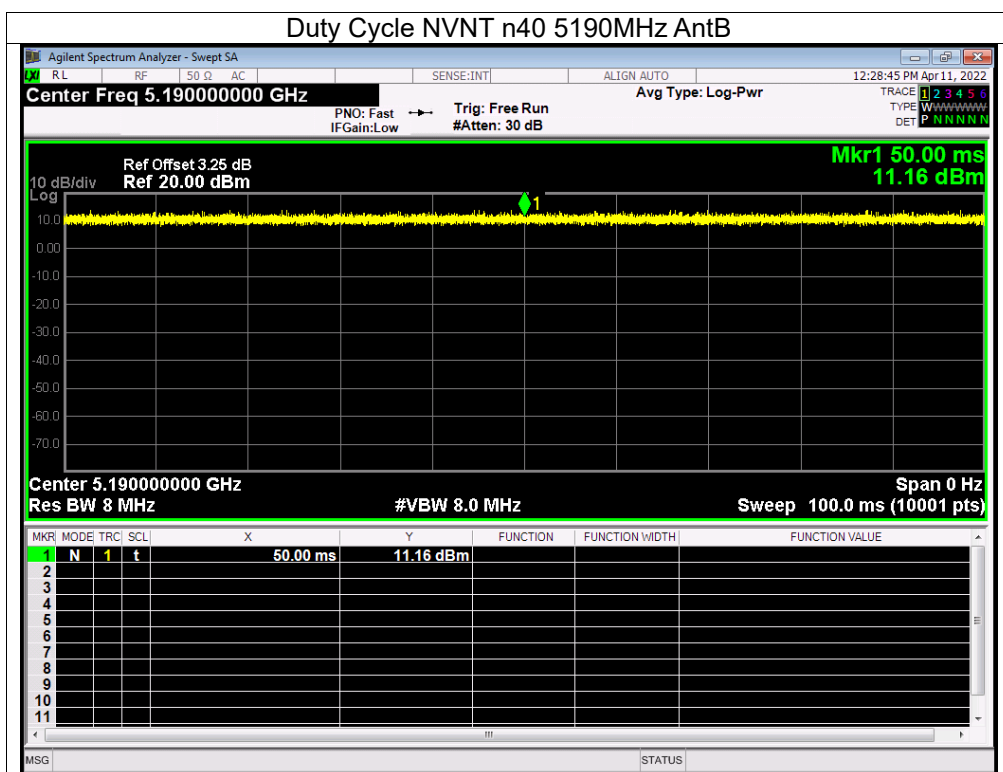


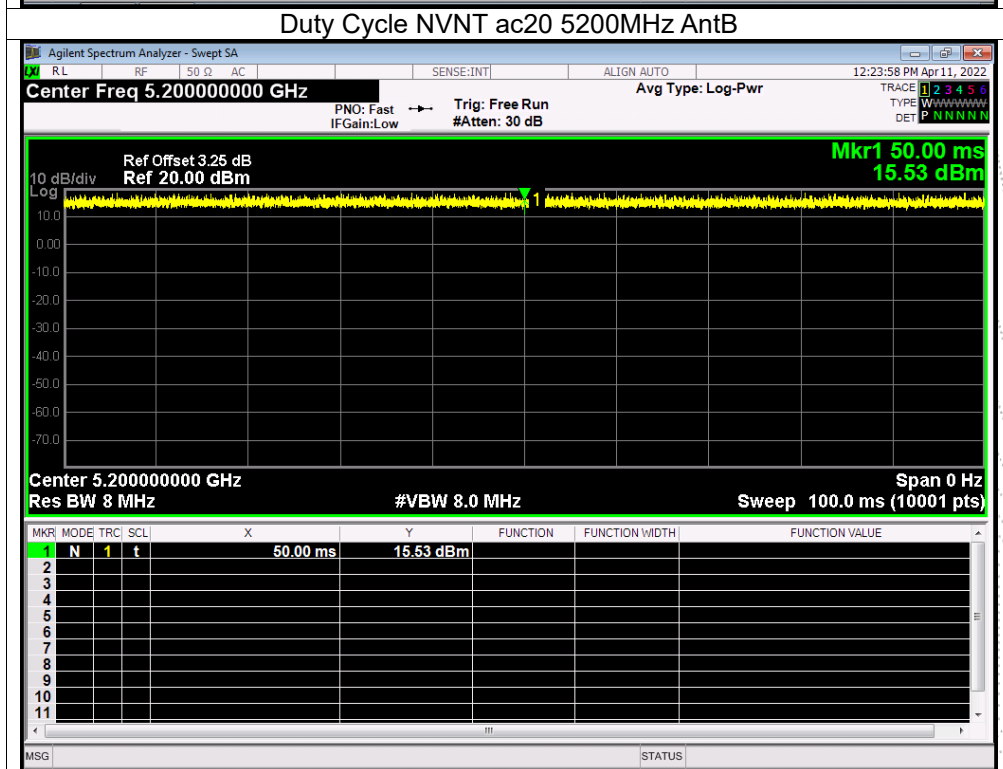
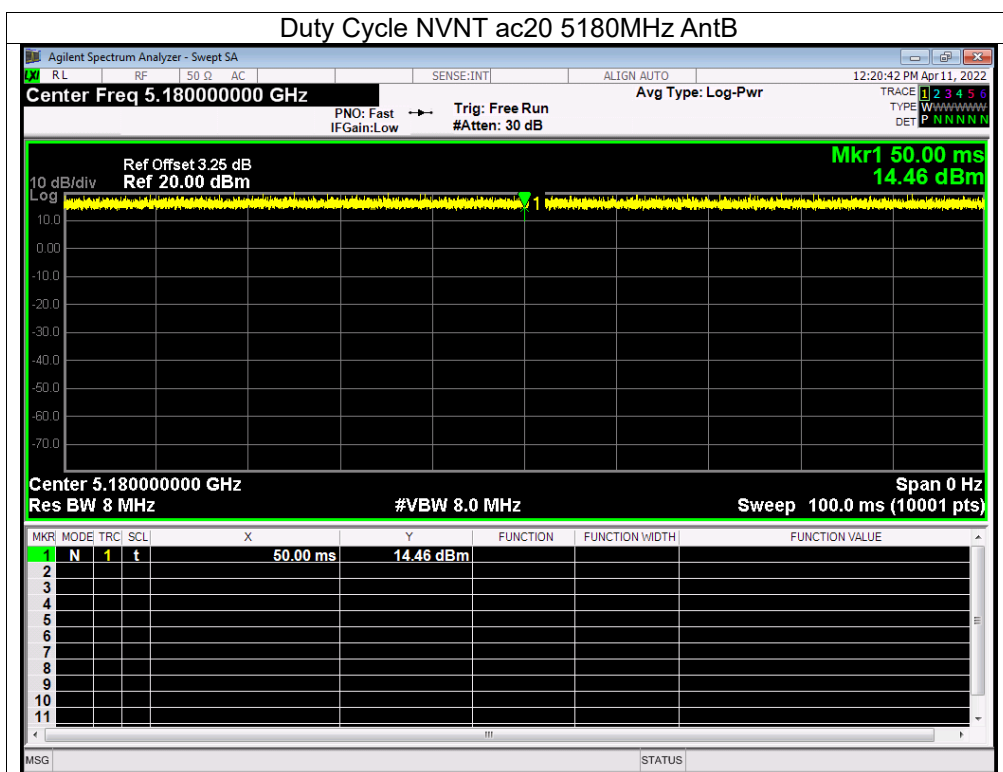


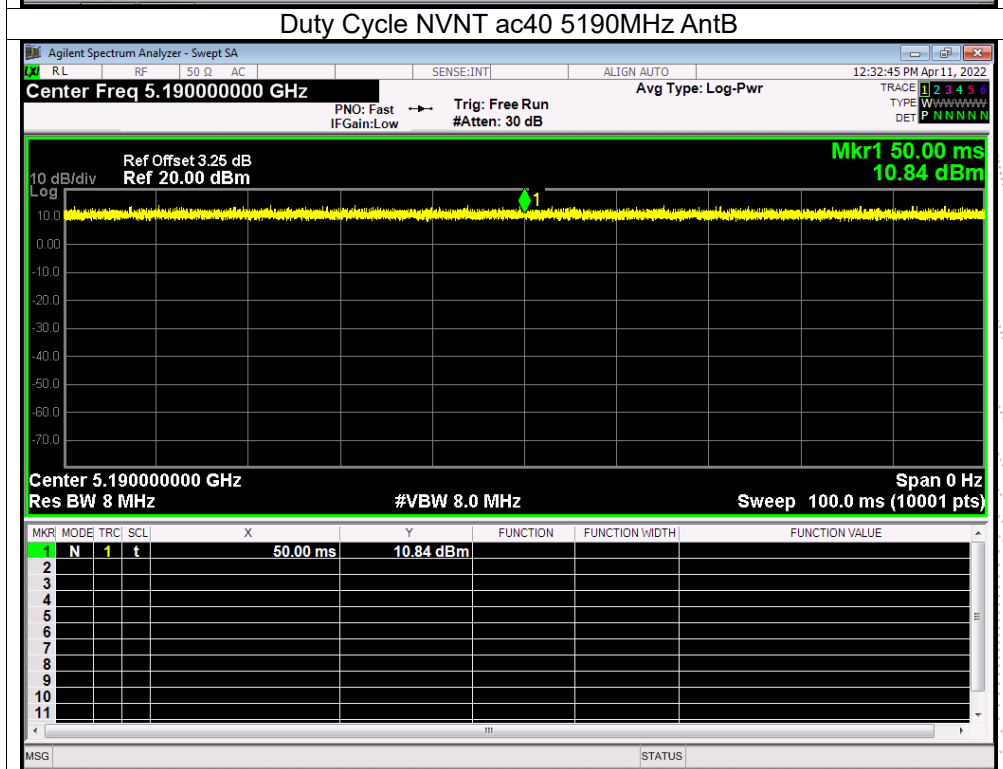
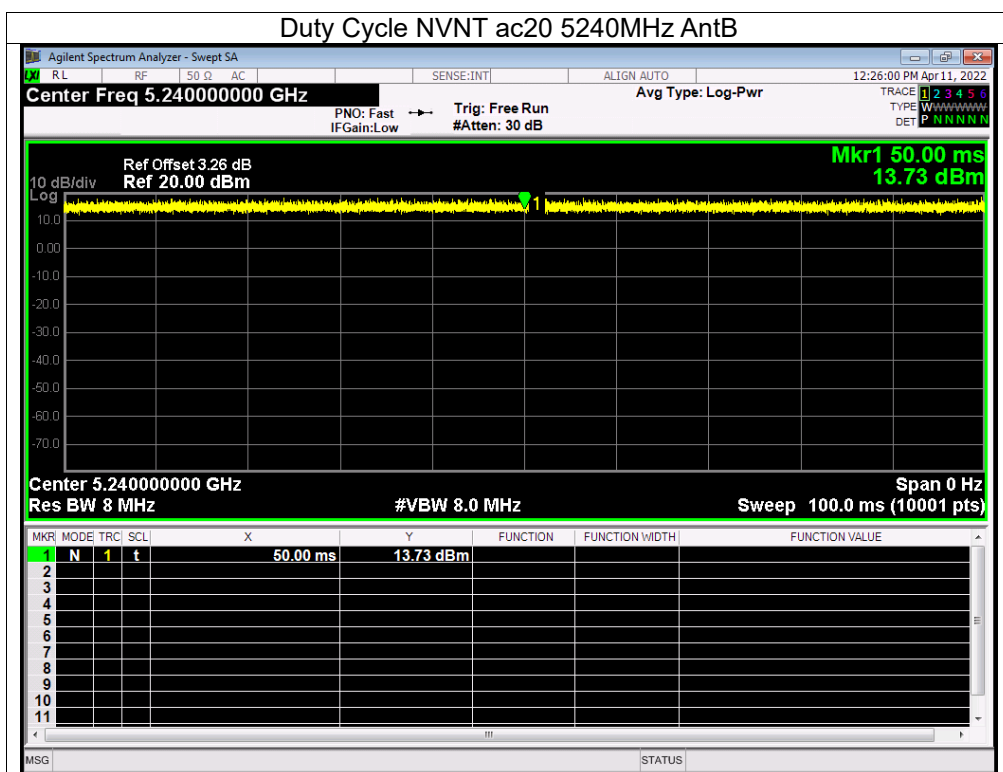


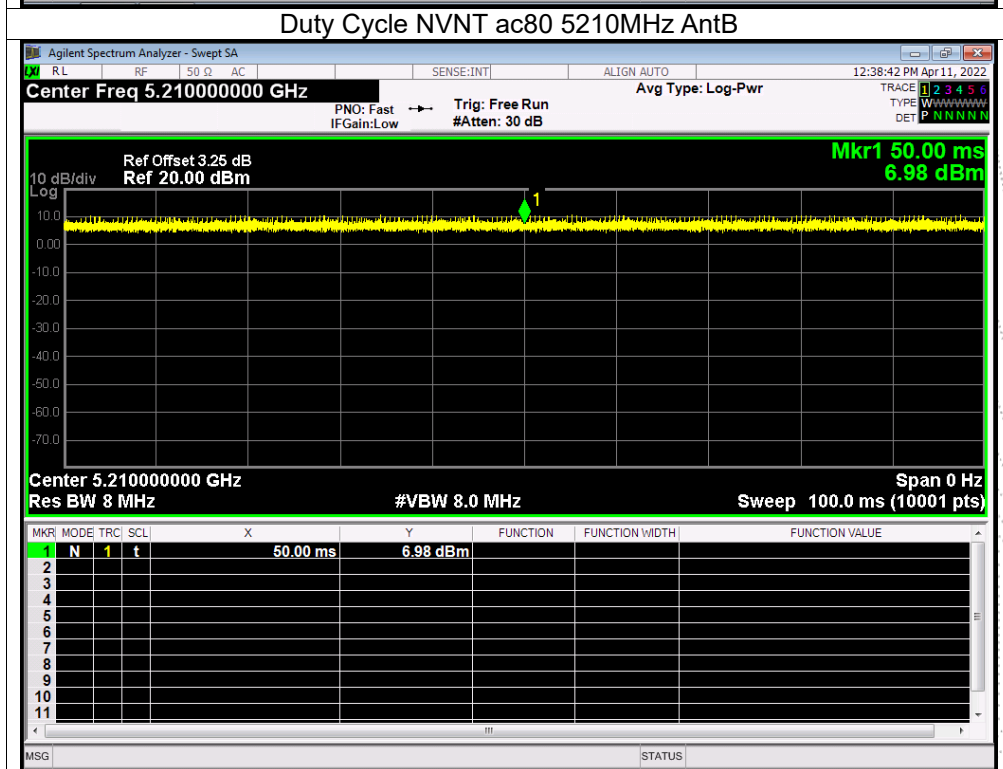
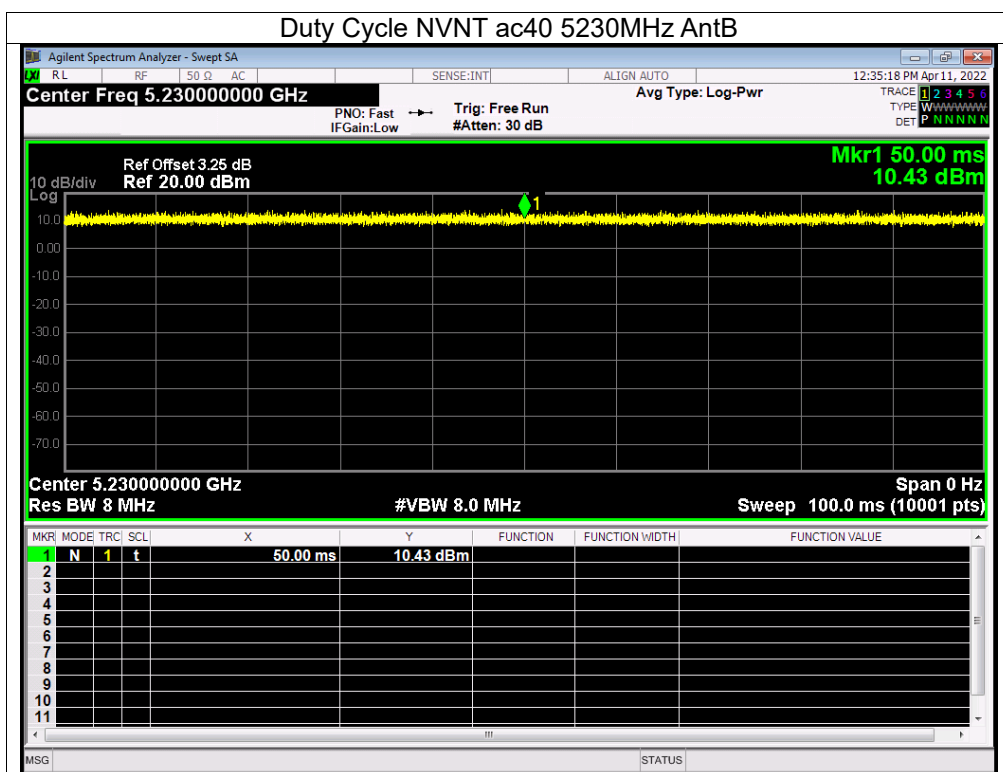




Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	AntA	100	0	0
NVNT	a	5280	AntA	100	0	0
NVNT	a	5320	AntA	100	0	0
NVNT	n20	5260	AntA	100	0	0
NVNT	n20	5280	AntA	100	0	0
NVNT	n20	5320	AntA	100	0	0
NVNT	n40	5270	AntA	100	0	0
NVNT	n40	5310	AntA	100	0	0
NVNT	ac20	5260	AntA	100	0	0
NVNT	ac20	5280	AntA	100	0	0
NVNT	ac20	5320	AntA	100	0	0
NVNT	ac40	5270	AntA	100	0	0
NVNT	ac40	5310	AntA	100	0	0
NVNT	ac80	5290	AntA	100	0	0


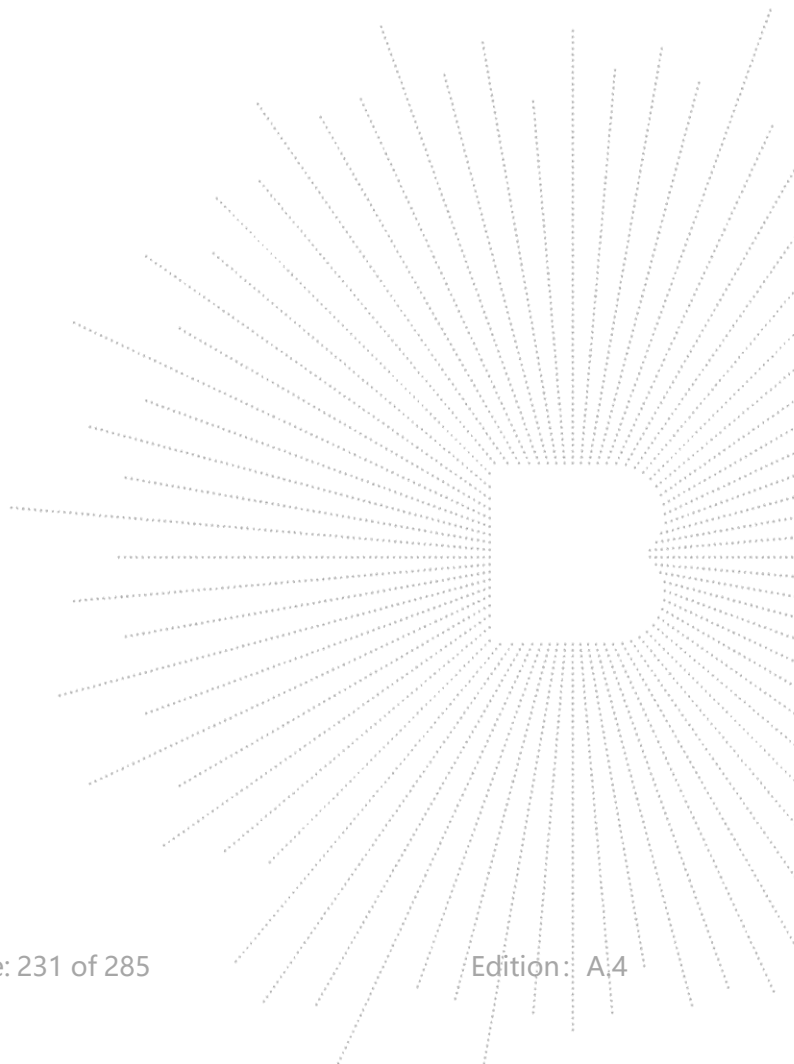


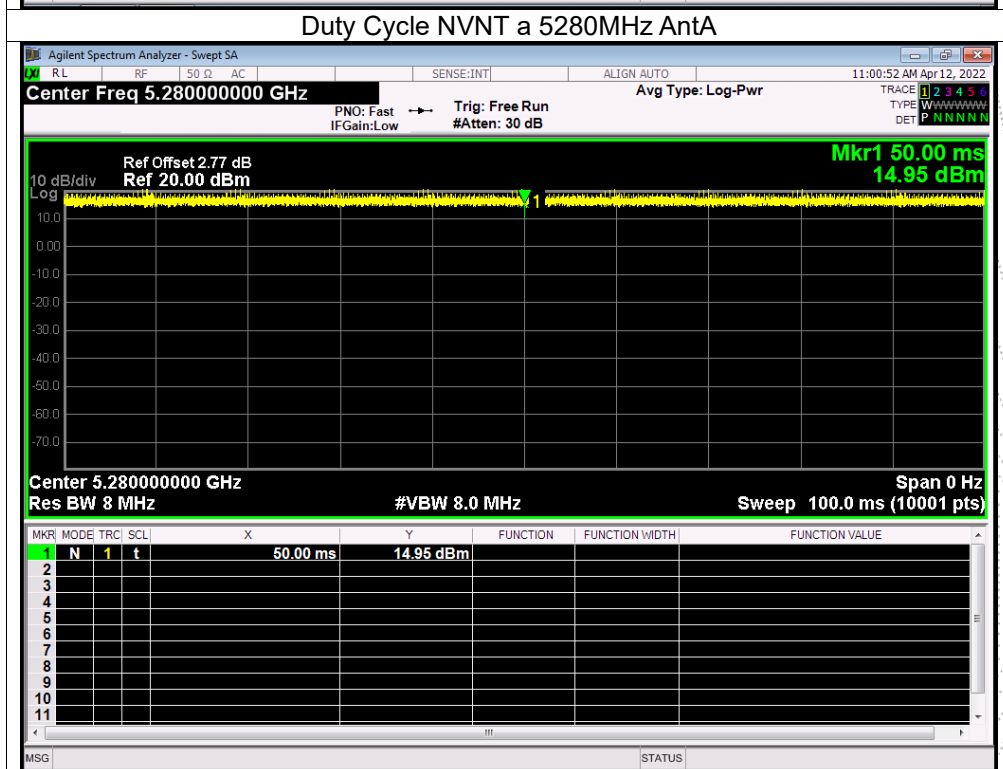
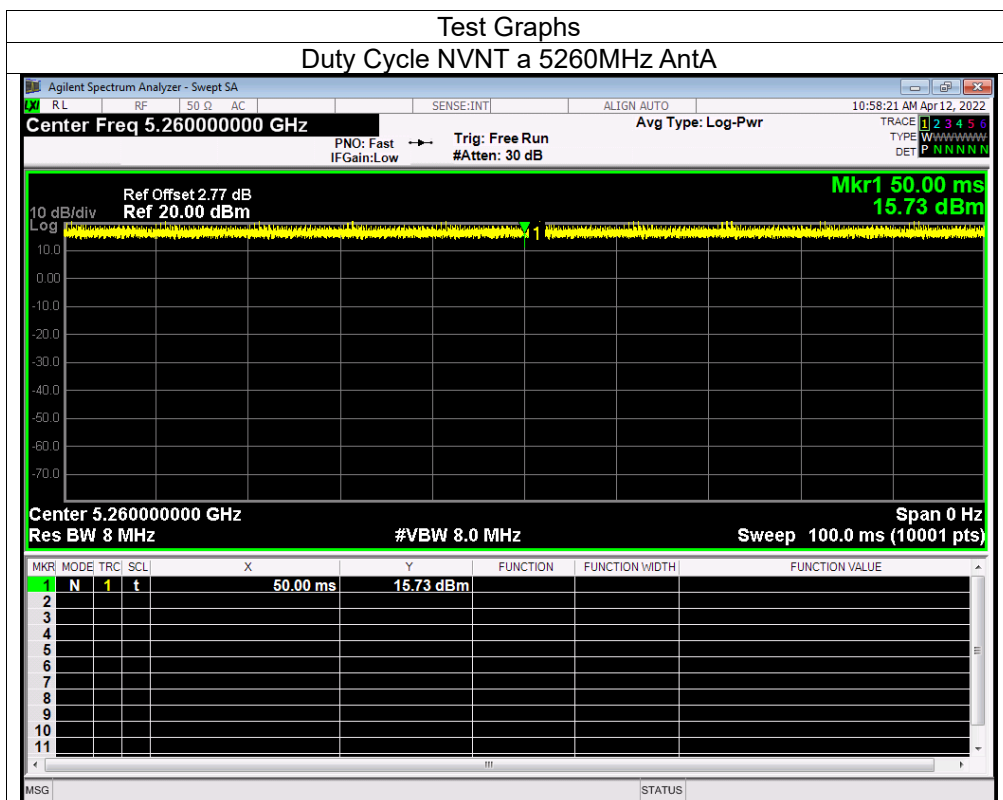


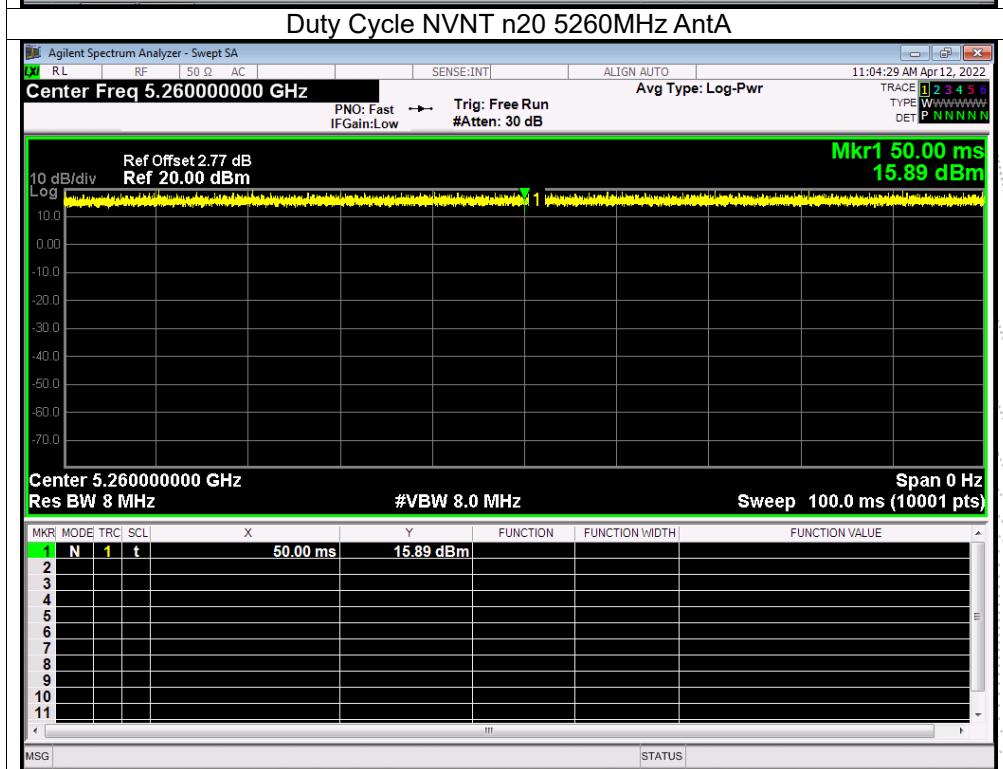
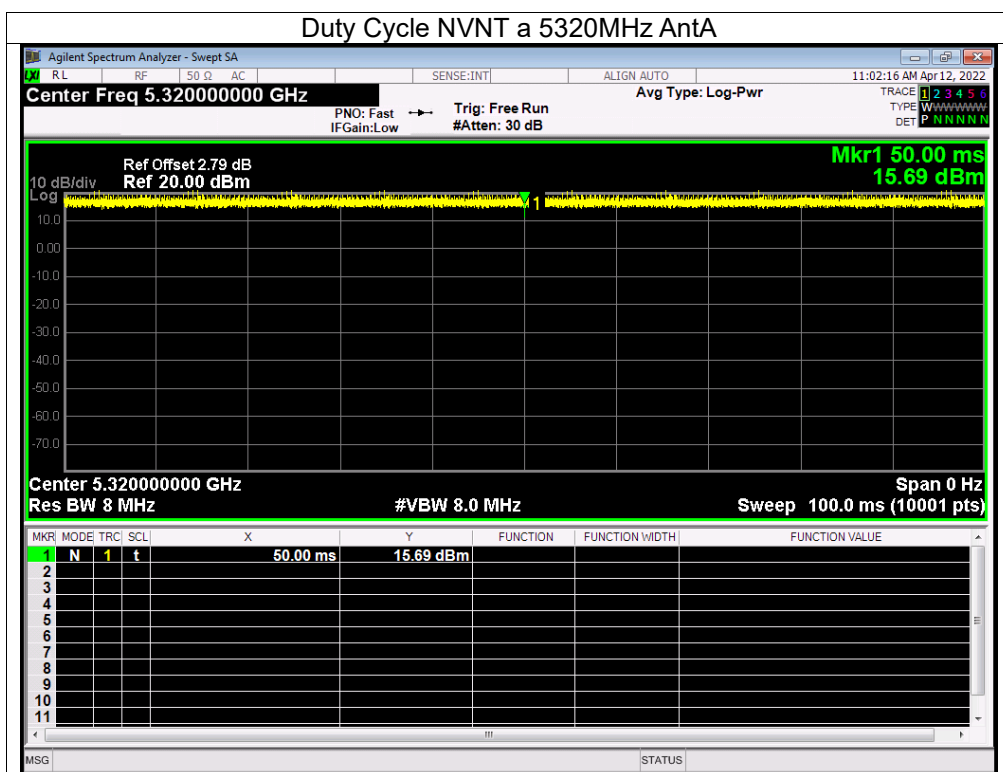


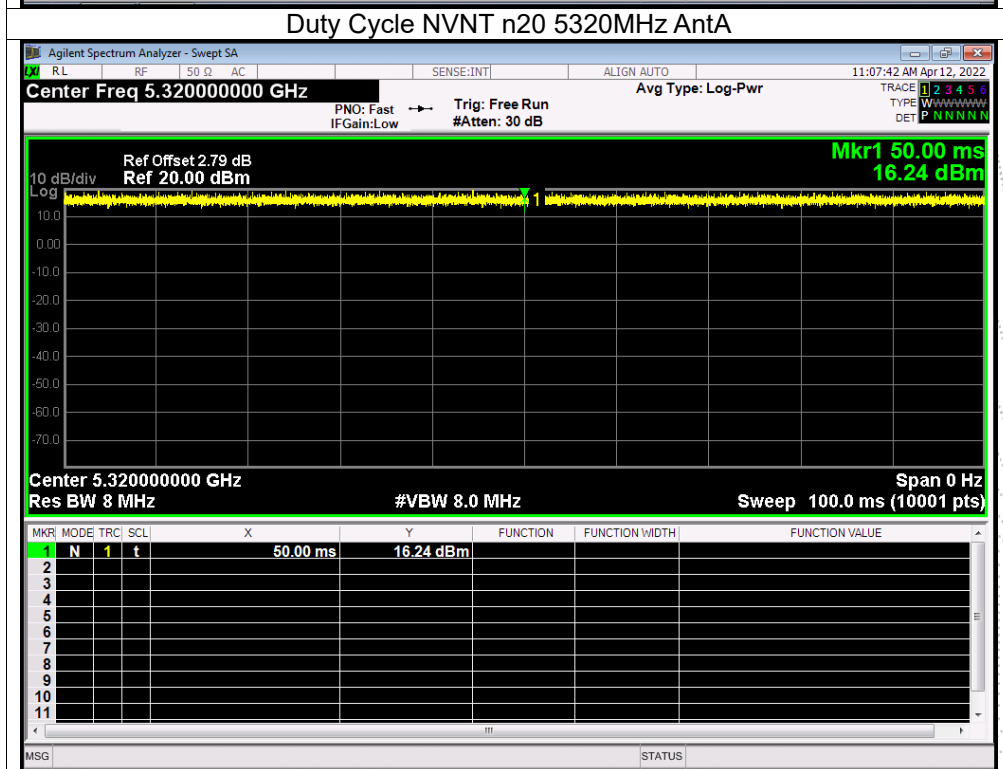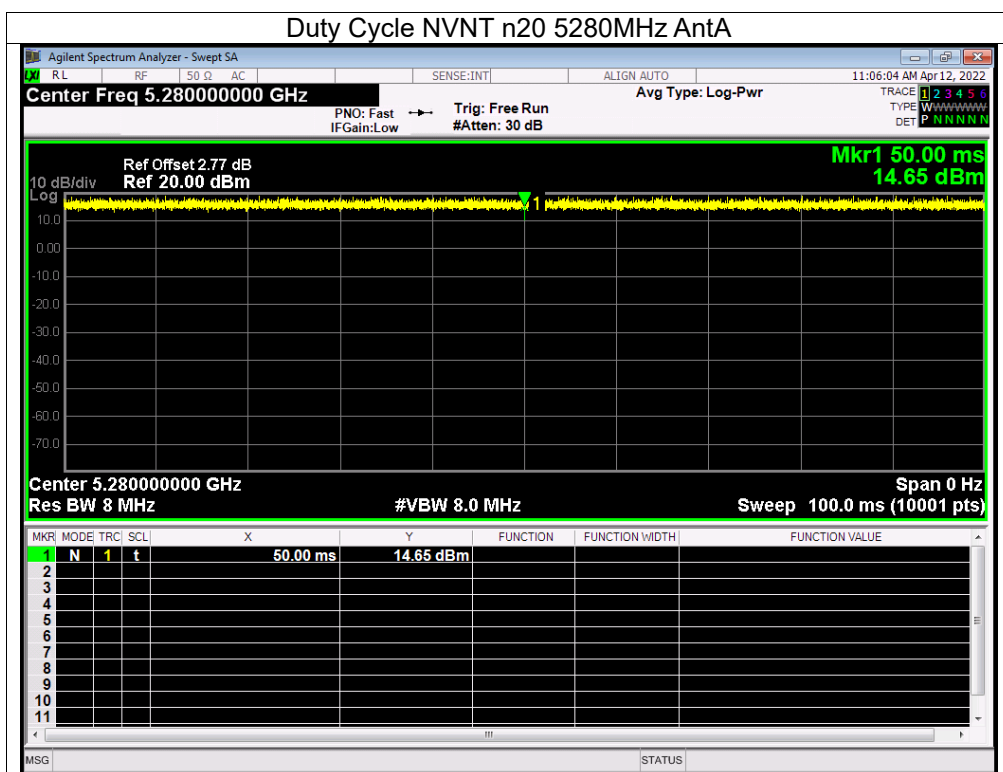

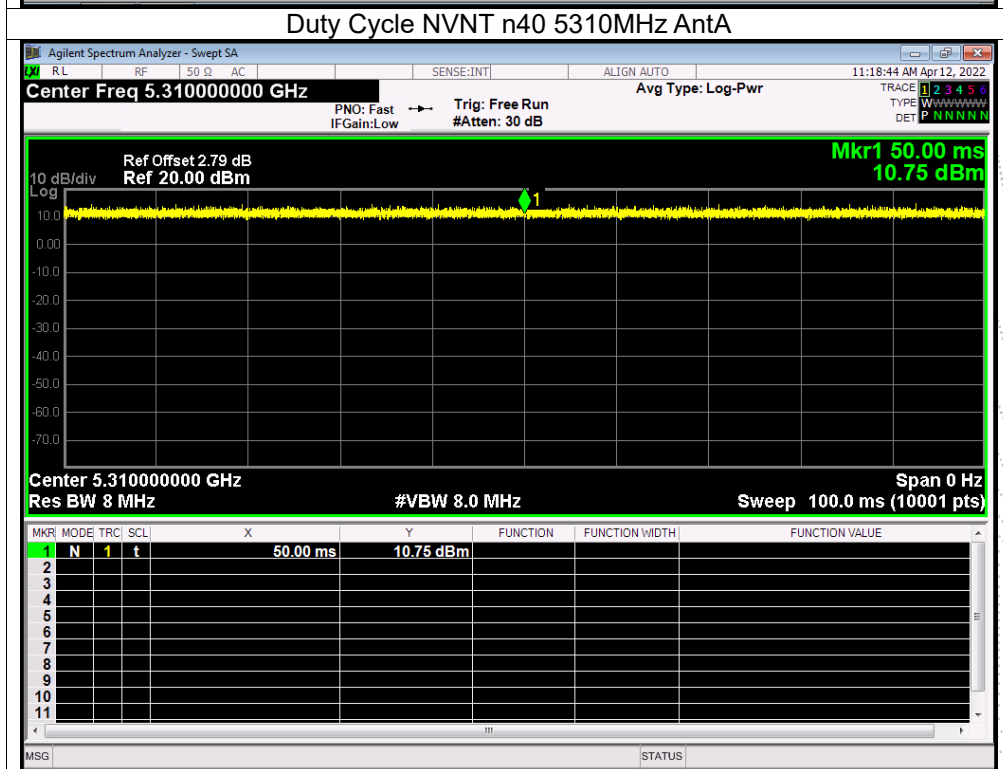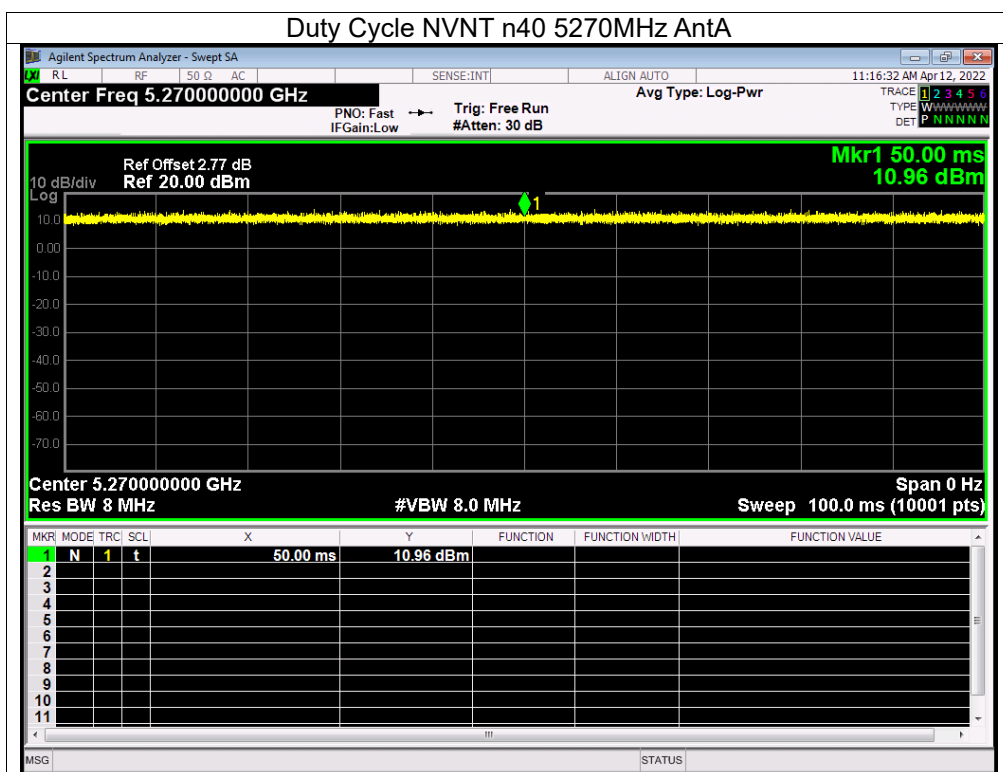

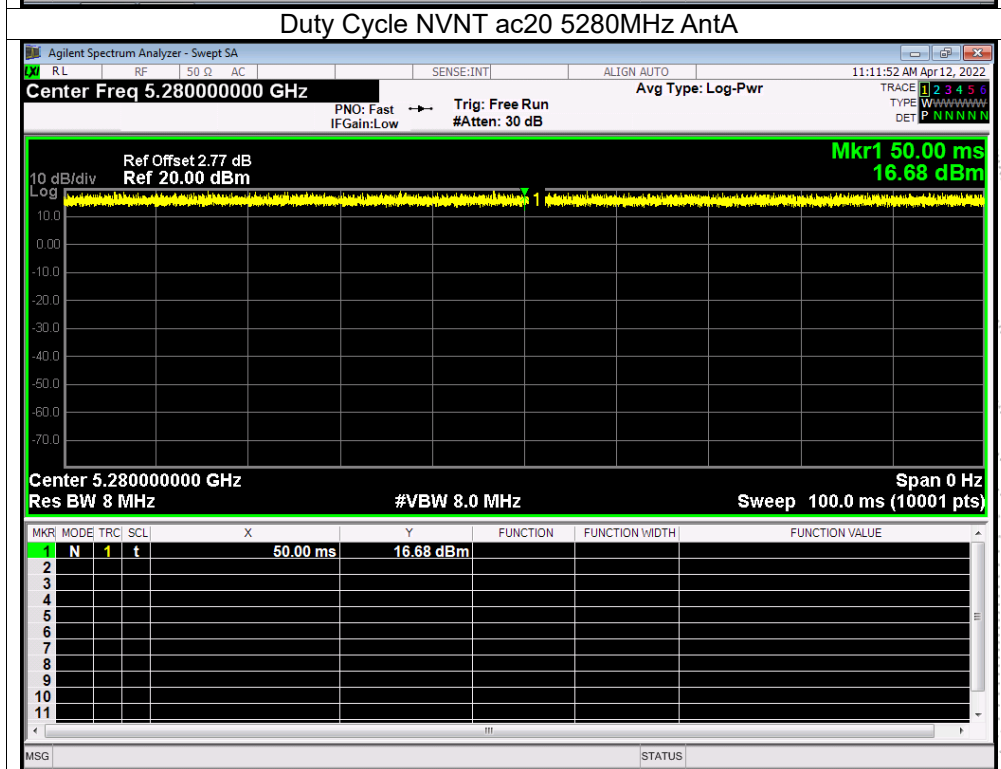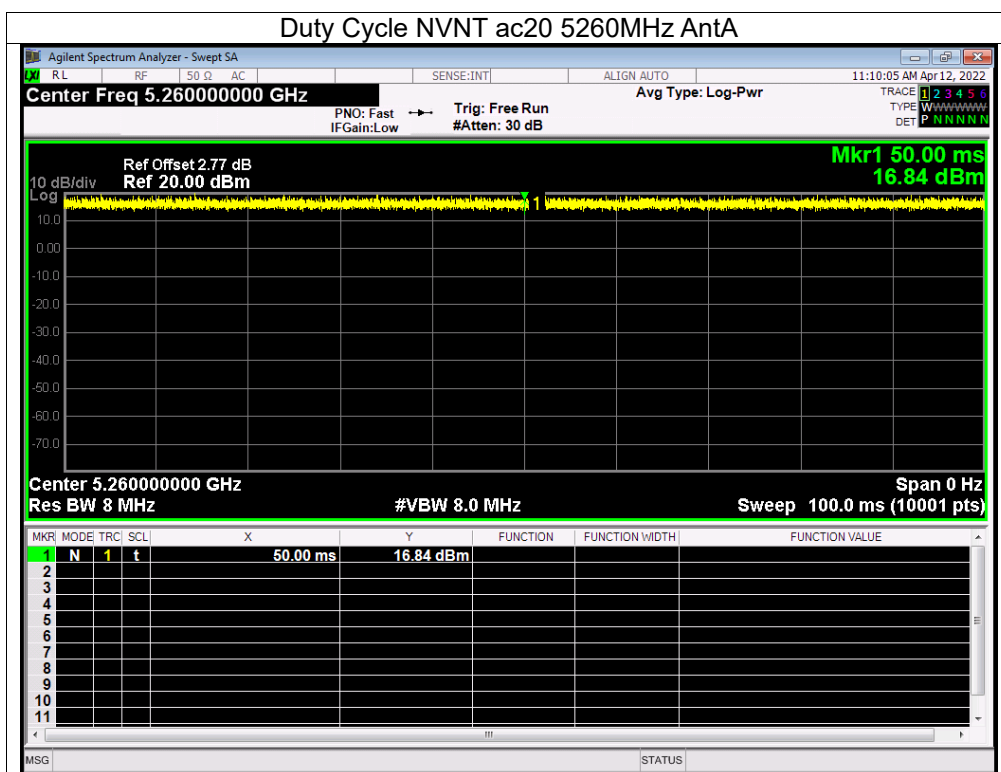

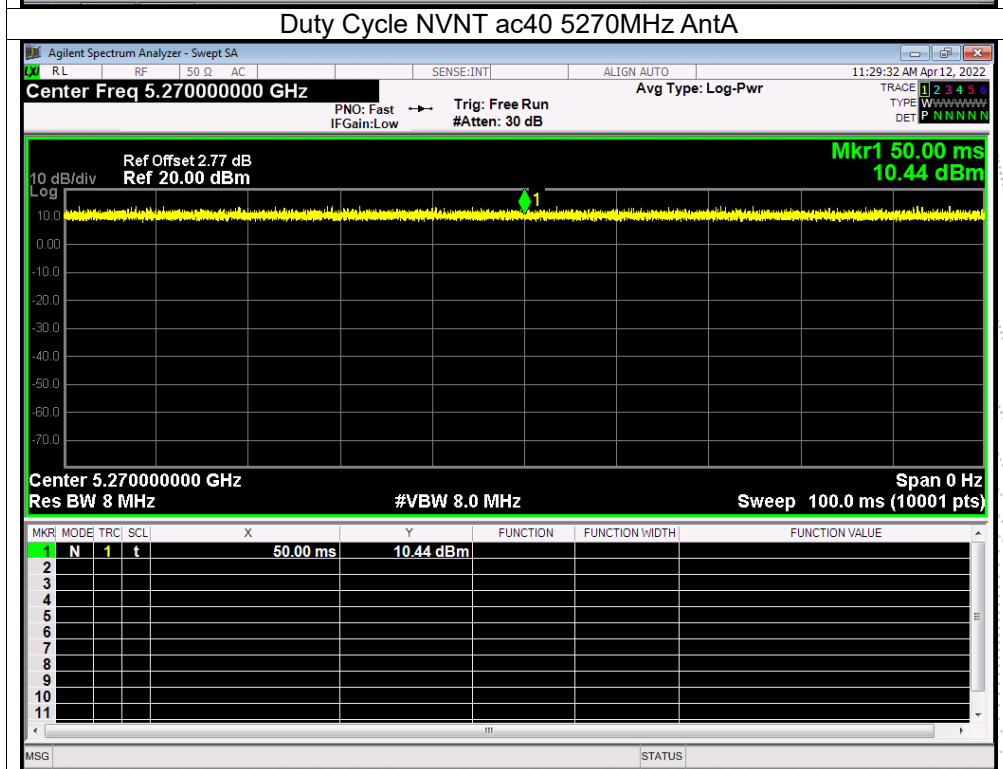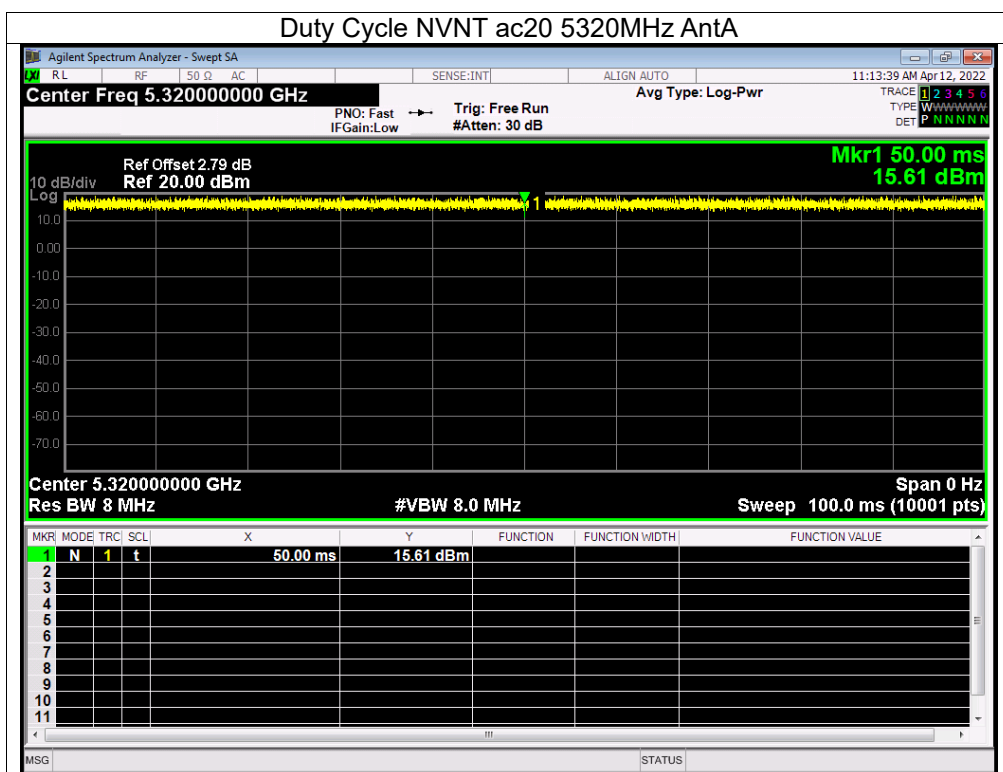

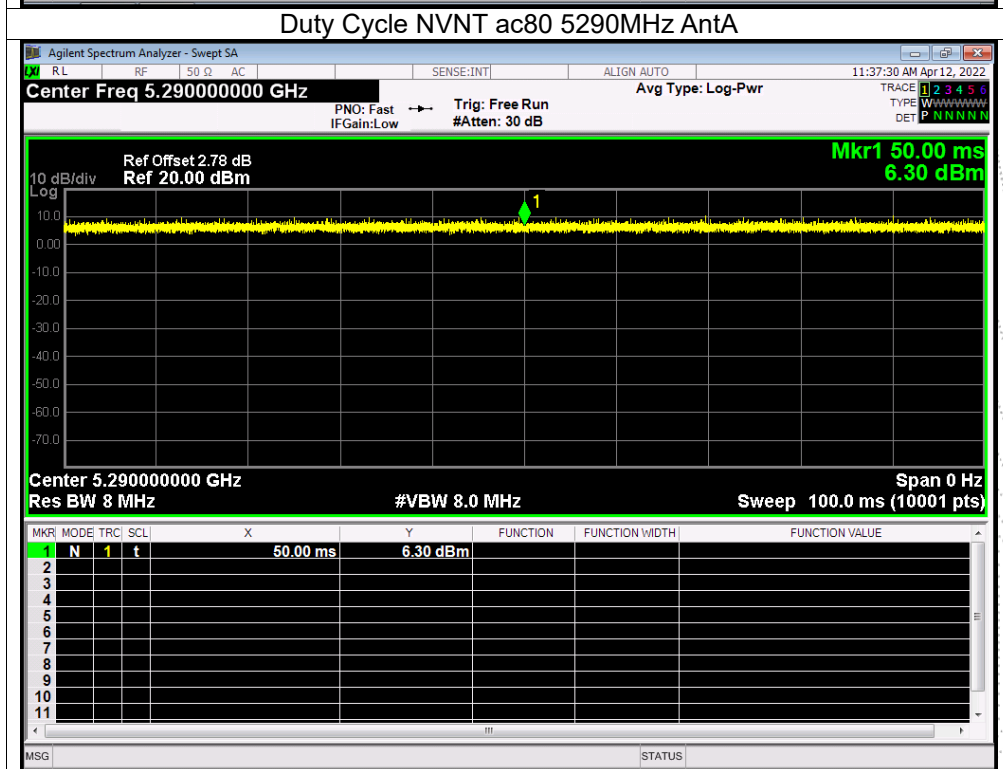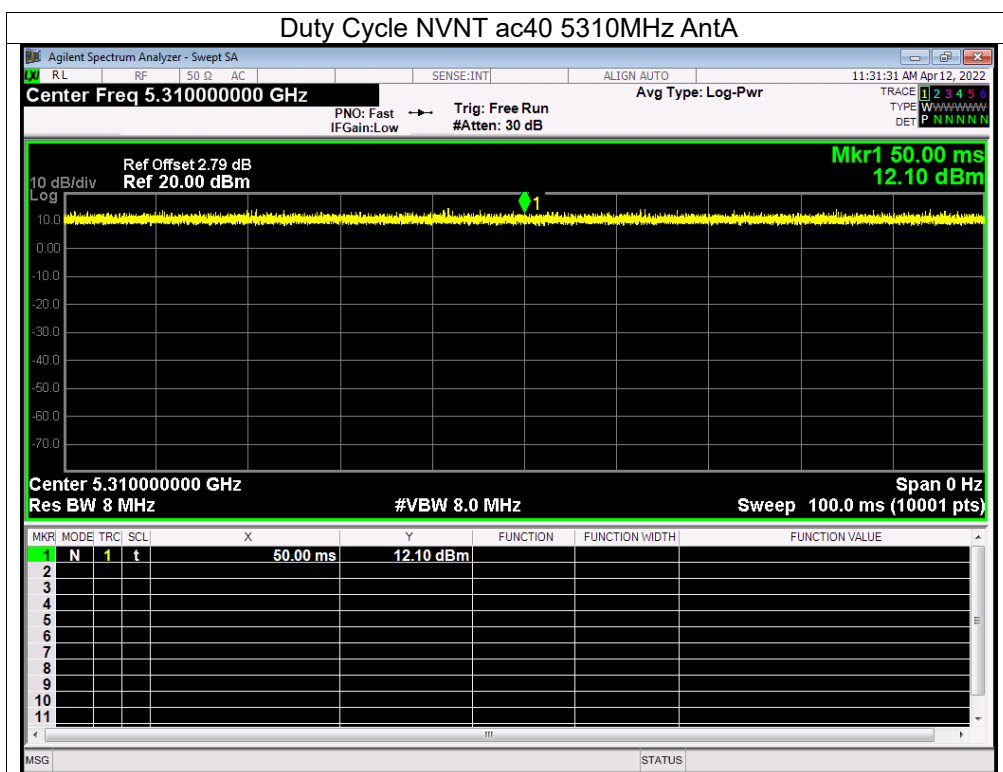

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	AntB	100	0	0
NVNT	a	5280	AntB	100	0	0
NVNT	a	5320	AntB	100	0	0
NVNT	n20	5260	AntB	100	0	0
NVNT	n20	5280	AntB	100	0	0
NVNT	n20	5320	AntB	100	0	0
NVNT	n40	5270	AntB	100	0	0
NVNT	n40	5310	AntB	100	0	0
NVNT	ac20	5260	AntB	100	0	0
NVNT	ac20	5280	AntB	100	0	0
NVNT	ac20	5320	AntB	100	0	0
NVNT	ac40	5270	AntB	100	0	0
NVNT	ac40	5310	AntB	100	0	0
NVNT	ac80	5290	AntB	100	0	0

