

TP-LINK®

Antenna Specification



Product Number: E4

Product Name: Antenna

TP-LINK®

COPYRIGHT & TRADEMARKS

Specifications are subject to change without notice. **TP-LINK®** is a registered trademark of TP-LINK TECHNOLOGIES CO., LTD. Other brands and product names are trademarks or registered trademarks of their respective holders.

No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK TECHNOLOGIES CO., LTD. Copyright © 2011 TP-LINK TECHNOLOGIES CO., LTD. All rights reserved.

<http://www.tp-link.com>

Product Number: E4

Product Name: Antenna

TP-LINK®

Specification For Approval

Date: _____

File No. : _____

Version: 1.0

Customer: _____ / _____

Customer P/N : _____ / _____

TP-LINK P/N: Printed Monopole Antenna

Description: E4-ANT

TP-LINK Checked By:
Customer Approved By:

TP-LINK®

TP-LINK TECHNOLOGIES CO., LTD.

South Buiding, No.5 Keyuan Road,
Central Zone, Science&Technology Park,
Nanshan, Shenzhen, P.R.China

TEL: + 86 755 26612350

+ 86 755 26504400

[http:// www.tp-link.com](http://www.tp-link.com)


Index

I. Specification	2
II. Characteristics and Reliability Test.....	错误!未定义书签。
III. Mechanical Drawing and Material Description	错误!未定义书签。
IV. RoHS Test Report	错误!未定义书签。
V. Antenna – S Parameter Test Data.....	3
VI. Antenna – Radiation Pattern Test Data	3
VII. Packing Drawing	错误!未定义书签。

I. Specification

Sample Photo	
A. Electrical Characteristics	
Frequency	2400~2500MHz&5150 ~ 5850MHz
Impedance	50 Ohm
S.W.R.	<= 2.0
Antenna Type	Monopole
Antenna Gain	1.5dBi@2.4-2.5GHz;1dBi@5.15-5.85GHz
Max Input Power	2 W
Polarization	Linear
Radiation pattern	Omni-Directional

II. Antenna – S Parameter Test Data

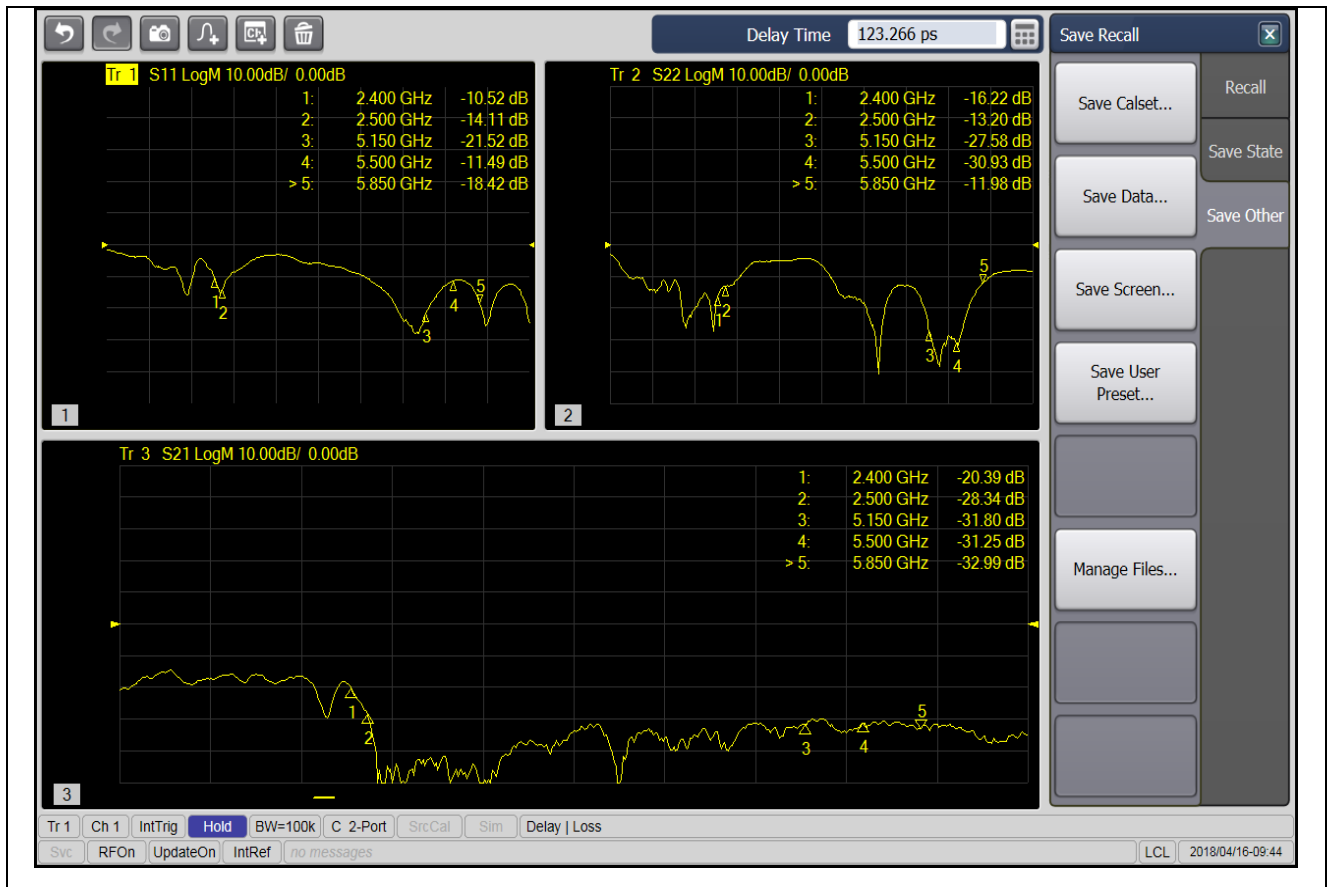

III. Antenna – Radiation Pattern Test Data

Testing Equipment Specification	
Microwave Chamber	Satimo SG24-S
Testing Equipment	Agilent 5071B

Product Number: E4


Product Name: Antenna



Freq (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
ANT1	1.44	1.37	1.31	1.29	1.33	1.47	1.44	1.26	1.25	1.36	1.49
ANT2	1.24	1.28	1.39	1.37	1.28	1.47	1.37	1.29	1.26	1.30	1.27

Freq. (MHz)	5150	5200	5250	5300	5350	5400	5450	5500
ANT1	0.75	0.77	0.89	0.80	0.75	0.71	0.68	0.95
ANT2	0.88	0.91	0.63	0.83	0.83	0.73	0.61	0.88
Freq. (MHz)	5550	5600	5650	5700	5750	5800	5850	
ANT1	0.62	0.84	0.70	0.82	0.68	0.76	0.78	
ANT2	0.60	0.94	0.72	0.93	0.67	0.96	0.75	

Theta=90° (2400-2500MHz)

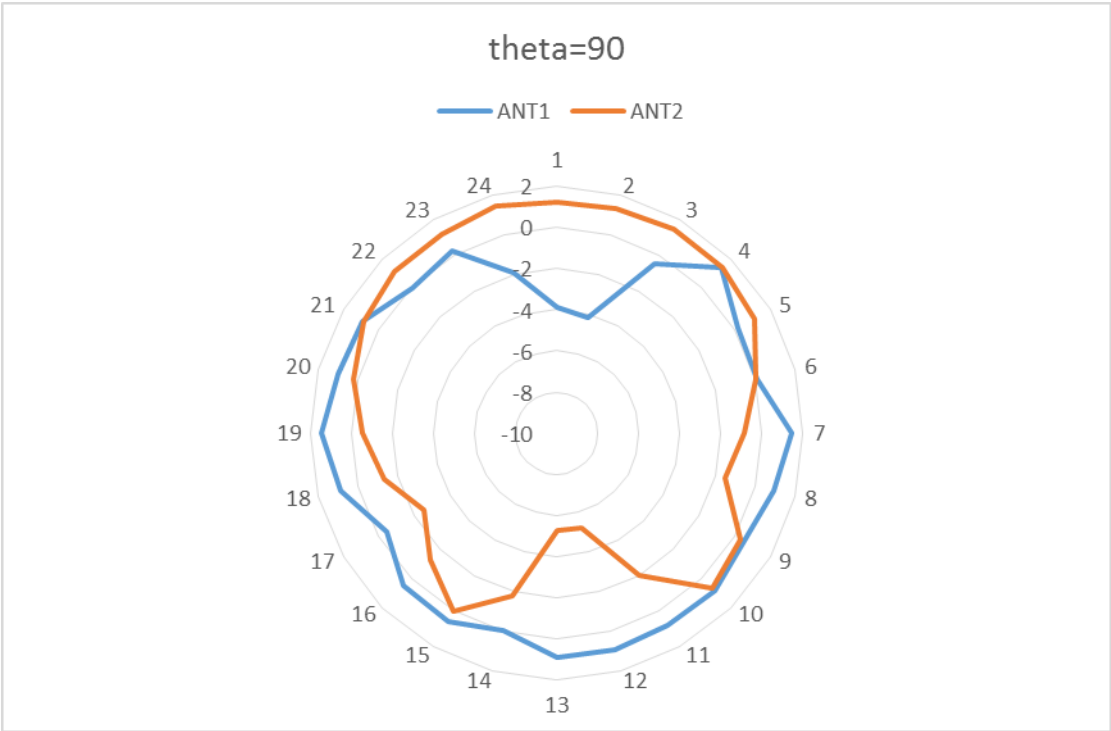

Theta=90° (5150-5850MHz)

