



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.org.cn

TEST REPORT

Report No.	CTC20211260E07
FCC ID	2AYD5-I21M02
Applicant	Imin Technology Pte Ltd
Address.....	11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943
Manufacturer.....	Imin Technology Pte Ltd
Address.....	11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943
Product Name	Mobile POS
Trade Mark.....	iMin
Model/Type reference.....	I21M02
Listed Model(s)	N/A
Standard	FCC CFR47 PART 22H, 24E, 27L
Date of receipt of test sample:.	Jul. 20, 2021
Date of testing.....	Jul. 21, 2021 ~ Aug. 13, 2021
Date of issue.....	Aug. 26, 2021
Result	PASS

Compiled by:

(Printed name+signature) Terry Su

Supervised by:

(Printed name+signature) Miller Ma

Approved by:

(Printed name+signature) Walter Chen

Testing Laboratory Name....: **CTC Laboratories, Inc.**

Address..... 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park,
Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

**Table of Contents**

	Page
1. SUMMARY.....	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION.....	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY.....	6
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION.....	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT.....	8
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	9
2.4. MEASUREMENT INSTRUMENTS LIST	10
3. TEST ITEM AND RESULTS.....	12
3.1. CONDUCTED OUTPUT POWER	12
3.2. PEAK-TO-AVERAGE RATIO	15
3.3. OCCUPY BANDWIDTH.....	30
3.4. OUT OF BAND EMISSIONS	36
3.5. BAND EDGE COMPLIANCE	85
3.6. RADIATED POWER MEASUREMENT	91
3.7. RADIATED SPURIOUS EMISSION.....	95
3.8. FREQUENCY STABILITY	102

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



1. SUMMARY

1.1. Test Standards

[FCC Rules Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[FCC Rules Part 22](#): PRIVATE LAND MOBILE RADIO SERVICES.

[FCC Rules Part 24](#): PUBLIC MOBILE SERVICES

[FCC Rules Part 27](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[TIA/EIA 603 E March 2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26: 2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB 971168 D01 Power Meas License Digital Systems v03](#): MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus.

[RSS-132 Issue 3](#): Cellular Telephone Systems Operating in the Bands 824-849MHz and 869-894MHz.

[RSS-133 Issue 6](#): 2 GHz Personal Communications Services.

1.2. Report version

Revised No.	Date of issue	Description
01	Aug. 14, 2021	Original
02	Aug. 23, 2021	Update application, manufacturer address
03	Aug. 26, 2021	Increase the trademark

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



1.3. Test Description

Test Item	Section in CFR 47	RSS Rule	Result	Test Engineer
Conducted Output Power	Part 2.1046 Part 22.913(a) Part 24.232(c) Part 27.50	RSS-132(5.4) RSS-133(6.4)	Pass	Alicia Liu
Peak-to-Average Ratio	Part 24.232 Part 27.50	RSS-132(5.4) RSS-133(6.4)	Pass	Alicia Liu
99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53	RSS-GEN(6.6) RSS-133(6.5)	Pass	Alicia Liu
Band Edge	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	RSS-132(5.5) RSS-133(6.5)	Pass	Alicia Liu
Conducted Spurious Emissions	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	RSS-132(5.5) RSS-133(6.5)	Pass	Alicia Liu
Frequency stability vs temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54	RSS-GEN(6.11) RSS-132(5.3)	Pass	Alicia Liu
Frequency stability vs voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54	RSS-GEN(6.11) RSS-132(5.3)	Pass	Alicia Liu
ERP and EIRP	Part 22.913(a) Part 24.232(b) Part 27.50	RSS-132(5.4) RSS-133(6.4)	Pass	Alicia Liu
Radiated Spurious Emissions	Part 2.1053 Part 22.917 Part 24.238 Part 27.53	RSS-132(5.5) RSS-133(6.5)	Pass	Alicia Liu

Note: The measurement uncertainty is not included in the test result.

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, Part 22, Part 24, Part 27, and Part 90, FCC KDB 971168 D01 v03r01/ D02 v02r01, KDB 412172 D01 v01r01, ANSI C63.26:2015, IC RSS-132, RSS-133 and RSS-139.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation. Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025:2017 General Requirements) to the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC)Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTC Laboratories, Inc. is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	20°C-25°C
Relative Humidity:	50 %-55 %
Air Pressure:	101kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Imin Technology Pte Ltd
Address:	11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943
Manufacturer:	Imin Technology Pte Ltd
Address:	11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943

CTC Laboratories, Inc.
1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



2.2. General Description of EUT

Product Name:	Mobile POS
Trade Mark:	iMin
Model/Type reference:	I21M02
Listed Model(s):	N/A
Power supply:	5Vdc/2A from AC/DC Adapter 7.4Vdc from 2600mAh Li-ion Battery
Adapter model:	TPA-46050200UU Input:100-240V~ 50/60Hz 0.3A Output: 5Vdc/2A
Hardware version:	N/A
Software version:	N/A
GSM	
Operation Band:	GSM 850: UL: 824MHz~849MHz, DL: 869MHz~894MHz PCS 1900: UL: 1850MHz~1910, DL: 1930MHz~1990MHz
Supported Type:	GSM/GPRS/EGPRS
Modulation Type:	GMSK for GSM/GPRS, 8PSK for EGPRS
Antenna Type:	FPC Antenna
Antenna Gain:	Main Antenna: GSM 850: 0.6dBi PCS 1900: 0.5dBi
WCDMA	
Operation Band:	Band II: UL: 1852.4MHz~1907.6MHz, DL: 1932.6MHz~1987.4MHz Band V: UL: 826.4MHz~846.6MHz, DL: 871.6MHz~1891.4MHz
Modulation Type:	QPSK for WCDMA/HSUPA/HSDPA
Antenna Type:	FPC Antenna
Antenna Gain:	Main Antenna: WCDMA II: 0.5dBi WCDMA V: 0.6dBi

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



2.3. Description of Test Modes and Test Frequency

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing.

Test Frequency:

GSM 850		PCS 1900	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20
190	836.60	661	1880.00
251	848.80	810	1909.80

WCDMA Band II		WCDMA Band V	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
9262	1852.40	4132	826.40
9400	1880.00	4183	836.60
9538	1907.60	4233	846.60

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



2.4. Measurement Instruments List

Output Power (Radiated) & Radiated Spurious Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100967	Dec. 25, 2021
2	High pass filter	Compliance Direction systems	BSU-6	34202	Dec. 25, 2021
3	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4180	Dec. 25, 2021
4	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4181	Dec. 25, 2021
5	Spectrum Analyzer	HP	8563E	02052	Dec. 25, 2021
6	Horn Antenna	Schwarzbeck	BBHA 9120D	648	Dec. 25, 2021
7	Horn Antenna	Schwarzbeck	BBHA 9120D	649	Dec. 25, 2021
8	Ultra-Broadband Antenna	ShwarzBeck	BBHA9170	25841	Dec. 25, 2021
9	Ultra-Broadband Antenna	ShwarzBeck	BBHA9170	25842	Dec. 25, 2021
10	Pre-Amplifier	HP	8447D	1937A03050	Dec. 25, 2021
11	Pre-Amplifier	EMCI	EMC051835	980075	Dec. 25, 2021
12	Splitter	Mini-Circuit	ZAPD-4	400059	Dec. 25, 2021
13	Signal Generator	Agilent	N5182A	1019356	Dec. 25, 2021
14	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec. 25, 2021
15	Antenna Mast	UC	UC3000	N/A	N/A
16	Antenna mast	MATURO	TAM-4.0-P	N/A	N/A
17	Turn Table	UC	UC3000	N/A	N/A
18	Cable Below 1GHz	Schwarzbeck	AK9515E	33155	Dec. 25, 2021
19	Cable Above 1GHz	Hubersuhner	SUCOFLEX102	DA1580	Dec. 25, 2021

Output Power(Conducted) & Occupied Bandwidth & Emission Bandwidth & Band Edge Compliance & Conducted Spurious Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec. 25, 2021
2	Spectrum Analyzer	Rohde & Schwarz	FSU	100105	Dec. 25, 2021
3	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Mar. 15, 2022
4	Splitter	Mini-Circuit	ZAPD-4	400059	Dec. 25, 2021
5	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	Dec. 25, 2021
6	RF Connection Cable	Chengdu E-Microwave	---	---	Dec. 25, 2021
7	Attenuator	Chengdu E-Microwave	EMCAXX-10RNZ-3	---	Dec. 25, 2021

Frequency Stability					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec. 25, 2021
2	Spectrum Analyzer	Rohde & Schwarz	FSU	100105	Dec. 25, 2021

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



3	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Mar. 15, 2022
4	Splitter	Mini-Circuit	ZAPD-4	400059	Dec. 25, 2021
5	Climate Chamber	ESPEC	EL-10KA	05107008	Dec. 25, 2021

Note: 1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

3. TEST ITEM AND RESULTS


3.1. Conducted Output Power

LIMIT

FCC: §2.1046, §22.913, §24.232, §27.50 and §90.635

IC: RSS132§5.4; RSS133§6.4 and RSS139§6.5.

TEST CONFIGURATION

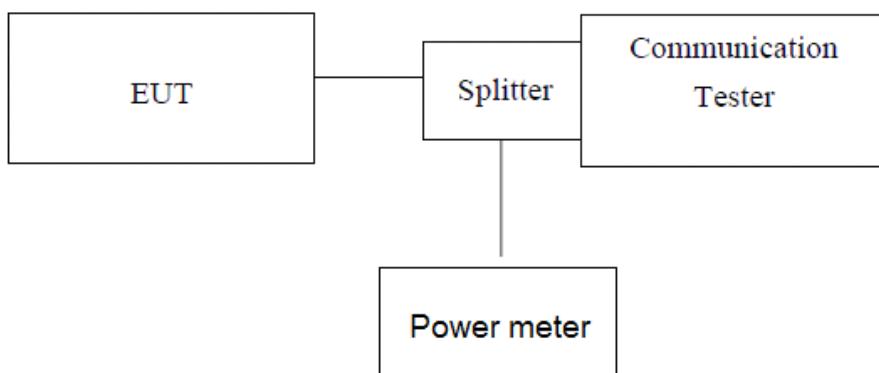

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure the maximum PK burst power and maximum Avg. burst power.

TEST RESULTS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



GSM850		Conducted Power (dBm)		
		CH128	CH190	CH251
		824.20MHz	836.60MHz	848.80MHz
GSM		34.14	34.33	34.45
GPRS (GMSK)	1TXslot	34.08	34.20	34.33
	2TXslots	31.79	31.96	32.07
	3TXslots	29.78	29.95	30.08
	4TXslots	27.31	27.48	27.64
EGPRS (8PSK)	1TXslot	28.47	28.02	27.93
	2TXslots	28.25	27.91	27.81
	3TXslots	28.09	27.73	27.67
	4TXslots	27.85	27.52	27.49

GSM1900		Conducted Power (dBm)		
		CH512	CH661	CH810
		1850.2MHz	1880.0MHz	1909.8MHz
GSM		29.45	29.67	29.74
GPRS (GMSK)	1TXslot	29.22	29.70	29.72
	2TXslots	27.01	27.01	26.92
	3TXslots	25.39	25.41	25.33
	4TXslots	23.39	23.37	23.28
EGPRS (8PSK)	1TXslot	27.76	27.59	24.44
	2TXslots	27.62	27.51	24.36
	3TXslots	27.53	27.44	24.22
	4TXslots	27.42	27.34	24.11

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



WCDMA Band II		Conducted Power (dBm)		
		CH9262	CH9400	CH9538
		1852.40	1880.00	1907.60
AMR 12.2K		22.25	22.36	22.70
RMC 12.2K		22.31	22.26	22.23
HSDPA	Subtest-1	22.30	22.40	22.66
	Subtest-2	22.29	22.39	22.65
	Subtest-3	22.27	22.38	22.65
	Subtest-4	22.28	22.39	22.65
HSUPA	Subtest-1	22.31	22.41	22.53
	Subtest-2	22.15	22.46	22.54
	Subtest-3	22.26	22.39	22.46
	Subtest-4	22.24	22.34	22.63
	Subtest-5	22.10	22.50	22.44

WCDMA Band V		Conducted Power (dBm)		
		CH4132	CH4183	CH4233
		826.40	836.60	846.60
AMR 12.2K		21.79	21.76	21.78
RMC 12.2K		21.66	21.69	21.71
HSDPA	Subtest-1	21.27	21.27	21.27
	Subtest-2	21.23	21.22	21.22
	Subtest-3	21.09	21.08	21.08
	Subtest-4	21.02	21.01	21.04
HSUPA	Subtest-1	21.22	21.11	21.21
	Subtest-2	21.06	21.03	21.32
	Subtest-3	21.26	21.16	21.20
	Subtest-4	21.19	21.25	21.06
	Subtest-5	21.21	21.23	21.11

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn


3.2. Peak-to-Average Ratio

LIMIT

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.

TEST CONFIGURATION

- For Peak-to-Average Ratio

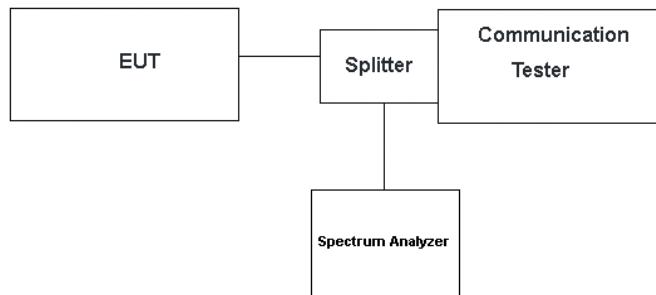

TEST PROCEDURE

- For Peak-to-Average Ratio
1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
 2. The EUT was connected to spectrum and communication tester via a splitter
 3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyser.
 4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
 6. Record the deviation as Peak to Average Ratio.

TEST RESULTS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



EUT Mode	Channel	Frequency (MHz)	Peak-to-Average Ratio(dB)	Limit (dB)	Result
GSM 850 GSM	128	824.20	9.65	13	PASS
	190	836.60	9.29	13	
	251	848.80	9.71	13	
GSM 850 GPRS	128	824.20	9.71	13	PASS
	190	836.60	9.74	13	
	251	848.80	9.78	13	
GSM 850 EGPRS	128	824.20	11.67	13	PASS
	190	836.60	11.99	13	
	251	848.80	11.96	13	
PCS 1900 GSM	512	1850.20	9.39	13	PASS
	661	1880.00	9.36	13	
	810	1909.80	9.36	13	
PCS 1900 GPRS	512	1850.20	9.78	13	PASS
	661	1880.00	9.84	13	
	810	1909.80	9.81	13	
PCS 1900 EGPRS	512	1850.20	11.41	13	PASS
	661	1880.00	11.89	13	
	810	1909.80	11.89	13	

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



EUT Mode	Channel	Frequency (MHz)	Peak-to-Average Ratio(dB)	Limit (dB)	Result
WCDMA Band II WCDMA	9262	1852.40	2.03	13	PASS
	9400	1880.00	1.88	13	
	9538	1907.60	2.52	13	
WCDMA Band II HSDPA	9262	1852.40	2.09	13	PASS
	9400	1880.00	1.80	13	
	9538	1907.60	2.52	13	
WCDMA Band II HSUPA	9262	1852.40	5.48	13	PASS
	9400	1880.00	4.00	13	
	9538	1907.60	4.41	13	
WCDMA Band V WCDMA	4132	826.40	8.53	13	PASS
	4183	836.60	8.46	13	
	4233	846.60	8.46	13	
WCDMA Band V HSDPA	4132	826.40	8.49	13	PASS
	4183	836.60	8.46	13	
	4233	846.60	8.46	13	
WCDMA Band V HSUPA	4132	826.40	4.52	13	PASS
	4183	836.60	4.97	13	
	4233	846.60	4.55	13	


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

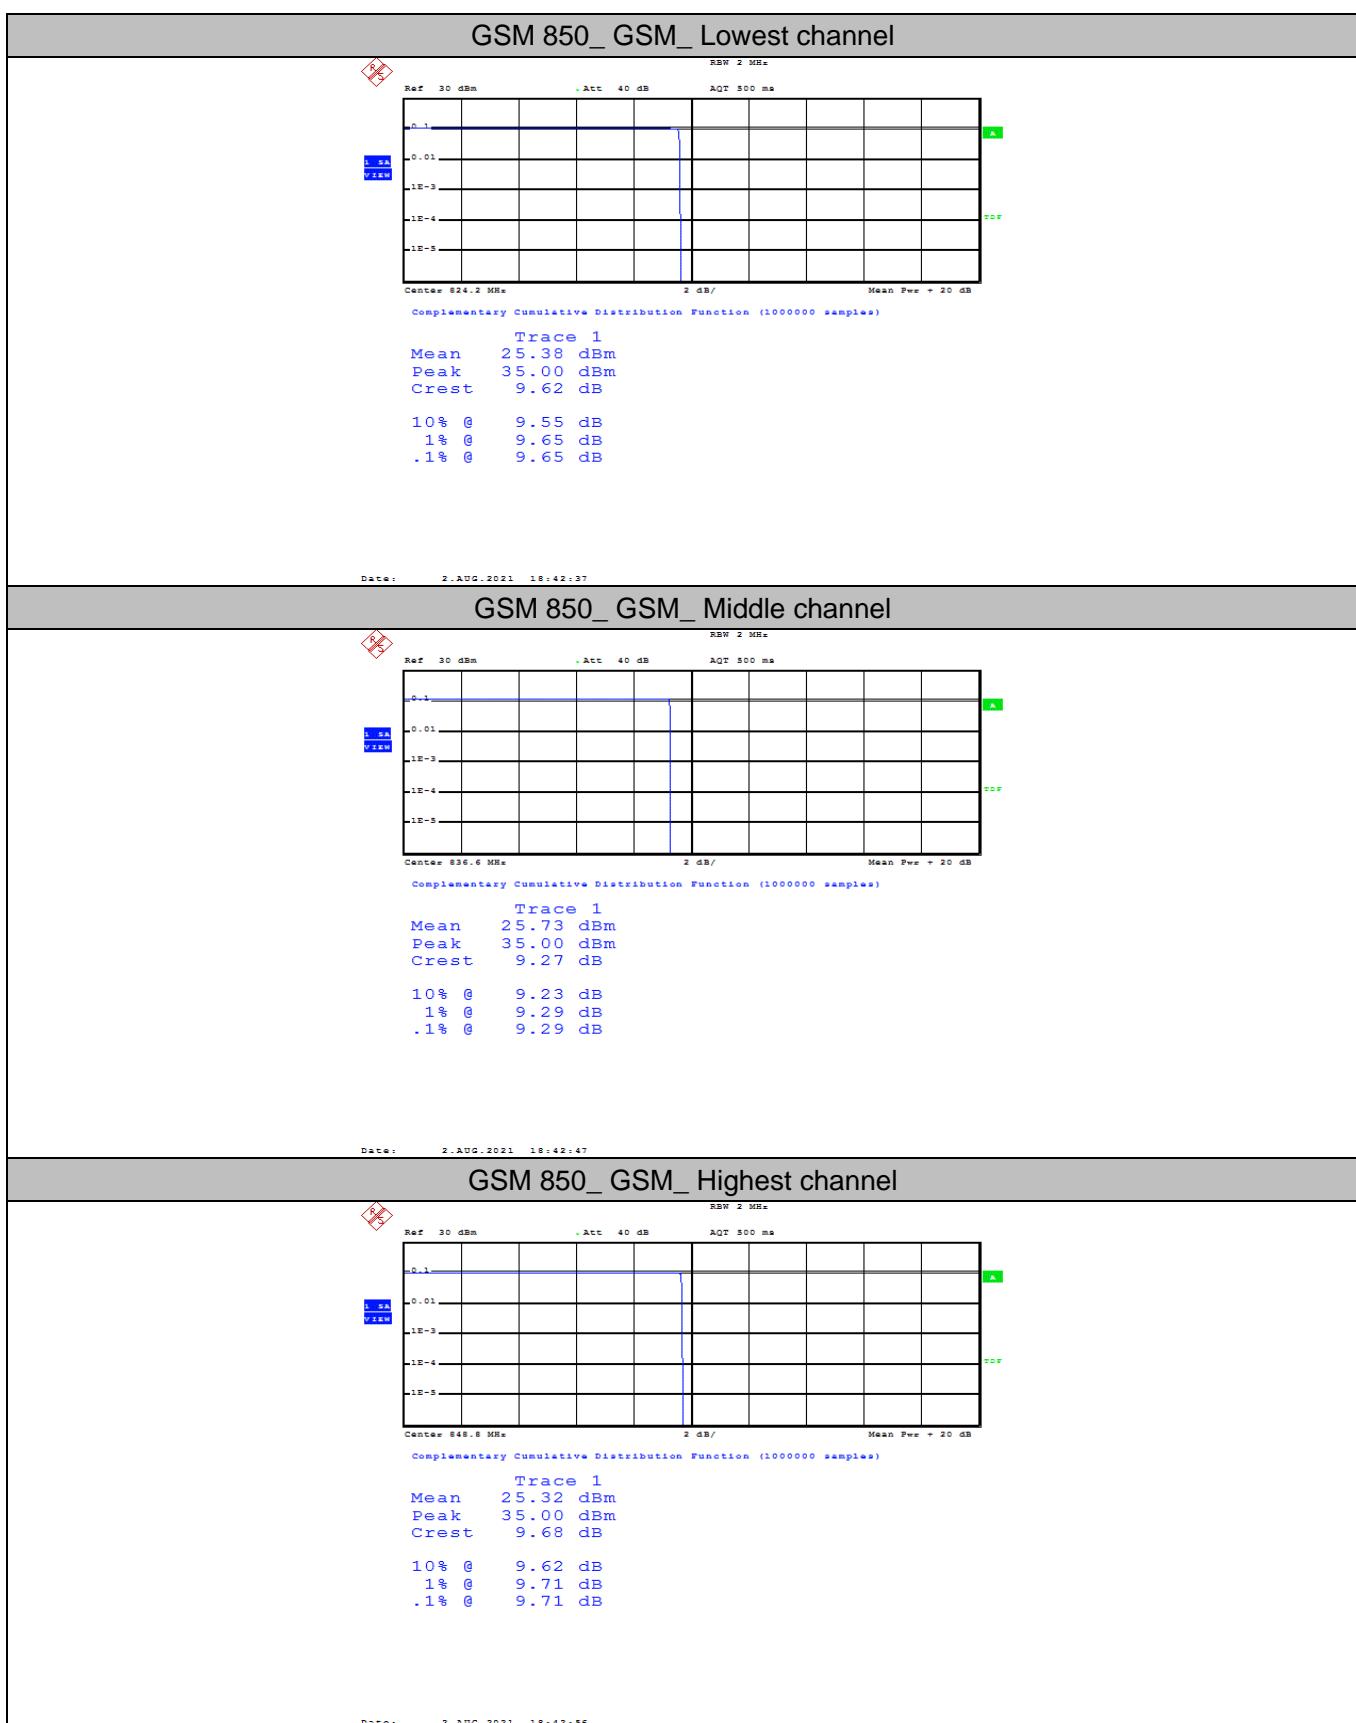




GSM 850_GPRS_Lowest channel

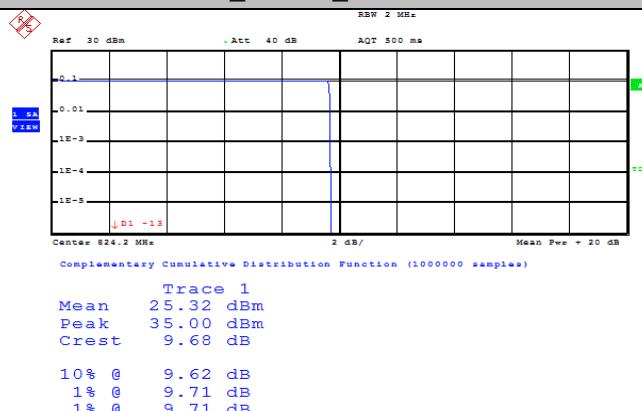


Date: 2.AUG.2021 18:54:42

GSM 850_GPRS_Middle channel

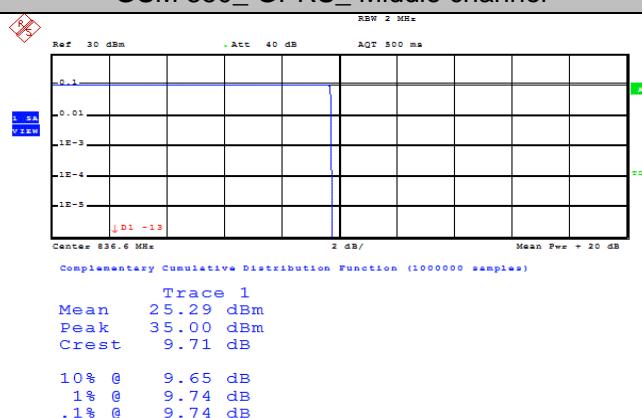

Date: 2.AUG.2021 18:54:52


GSM 850_GPRS_Highest channel

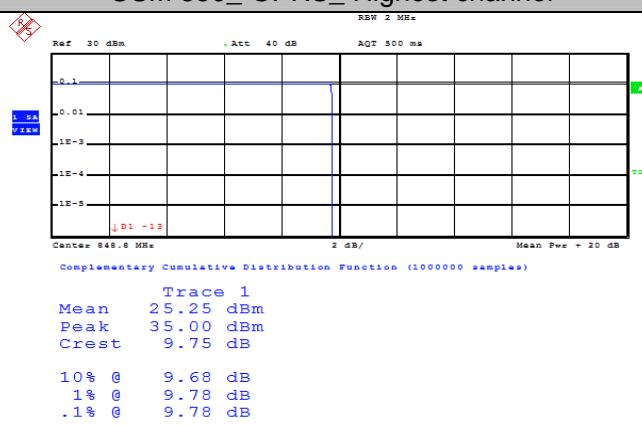



Date: 2.AUG.2021 18:55:03


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

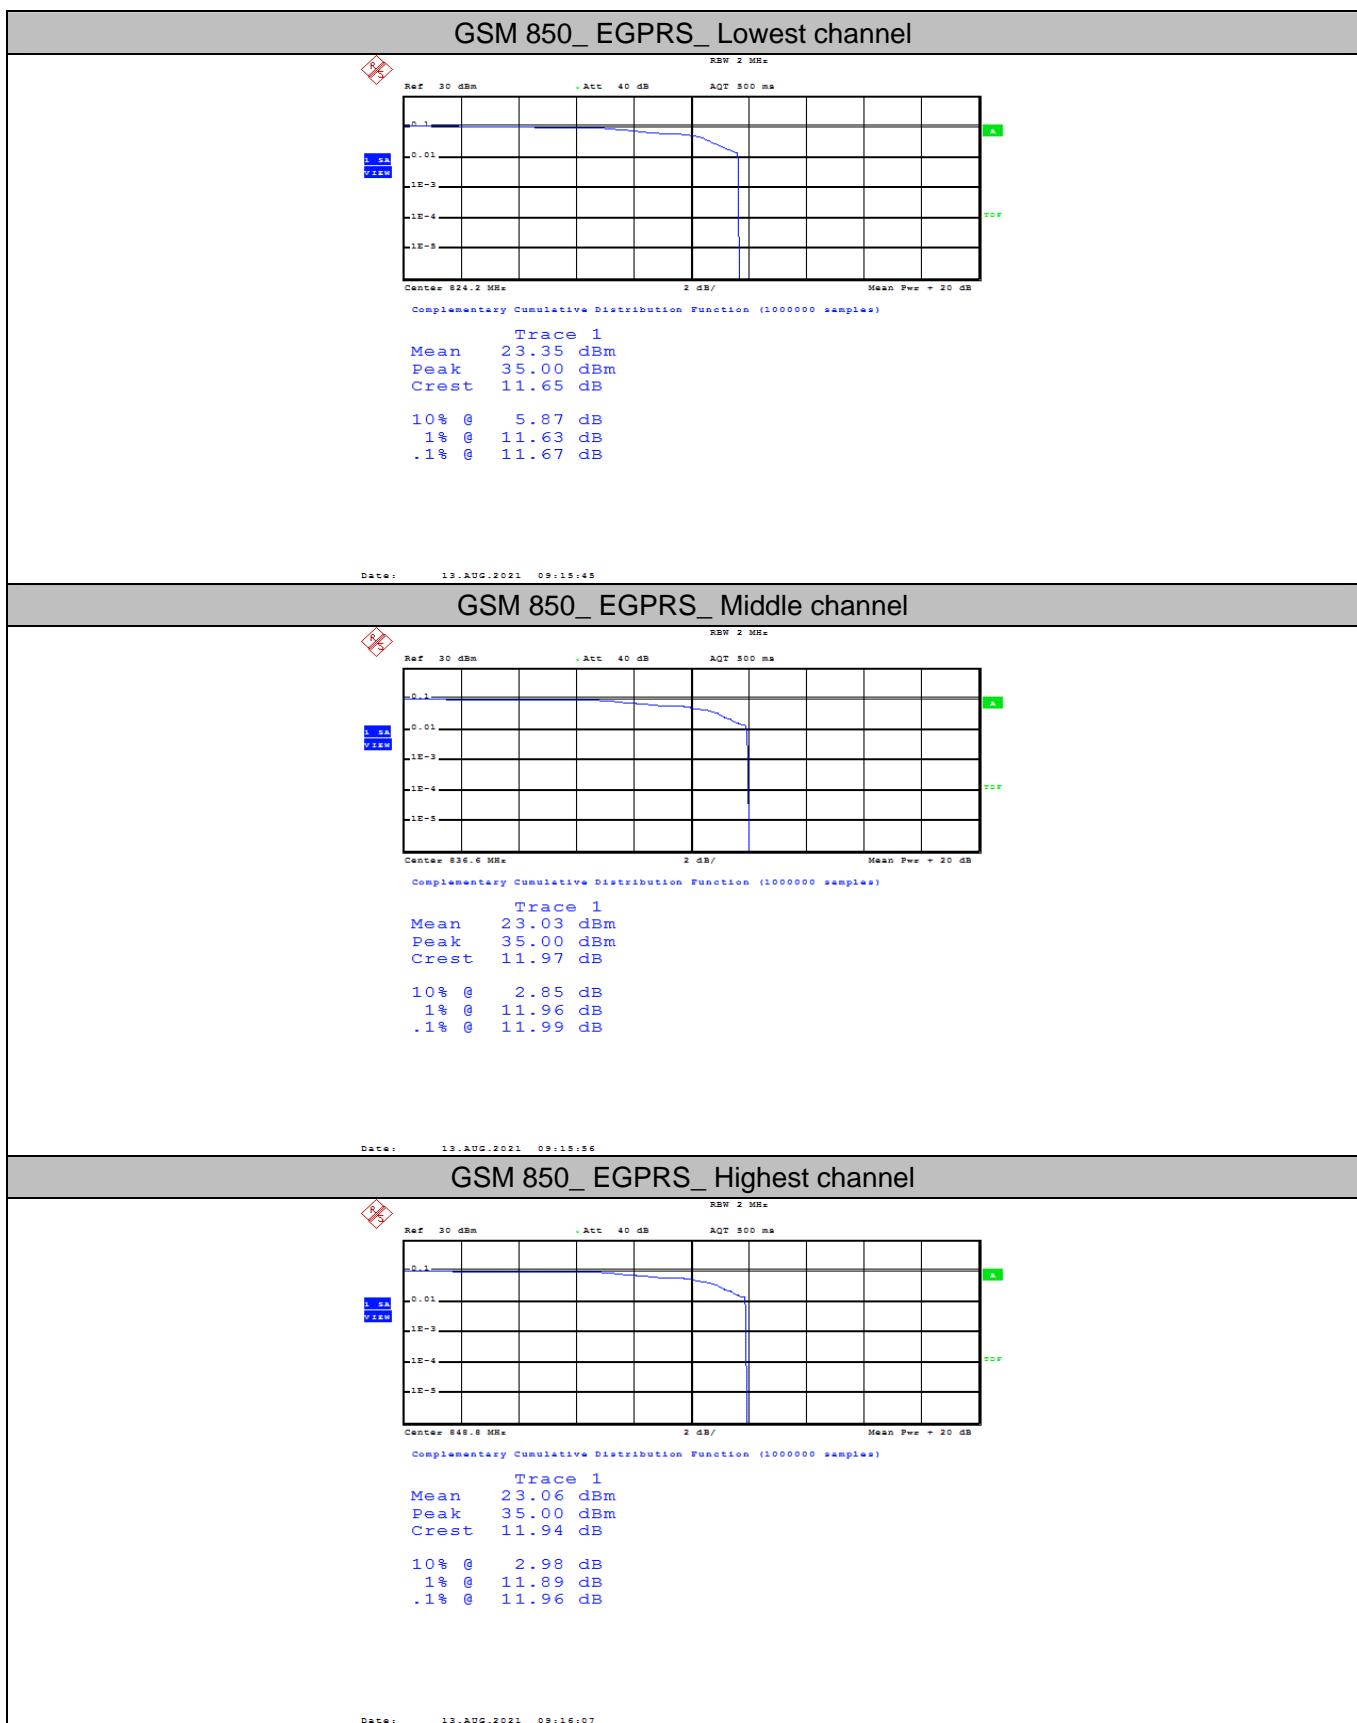


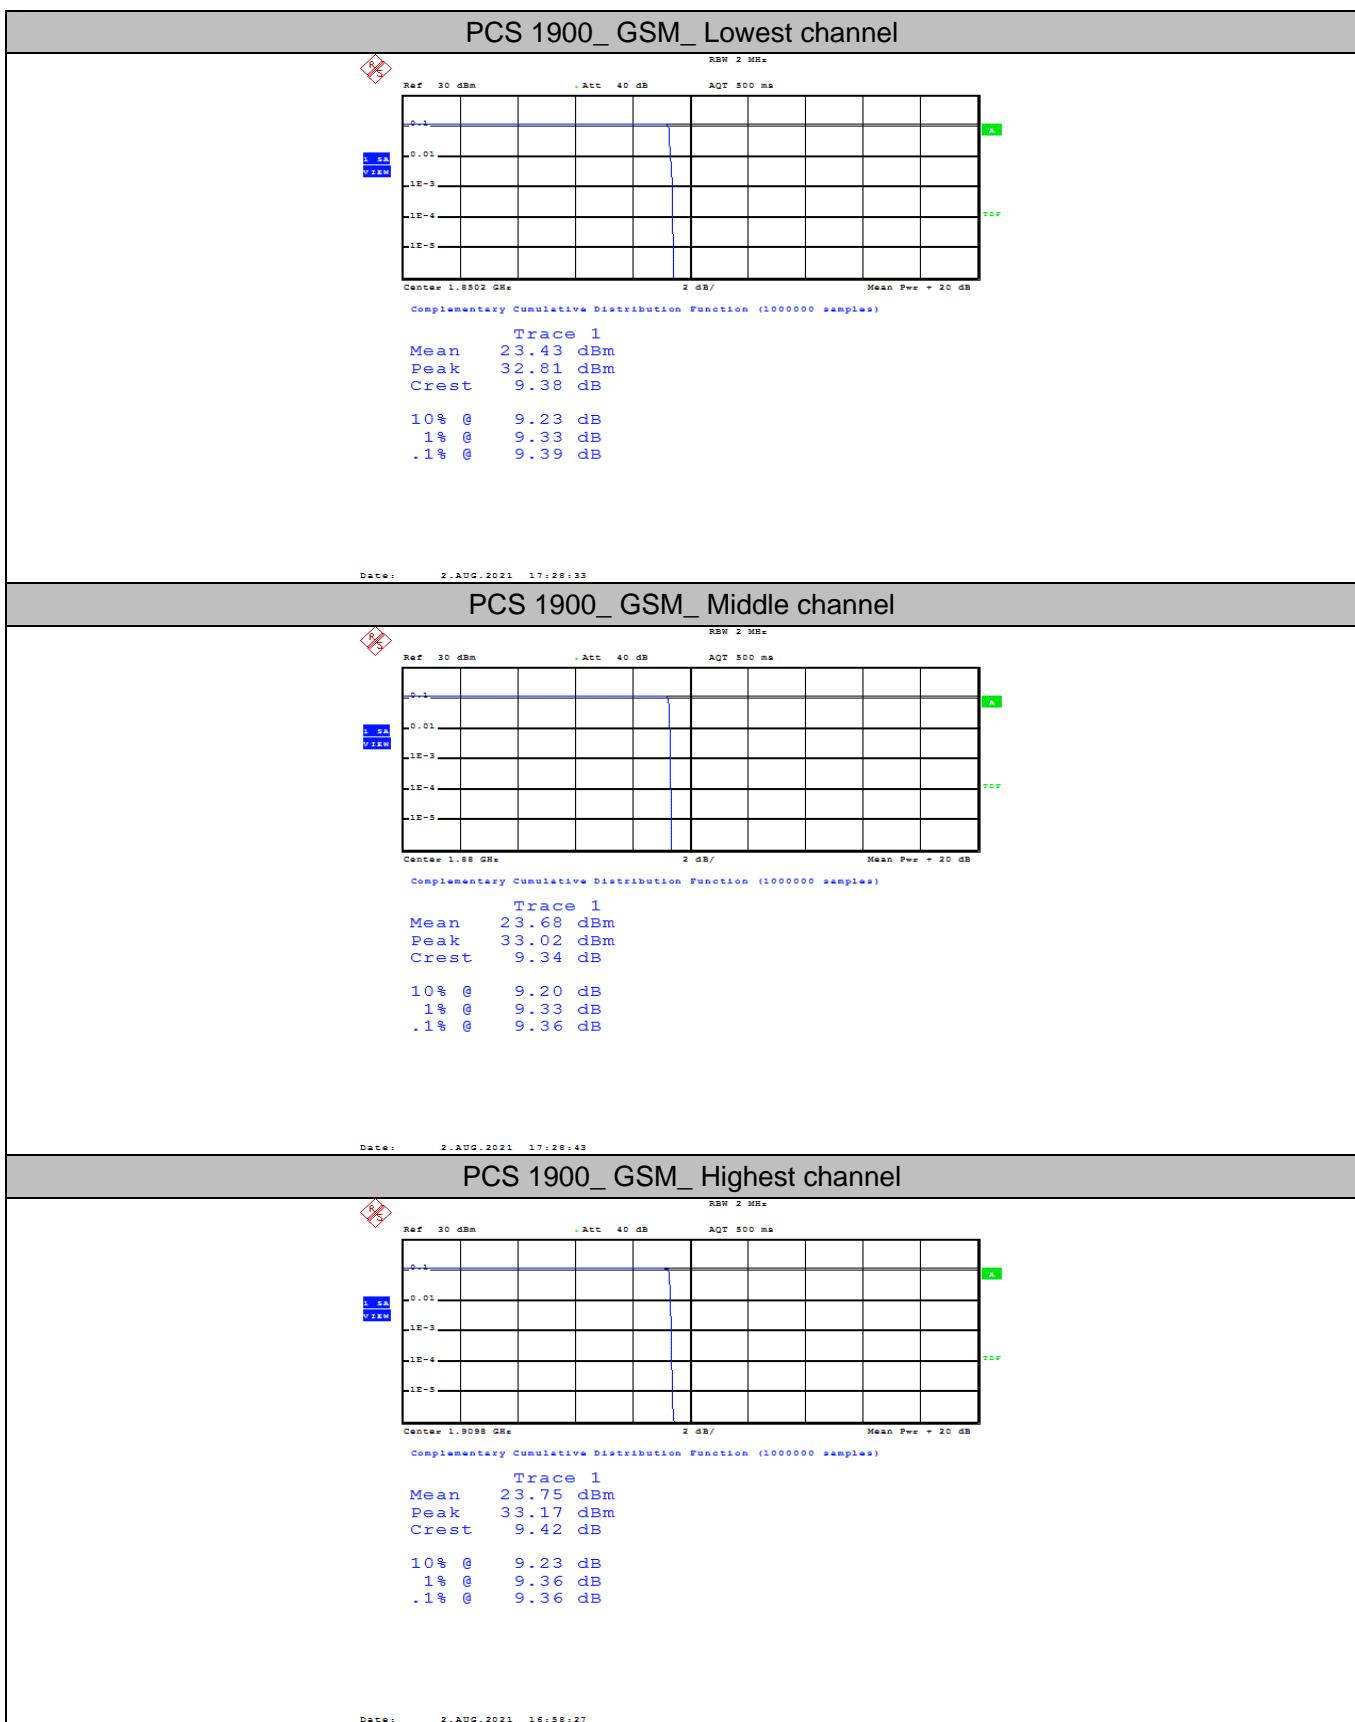

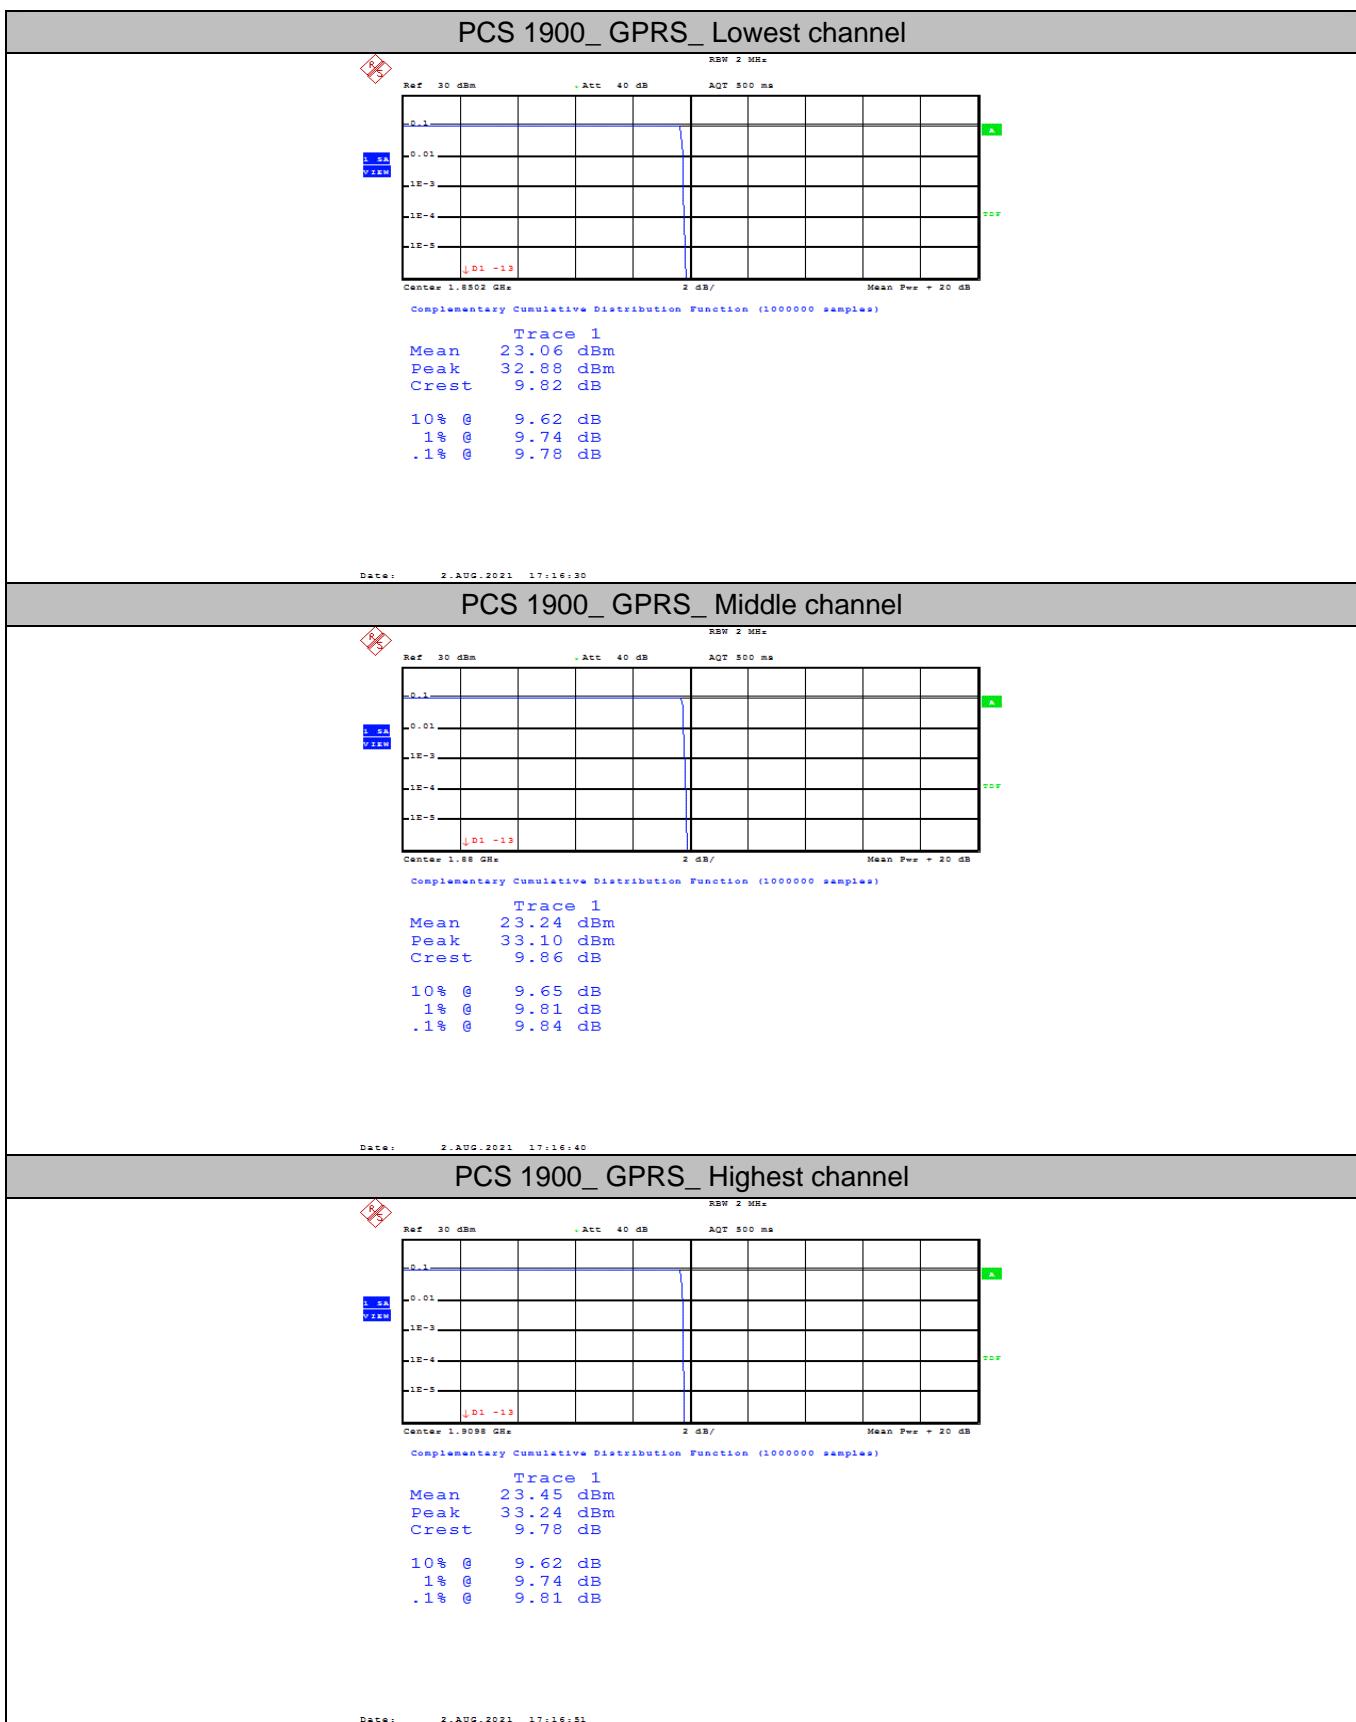


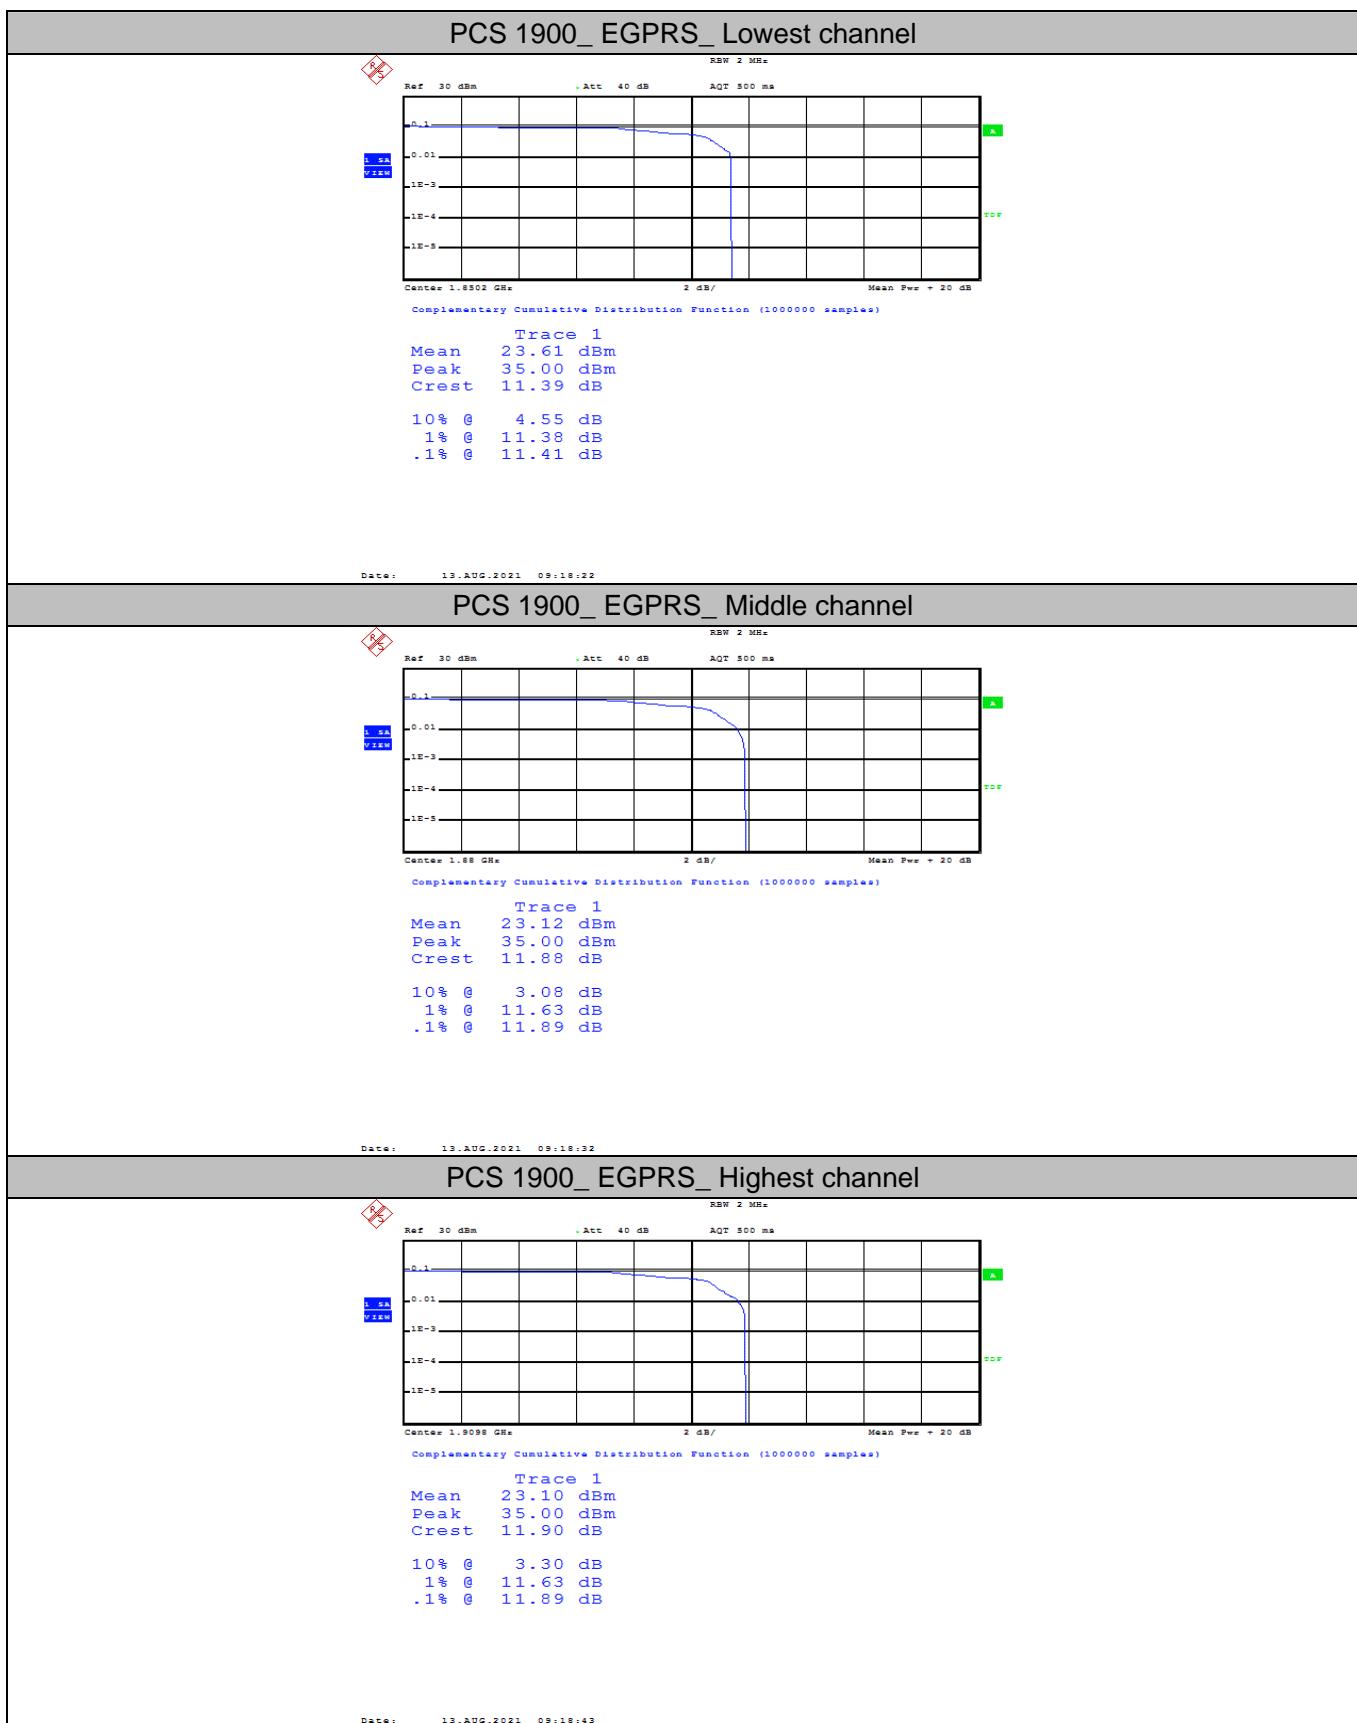


WCDMA Band II_ WCDMA_ Lowest channel

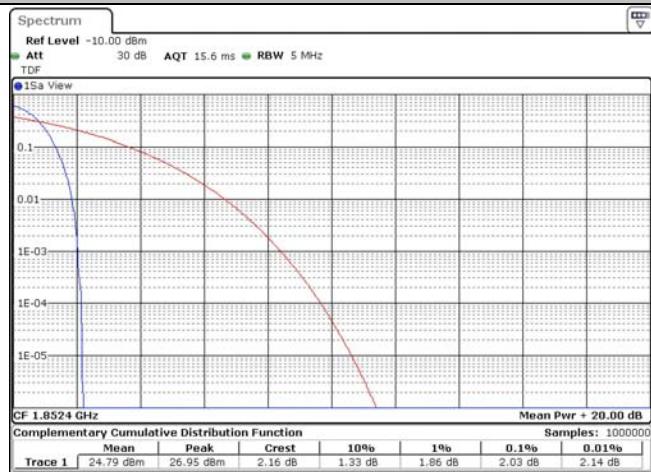

WCDMA Band II_ WCDMA_ Middle channel

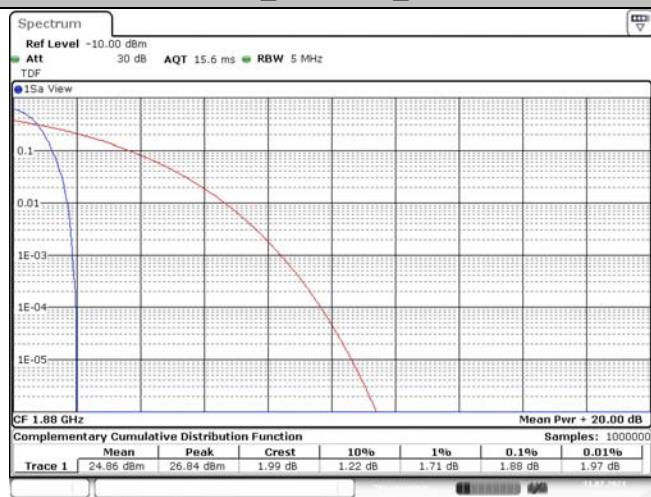

WCDMA Band II_ WCDMA_ Highest channel

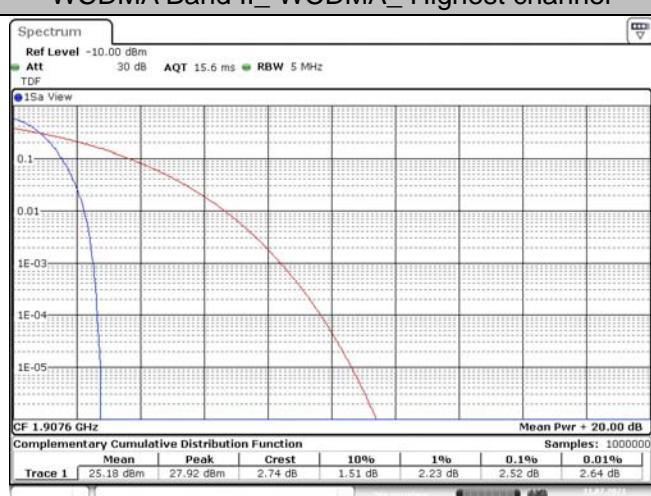


CTC Laboratories, Inc.

 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



WCDMA Band II_ HSDPA_ Lowest channel

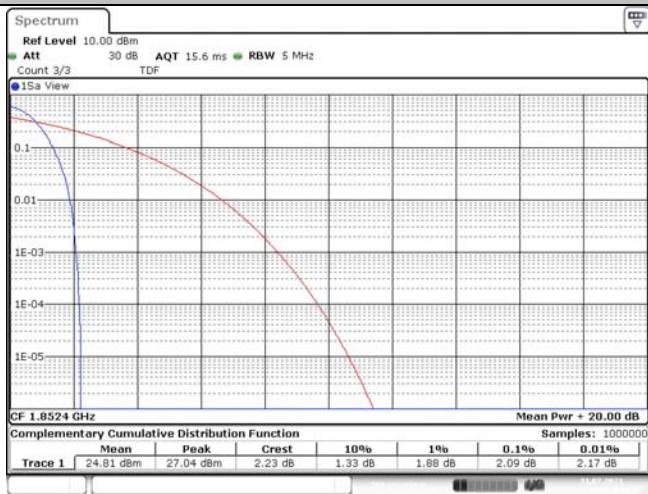

WCDMA Band II_ HSDPA_ Middle channel



WCDMA Band II_ HSDPA_ Highest channel




CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




WCDMA Band II_ HSUPA_ Lowest channel

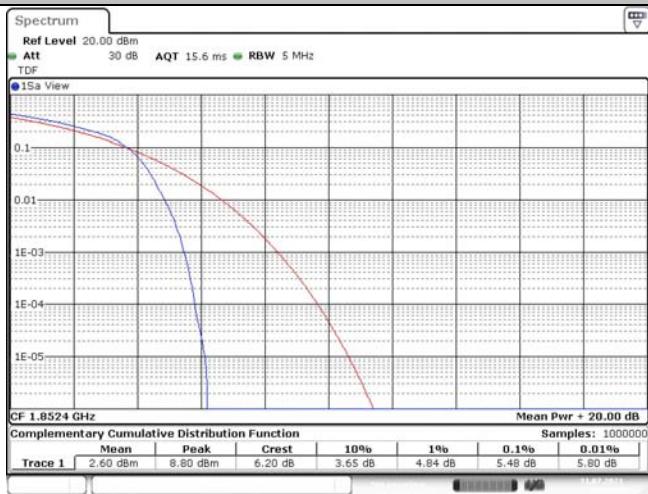

WCDMA Band II_ HSUPA_ Middle channel





WCDMA Band II_ HSUPA_ Highest channel

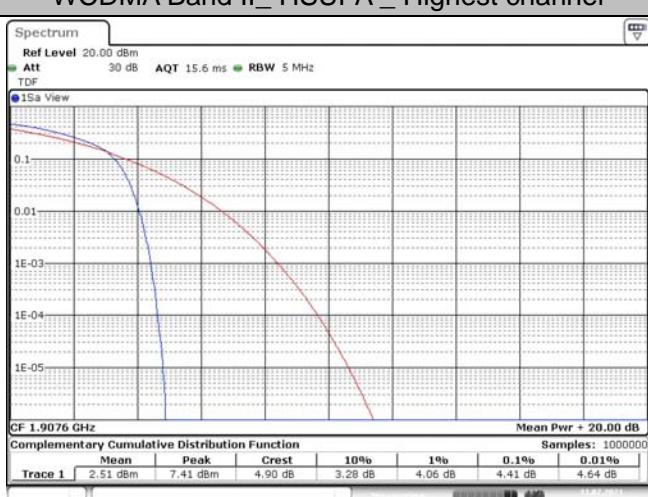


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

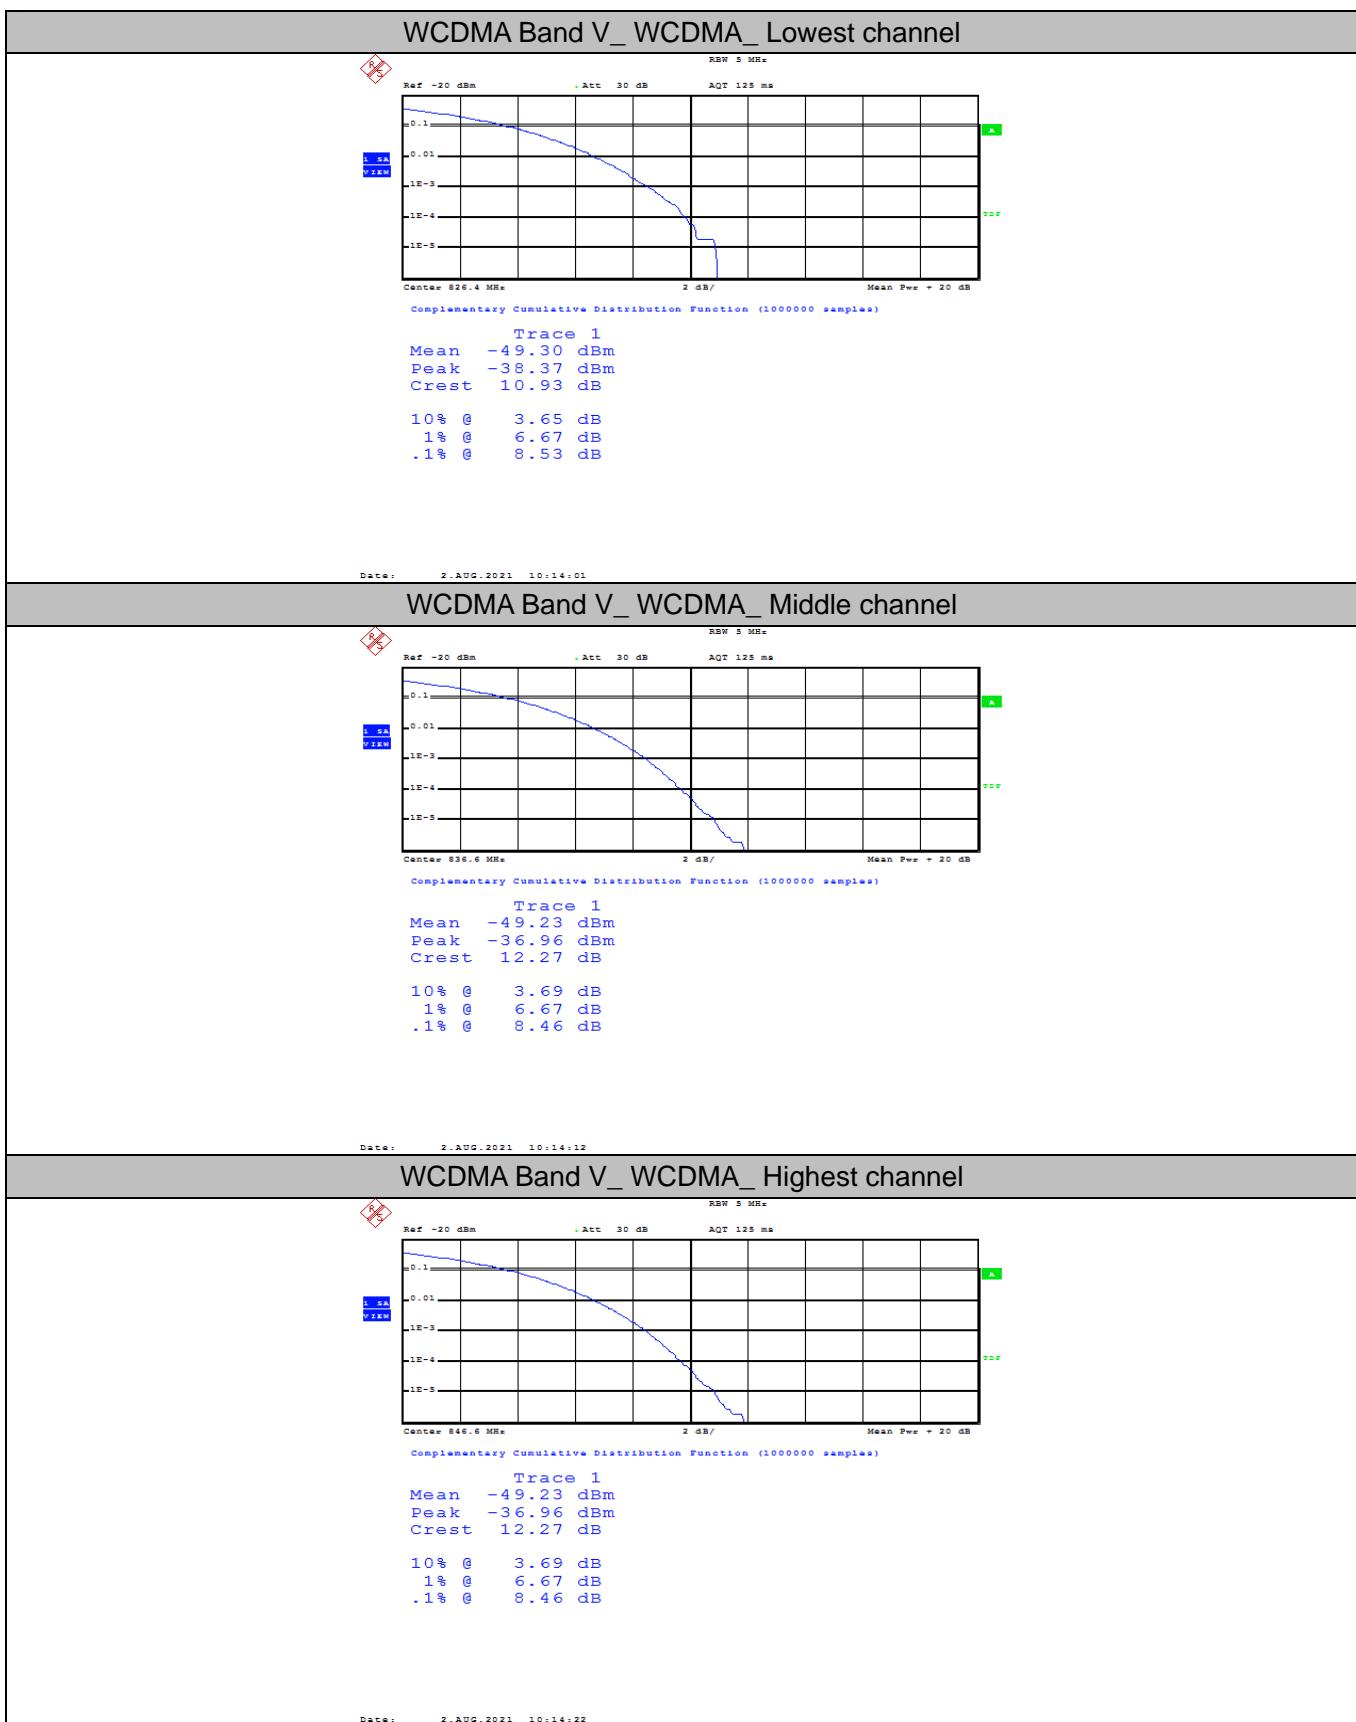

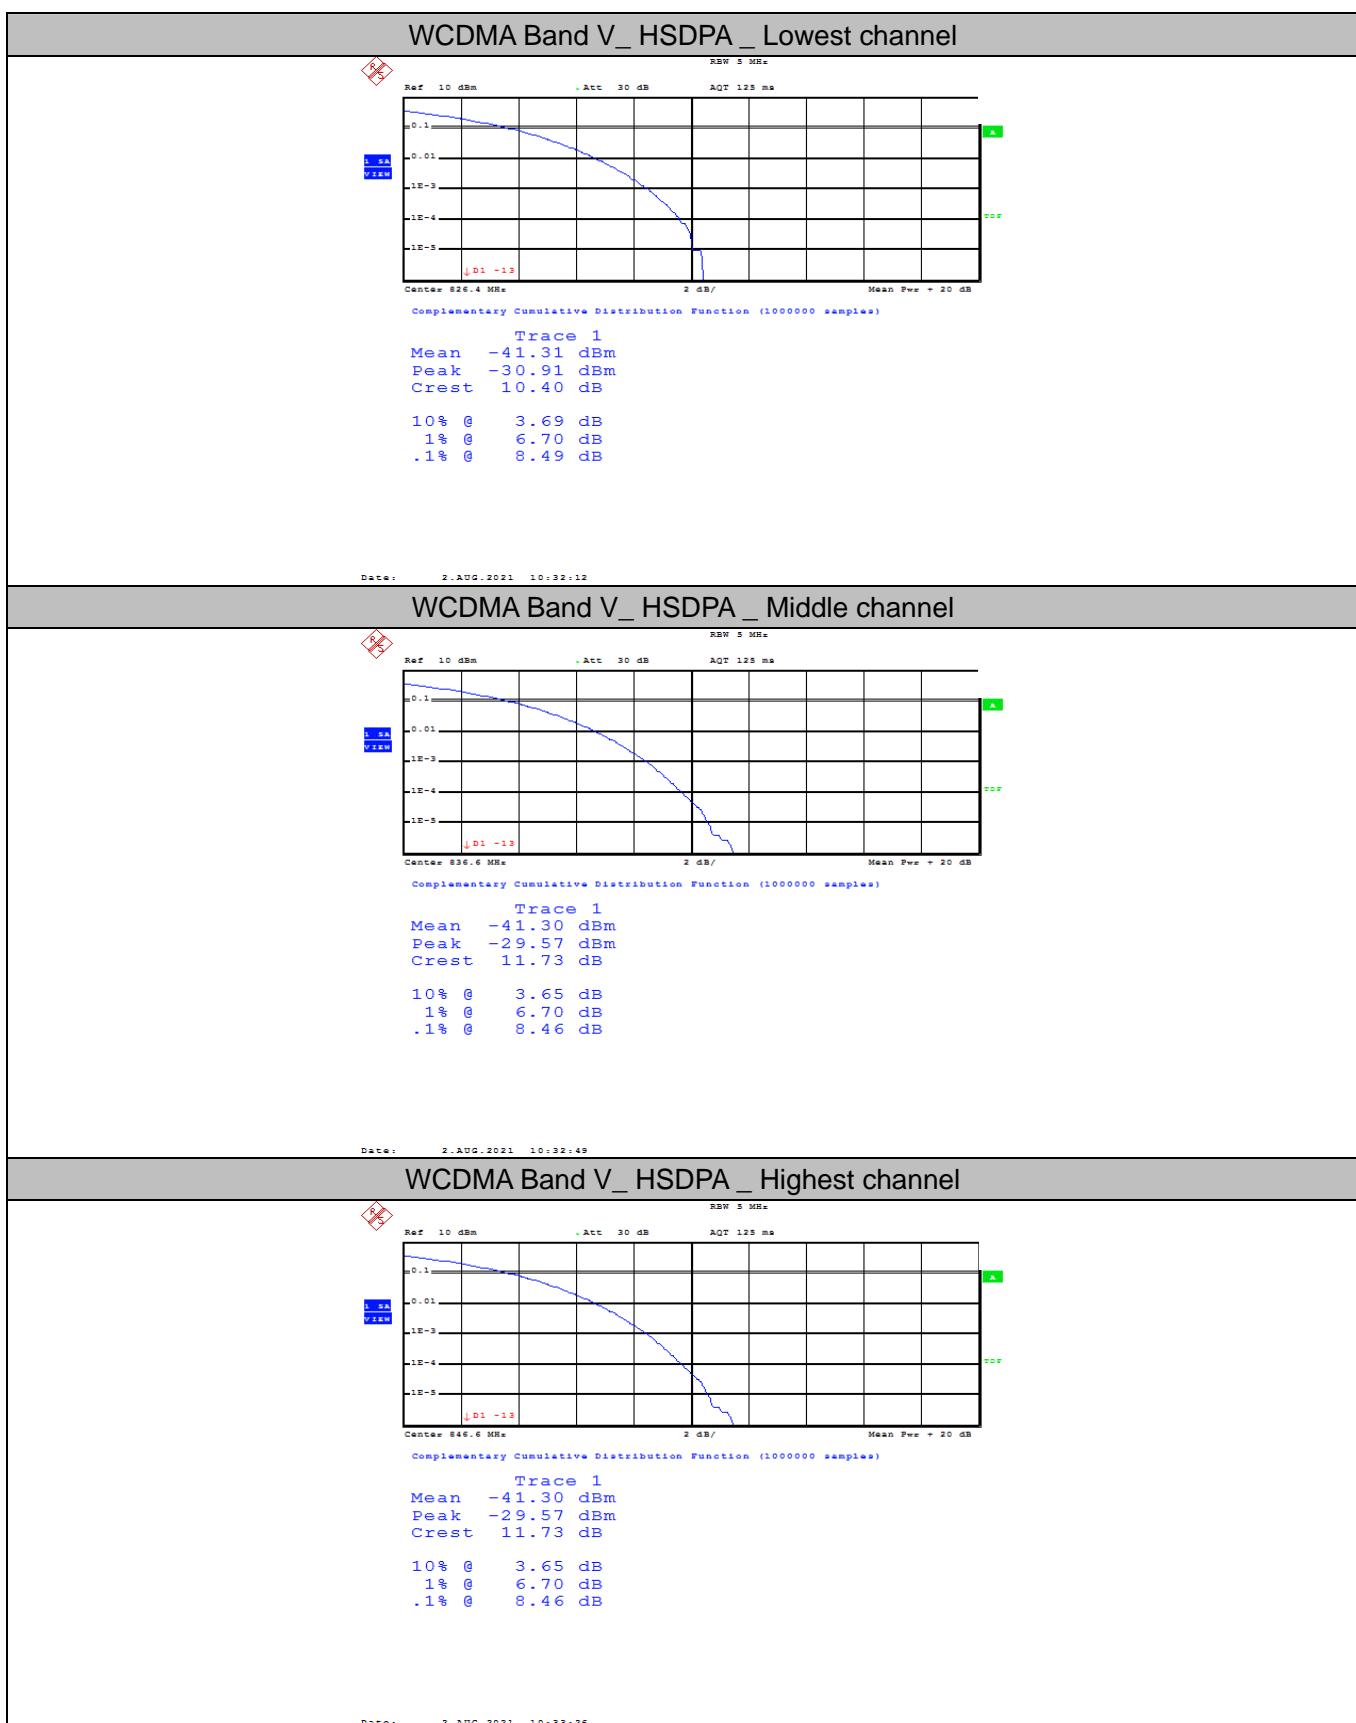

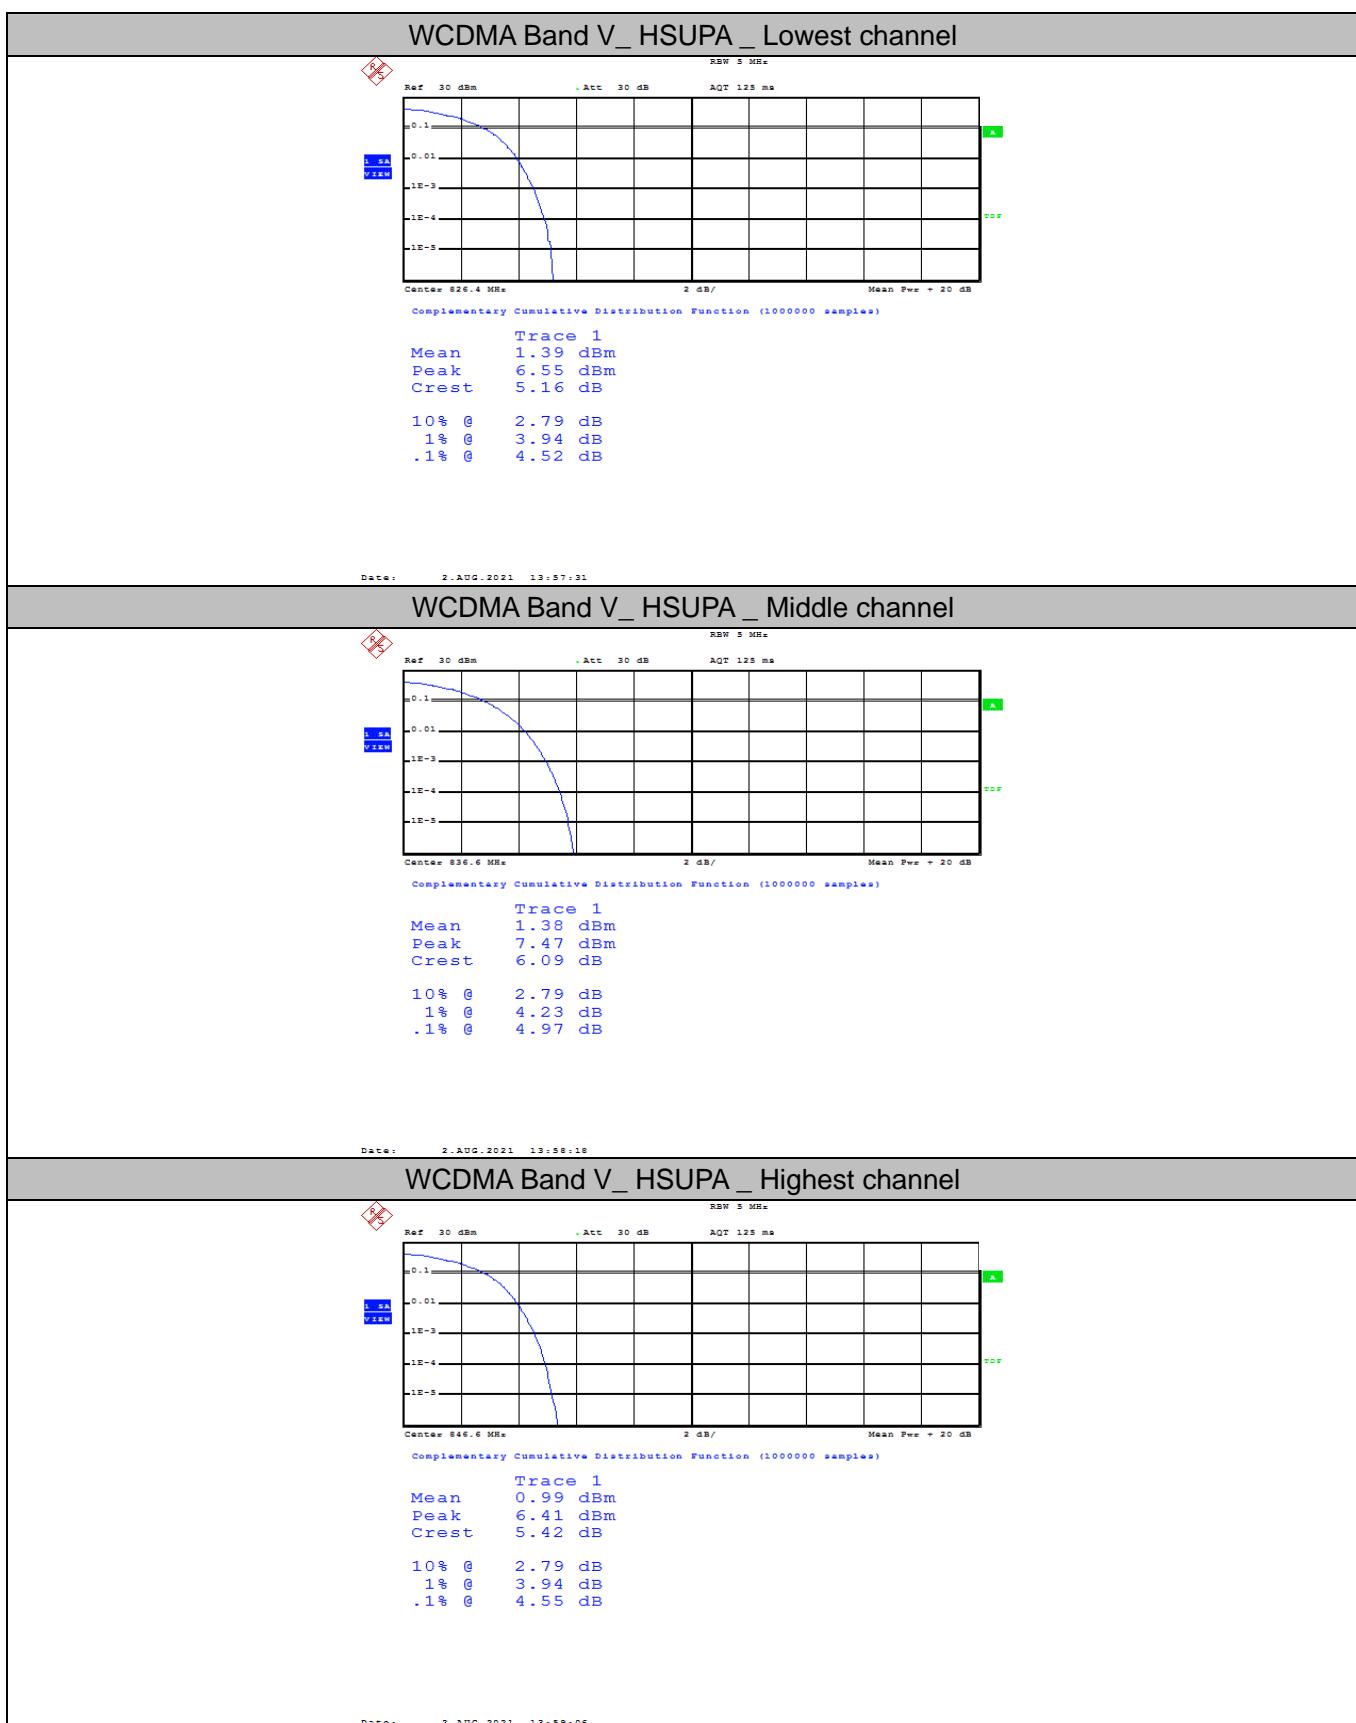


3.3. Occupy Bandwidth

LIMIT

For reporting purposes only.

TEST CONFIGURATION

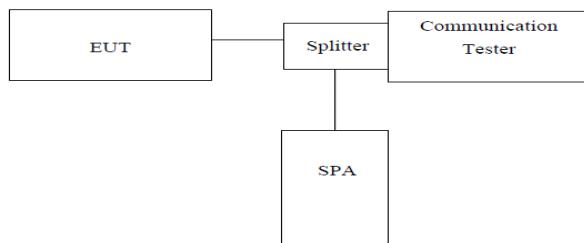

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer
2. RBW was set to about 1% of emission BW, $VBW \geq 3$ times RBW.
3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.


TEST RESULTS



EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (MHz)	-26dB bandwidth (MHz)
GSM 850 (GSM)	128	824.20	0.245	0.321
	190	836.60	0.242	0.313
	251	848.80	0.245	0.314
GSM 850 (GPRS)	128	824.20	0.244	0.314
	190	836.60	0.243	0.310
	251	848.80	0.246	0.313
EGPRS850 (8PSK,1Slot)	128	824.20	0.245	0.311
	190	836.60	0.247	0.306
	251	848.80	0.246	0.309
PCS1900 (GSM)	512	1850.20	0.244	0.309
	661	1880.00	0.244	0.312
	810	1909.80	0.246	0.313
PCS1900 (GPRS)	512	1850.20	0.242	0.314
	661	1880.00	0.246	0.311
	810	1909.80	0.245	0.312
EGPRS1900 (8PSK,1Slot)	512	1850.20	0.245	0.312
	661	1880.00	0.246	0.306
	810	1909.80	0.246	0.310
WCDMA Band II (QPSK)	9262	1852.40	4.206	5.170
	9400	1880.00	4.246	6.030
	9538	1907.60	4.176	4.730
WCDMA Band V (QPSK)	4132	826.40	4.152	4.688
	4183	836.60	4.176	4.696
	4233	846.60	4.168	4.680

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

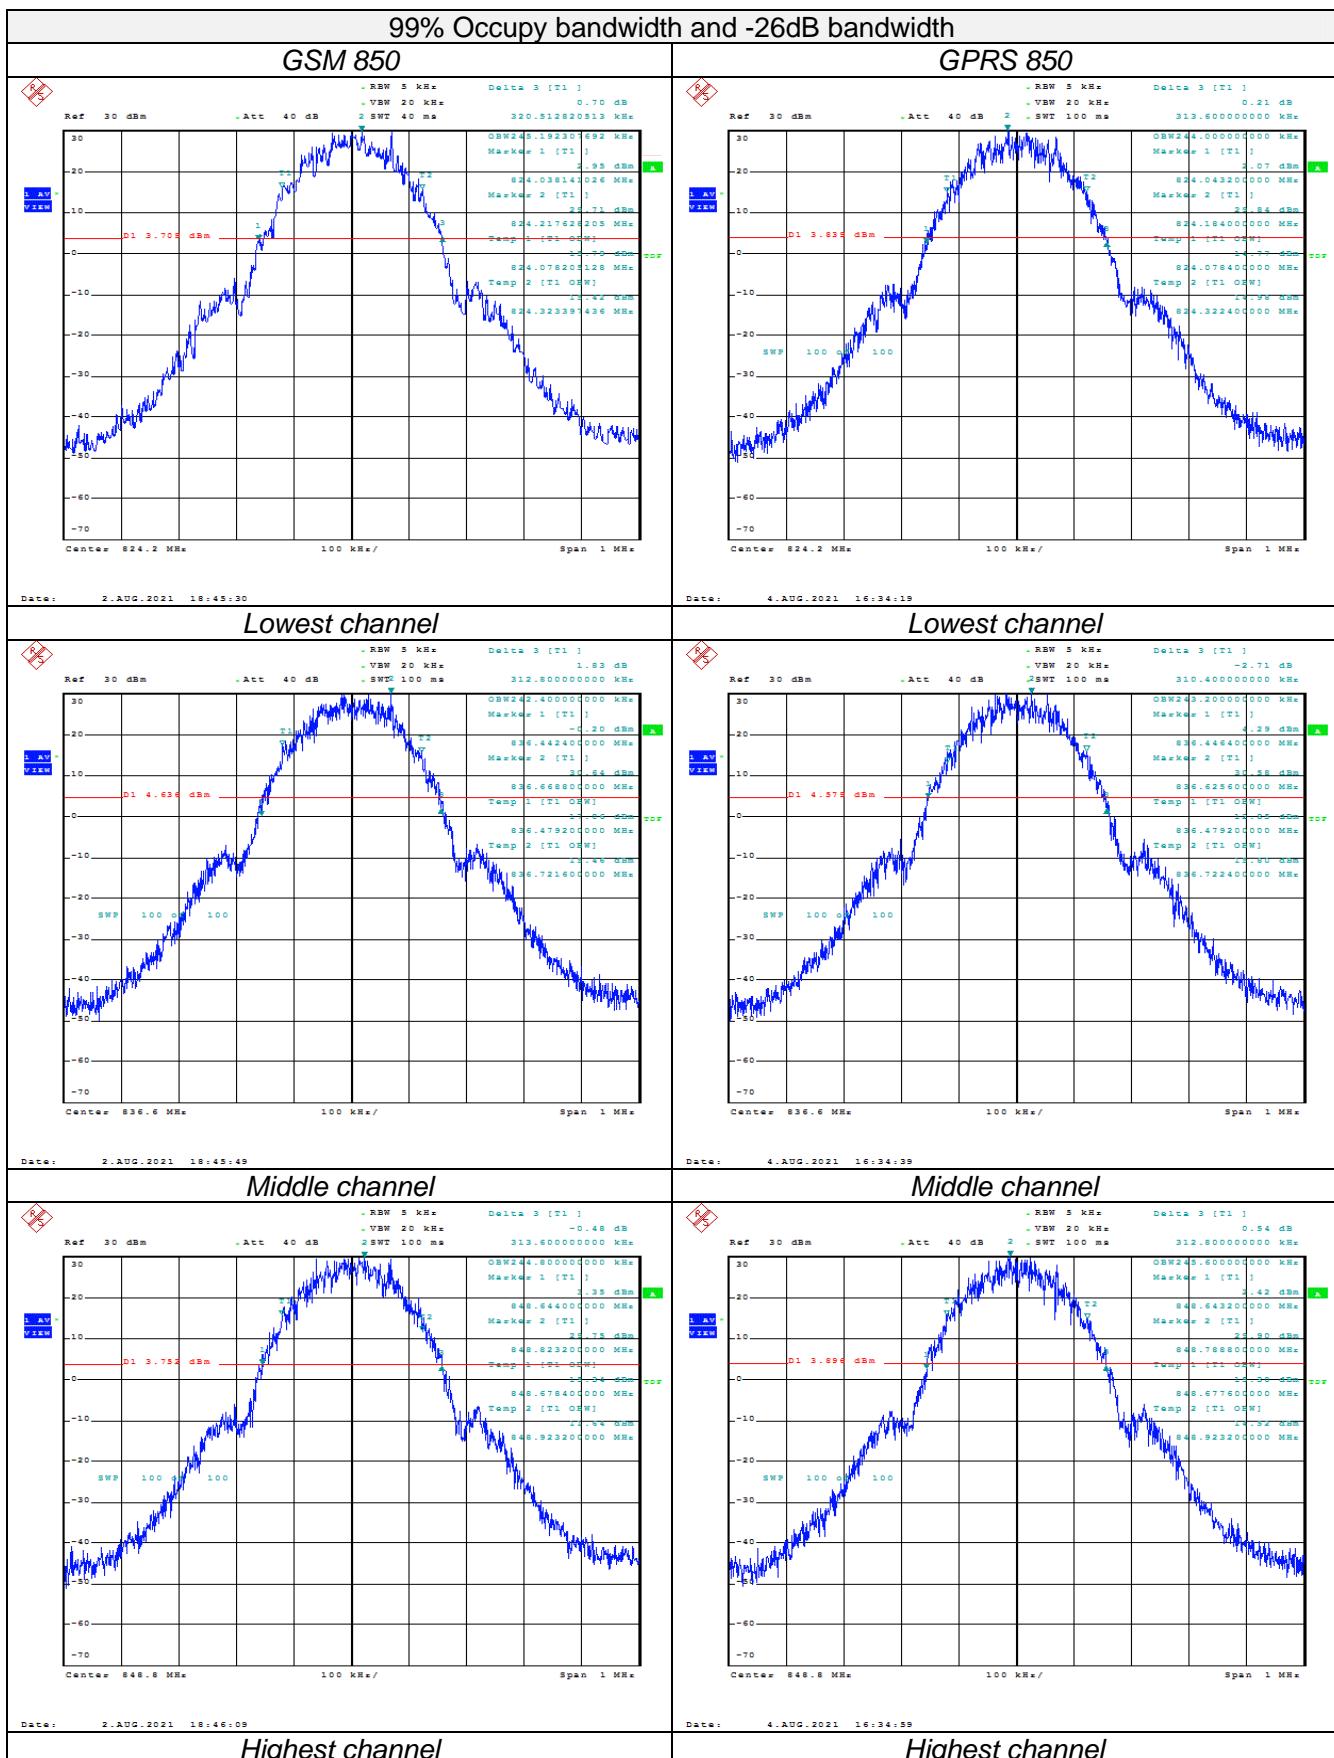


CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

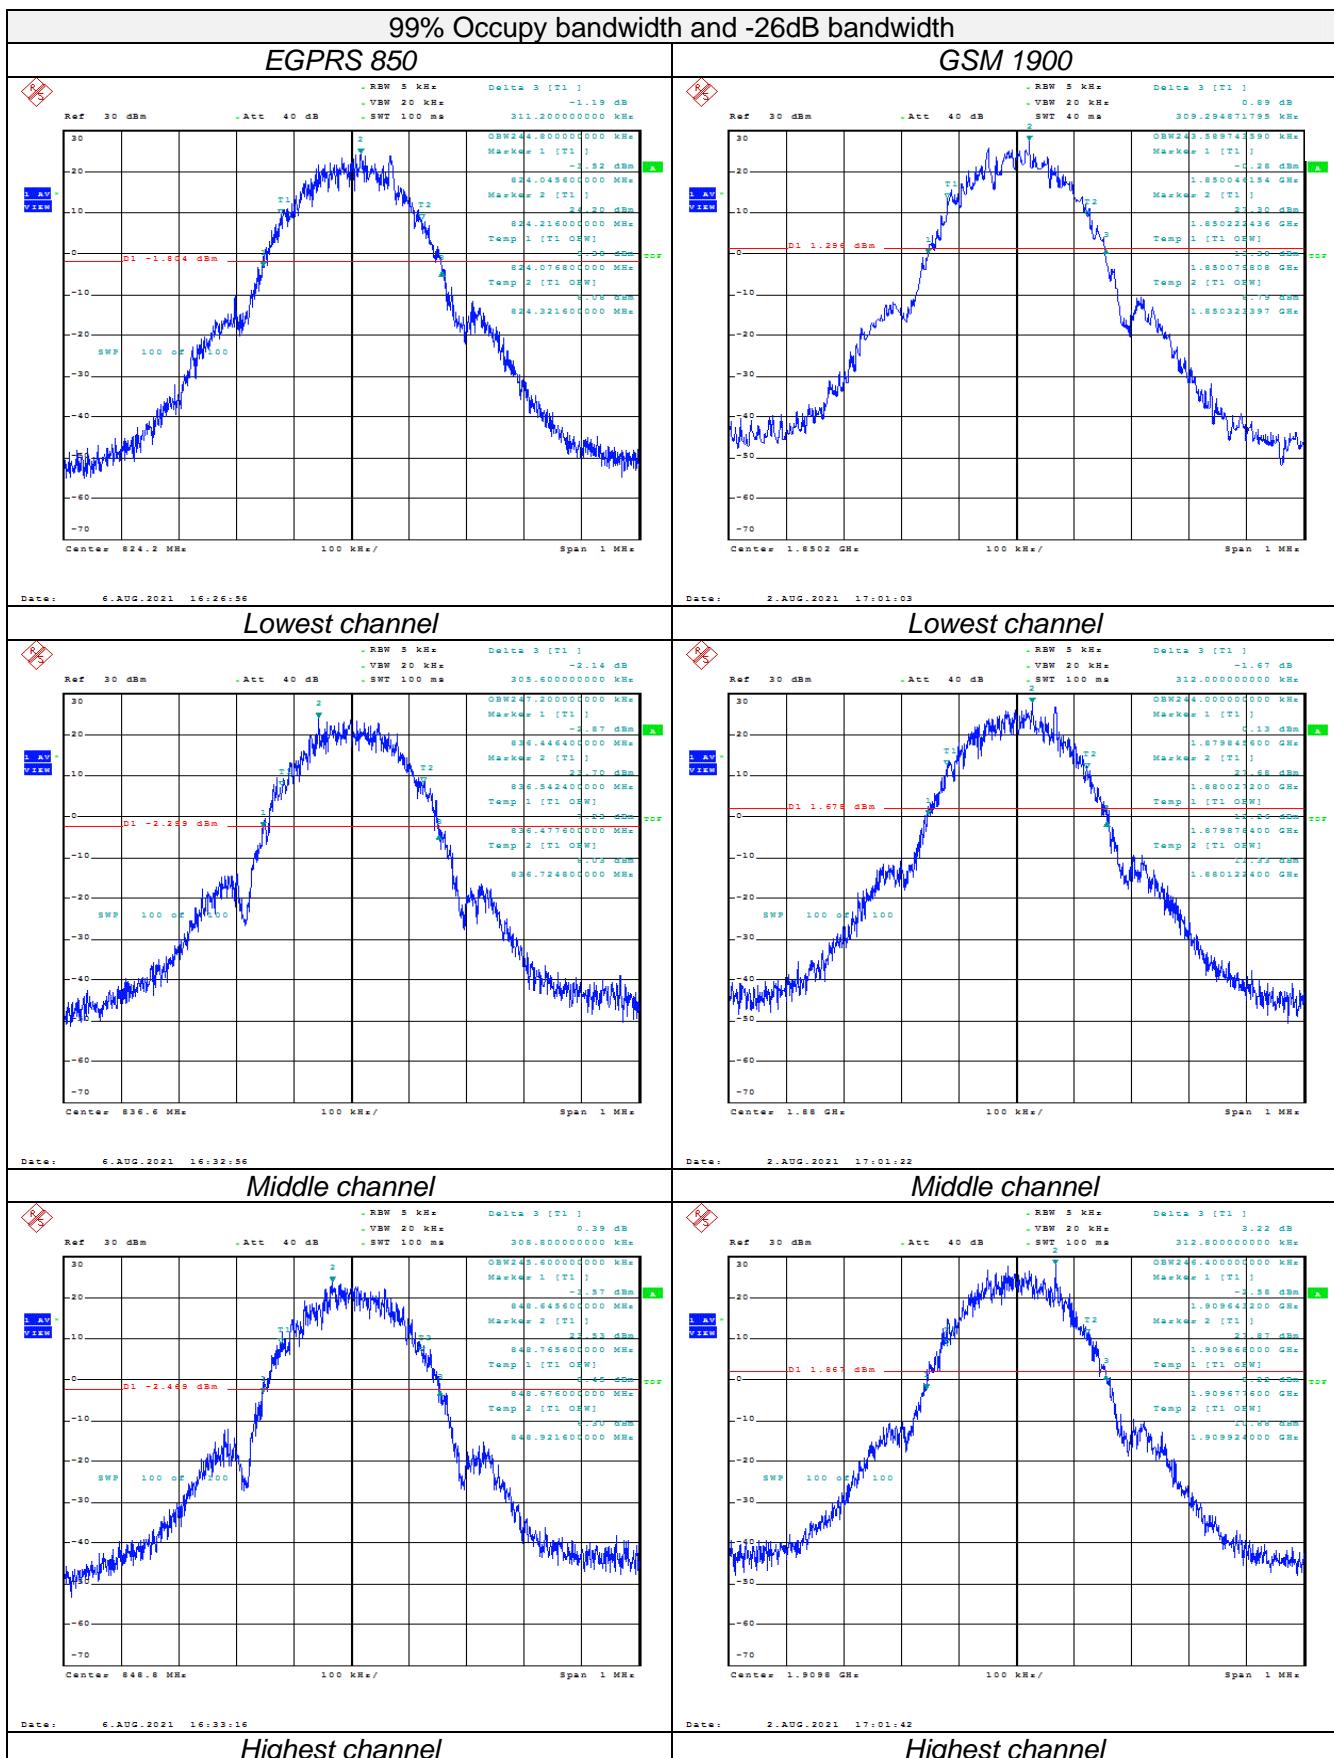

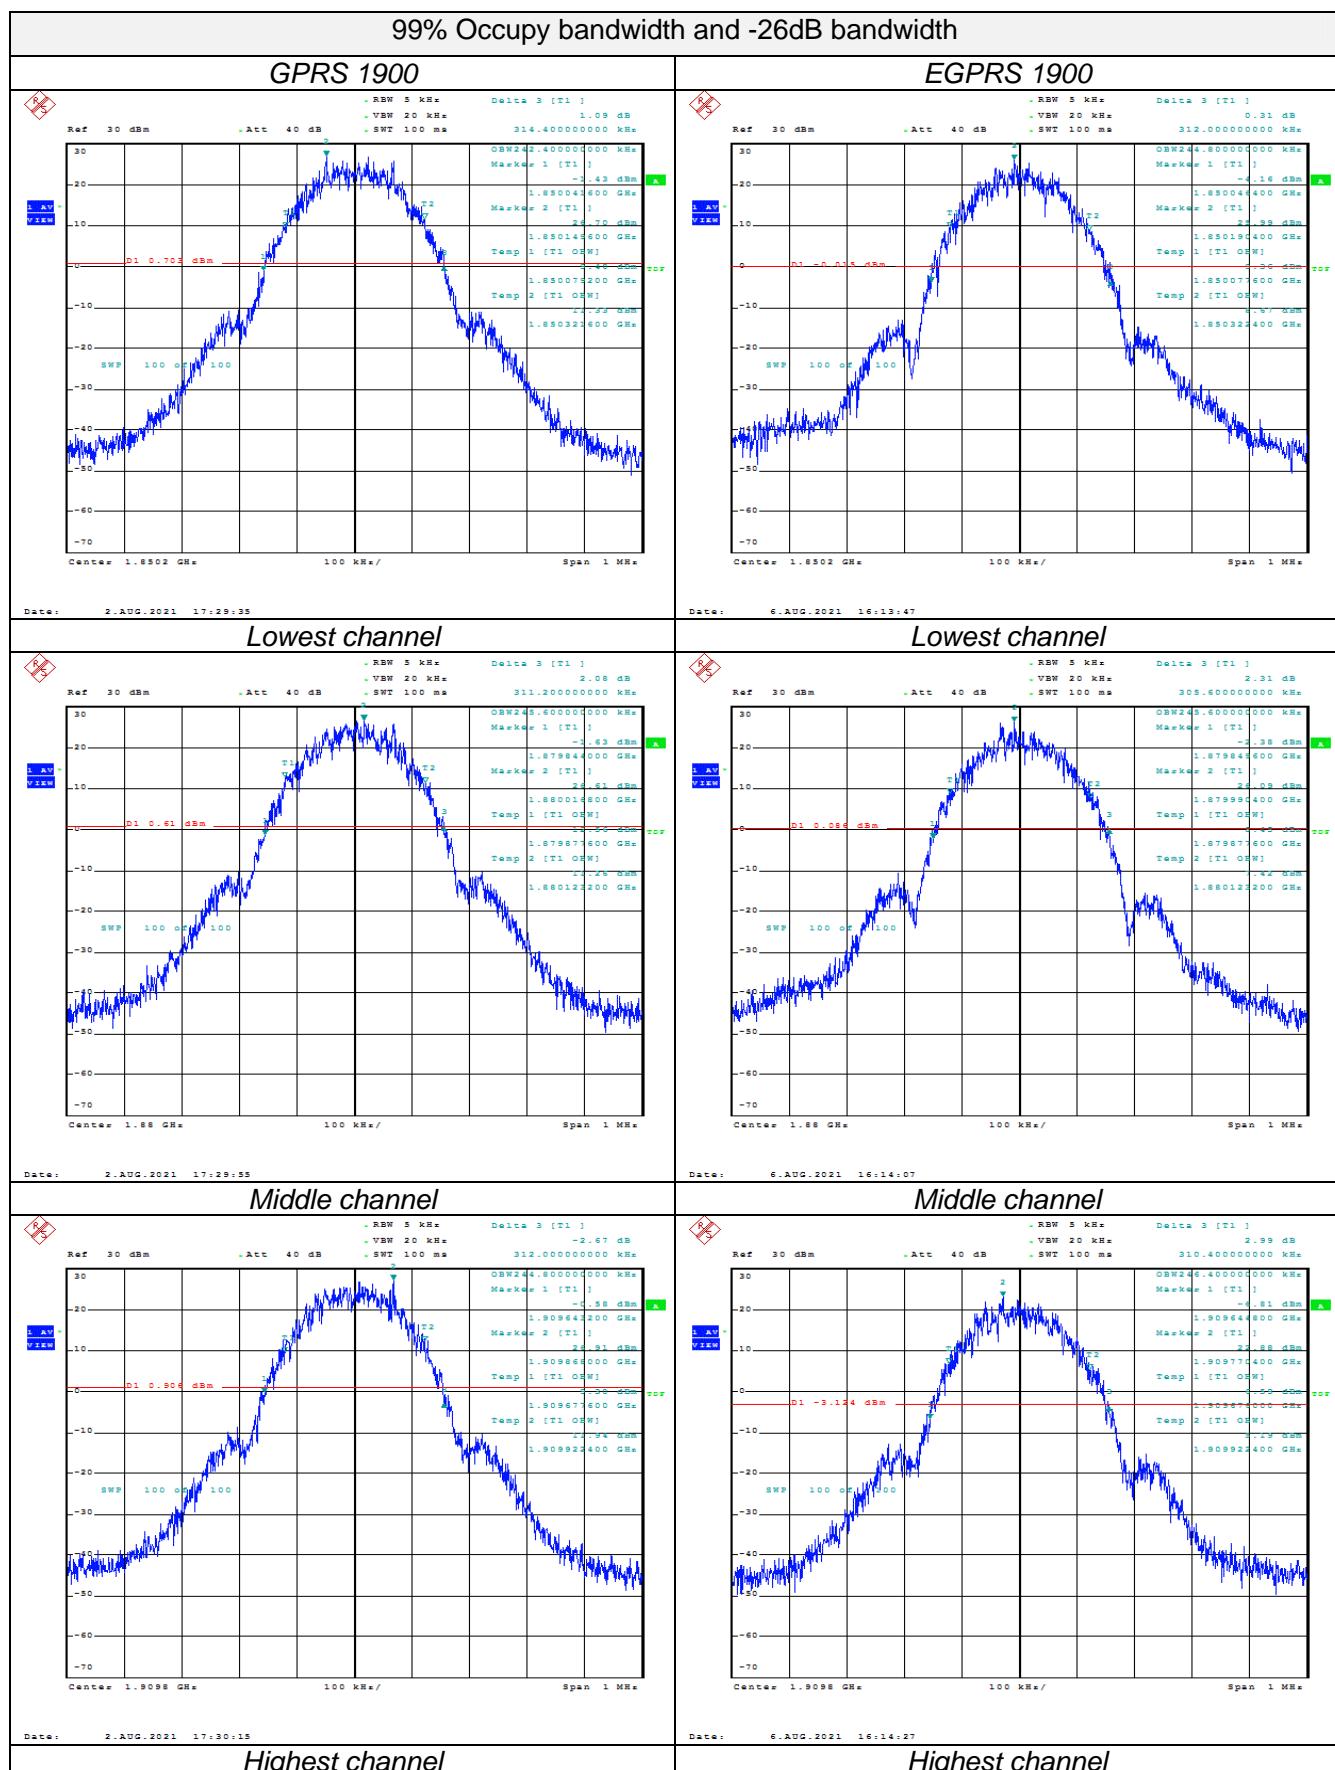


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

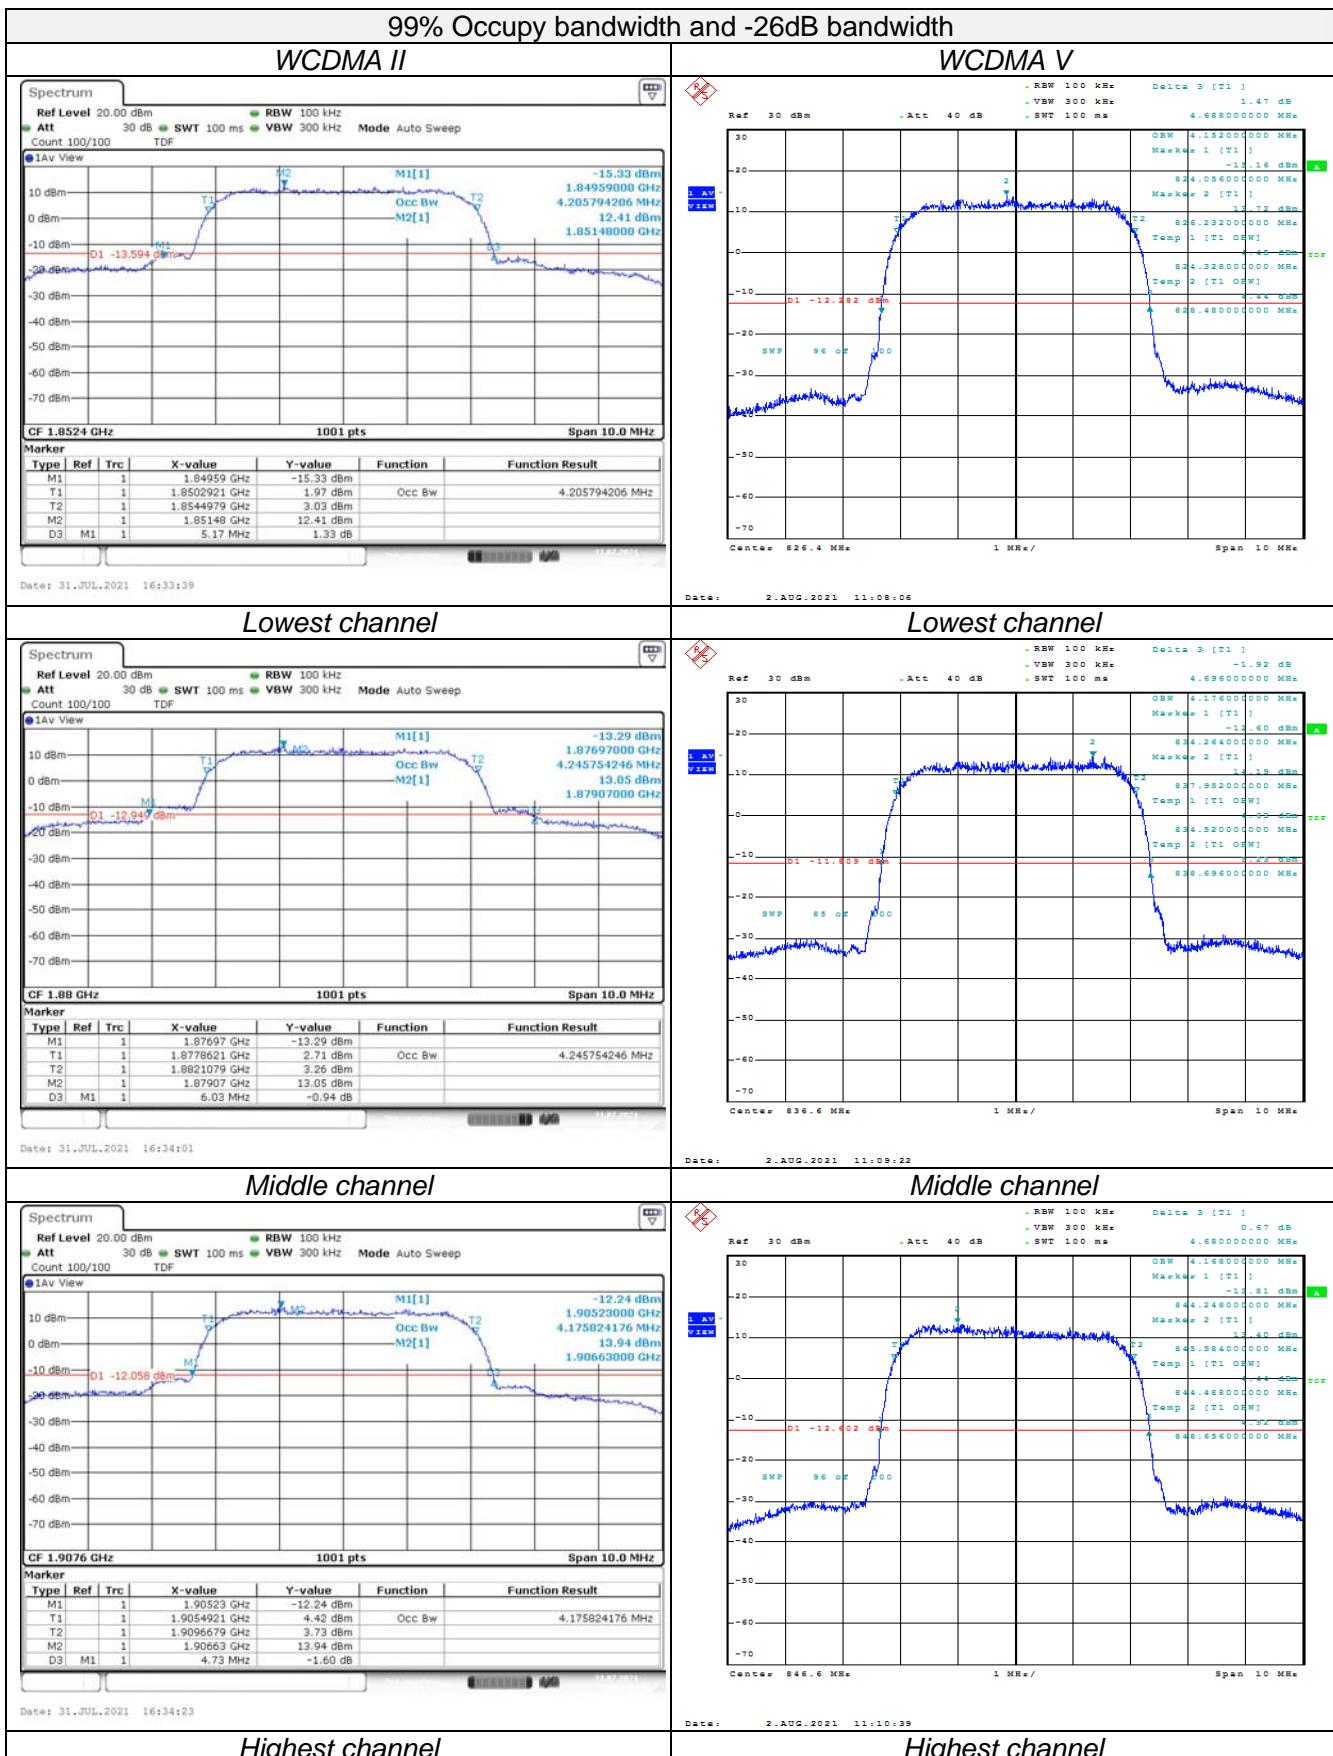

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



3.4. Out Of Band Emissions

LIMIT


FCC: §22.917, §24.238, §27.53 (h), §90.691

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

RSS132§5.5, RSS133§6.5, RSS139§6.6

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

TEST CONFIGURATION

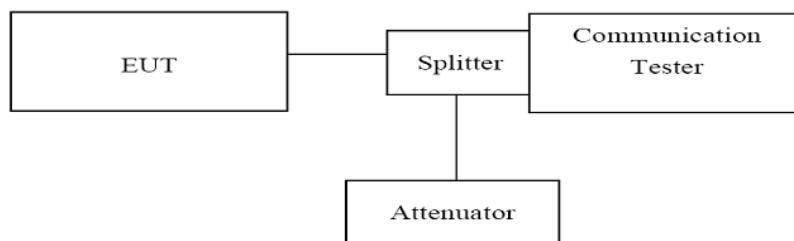

TEST PROCEDURE

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. Sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

TEST RESULTS

Band	Channel	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	0.009~0.15MHz	0.01	-46.03	-33	PASS
GSM850	128	0.15~30MHz	0.62	-46.76	-13	PASS
GSM850	128	30~1000MHz	666.38	-39.13	-13	PASS
GSM850	128	1000~3000MHz	1697.67	-26.58	-13	PASS
GSM850	128	3000~10000MHz	3394.8	-31.57	-13	PASS
GSM850	190	0.009~0.15MHz	0.01	-45.94	-33	PASS
GSM850	190	0.15~30MHz	0.68	-46.22	-13	PASS
GSM850	190	30~1000MHz	487.36	-38.27	-13	PASS
GSM850	190	1000~3000MHz	1697	-31.11	-13	PASS
GSM850	190	3000~10000MHz	3394.8	-31.87	-13	PASS
GSM850	251	0.009~0.15MHz	0.01	-45.91	-33	PASS
GSM850	251	0.15~30MHz	6.29	-47.62	-13	PASS
GSM850	251	30~1000MHz	952.6	-37.96	-13	PASS
GSM850	251	1000~3000MHz	1697.73	-26.53	-13	PASS
GSM850	251	3000~10000MHz	3395.73	-33.96	-13	PASS
GPRS850	128	0.009~0.15MHz	0.01	-45.8	-33	PASS
GPRS850	128	0.15~30MHz	0.64	-46.45	-13	PASS
GPRS850	128	30~1000MHz	425.66	-38.65	-13	PASS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



GPRS850	128	1000~3000MHz	1697.67	-26.45	-13	PASS
GPRS850	128	3000~10000MHz	3395.03	-31.55	-13	PASS
GPRS850	190	0.009~0.15MHz	0.01	-45.82	-33	PASS
GPRS850	190	0.15~30MHz	0.65	-46.44	-13	PASS
GPRS850	190	30~1000MHz	953.57	-38.84	-13	PASS
GPRS850	190	1000~3000MHz	1697.73	-26.66	-13	PASS
GPRS850	190	3000~10000MHz	3395.03	-30.26	-13	PASS
GPRS850	251	0.009~0.15MHz	0.01	-45.77	-33	PASS
GPRS850	251	0.15~30MHz	0.69	-46.93	-13	PASS
GPRS850	251	30~1000MHz	223.16	-38.24	-13	PASS
GPRS850	251	1000~3000MHz	1697.6	-26.44	-13	PASS
GPRS850	251	3000~10000MHz	3395.27	-30.07	-13	PASS
EGPRS850	128	0.009~0.15MHz	0.01	-49.72	-33	PASS
EGPRS850	128	0.15~30MHz	0.63	-47.89	-13	PASS
EGPRS850	128	30~1000MHz	249.93	-34.69	-13	PASS
EGPRS850	128	1000~3000MHz	1697.6	-37.03	-13	PASS
EGPRS850	128	3000~10000MHz	3395.5	-42.65	-13	PASS
EGPRS850	190	0.009~0.15MHz	0.02	-49.12	-33	PASS
EGPRS850	190	0.15~30MHz	0.62	-47.29	-13	PASS
EGPRS850	190	30~1000MHz	978.66	-38.82	-13	PASS
EGPRS850	190	1000~3000MHz	1697.93	-37.29	-13	PASS
EGPRS850	190	3000~10000MHz	3499.1	-47.93	-13	PASS
EGPRS850	251	0.009~0.15MHz	0.02	-50.74	-33	PASS
EGPRS850	251	0.15~30MHz	0.62	-46.7	-13	PASS
EGPRS850	251	30~1000MHz	356.15	-37.79	-13	PASS
EGPRS850	251	1000~3000MHz	1697.53	-37.02	-13	PASS
EGPRS850	251	3000~10000MHz	3395.73	-46.49	-13	PASS
GSM1900	512	0.009~0.15MHz	0.01	-52.32	-43	PASS
GSM1900	512	0.15~30MHz	0.67	-46.21	-23	PASS
GSM1900	512	30~1000MHz	497.12	-38.8	-13	PASS
GSM1900	512	1000~3000MHz	2755	-43.45	-13	PASS
GSM1900	512	3000~10000MHz	7638.9	-42.66	-13	PASS
GSM1900	512	10000~18000MHz	17980.27	-50.46	-13	PASS
GSM1900	661	0.009~0.15MHz	0.01	-52.47	-43	PASS
GSM1900	661	0.15~30MHz	0.69	-46.49	-23	PASS
GSM1900	661	30~1000MHz	846.16	-38.75	-13	PASS
GSM1900	661	1000~3000MHz	2605	-43.46	-13	PASS
GSM1900	661	3000~10000MHz	5729.53	-43.1	-13	PASS
GSM1900	661	10000~18000MHz	17965.33	-50.36	-13	PASS
GSM1900	810	0.009~0.15MHz	0.01	-52.01	-43	PASS
GSM1900	810	0.15~30MHz	0.69	-47.2	-23	PASS
GSM1900	810	30~1000MHz	993.86	-38.96	-13	PASS
GSM1900	810	1000~3000MHz	2586.6	-43.54	-13	PASS
GSM1900	810	3000~10000MHz	7639.37	-41.59	-13	PASS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

CNCA

For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : yz.cnca.cn



GSM1900	810	10000~18000MHz	17980.53	-50.24	-13	PASS
GPRS1900	512	0.009~0.15MHz	0.01	-52.47	-43	PASS
GPRS1900	512	0.15~30MHz	0.7	-46.55	-23	PASS
GPRS1900	512	30~1000MHz	962.2	-39	-13	PASS
GPRS1900	512	1000~3000MHz	2989.67	-43.42	-13	PASS
GPRS1900	512	3000~10000MHz	5729.53	-43	-13	PASS
GPRS1900	512	10000~18000MHz	17960	-50.46	-13	PASS
GPRS1900	661	0.009~0.15MHz	0.01	-52.63	-43	PASS
GPRS1900	661	0.15~30MHz	0.63	-46.56	-23	PASS
GPRS1900	661	30~1000MHz	855.99	-38.2	-13	PASS
GPRS1900	661	1000~3000MHz	2606	-43.56	-13	PASS
GPRS1900	661	3000~10000MHz	7639.13	-41.3	-13	PASS
GPRS1900	661	10000~18000MHz	17937.07	-50.28	-13	PASS
GPRS1900	810	0.009~0.15MHz	0.01	-52.95	-43	PASS
GPRS1900	810	0.15~30MHz	0.69	-46.54	-23	PASS
GPRS1900	810	30~1000MHz	510.12	-38.5	-13	PASS
GPRS1900	810	1000~3000MHz	2567.67	-43.48	-13	PASS
GPRS1900	810	3000~10000MHz	5729.07	-44.26	-13	PASS
GPRS1900	810	10000~18000MHz	17895.2	-50.32	-13	PASS
EGPRS1900	512	0.009~0.15MHz	0.01	-52.78	-43	PASS
EGPRS1900	512	0.15~30MHz	18.44	-47.02	-23	PASS
EGPRS1900	512	30~1000MHz	507.82	-38.49	-13	PASS
EGPRS1900	512	1000~3000MHz	2479.87	-40.84	-13	PASS
EGPRS1900	512	3000~10000MHz	3405.3	-50.44	-13	PASS
EGPRS1900	512	10000~18000MHz	17901.33	-50.45	-13	PASS
EGPRS1900	661	0.009~0.15MHz	0.02	-51.96	-43	PASS
EGPRS1900	661	0.15~30MHz	0.62	-45.88	-23	PASS
EGPRS1900	661	30~1000MHz	732.28	-37.97	-13	PASS
EGPRS1900	661	1000~3000MHz	2479.8	-41.39	-13	PASS
EGPRS1900	661	3000~10000MHz	5749.37	-49.61	-13	PASS
EGPRS1900	661	10000~18000MHz	17974.67	-50.44	-13	PASS
EGPRS1900	810	0.009~0.15MHz	0.02	-51.21	-43	PASS
EGPRS1900	810	0.15~30MHz	0.69	-47.45	-23	PASS
EGPRS1900	810	30~1000MHz	666.77	-38.63	-13	PASS
EGPRS1900	810	1000~3000MHz	2479.93	-41.52	-13	PASS
EGPRS1900	810	3000~10000MHz	3819.47	-51.03	-13	PASS
EGPRS1900	810	10000~18000MHz	17990.93	-50.34	-13	PASS

Band	Channel	Frequency Range (Mhz)	Frequency (dBm)	Result (dBm)	Limit (dBm)	Verdict
Band2	9262	0.15~30MHz	0.6	-53.41	-23	PASS
Band2	9262	30~1000MHz	712.94	-38.77	-13	PASS
Band2	9262	1000~3000MHz	2969.53	-43.26	-13	PASS
Band2	9262	3000~10000MHz	3703.36	-29.71	-13	PASS
Band2	9262	10000~20000MHz	19476.18	-35.61	-13	PASS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




Band2	9262	0.009~0.15MHz	0.04	-67.43	-43	PASS
Band2	9400	30~1000MHz	701.07	-37.86	-13	PASS
Band2	9400	10000~20000MHz	19445.19	-35.66	-13	PASS
Band2	9400	1000~3000MHz	2968	-43.46	-13	PASS
Band2	9400	0.15~30MHz	9.48	-54.79	-23	PASS
Band2	9400	0.009~0.15MHz	0.04	-66.99	-43	PASS
Band2	9400	3000~10000MHz	3761.69	-29.53	-13	PASS
Band2	9538	10000~20000MHz	19460.18	-35.64	-13	PASS
Band2	9538	3000~10000MHz	3816.99	-27.21	-13	PASS
Band2	9538	0.009~0.15MHz	0.04	-66.1	-43	PASS
Band2	9538	0.15~30MHz	3.87	-54.17	-23	PASS
Band2	9538	30~1000MHz	959.05	-39.85	-13	PASS
Band2	9538	1000~3000MHz	2984.4	-43.41	-13	PASS
Band5	4132	1000~3000MHz	2842.87	-42.87	-13	PASS
Band5	4132	0.15~30MHz	0.65	-47.21	-13	PASS
Band5	4132	30~1000MHz	303.09	-38.75	-13	PASS
Band5	4132	3000~10000MHz	3706.3	-46.17	-13	PASS
Band5	4132	10000~18000MHz	11938.93	-39.68	-13	PASS
Band5	4132	0.009~0.15MHz	0.01	-65.12	-33	PASS
Band5	4183	1000~3000MHz	2983.6	-42.87	-13	PASS
Band5	4183	3000~10000MHz	3706.3	-46.42	-13	PASS
Band5	4183	30~1000MHz	691.99	-38.74	-13	PASS
Band5	4183	0.15~30MHz	0.6	-47.79	-13	PASS
Band5	4183	0.009~0.15MHz	0.03	-65.05	-33	PASS
Band5	4183	10000~18000MHz	11923.2	-39.63	-13	PASS
Band5	4233	1000~3000MHz	2971.67	-42.8	-13	PASS
Band5	4233	0.009~0.15MHz	0.04	-65.68	-33	PASS
Band5	4233	0.15~30MHz	0.64	-46.46	-13	PASS
Band5	4233	30~1000MHz	976.49	-38.79	-13	PASS
Band5	4233	3000~10000MHz	3706.3	-46.21	-13	PASS
Band5	4233	10000~18000MHz	11979.47	-39.67	-13	PASS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

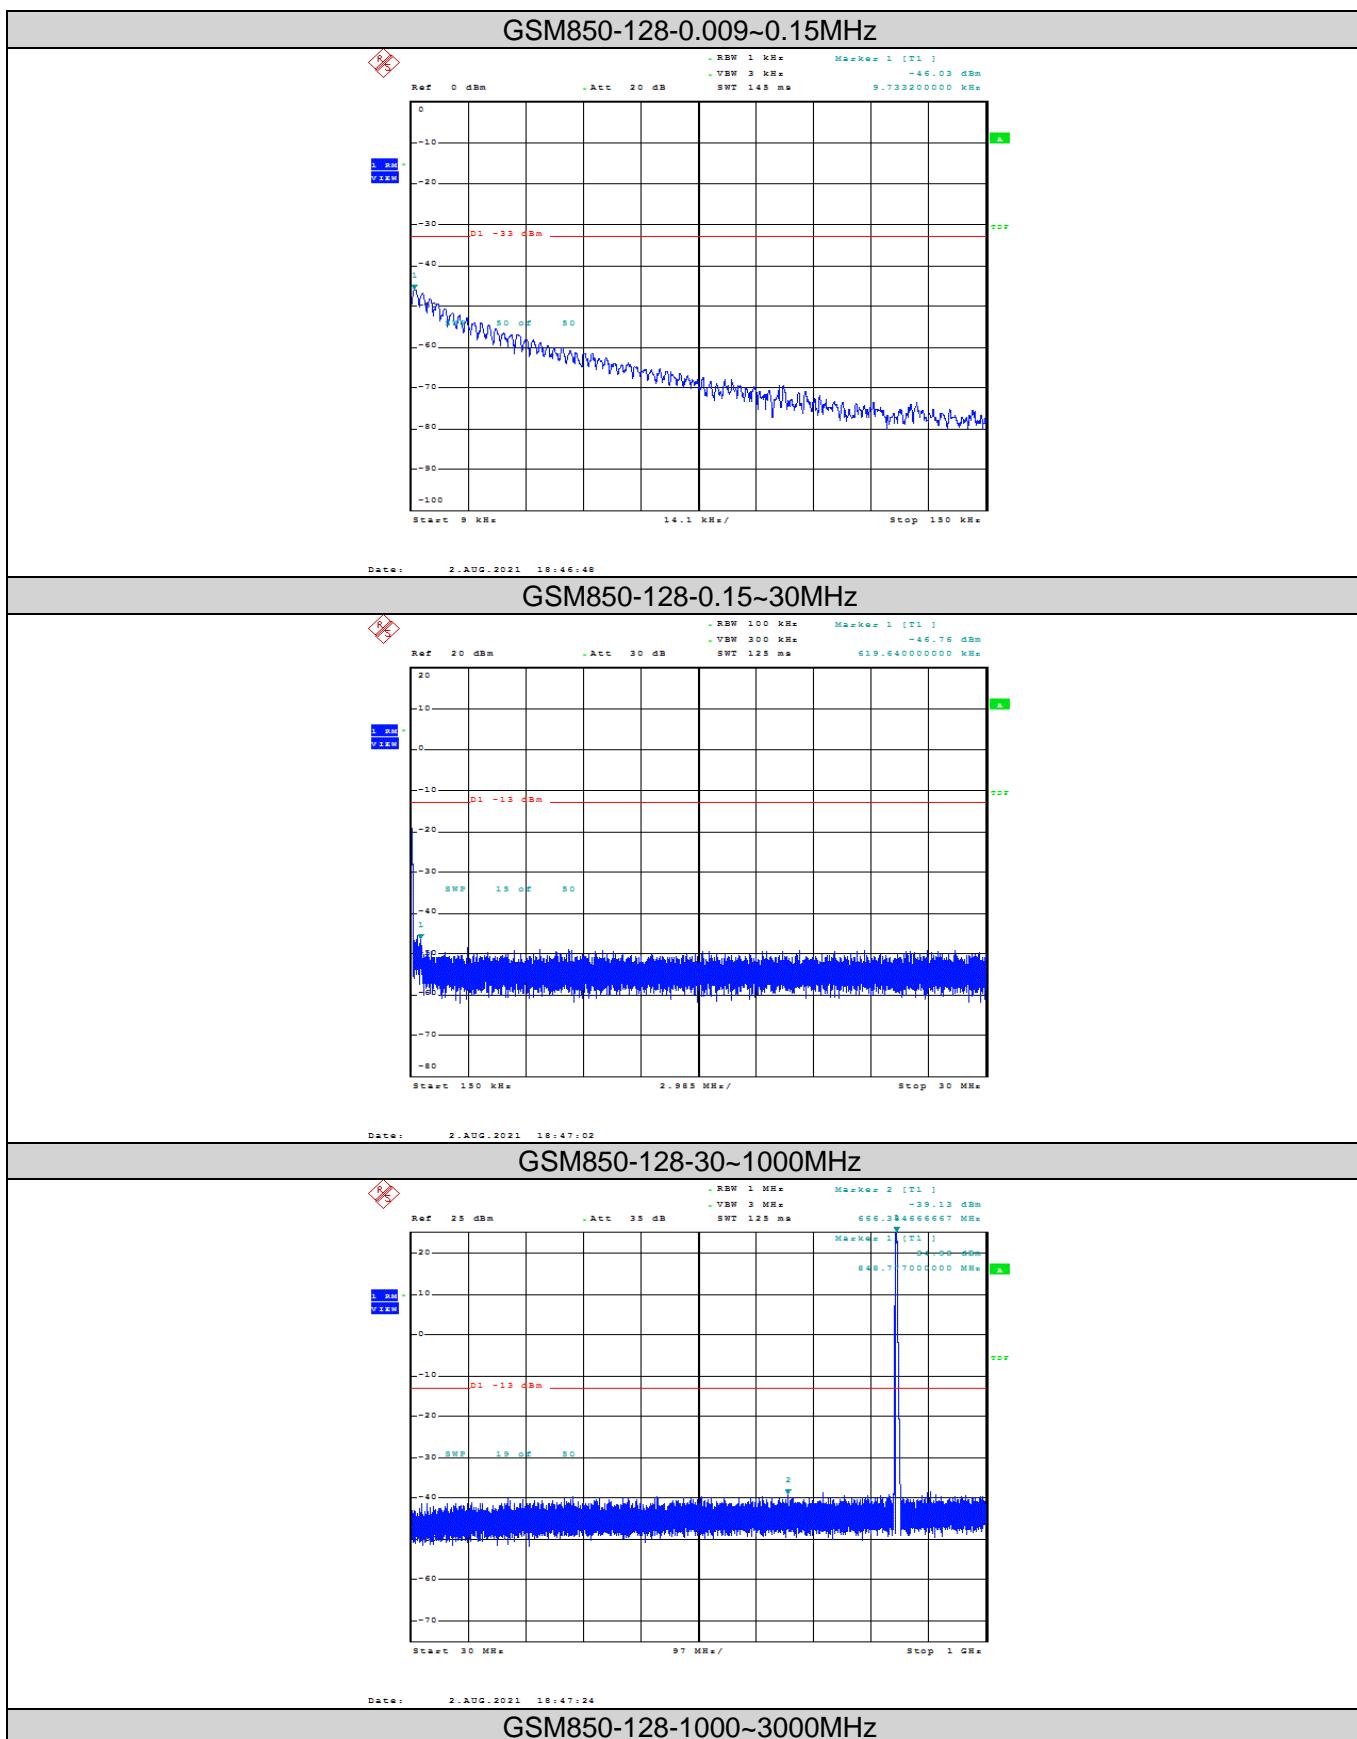


CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

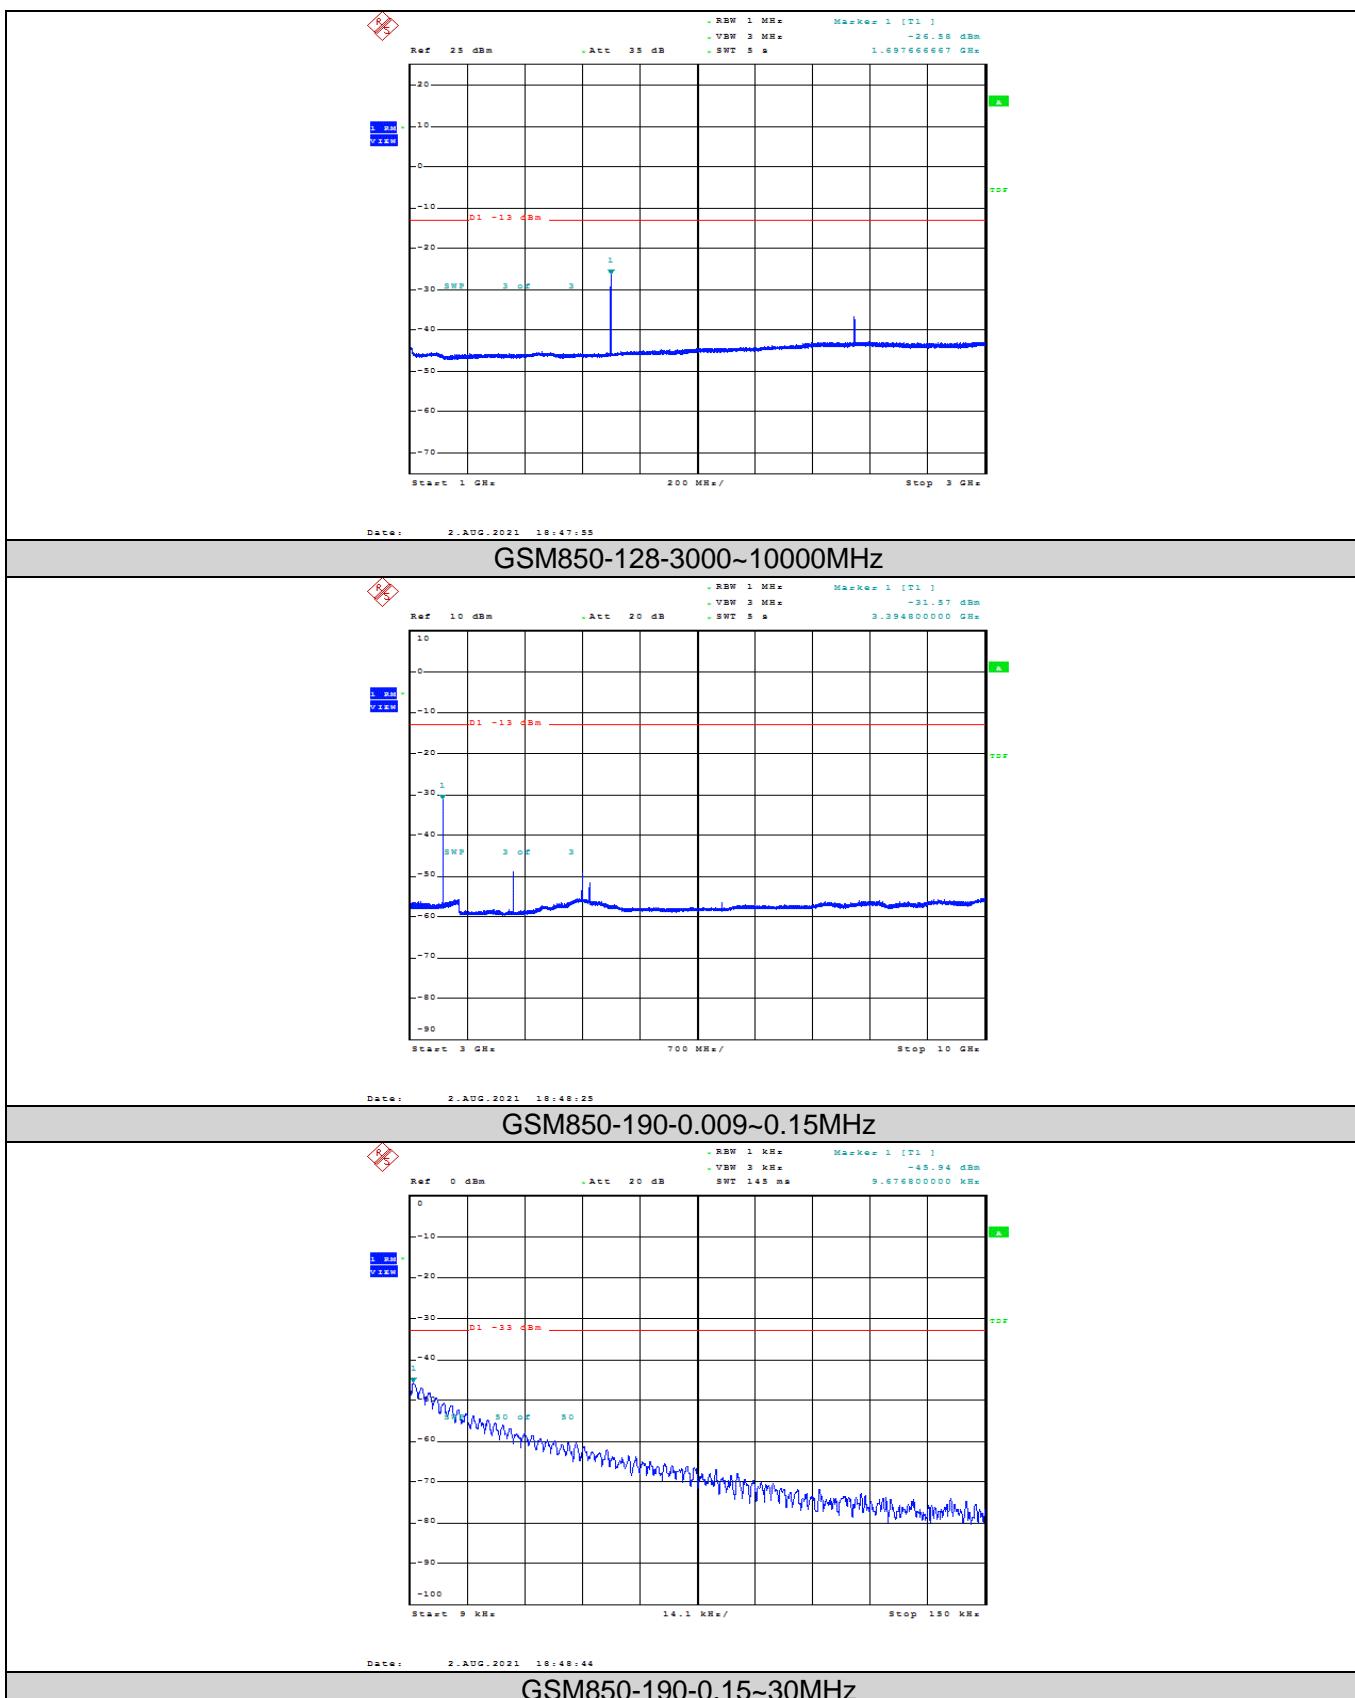

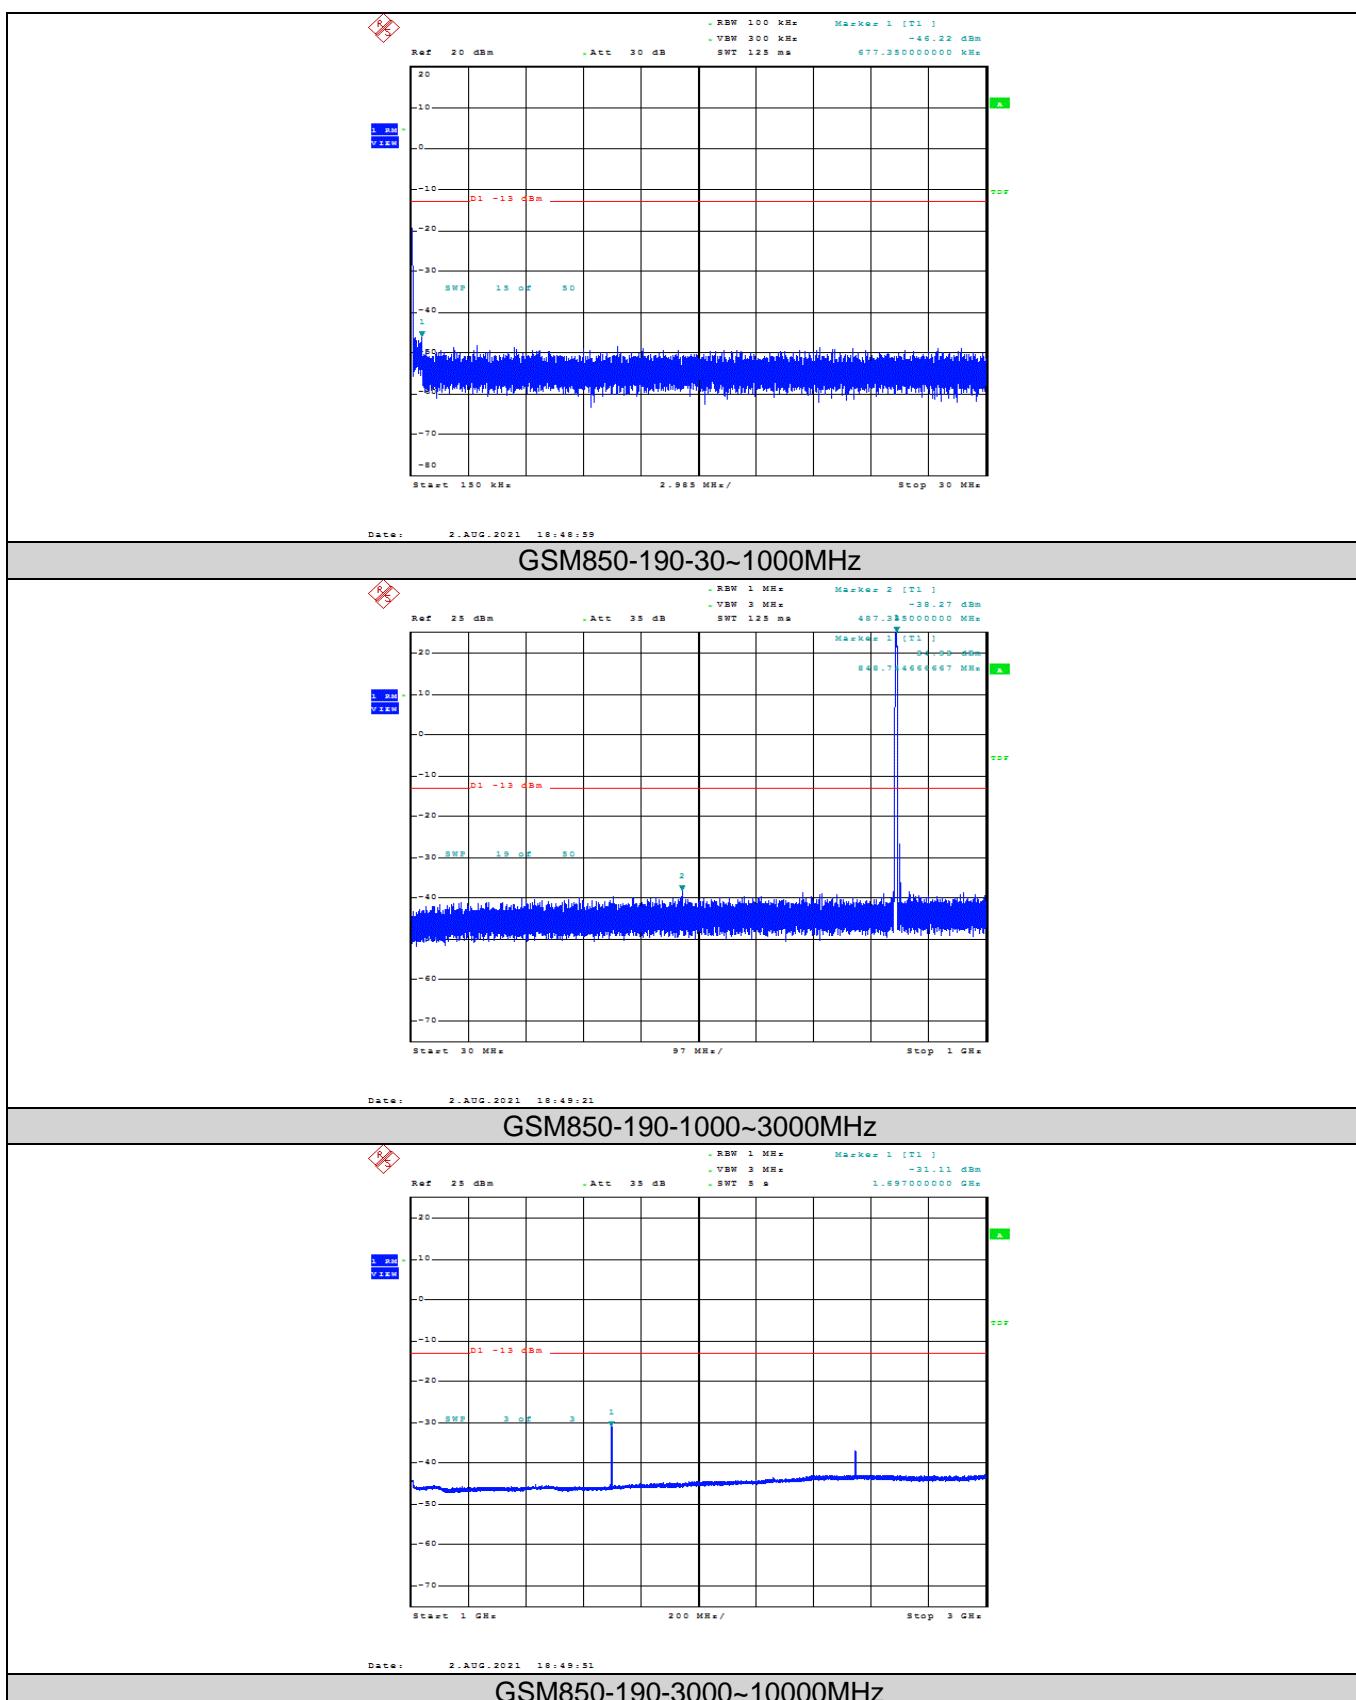



CTC Laboratories, Inc.

 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

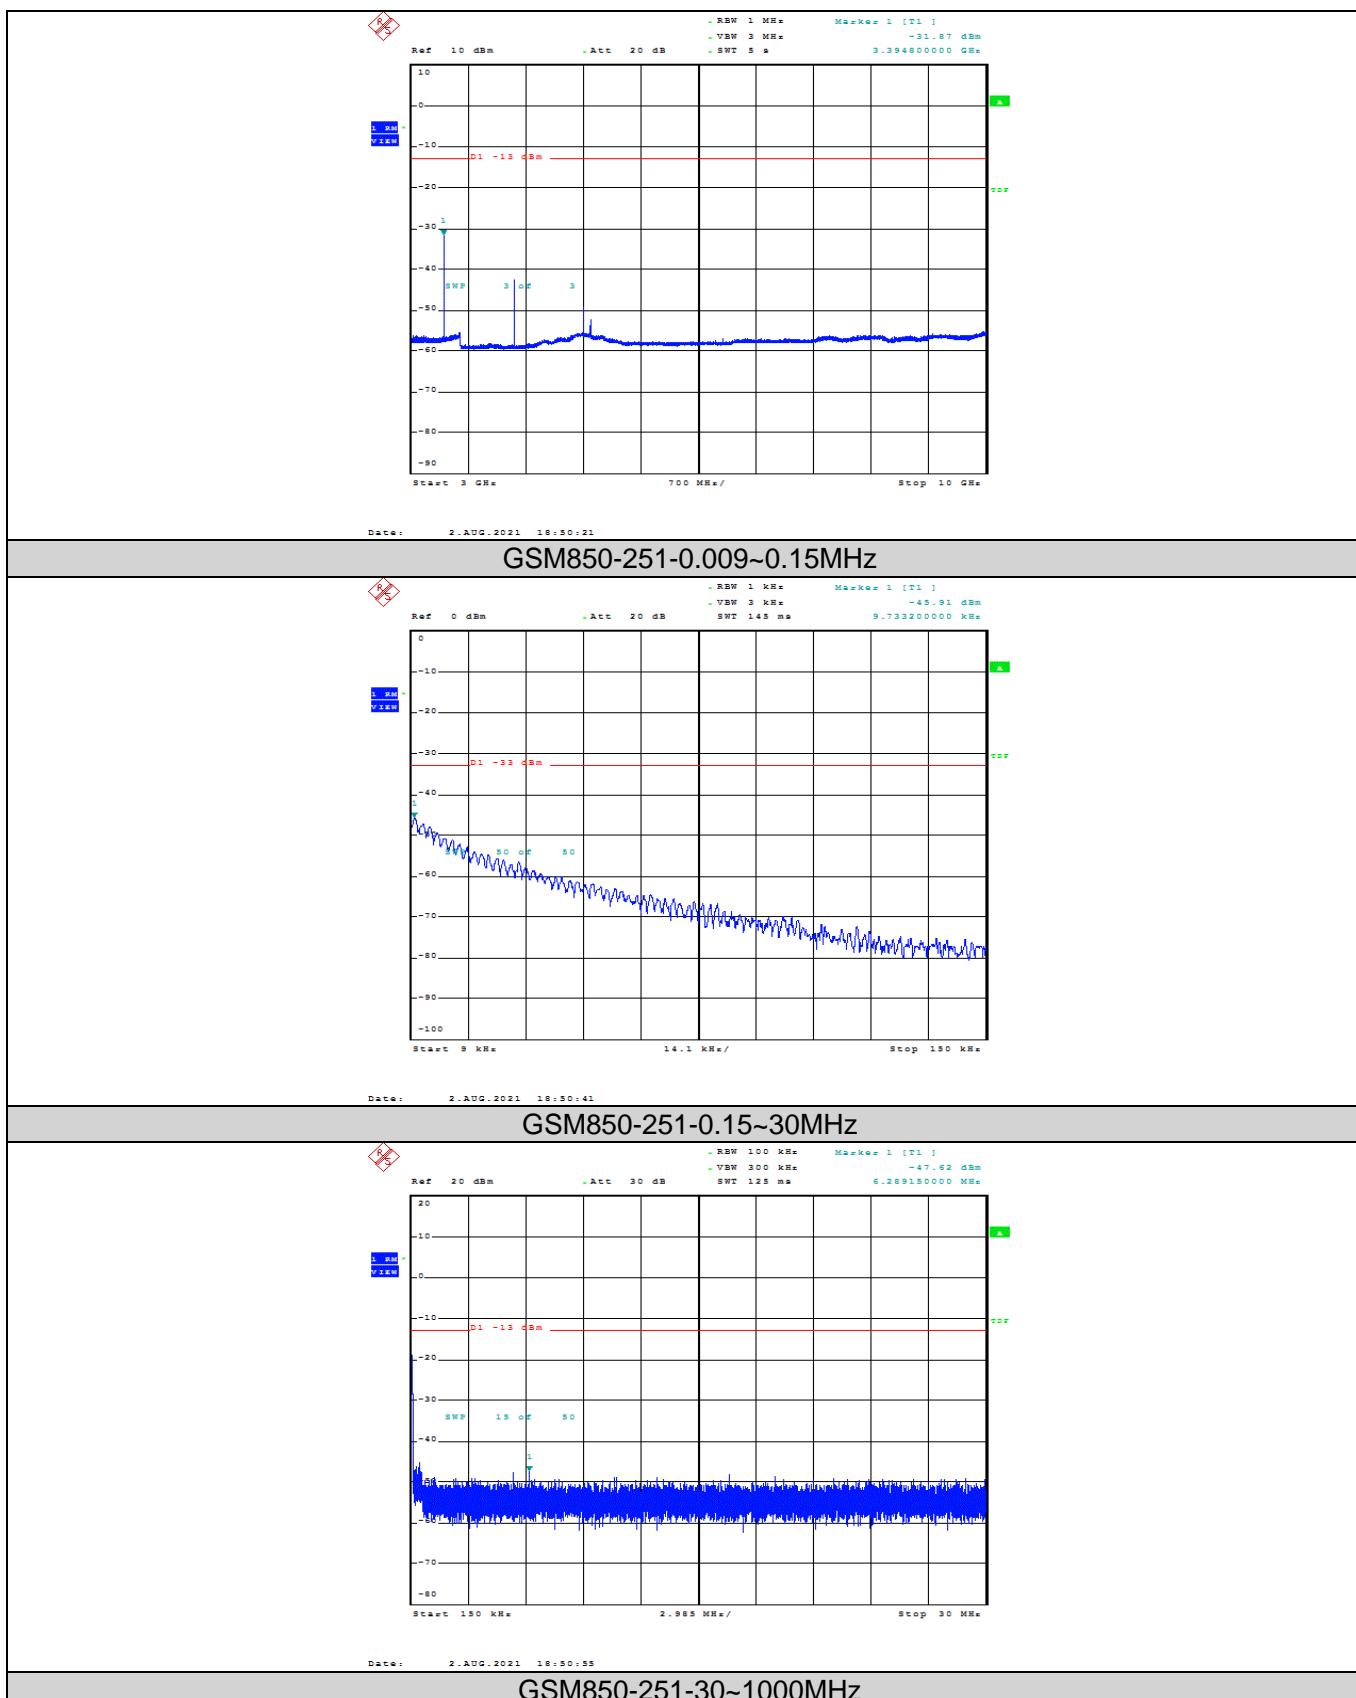

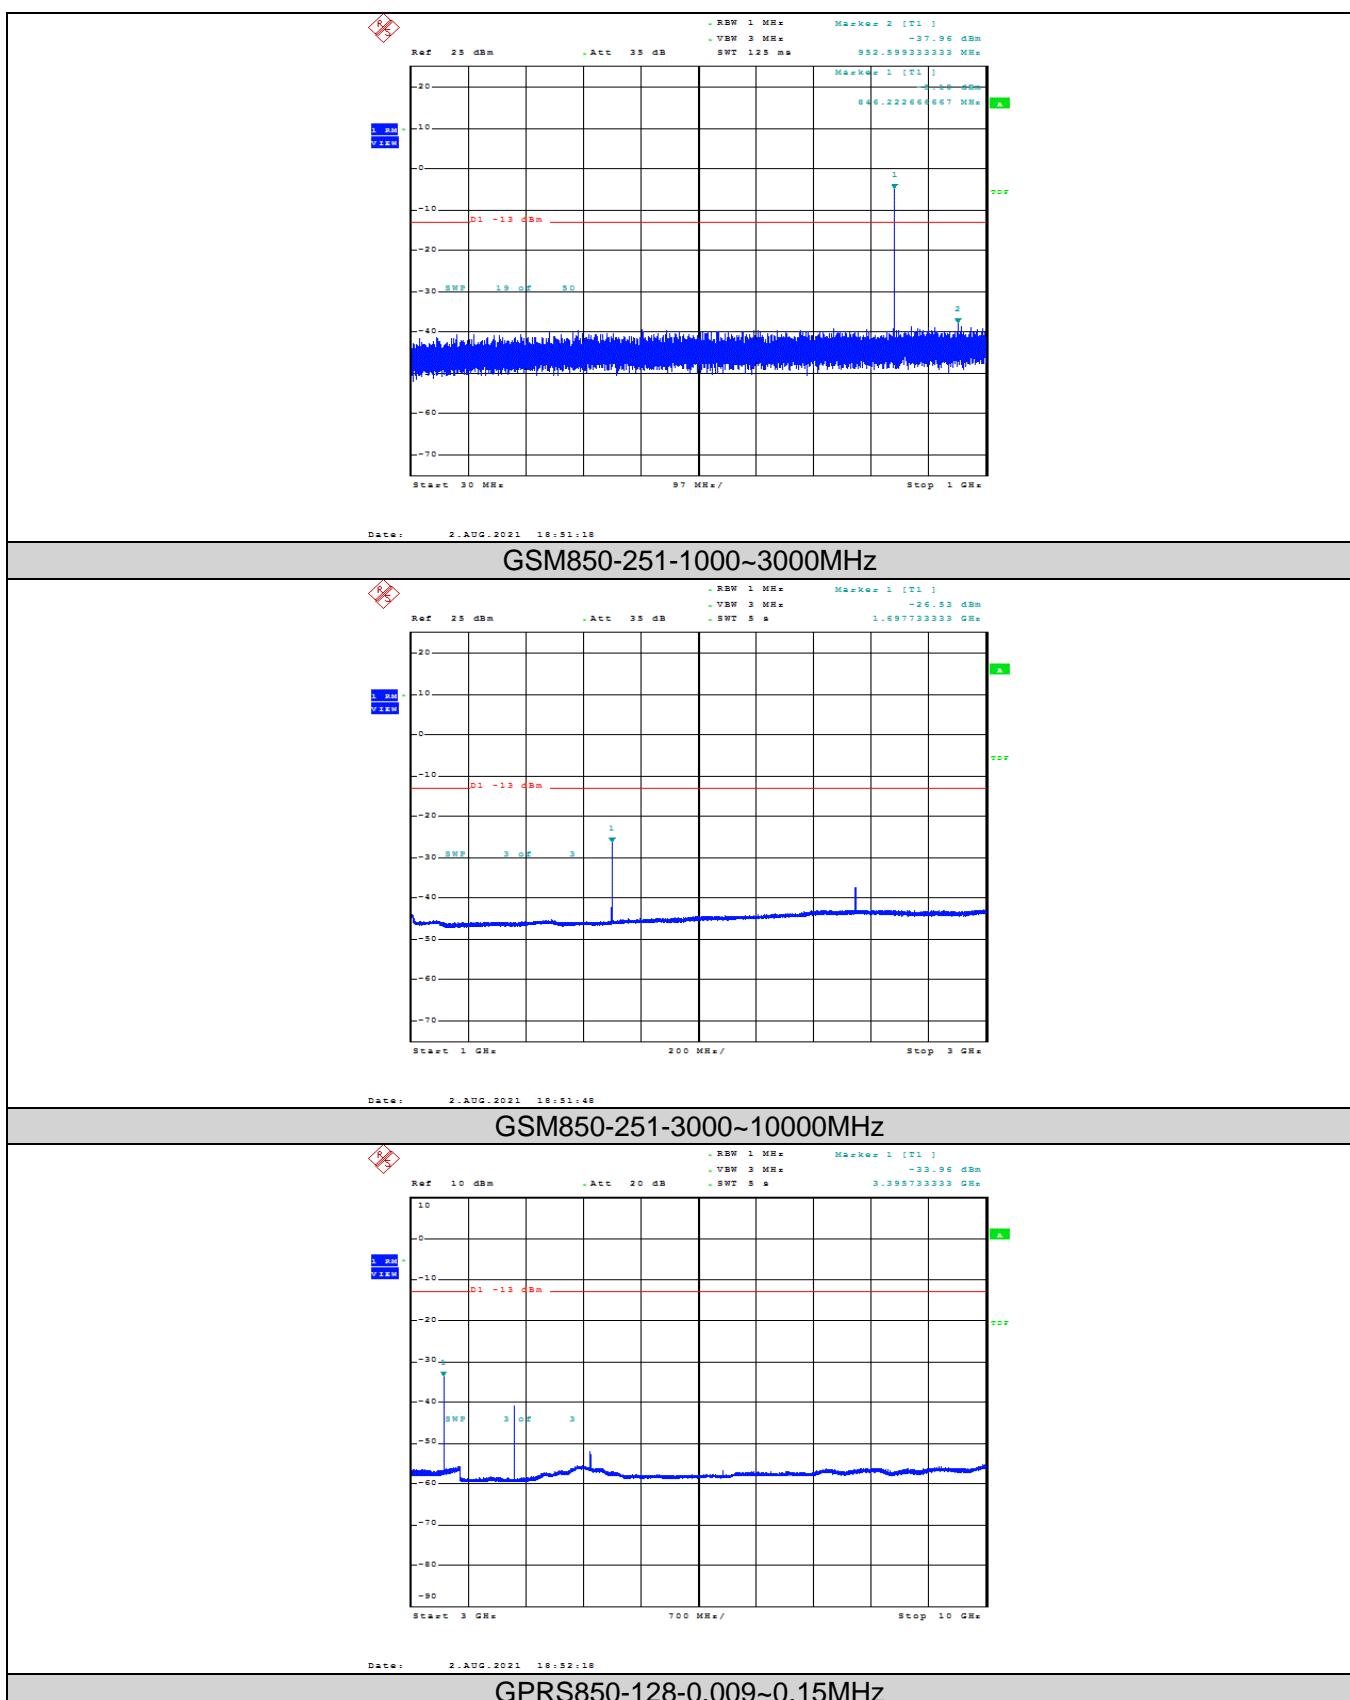



CTC Laboratories, Inc.


 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059


Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

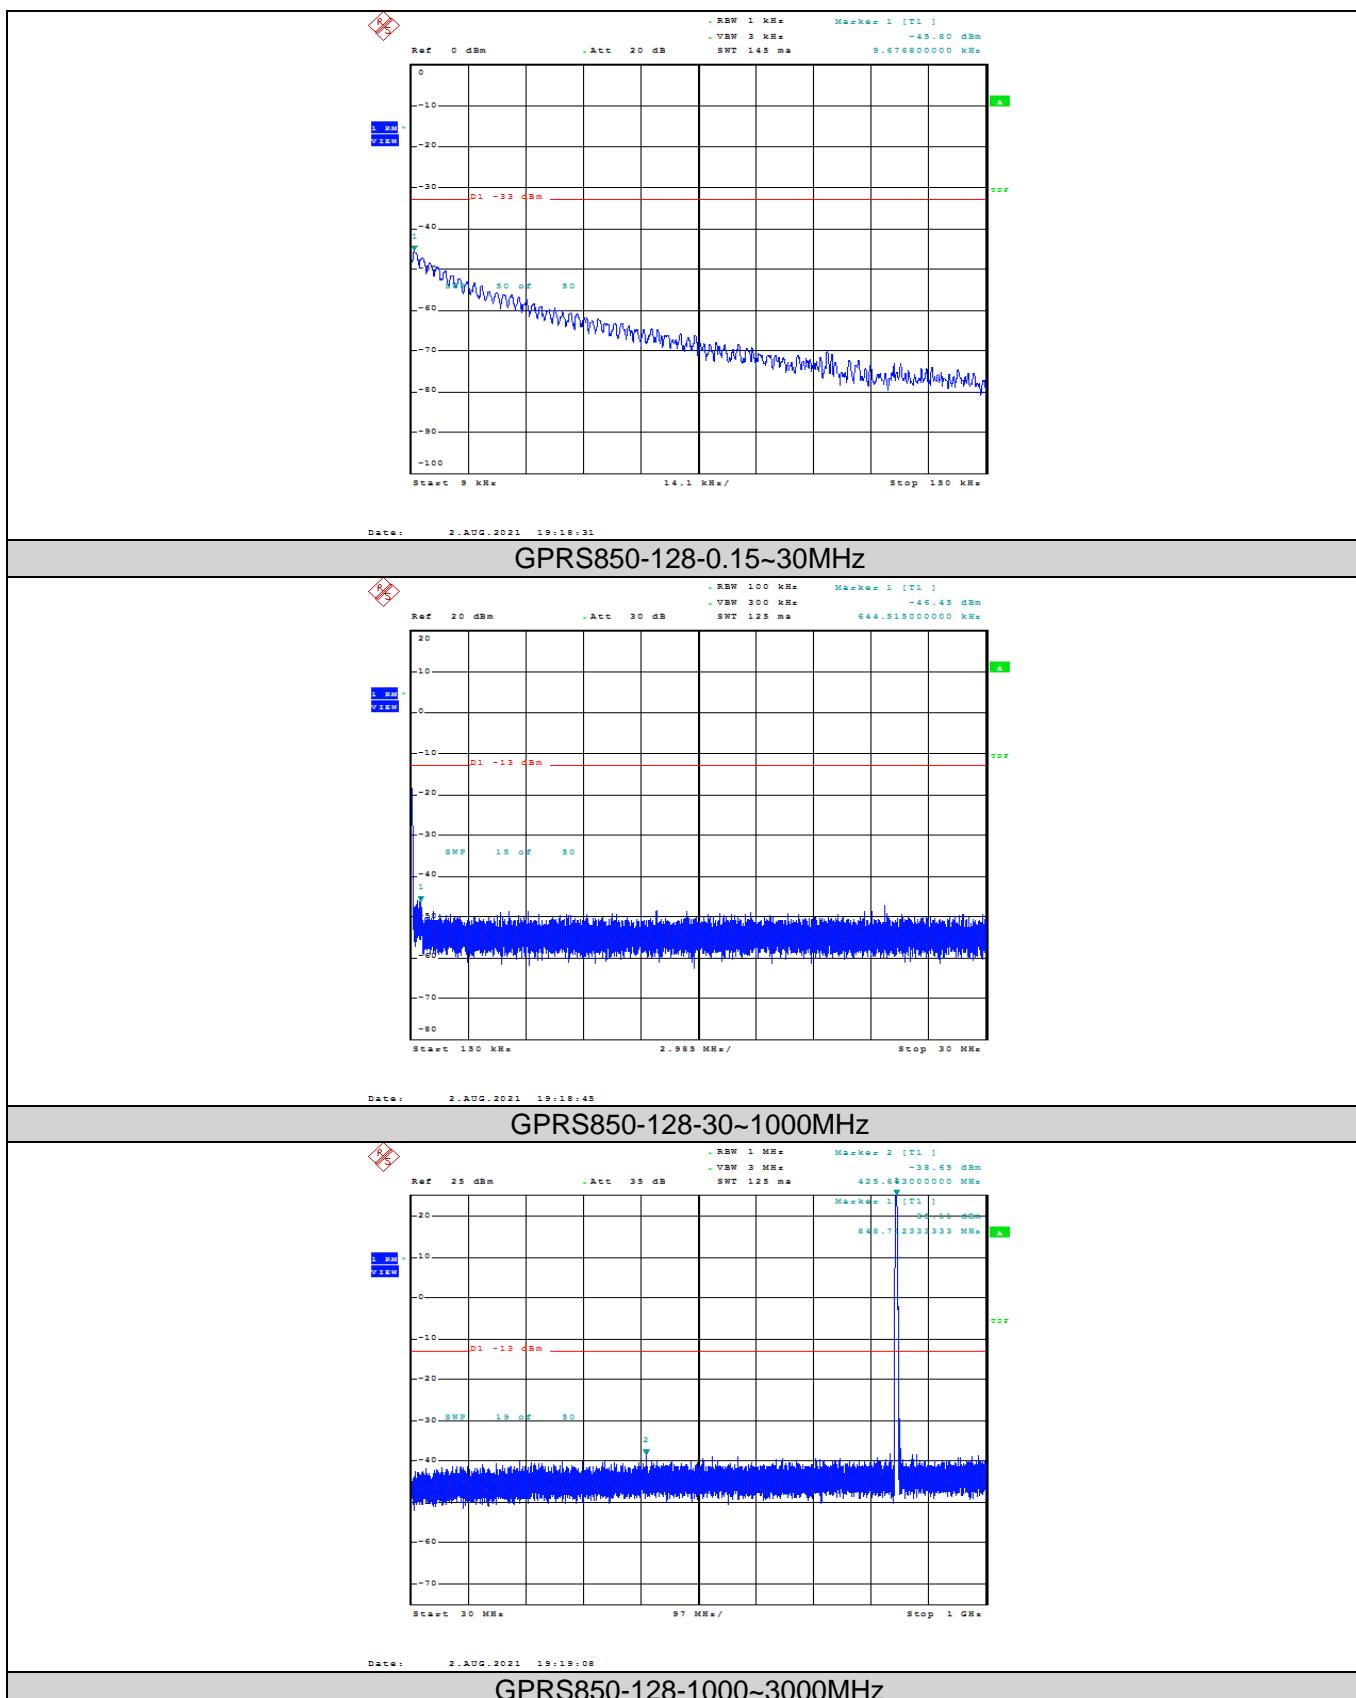

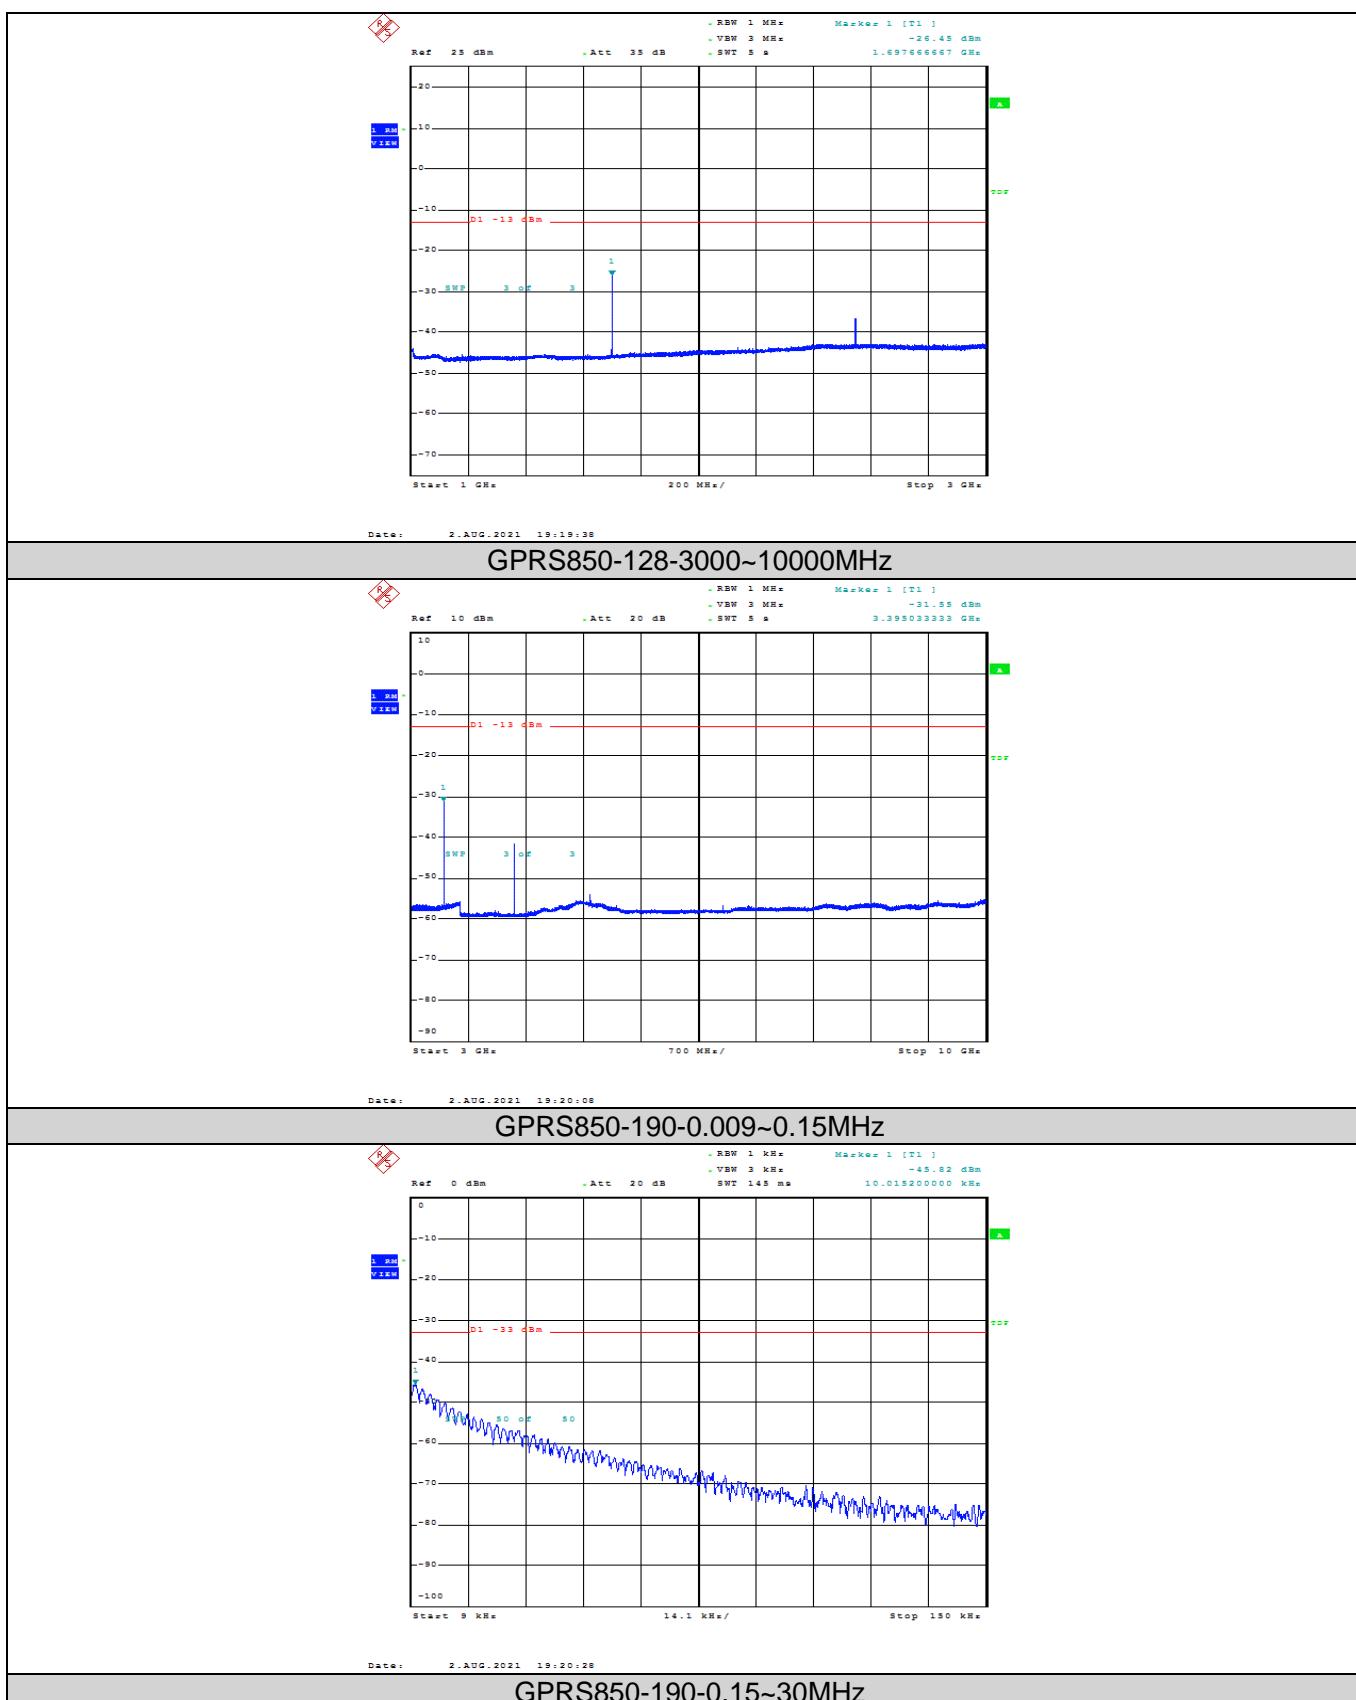

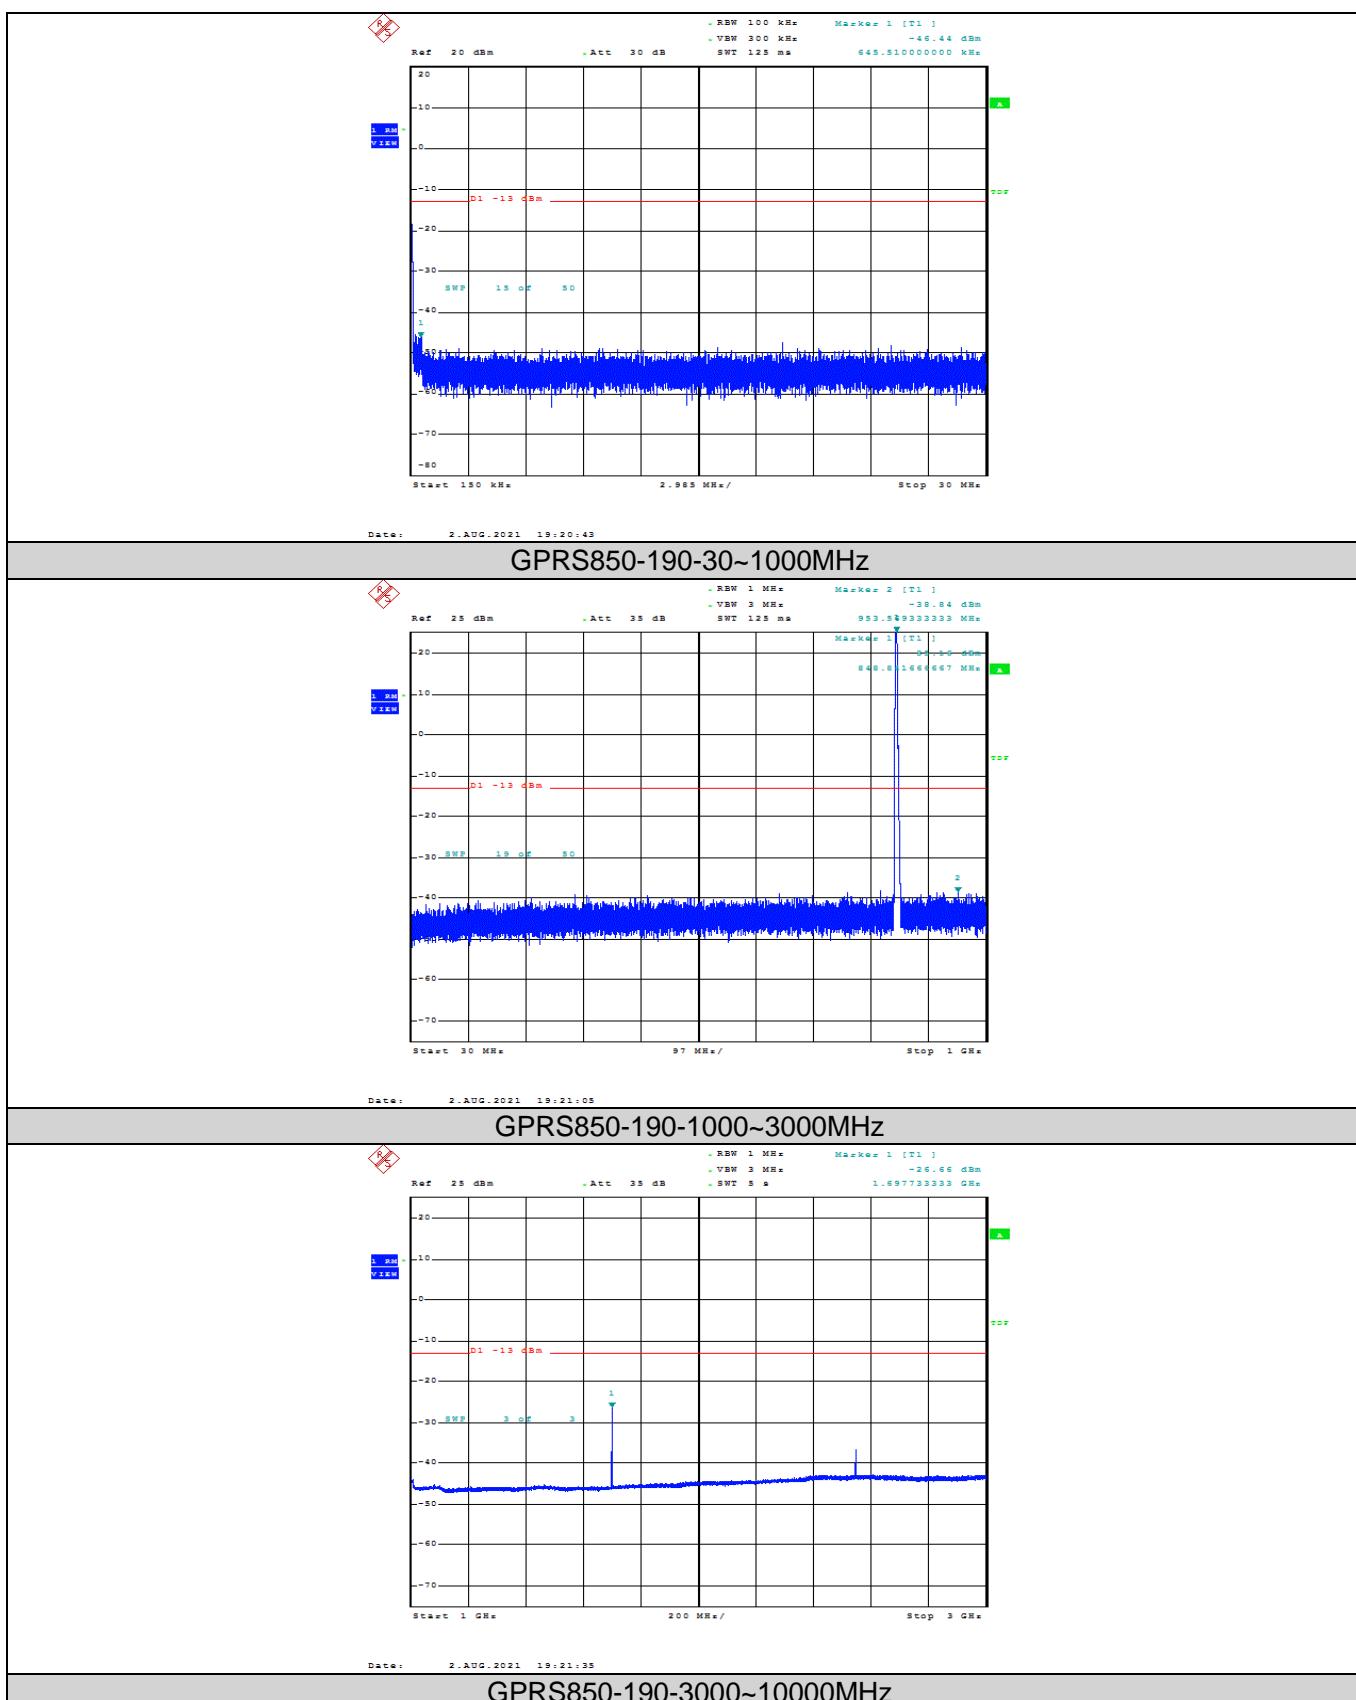

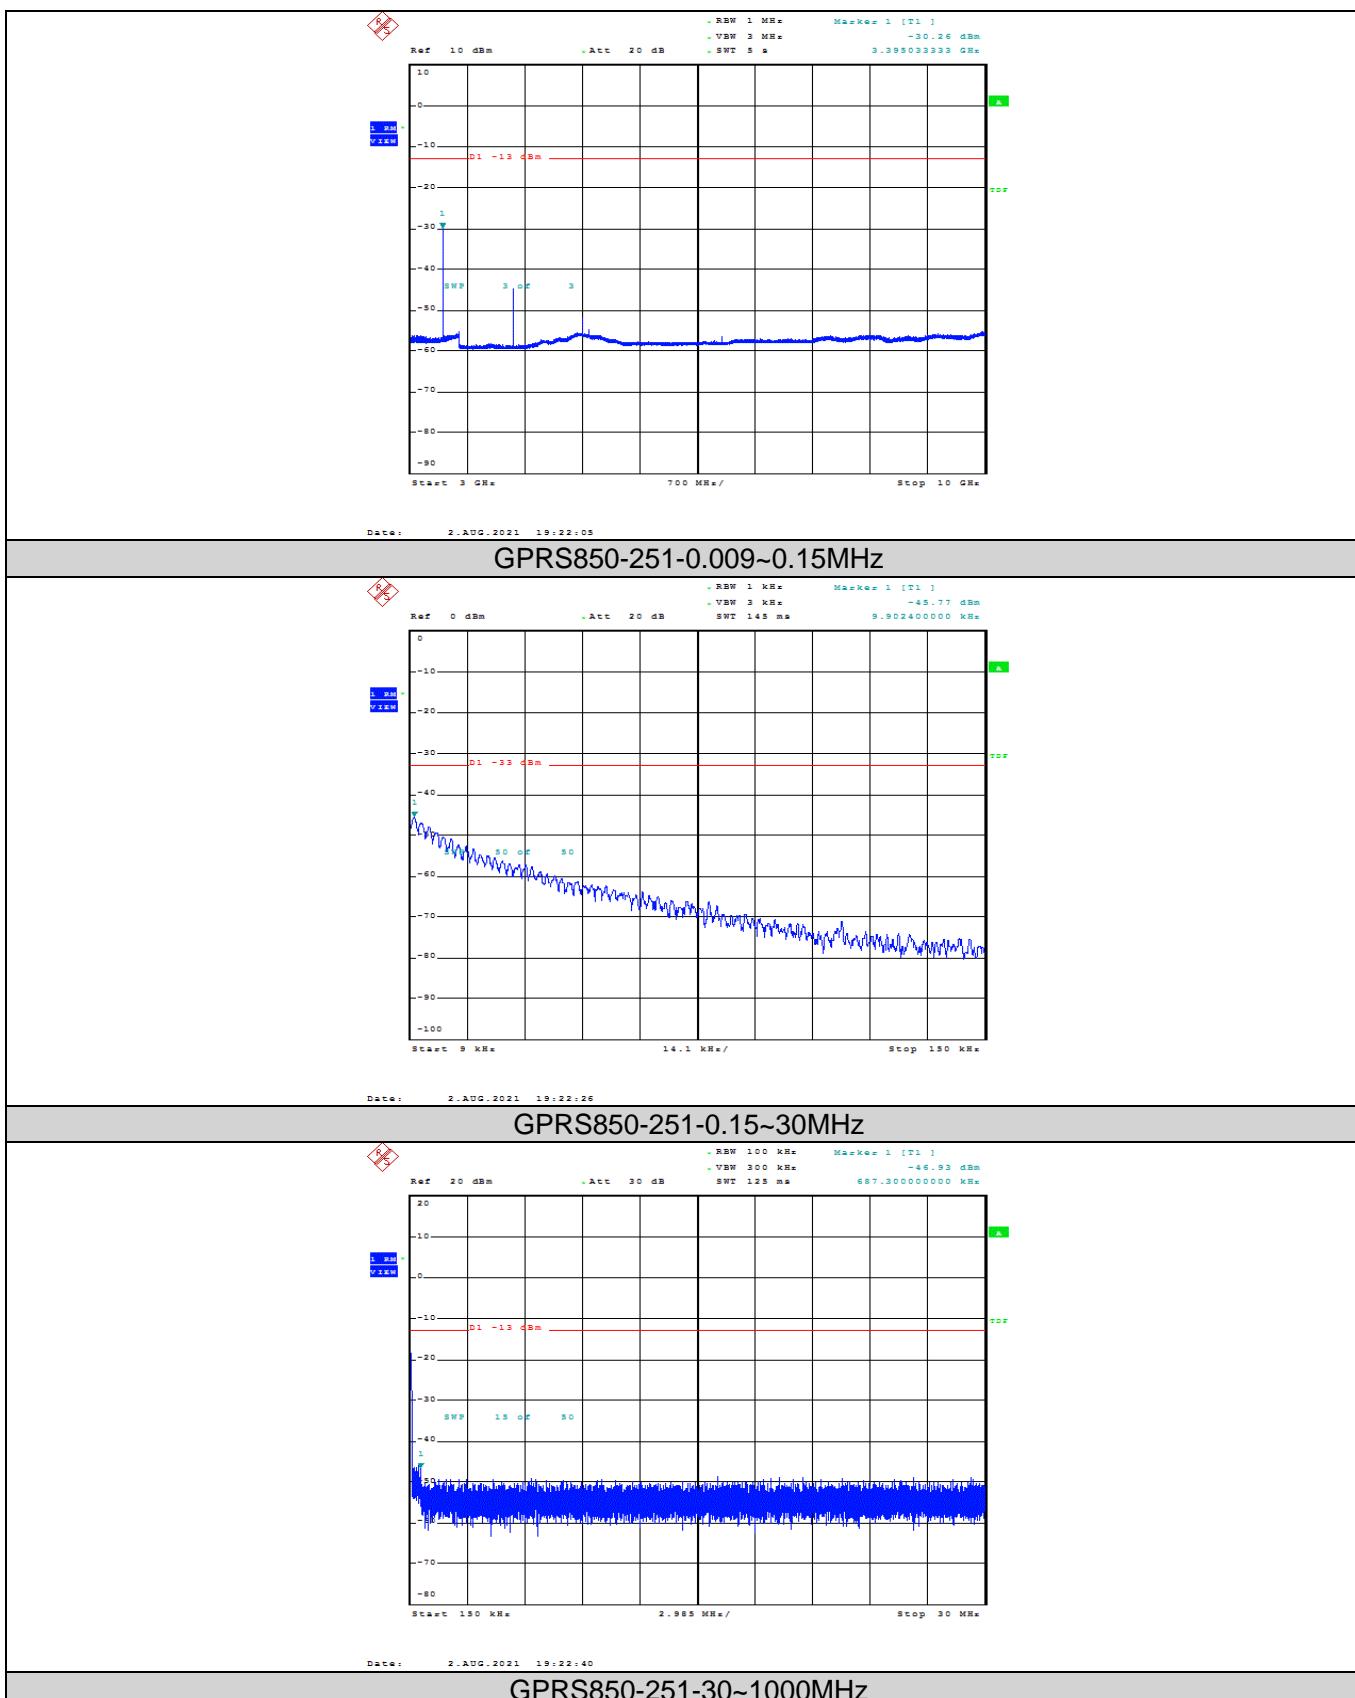

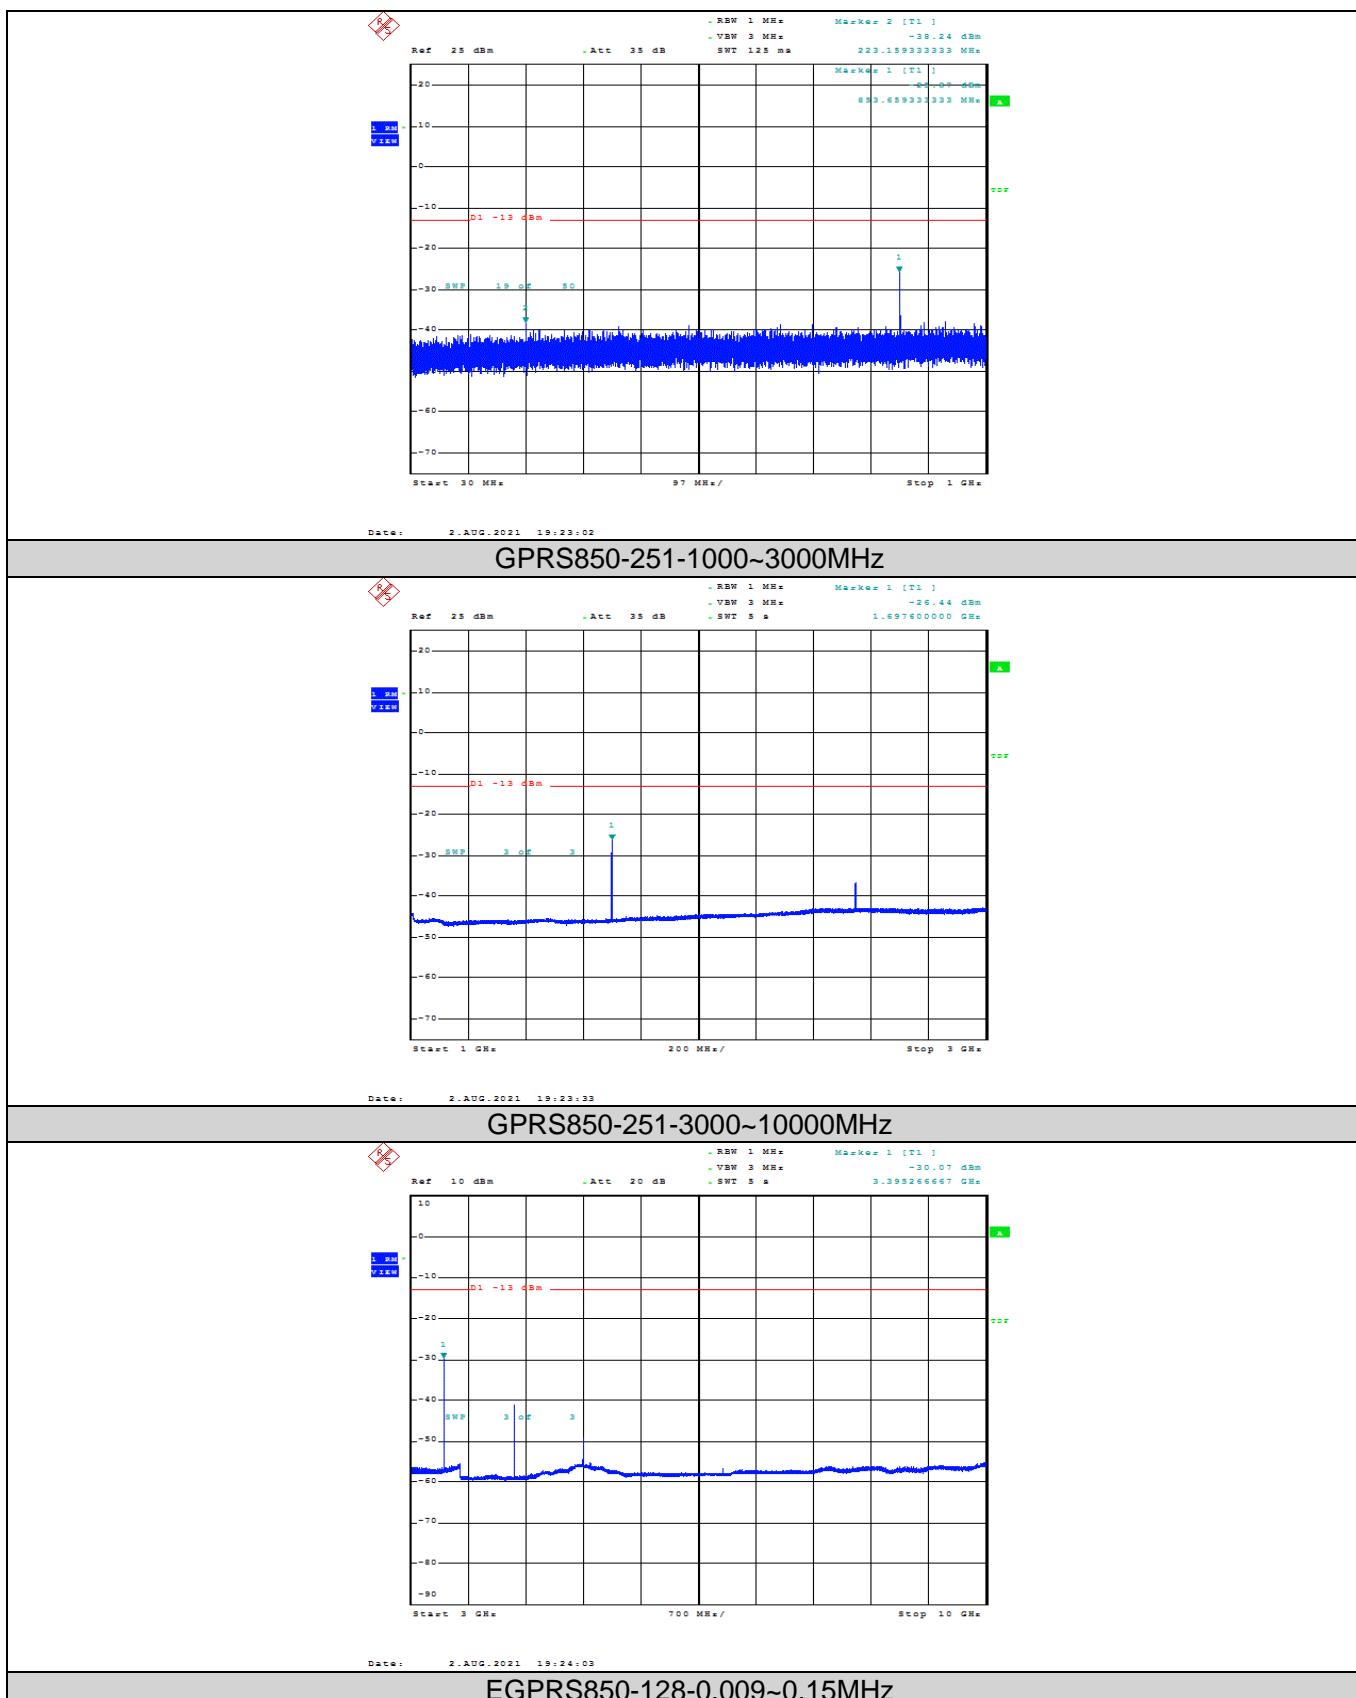



CTC Laboratories, Inc.

 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

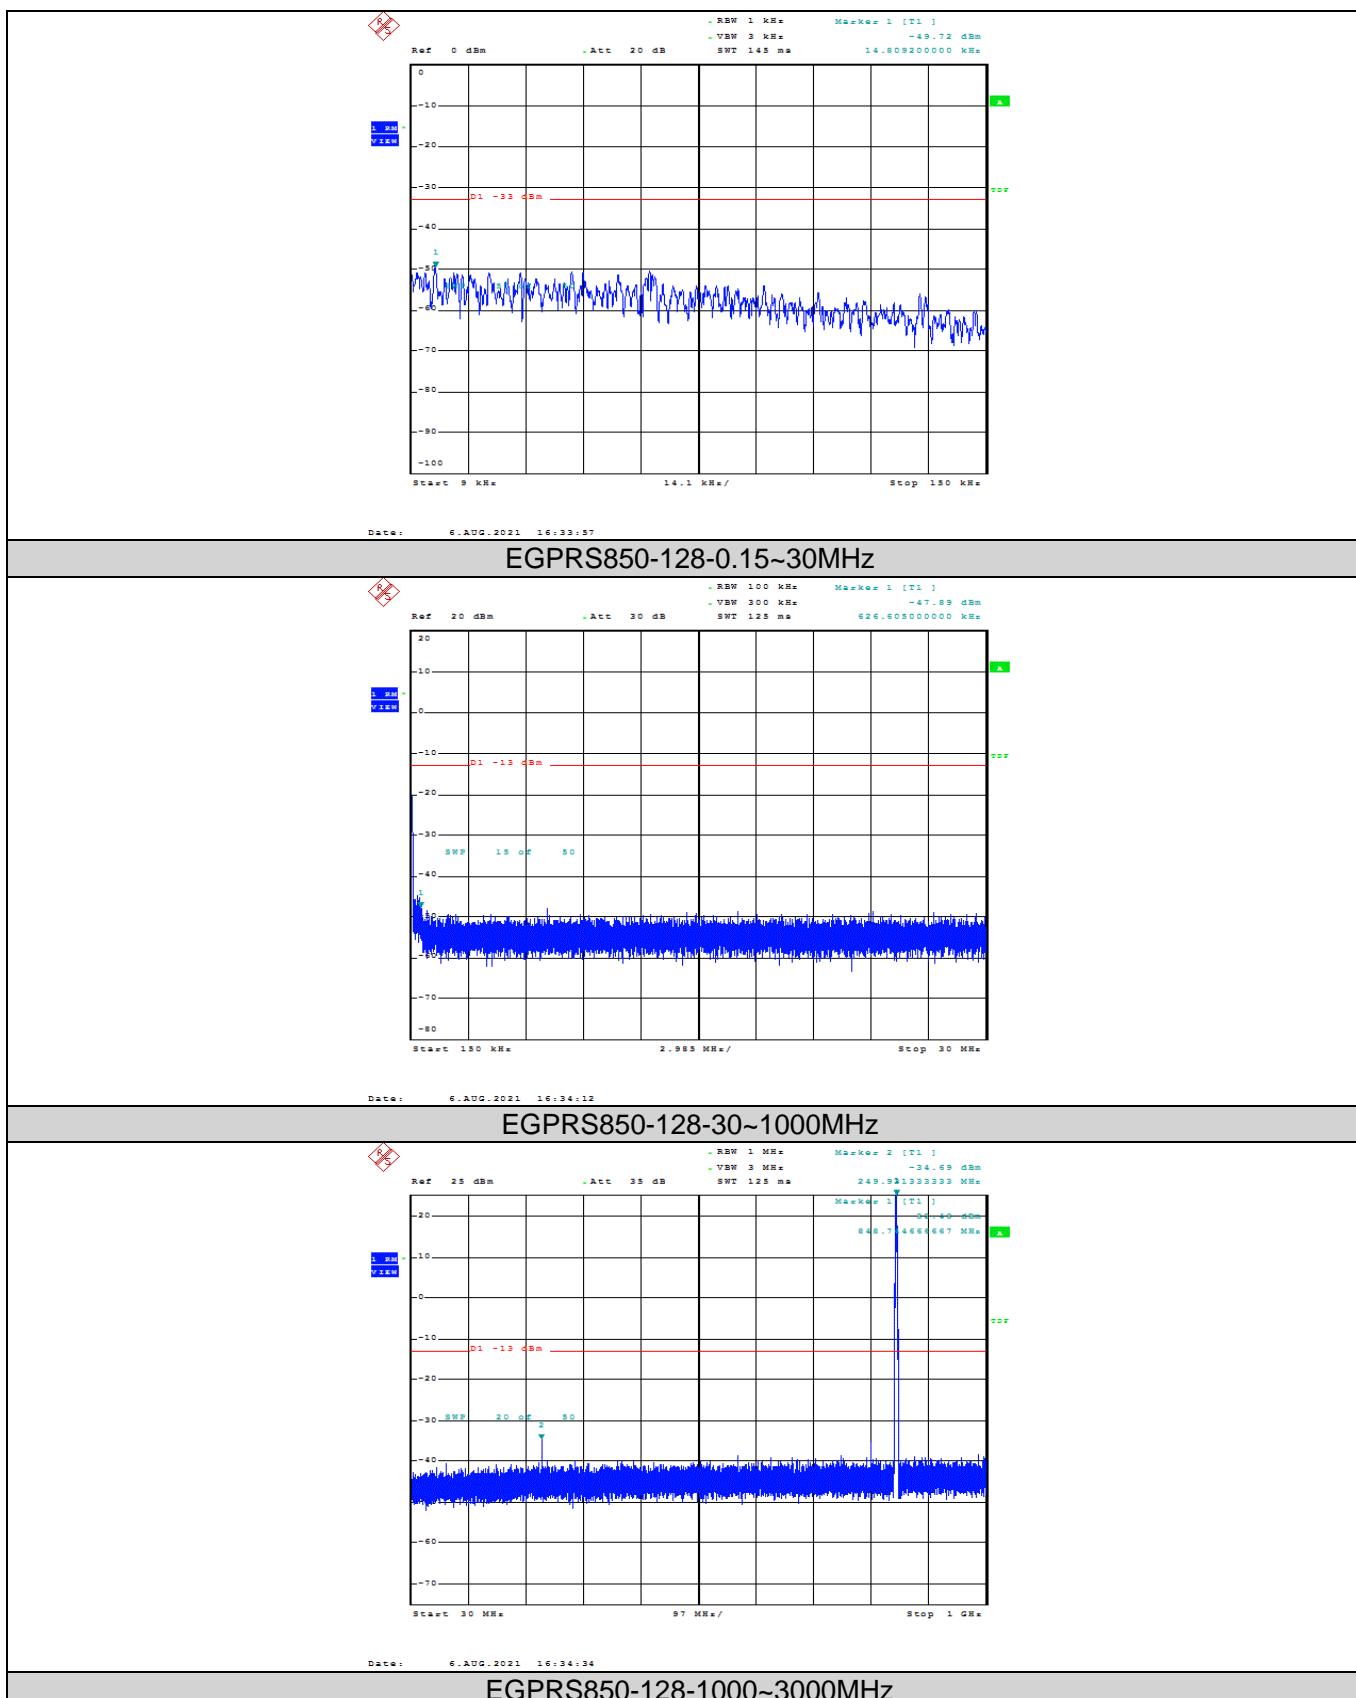


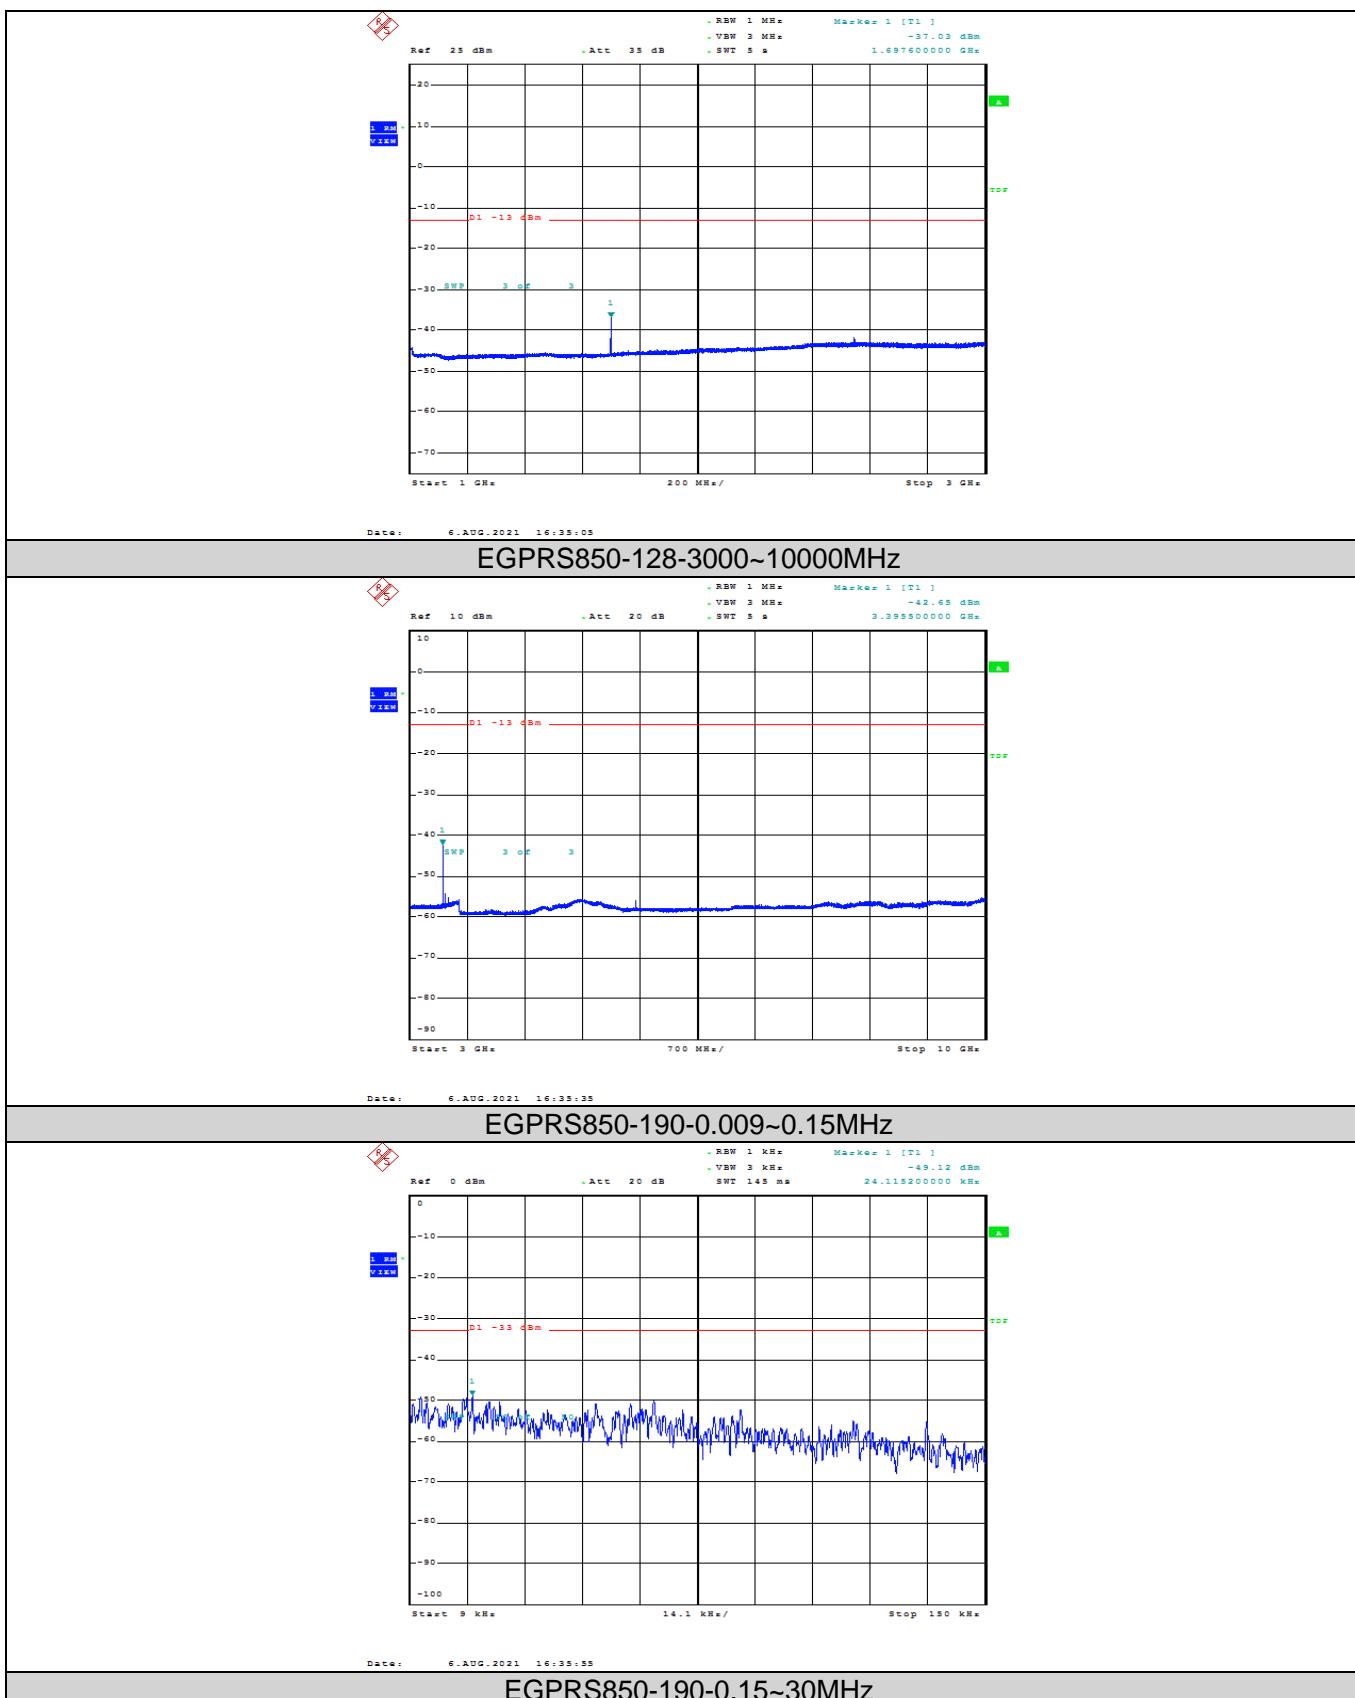



CTC Laboratories, Inc.

 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

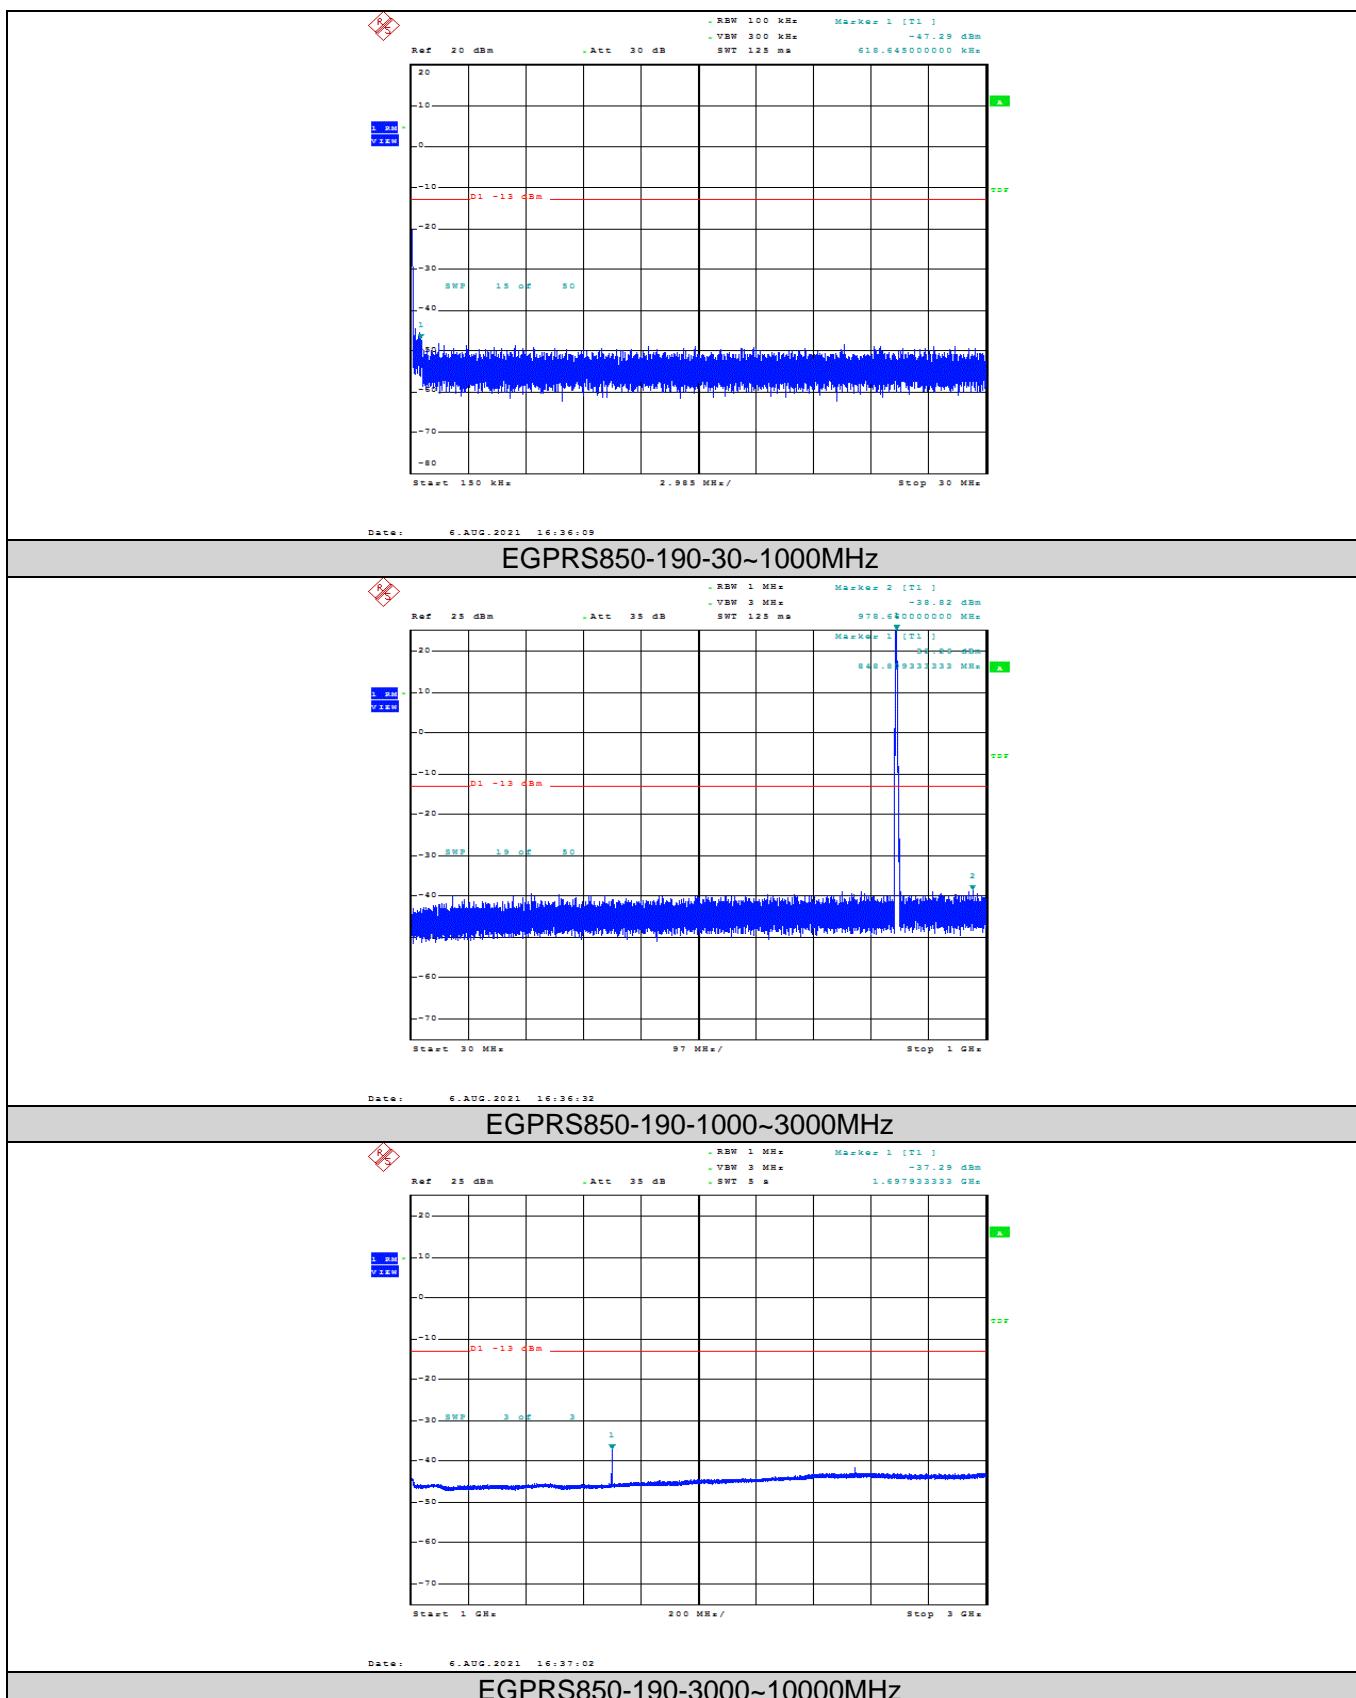

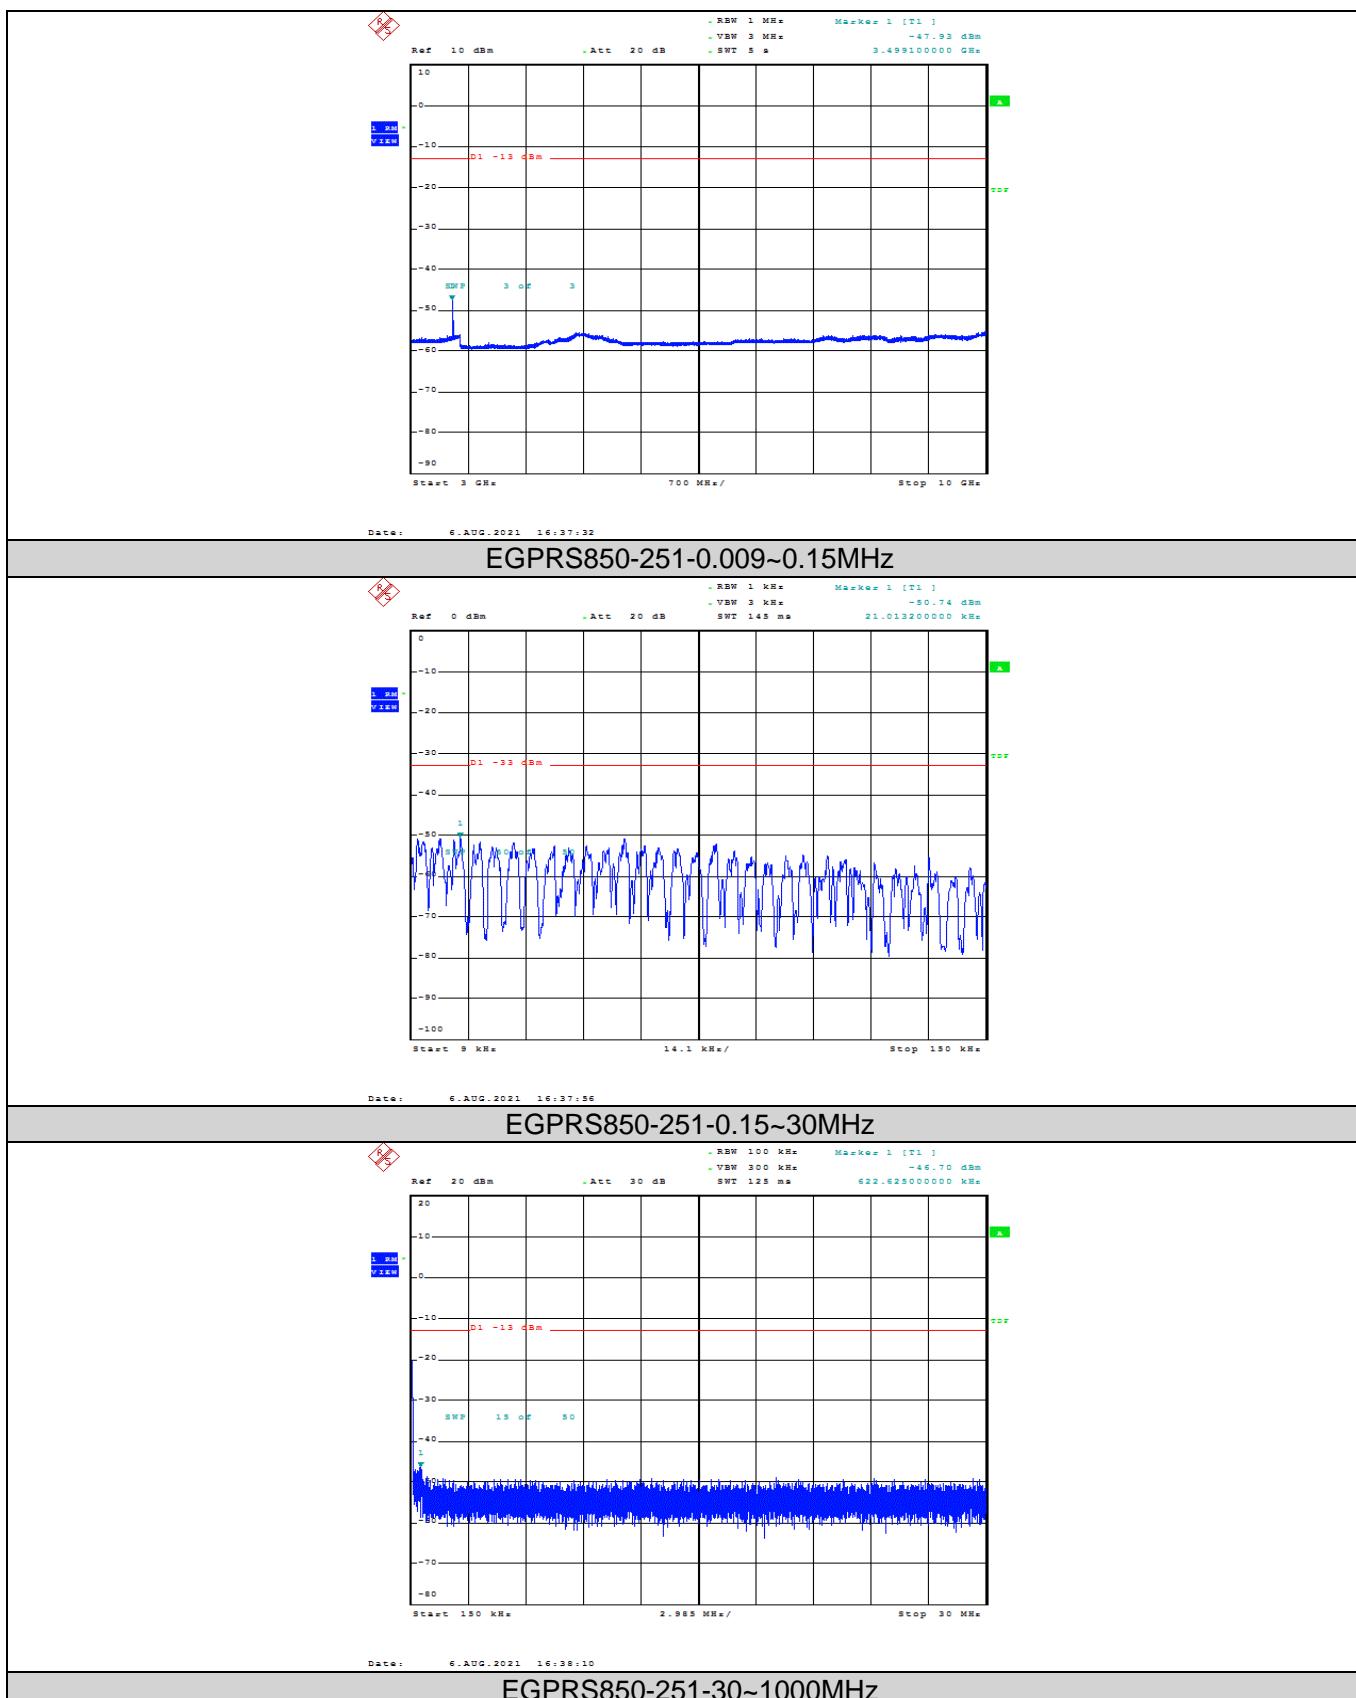

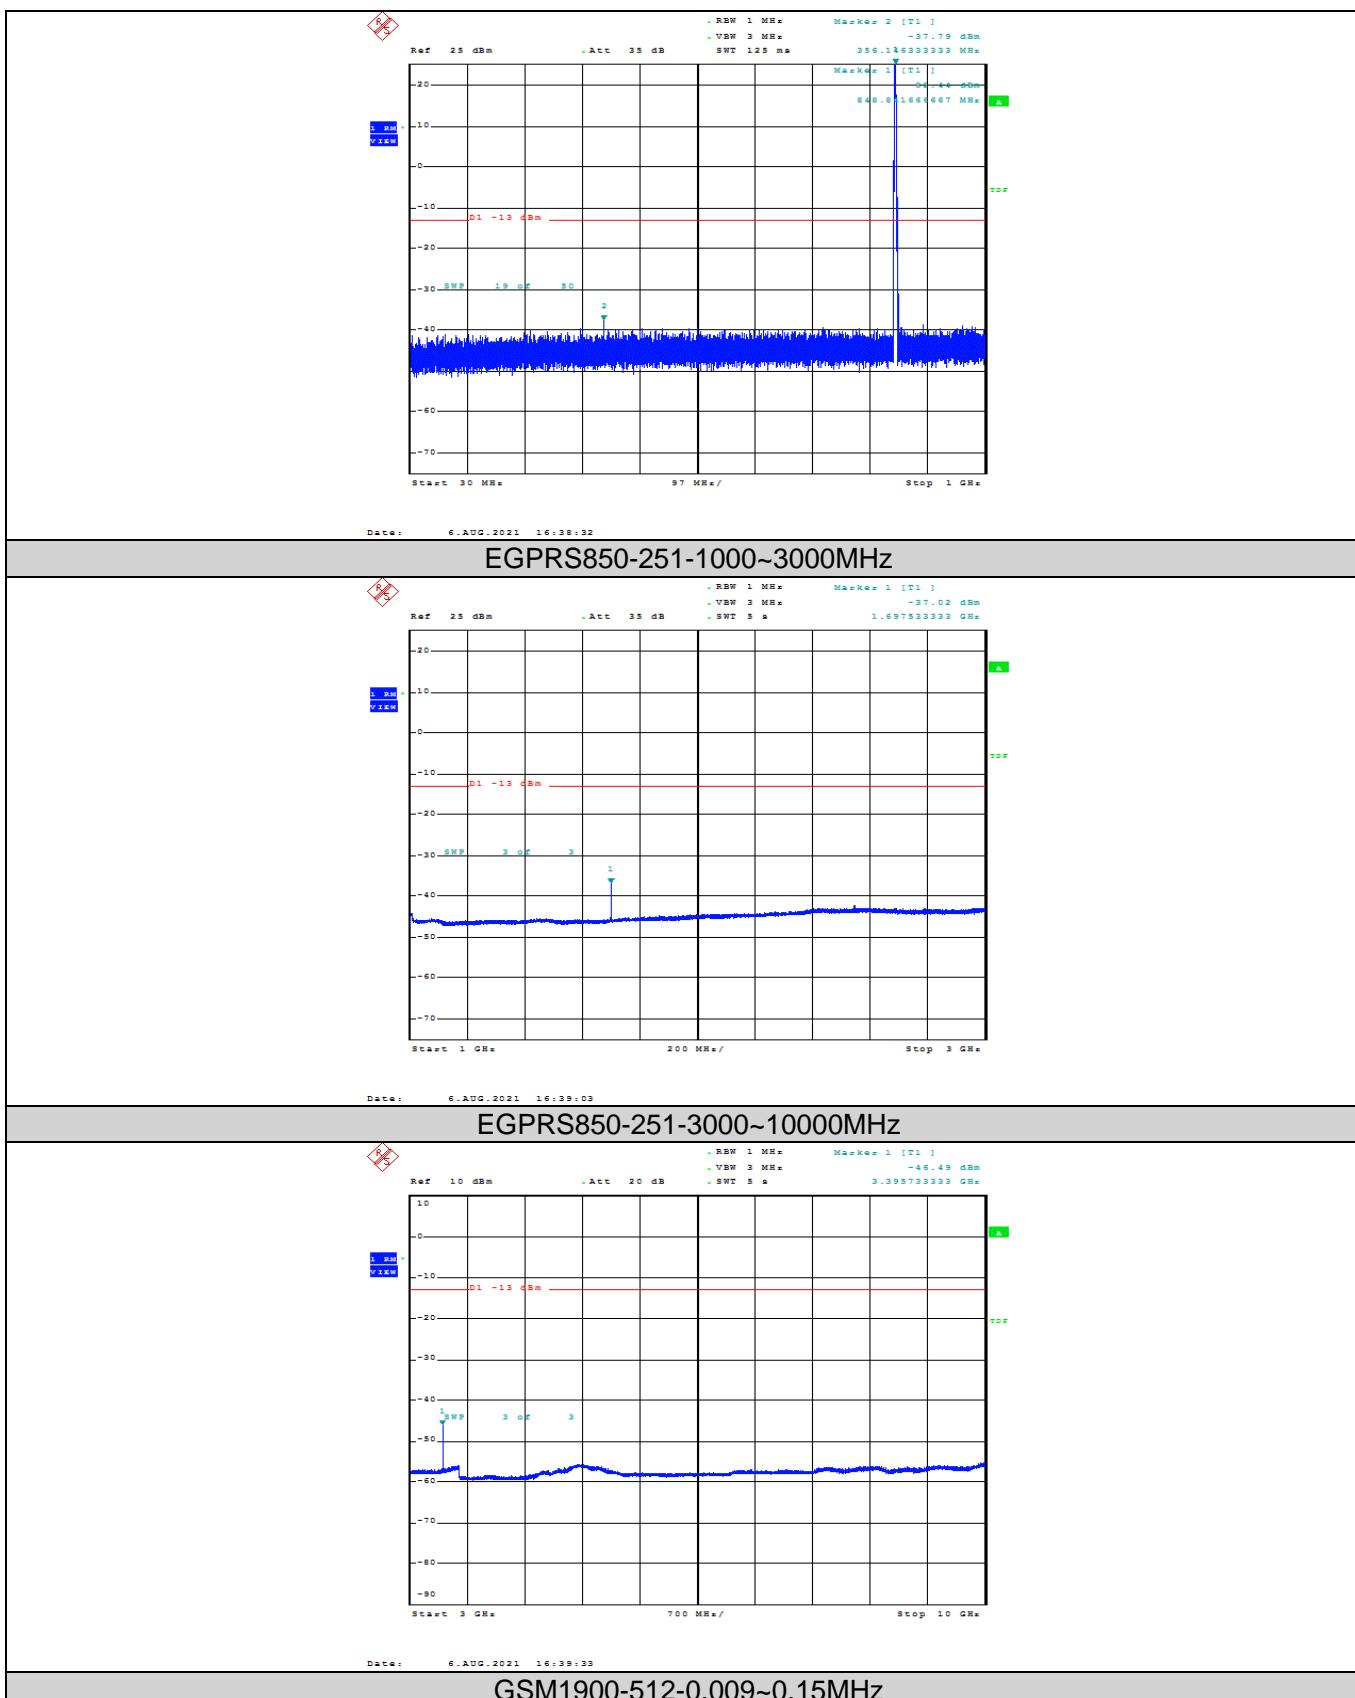


CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

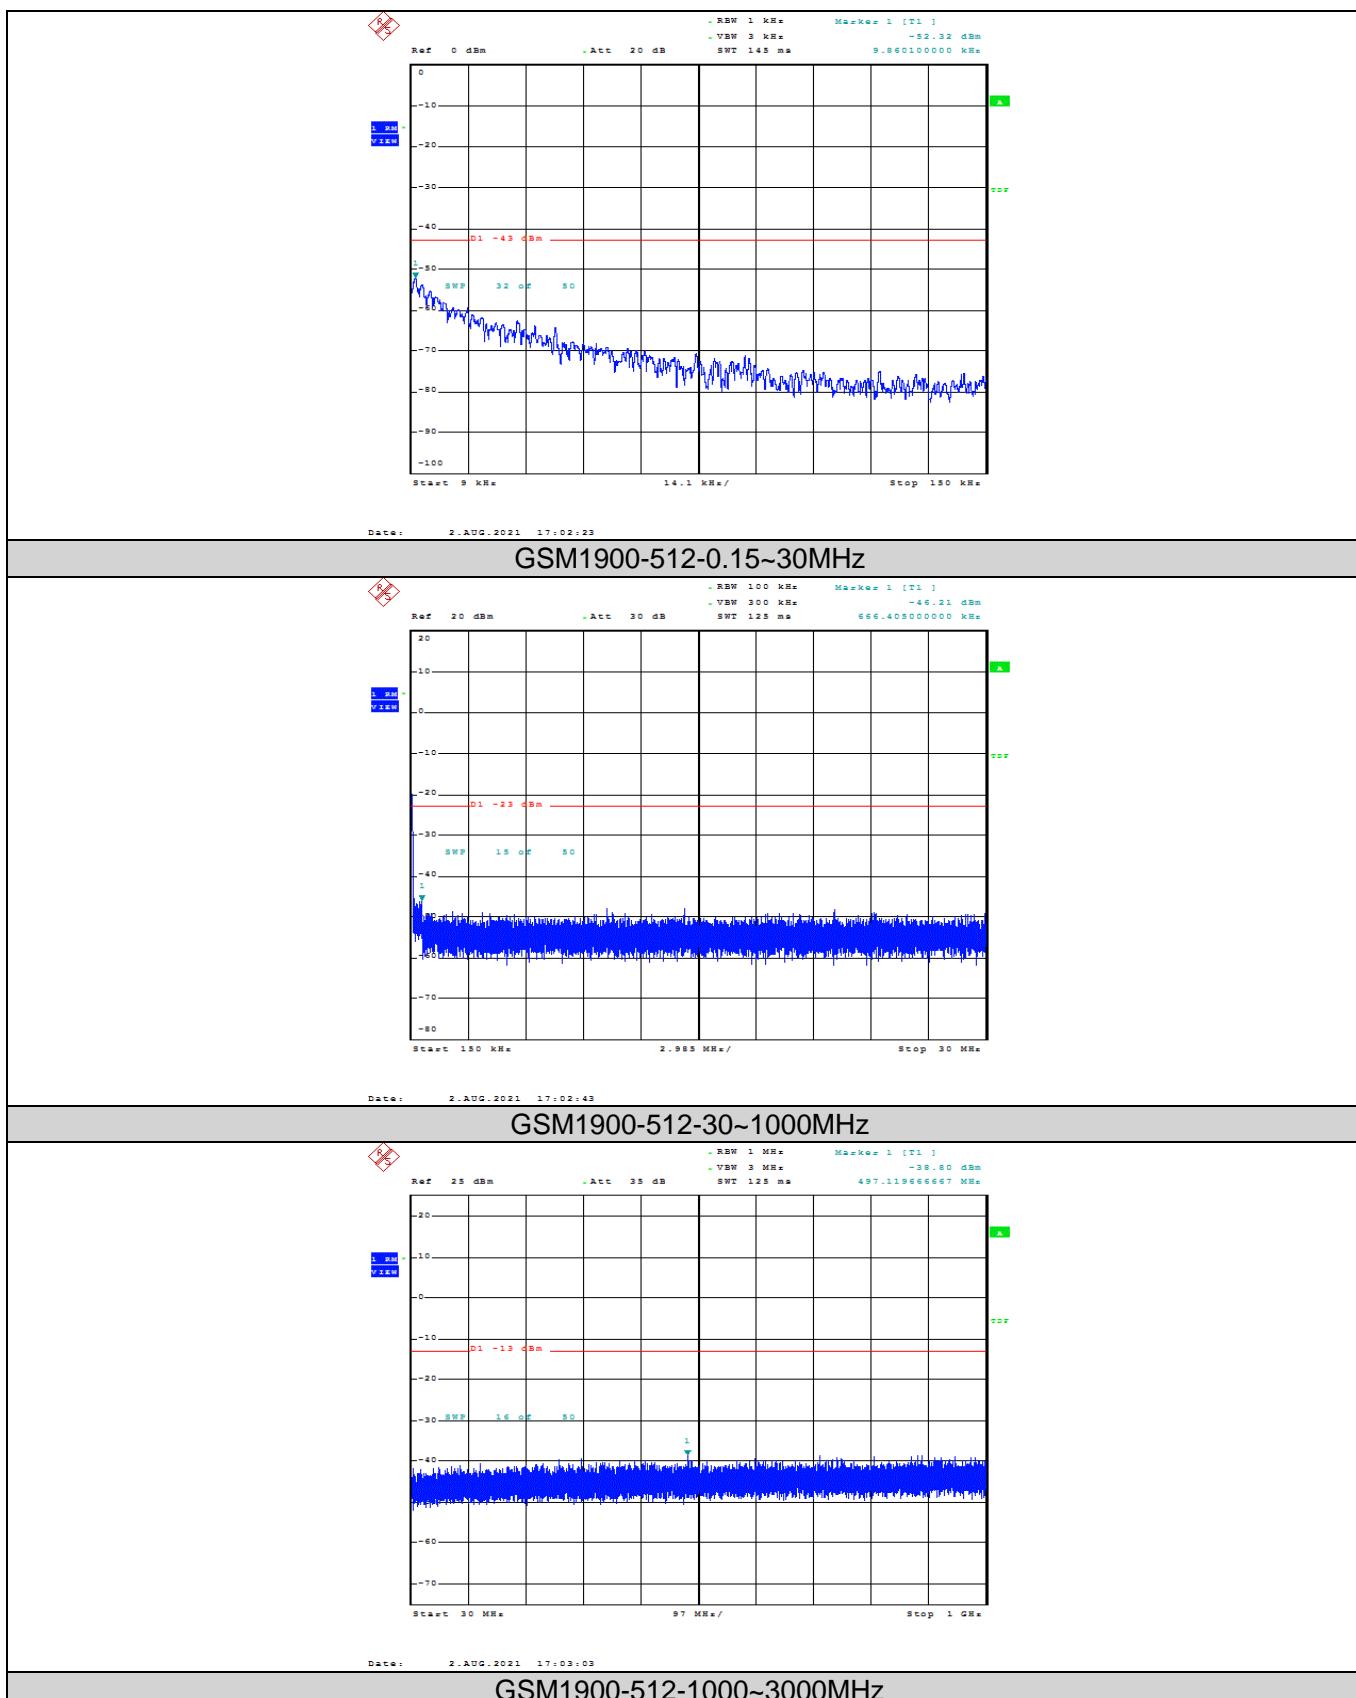


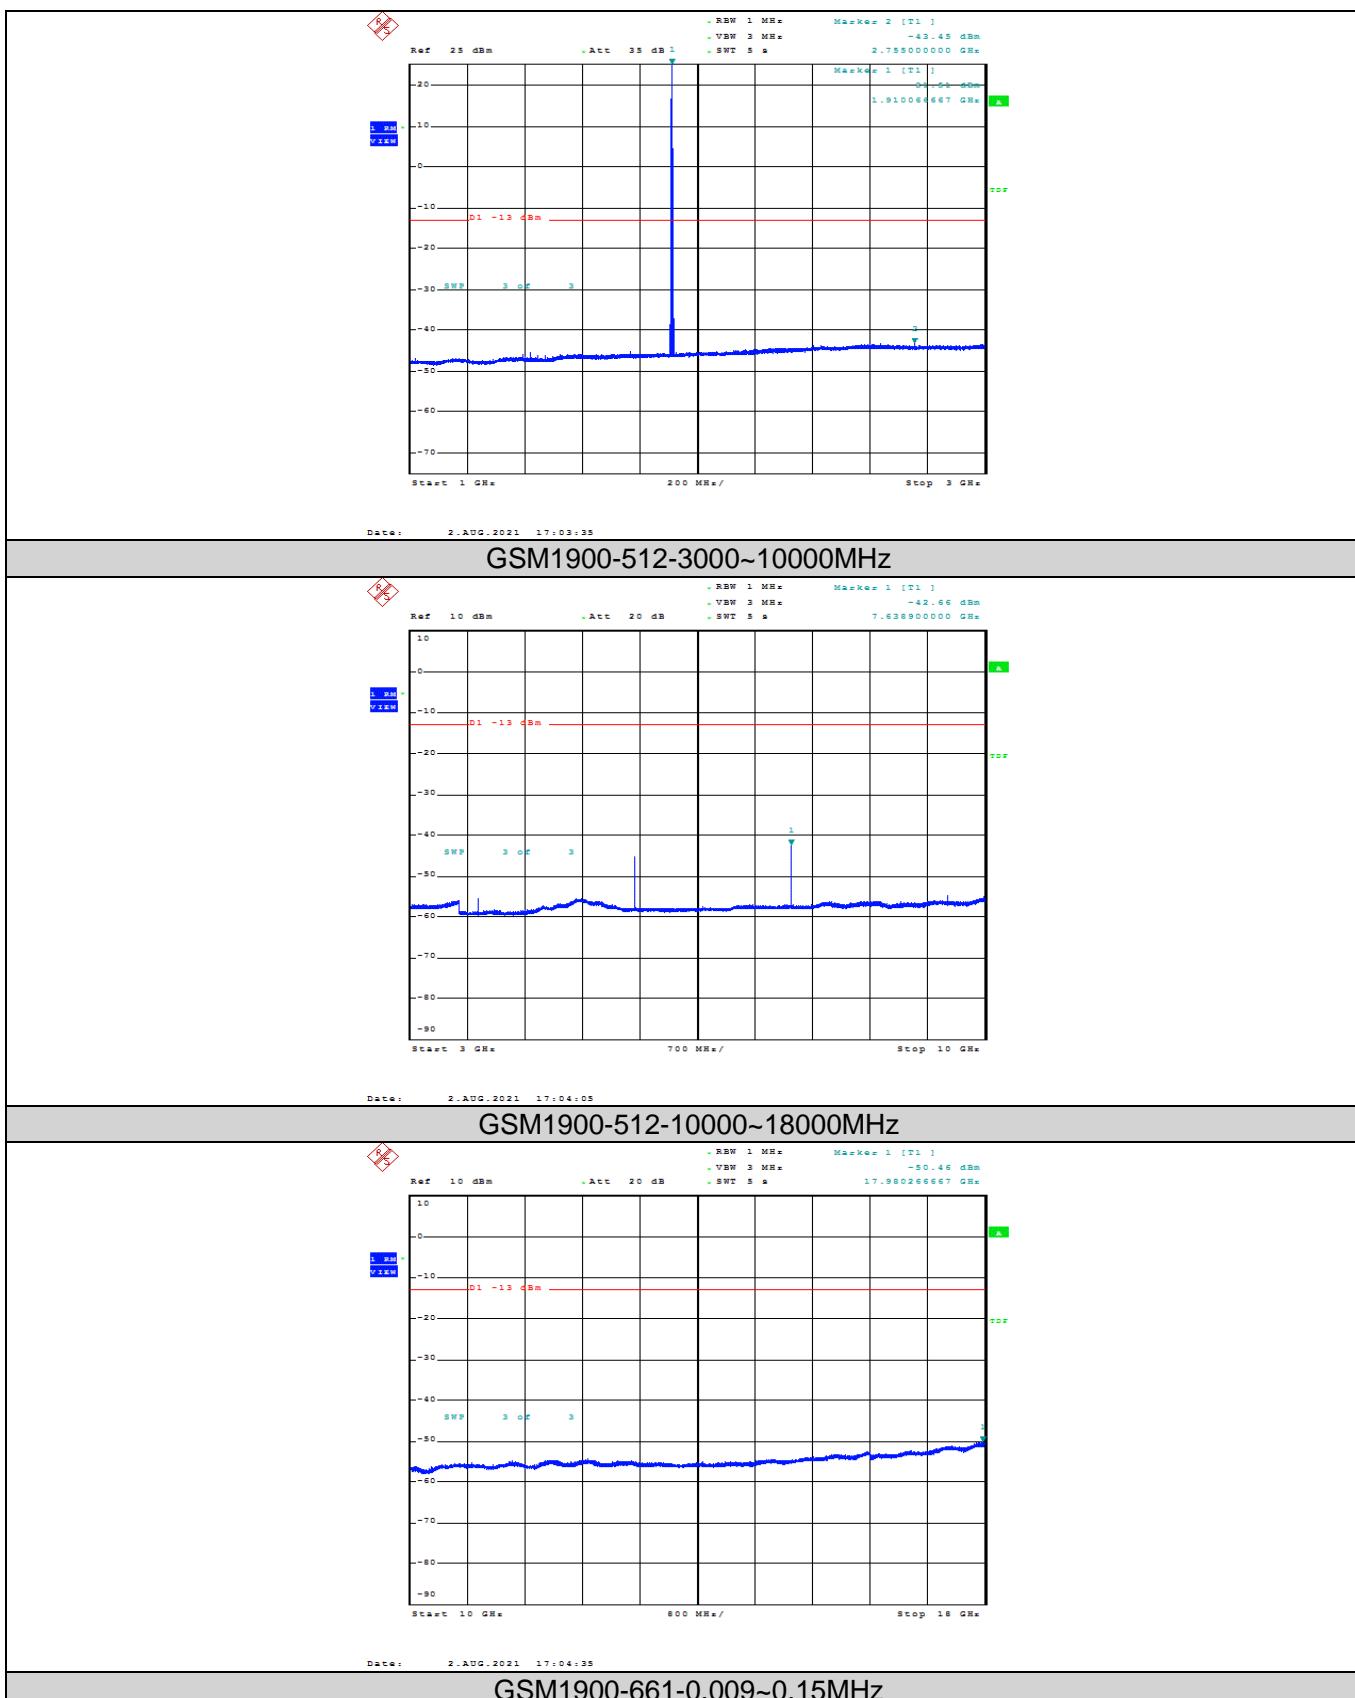

CTC Laboratories, Inc.
1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn
EN 中国国家认证认可监督管理委员会
Certification and Accreditation Administration of the People's Republic of China

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cncacn](http://www.cncacn.org)

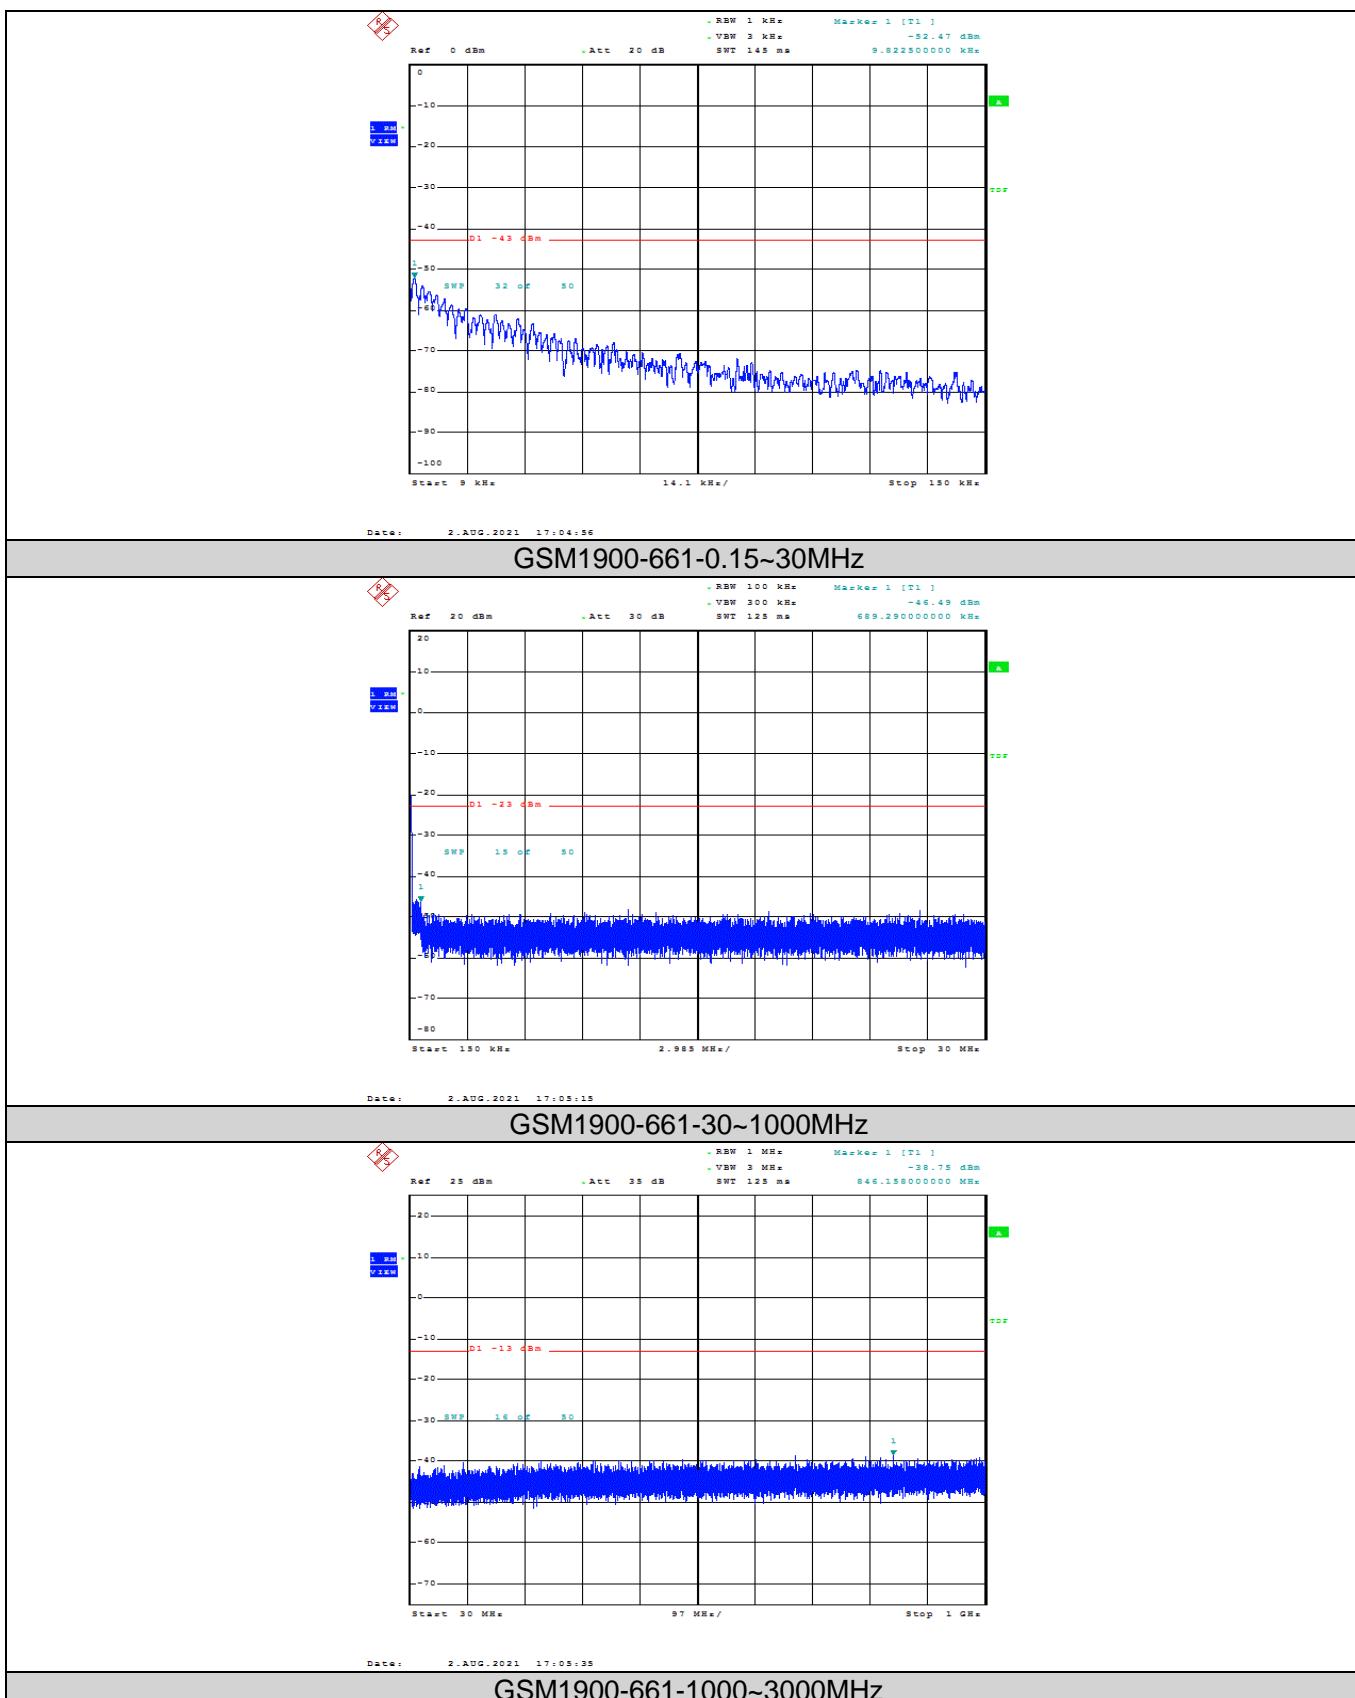

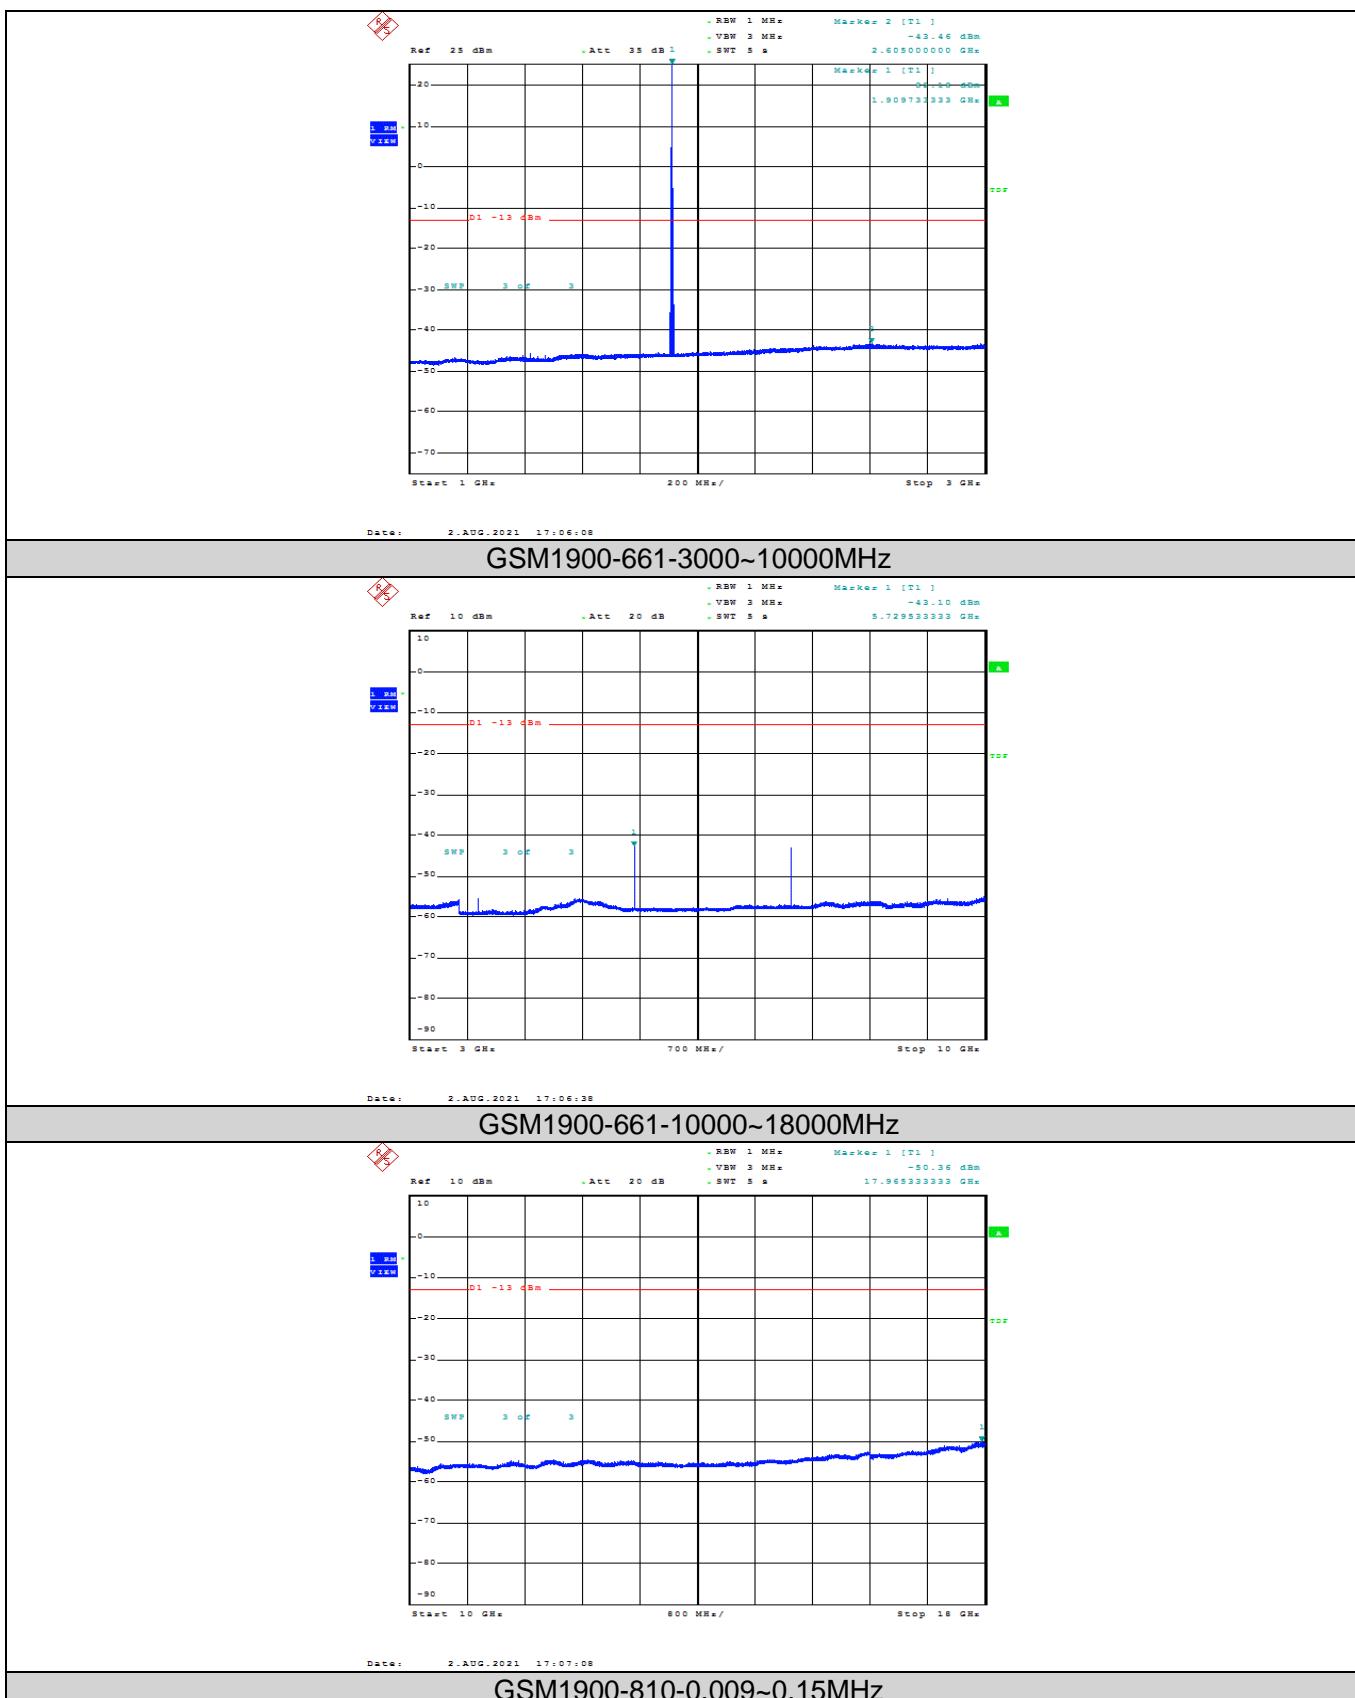



CTC Laboratories, Inc.


 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059


Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

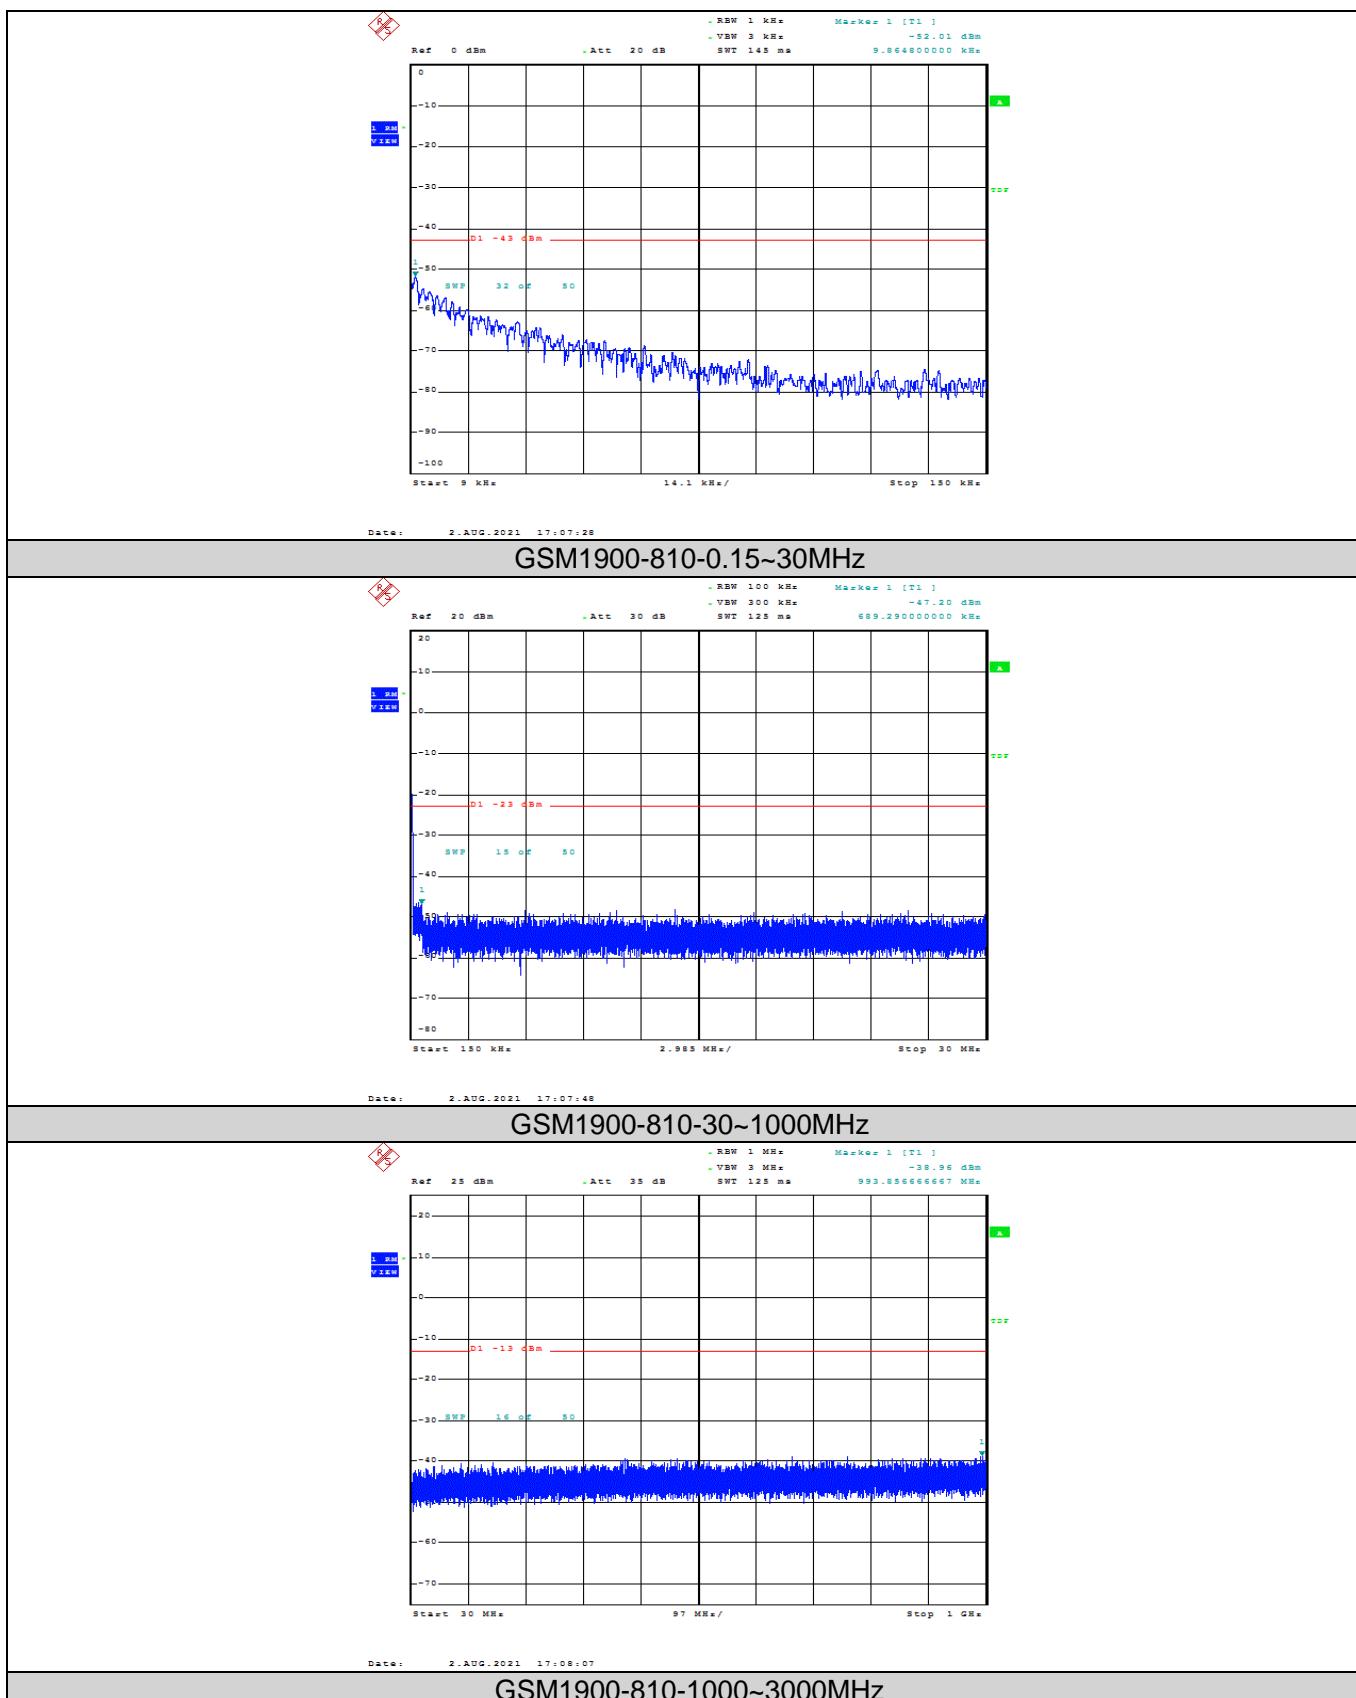

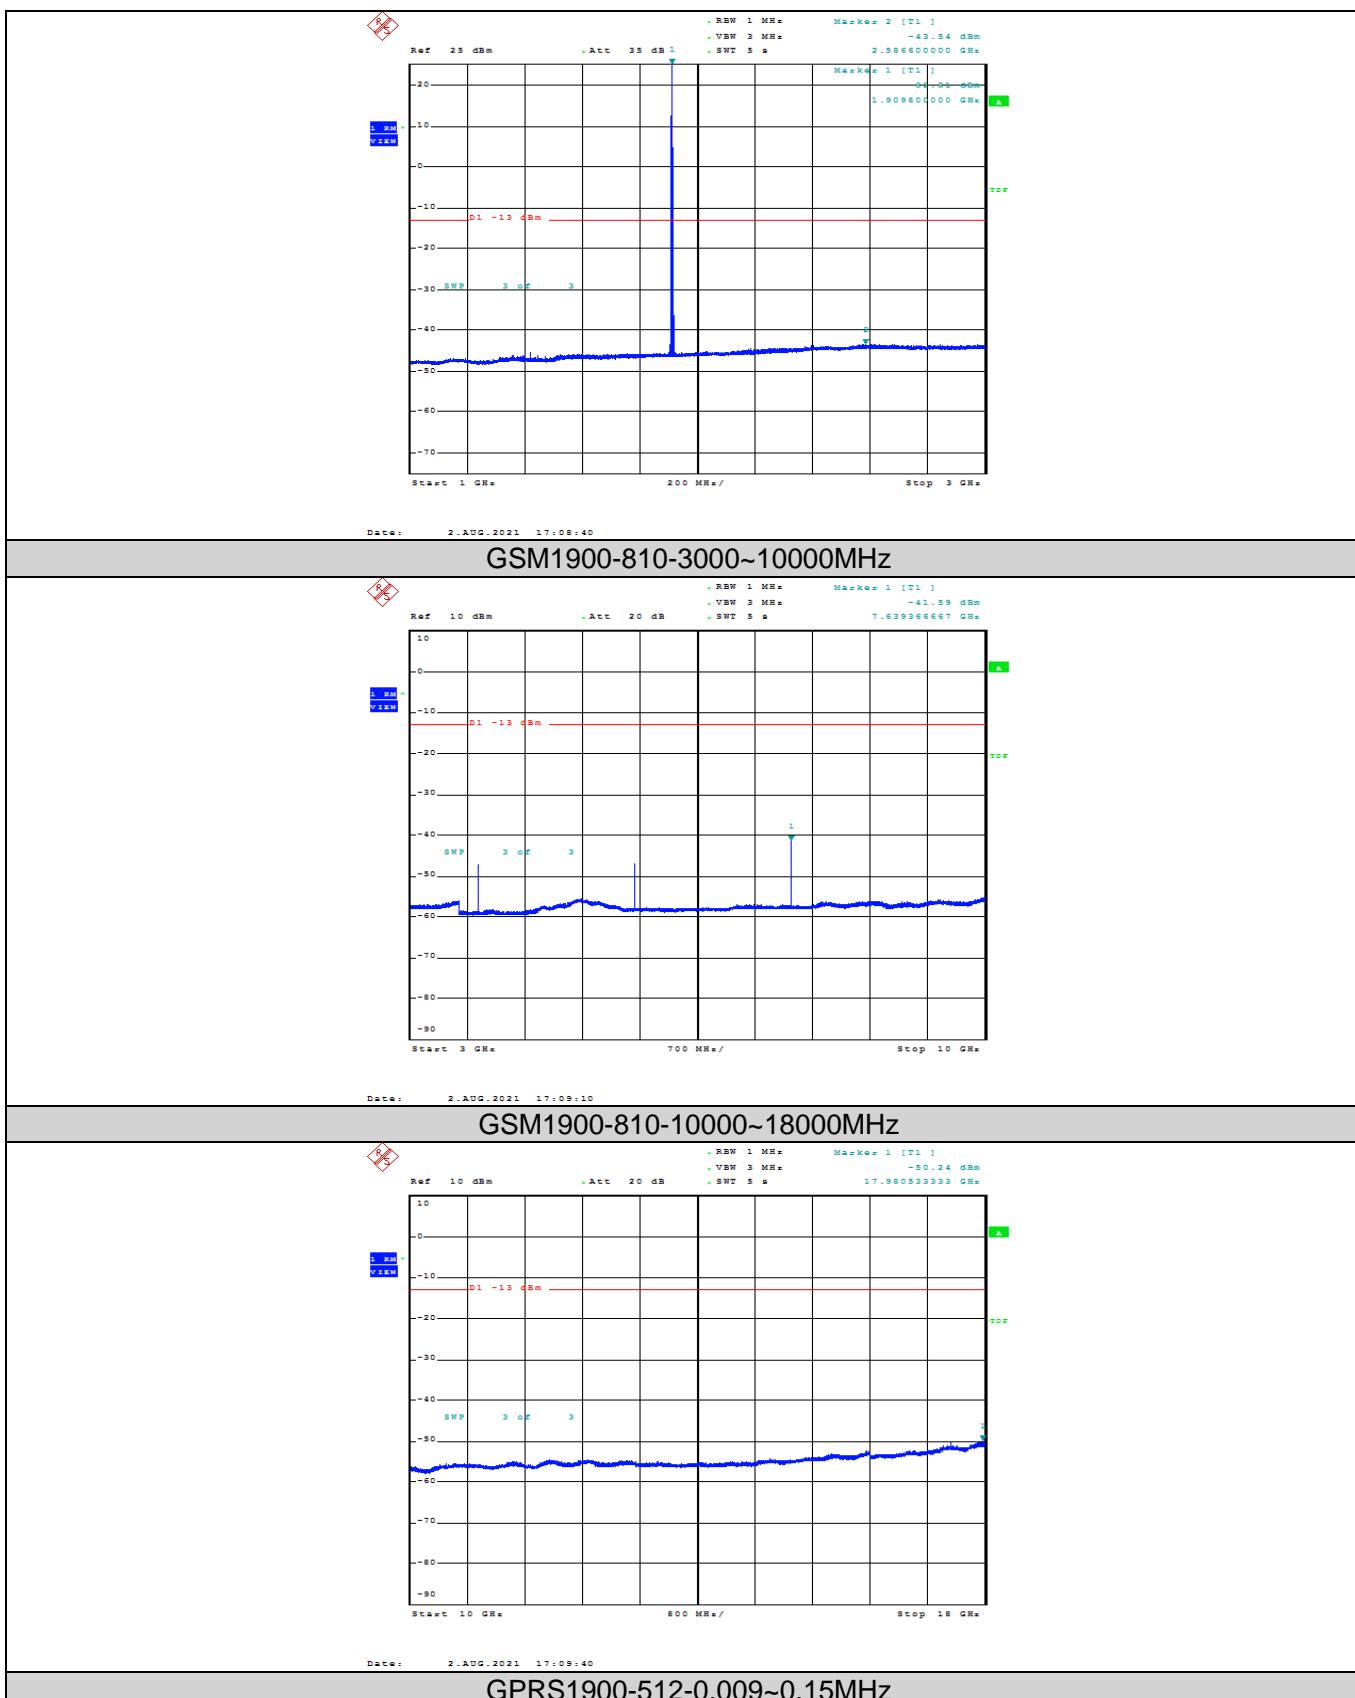

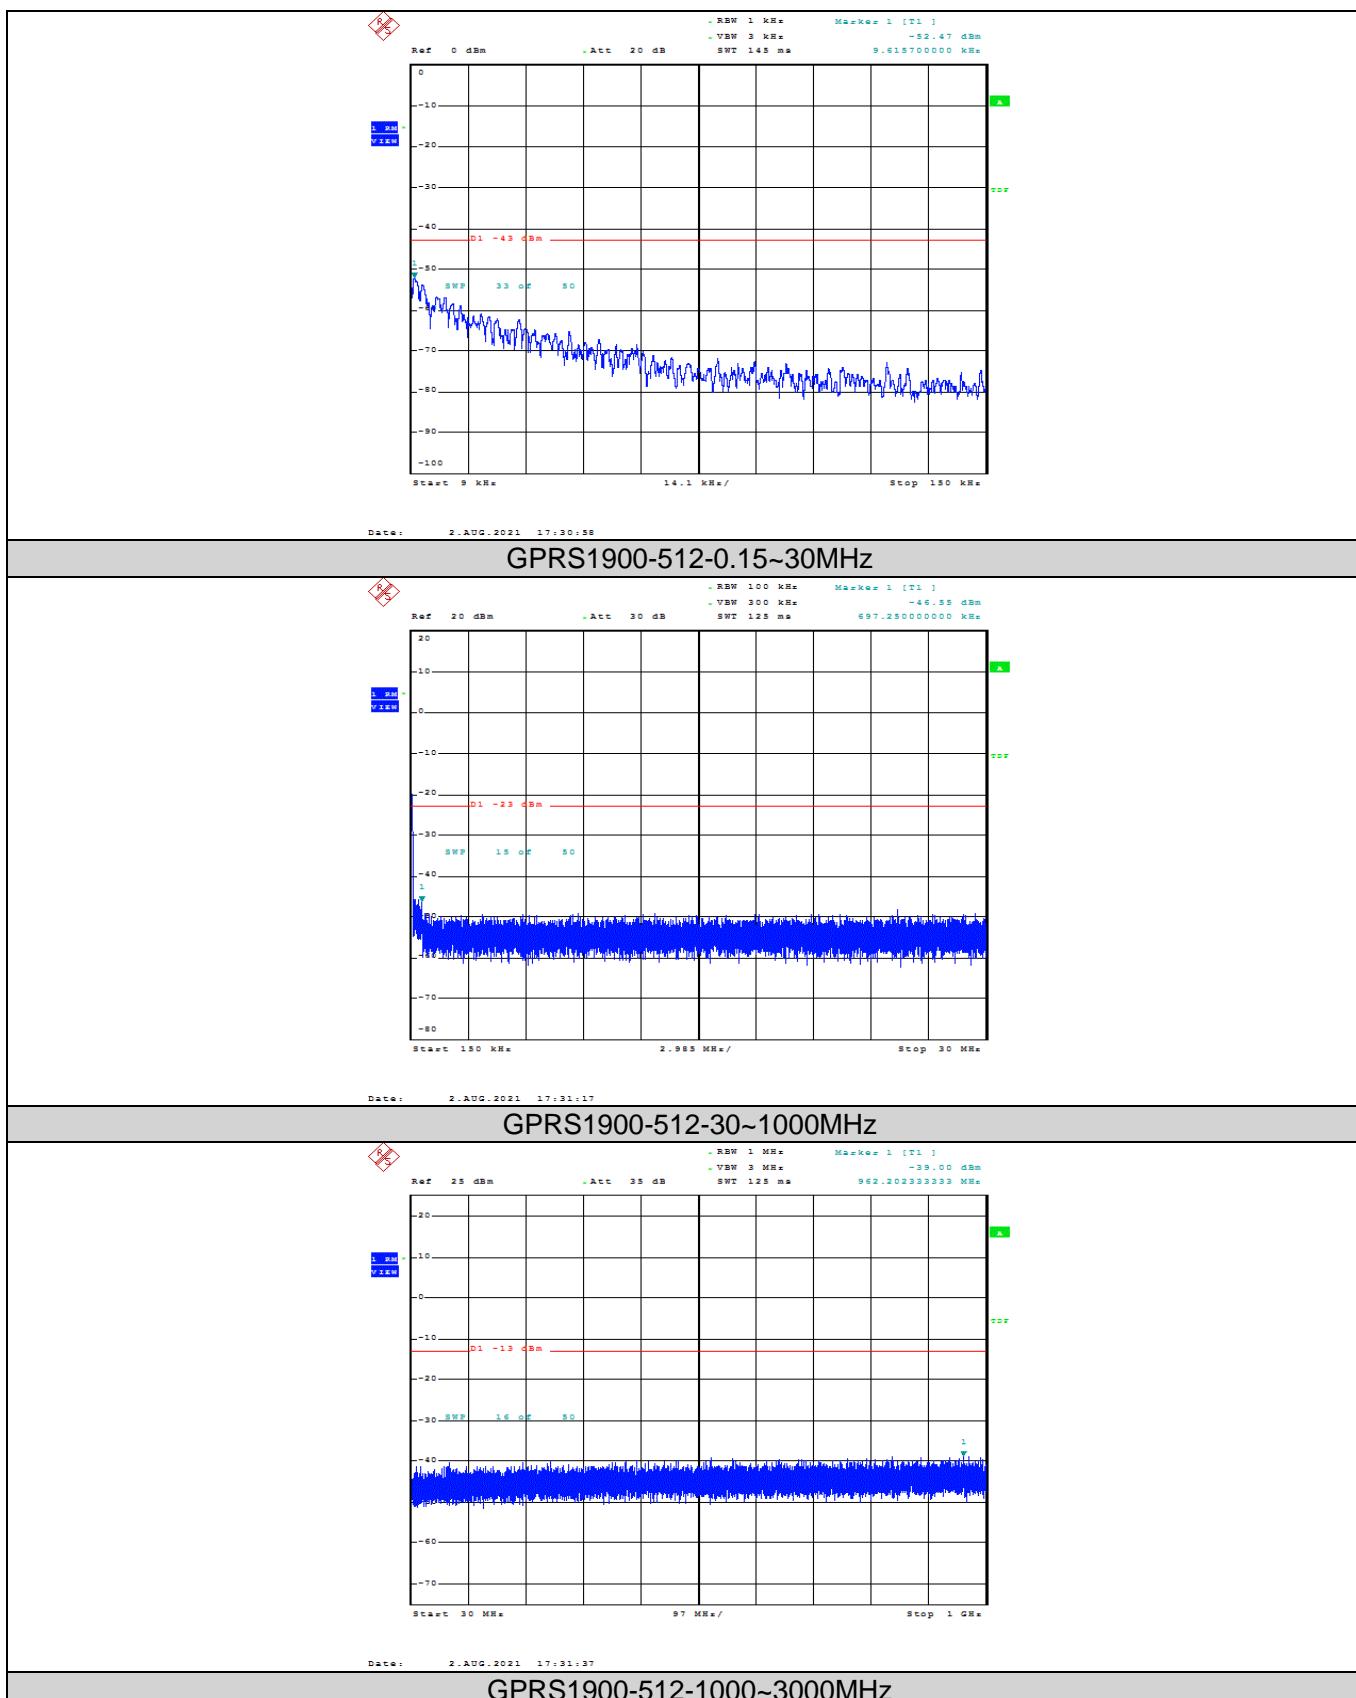

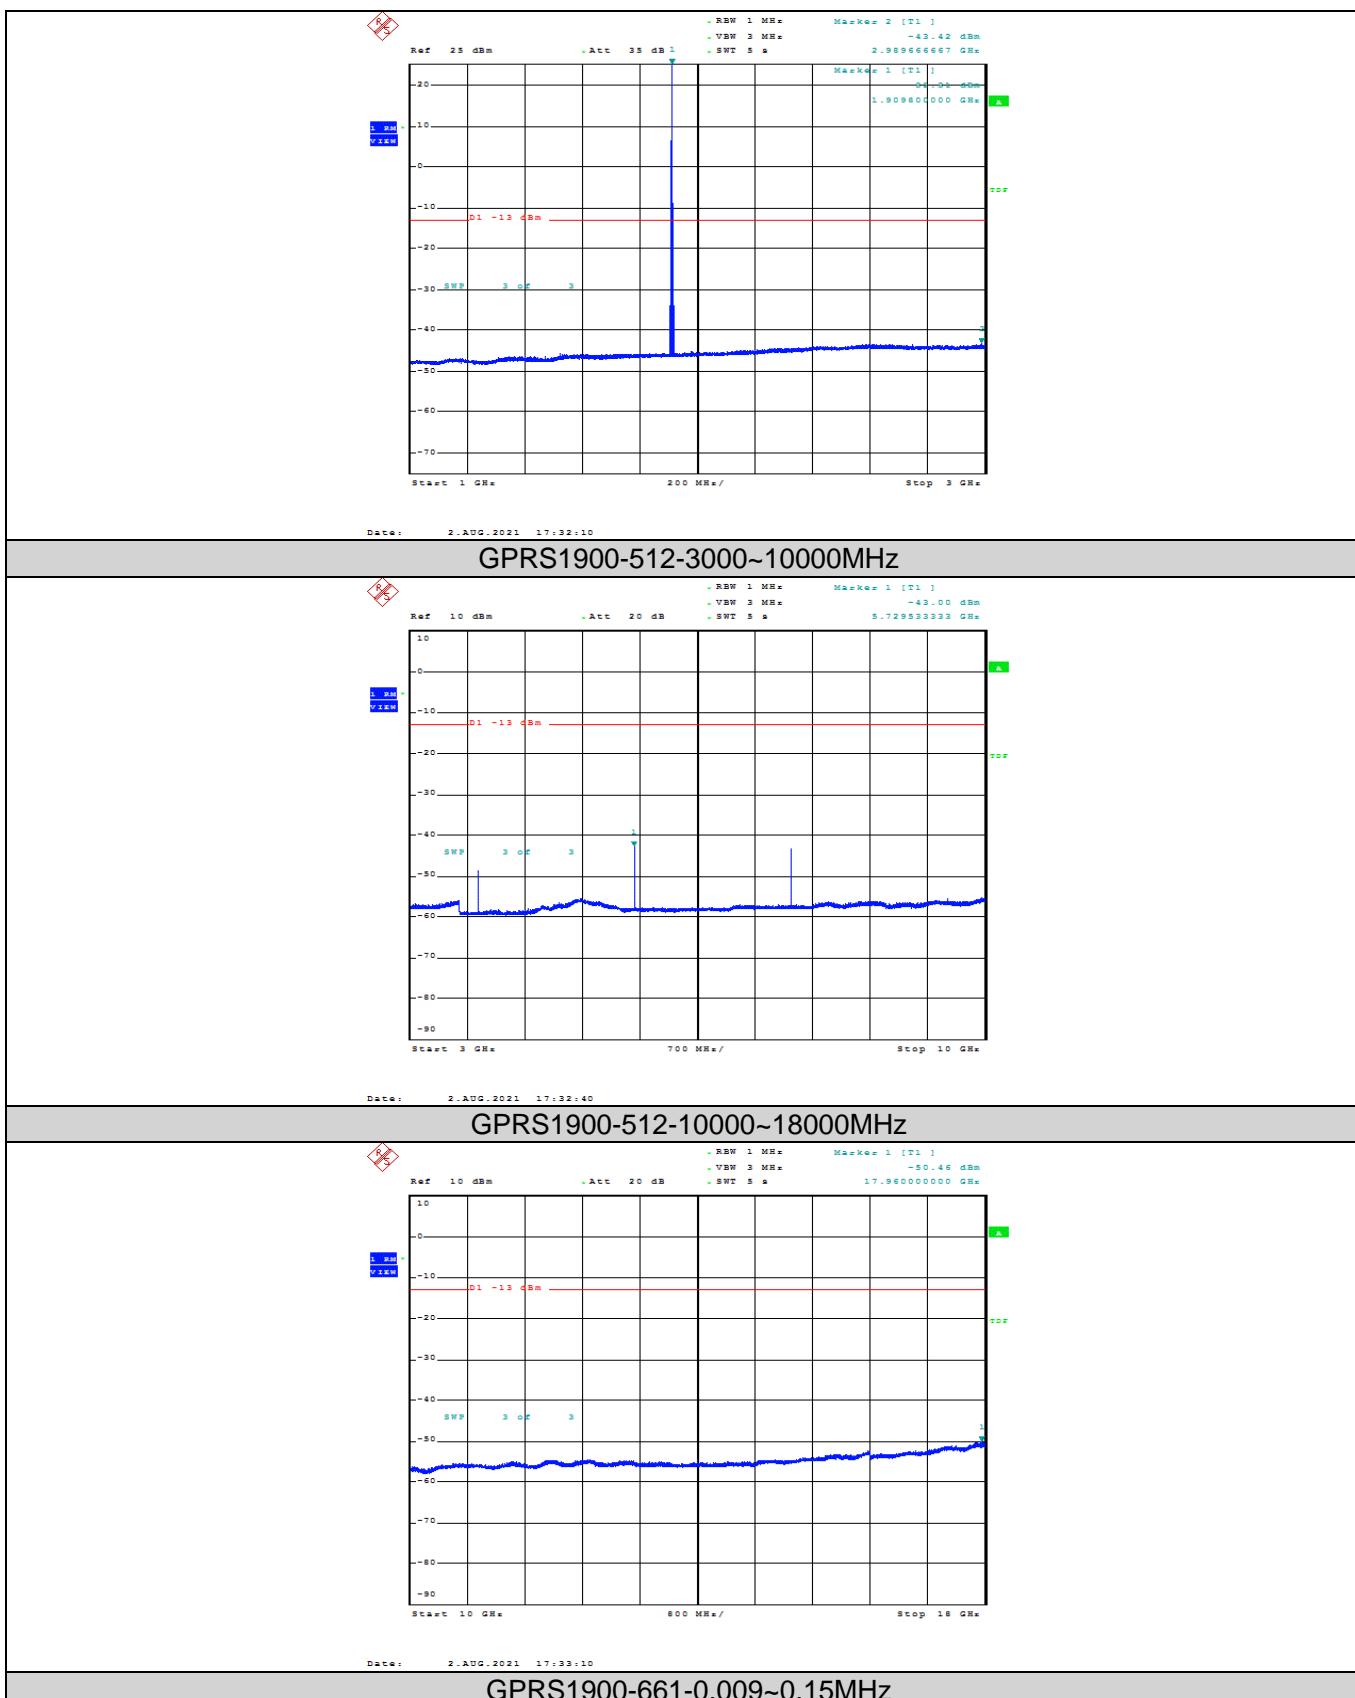



CTC Laboratories, Inc.


 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059


Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

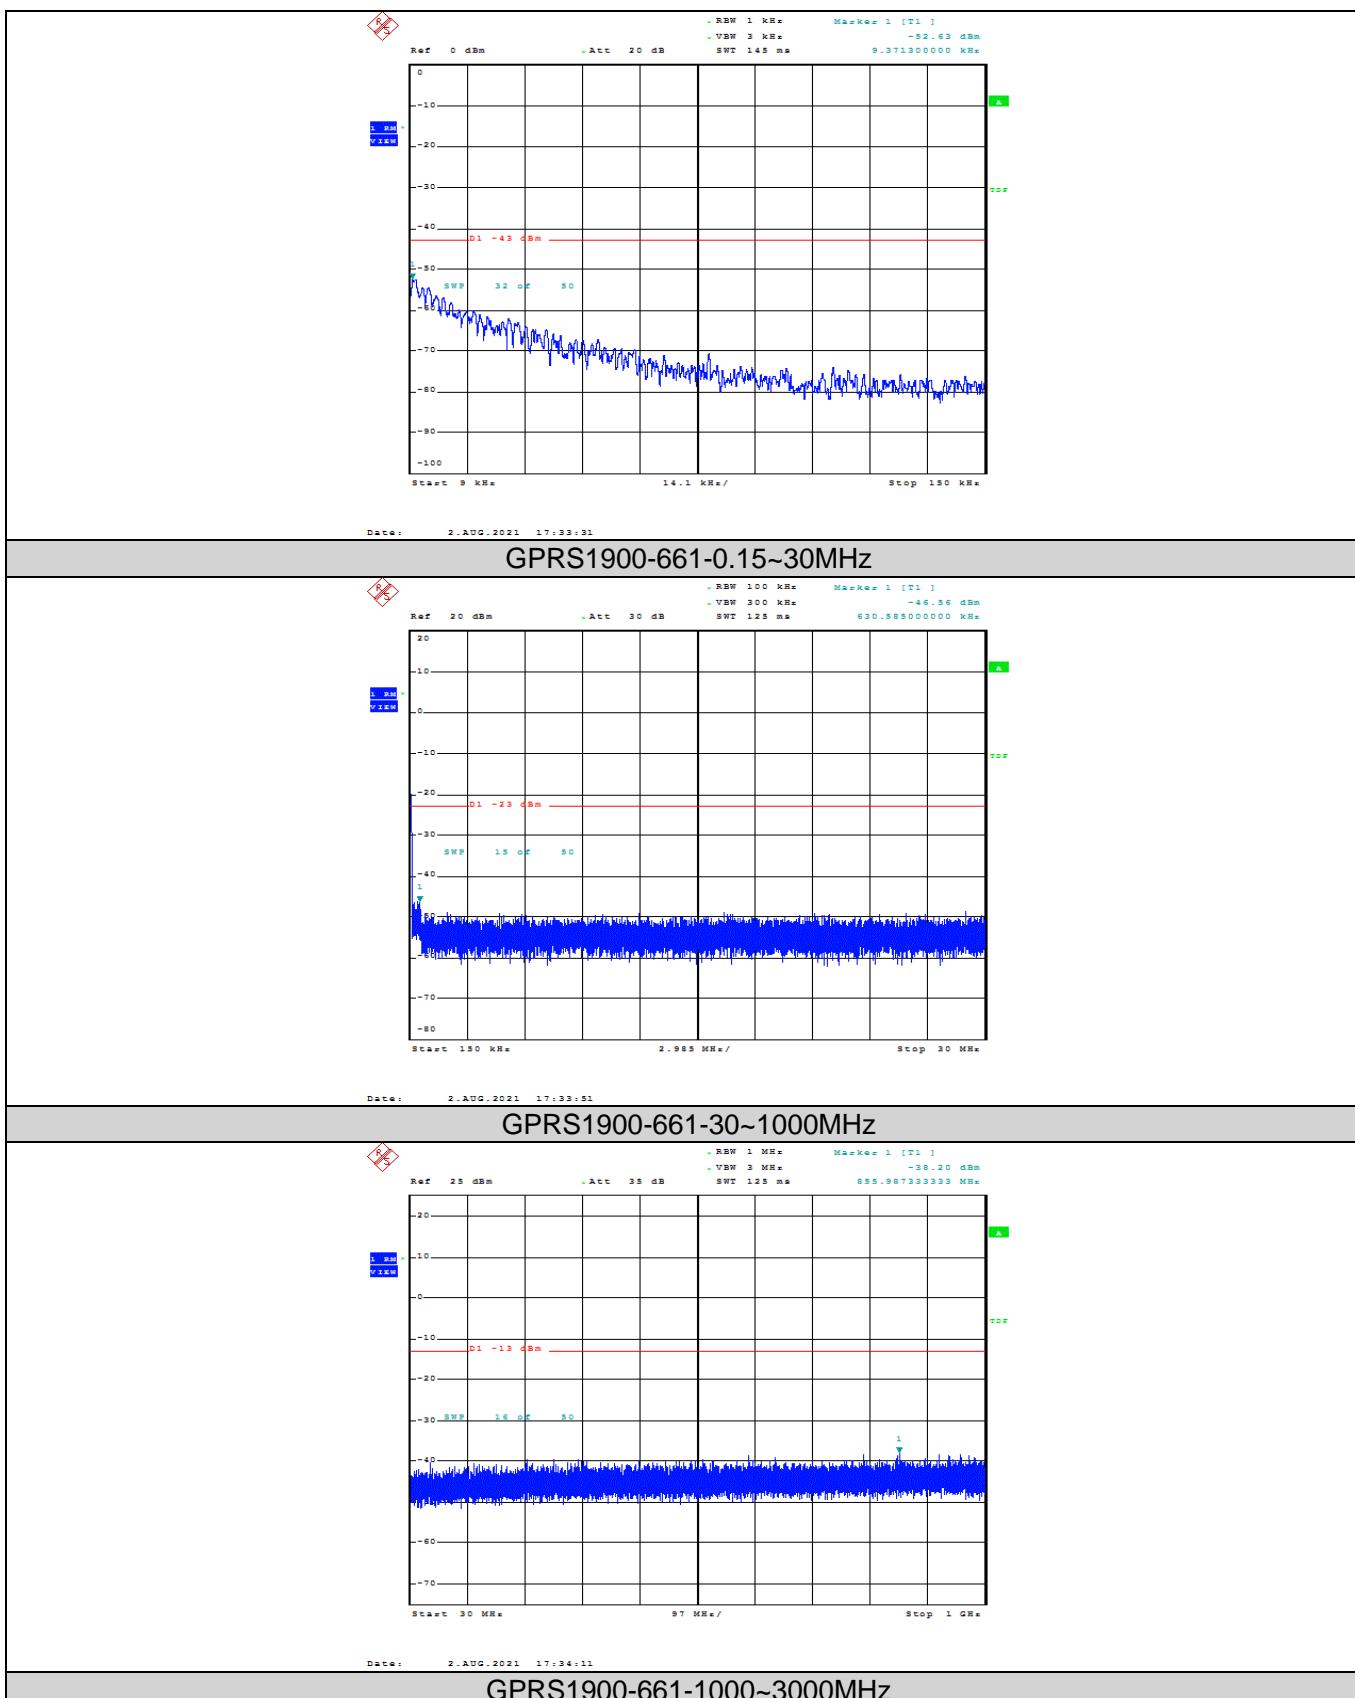


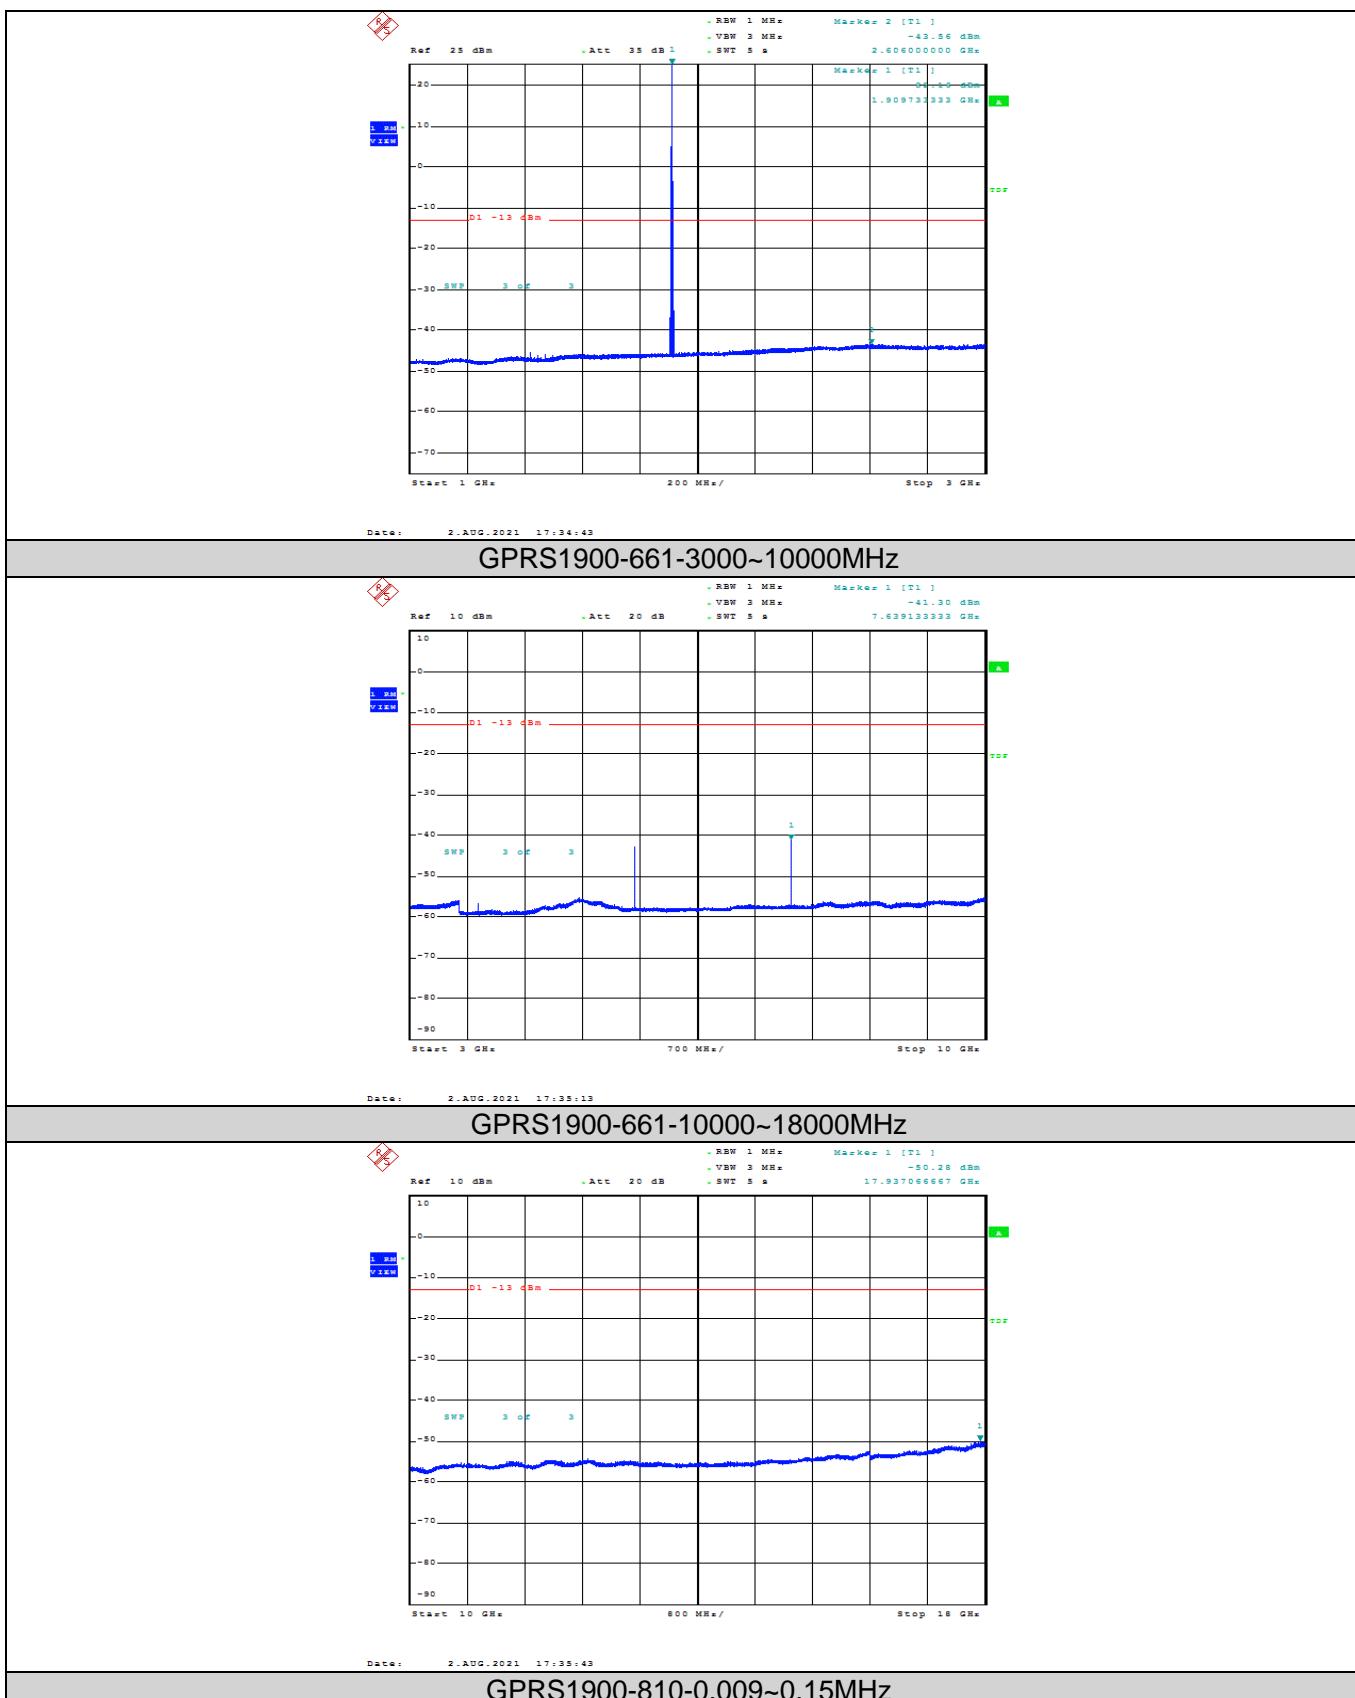


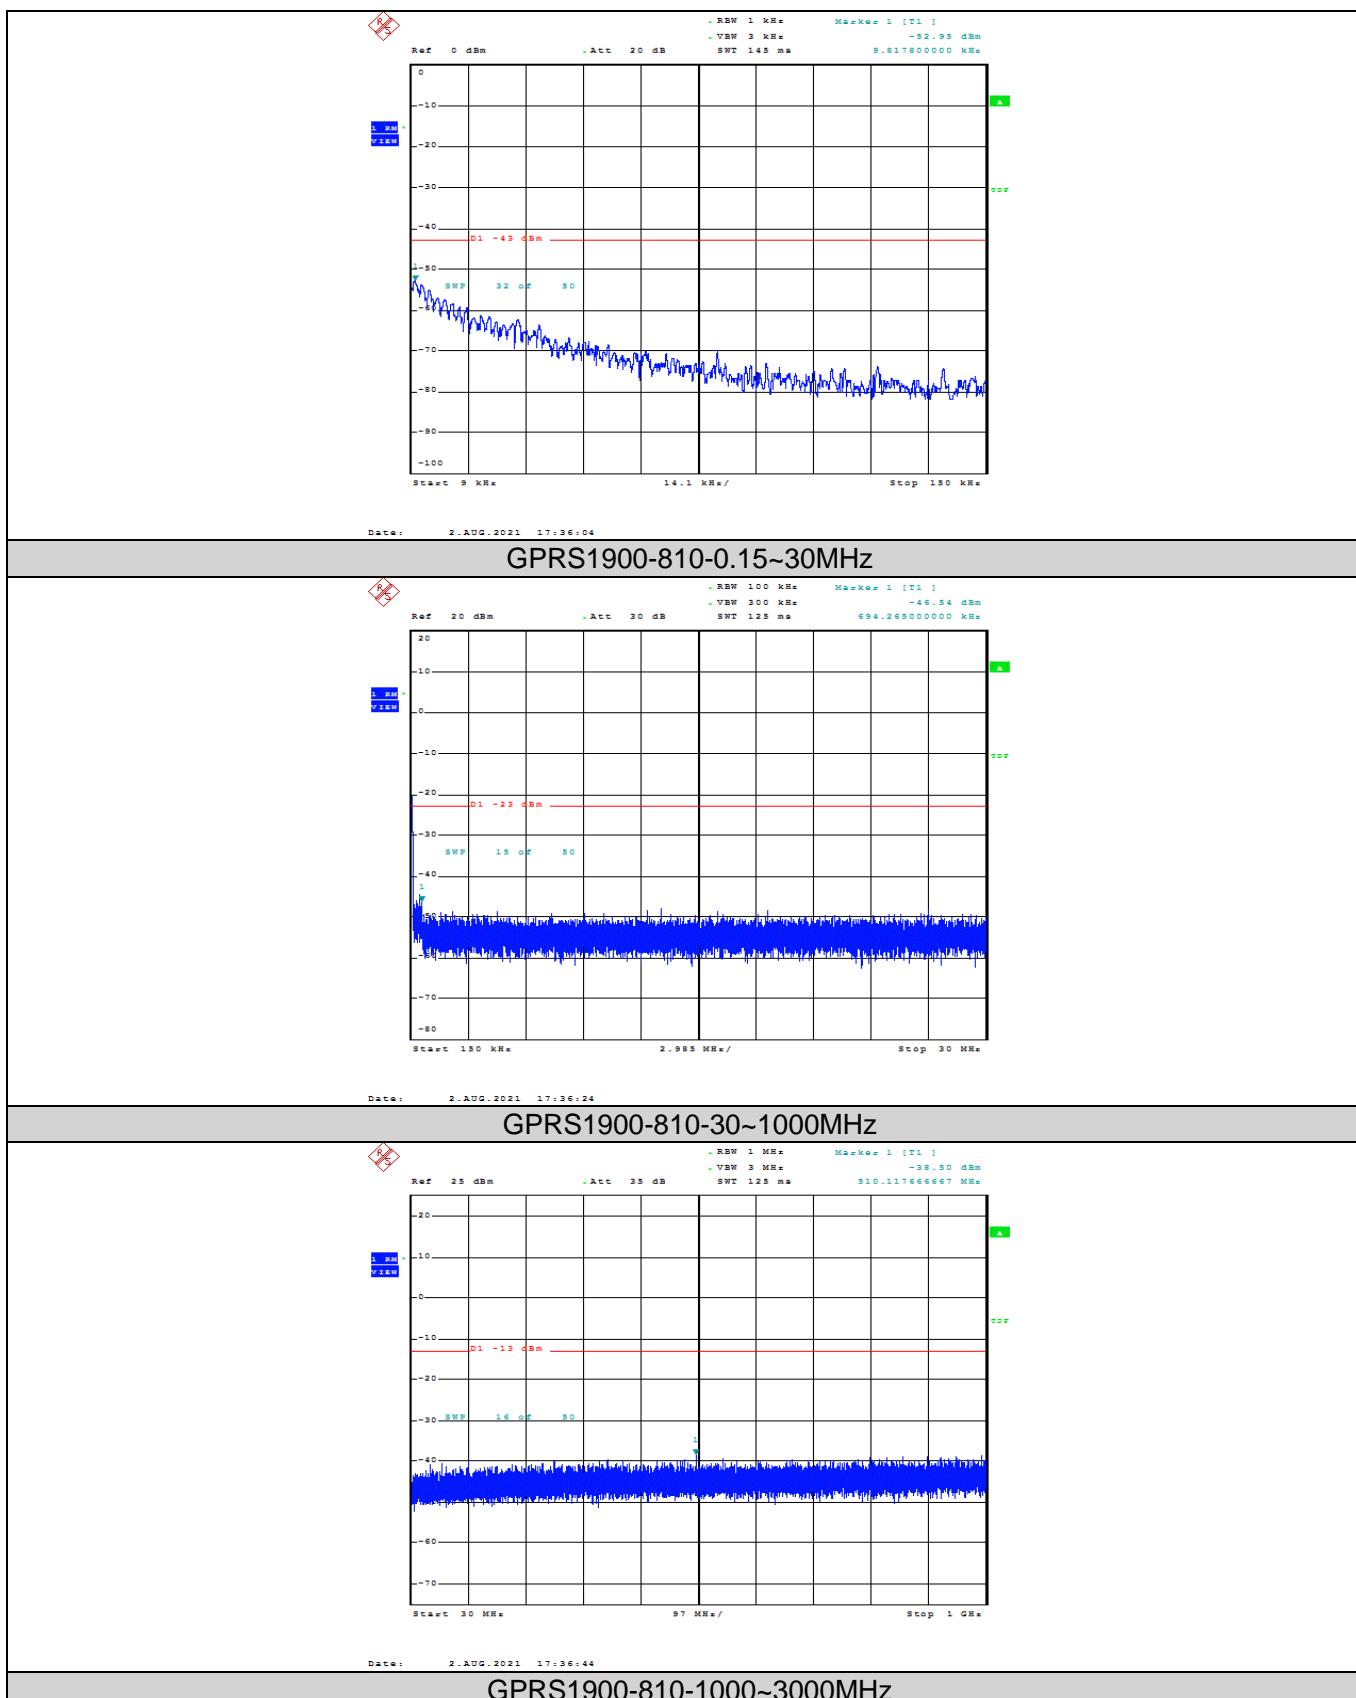


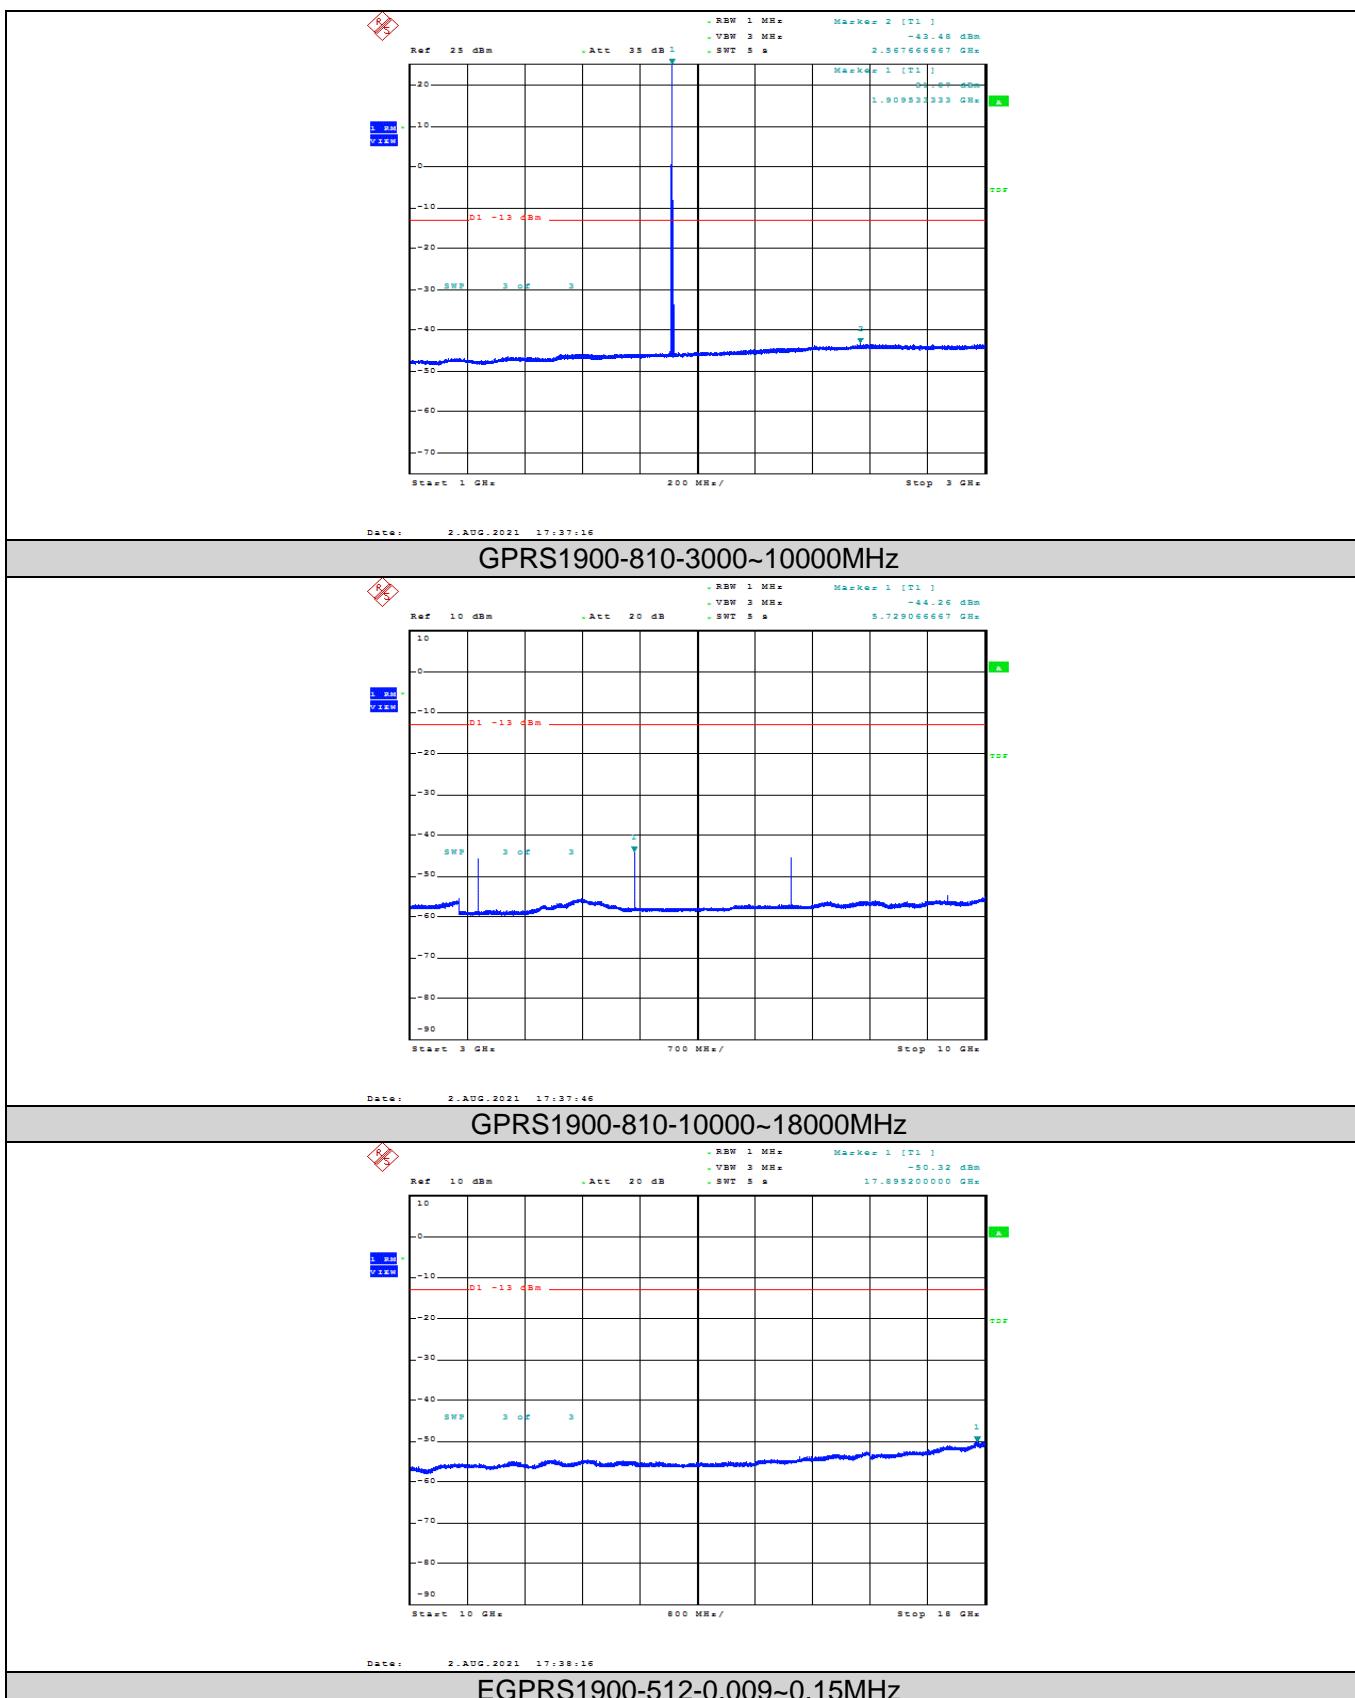

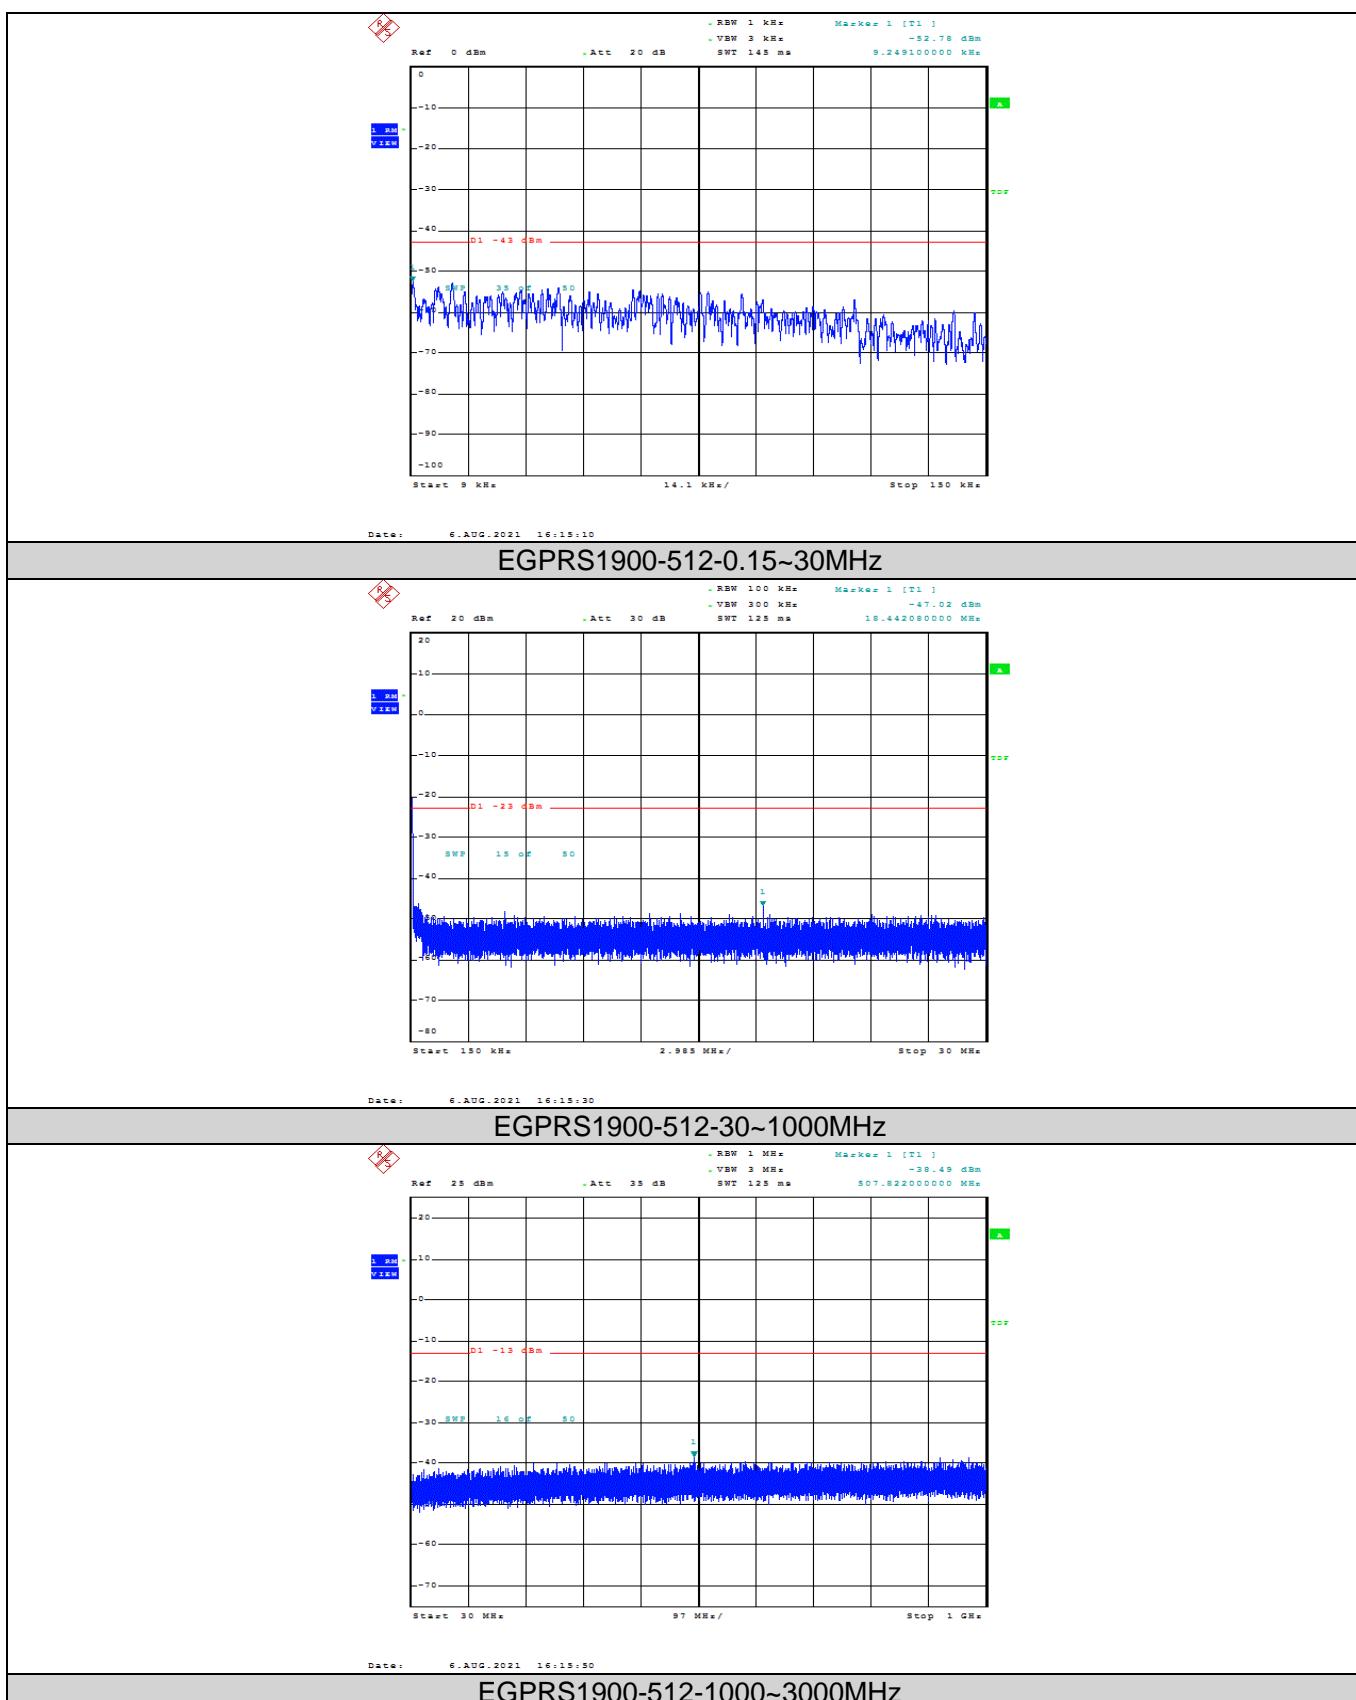

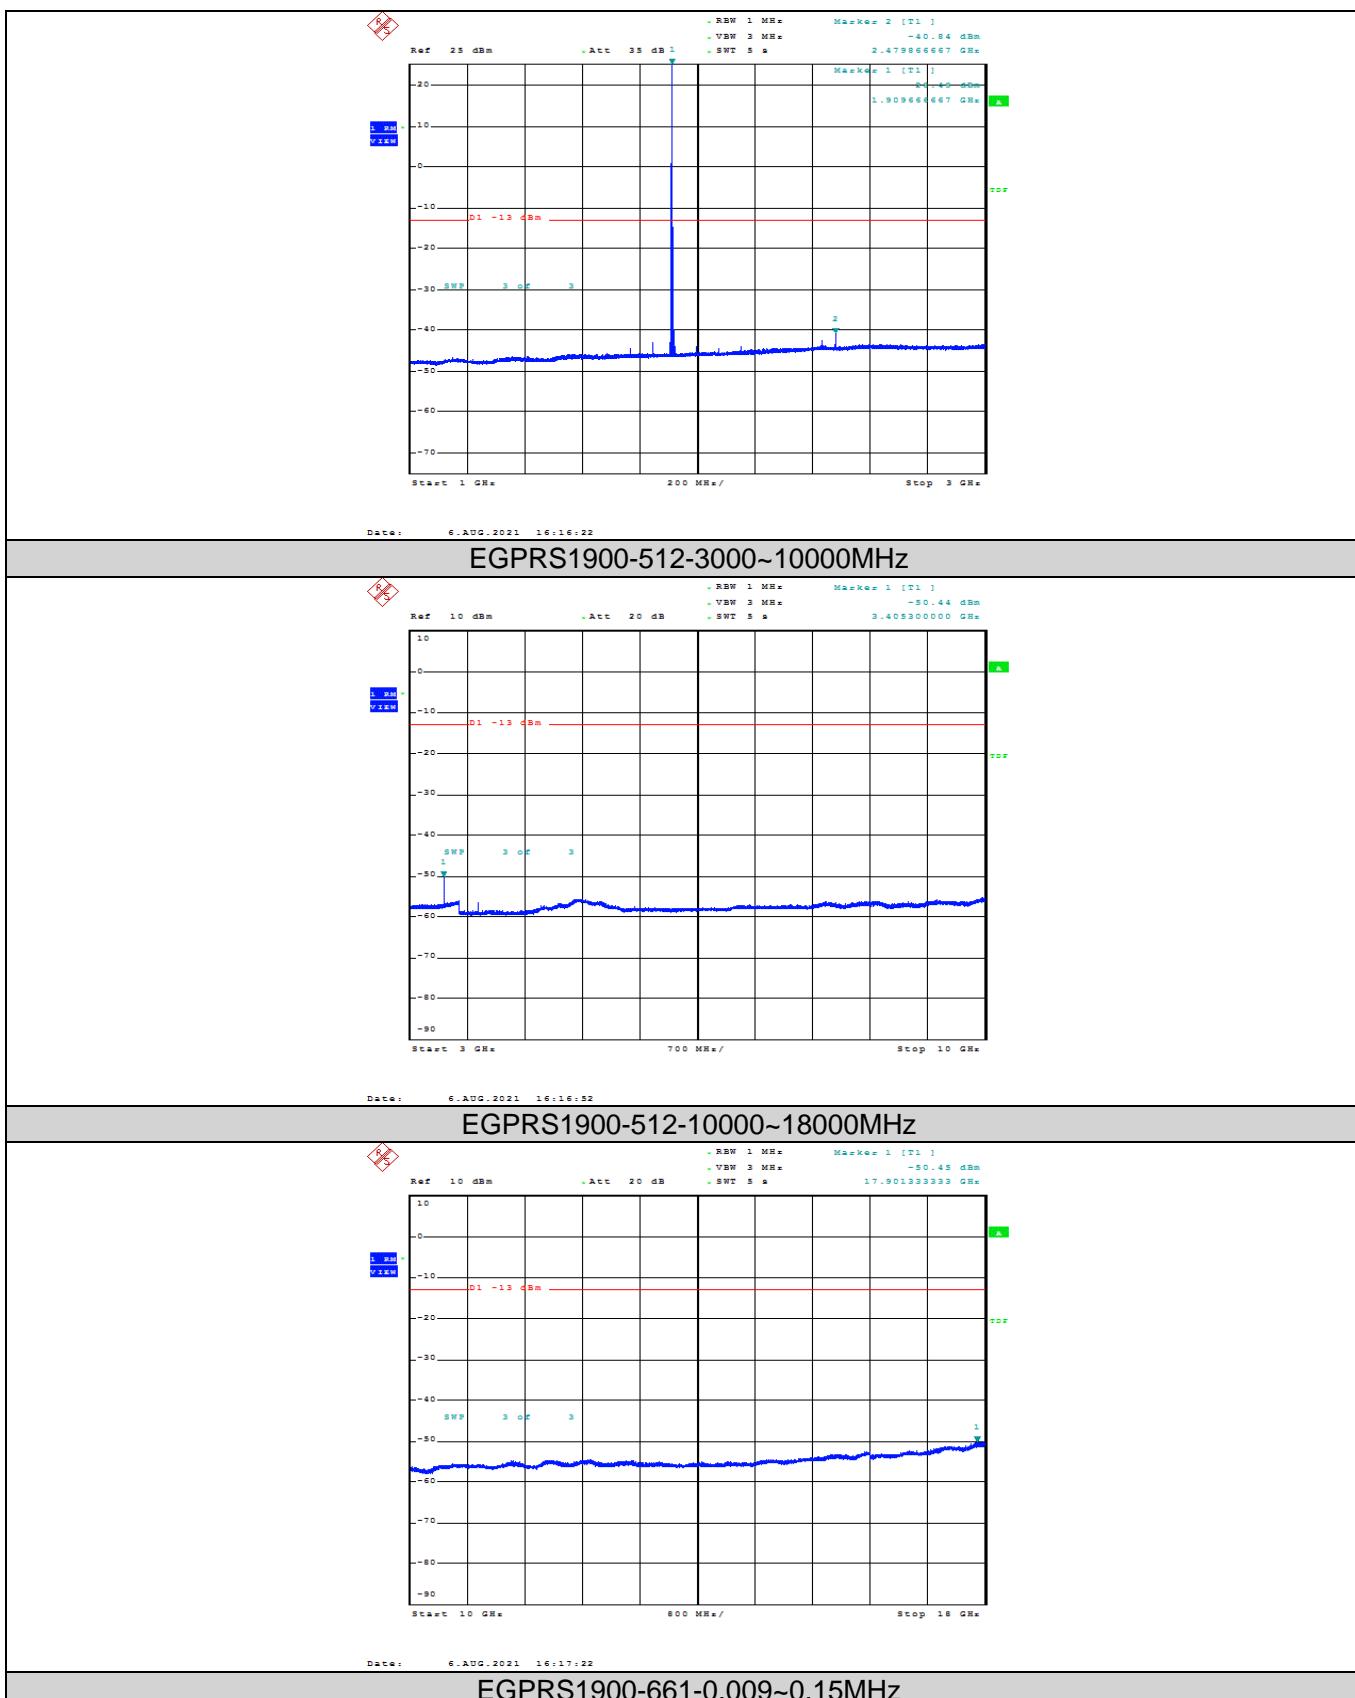

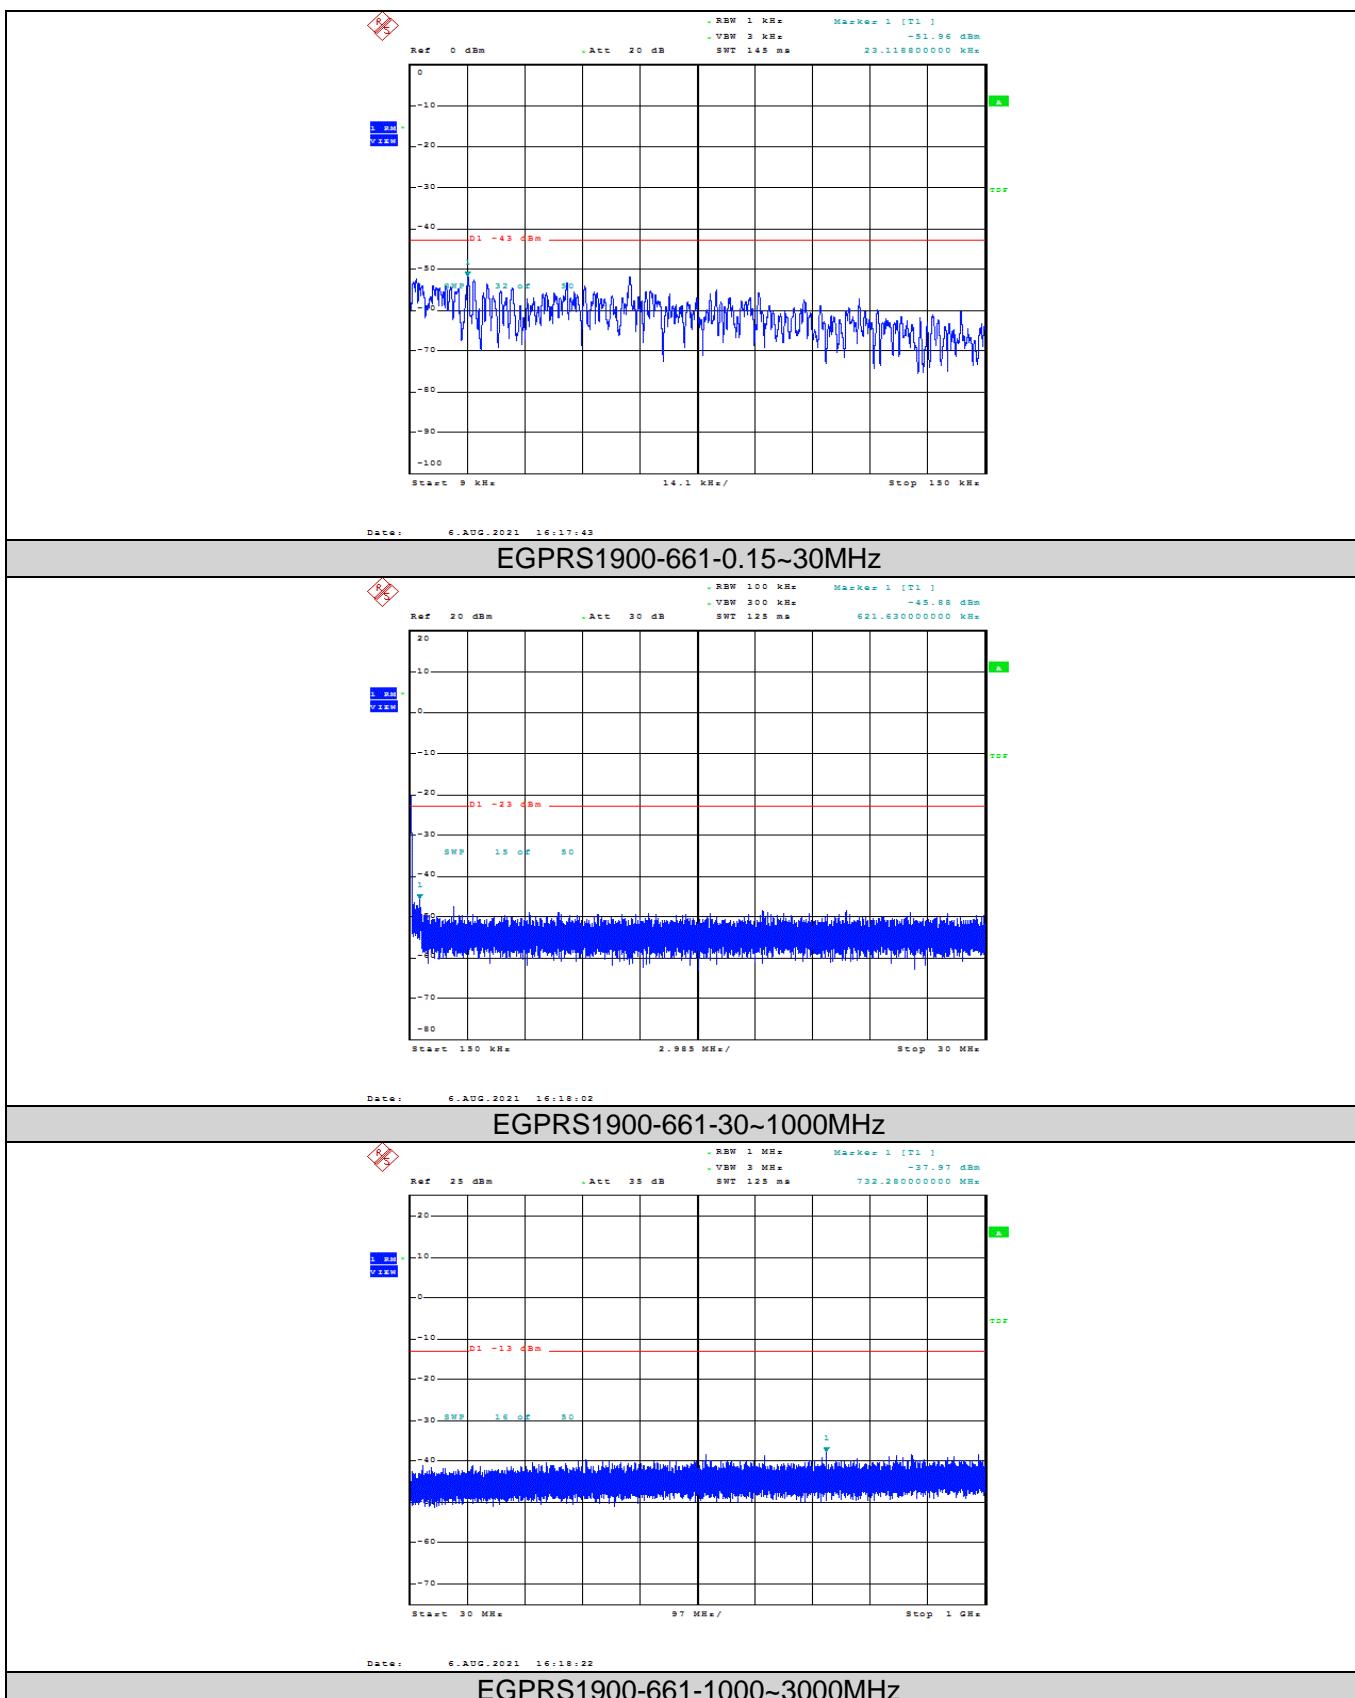

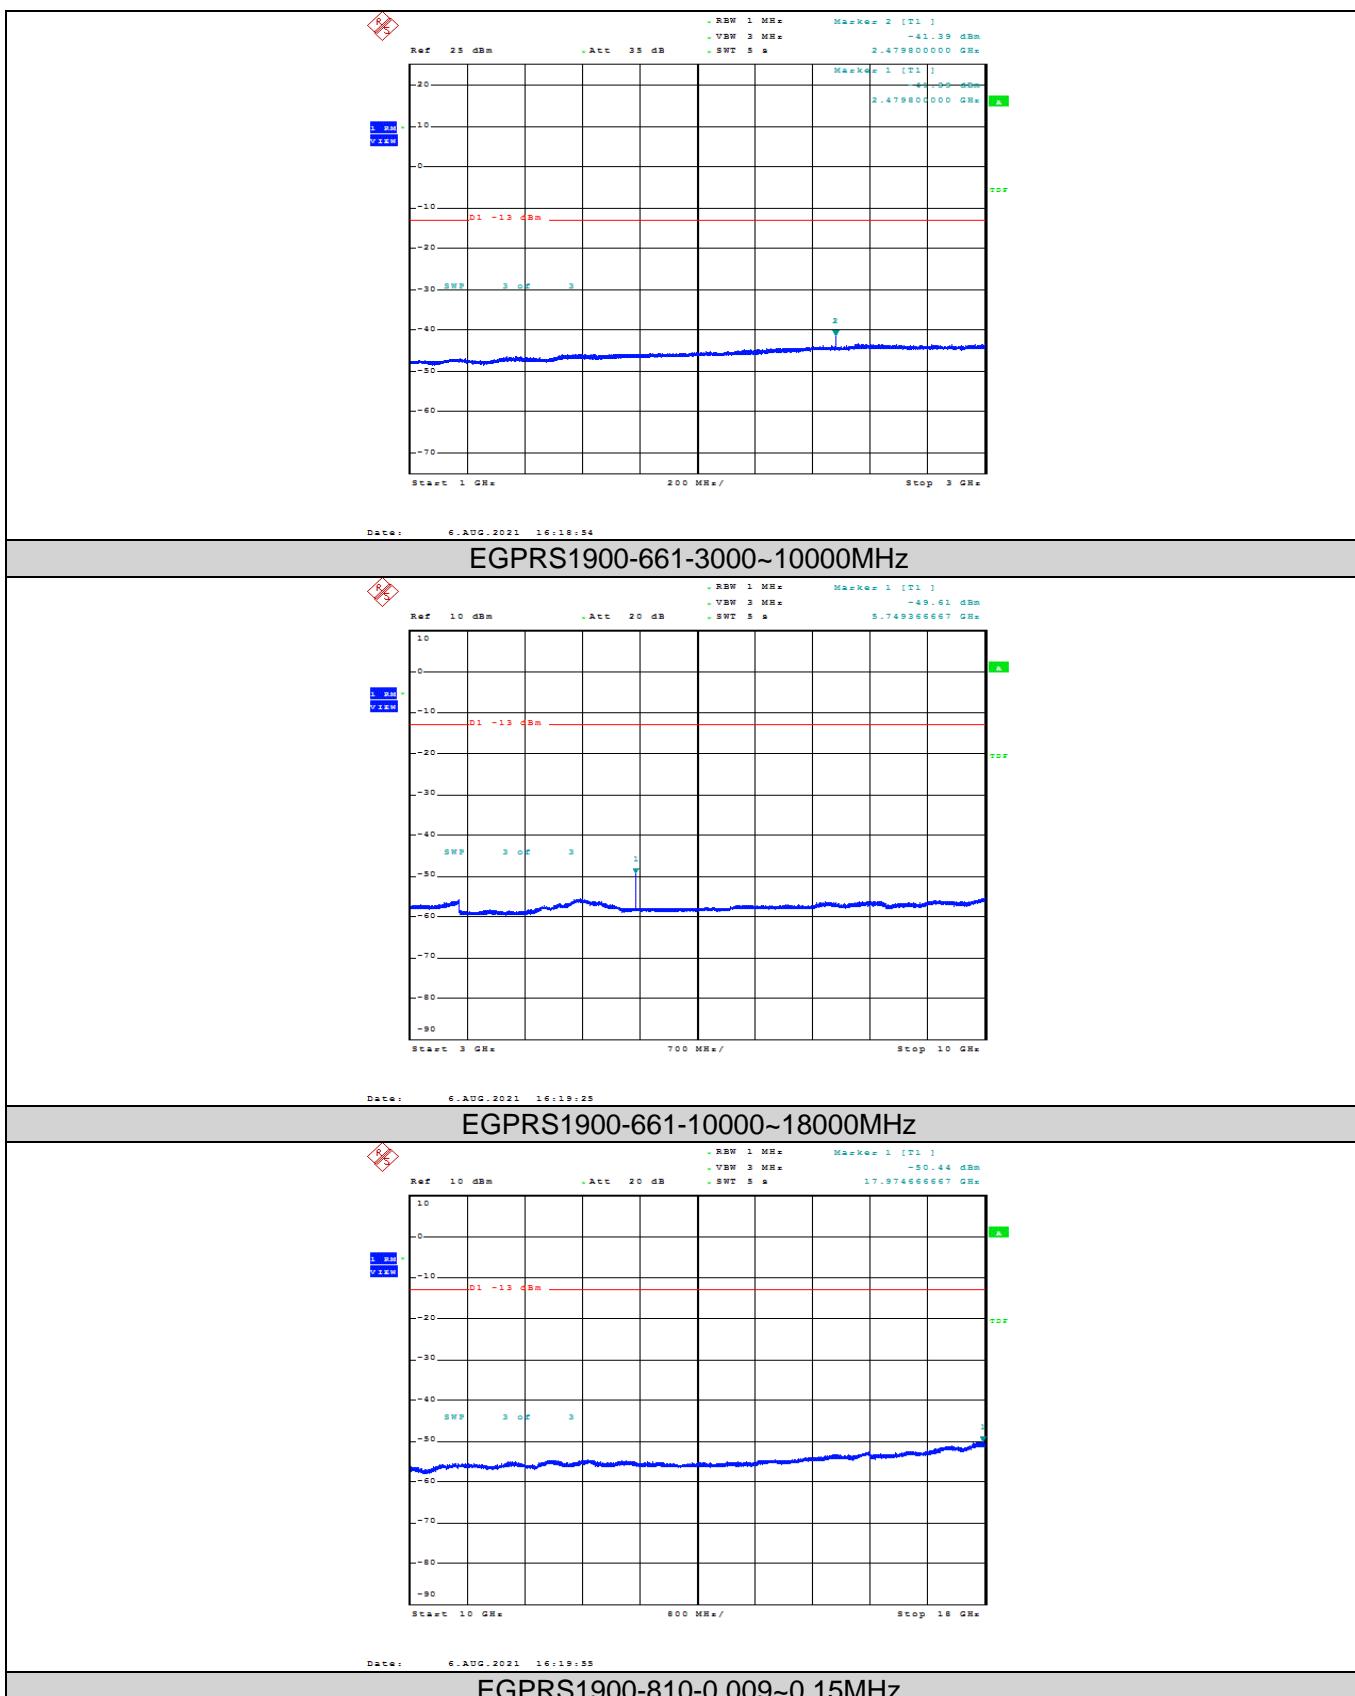



CTC Laboratories, Inc.

 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

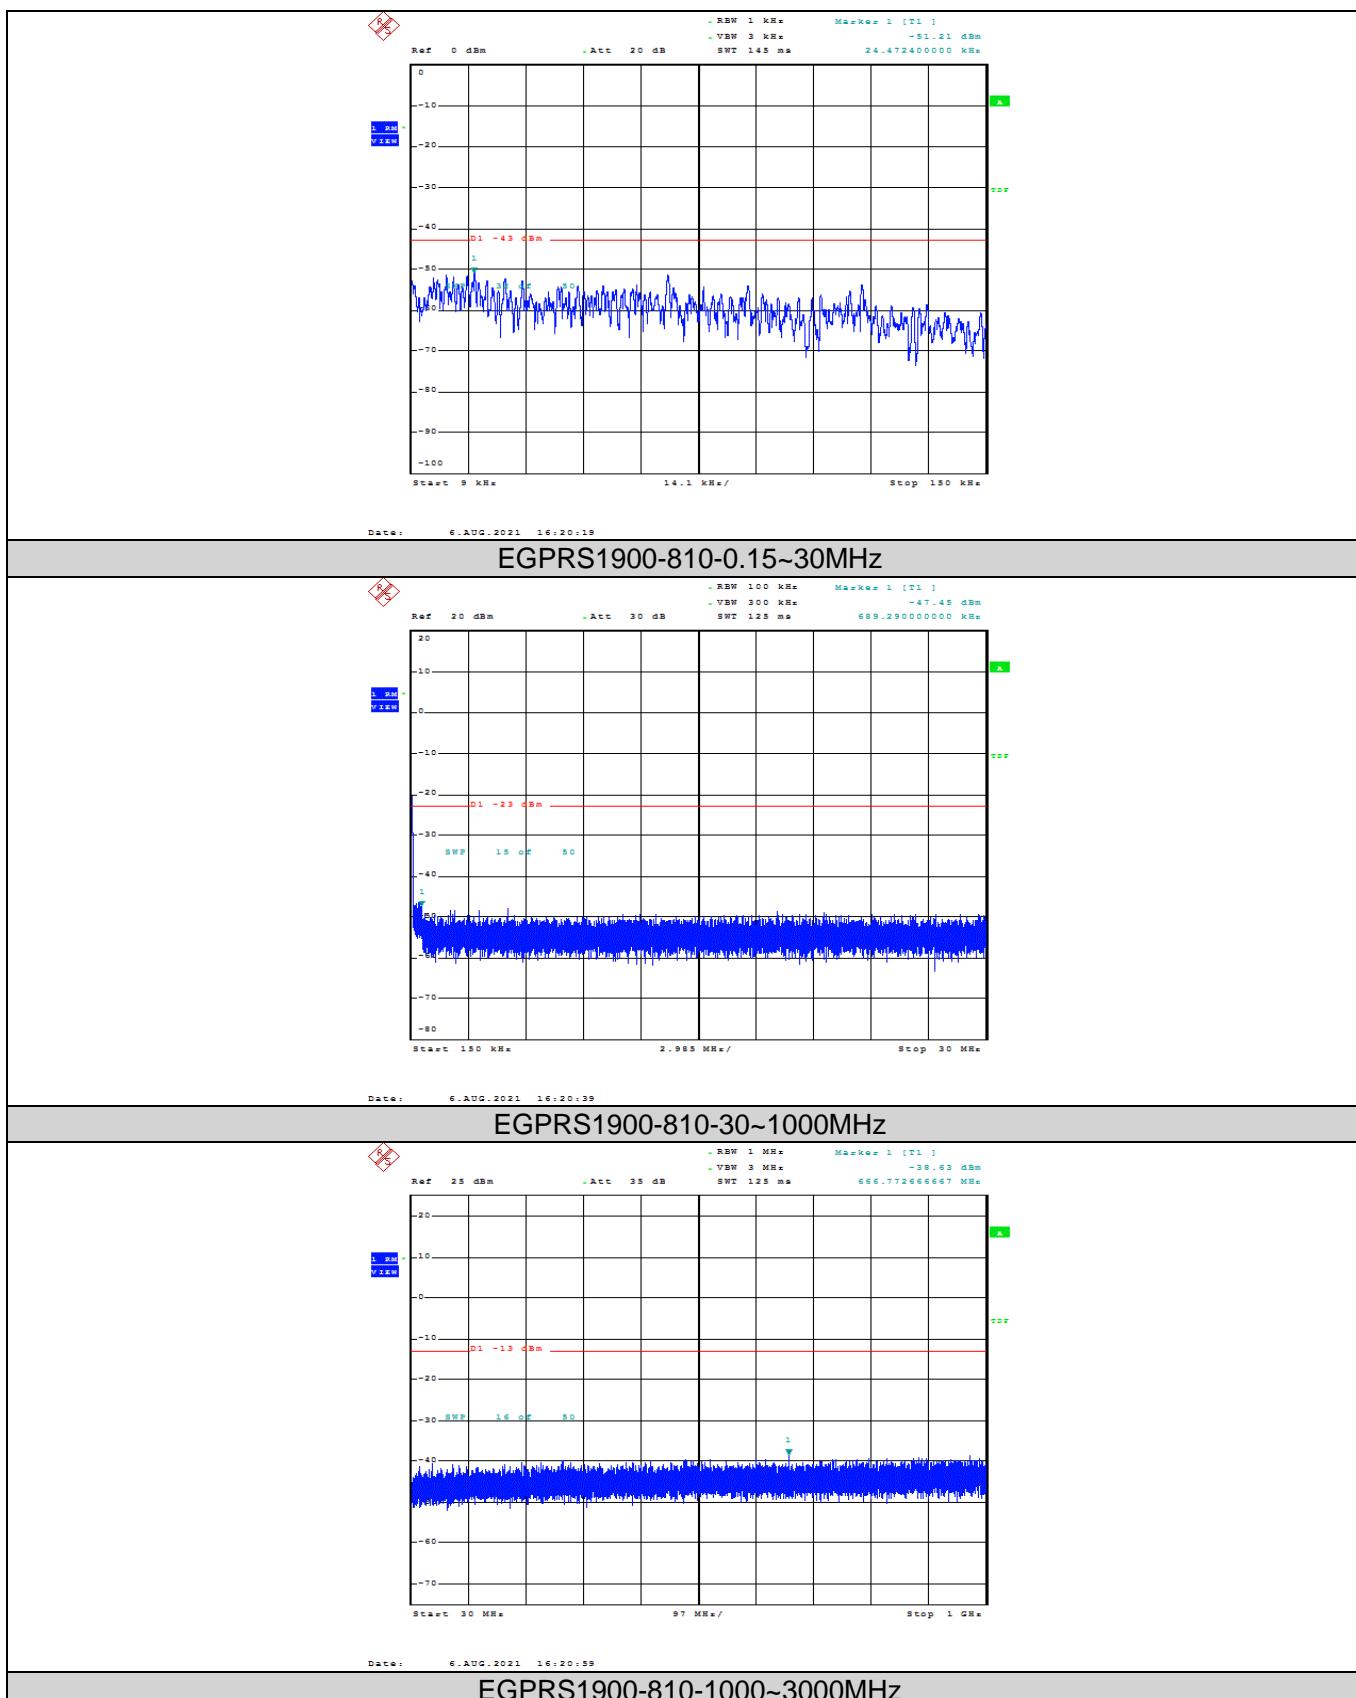

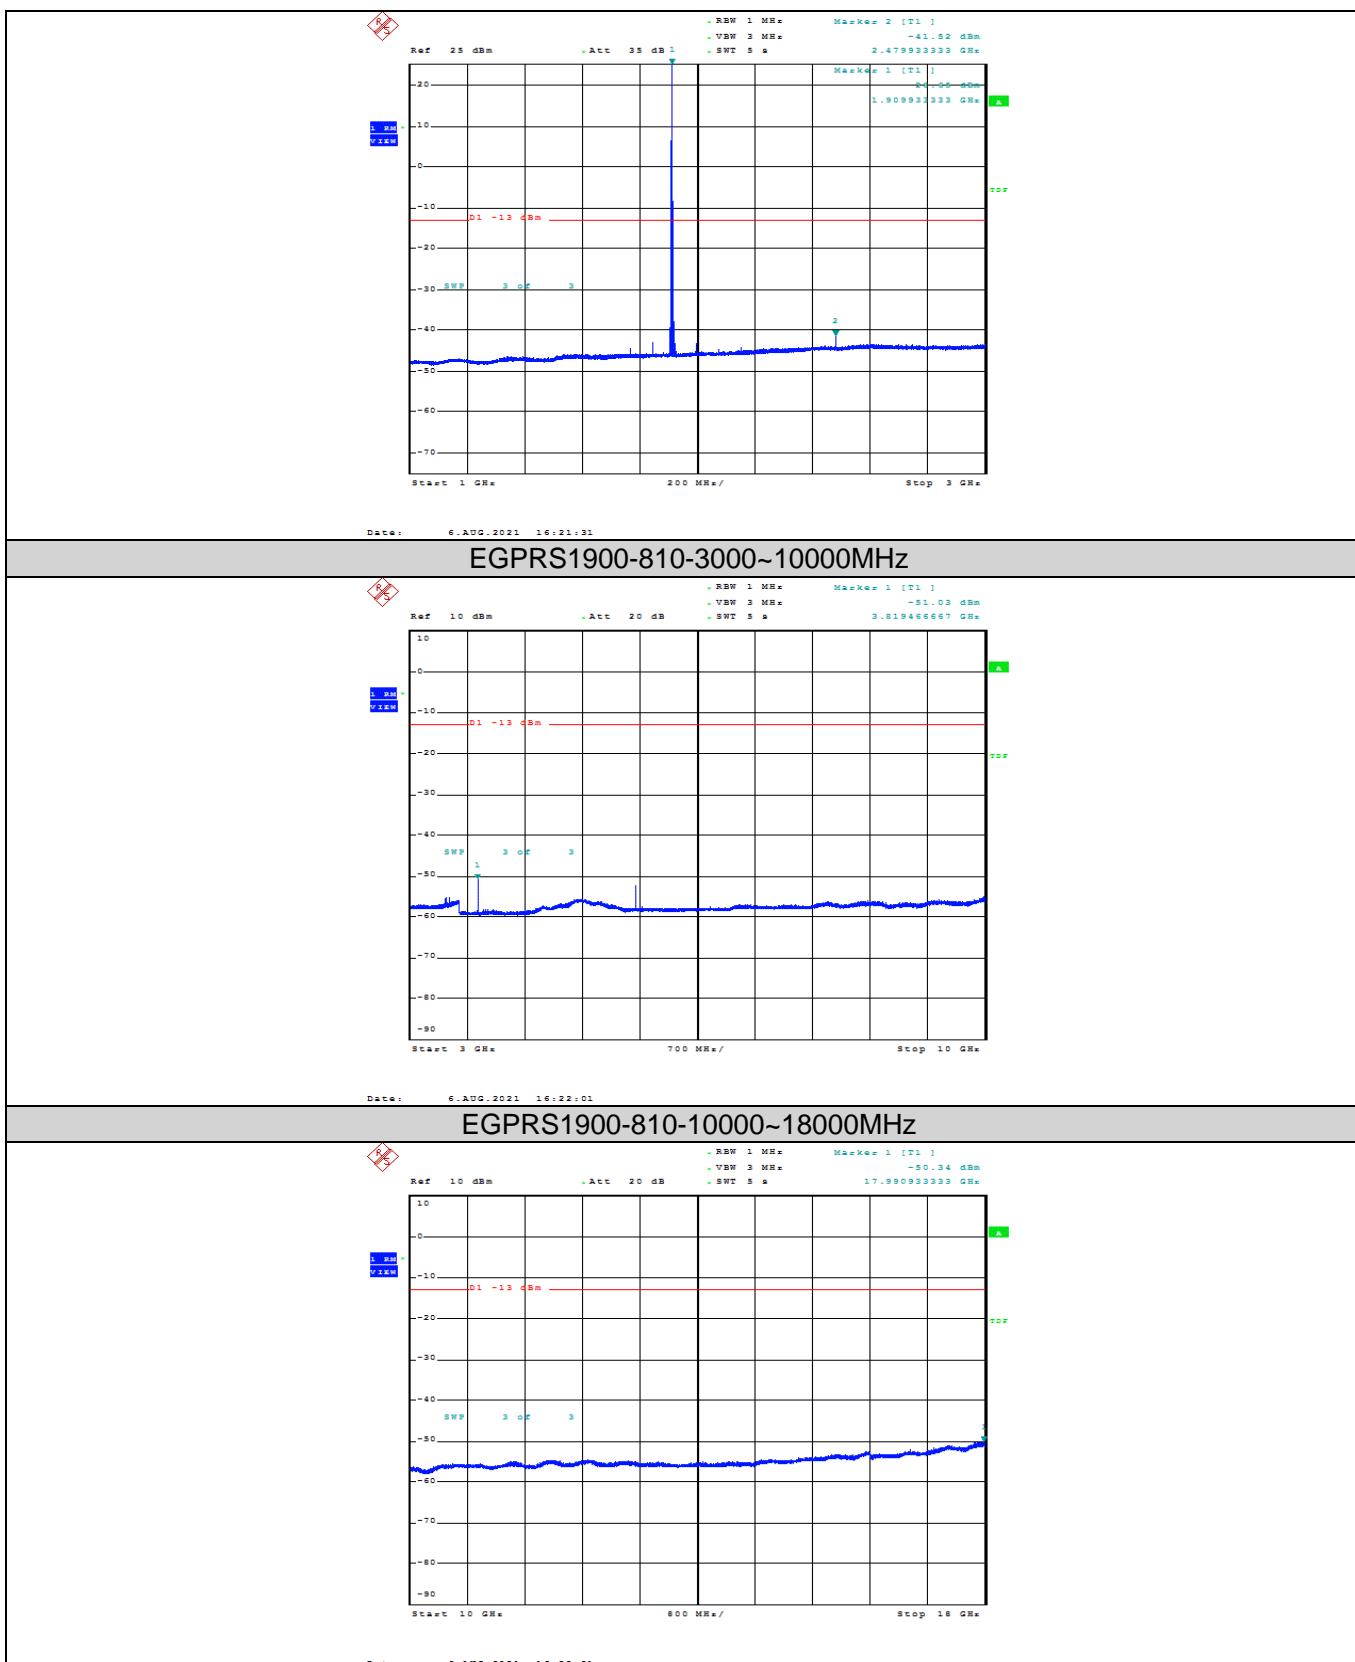




Band2-9262-0.15~30MHz

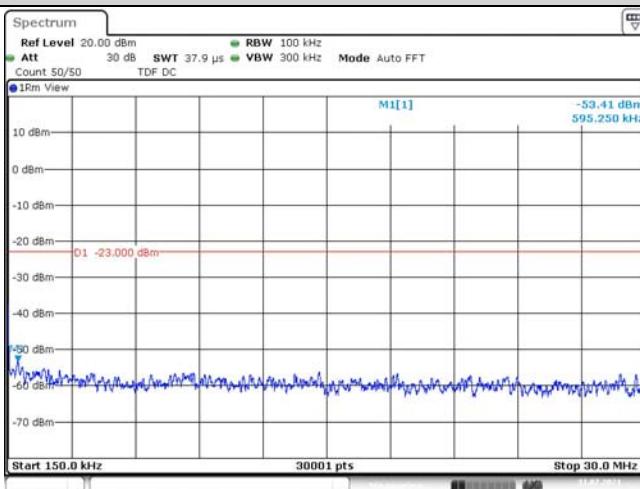


Date: 31.JUL.2021 15:30:44

Band2-9262-30~1000MHz

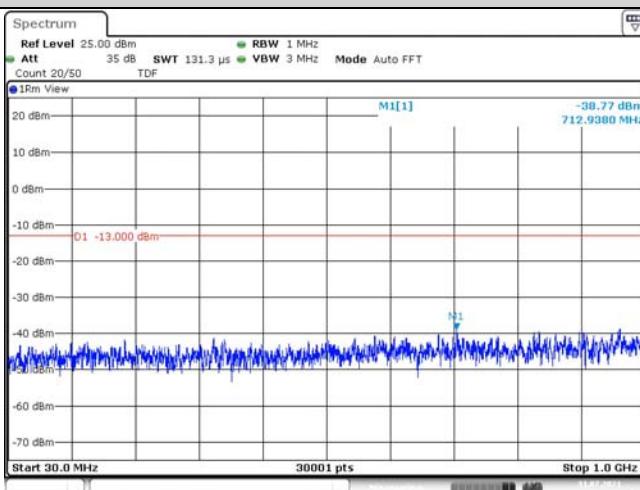

Date: 31.JUL.2021 15:30:53

Band2-9262-1000~3000MHz

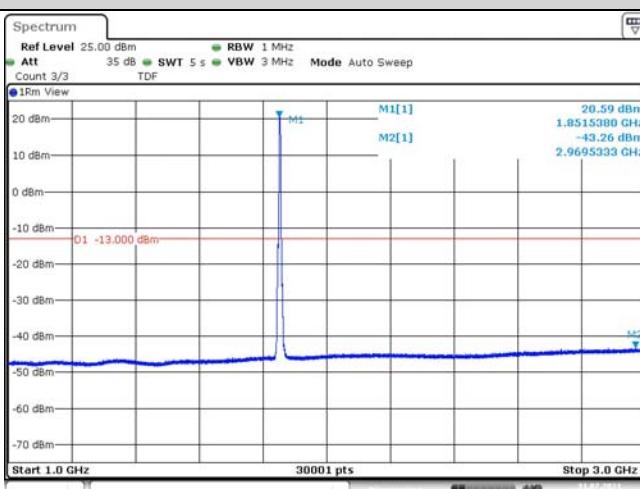

Date: 31.JUL.2021 15:31:21

Band2-9262-3000~10000MHz


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

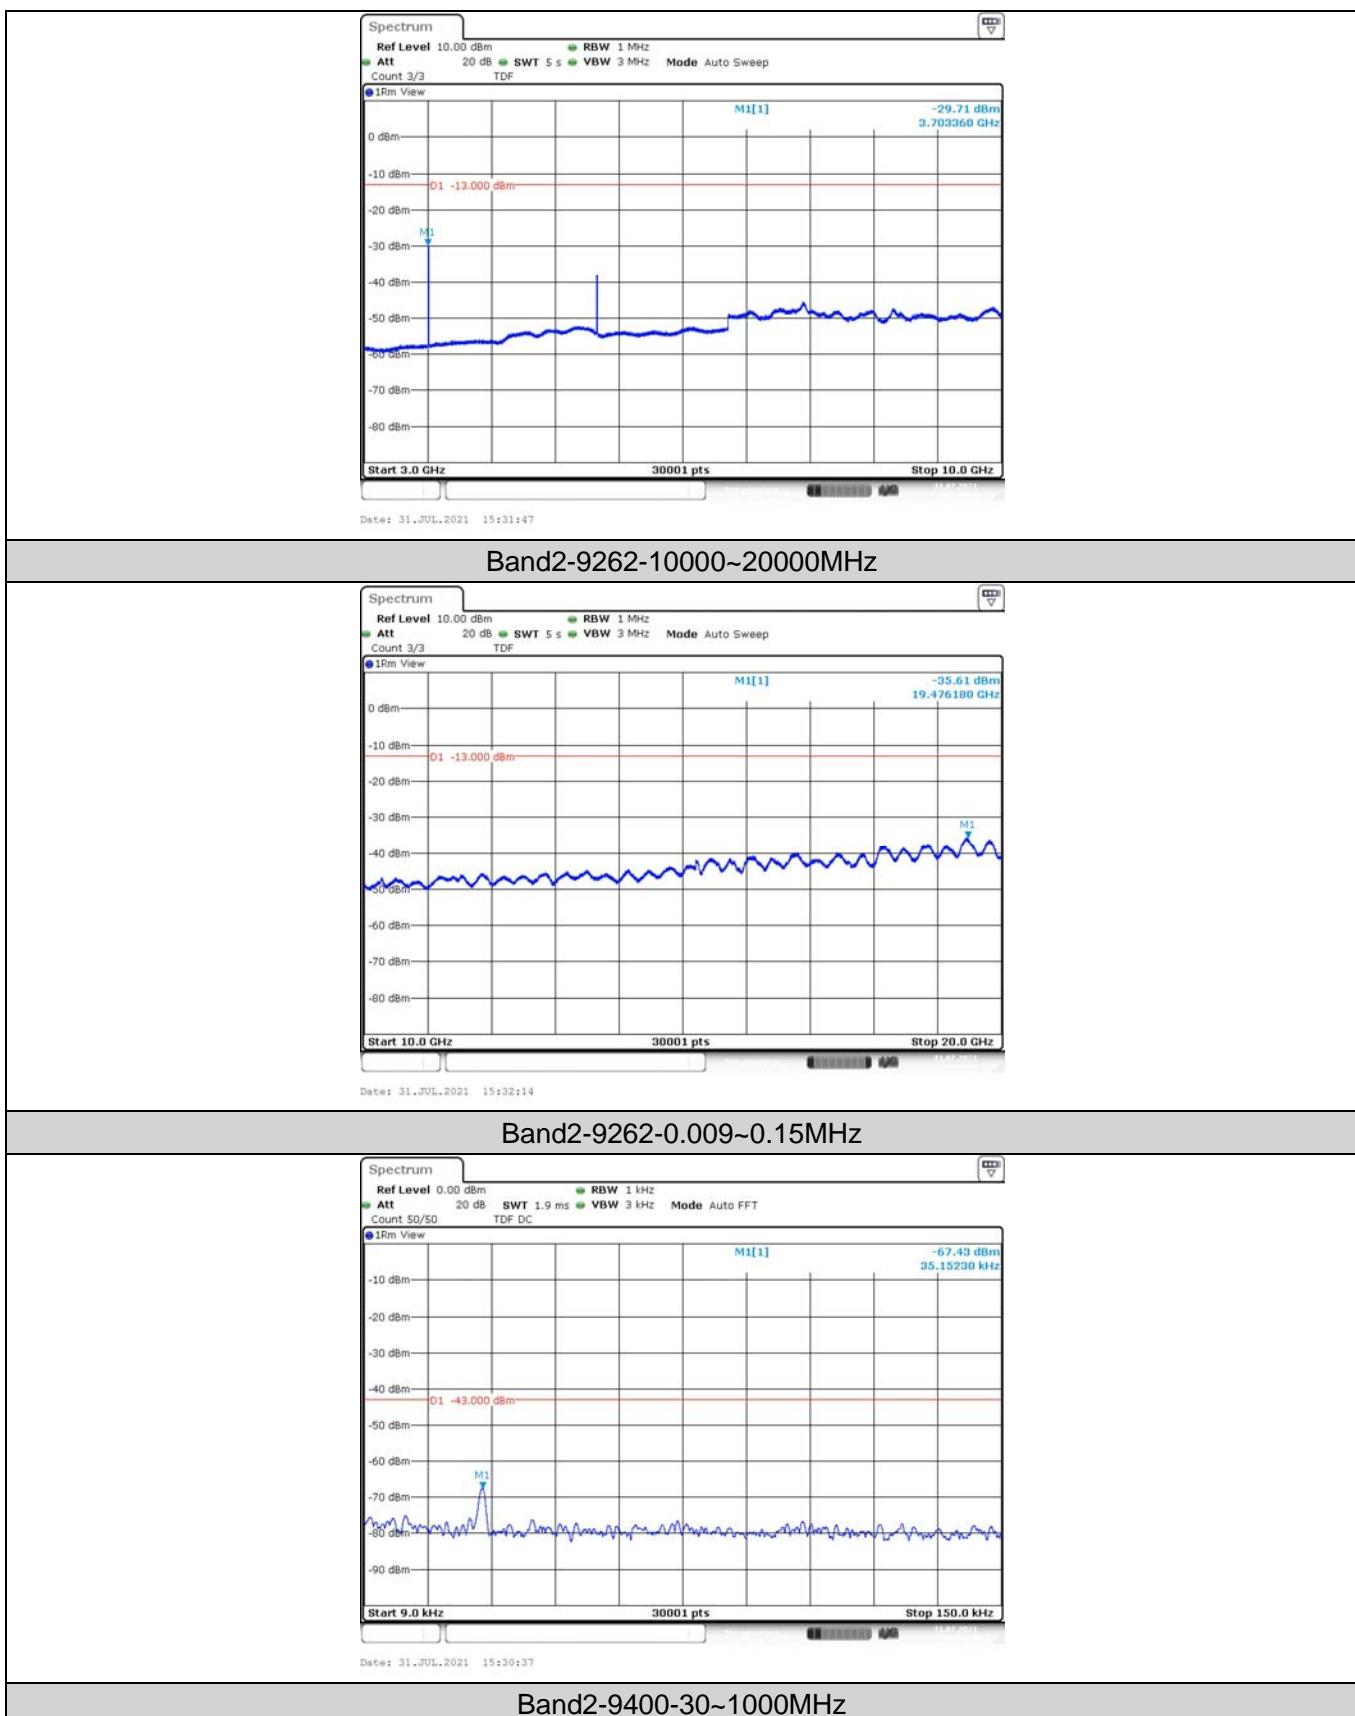


CTC Laboratories, Inc.

 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

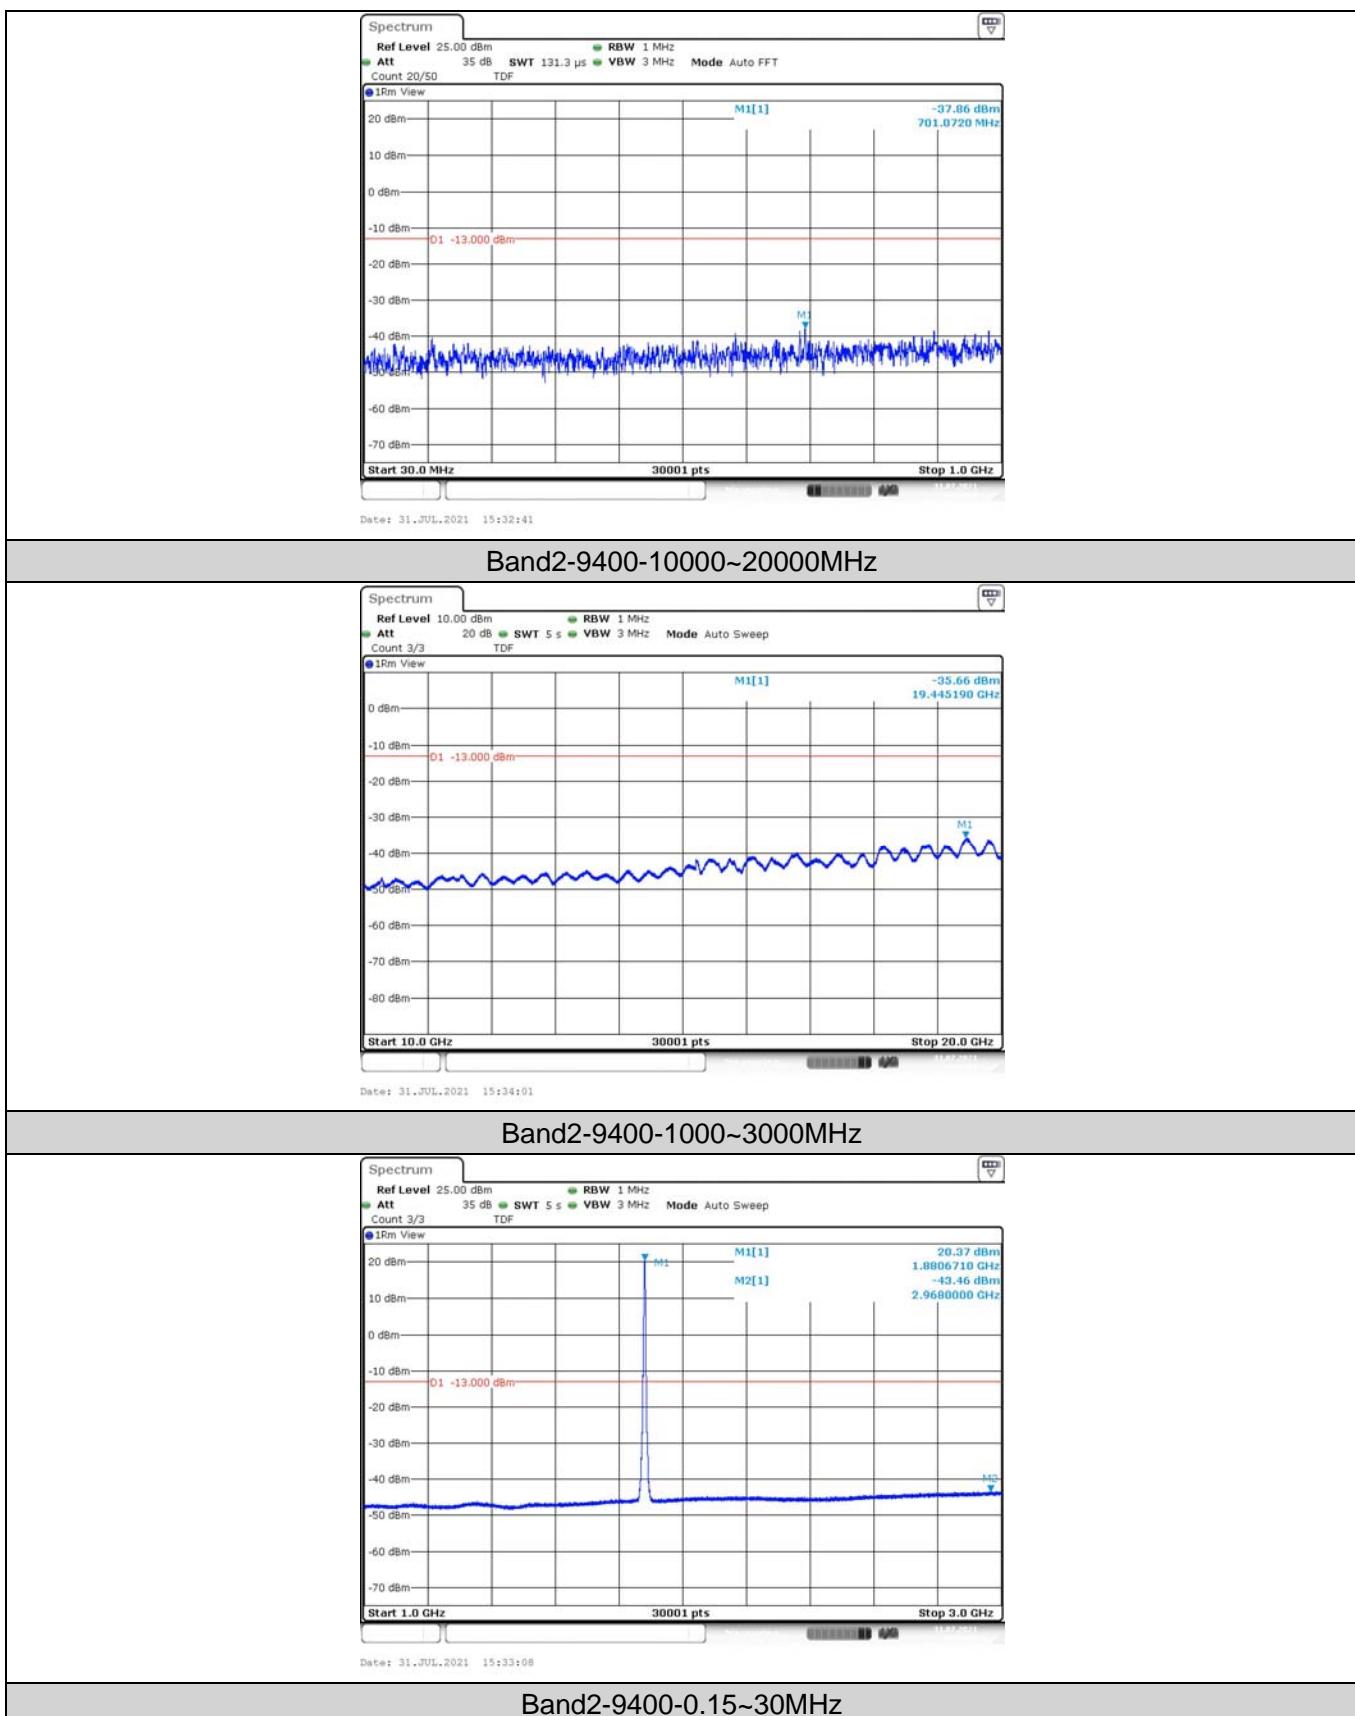


CTC Laboratories, Inc.

 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

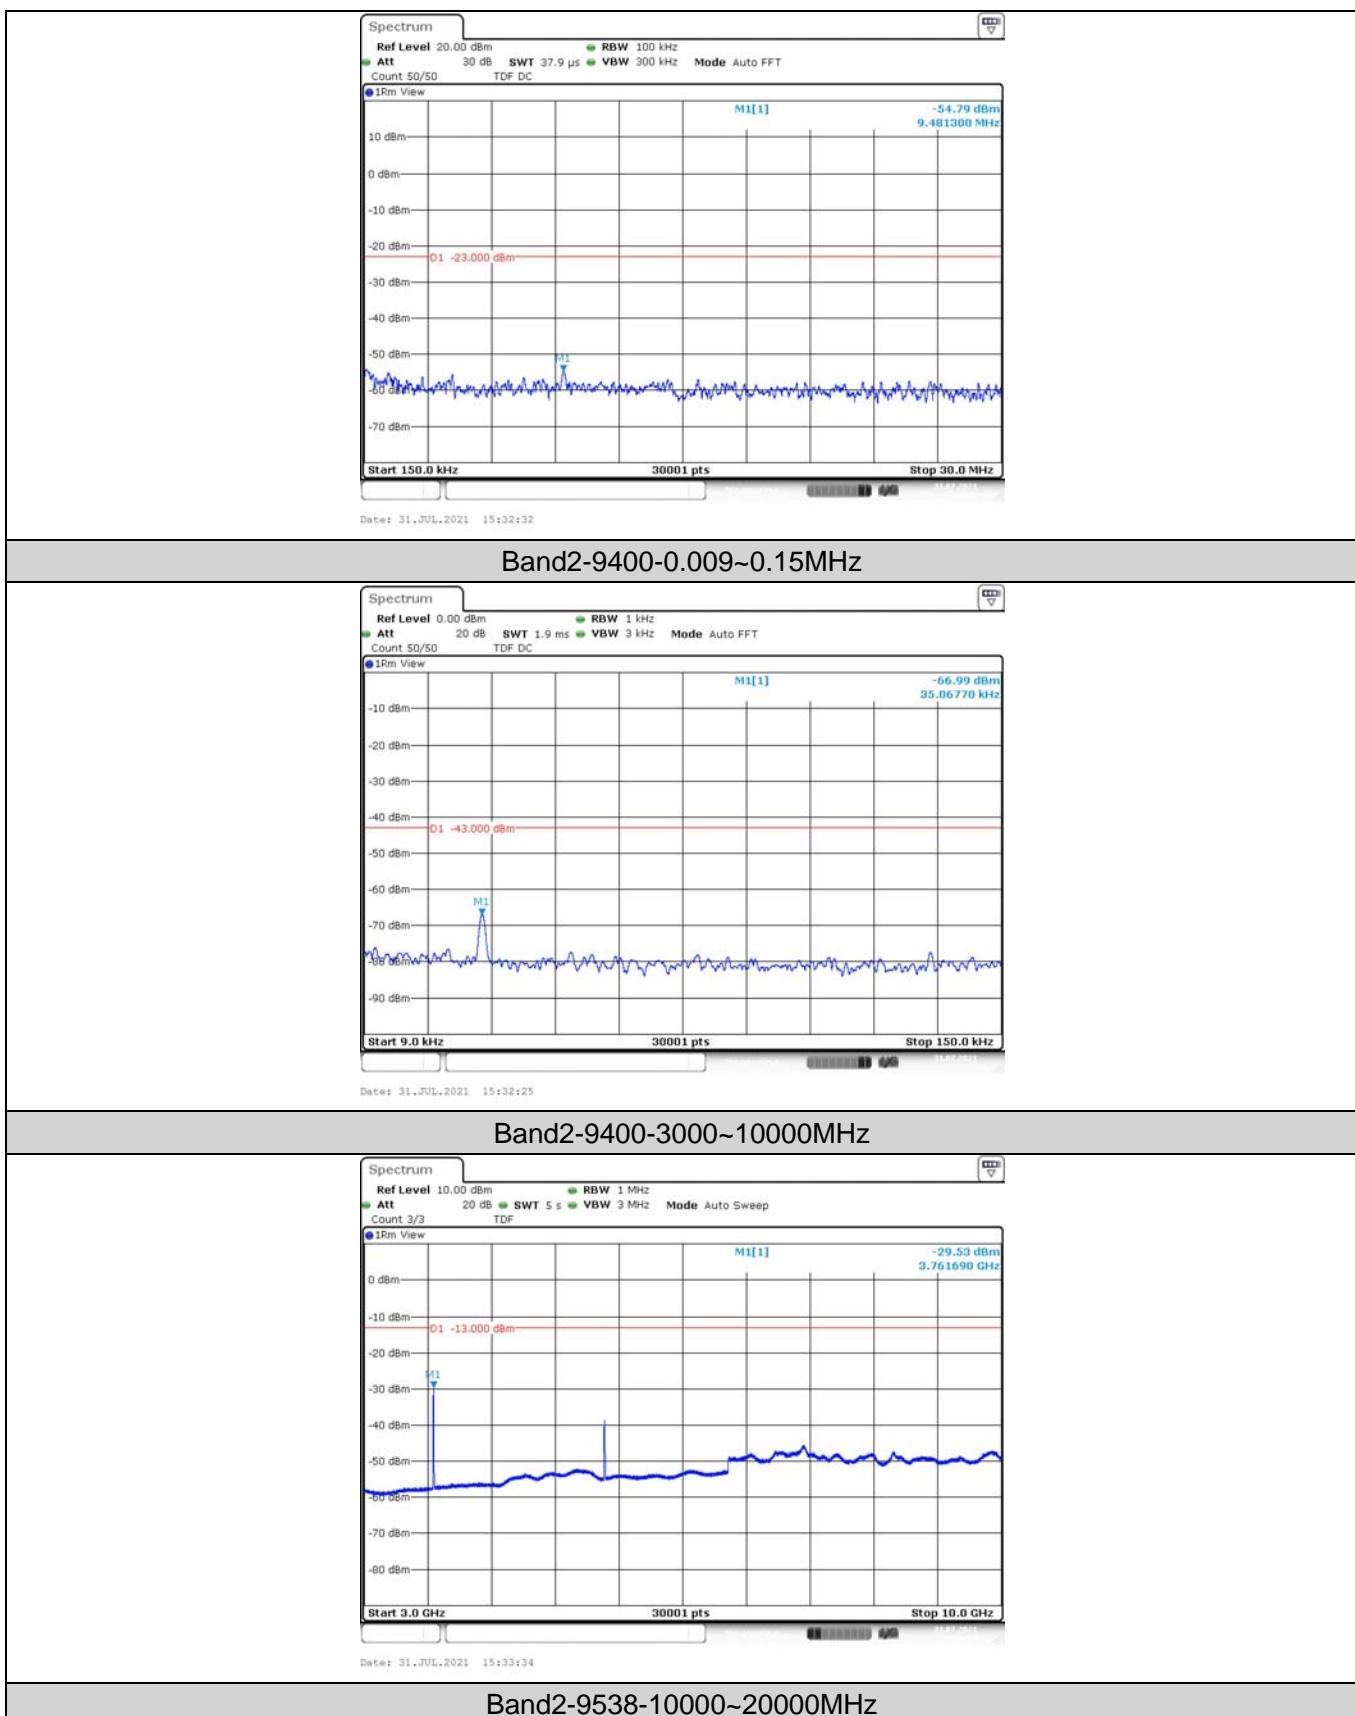

CTC Laboratories, Inc.

 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

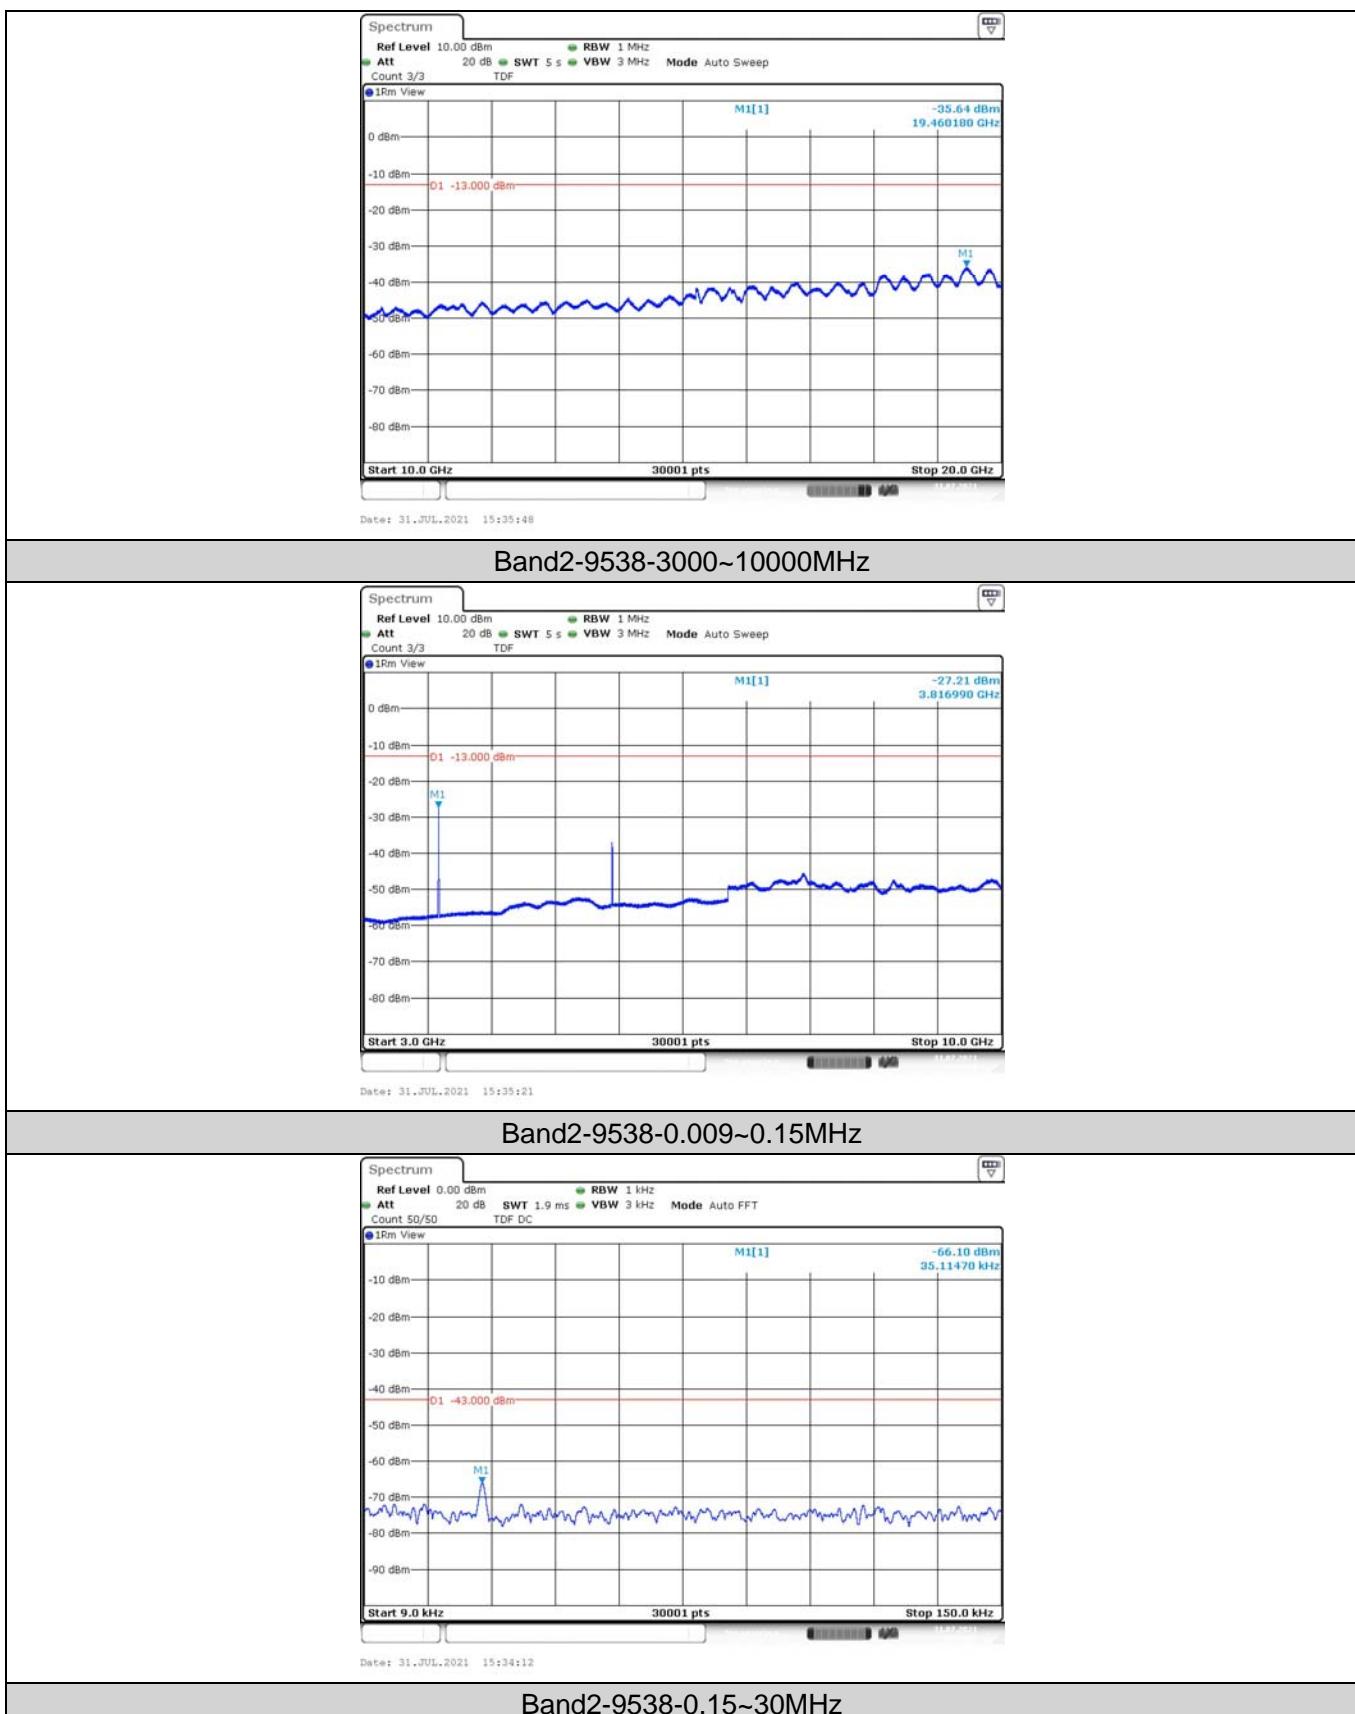



CTC Laboratories, Inc.


 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059


Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

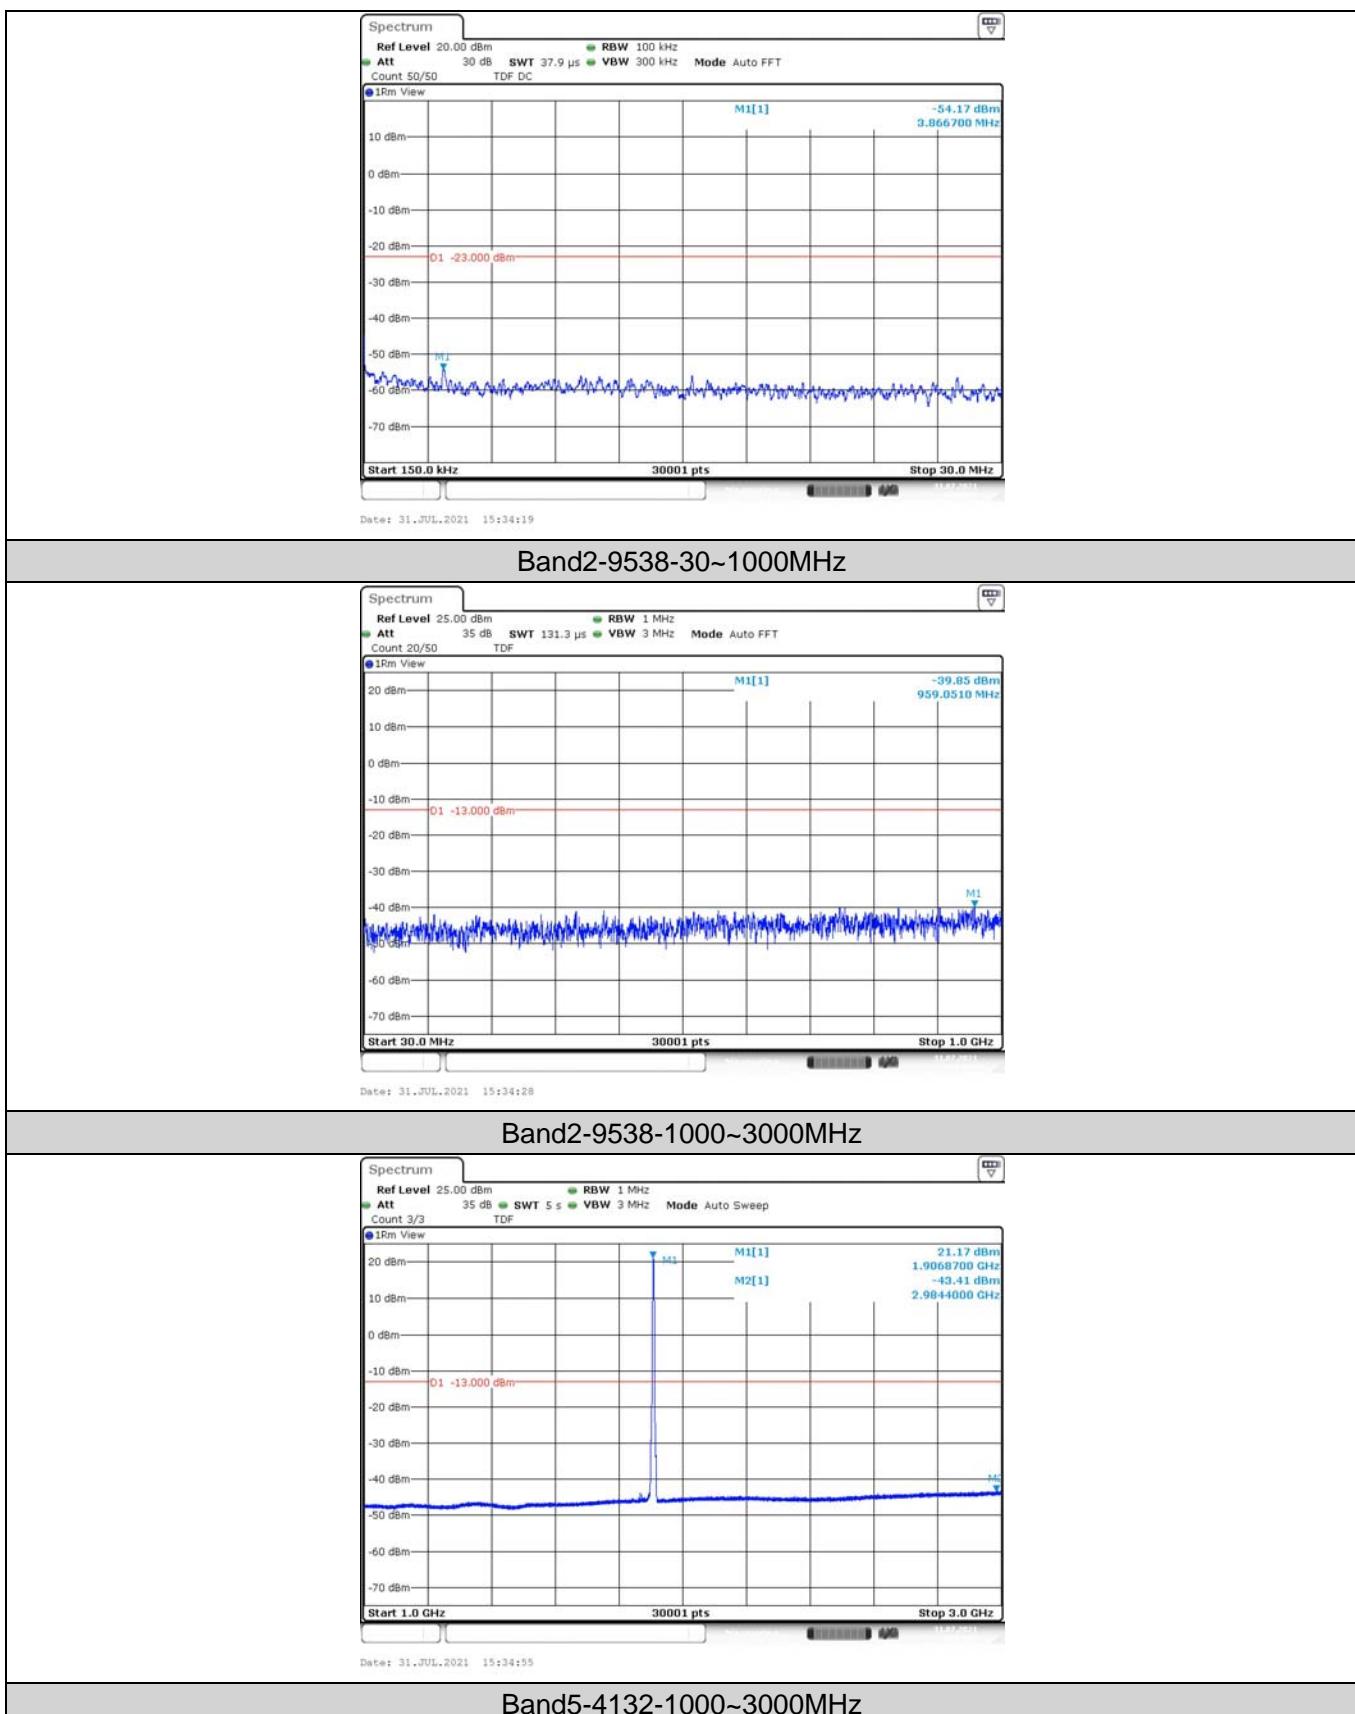


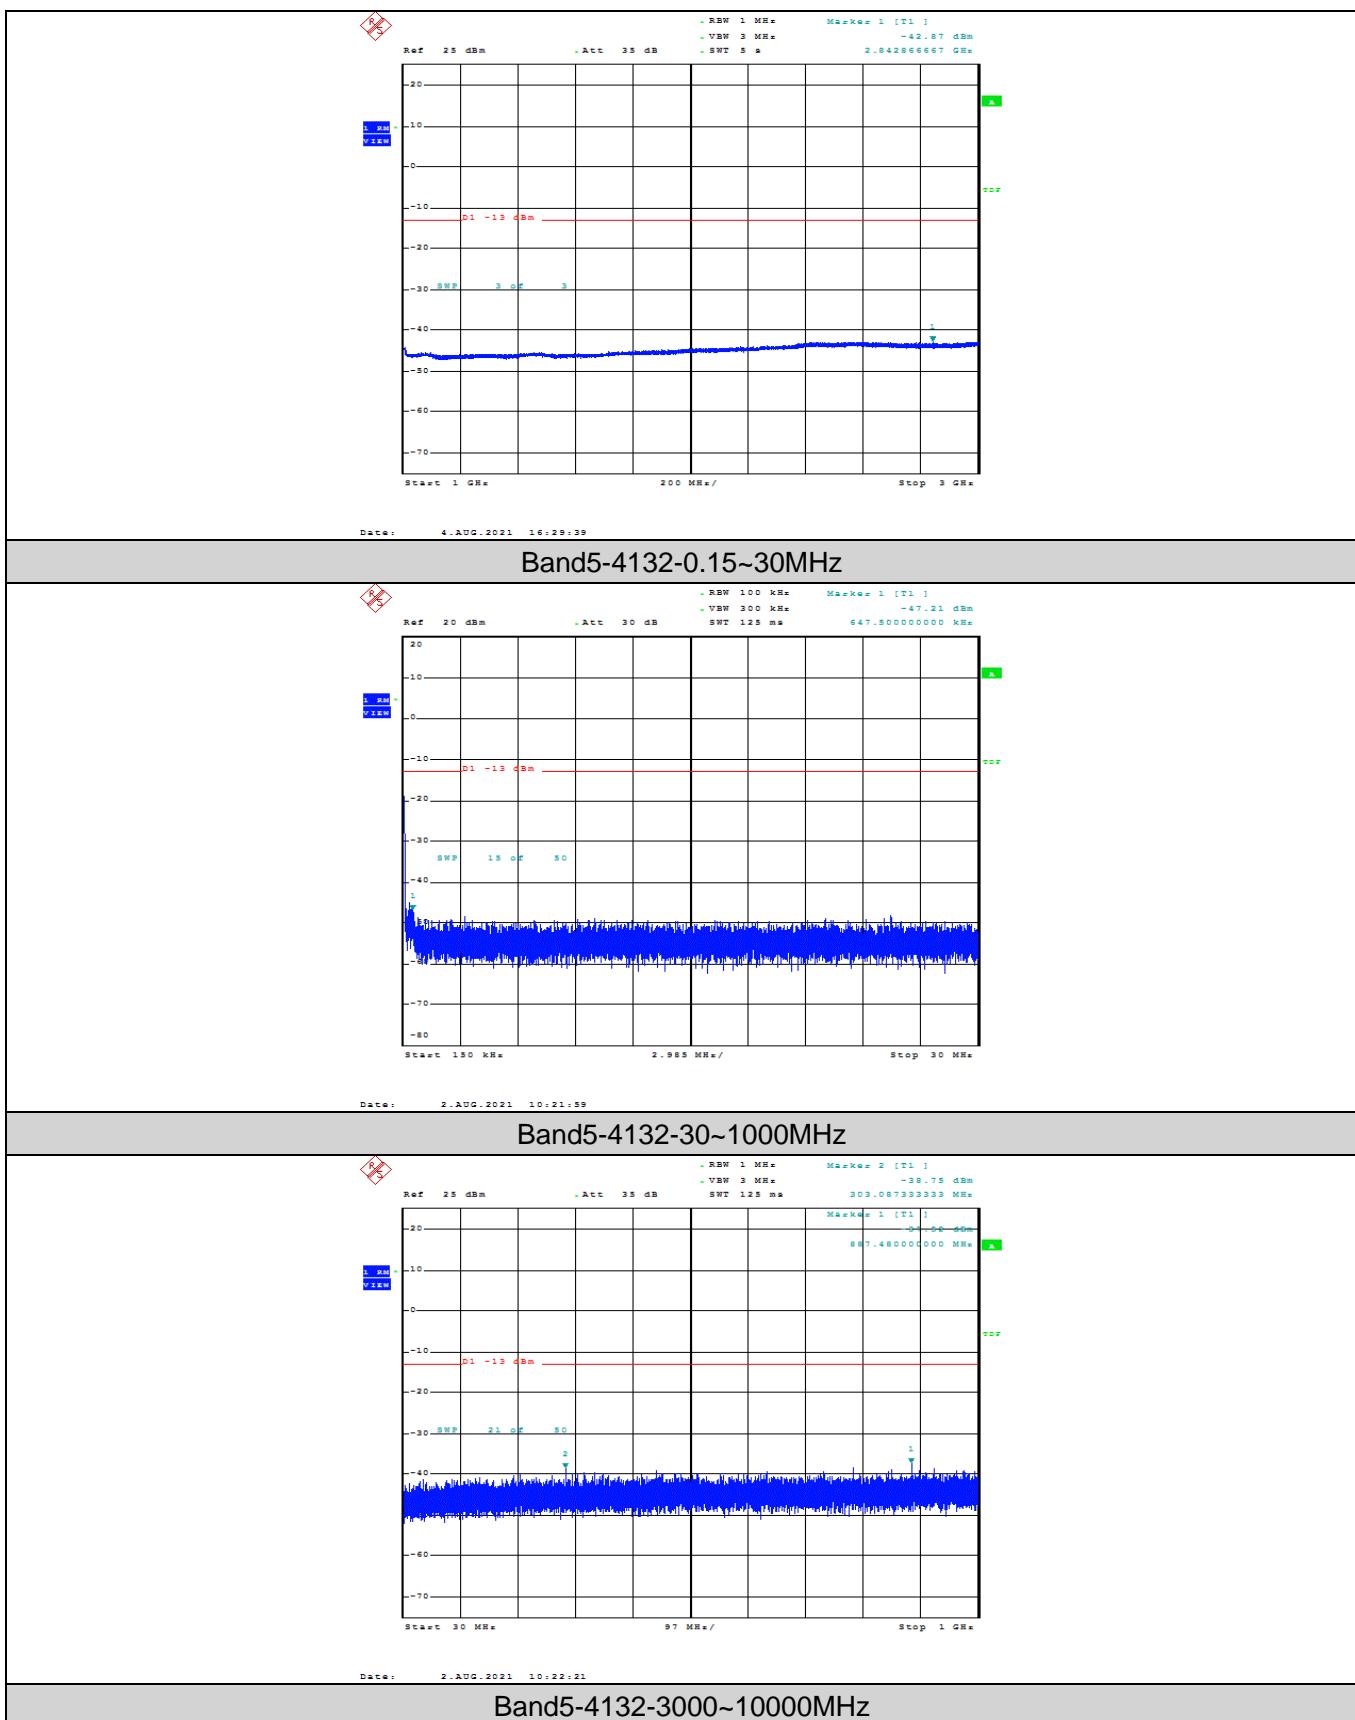


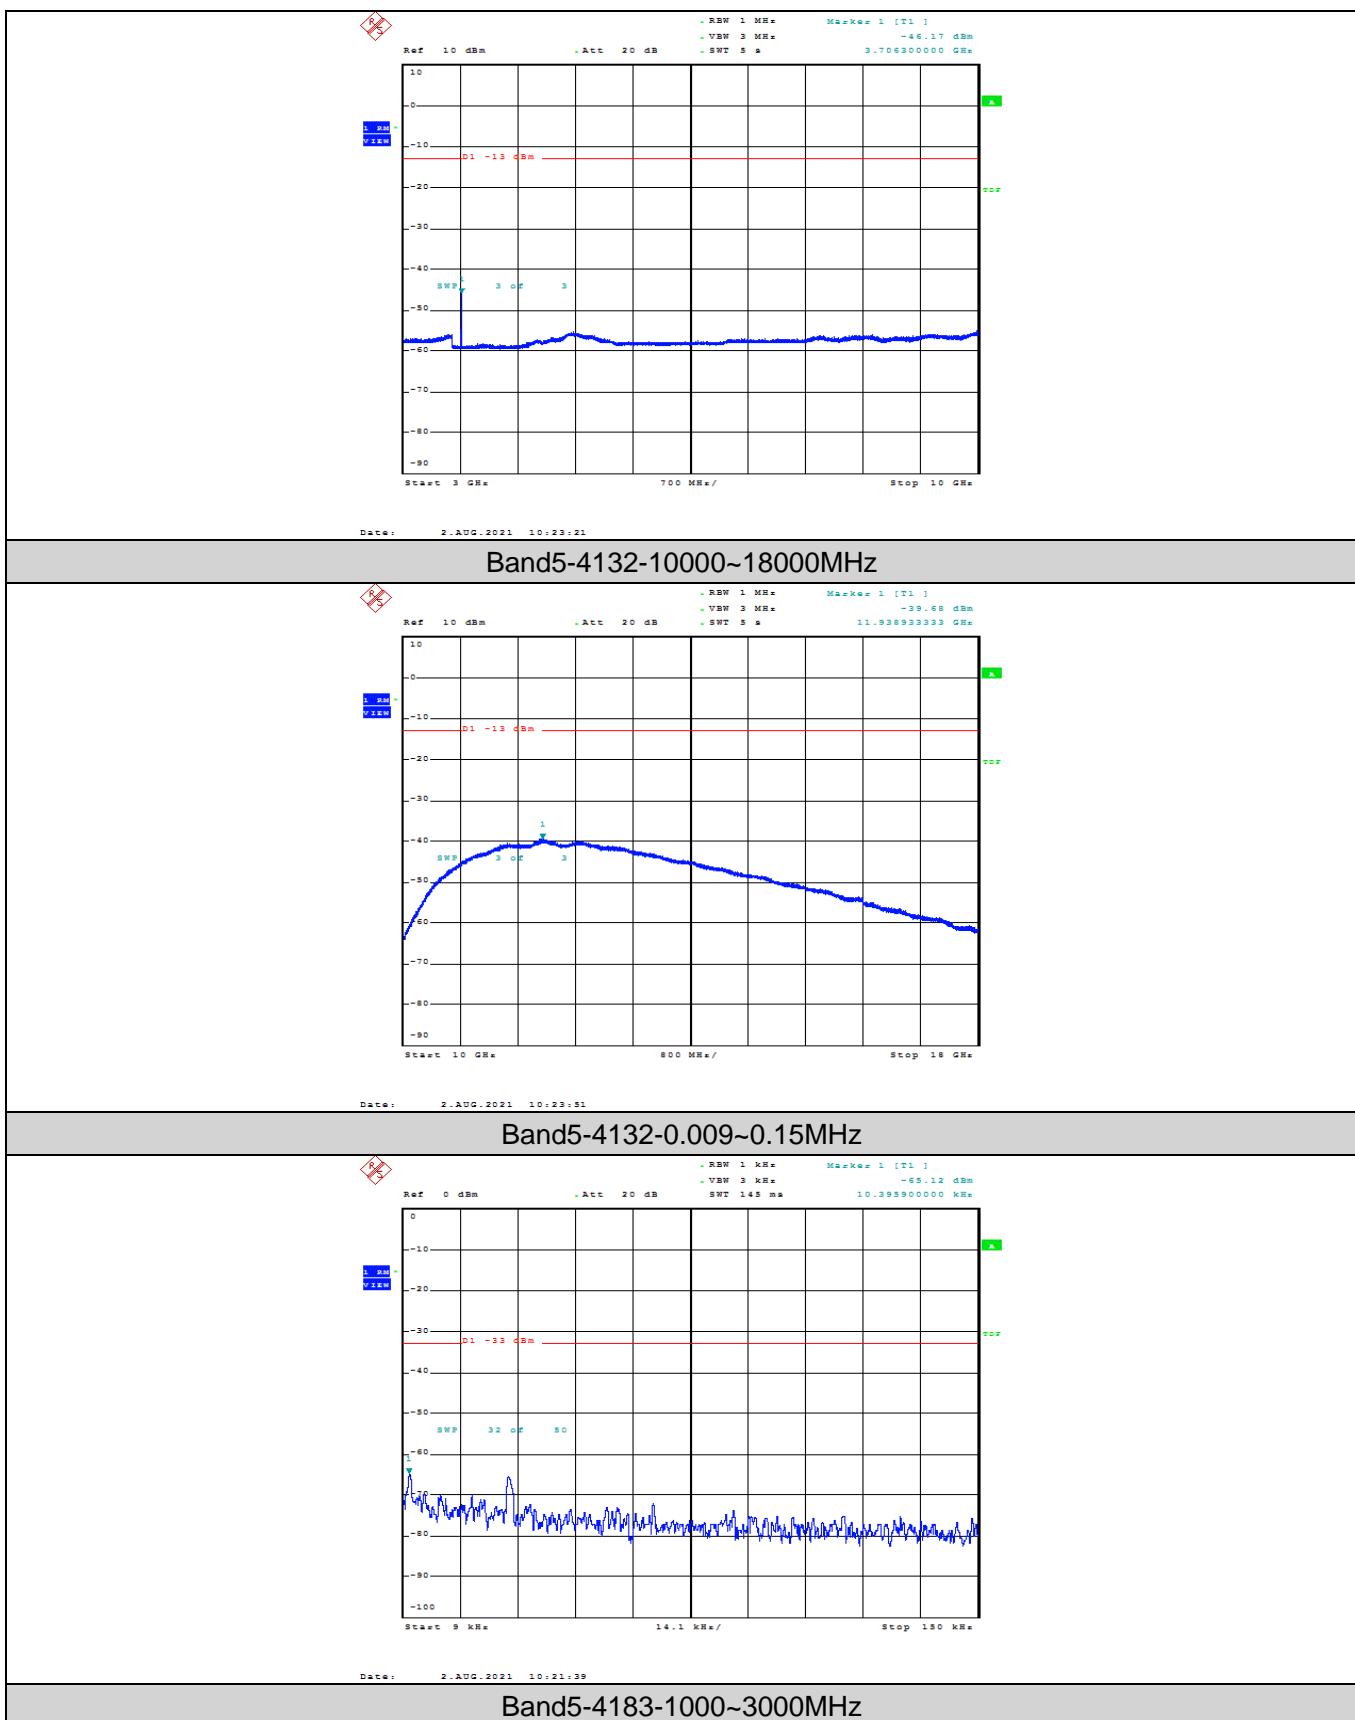

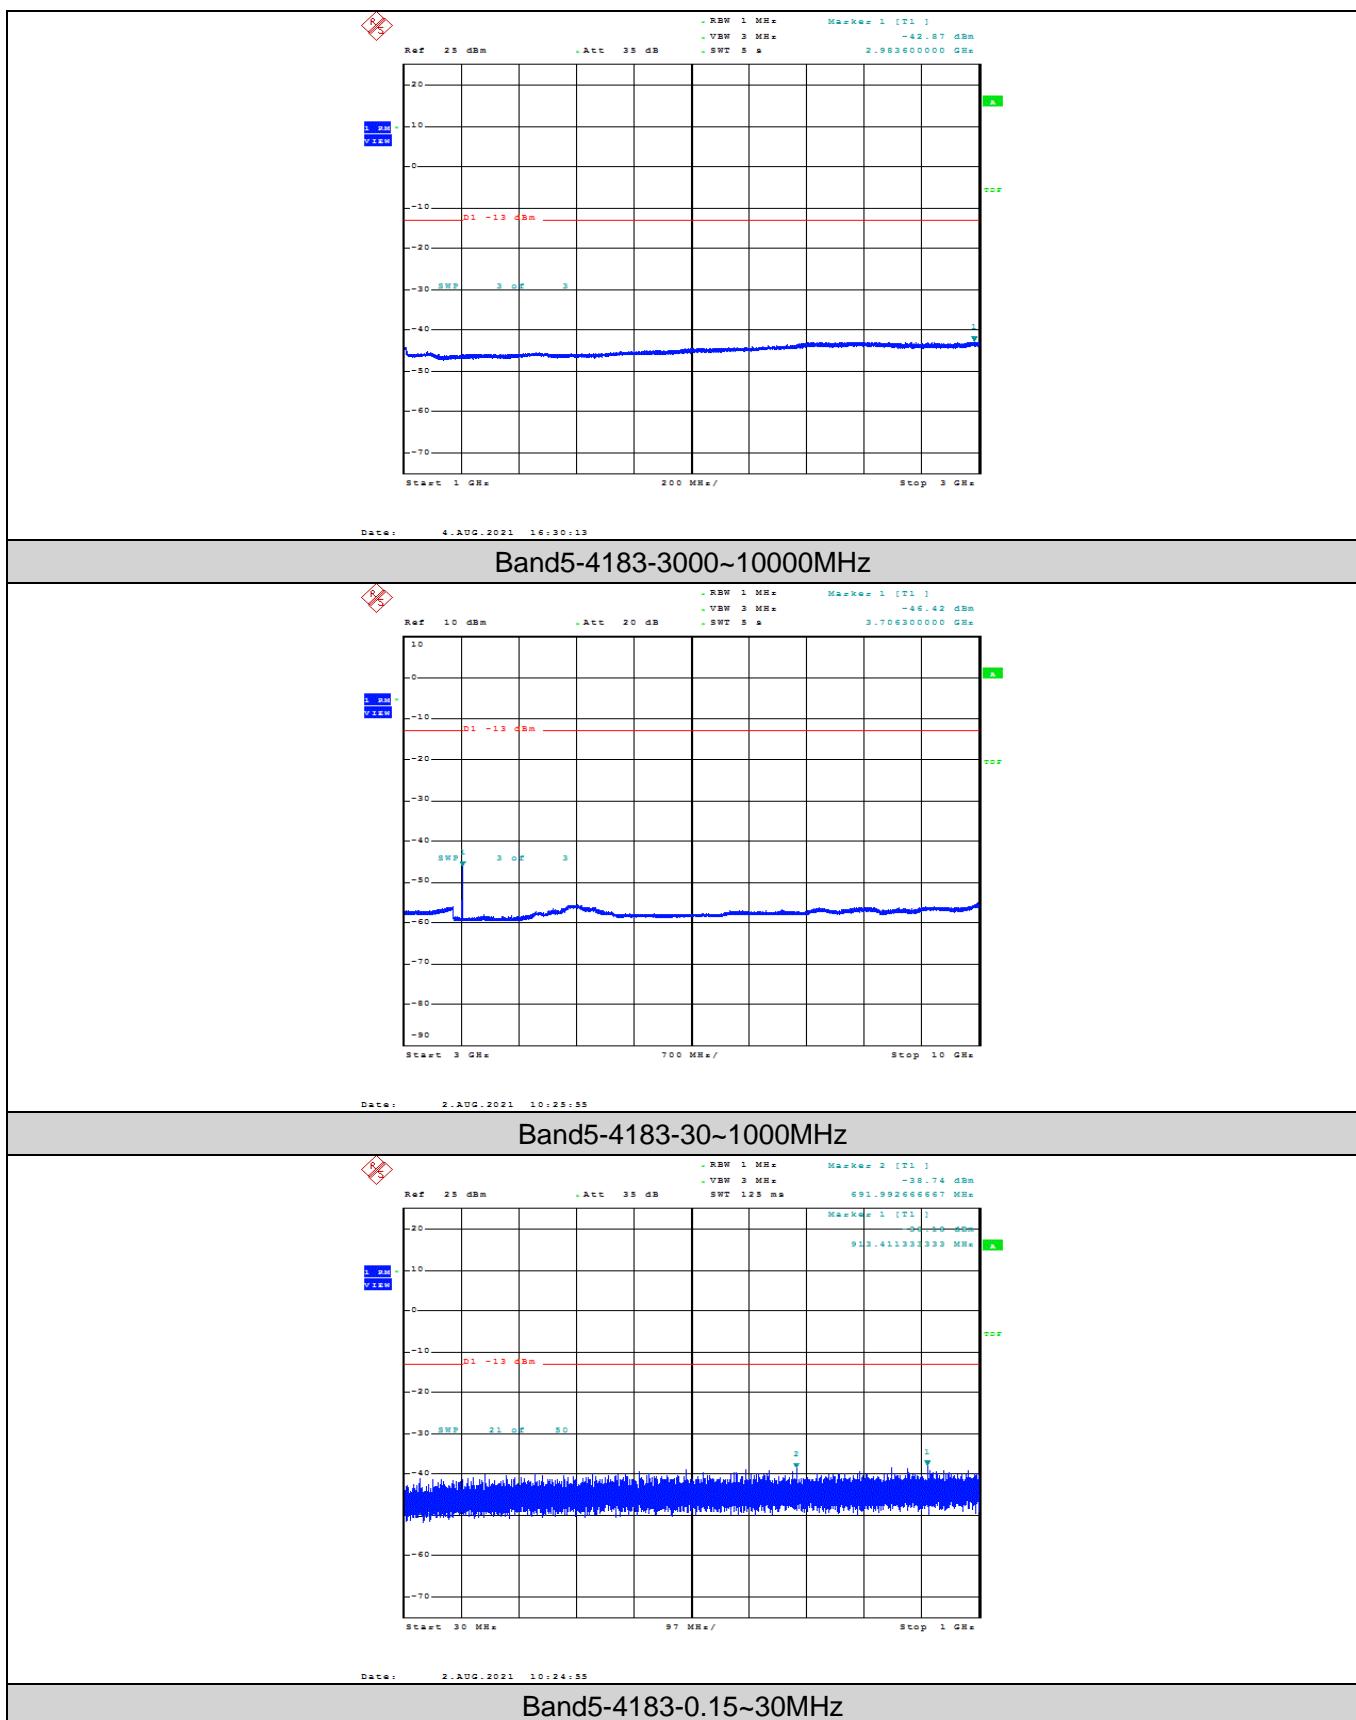

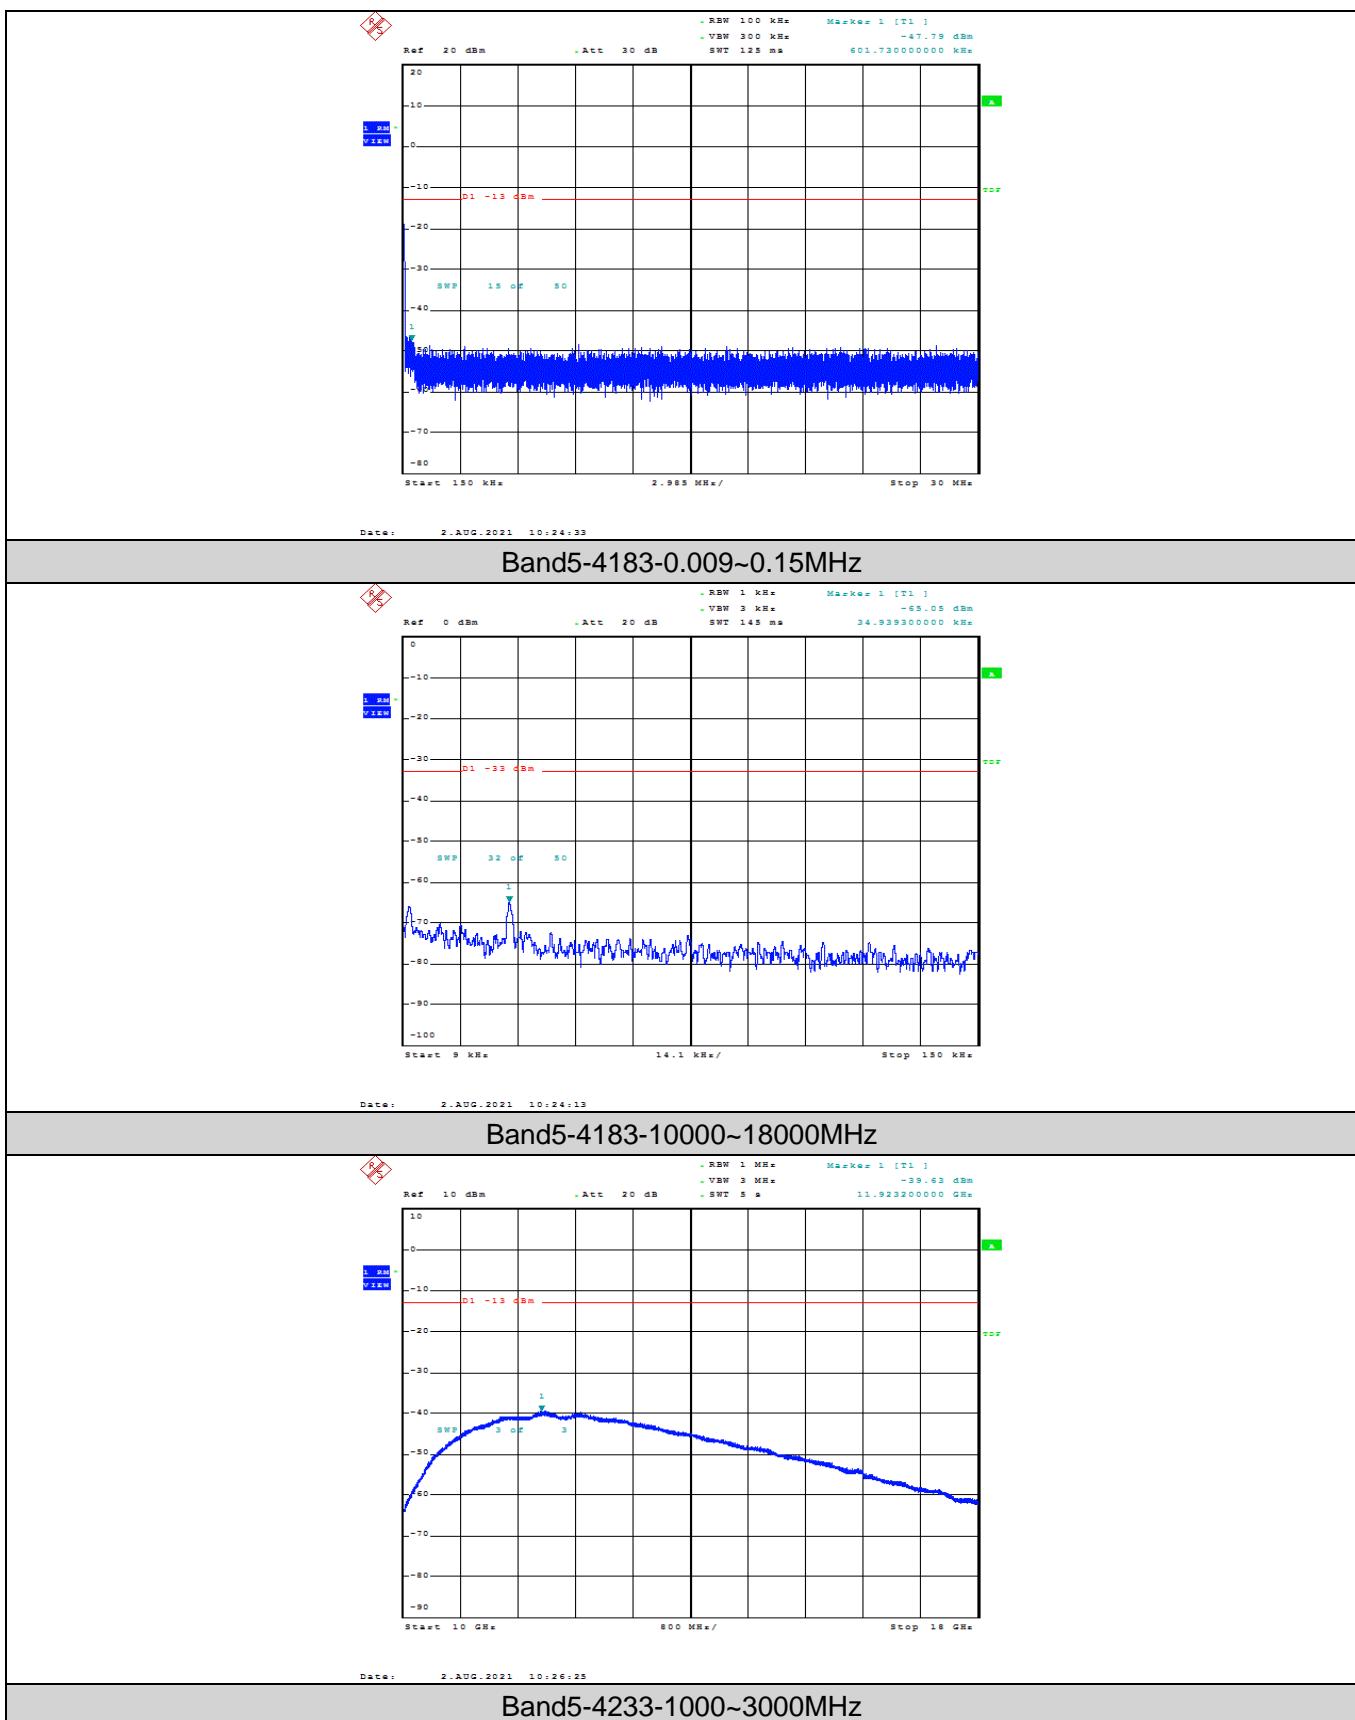

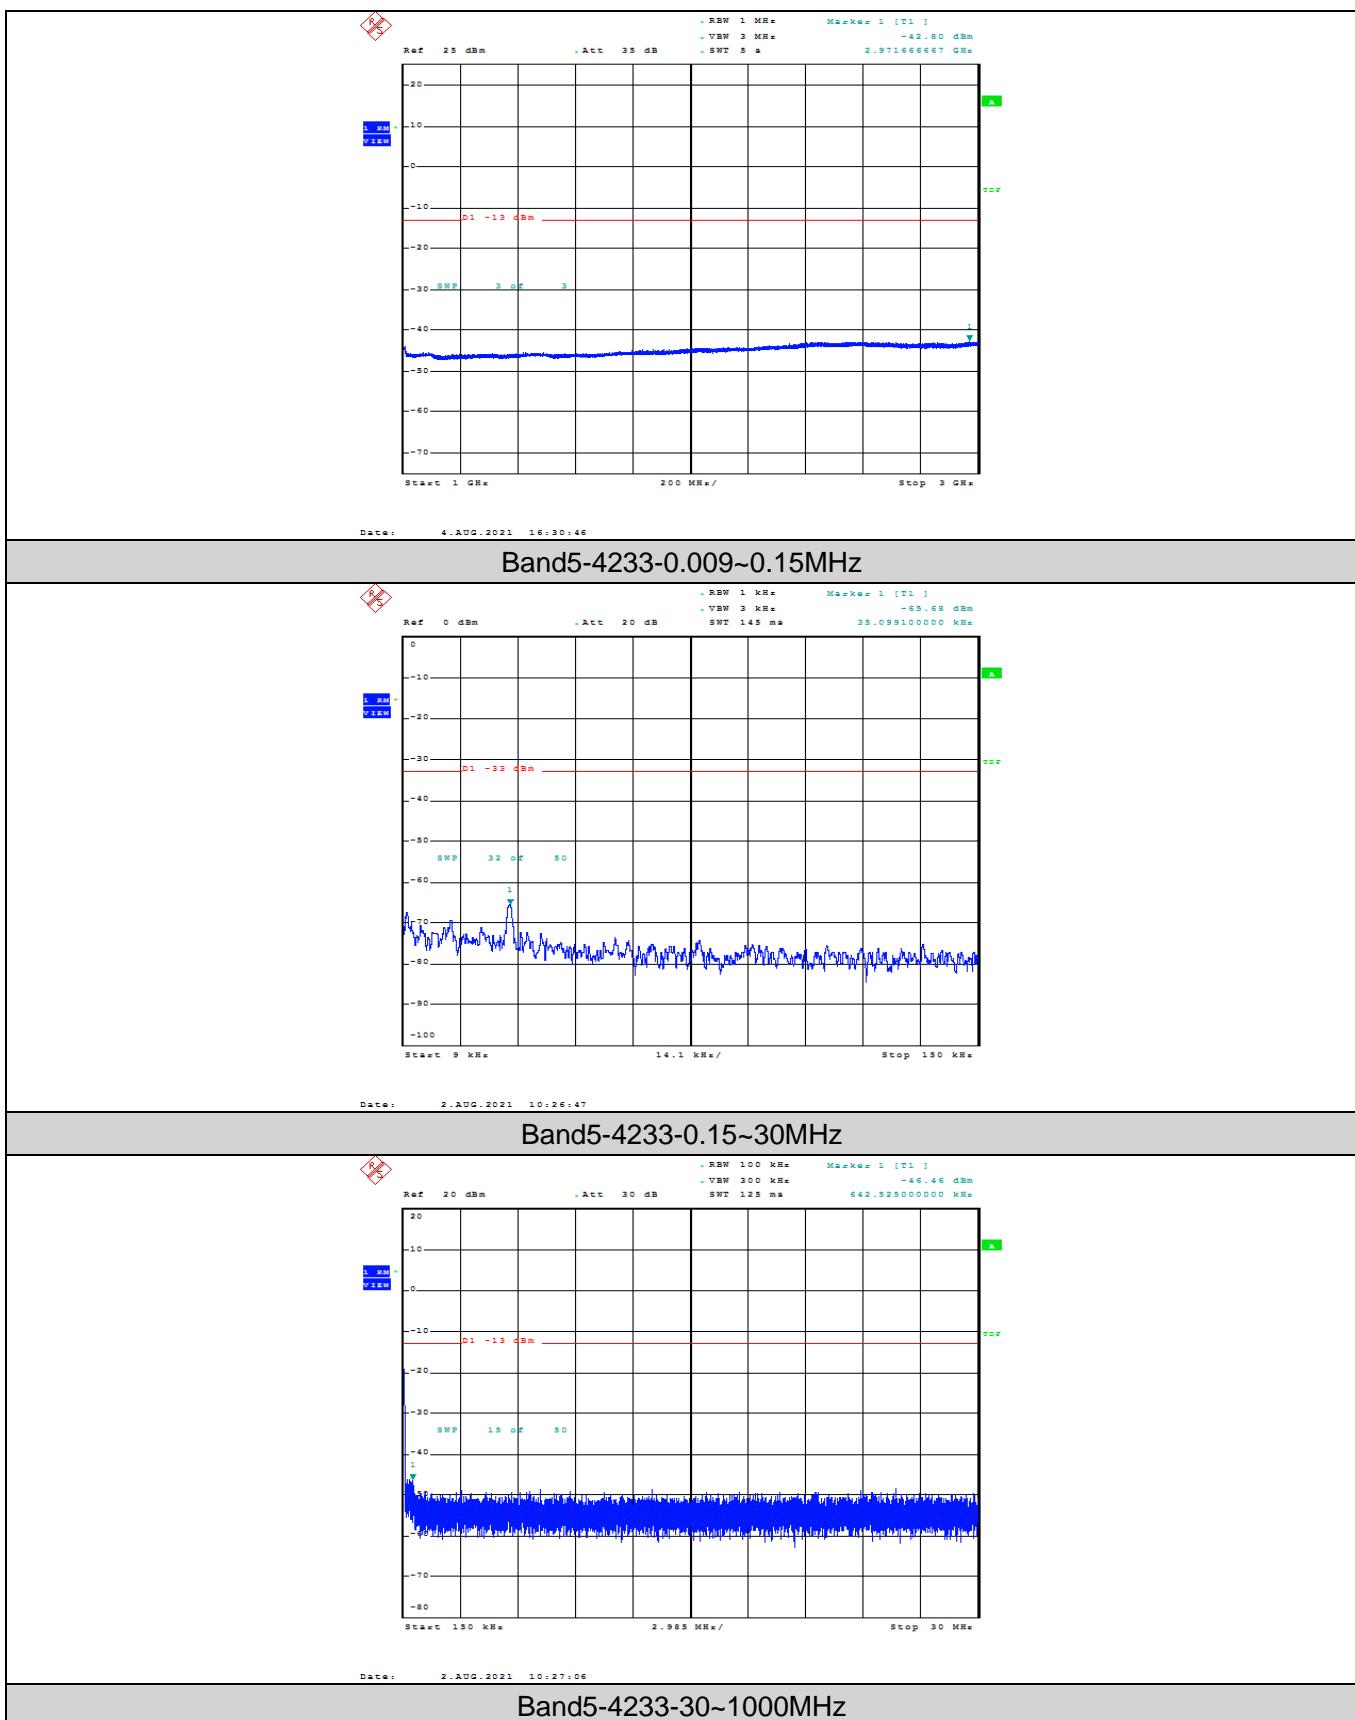

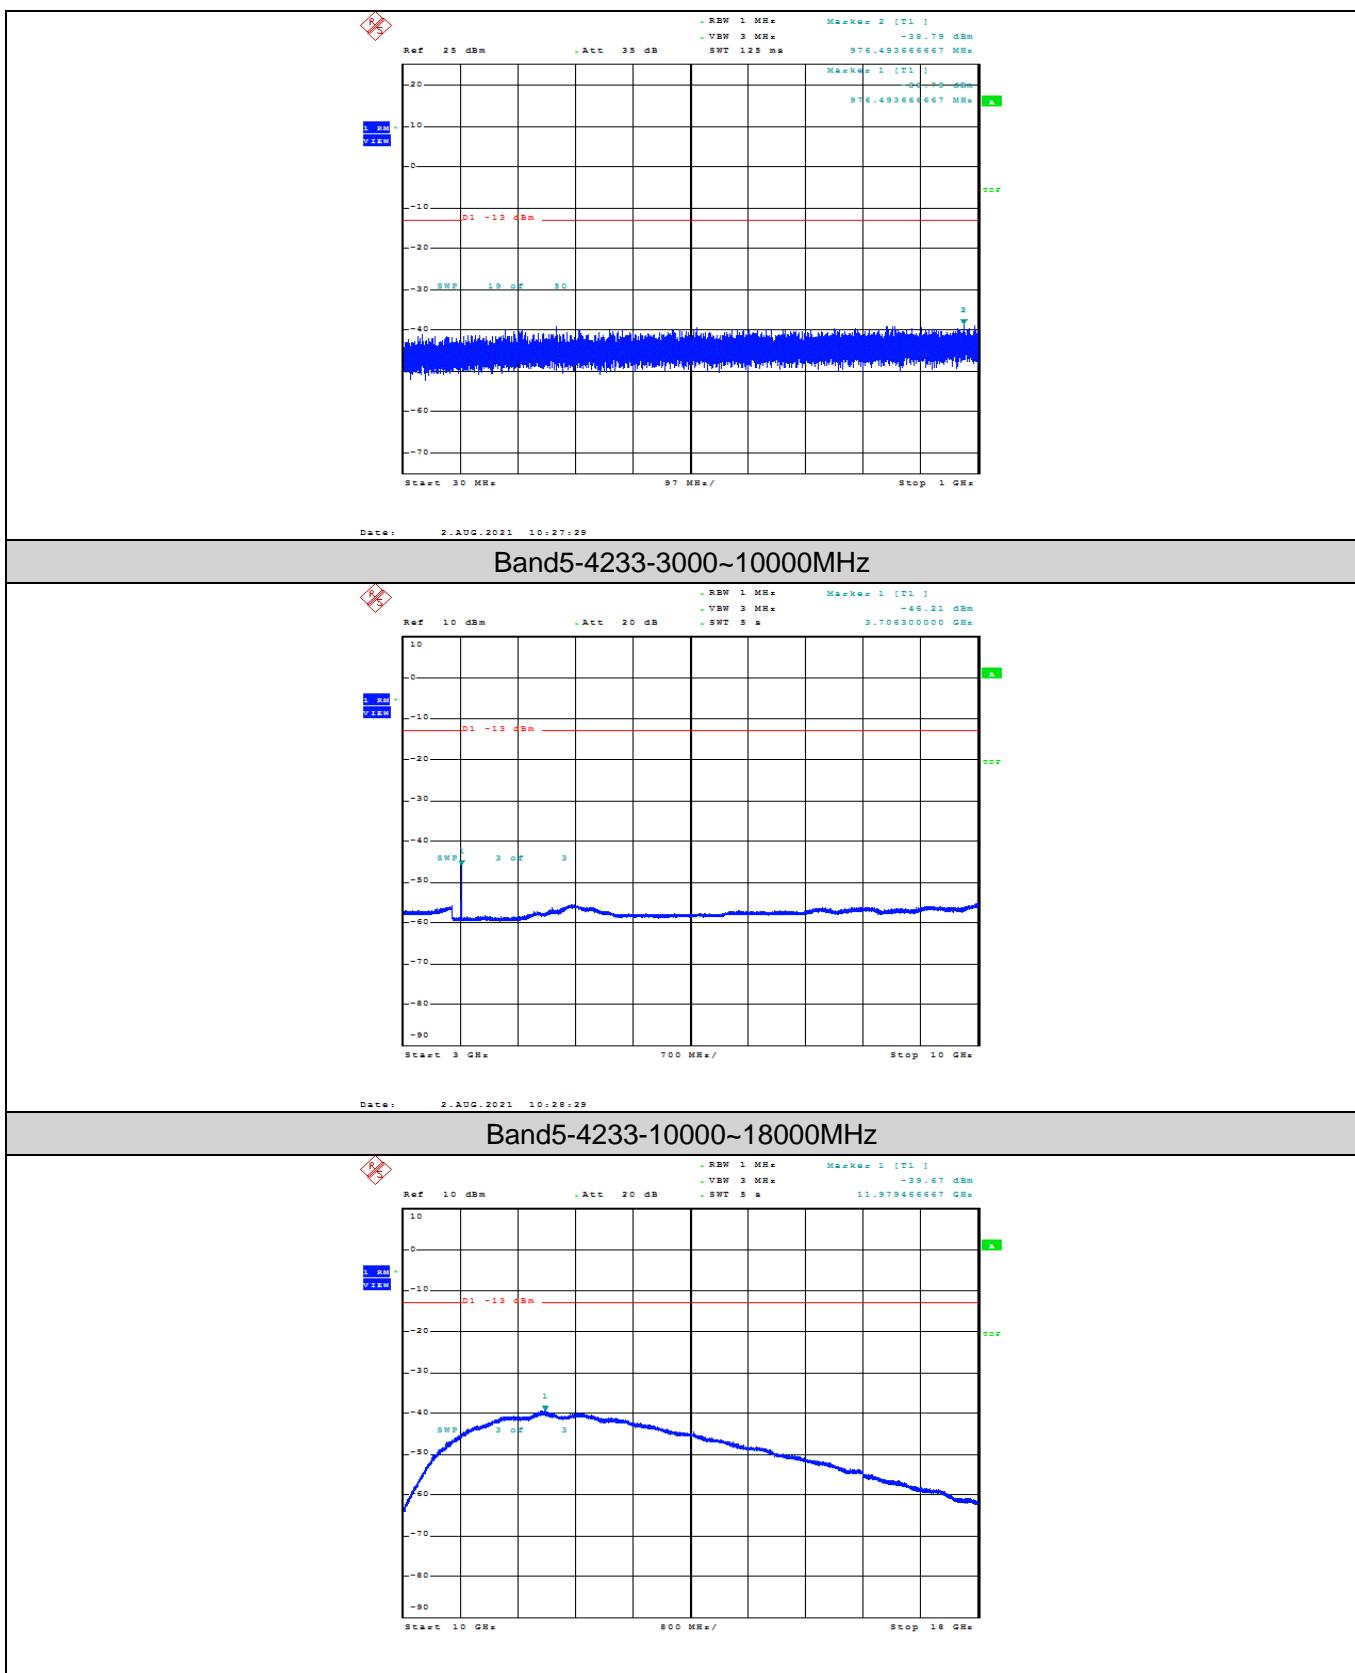



3.5. Band Edge compliance

LIMIT

FCC: §22.917, §24.238, §27.53 (h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FCC: §90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log10}(f/6.1)$ decibels or $50 + 10\text{Log10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\text{Log10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

RSS132§5.5

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

RSS133§6.5

Equipment shall comply with the limits in (i) and (ii) below.

(i) In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

RSS139§6.6

(i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, Footnote2 which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

(ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

TEST CONFIGURATION

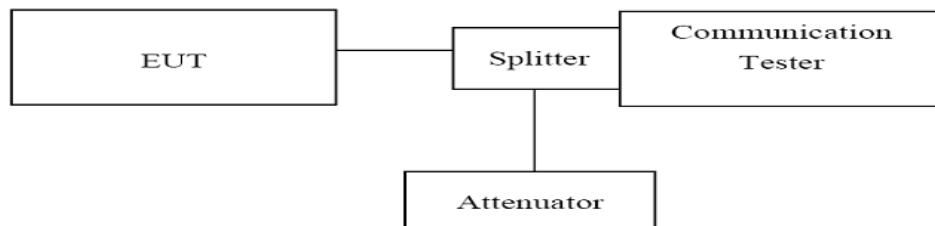

TEST PROCEDURE

The transmitter output was connected to a R&S CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

- Set the spectrum analyzer span to include the block edge frequency.
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13dBm
- Set resolution bandwidth to at least 1% of emission bandwidth.

TEST RESULTS

GSM 850					
Channel Number	Frequency (MHz)	Max Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
128	824.20	823.98	-17.72	-13.00	Pass
251	848.80	849.02	-15.91	-13.00	Pass

GPRS 850					
Channel Number	Frequency (MHz)	Max Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
128	824.20	823.98	-21.45	-13.00	Pass
251	848.80	849.02	-17.10	-13.00	Pass

Spectrum


Ref Level: 30.00 dBm RBW: 5 kHz
Att: 40 dB SWT: 100 ms VBW: 20 kHz Mode: Auto Sweep
Count 10/10 TDF

Date: 5.AUG.2021 16:22:37

Spectrum

Ref Level: 30.00 dBm RBW: 5 kHz
Att: 40 dB SWT: 100 ms VBW: 20 kHz Mode: Auto Sweep
Count 10/10 TDF

Date: 5.AUG.2021 16:22:48

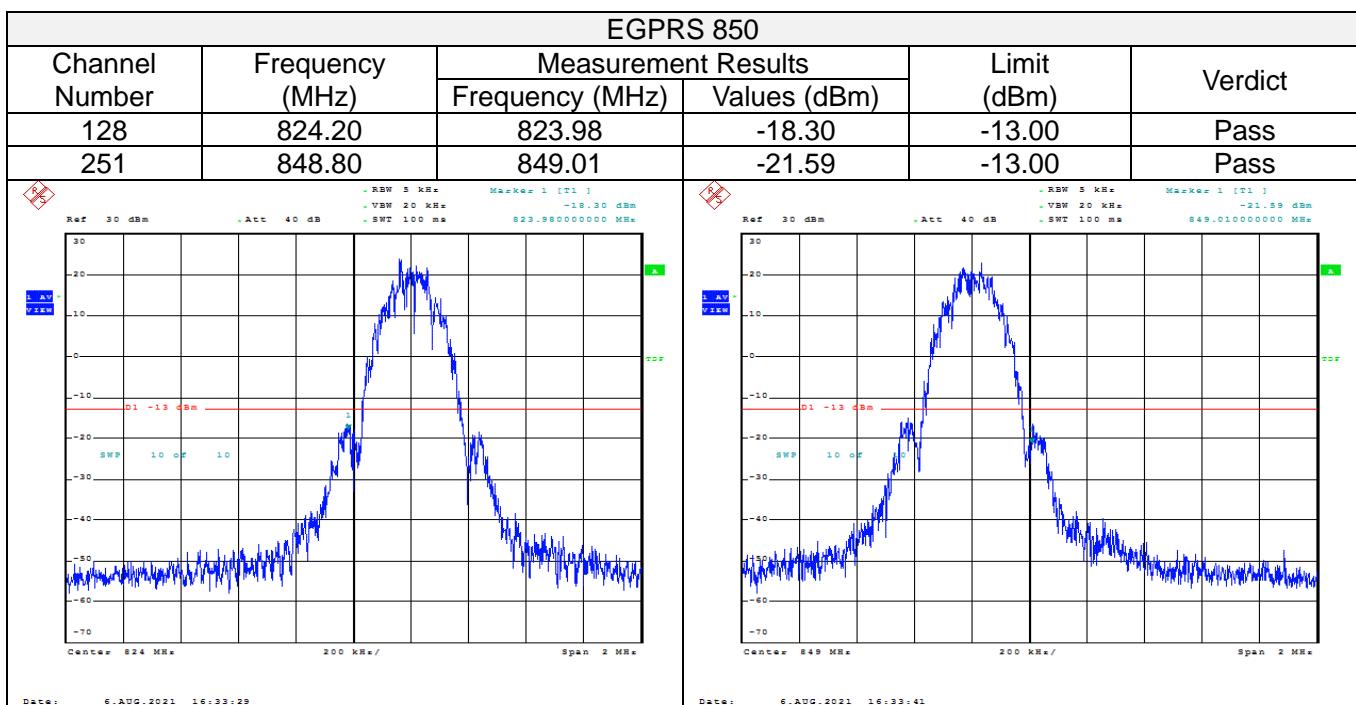

GSM 1900					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
512	1850.20	1850.00	-24.42	-13.00	Pass
810	1909.80	1910.02	-20.45	-13.00	Pass

Spectrum

Date: 5.AUG.2021 16:31:54

Spectrum

Date: 5.AUG.2021 16:32:05



GPRS 1900					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
512	1850.20	1849.98	-18.67	-13.00	Pass
810	1909.80	1910.02	-20.50	-13.00	Pass

Spectrum

Date: 5.AUG.2021 16:32:39

Spectrum

Date: 5.AUG.2021 16:32:50

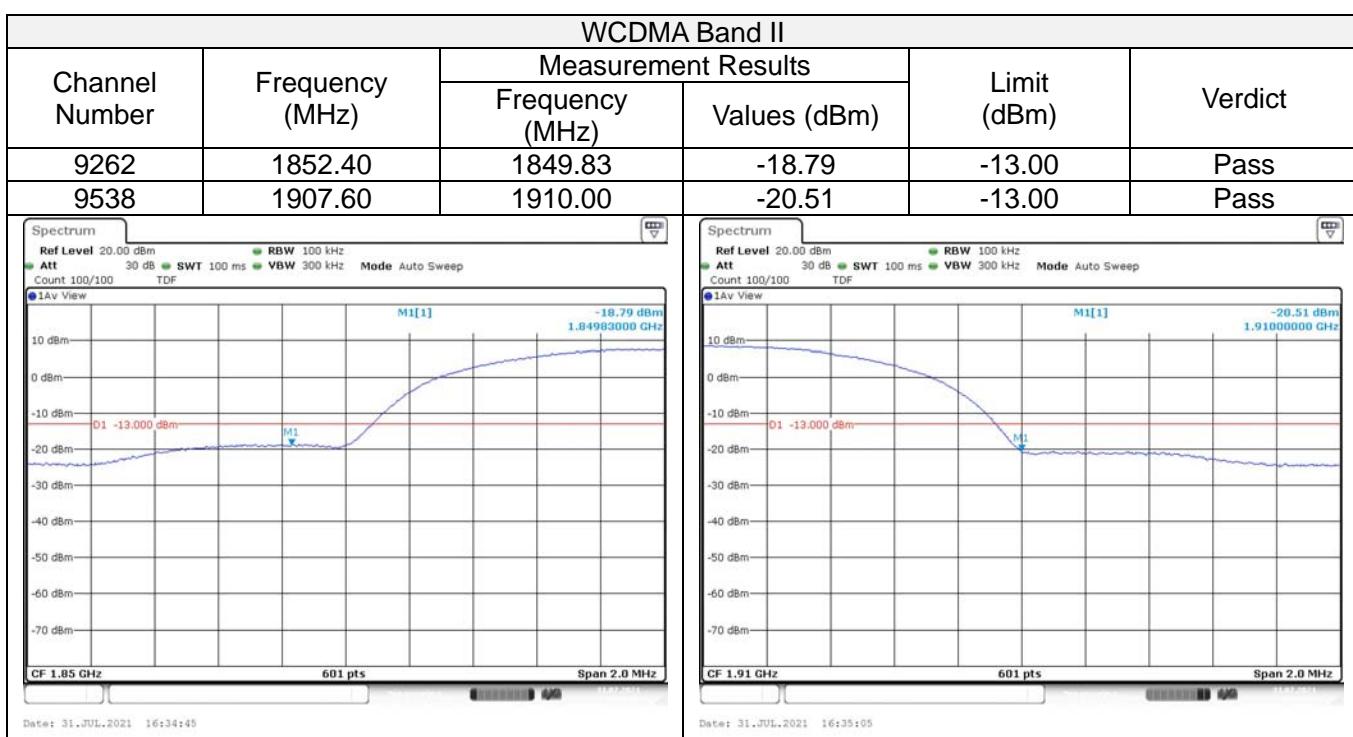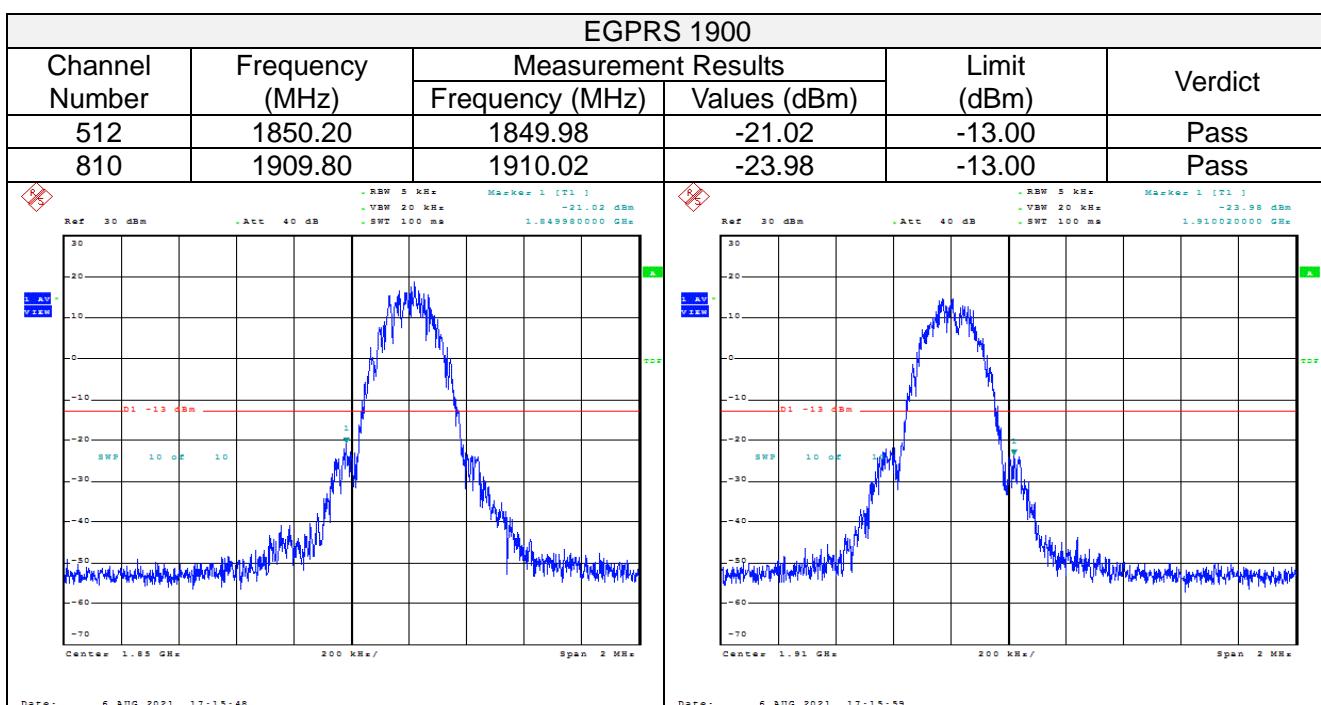

WCDMA Band V					
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Verdict
		Frequency (MHz)	Values (dBm)		
4132	826.40	824.00	-25.73	-13.00	Pass
4233	846.60	849.00	-25.77	-13.00	Pass

Date: 2.AUG.2021 11:11:56

Date: 2.AUG.2021 11:13:07

3.6. Radiated Power Measurement


LIMIT

FCC: §2.1046, §22.913, §24.232, §27.50 and §90.635


IC: RSS132§5.4; RSS133§6.4 and RSS139§6.5.

TEST CONFIGURATION

For the actual test configuration, please refer to the related Item – EUT Test Photos.

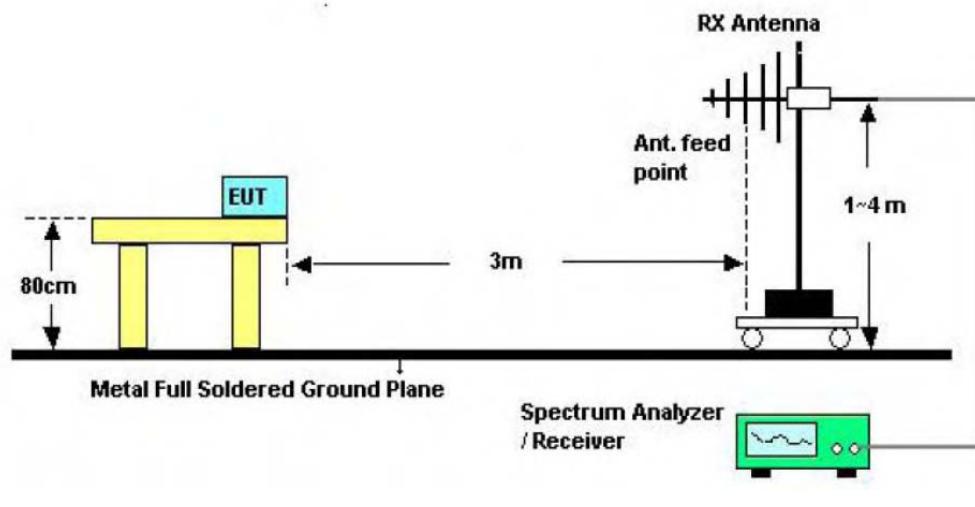

Below 1GHz

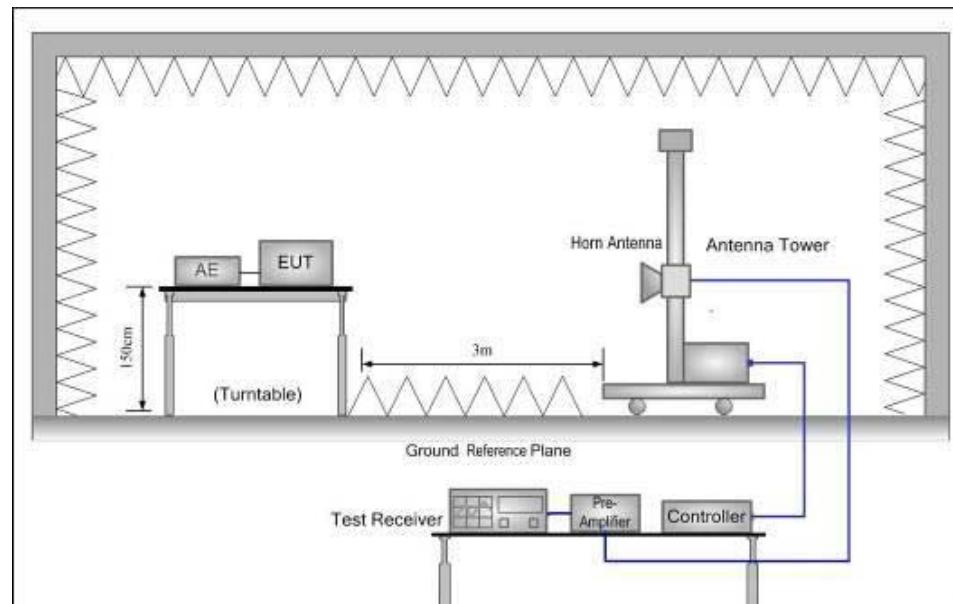

Above 1GHz



TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, and the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. An amplifier should be connected to the Signal Source output port. And the cable should be connecting between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
We used N5182A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST RESULTS

Remark:

1. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, and test data recorded in this report.

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : yz.cnca.cn



Measurement Data (worst case) :

Mode	Channel	Antenna Pol.	ERP	Limit (dBm)	Result
GSM850 (GSM)	128	V	31.72	38.45	Pass
		H	25.24		
	190	V	31.56		
		H	26.97		
	251	V	33.86		
		H	26.39		
GSM850 (GPRS)	128	V	31.77	38.45	Pass
		H	27.65		
	190	V	31.80		
		H	26.57		
	251	V	32.19		
		H	26.24		
GSM850 (EGPRS)	128	V	32.06	38.45	Pass
		H	26.34		
	190	V	32.97		
		H	26.07		
	251	V	32.11		
		H	25.75		

Mode	Channel	Antenna Pol.	EIRP	Limit (dBm)	Result
PCS1900 (GSM)	512	V	29.19	33.00	Pass
		H	25.23		
	661	V	29.46		
		H	24.00		
	810	V	28.34		
		H	24.97		
PCS1900 (GPRS)	512	V	29.04	33.00	Pass
		H	24.87		
	661	V	28.85		
		H	25.38		
	810	V	28.40		
		H	25.39		
PCS1900 (EGPRS)	512	V	28.15	33.00	Pass
		H	24.99		
	661	V	29.31		
		H	24.56		
	810	V	28.69		
		H	25.71		

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : yz.cnca.cn

中国国家认证认可监督管理委员会

Certification and Accreditation Administration of the People's Republic of China



Mode	Channel	Antenna Pol.	EIRP	Limit (dBm)	Result
WCDMA Band II (QPSK)	9262	V	27.31	33.00	Pass
		H	23.92		
	9400	V	26.29		
		H	23.90		
	9538	V	26.04		
		H	24.25		

Mode	Channel	Antenna Pol.	ERP	Limit (dBm)	Result
WCDMA Band V (QPSK)	4132	V	27.88	38.45	Pass
		H	23.52		
	4183	V	27.03		
		H	24.45		
	4233	V	27.39		
		H	23.82		

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

3.7. Radiated Spurious Emission

LIMIT

FCC: §22.917(a), §24.238(a), §27.53 (h), §90.691

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

RSS132§5.5

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

RSS133§6.5

Equipment shall comply with the limits in (i) and (ii) below.

(i) In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.


RSS139§6.6


(i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, Footnote2 which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

(ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

TEST CONFIGURATION

For the actual test configuration, please refer to the related Item – EUT Test Photos.

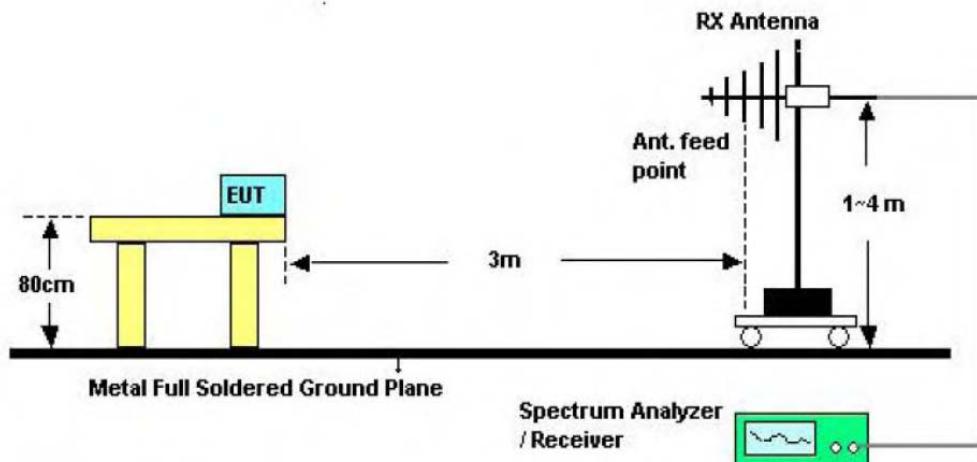

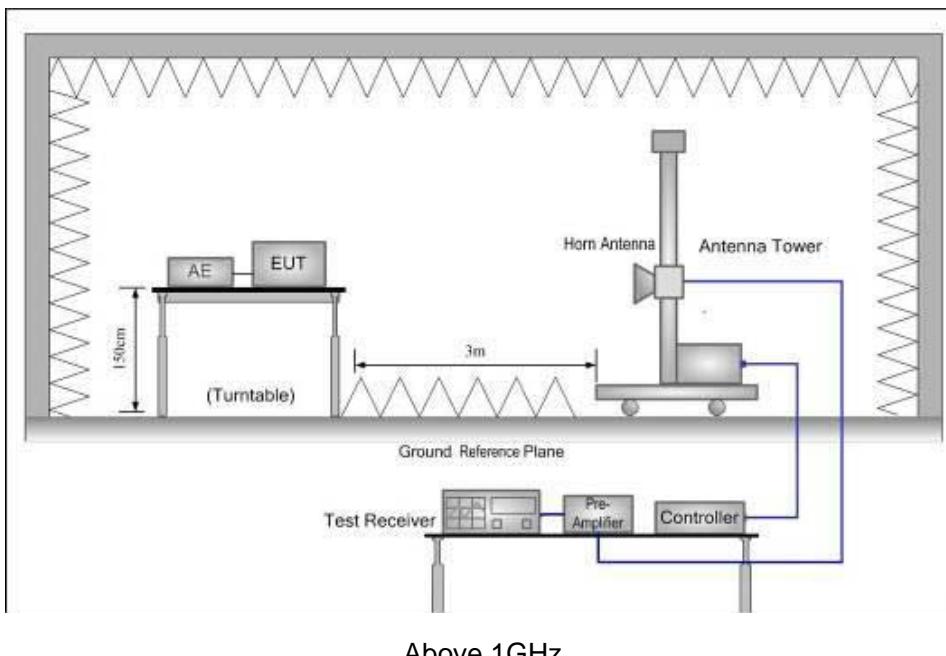

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, and the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. An amplifier should be connected to the Signal Source output port. And the cable should be connecting between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



power Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
8. Test frequency range should extend to 10th harmonic of highest fundamental frequency.

TEST RESULTS

Remark:

1. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.

GSM 850					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
128	1648.8	Vertical	-44.53	-13.00	Pass
	2473.2	Vertical	-49.61		
	1648.8	Horizontal	-48.62		
	2473.2	Horizontal	-52.85		
190	1673.2	Vertical	-44.39	-13.00	Pass
	2509.8	Vertical	-47.78		
	1673.2	Horizontal	-42.14		
	2509.8	Horizontal	-50.87		
251	1697.6	Vertical	-36.75	-13.00	Pass
	2546.4	Vertical	-41.84		
	1697.6	Horizontal	-44.62		
	2546.4	Horizontal	-45.84		

Remark :

1. The emission levels of below 1 GHz are very lower than the limit above10dB and not show in test report.

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



GPRS 850					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
128	1648.8	Vertical	-35.88	-13.00	Pass
	2473.2	Vertical	-49.67		
	1648.8	Horizontal	-47.71		
	2473.2	Horizontal	-53.25		
190	1673.2	Vertical	-43.38	-13.00	Pass
	2509.8	Vertical	-45.16		
	1673.2	Horizontal	-40.64		
	2509.8	Horizontal	-51.35		
251	1697.6	Vertical	-35.72	-13.00	Pass
	2546.4	Vertical	-43.22		
	1697.6	Horizontal	-42.60		
	2546.4	Horizontal	-48.74		

Remark :

1. The emission levels of below 1 GHz are very lower than the limit above10dB and not show in test report.

EGPRS 850					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
128	1648.8	Vertical	-42.73	-13.00	Pass
	2473.2	Vertical	-48.49		
	1648.8	Horizontal	-47.47		
	2473.2	Horizontal	-51.97		
190	1673.2	Vertical	-45.00	-13.00	Pass
	2509.8	Vertical	-45.20		
	1673.2	Horizontal	-41.82		
	2509.8	Horizontal	-54.80		
251	1697.6	Vertical	-36.17	-13.00	Pass
	2546.4	Vertical	-40.37		
	1697.6	Horizontal	-40.35		
	2546.4	Horizontal	-46.73		

Remark :

1. The emission levels of below 1 GHz are very lower than the limit above10dB and not show in test report.



GSM 1900					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
512	3700.4	Vertical	-45.95	-13.00	Pass
	5550.6	Vertical	-51.21		
	3700.4	Horizontal	-50.36		
	5550.6	Horizontal	-54.86		
661	3760	Vertical	-46.01	-13.00	Pass
	5640	Vertical	-50.71		
	3760	Horizontal	-48.69		
	5640	Horizontal	-55.21		
810	3819.6	Vertical	-36.46	-13.00	Pass
	5729.4	Vertical	-42.14		
	3819.6	Horizontal	-45.42		
	5729.4	Horizontal	-54.47		

Remark :

- The emission levels of below 1 GHz are very lower than the limit above10dB and not show in test report.

GPRS 1900					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
512	3700.4	Vertical	-42.45	-13.00	Pass
	5550.6	Vertical	-49.77		
	3700.4	Horizontal	-51.72		
	5550.6	Horizontal	-56.43		
661	3760	Vertical	-43.21	-13.00	Pass
	5640	Vertical	-50.53		
	3760	Horizontal	-47.09		
	5640	Horizontal	-53.20		
810	3819.6	Vertical	-36.38	-13.00	Pass
	5729.4	Vertical	-45.16		
	3819.6	Horizontal	-48.57		
	5729.4	Horizontal	-54.44		

Remark :

- The emission levels of below 1 GHz are very lower than the limit above10dB and not show in test report.

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



EGPRS 1900					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
512	3700.4	Vertical	-45.91	-13.00	Pass
	5550.6	Vertical	-51.61		
	3700.4	Horizontal	-50.81		
	5550.6	Horizontal	-55.36		
661	3760	Vertical	-44.31	-13.00	Pass
	5640	Vertical	-53.80		
	3760	Horizontal	-45.80		
	5640	Horizontal	-55.78		
810	3819.6	Vertical	-39.52	-13.00	Pass
	5729.4	Vertical	-45.58		
	3819.6	Horizontal	-46.01		
	5729.4	Horizontal	-50.26		

Remark :

1. The emission levels of below 1 GHz are very lower than the limit above 10dB and not show in test report.

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



WCDMA Band II					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
9262	3705.20	Vertical	-41.94	-13.00	Pass
	5557.80	Vertical	-53.59		
	3705.20	Horizontal	-49.57		
	5557.80	Horizontal	-51.48		
9400	3760.00	Vertical	-40.83	-13.00	Pass
	5640.00	Vertical	-53.87		
	3760.00	Horizontal	-40.87		
	5640.00	Horizontal	-50.50		
9538	3814.80	Vertical	-40.38	-13.00	Pass
	5722.20	Vertical	-53.63		
	3814.80	Horizontal	-43.49		
	5722.20	Horizontal	-48.53		

Remark :

1. The emission levels of below 1 GHz are very lower than the limit above10dB and not show in test report.

WCDMA Band V					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
4132	1653.20	Vertical	-40.65	-13.00	Pass
	2479.80	Vertical	-53.87		
	1653.20	Horizontal	-47.02		
	2479.80	Horizontal	-50.77		
4183	1672.80	Vertical	-44.90	-13.00	Pass
	2509.20	Vertical	-50.46		
	1672.80	Horizontal	-47.78		
	2509.20	Horizontal	-50.51		
4233	1692.80	Vertical	-38.18	-13.00	Pass
	2539.20	Vertical	-51.86		
	1692.80	Horizontal	-45.41		
	2539.20	Horizontal	-52.58		

Remark :

1. The emission levels of below 1 GHz are very lower than the limit above10dB and not show in test report.

3.8. Frequency stability

LIMIT

FCC §22.355, §90.213

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC §24.235 & §27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

RSS132§5.3

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 SRSP for mobile stations and ± 1.5 ppm for base stations.

In lieu of meeting the above stability values, the test report may show that the frequency stability is sufficient to ensure that the occupied bandwidth stays within each of the sub-bands (see Section 5.1) when tested to the temperature and supply voltage variations specified in RSS-Gen.

RSS133§6.3


The carrier frequency shall not depart from the reference frequency, in excess of ± 2.5 ppm for mobile stations and ± 1.0 ppm for base stations.

In lieu of meeting the above stability values, the test report may show that the frequency stability is sufficient to ensure that the emission bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

RSS139§6.4

The frequency stability shall be sufficient to ensure that the occupied bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

TEST CONFIGURATION

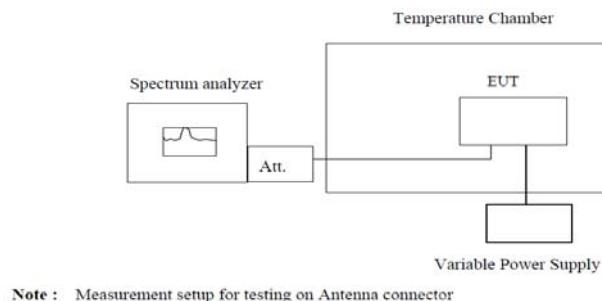

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to 0°C. After the temperature stabilized for

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



approximately 30 minutes recorded the frequency.

6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
7. Reduce the input voltage to specified extreme voltage variation (+/- 10%) and endpoint, record the maximum frequency change.

TEST RESULTS

Voltage							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM850	128	VL	NT	-2.49	-0.003021	±2.5	PASS
GSM850	128	VN	NT	-5.42	-0.006576	±2.5	PASS
GSM850	128	VH	NT	1.32	0.001602	±2.5	PASS
GSM850	190	VL	NT	-10.17	-0.012156	±2.5	PASS
GSM850	190	VN	NT	-2.71	-0.003239	±2.5	PASS
GSM850	190	VH	NT	-6.36	-0.007602	±2.5	PASS
GSM850	251	VL	NT	-10.59	-0.012476	±2.5	PASS
GSM850	251	VN	NT	-9.85	-0.011605	±2.5	PASS
GSM850	251	VH	NT	-3.84	-0.004524	±2.5	PASS
GPRS850	128	VL	NT	18.11	0.021973	±2.5	PASS
GPRS850	128	VN	NT	16.89	0.020493	±2.5	PASS
GPRS850	128	VH	NT	17.79	0.021585	±2.5	PASS
GPRS850	190	VL	NT	9.52	0.011379	±2.5	PASS
GPRS850	190	VN	NT	13.37	0.015981	±2.5	PASS
GPRS850	190	VH	NT	9.75	0.011654	±2.5	PASS
GPRS850	251	VL	NT	16.79	0.019781	±2.5	PASS
GPRS850	251	VN	NT	15.92	0.018756	±2.5	PASS
GPRS850	251	VH	NT	13.56	0.015975	±2.5	PASS
EGPRS850	128	VL	NT	18.02	0.021864	±2.5	PASS
EGPRS850	128	VN	NT	10.49	0.012727	±2.5	PASS
EGPRS850	128	VH	NT	23.12	0.028051	±2.5	PASS
EGPRS850	190	VL	NT	23.21	0.027743	±2.5	PASS
EGPRS850	190	VN	NT	31.16	0.037246	±2.5	PASS
EGPRS850	190	VH	NT	19.50	0.023309	±2.5	PASS
EGPRS850	251	VL	NT	17.95	0.021148	±2.5	PASS
EGPRS850	251	VN	NT	18.50	0.021795	±2.5	PASS
EGPRS850	251	VH	NT	18.47	0.021760	±2.5	PASS
GSM1900	512	VL	NT	20.63	0.011150	±2.5	PASS
GSM1900	512	VN	NT	6.26	0.003383	±2.5	PASS
GSM1900	512	VH	NT	11.72	0.006334	±2.5	PASS
GSM1900	661	VL	NT	-1.00	-0.000532	±2.5	PASS
GSM1900	661	VN	NT	-10.04	-0.005340	±2.5	PASS
GSM1900	661	VH	NT	3.91	0.002080	±2.5	PASS
GSM1900	810	VL	NT	8.14	0.004262	±2.5	PASS
GSM1900	810	VN	NT	6.42	0.003362	±2.5	PASS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



GSM1900	810	VH	NT	25.02	0.013101	±2.5	PASS
GPRS1900	512	VL	NT	19.76	0.010680	±2.5	PASS
GPRS1900	512	VN	NT	14.92	0.008064	±2.5	PASS
GPRS1900	512	VH	NT	16.01	0.008653	±2.5	PASS
GPRS1900	661	VL	NT	11.78	0.006266	±2.5	PASS
GPRS1900	661	VN	NT	17.95	0.009548	±2.5	PASS
GPRS1900	661	VH	NT	15.05	0.008005	±2.5	PASS
GPRS1900	810	VL	NT	6.49	0.003398	±2.5	PASS
GPRS1900	810	VN	NT	18.05	0.009451	±2.5	PASS
GPRS1900	810	VH	NT	7.94	0.004158	±2.5	PASS
EGPRS1900	512	VL	NT	17.53	0.009475	±2.5	PASS
EGPRS1900	512	VN	NT	28.80	0.015566	±2.5	PASS
EGPRS1900	512	VH	NT	25.12	0.013577	±2.5	PASS
EGPRS1900	661	VL	NT	8.65	0.004601	±2.5	PASS
EGPRS1900	661	VN	NT	21.34	0.011351	±2.5	PASS
EGPRS1900	661	VH	NT	17.92	0.009532	±2.5	PASS
EGPRS1900	810	VL	NT	11.07	0.005796	±2.5	PASS
EGPRS1900	810	VN	NT	6.36	0.003330	±2.5	PASS
EGPRS1900	810	VH	NT	18.76	0.009823	±2.5	PASS

Temperature							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM850	128	NV	0	-12.04	-0.014608	±2.5	PASS
GSM850	128	NV	10	-6.55	-0.007947	±2.5	PASS
GSM850	128	NV	20	-1.42	-0.001723	±2.5	PASS
GSM850	128	NV	30	2.42	0.002936	±2.5	PASS
GSM850	128	NV	40	-9.81	-0.011902	±2.5	PASS
GSM850	128	NV	50	-1.29	-0.001565	±2.5	PASS
GSM850	190	NV	0	-5.91	-0.007064	±2.5	PASS
GSM850	190	NV	10	4.16	0.004973	±2.5	PASS
GSM850	190	NV	20	1.42	0.001697	±2.5	PASS
GSM850	190	NV	30	2.81	0.003359	±2.5	PASS
GSM850	190	NV	40	-7.94	-0.009491	±2.5	PASS
GSM850	190	NV	50	1.90	0.002271	±2.5	PASS
GSM850	251	NV	0	-1.03	-0.001213	±2.5	PASS
GSM850	251	NV	10	-1.32	-0.001555	±2.5	PASS
GSM850	251	NV	20	-1.19	-0.001402	±2.5	PASS
GSM850	251	NV	30	-6.04	-0.007116	±2.5	PASS
GSM850	251	NV	40	-7.78	-0.009166	±2.5	PASS
GSM850	251	NV	50	0.42	0.000495	±2.5	PASS
GPRS850	128	NV	0	12.72	0.015433	±2.5	PASS
GPRS850	128	NV	10	14.11	0.017120	±2.5	PASS
GPRS850	128	NV	20	14.82	0.017981	±2.5	PASS
GPRS850	128	NV	30	16.82	0.020408	±2.5	PASS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : yz.cnca.cn



GPRS850	128	NV	40	16.14	0.019583	±2.5	PASS
GPRS850	128	NV	50	15.24	0.018491	±2.5	PASS
GPRS850	190	NV	0	9.65	0.011535	±2.5	PASS
GPRS850	190	NV	10	10.11	0.012085	±2.5	PASS
GPRS850	190	NV	20	12.59	0.015049	±2.5	PASS
GPRS850	190	NV	30	12.59	0.015049	±2.5	PASS
GPRS850	190	NV	40	10.75	0.012850	±2.5	PASS
GPRS850	190	NV	50	14.66	0.017523	±2.5	PASS
GPRS850	251	NV	0	17.14	0.020193	±2.5	PASS
GPRS850	251	NV	10	15.85	0.018673	±2.5	PASS
GPRS850	251	NV	20	11.95	0.014079	±2.5	PASS
GPRS850	251	NV	30	14.69	0.017307	±2.5	PASS
GPRS850	251	NV	40	9.33	0.010992	±2.5	PASS
GPRS850	251	NV	50	13.27	0.015634	±2.5	PASS
EGPRS850	128	NV	0	24.54	0.029774	±2.5	PASS
EGPRS850	128	NV	10	23.86	0.028949	±2.5	PASS
EGPRS850	128	NV	20	25.76	0.031255	±2.5	PASS
EGPRS850	128	NV	30	19.02	0.023077	±2.5	PASS
EGPRS850	128	NV	40	27.02	0.032783	±2.5	PASS
EGPRS850	128	NV	50	18.79	0.022798	±2.5	PASS
EGPRS850	190	NV	0	17.69	0.021145	±2.5	PASS
EGPRS850	190	NV	10	12.91	0.015432	±2.5	PASS
EGPRS850	190	NV	20	17.08	0.020416	±2.5	PASS
EGPRS850	190	NV	30	19.44	0.023237	±2.5	PASS
EGPRS850	190	NV	40	12.04	0.014392	±2.5	PASS
EGPRS850	190	NV	50	20.50	0.024504	±2.5	PASS
EGPRS850	251	NV	0	17.21	0.020276	±2.5	PASS
EGPRS850	251	NV	10	19.34	0.022785	±2.5	PASS
EGPRS850	251	NV	20	22.34	0.026320	±2.5	PASS
EGPRS850	251	NV	30	18.63	0.021949	±2.5	PASS
EGPRS850	251	NV	40	19.63	0.023127	±2.5	PASS
EGPRS850	251	NV	50	19.82	0.023351	±2.5	PASS
GSM1900	512	NV	0	7.62	0.004118	±2.5	PASS
GSM1900	512	NV	10	7.52	0.004064	±2.5	PASS
GSM1900	512	NV	20	23.76	0.012842	±2.5	PASS
GSM1900	512	NV	30	14.82	0.008010	±2.5	PASS
GSM1900	512	NV	40	12.01	0.006491	±2.5	PASS
GSM1900	512	NV	50	13.11	0.007086	±2.5	PASS
GSM1900	661	NV	0	-8.30	-0.004415	±2.5	PASS
GSM1900	661	NV	10	-7.55	-0.004016	±2.5	PASS
GSM1900	661	NV	20	12.24	0.006511	±2.5	PASS
GSM1900	661	NV	30	2.07	0.001101	±2.5	PASS
GSM1900	661	NV	40	-2.58	-0.001372	±2.5	PASS
GSM1900	661	NV	50	-4.91	-0.002612	±2.5	PASS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : yz.cnca.cn



GSM1900	810	NV	0	13.08	0.006849	±2.5	PASS
GSM1900	810	NV	10	11.07	0.005796	±2.5	PASS
GSM1900	810	NV	20	10.43	0.005461	±2.5	PASS
GSM1900	810	NV	30	14.11	0.007388	±2.5	PASS
GSM1900	810	NV	40	8.78	0.004597	±2.5	PASS
GSM1900	810	NV	50	9.01	0.004718	±2.5	PASS
GPRS1900	512	NV	0	20.08	0.010853	±2.5	PASS
GPRS1900	512	NV	10	13.40	0.007242	±2.5	PASS
GPRS1900	512	NV	20	10.17	0.005497	±2.5	PASS
GPRS1900	512	NV	30	14.24	0.007696	±2.5	PASS
GPRS1900	512	NV	40	12.07	0.006524	±2.5	PASS
GPRS1900	512	NV	50	10.69	0.005778	±2.5	PASS
GPRS1900	661	NV	0	11.56	0.006149	±2.5	PASS
GPRS1900	661	NV	10	9.30	0.004947	±2.5	PASS
GPRS1900	661	NV	20	13.27	0.007059	±2.5	PASS
GPRS1900	661	NV	30	13.33	0.007090	±2.5	PASS
GPRS1900	661	NV	40	14.40	0.007660	±2.5	PASS
GPRS1900	661	NV	50	15.95	0.008484	±2.5	PASS
GPRS1900	810	NV	0	16.11	0.008435	±2.5	PASS
GPRS1900	810	NV	10	18.79	0.009839	±2.5	PASS
GPRS1900	810	NV	20	19.76	0.010347	±2.5	PASS
GPRS1900	810	NV	30	19.08	0.009991	±2.5	PASS
GPRS1900	810	NV	40	19.18	0.010043	±2.5	PASS
GPRS1900	810	NV	50	19.53	0.010226	±2.5	PASS
EGPRS1900	512	NV	0	21.02	0.011361	±2.5	PASS
EGPRS1900	512	NV	10	12.98	0.007015	±2.5	PASS
EGPRS1900	512	NV	20	16.37	0.008848	±2.5	PASS
EGPRS1900	512	NV	30	23.79	0.012858	±2.5	PASS
EGPRS1900	512	NV	40	15.14	0.008183	±2.5	PASS
EGPRS1900	512	NV	50	28.54	0.015425	±2.5	PASS
EGPRS1900	661	NV	0	11.17	0.005941	±2.5	PASS
EGPRS1900	661	NV	10	12.49	0.006644	±2.5	PASS
EGPRS1900	661	NV	20	5.65	0.003005	±2.5	PASS
EGPRS1900	661	NV	30	11.91	0.006335	±2.5	PASS
EGPRS1900	661	NV	40	3.52	0.001872	±2.5	PASS
EGPRS1900	661	NV	50	20.50	0.010904	±2.5	PASS
EGPRS1900	810	NV	0	18.95	0.009923	±2.5	PASS
EGPRS1900	810	NV	10	17.98	0.009415	±2.5	PASS
EGPRS1900	810	NV	20	13.40	0.007016	±2.5	PASS
EGPRS1900	810	NV	30	21.41	0.011211	±2.5	PASS
EGPRS1900	810	NV	40	9.49	0.004969	±2.5	PASS
EGPRS1900	810	NV	50	16.95	0.008875	±2.5	PASS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : yz.cnca.cn



Voltage							
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band2	9262	VL	NT	4.19	0.002262	±2.5	PASS
Band2	9262	VN	NT	1.29	0.000696	±2.5	PASS
Band2	9262	VH	NT	3.99	0.002154	±2.5	PASS
Band2	9400	VL	NT	0.01	0.000005	±2.5	PASS
Band2	9400	VN	NT	1.34	0.000713	±2.5	PASS
Band2	9400	VH	NT	-2.37	-0.001261	±2.5	PASS
Band2	9538	VL	NT	-0.46	-0.000241	±2.5	PASS
Band2	9538	VN	NT	2.36	0.001237	±2.5	PASS
Band2	9538	VH	NT	0.98	0.000514	±2.5	PASS
Band5	4132	VL	NT	3.15	0.003812	±2.5	PASS
Band5	4132	VN	NT	-5.01	-0.006062	±2.5	PASS
Band5	4132	VH	NT	2.63	0.003182	±2.5	PASS
Band5	4183	VL	NT	-6.09	-0.007279	±2.5	PASS
Band5	4183	VN	NT	-1.27	-0.001518	±2.5	PASS
Band5	4183	VH	NT	5.15	0.006156	±2.5	PASS
Band5	4233	VL	NT	-2.38	-0.002811	±2.5	PASS
Band5	4233	VN	NT	0.50	0.000591	±2.5	PASS
Band5	4233	VH	NT	-1.34	-0.001583	±2.5	PASS

Temperature							
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band2	9262	NV	0	-3.86	-0.002084	±2.5	PASS
Band2	9262	NV	10	8.76	0.004729	±2.5	PASS
Band2	9262	NV	20	-3.05	-0.001647	±2.5	PASS
Band2	9262	NV	30	0.97	0.000524	±2.5	PASS
Band2	9262	NV	40	-7.05	-0.003806	±2.5	PASS
Band2	9262	NV	50	0.05	0.000027	±2.5	PASS
Band2	9400	NV	0	3.05	0.001622	±2.5	PASS
Band2	9400	NV	10	2.39	0.001271	±2.5	PASS
Band2	9400	NV	20	-0.11	-0.000059	±2.5	PASS
Band2	9400	NV	30	-1.50	-0.000798	±2.5	PASS
Band2	9400	NV	40	-3.50	-0.001862	±2.5	PASS
Band2	9400	NV	50	-2.78	-0.001479	±2.5	PASS
Band2	9538	NV	0	-9.36	-0.004907	±2.5	PASS
Band2	9538	NV	10	-0.67	-0.000351	±2.5	PASS
Band2	9538	NV	20	5.32	0.002789	±2.5	PASS
Band2	9538	NV	30	-5.58	-0.002925	±2.5	PASS
Band2	9538	NV	40	0.83	0.000435	±2.5	PASS
Band2	9538	NV	50	5.26	0.002757	±2.5	PASS
Band5	4132	NV	0	2.82	0.003412	±2.5	PASS
Band5	4132	NV	10	-0.84	-0.001016	±2.5	PASS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



Band5	4132	NV	20	3.46	0.004187	± 2.5	PASS
Band5	4132	NV	30	-8.16	-0.009874	± 2.5	PASS
Band5	4132	NV	40	6.55	0.007926	± 2.5	PASS
Band5	4132	NV	50	-2.47	-0.002989	± 2.5	PASS
Band5	4183	NV	0	-1.10	-0.001315	± 2.5	PASS
Band5	4183	NV	10	-1.55	-0.001853	± 2.5	PASS
Band5	4183	NV	20	2.81	0.003359	± 2.5	PASS
Band5	4183	NV	30	3.21	0.003837	± 2.5	PASS
Band5	4183	NV	40	-6.20	-0.007411	± 2.5	PASS
Band5	4183	NV	50	-2.37	-0.002833	± 2.5	PASS
Band5	4233	NV	0	-7.98	-0.009426	± 2.5	PASS
Band5	4233	NV	10	-1.27	-0.001500	± 2.5	PASS
Band5	4233	NV	20	7.01	0.008280	± 2.5	PASS
Band5	4233	NV	30	5.14	0.006071	± 2.5	PASS
Band5	4233	NV	40	-2.54	-0.003000	± 2.5	PASS
Band5	4233	NV	50	-3.76	-0.004441	± 2.5	PASS

*****THE END*****

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnca.gov.cn)

