

FCC Test Report

Report No.: AGC01110240642FR03

FCC ID	:	2A0KB-A31A3
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless speaker
BRAND NAME	:	soundcore
MODEL NAME	:	A31A3
APPLICANT	:	Anker Innovations Limited
DATE OF ISSUE	:	Aug. 21, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 21, 2024	Valid	Initial Release



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	8
3.1 Address of the Test Laboratory	8
3.2 Test Facility	8
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	
4. System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	14
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	21
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge and Out-of-Band Emissions	



10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Results	
11. Radiated Spurious Emission	45
11.1 Measurement Limit	45
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission Test	65
12.1 Measurement Limit	65
12.2 Measurement Setup (Block Diagram of Configuration)	65
12.3 Preliminary Procedure of Line Conducted Emission Test	
12.4 Final Procedure of Line Conducted Emission Test	
12.5 Measurement Results	
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	69



1. General Information

Applicant	Anker Innovations Limited
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
Manufacturer	Anker Innovations Limited
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
Factory	N/A
Address	N/A
Product Designation	Wireless speaker
Brand Name	soundcore
Test Model	A31A3
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Jul. 12, 2024
Date of Test	Jul. 12, 2024 to Aug. 13, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Fli

Cici Li (Project Engineer)

Aug. 21, 2024

Reviewed By

Calvin Liu (Reviewer)

Aug. 21, 2024

Approved By

Max Zhang Authorized Officer

Aug. 21, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.4
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	BLE GFSK 1Mbps: 4.313dBm BLE GFSK 2Mbps: 4.332dBm
Hardware Version	V1.1
Software Version	V3.4.2
Antenna Designation	FPC Antenna
Antenna Gain	4.31dBi
Power Supply	DC 7.3V by battery or DC 5V by adapter

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2404 MHz		
	:	:		
2400~2483.5MHz	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: $f = 2402 + 2^{k}$ MHz, $k = 0,, 39$ f is the operating frequency (MHz); k is the operating channel.				



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AOKB-A31A3**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15	Radio Frequency Devices		
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules		

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 4.31dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 7.3V

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\square	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\square	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
\boxtimes	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08
\square	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27



• Tes	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A			
	AGC-EM-S004	RE Test System	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0			
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



4. System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cabl e
1	Control Box		USB-TTL		
2	Adapter	Huawei	HW-20044 0C00	Input(AC): 100V-240V 50/60Hz 2.4A Output(DC): USB-C(5V/3A;9V/3A;10V/4A;11V/6A;12V/3A;15V/3A;2 0V4.4A) USB-A(5V/2A;10V/4A;11V/6A;20V/4.4A)	

Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	USB Cable				1.43m unshielded



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.209	Radiated Emission& Band Edge	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



5. Description of Test Modes

Summary Table of Test Cases				
	Data Rate / Modulation			
Test Item	Bluetooth – LE(1Mbps/2Mbps) / GFSK			
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered or AC/DC adapter)			
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered or AC/DC adapter)			
Radiated & Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered or AC/DC adapter)			
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(Battery powered or AC/DC adapter)			
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(Battery powered or AC/DC adapter)			
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(Battery powered or AC/DC adapter)			
AC Conducted Emission	Mode 1: Bluetooth Link + Battery + USB Cable (Charging from AC Adapter)			
Note:				

1. Only the result of the worst case was recorded in the report, if no other cases.

- 2. 3. The battery is full-charged during the test.
- For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- For Conducted Test method, a temporary antenna connector is provided by the manufacture. 4.

Software Setting Diagram

TEST BLE Command_Type: POWER_TEST_CMD ▼ Transmit_Power: 10 ▼ reply data: 04 0E 04 01 85 F8 00 ▼ eturn code: 0x0 ♥ 送述功! ▼ 周四 7月 25 09:57:03 2024 TEST BLE Command_Type: EN_TX_TEST_CMD ch_index: (0 - 2402) len_of_test_data: 0xff	ich 中二 ich 中二 ich 中二 ich 中二 ich 中二 ich index ich index i
---	---




6. Duty Cycle Measurement

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	2130	85.54	0.68	0.47
BLE_2Mbps	1080	42.86	3.68	0.93

Remark:

2. The duty cycle of each frequency band mode reflects the determination requirements of the high channel measurement value

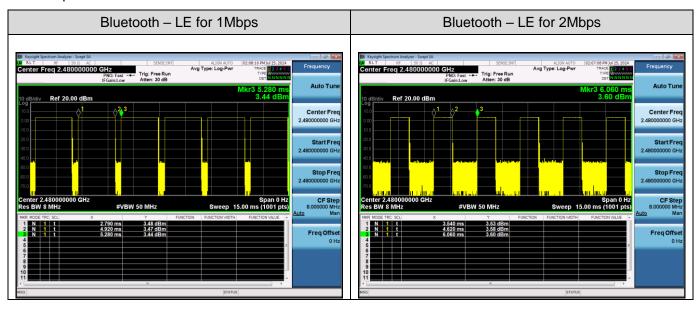

The test plots as follows:

^{1.} Duty Cycle factor = 10 * log (1/ Duty cycle)



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW > DTS bandwidth
- 3. Set the VBW \geq [3 × RBW].
- 4. Span≥[3 x RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.3 Measurement Setup (Block Diagram of Configuration)

 \boxtimes For peak power test setup

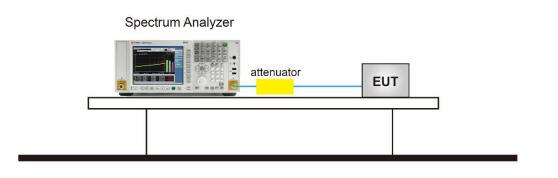

7.4 Measurement Result

Test Data of Conducted Output Power							
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail			
	2402	3.828	≤30	Pass			
GFSK_1Mbps	2440	4.241	≤30	Pass			
	2480	4.313	≤30	Pass			
	2402	3.867	≤30	Pass			
GFSK_2Mbps	2440	4.230	≤30	Pass			
	2480	4.332	≤30	Pass			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



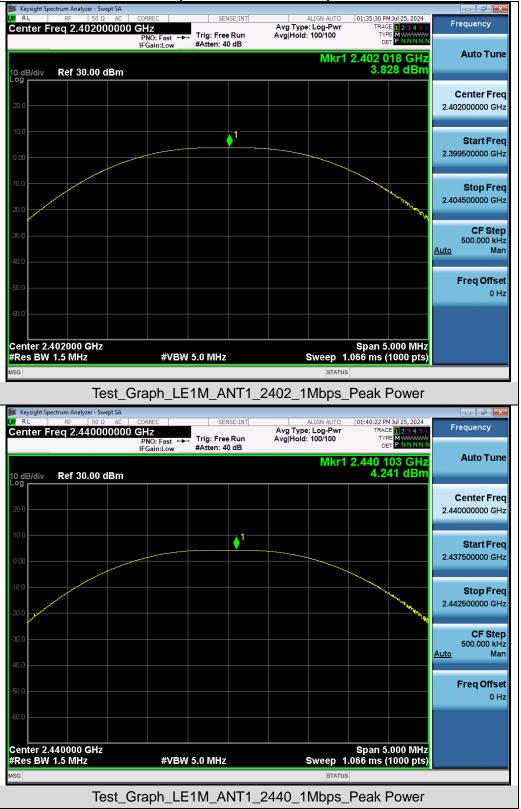


Test Graphs of Conducted Output Power







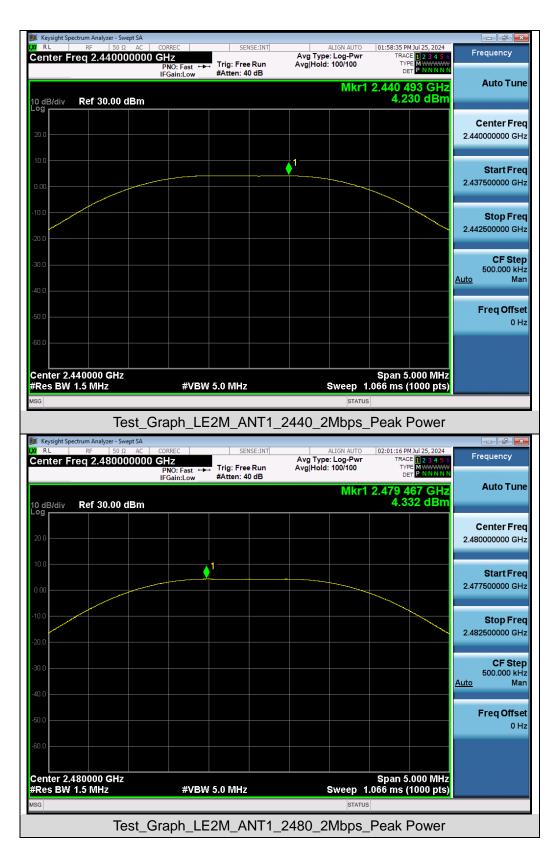



8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

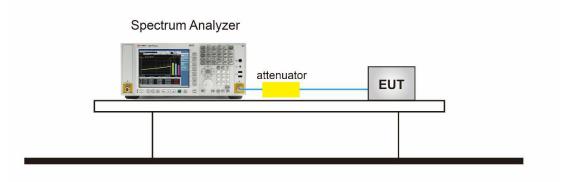





8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail		
GFSK_1Mbps	2402	1.027	0.670	≥0.5	Pass		
	2440	1.028	0.667	≥0.5	Pass		
	2480	1.030	0.669	≥0.5	Pass		
GFSK_2Mbps	2402	2.042	1.154	≥0.5	Pass		
	2440	2.042	1.152	≥0.5	Pass		
	2480	2.044	1.139	≥0.5	Pass		


Test Graphs of Occupied Bandwidth

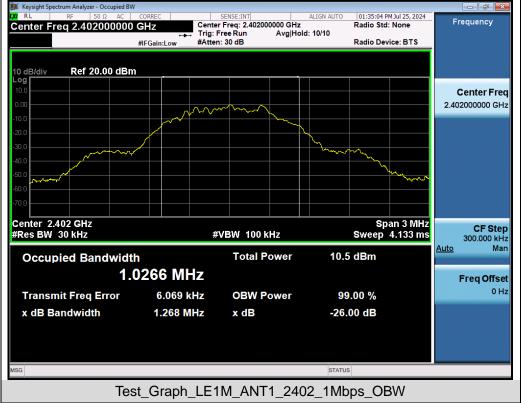



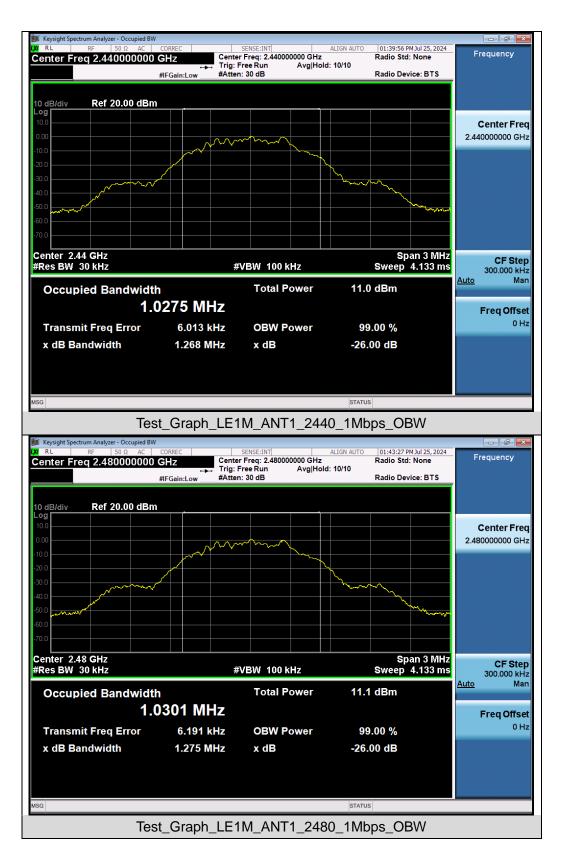




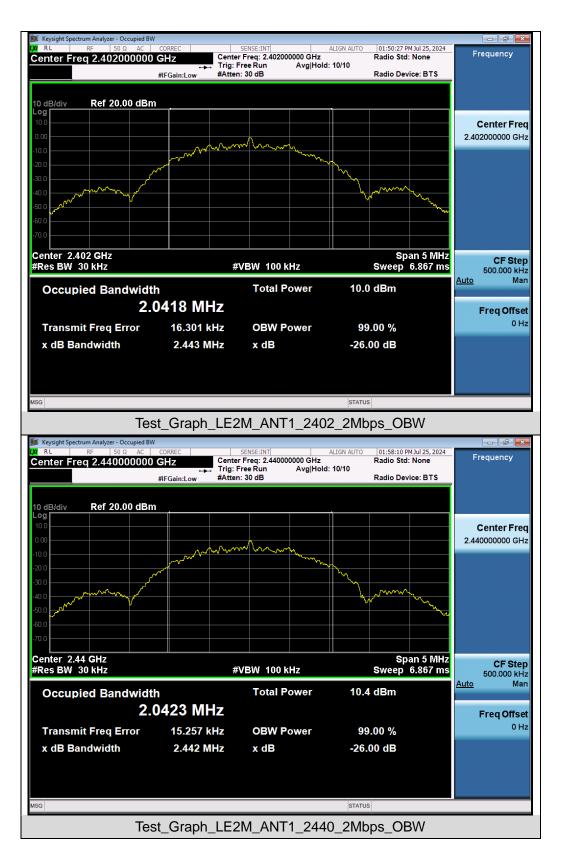






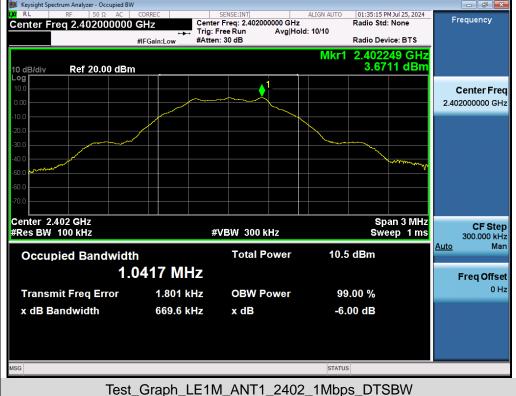




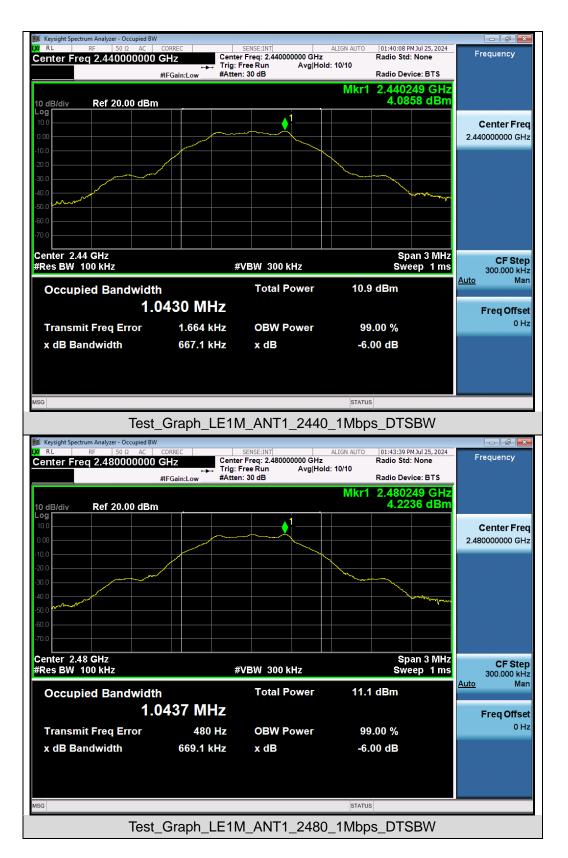







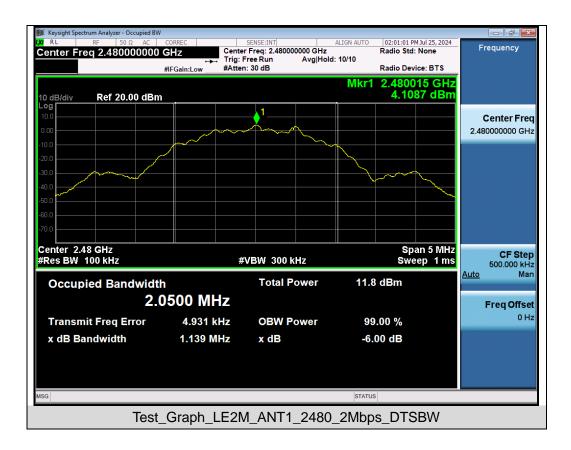



9. Power Spectral Density Measurement

9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

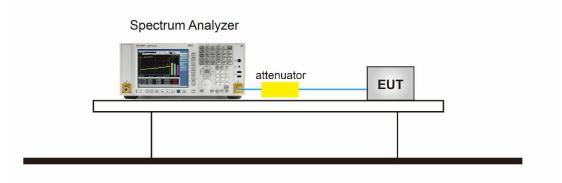




9.4 Measurement Results

Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail			
	2402	-12.250	≤8	Pass			
GFSK_1Mbps	2440	-11.830	≤8	Pass			
	2480	-11.698	≤8	Pass			
	2402	-14.036	≤8	Pass			
GFSK_2Mbps	2440	-13.608	≤8	Pass			
	2480	-13.509	≤8	Pass			


Test Graphs of Conducted Output Power Spectral Density






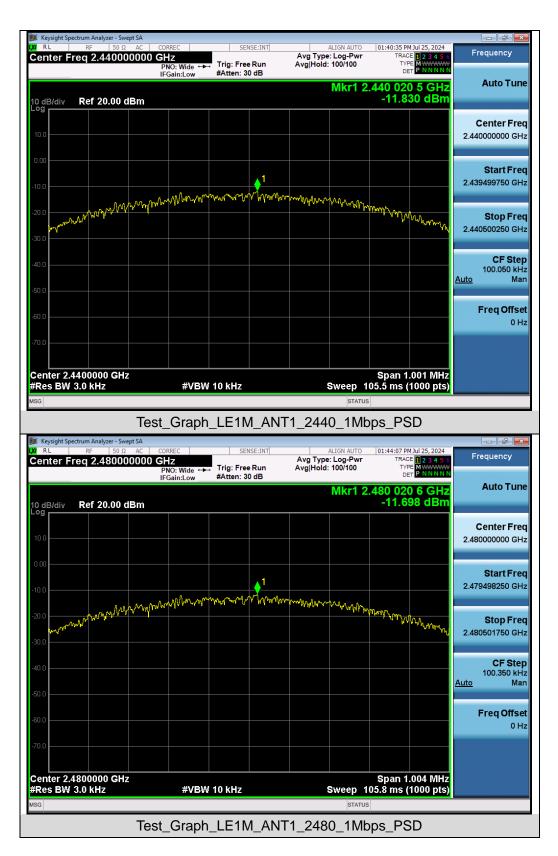



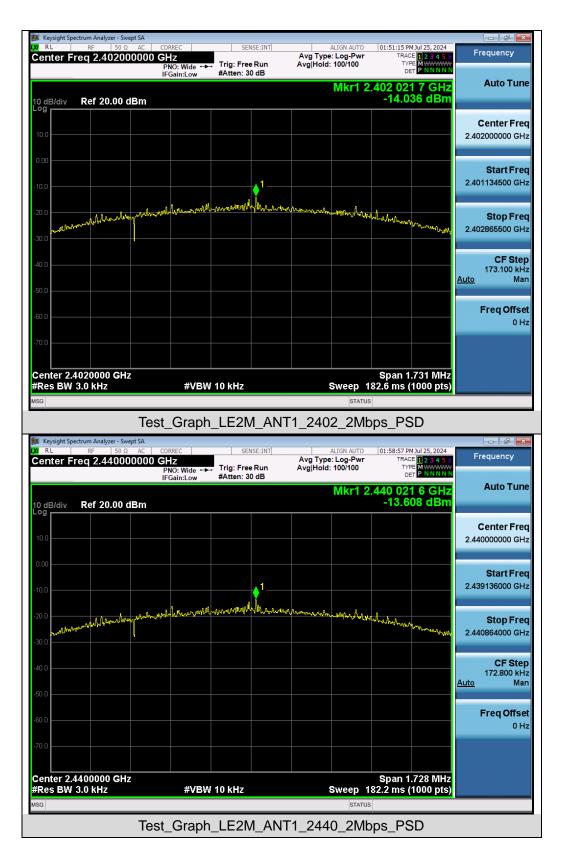



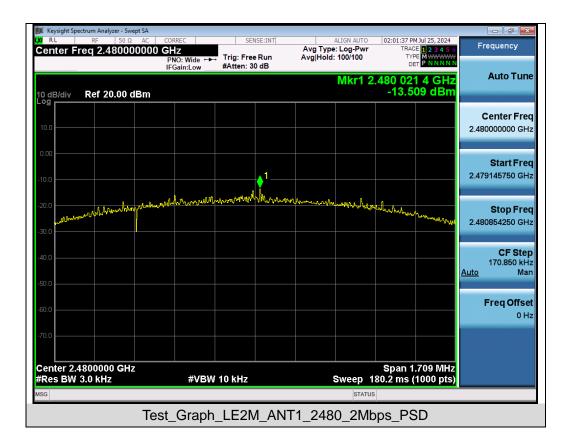



10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to \geq 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \ge 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

Spectrum Analyzer

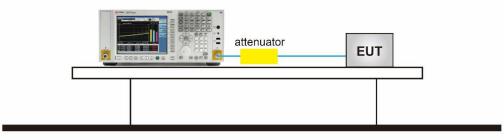




10.4 Measurement Results




Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



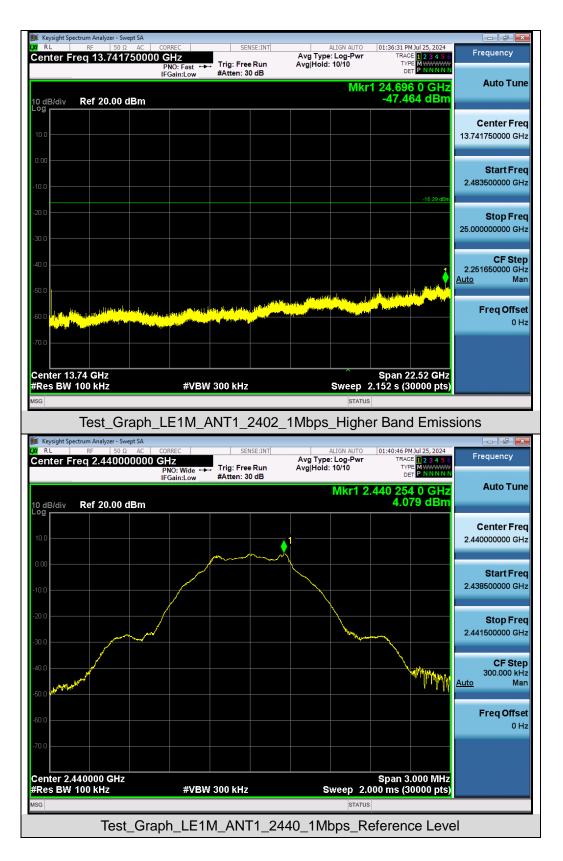




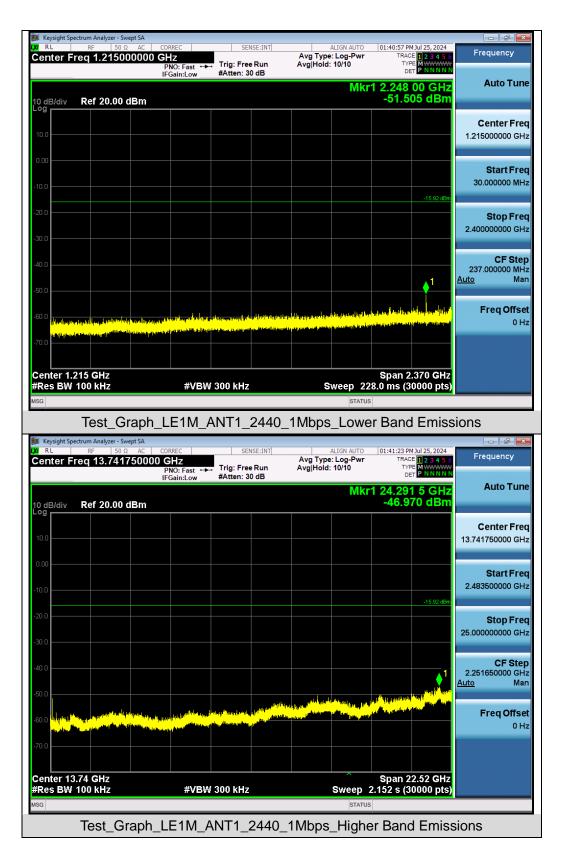








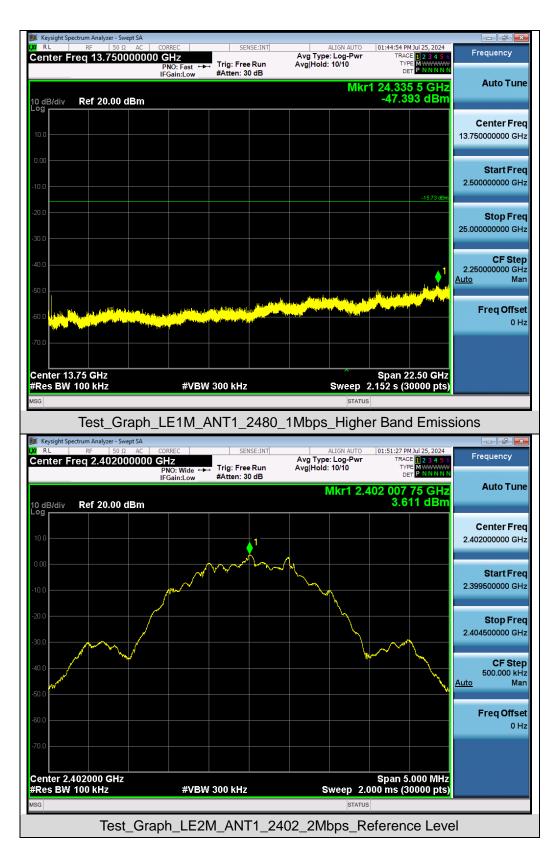




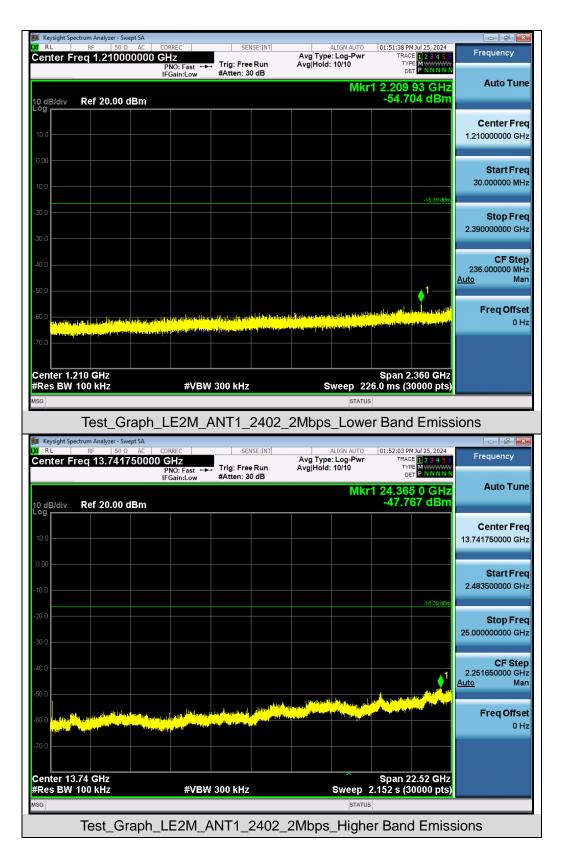









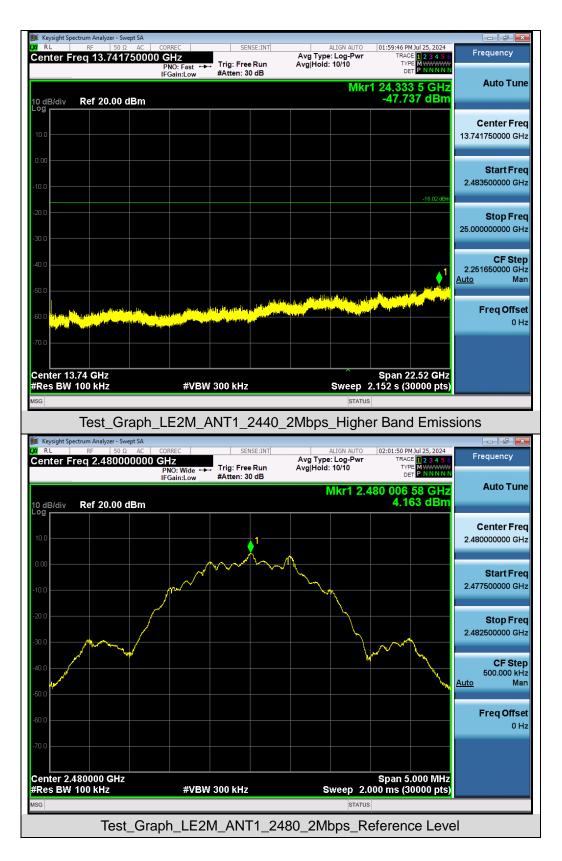



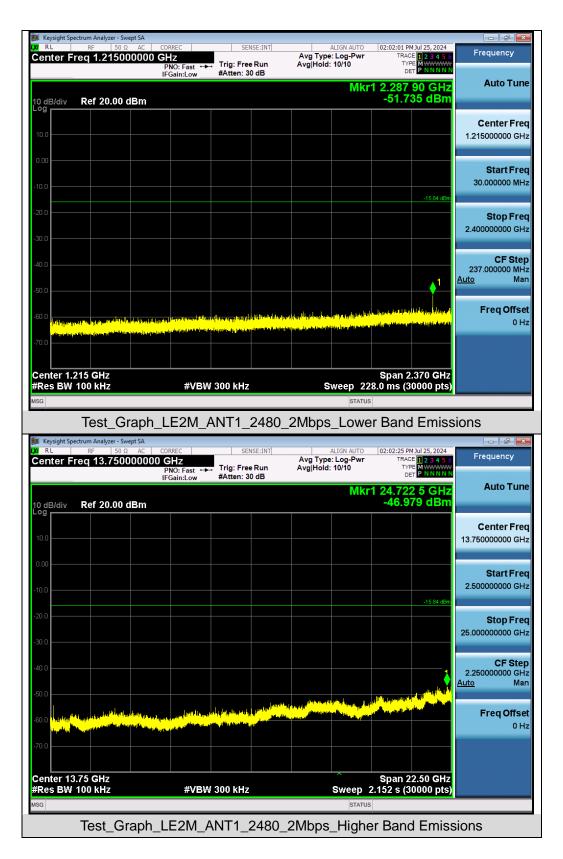



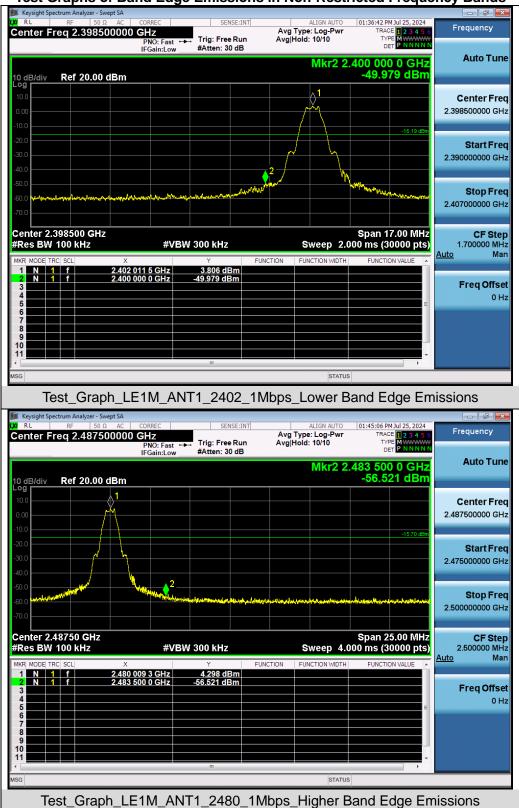

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands







11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


<u>Average Measurements above 1GHz</u>

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




11.3 Measurement Setup (Block Diagram of Configuration)




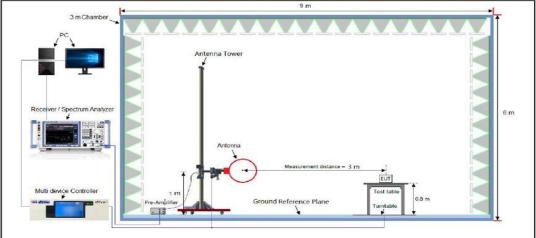

Radiated Emission Test Setup 30MHz-1000MHz

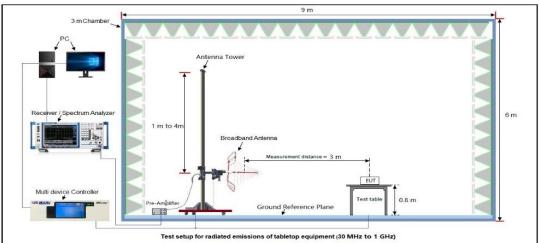

Radiated Emission Test Setup Above 1000MHz

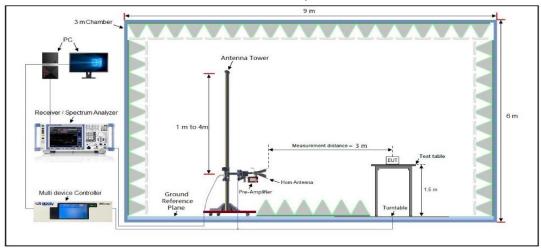

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com




11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Rad	liated Emiss	ion Test Res	ults at 30MH	z-1GHz			
EUT N	lame	Wire	eless speake	r		Model Na	ame	A31A3		
Tempe	erature	23.1	°C			Relative	Humidity	57.9%		
Press	ure	960	hPa			Test Volta	age	Normal Voltage		
Test M	lode	Mode 6Antenna PolarityHori						Horizontal		
	72.0 dBuV/m									
								Limit: <u>—</u> Margin: <u>—</u>		
	32	ay-Attraction of the	en la constante de la constante		M					
	-8 30.00	DO 4	0 50 60 7	70 80	(MHz)	300	400 500 60	0 700 1000.0	00	
Final D	Data List									
NO.	Freq [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	109.41	16	30.26	16.29	43.50	13.24	100	140	Horizontal	
2	201.39	30	27.27	14.49	43.50	16.23	100	210	Horizontal	
3	307.83	13	35.34	16.50	46.00	10.66	100	90	Horizontal	
4	441.74	26	29.95	25.04	46.00	16.05	100	80	Horizontal	
5	616.37	18	31.64	25.18	46.00	14.36	100	170	Horizontal	
6	900.14	74	37.20	31.78	46.00	8.8	100	160	Horizontal	





2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical					Radia	ted Ei	miss	ion Test Res	sults a	t 30MHz	z-1GHz			
Pressure 960hPa Test Voltage Normal Voltage Test Mode Mode 6 Antenna Polarity Vertical 72.0 dBwV/m dBwV/m Margin:	EUT Nar	ne	Wir	eless sp	beaker				M	odel Na	me	A31A3		
Test Mode Mode 6 Antenna Polarity Vertical 72.0 dBwV/m	Tempera	ture	23.′	1℃					Re	elative l	lumidity	57.9%		
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	Pressure	9	960	960hPa					Те	st Volta	age	Normal Vo	Normal Voltage	
Final Data List Height [MHz] Level [dBµV/m] Factor [dB] Limit [dB] Angle ['] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 6.53 100 280 Vertical	Test Mod	de	Mode 6 Antenna Polarity Ve						Vertical					
Final Data List Level [dBµV/m] Factor [dBµV/m] Limit [dBµV/m] Margin [dB] Height [Cm] Angle ['] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical		72.0	dBuV/n	n								·		
$ \frac{1}{1} + 1$				-										
Image: No. Freq. [MHz] Level [dBµV/m] Factor [dBµV/m] Limit [dBµV/m] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical		_												
Image: No. Freq. [MHz] Level [dBµV/m] Factor [dBµV/m] Limit [dBµV/m] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical												г		
Image: No. Freq. [MHz] Level [dBµV/m] Factor [dBµV/m] Limit [dBµV/m] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical														
Image: No. Freq. [MHz] Level [dBµV/m] Factor [dBµV/m] Limit [dBµV/m] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical								4						
Image: No. Freq. [MHz] Level [dBµV/m] Factor [dBµV/m] Limit [dBµV/m] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical		32		1			2	× Å	_		5 X	Myrana		
Image: NO. Freq. [MHz] Level [dBµV/m] Factor [dBµV/m] Limit [dBµV/m] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical			and the	M	L.		Minut	A WARMAN AND A	L. Marine	1	wanter war weeks open	×		
Image: NO. Freq. [MHz] Level [dBµV/m] Factor [dBµV/m] Limit [dBµV/m] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical		1	and the state of t	' Wwwww	19 marshard	White and		N	(waynut	Application and the second sec				
30.000 40 50 60 70 80 (MHz) 300 400 500 600 700 1000.000 Final Data List NO. Freq. [MHz] Level [dBµV/m] Factor [dB] Limit [dB] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical														
30.000 40 50 60 70 80 (MHz) 300 400 500 600 700 1000.000 Final Data List NO. Freq. [MHz] Level [dBµV/m] Factor [dB] Limit [dBµV/m] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical														
30.000 40 50 60 70 80 (MHz) 300 400 500 600 700 1000.000 Final Data List NO. Freq. [MHz] Level [dBµV/m] Factor [dB] Limit [dB] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical														
30.000 40 50 60 70 80 (MHz) 300 400 500 600 700 1000.000 Final Data List NO. Freq. [MHz] Level [dBµV/m] Factor [dB] Limit [dB] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical		-8												
NO. Freq. [MHz] Level [dBµV/m] Factor [dB] Limit [dBµV/m] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical			DO 4	10 50	60 70	80		(MHz)		300	400 500 6	i00 700 1000.0	00	
NO. Freq. [MHz] Level [dBµV/m] Factor [dB] Limit [dBµV/m] Margin [dB] Height [cm] Angle [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical	Final Dat	a list												
NO. [MHz] [dBµV/m] [dB] [dBµV/m] [dB] [dB] [dB] [cm] [°] Polarity 1 40.4172 30.39 16.90 40.00 9.61 100 100 Vertical 2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical				le	vel	Fac	t∩r	Limit	Ma	arain	Height	Angle		
2 103.4421 30.00 14.80 43.50 13.5 100 230 Vertical 3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical	NO.												Polarity	
3 128.1130 34.01 17.90 43.50 9.49 100 150 Vertical 4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical	1	40.417	72	30.	.39	16.9	90	40.00	9	.61	100	100	Vertical	
4 195.1365 36.97 18.05 43.50 6.53 100 280 Vertical	2	103.44	21	30.	.00	14.8	80	43.50	1	3.5	100	230	Vertical	
	3	128.11	30	34.	.01	17.9	90	43.50	9	.49	100	150	Vertical	
5 440.1963 33.22 26.09 46.00 12.78 100 140 Vertical	4	195.13	65	36	.97	18.0	05	43.50	6	.53	100	280	Vertical	
	5	440.19	63	33.	.22	26.	09	46.00	12	2.78	100	140	Vertical	
6 696.8567 35.74 28.04 46.00 10.26 100 80 Vertical	6	696.85	67	35.	.74	28.	04	46.00	10).26	100	80	Vertical	

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.


2. All test modes had been pre-tested. The mode 6 is the worst case and recorded in the report.



JT Nai	ne	Wireless spe	aker		Model Name	•	A31A3			
mpera	ature	22.9 ℃			Relative Hu	nidity	58.1%			
essur	e	960hPa Mode 4			960hPa Test Voltage)	Normal Voltage Horizontal		Normal Voltage
est Mo	de				Antenna Po	larity				
	130			FCC Part	15C					
	120									
	110									
	90									
Ĩ	80									
L extel[AIB, M/m]	60									
						And and a state of the state of	uti Alitera	6. 		
	40 30 million marchen	والمعادية والمعالية المعالية والمعالية و	man providence and the second	the way and the second states and the second	A CONTRACTOR OF	and the second				
	20									
	10									
	-10									
	1G	2G	30	G 4G Frequency	6G	8G		18G		
				riequency	[12]					
	PK Limit		- Horizontal PK							
PK D	PK Limit * AV Dete		- Horizontal PK							
	* AV Dete ata List Freq.	Level	Factor	Limit	Margin	Height	Angle	Polority		
PK D	* AV Dete	ector		Limit [dBµV/m]		Height [cm]	Angle [°]	Polarity		
	* AV Dete ata List Freq.	Level	Factor				Angle [°] 115	Polarity Horizontal		
NO.	* AV Dete ata List Freq. [MHz]	Level [dBµV/m]	Factor [dB]	[dBµV/m]	[dB]	[cm]	[°]			
NO. 1	* AV Dete ata List Freq. [MHz] 2018.4018	Level [dBµV/m] 38.03	Factor [dB] -13.37	[dBµV/m] 74.00	[dB] 35.97	[cm] 150	[°] 115	Horizontal		
NO.	* AV Dete ata List Freq. [MHz] 2018.4018 3069.1069	Level [dBµV/m] 38.03 39.23	Factor [dB] -13.37 -11.79	[dBµV/m] 74.00 74.00	[dB] 35.97 34.77	[cm] 150 150	[°] 115 7	Horizontal Horizontal		
NO. 1 2 3	* AV Dete ata List Freq. [MHz] 2018.4018 3069.1069 4582.2582	Level [dBµV/m] 38.03 39.23 40.62	Factor [dB] -13.37 -11.79 -7.86	[dBµV/m] 74.00 74.00 74.00	[dB] 35.97 34.77 33.38	[cm] 150 150 150	[°] 115 7 163	Horizontal Horizontal Horizontal		

Radiated Emissions Test Results for Above 1GHz



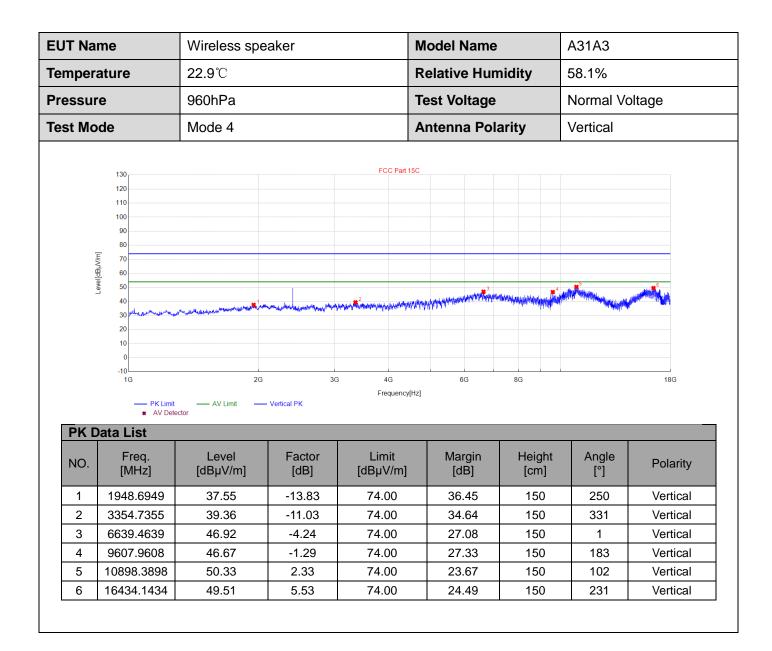

RESULT: Pass



UT N	ame	Wireless sp	eaker		Model Name	•	A31A3		
empe	erature	22.9 ℃			Relative Hu	midity	58.1%		
ressu	ure	960hPa			960hPa Test Voltage		Normal Voltage		Normal Voltage
est M	ode	Mode 5			Antenna Polarity		Horizontal		
		·							
	130			FCC Part 1	5C				
	120								
	110								
	100 90								
	80								
[wilder	70 60 50								
	B 60 50 50						4 5	6	
-	40		1	and the state of t	ראינייזיאייאייאייאייאייאייאייאייאיאיאיאיא	MANANA ANA IN'NANA ANA ANA ANA ANA ANA ANA ANA ANA A	AND THE REAL PROPERTY AND ADDRESS OF	A Martine Land	
	30 - Adulation - Adulation	the single contraction of the second s	an and a state of the state of	and an a second difference of a	****				
	20								
	0								
	-10	2G		G 4G	6G	8G		18G	
				Frequency					
	PK Limit AV Detect		- Horizontal PK						
PK D	Data List			1		I			
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	2071.1071	38.94	-13.24	74.00	35.06	150	344	Horizontal	
	0450 0450	38.93	-10.76	74.00	35.07	150	6	Horizontal	
2	3453.3453		1	74.00	28.35	150	77	Horizontal	
	3453.3453 6557.8558	45.65	-4.39	74.00					
2		45.65 49.98	-4.39 -0.74	74.00	24.02	150	125	Horizontal	
2 3	6557.8558					150 150	125 352	Horizontal Horizontal	

Radiated Emissions Test Results for Above 1GHz



UT Na	ame	Wireless sp	eaker		Model Name	•	A31A3		
empe	rature	22.9 ℃			Relative Hur	nidity	58.1%		
ressu	re	960hPa			Test Voltage		Normal Voltage Vertical		
est Mo	ode	Mode 5			Antenna Pol	arity			
Level (dBµV/m)	130 120 110 90 80 70 60 50 40 30 40 30 40 30 40 30 40 30 40 50 40 30 40 50 40 50 40 50 40 50 40 50 40 50 40 50 40 50 40 50 40 50 40 50 50 50 50 50 50 50 50 50 50 50 50 50		in a second law street prove	FCC Part 1	5C				
	-10 1G — PK Limit # AV Detec		3G - Vertical PK	6 4G Frequency[6G Hz]	8G		18G	
PK D	1G PK Limit	AV Limit				8G		18G	
PK Da	1G PK Limit * AV Detec	AV Limit				BG Height [cm]	Angle [°]	18G Polarity	
	1G PK Limit AV Detect ata List Freq.	AV Limit	- Vertical PK Factor	Frequency	Hz] Margin	Height			
NO.	1G PK Limit AV Detect ata List Freq. [MHz]	Level	Factor	Frequency Limit [dBµV/m]	Hz] Margin [dB]	Height [cm]	[°]	Polarity	
NO. 1	1G PK Limit * AV Deter ata List Freq. [MHz] 2064.3064	Level [dBµV/m] 38.68	Factor [dB] -13.25	Frequency Limit [dBµV/m] 74.00	Hz] Margin [dB] 35.32	Height [cm] 150	[°] 178	Polarity Vertical	
NO. 1 2	1G PK Limit * AV Deter ata List Freq. [MHz] 2064.3064 3492.4492	Level [dBµV/m] 38.68 39.03	Factor [dB] -13.25 -10.66	Frequency Limit [dBµV/m] 74.00 74.00	Hz] Margin [dB] 35.32 34.97	Height [cm] 150 150	[°] 178 1	Polarity Vertical Vertical	
NO. 1 2 3	1G PK Limit * AV Deter ata List Freq. [MHz] 2064.3064 3492.4492 6772.0772	Level [dBµV/m] 38.68 39.03 46.38	Factor [dB] -13.25 -10.66 -4.01	Frequency Limit [dBµV/m] 74.00 74.00 74.00	Hz] Margin [dB] 35.32 34.97 27.62	Height [cm] 150 150 150	[°] 178 1 356	Polarity Vertical Vertical Vertical	

RESULT: Pass



UT Na	ame	Wireless spe	aker		Model Name		A31A3		
empe	rature	22.9 ℃			Relative Hur	nidity	58.1%		
ressu	ire	960hPa			Test Voltage		Normal Voltage		
est M	ode	Mode 6			Antenna Pol	arity	Horizontal		
t anna 1 Aint	130 120 110 100 90 80 70 60 50 40 30 20 10 0		**************************************		6G	86		186	
	-10L 1G PK Limit * AV Deter		Horizontal PK	Trequen	כיוויבן				
PKC	1G — PK Limit	AV Limit	Horizontal PK						
PK D	1G PK Limit * AV Deter	AV Limit	Horizontal PK Factor [dB]	Limit [dBµV/m	Margin	Height [cm]	t Angle [°]	Polarity	
	1G PKLimit AV Deter Data List Freq.	AV Limit Level	Factor	Limit	Margin			Polarity Horizontal	
NO.	16 PK Limit AV Deter Data List Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m	Margin] [dB]	[cm]	[°]		
NO. 1	16 PKLimit AV Deter Data List Freq. [MHz] 1103.7104	Level [dBµV/m] 35.33	Factor [dB] -18.17	Limit [dBµV/m 74.00	Margin [dB] 38.67	[cm] 150	[°] 320	Horizontal	
NO. 1 2	16 PKLimit * AV Deter Data List Freq. [MHz] 1103.7104 2159.516	AV Limit	Factor [dB] -18.17 -13.02	Limit [dBµV/m 74.00 74.00	Margin [dB] 38.67 35.35	[cm] 150 150	[°] 320 217	Horizontal Horizontal	
NO. 1 2 3	16 PKLimit AV Deter Pata List Freq. [MHz] 1103.7104 2159.516 3740.6741		Factor [dB] -18.17 -13.02 -10.32	Limit [dBµV/m 74.00 74.00 74.00	Margin [dB] 38.67 35.35 34.04	[cm] 150 150 150	[°] 320 217 281	Horizontal Horizontal Horizontal	

Radiated Emissions Test Results for Above 1GHz




UT Na	ame	Wireless spe	eaker	M	lodel Name	А	31A3		
emper	rature	22.9 ℃		R	elative Hum	idity 5	8.1%		
ressu	re	960hPa		Т	Test Voltage Normal Voltage			age	
est Mo	ode	Mode 6		Α	ntenna Pola	rity V	Vertical		
	130			FCC Part 15C	;				
	120								
	110								
	90								
	80								
[m/\/n	70								
Level[dBµV/m]	60 50						** 5	6	
	5 50		1			3 🞽	Martine at		
L e	40			* ²	IN MARCHING MARCHING AND	Mahamahan akhan manakan kan	State and the property of the state	A CONTRACTOR OF A CONTRACTOR A	
L L		alangga tang manakan kana kana kana kana kana kana k	han y silon say and an and an and	non sold water and the head of	lan hal ha halin siya hanan mara aya saka aya	Nahana kata ana kata ana ana ana ana ana ana ana ana ana			
Ē	40 30 mhale phan Marian 20	an a	hanny shinned and a supplicity of	ninsunghi yakan tanihi yakan tani	an har an	an a			
Lei	40 30	alanga tang tang tang tang tang tang tang	home, silvine , and the second second	norr-shipinotinotinotinotinotinotino	and a second	in de la company de la comp			
Le,	40 30 minute from a financial 20 10 0 -10	Angerer and a share the state of the state o							
Let L	40 30	2G	3G	6 4G	6G	8G		18G	
Lei L	40 30 20 10 -10 16 — PK Limit	— AV Limit —			6G			18G	
	40 30	— AV Limit —	30	6 4G	6G			18G	
	40 30 20 10 10 10 10 10 PK Limit * AV Dete	— AV Limit —	30	6 4G	6G		Angle [°]	18G Polarity	
PK D	40 30 10 10 10 10 10 10 10 10 PK Limit * AV Dete Preq.	AV Limit	Sector	5 4G Frequency[Hz	6G Margin	8G Height			
PK D NO.	40 30 10 10 10 10 10 10 10 10 10 PK Limit * AV Deter Pata List Freq. [MHz]	Level	Vertical PK Factor [dB]	5 4G Frequency[Hz Limit [dBµV/m]	6G J Margin [dB]	BG Height [cm]	[°]	Polarity	
PK D NO.	40 30 10 10 10 10 10 10 10 10 10 PKLimit * AV Dete Pata List Freq. [MHz] 2033.7034	Level [dBµV/m] 38.68	Vertical PK Factor [dB] -13.33	3 4G Frequency[Hz Limit [dBµV/m] 74.00	6G Margin [dB] 35.32	BG Height [cm] 150	[°] 104	Polarity Vertical	
PK D NO. 1 2	40 30 40 20 10 10 10 10 10 10 10 10 10 1	Level [dBµV/m] 38.68 39.60	Vertical PK Factor [dB] -13.33 -10.44	3 4G Frequency[Hz Limit [dBμV/m] 74.00 74.00	6G Margin [dB] 35.32 34.40	8G Height [cm] 150 150	[°] 104 185	Polarity Vertical Vertical	
PK D NO. 1 2 3	40 30 10 10 10 10 10 10 10 10 10 1	Level [dBµV/m] 38.68 39.60 46.56	Vertical PK Factor [dB] -13.33 -10.44 -3.62	5 4G Frequency[Hz [dBµV/m] 74.00 74.00 74.00	6G Margin [dB] 35.32 34.40 27.44	8G Height [cm] 150 150 150	[°] 104 185 305	Polarity Vertical Vertical Vertical	

RESULT: Pass

Note:


- 1. The amplitude of other spurious emissions from 18G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin =Limit- Level.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All mode rates are tested and evaluated, BLE GFSK 2Mbps mode is the worst case and documented in the report.






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	25.6℃	Relative Humidity	53.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

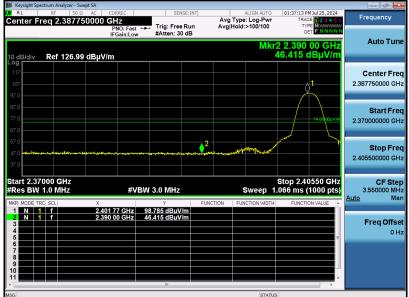

Test Graph for Average Measurement

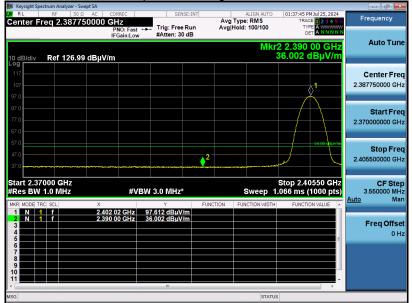


RESULT: Pass






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	25.6℃	Relative Humidity	53.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

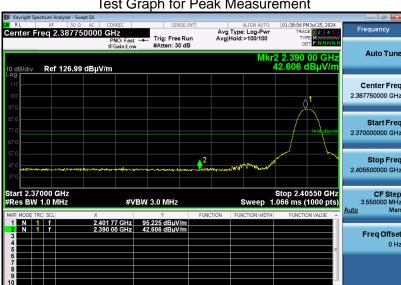

Test Graph for Peak Measurement

Test Graph for Average Measurement

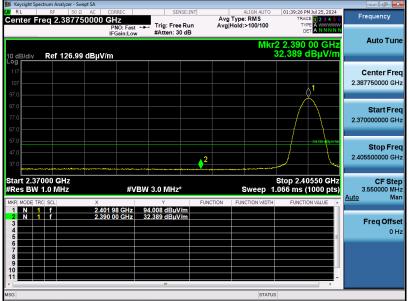

RESULT: Pass






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	25.6℃	Relative Humidity	53.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement

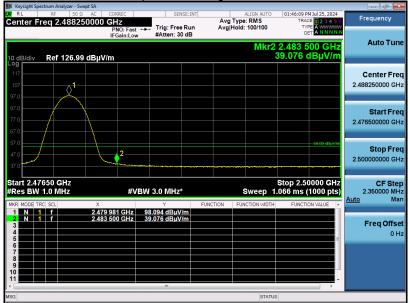


RESULT: Pass






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	25.6 ℃	Relative Humidity	53.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical


Test Graph for Peak Measurement

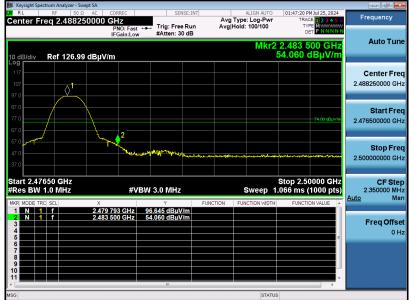

Test Graph for Average Measurement

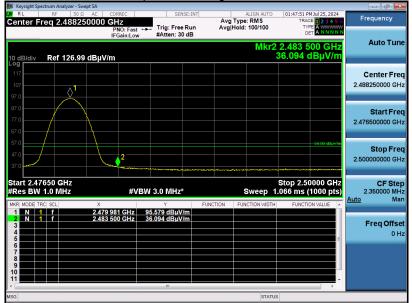


RESULT: Pass






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	25.6℃	Relative Humidity	53.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

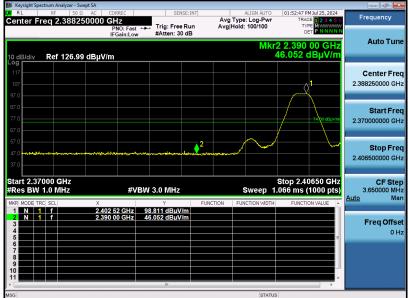

Test Graph for Average Measurement

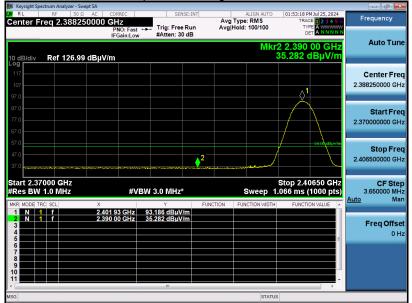


RESULT: Pass






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	25.6℃	Relative Humidity	53.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

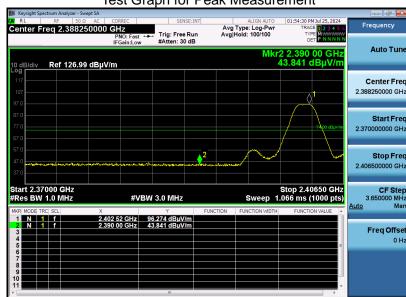

Test Graph for Peak Measurement

Test Graph for Average Measurement

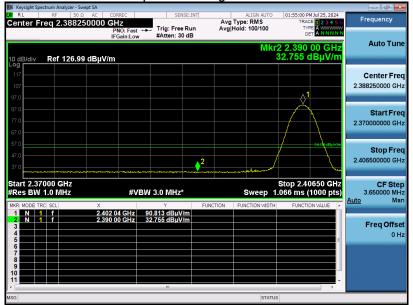


RESULT: Pass






EUT Name	Wireless speaker	Model Name	A31A3
Temperature	25.6℃	Relative Humidity	53.0%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

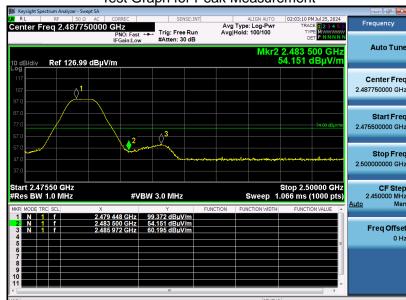

Test Graph for Peak Measurement

Test Graph for Average Measurement

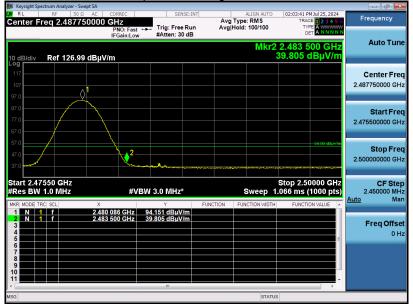

RESULT: Pass