

The Photos of SAR test

No. I14Z48053-SEM01

For

TCT Mobile Limited HSDPA/HSUPA/HSPA+/UMTS quad bands /GSM quad bands/LTE 5 bands mobile phone Model name: 5042W With Hardware Version: PIO Software Version: 01 FCC ID: RAD539 Issued Date: 2015-01-26



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email: cttl_terminals@catr.cn, website: www.chinattl.com



Picture 1: Constituents of the sample



Picture 2: Left Hand Touch Cheek Position



Picture 3: Left Hand Tilt 15° Position




Picture 4: Right Hand Touch Cheek Position



Picture 5: Right Hand Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom:

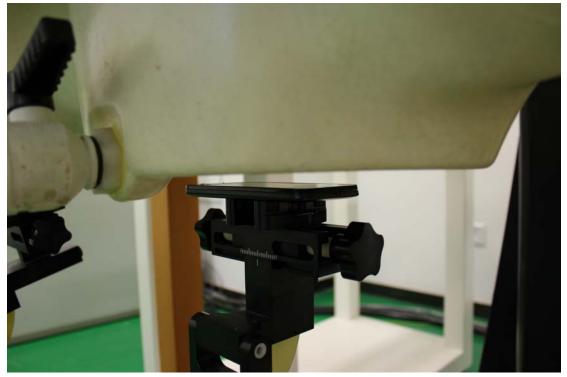

Picture 6: Front



Picture 6-1: Front with Headset



Picture 7: Rear



Picture 7-1: Rear with Headset




Picture 8: Left Edge



Picture 9: Right Edge



Picture 10: Bottom Edge

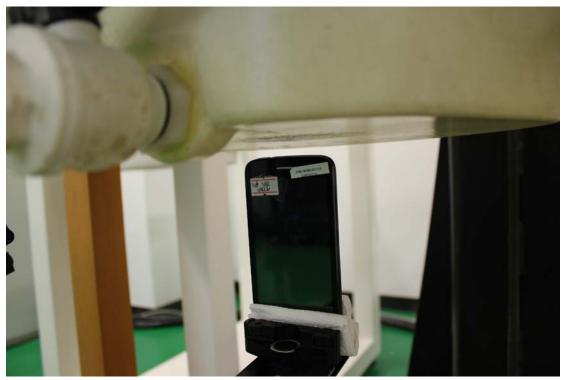

Picture 11: Top Edge