

10/11/2009

EXHIBIT 5

Test Report

APPLICATION FOR CERTIFICATION

**On Behalf of
ViewSonic Corporation
15" Multi-Scan Color Monitor**

Model : VCDTS21403-2*

FCC ID : GSS15024

**Prepared for : ViewSonic Corporation
381 Brea Canyon Rd., Walnut,
CA 91789, U.S.A.**

**Prepared By : Taiwan Tokin EMC Eng. Corp.
No. 53-11, Tin-Fu Tsun, Lin-Kou,
Taipei Hsien, Taiwan, R.O.C.**

Tel: (02) 2609-9301, 2609-2133

**File Number : ATM-G98677
Report Number : TTEMC-F98177
Date of Test : Nov. 19 ~ 21, 1998
Date of Report : Nov. 25, 1998**

TABLE OF CONTENTS

Description	Page
Test Report Certification.....	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Tested Supporting System Details	5
1.3. Description of Test Facility	7
2. POWERLINE CONDUCTED TEST	8
2.1. Test Equipment	8
2.2. Block Diagram of Test Setup.....	8
2.3. Powerline Conducted Emission Limit (CLASS B).....	9
2.4. EUT's Configuration during Compliance Measurement.....	9
2.5. Operating Condition of EUT.....	9
2.6. Test Procedure.....	10
2.7. Test Results	10
2.8. Line Conducted RF Voltage Measurement Results.....	11
3. RADIATED EMISSION TEST	14
3.1. Test Equipment	14
3.2. Block Diagram of Test Setup.....	14
3.3. Radiation Limit (CLASS B)	15
3.4. EUT's Configuration during Compliance Measurement.....	15
3.5. Operating Condition of EUT.....	15
3.6. Test Procedure.....	16
3.7. Test Results	16
3.8. Radiated Emission Measurement Results.....	17
4. DEVIATIONS TO TEST SPECIFICATIONS	19
5. PHOTOGRAPHS.....	20
5.1. Photos of Powerline Conducted Measurement.....	20
5.2. Photos of Radiated Measurement at Open Field Test Site	21
5.3. Photos of Radiated Measurement at Anechoic Chamber	23

APPENDIX I (Conducted Test Data)

APPENDIX II (Radiated Test Data at Anechoic Chamber)

TEST REPORT CERTIFICATION

Applicant : ViewSonic Corporation
 Manufacturer : Matsushita Electric (Taiwan) Co., Ltd.
 FCC ID : GSS15024
 EUT Description : 15" Multi-Scan Color Monitor
 (A) MODEL NO. : VCDTS21403-2*
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : AC 120V/60Hz

Measurement Procedure Used :

FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 1996
 AND FCC / ANSI C63.4-1992

The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15B Class B limits both radiated and conducted emissions.

The measurement results were contained in this test report and TAIWAN TOKIN EMC ENG. CORP. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report showed that the EUT to be technically compliance with the FCC official limits.

This report applied to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

Date of Test : Nov. 19 ~ 21, 1998

Prepared by : Monica Chang Nov. 25. 98
 (MONICA CHANG)

Test Engineer : Allen Wang 11/26. 1998
 (ALLEN WANG)

Approve & Authorized Signer :

Jackie Deng 11/26 '98
 (JACKIE DENG)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	15" Multi-Scan Color Monitor
Model Number	:	VCDTS21403-2*
Serial Number	:	N/A
Applicant	:	ViewSonic Corporation 381 Brea Canyon Rd., Walnut, CA 91789, U.S.A.
Manufacturer	:	Matsushita Electric (Taiwan) Co., Ltd. 579 Yuan San Road, Chung-Ho, Taipei Hsien 23506, Taiwan, R.O.C.
CRT	:	Samsung, M/N M36QAM351X111 S/N B15 80901559
Data Cable	:	Non-Shielded, Undetachable, 1.8m Bonded a ferrite core
Power Cord	:	Non-Shielded, Detachable, 1.8m
Date of Receipt of Sample	:	Nov. 18, 1998
Date of Test	:	Nov. 19 ~ 21, 1998

1.2. Tested Supporting System Details

1.2.1. PERSONAL COMPUTER

Model Number	:	PC763
Serial Number	:	TA421U7881
FCC ID	:	AO9-PC76X
Manufacturer	:	Digital
Switching Power Supply	:	Astec M/N SA-201-3440
Floppy Driver	:	Teac Corp. 3.5" M/N FD-235HF
VGA Card	:	Sixgraph Computing Ltd. M/N Wiz 924 S/N 189477 FCC ID JYOWIZ01
Disk Ctrl Card	:	Within Mother Board
Serial/Parallel Card	:	Within Mother Board
Power Cord	:	Non-Shielded, Detachable, 1.8m

1.2.2. KEYBOARD

Model Number	:	5121
Serial Number	:	J83300819
FCC ID	:	E5XKBM104M10UC
Manufacturer	:	Behavior Tech Computer Corp.
Data Cable	:	Shielded, Undetachable, 1.0m

1.2.3. PRINTER

Model Number	:	2225C
Serial Number	:	2526S40437
FCC ID	:	BS46XU2225C
Manufacturer	:	Hewlett Packard
Power Cord	:	Non-Shielded, Undetachable, 1.8m
Data Cable	:	Shielded, Detachable, 1.2m

1.2.4. MODEM #1

Model Number	:	DM-1414
Serial Number	:	980034396
FCC ID	:	IFAXDM1414
Manufacturer	:	Accex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A Non-Shielded, Undetachable, 1.8m

1.2.5. MODEM #2

Model Number	:	DM-1414
Serial Number	:	980034395
FCC ID	:	IFAXDM1414
Manufacturer	:	Accex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A
		Non-Shielded, Undetachable, 1.8m

1.2.6. MOUSE

Model Number	:	M-S35
Serial Number	:	LZA82103138
FCC ID	:	DZL211029
Manufacturer	:	Logitech
Data Cable	:	Non-Shielded, Undetachable, 1.8m

1.2.7. MICROPHONE

Model Number	:	UDM-111
Serial Number	:	N/A
Manufacturer	:	Uni-Directional
Data Cable	:	Shielded, Undetachable, 1.5m

1.2.8. HEADPHONE W/ MIC

Model Number	:	MI-2
Serial Number	:	N/A
Manufacturer	:	N/A
Data Cable	:	Non-Shielded, Undetachable, 1.7m

1.2.9. WALKMAN

Model Number	:	KT-V760
Serial Number	:	N/A
Manufacturer	:	Toshiba Corp.
Data Cable	:	Non-Shielded, Detachable, 1.8m

1.3. Description of Test Facility

Site Description (No. 2 Open Site)	:	Jul. 15, 1996 Re-file on Federal Communication Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, U.S.A.
Site Description (Anechoic Chamber)	:	Aug. 22, 1997 Re-file on Federal Communication Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, U.S.A.
Name of Firm	:	Taiwan Tokin EMC Eng. Corp.
Site Location	:	No. 53-11, Tin-Fu Tsun, Lin-Kou, Taipei Hsien, Taiwan, R.O.C.
NVLAP lab. Code	:	200077-0

2. POWERLINE CONDUCTED TEST


2.1. Test Equipment

The following test equipments were used during the power line conducted tests :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESH3	880647/035	Jun.24, 98'	1 Year
2.	L.I.S.N. # 1	Kyoritsu	KNW-407	8-855-9	Apr.14, 98'	1 Year
3.	L.I.S.N. # 2	Kyoritsu	KNW-407	8-881-13	Apr.14, 98'	1 Year

2.2. Block Diagram of Test Setup

2.2.1. EUT Power Connects to L.I.S.N. Directly

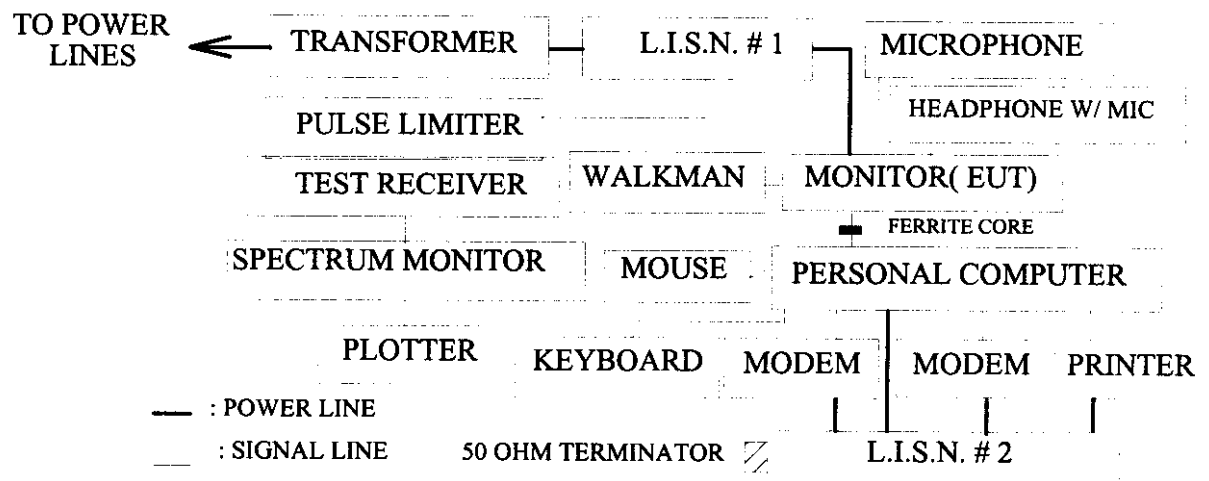

2.2.2. EUT Power connects to PC AC Outlet then PC power connects to L.I.S.N.

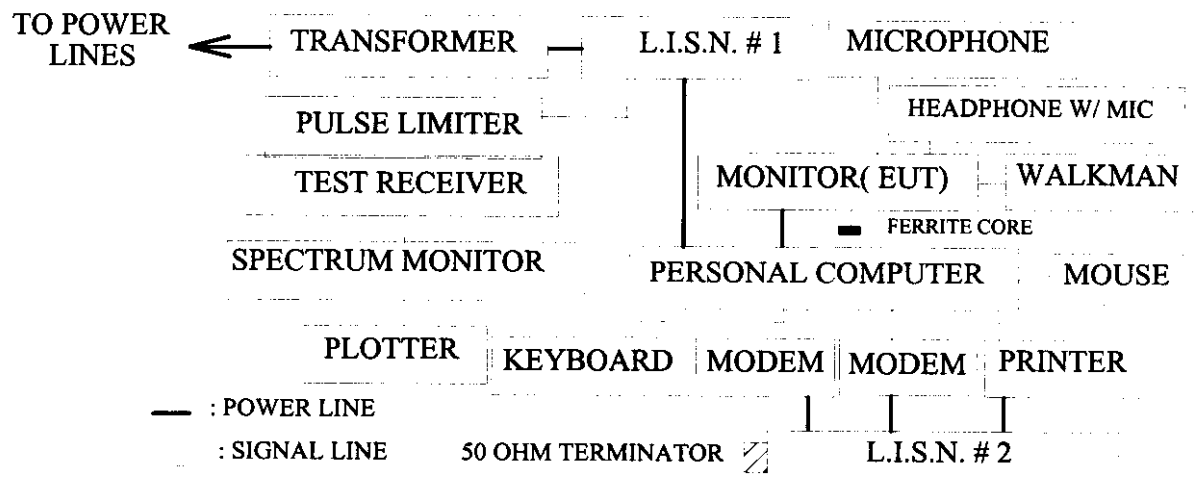

2.6. Test Procedure

The EUT was connected to the power mains through a line impedance stabilization network (L.I.S.N.# 1). The EUT is also connected to PC power outlet then the PC power cord connected to the power mains through a line impedance stabilization network (L.I.S.N # 1.). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N. # 2). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to FCC ANSI C63.4-1992 on conducted measurement.

The bandwidth of the R&S Test Receiver ESH3 was set at 10KHz.

The frequency range from 450KHz to 30MHz was checked.

The following test modes were done during conducted measurement and reported the each worst test mode (8) (37.9KHz/640*480, EUT power connected to L.I.S.N.) in the next pages, the others test data are attached within Appendix I.

- (1) 31.5KHz/640*480
- (2) 37.9KHz/640*480
- (3) 37.9KHz/800*600
- (4) 48.1KHz/800*600
- (5) 48.4KHz/1024*768
- (6) 58KHz/1024*768
- (7) 61.6KHz/1280*960
- (8) 66KHz/1280*1024

2.7. Test Results

PASSED. Please refer to the following pages.

2.8. Line Conducted RF Voltage Measurement Results

The frequency range from 450KHz to 30 MHz was investigated.

All emissions not report below are too low against the prescribed limits.


Date of Test : Nov. 19, 1998 Temperature : 24 °C

EUT : 15" Multi-Scan Color Monitor Humidity : 45 %


Test Mode : 37.9KHz/640*480

Frequency (MHz)	Factor dB	Measurement (dBuV)		Reading (dBuV)		Limits (dBuV)	Margin (dBuV)	
		VA	VB	VA	VB		VA	VB
0.4803	0.5	36.5	*	37	*	48.0	11	*
0.4812	0.5	*	35.4	*	35.9	48.0	*	12.1
1.0420	0.8	*	21.6	*	22.4	48.0	*	25.6
1.0423	0.8	22.4	*	23.2	*	48.0	24.8	*
2.2183	0.8	*	23.7	*	24.5	48.0	*	23.5
2.2197	0.8	24.1	*	24.9	*	48.0	23.1	*
4.9962	1.2	*	27.3	*	28.5	48.0	*	19.5
4.9976	1.2	28.4	*	29.6	*	48.0	18.4	*
12.8918	1.4	38.7	*	40.1	*	48.0	7.9	*
12.8923	1.4	*	33.1	*	34.5	48.0	*	13.5
21.8432	1.7	34.5	29.4	36.2	31.1	48.0	11.8	16.9
25.7185	1.7	35.3	26.2	37	27.9	48.0	11	20.1

- Remark :
1. All readings are Quasi-Peak values.
 2. Factor = Insertion Loss + Cable Loss
 3. The worst emission was detected at 12.8918MHz with corrected signal level of 40.1dBuV (limit is 48dBuV) when the VA side of the EUT was connected to L.I.S.N.

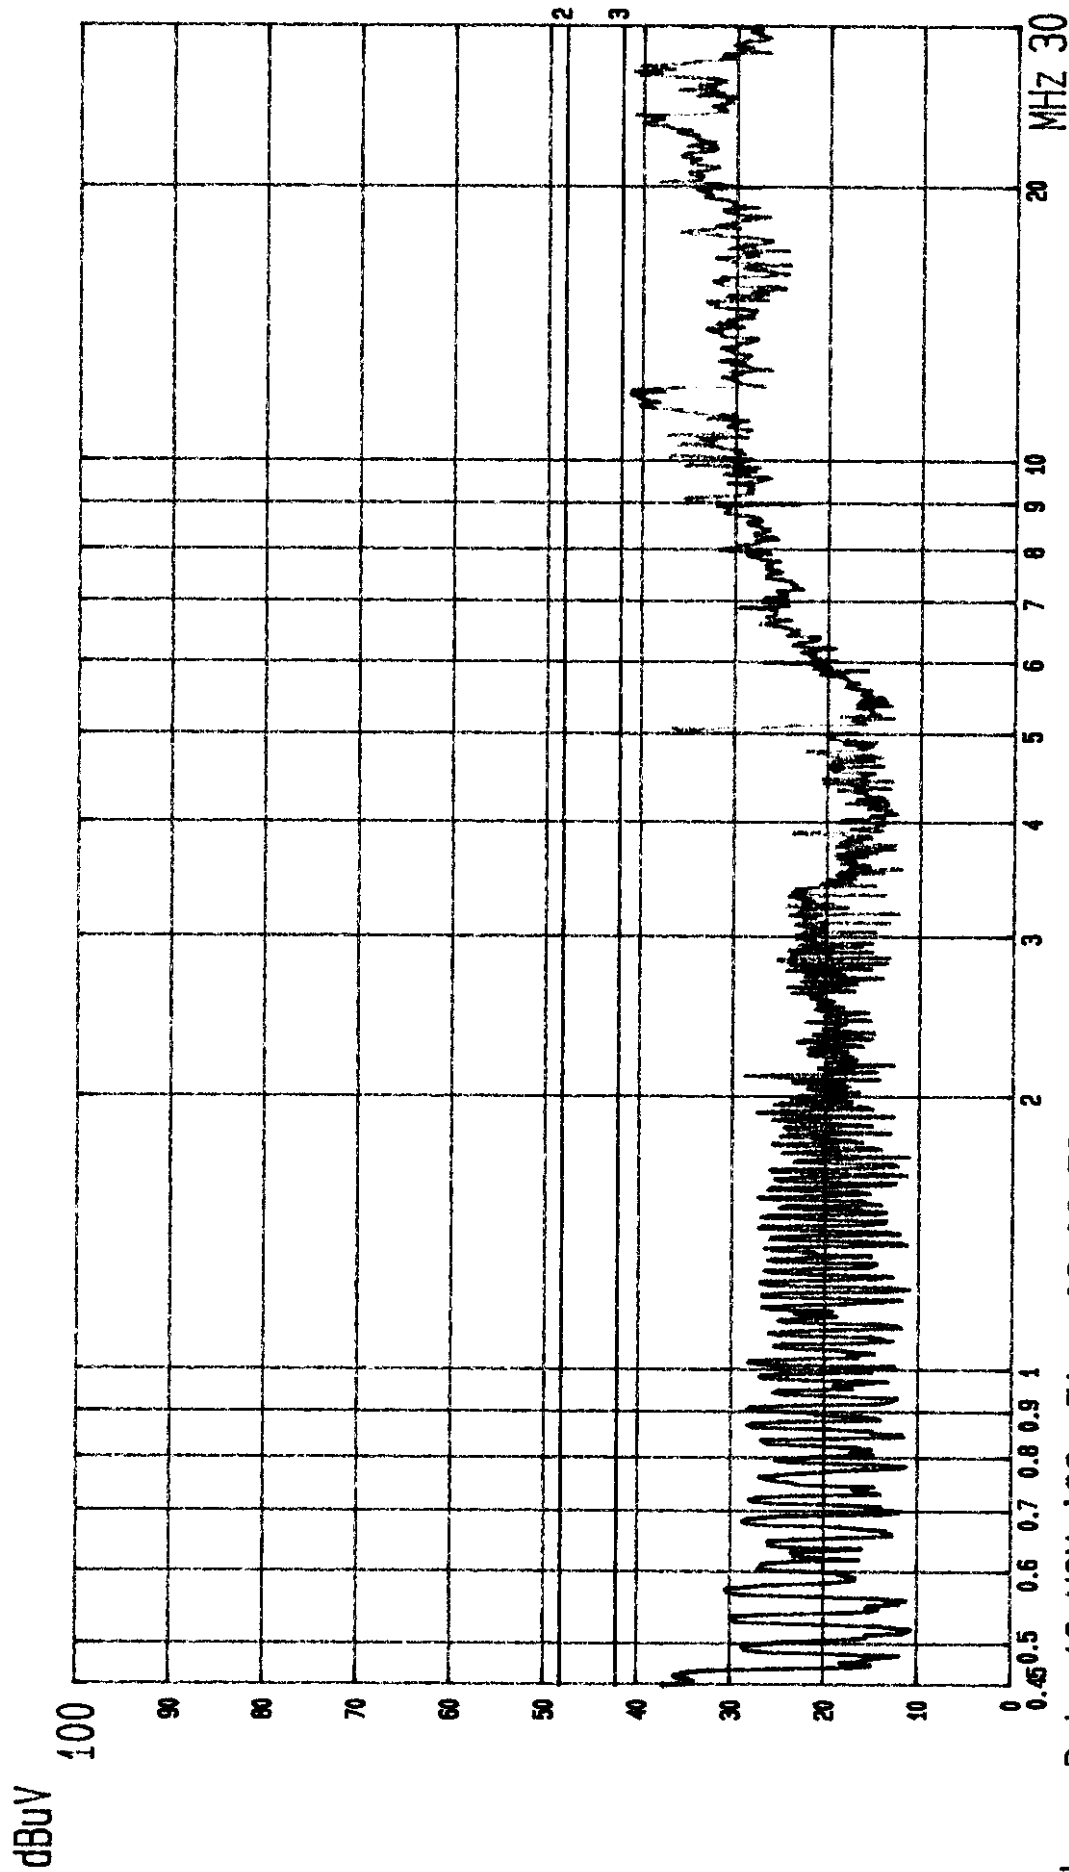

--- Date 19.NOV.'98 Time 03:08:52
VIEW SONIC EUT: MONITOR
LINE: VA. MENO: (640X480; 37.9KHz) EUT TO LISN M/N: VCDTS21403-2* (PEAK VALUE) TTEMG: PAGE: 001.

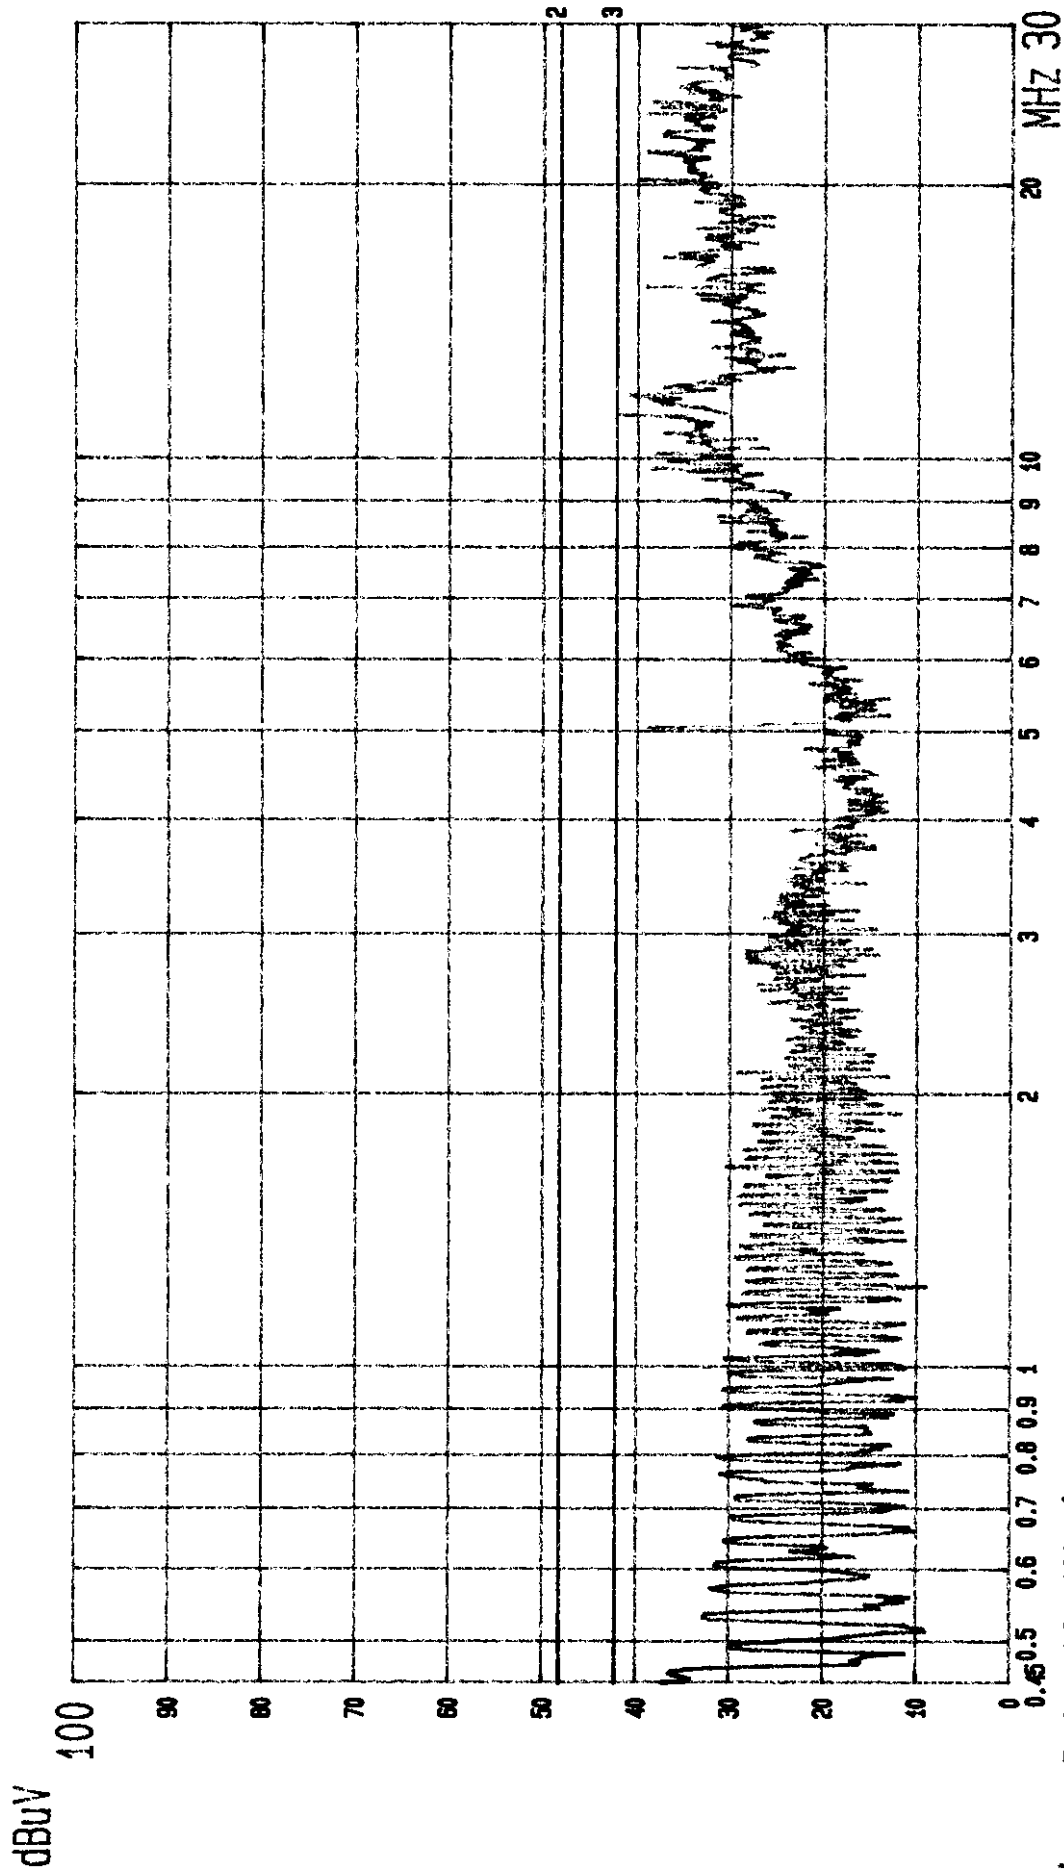

Date 19.NOV.'98 Time 03:10:16
 VIEW SONIC EUT: MONITOR
 LINE: VB. MEN0: (640X480; 37.9KHz) EUT TO LISN (PEAK VALUE) ITEMC.
 M/N: VCDTS21403-2*

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipments are used during the radiated emission tests :

3.1.1. For Anechoic Chamber :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	HP	8593A	3212A01727	Jul.25, 98'	1 Year
2.	Pre-Amplifier	HP	8447D	2944A06305	May.13,98'	1 Year
3.	Broadband Antenna	Schwarzbeck	BBA9106	A3L	Dec.24, 97'	1 Year
4.	Broadband Antenna	Schwarzbeck	UHALP9107	A3H	Dec.24, 97'	1 Year

3.1.2. For No. 2 Open Site :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde&Schwarz	ESVP	893202/001	Jul.24, 98'	1 Year
2.	Broadband Antenna	Chase	VBA6106A	1240	Jul. 15, 98'	1 Year
3.	Broadband Antenna	Chase	UPA6109	1048	Jul. 15, 98'	1 Year


3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

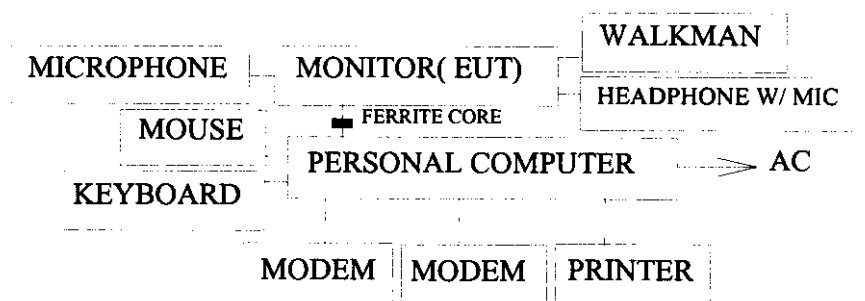

3.2.2. Anechoic Chamber & Open Field Test Site Setup Diagram

ANTENNA TOWER

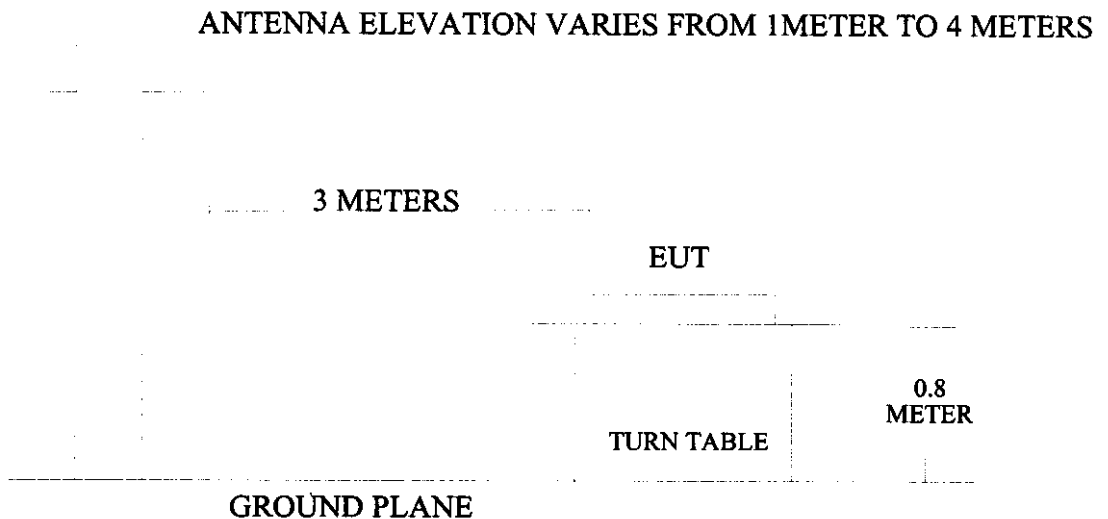

3.3. Radiation Limit (CLASS B)

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMITS	
		uV/M	dBuV/M
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

- Remark :
- (1) Emission level (dBuV/M) = 20 log Emission level (uV/M)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. EUT's Configuration during Compliance Measurement

The configuration of EUT and its simulators were same as those used in conducted measurement. Please refer to 2.4.

3.5. Operating Condition of EUT

Same as conducted measurement which is listed in 2.5.

3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above ground. The turn table rotate 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which were mounted on a antenna tower. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna were used as receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-1992 on radiated measurement.

The bandwidth of the R&S Test Receiver ESVP was set at 120KHz.

The frequency range from 30MHz to 1000MHz was checked.

The following operating conditions were measured within Anechoic Chamber and all the scanning waveform were attached within Appendix II, which include :

- (1) 31.5KHz/640*480
- (2) 37.9KHz/640*480
- (3) 37.9KHz/800*600
- (4) 48.1KHz/800*600
- (5) 48.4KHz/1024*768
- (6) 58KHz/1024*768
- (7) 61.6KHz/1280*960
- (8) 66KHz/1280*1024

Finally, re-measured the each worst operating situation (66KHz/1280*1024) at No. 2 Open Field Test Site and all the test results are listed in section 3.8.

3.7. Test Results

PASSED. Please refer to the following pages.

3.8. Radiated Emission Measurement Results

The frequency spectrum from 30 MHz to 1000MHz was investigated. All the emissions not reported below were too low against the FCC CLASS B limit.

Date of Test : Nov. 21, 1998 Temperature : 23 °C
 EUT : 15" Multi-Scan Color Monitor Humidity : 81 %
 Test Mode : 66KHz/1280*1024

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dBuV/m
			Horizontal dBuV		Horizontal dBuV/m	Limits dBuV/m	
41.315	19.60	2.16	1.40		23.16	40.00	16.84
68.853	11.50	2.85	8.70		23.05	40.00	16.95
123.934	19.57	3.91	5.30		28.78	43.50	14.72
151.476	20.90	4.35	4.80		30.05	43.50	13.45
179.016	21.24	4.74	3.00		28.98	43.50	14.52
206.555	21.61	5.13	-1.60		25.14	43.50	18.36
* 234.098	22.52	5.46	6.10		34.08	46.00	11.92
261.638	23.23	5.83	1.70		30.76	46.00	15.24
289.178	24.60	6.20	2.60		33.40	46.00	12.60
316.719	14.09	6.59	4.30		24.98	46.00	21.02
344.261	15.35	6.90	2.20		24.45	46.00	21.55
371.799	15.41	7.18	0.10		22.69	46.00	23.31
399.341	16.72	7.50	0.90		25.12	46.00	20.88
454.422	17.19	8.11	0.60		25.90	46.00	20.10
481.965	17.09	8.35	0.80		26.24	46.00	19.76
537.044	19.09	9.04	0.40		28.53	46.00	17.47
564.586	19.38	9.23	-2.30		26.31	46.00	19.69
647.210	20.21	10.11	-2.70		27.62	46.00	18.38
702.293	20.61	10.68	-3.30		27.99	46.00	18.01

- Remark :
1. All reading were Quasi-Peak values.
 2. The worst emission was detected at 234.098MHz with corrected signal level of 34.08dBuV/m (limit was 46.0dBuV/m) when the antenna was at horizontal polarization and was at 1m high and the turn table was at 225 ° .
 3. 0 ° is the table front facing the antenna. Degree was calculated from 0 ° clockwise facing the antenna.

Date of Test : Nov. 21, 1998 Temperature : 23 °C
 EUT : 15" Multi-Scan Color Monitor Humidity : 81 %
 Test Mode : 66KHz/1280*1024

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dBuV/m
			Vertical dBuV		Vertical dBuV/m	Limits dBuV/m	
41.307	18.19	2.16	-0.40		19.95	40.00	20.05
68.852	13.23	2.85	12.70		28.78	40.00	11.22
* 123.934	18.50	3.91	12.40		34.81	43.50	8.69
151.475	19.38	4.35	3.40		27.13	43.50	16.37
179.018	19.14	4.74	3.70		27.58	43.50	15.92
206.557	23.63	5.13	-4.50		24.26	43.50	19.24
234.100	22.48	5.46	7.90		35.84	46.00	10.16
261.640	21.54	5.83	0.90		28.27	46.00	17.73
289.179	24.07	6.20	2.60		32.87	46.00	13.13
316.721	14.69	6.59	4.70		25.98	46.00	20.02
344.259	15.20	6.90	5.10		27.20	46.00	18.80
371.801	14.58	7.18	5.00		26.76	46.00	19.24
399.342	15.99	7.50	4.70		28.19	46.00	17.81
454.424	17.55	8.11	1.00		26.66	46.00	19.34
481.964	18.56	8.35	2.30		29.21	46.00	16.79
509.504	18.60	8.73	2.10		29.43	46.00	16.57
564.585	19.02	9.23	-0.49		27.76	46.00	18.24
619.668	20.61	9.80	-0.90		29.51	46.00	16.49
674.747	19.65	10.39	-2.80		27.24	46.00	18.76

- Remark :
1. All reading were Quasi-Peak values.
 2. The worst emission was detected at 123.934MHz with corrected signal level of 34.81dBuV/m (limit was 43.5dBuV/m) when the antenna was at vertical polarization and was at 1m high and the turn table was at 130 ° .
 3. 0 ° is the table front facing the antenna. Degree was calculated from 0 ° clockwise facing the antenna.

4. DEVIATIONS TO TEST SPECIFICATIONS

[NONE]

APPENDIX I


Conducted Test Data

(Total Pages : 30)

10-17-99

REVISION

dBuV

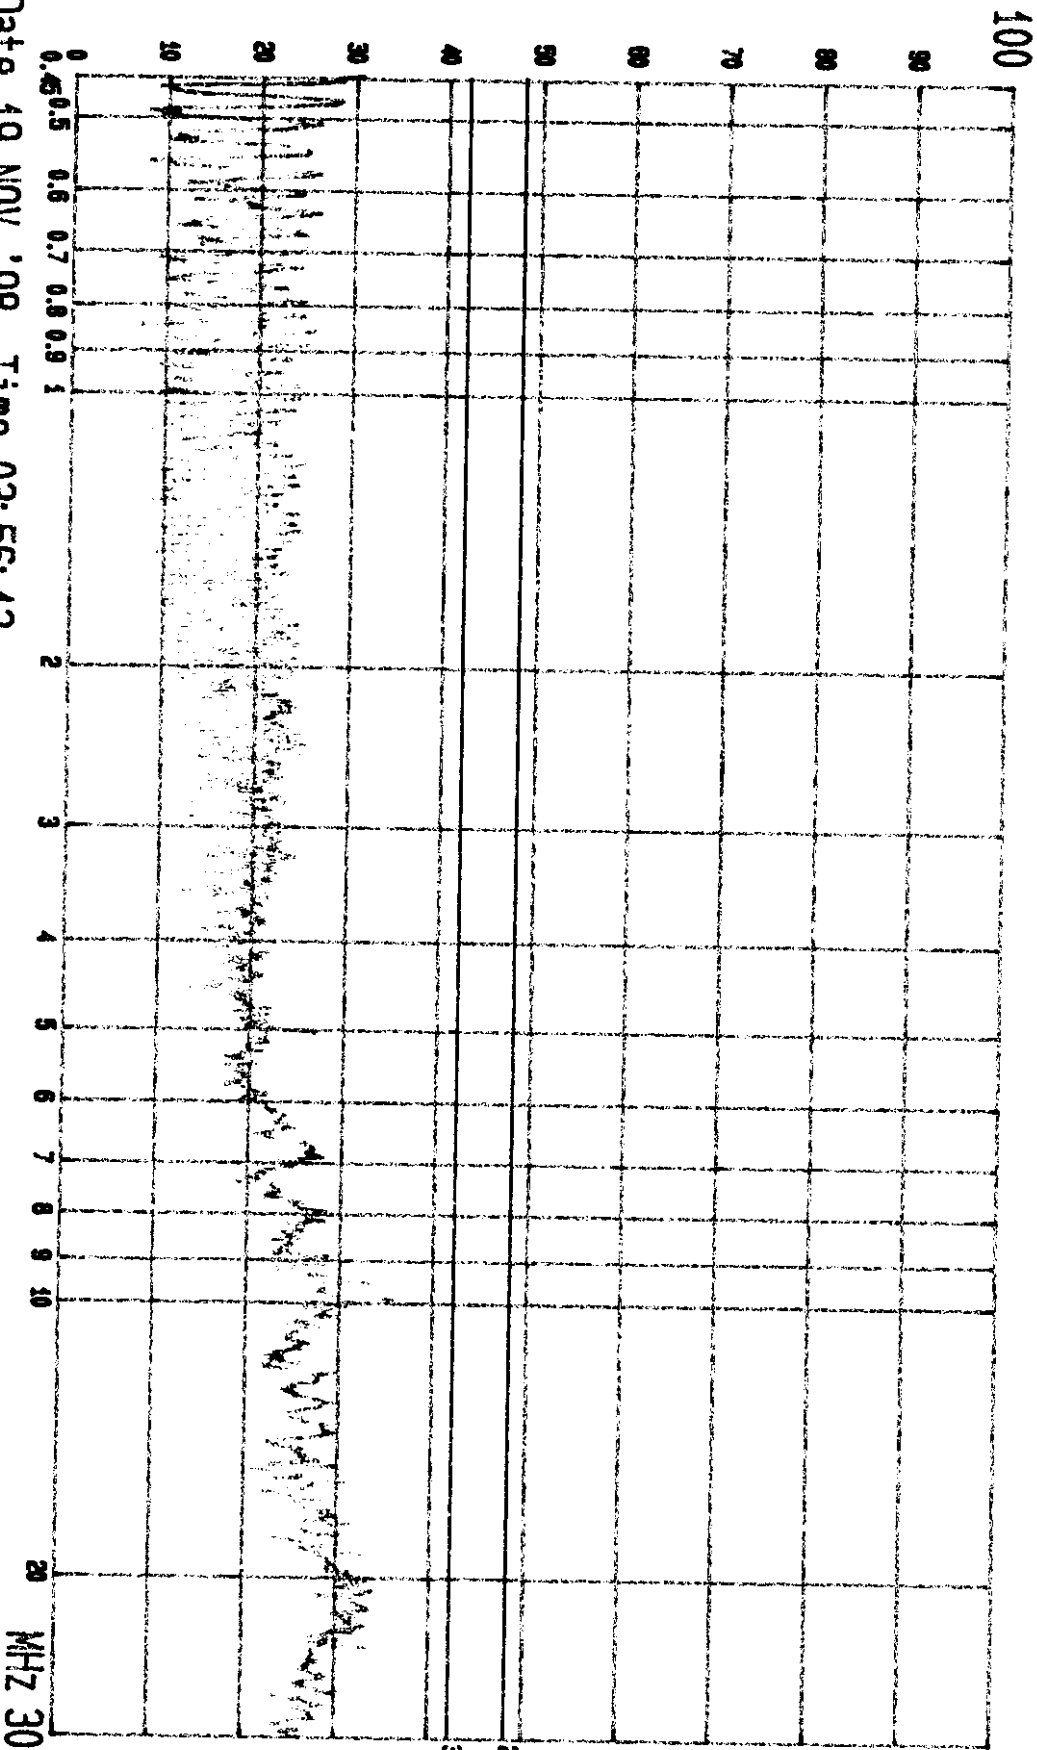

--- Date 19.NOV.'98
VIEW SONIC
LINE: VA.


Time 03:56:13
EUT: MONITOR
MENO: (640X480; 31.5KHz)

M/N: VCDTS21403-2*
EUT TO LISN
(PEAK VALUE) TTEM.C.

PAGE: 016.

dBuV

100

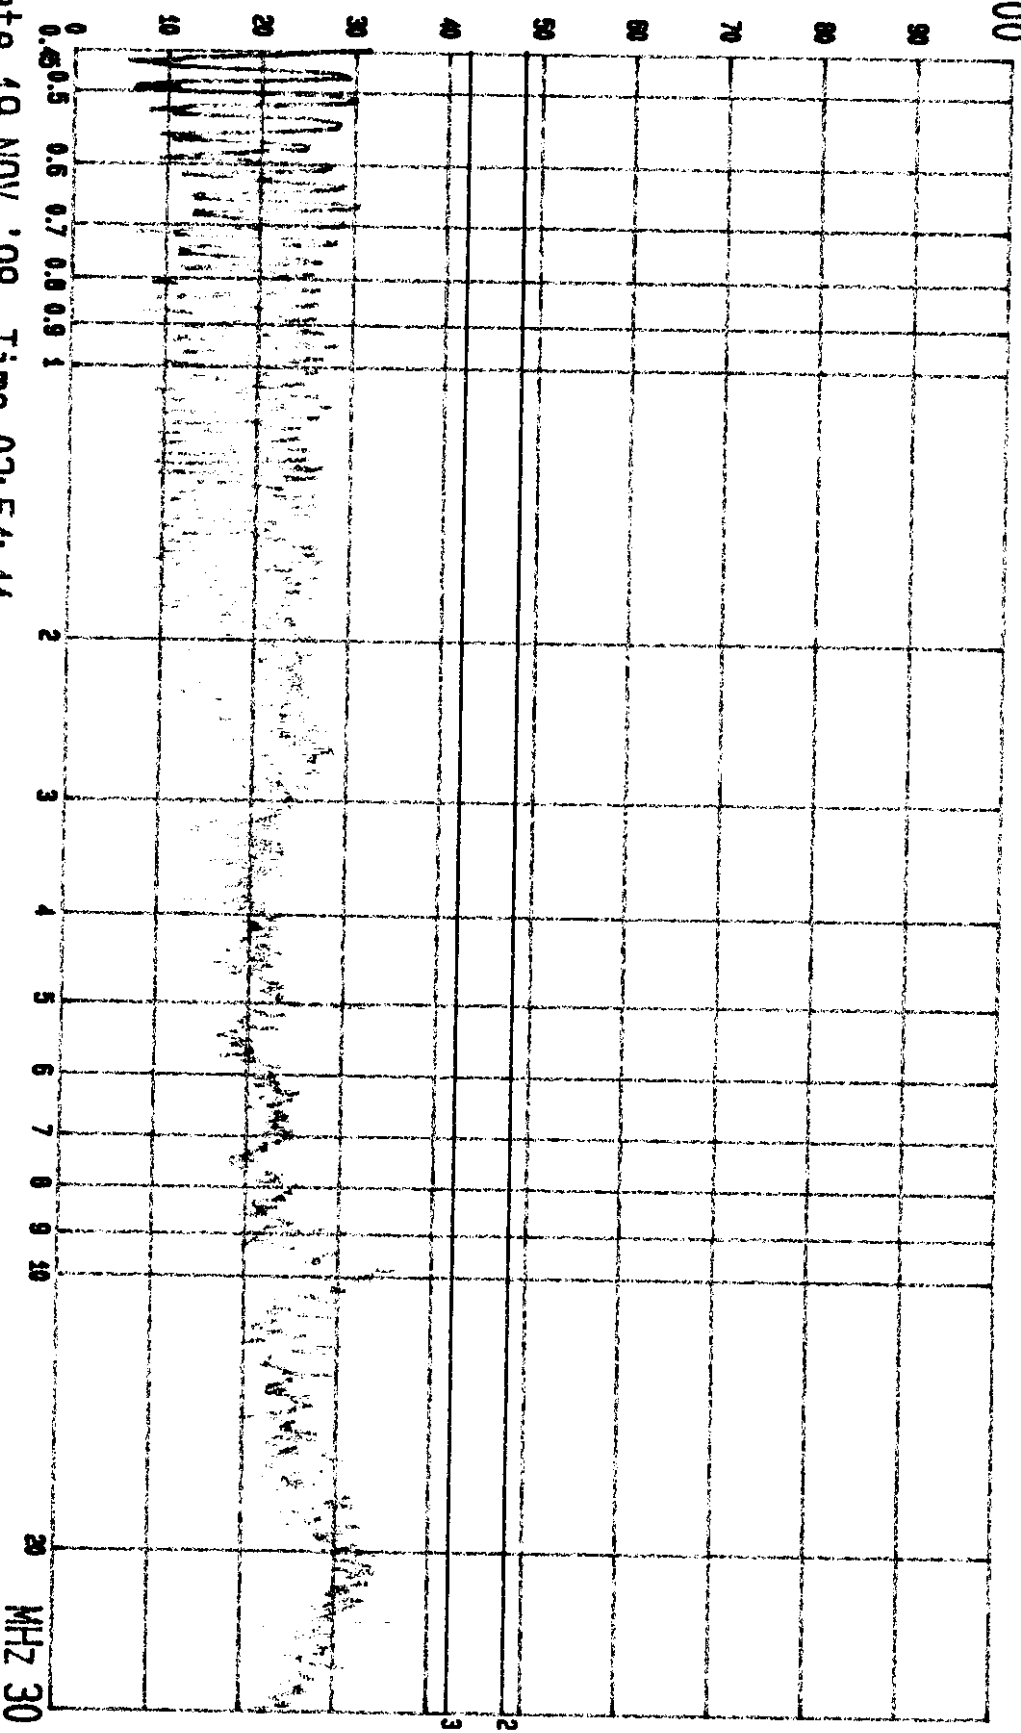


--- Date 19.NOV.'98
VIEW SONIC
LINE: VB.

Time 03:54:41
EUT: MONITOR
MENO: (640X480; 31.5KHz)

M/N: VCDTS21403-2*
EUT TO LISN
(PEAK VALUE) ITEMC.

dBuV

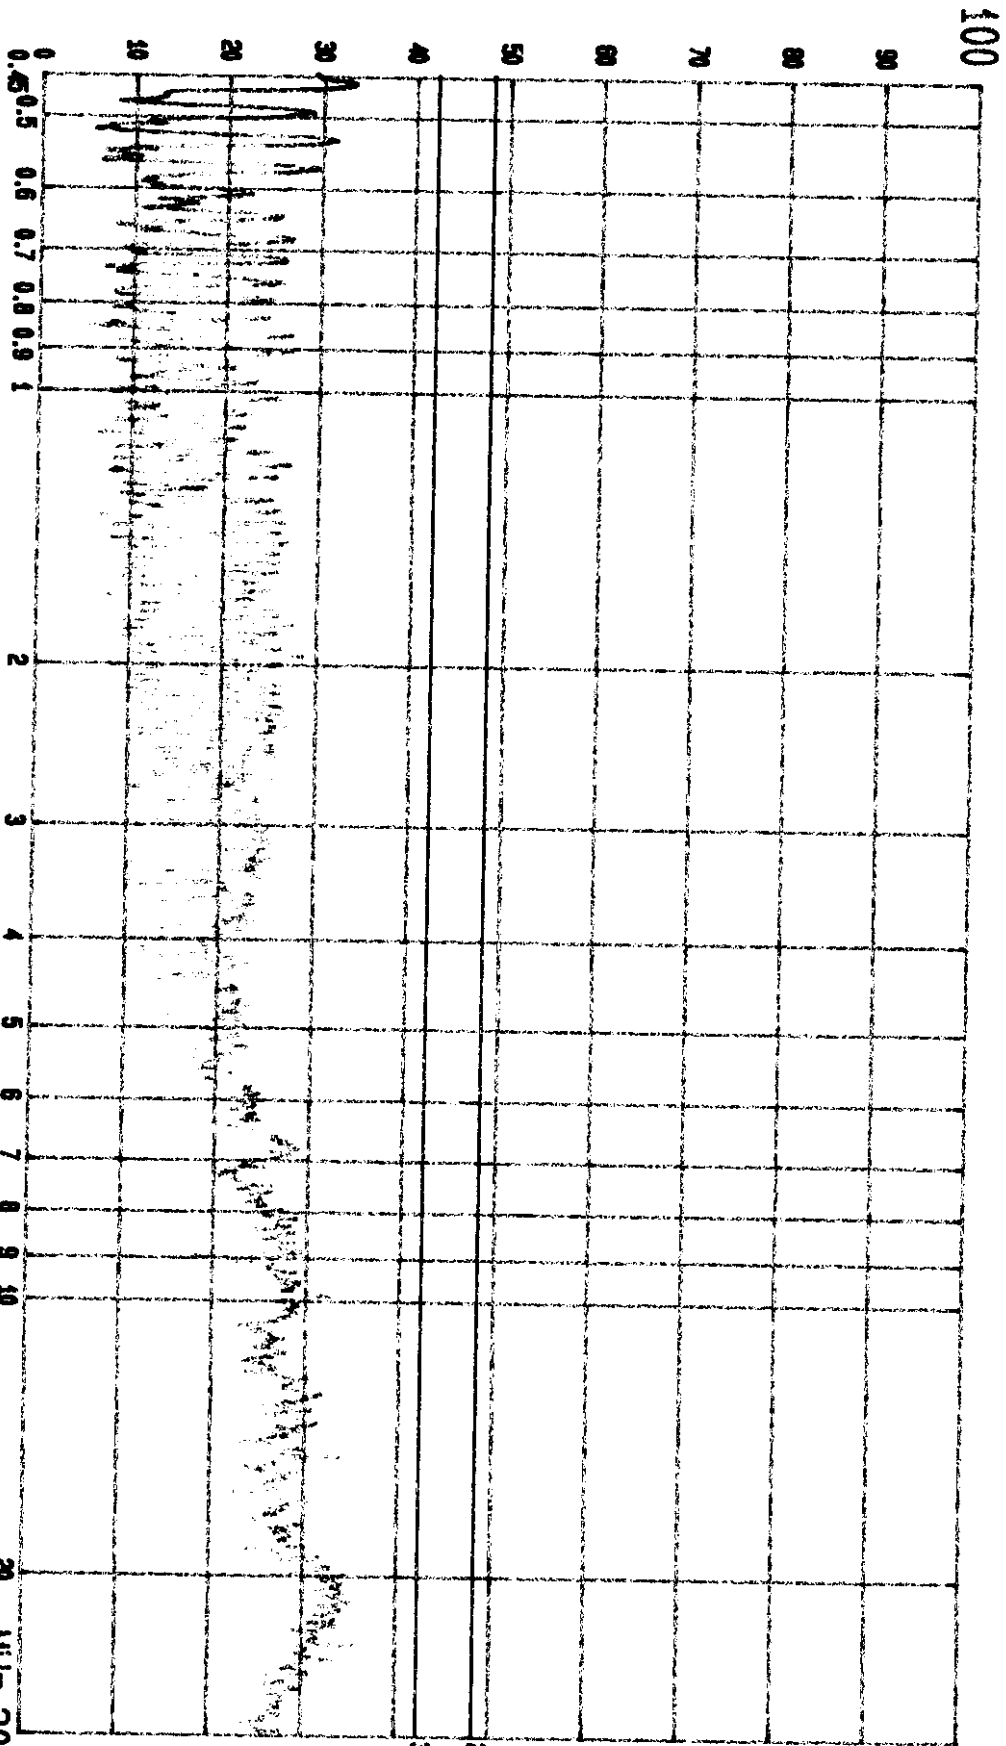

--- Date 19.NOV.'98
VIEW SONIC
LINE: VA.


Time 03:52:13
EUT: MONITOR
MENO: (800X600; 37.9KHz)

M/N: VCDTS21403-2*
EUT 10 LISN
(PEAK VALUE) TTEMC.

PAGE: 013.

dBuV

100

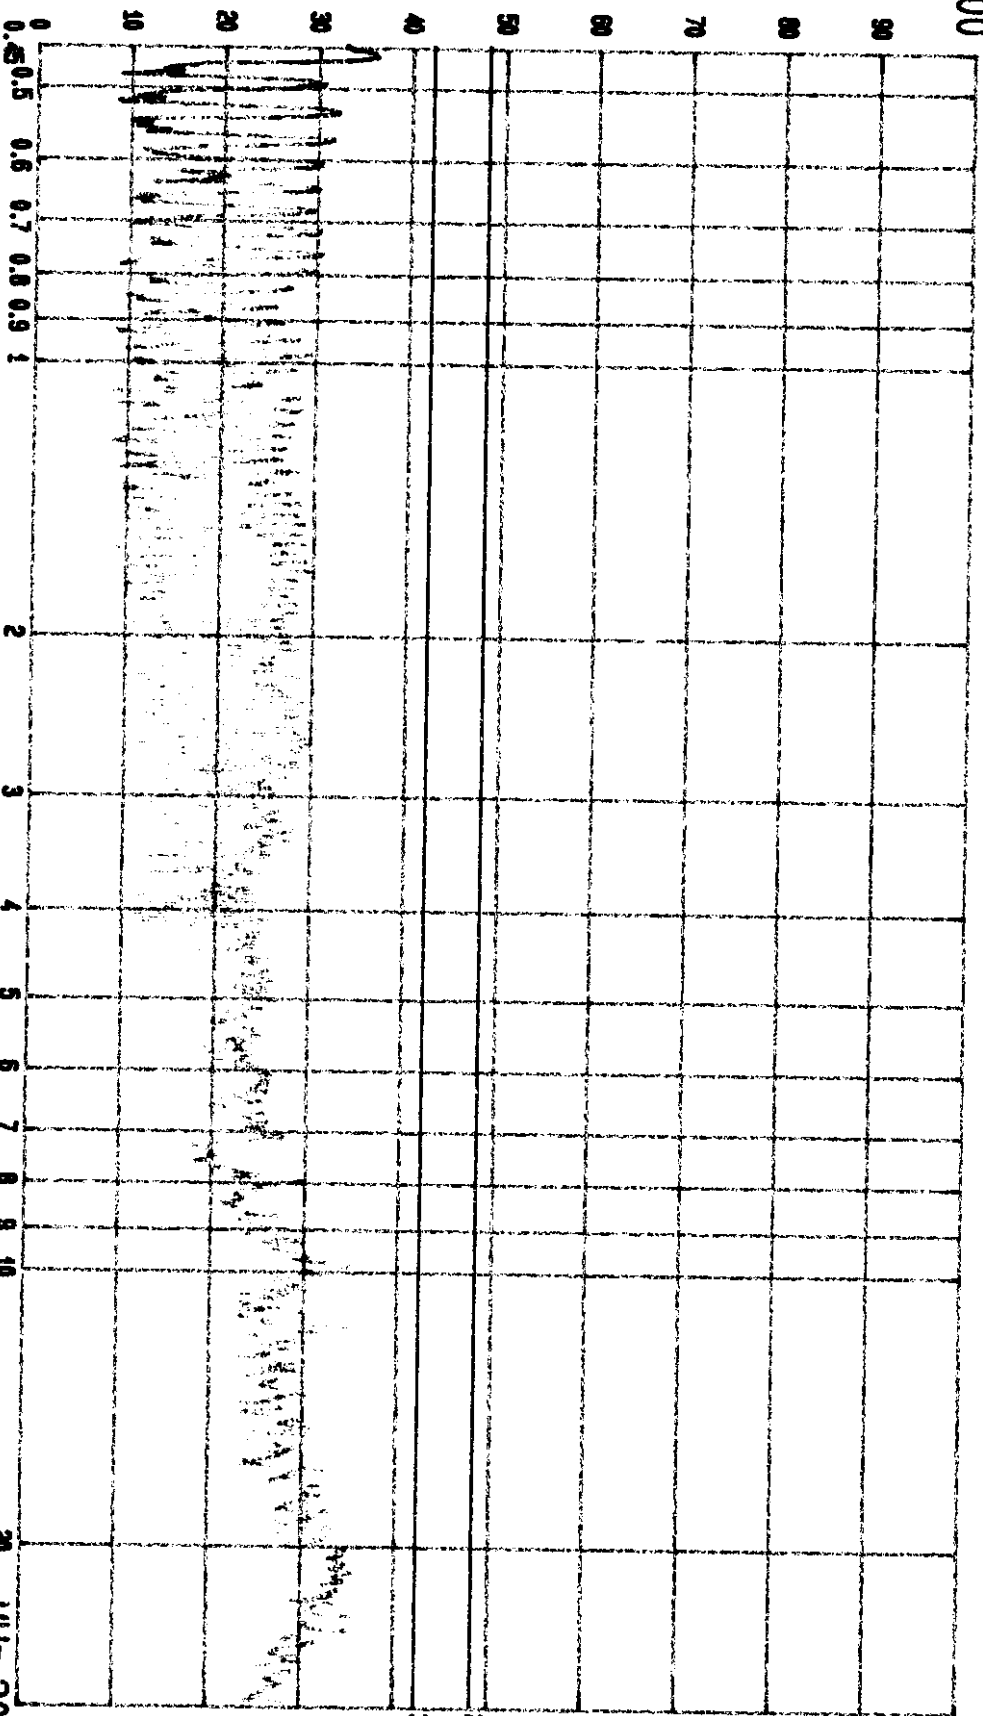

--- Date 19.NOV.'98
VIEW SONIC
LINE: VB.


Time 03:53:37
EUT: MONITOR
MEND: (800X600; 37.9KHz)

M/N: VCDIS21403-2*
EUT TO LISN
(PEAK VALUE)

PAGE: 014.
ITEMC.

dBuV

100

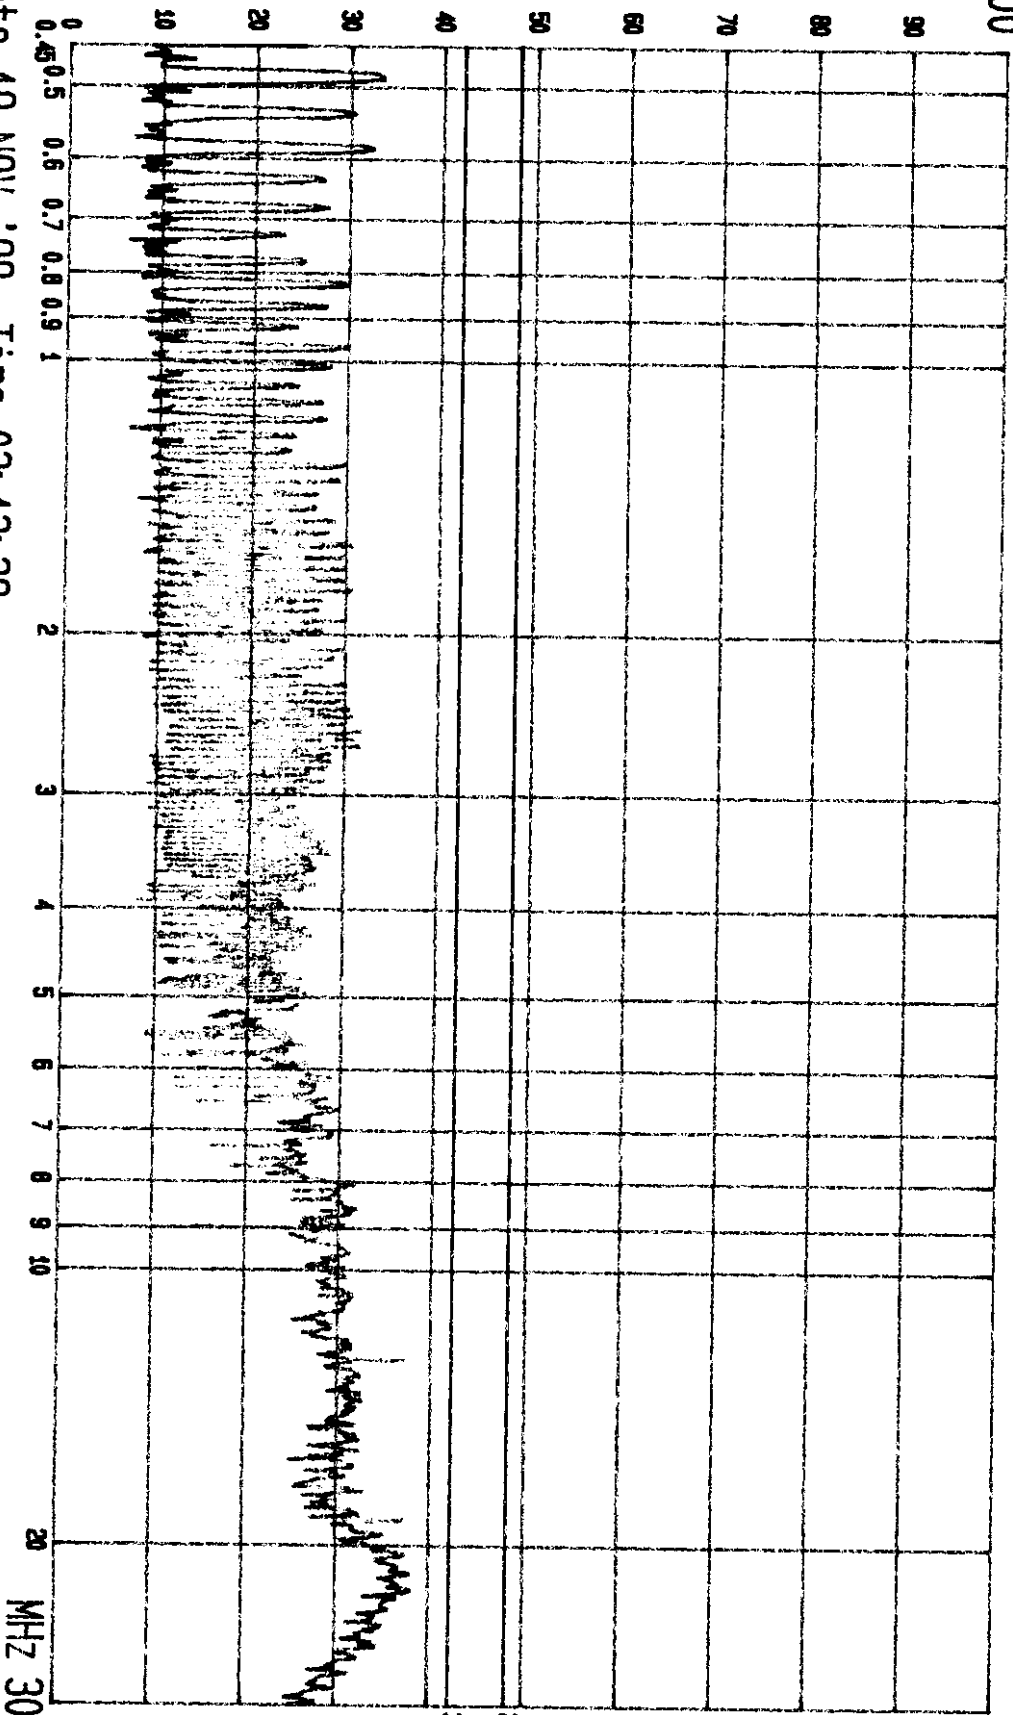

--- Date 19.NOV.'98
VIEW SONIC
LINE: VA.


Time 03:13:39
EUT: MONITOR
MEND: (800X600; 48.1KHz)

M/N: VCDTS21403-2*
EUT TO LISN
(PEAK VALUE) ITEMC.

PAGE: 004.

dBuV

100

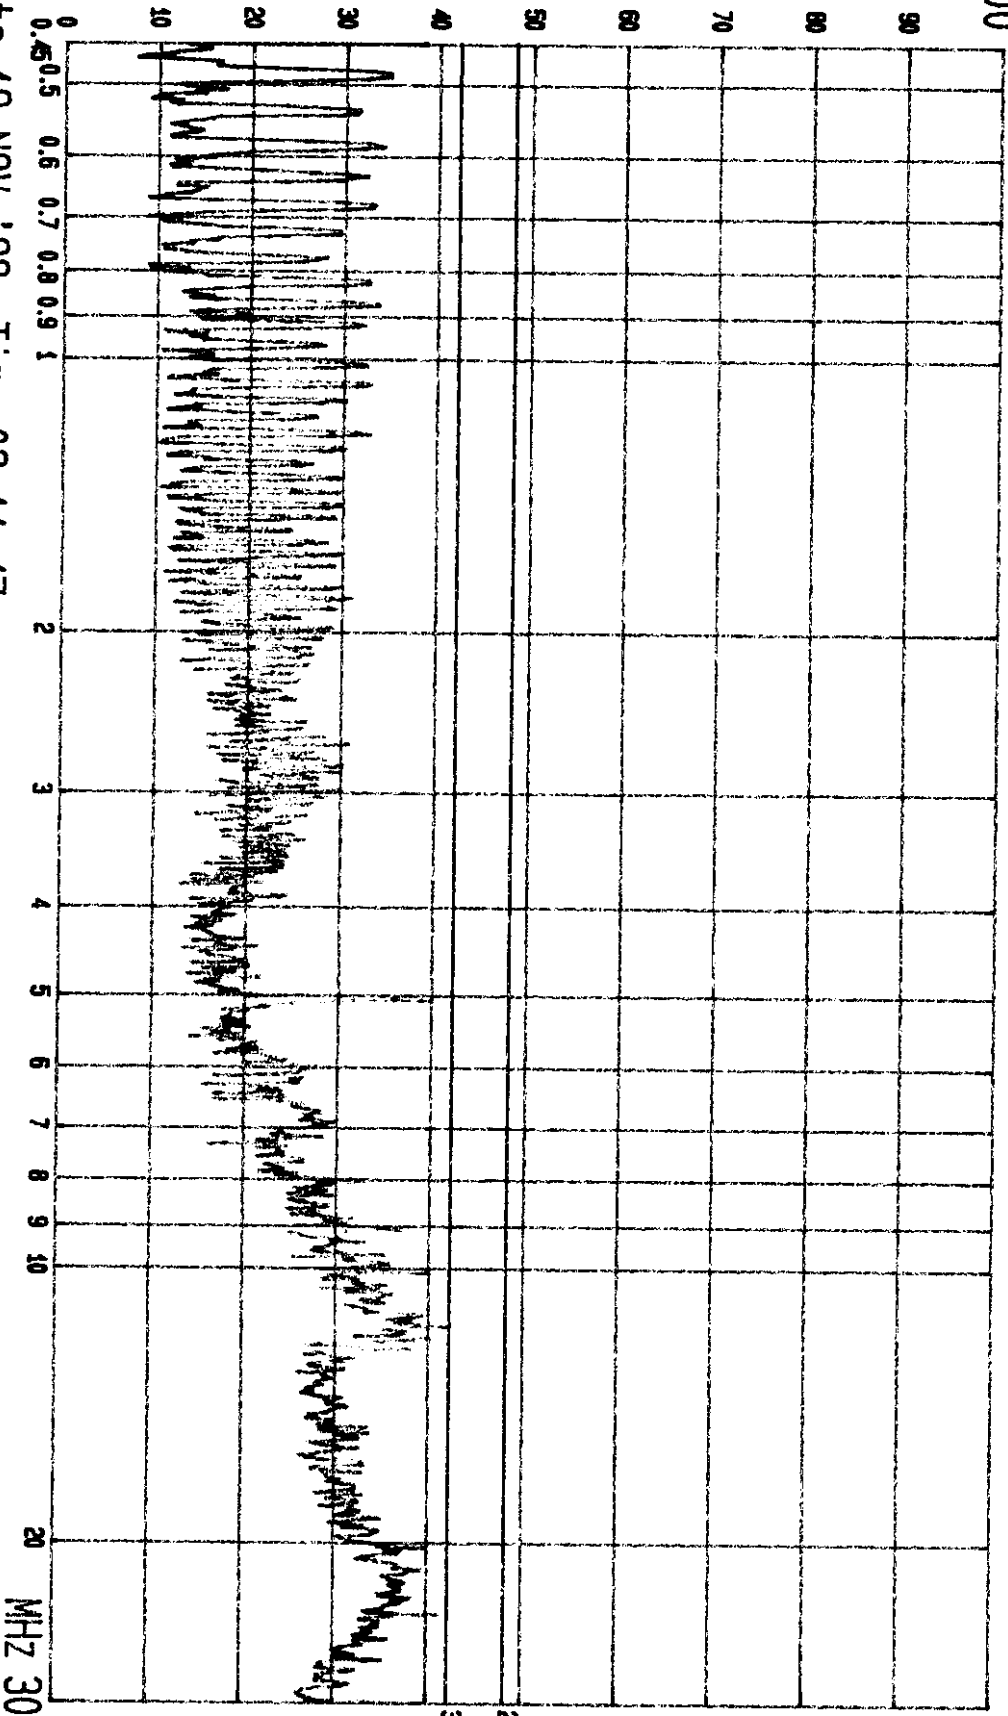

--- Date 19.NOV.'98
VIEW SONIC
LINE: VB.


Time 03:11:47
EUT: MONITOR
MENO: (800X600; 48.1KHz)

M/N: VCDIS21403-2x
EUT TO LISN

PAGE: 003.
(PEAK VALUE) ITEM: C.

dBuV

100

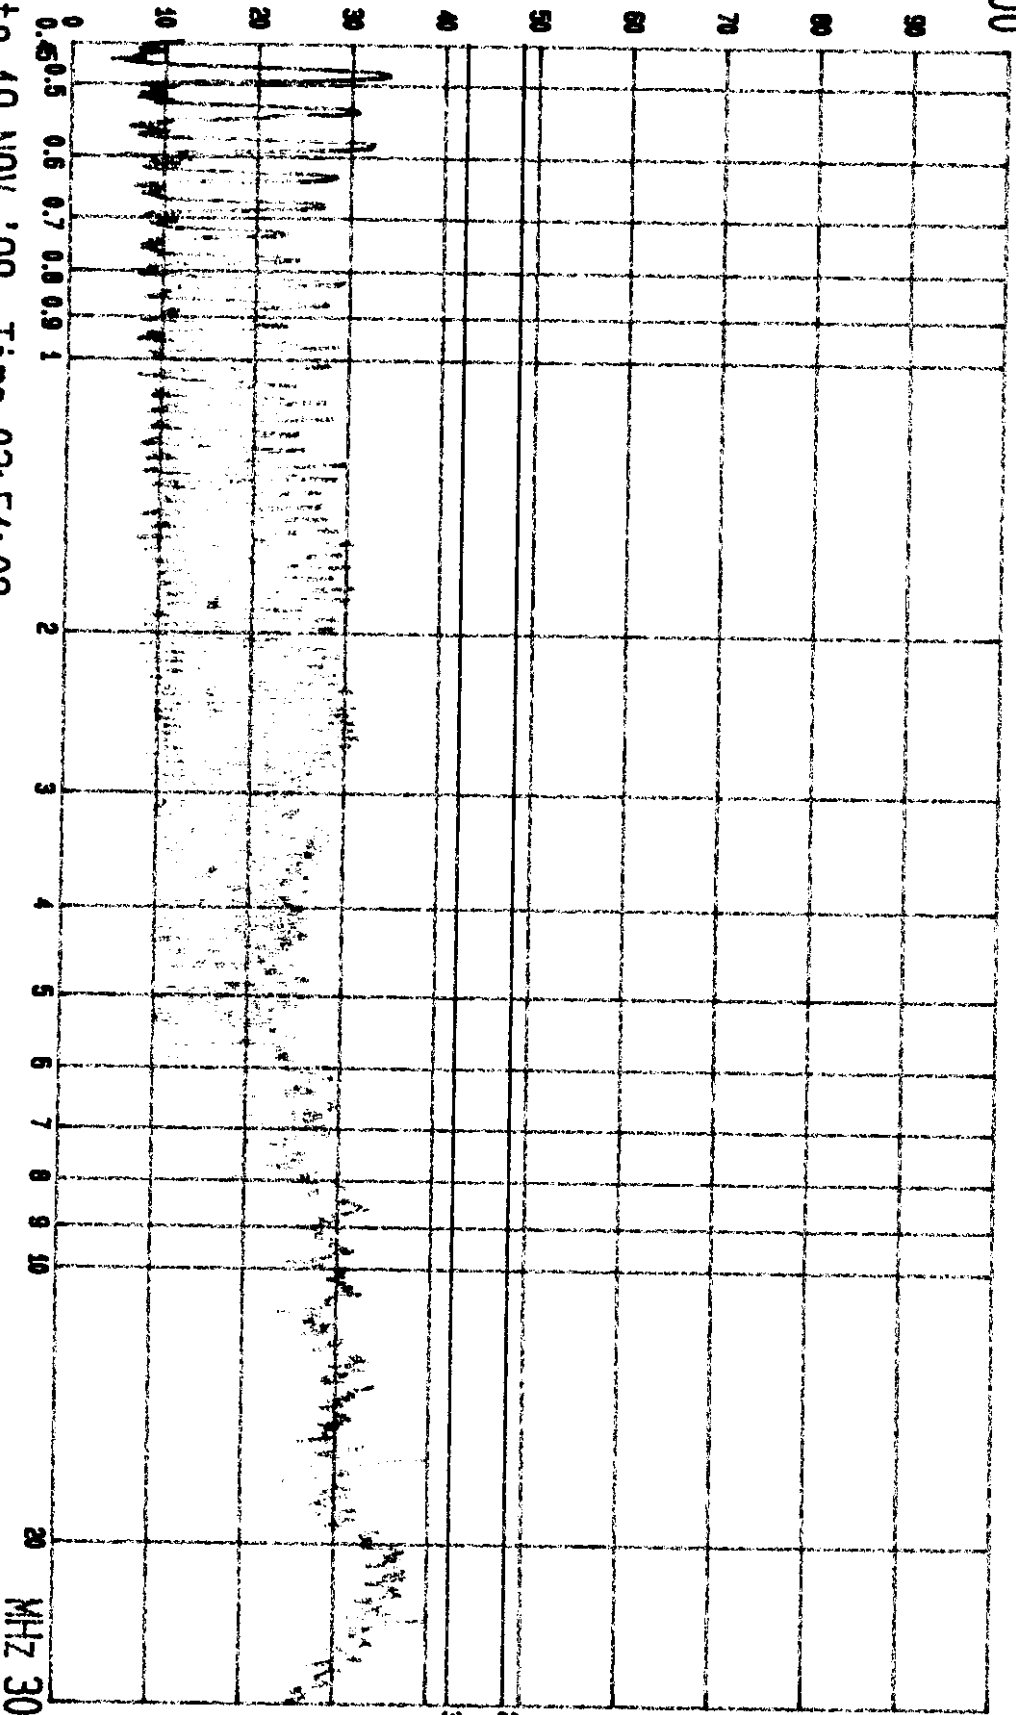

--- Date 19.NOV.'98
VIEW SONIC
LINE: VA.


Time 03:51:02
EUT: MONITOR
MEND: (1024X768; 48.4KHz)

M/N: VCDTS21403-2x
EUT TO LISN
(PEAK VALUE)

PAGE: 012
ITEMC.

dBuV

100

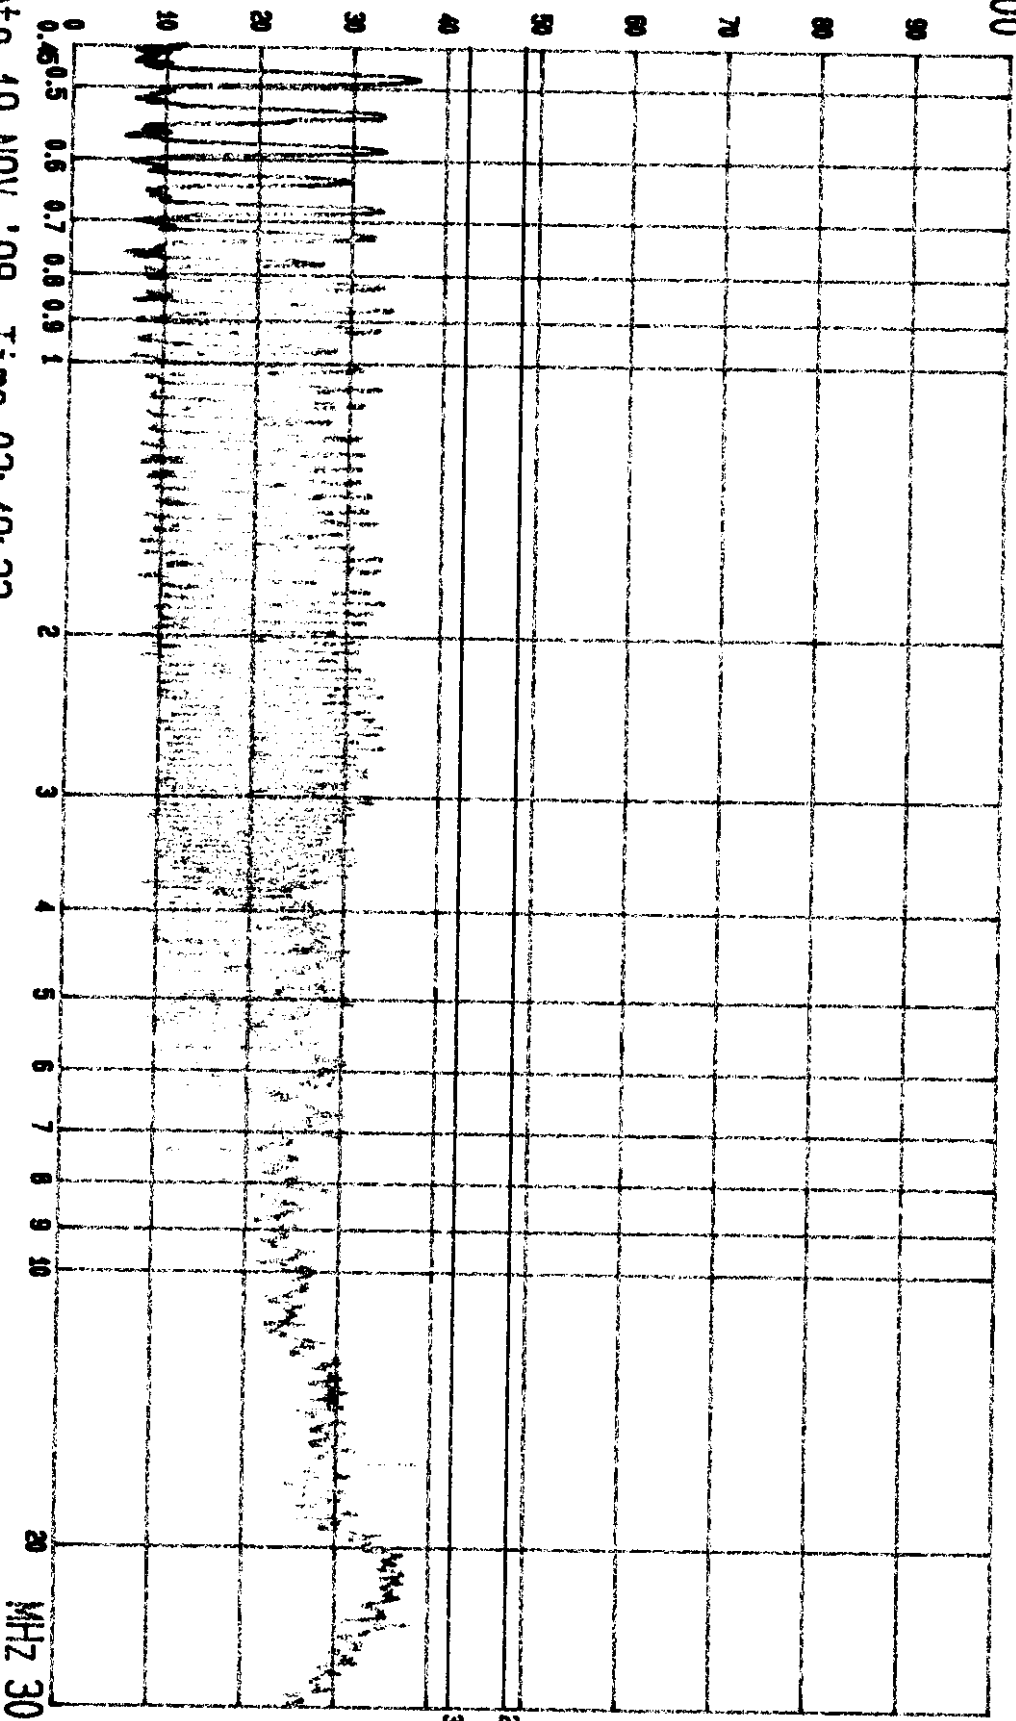


--- Date 19.NOV.'98
VIEW SONIC
LINE: VB.

Time 03:49:33
EUT: MONITOR
MEND: (1024X768; 48.4KHz)

M/N: VCDTS21403-2*
EUT TO LISN
(PEAK VALUE)

PAGE: 011.
TTEMC.

dBuV

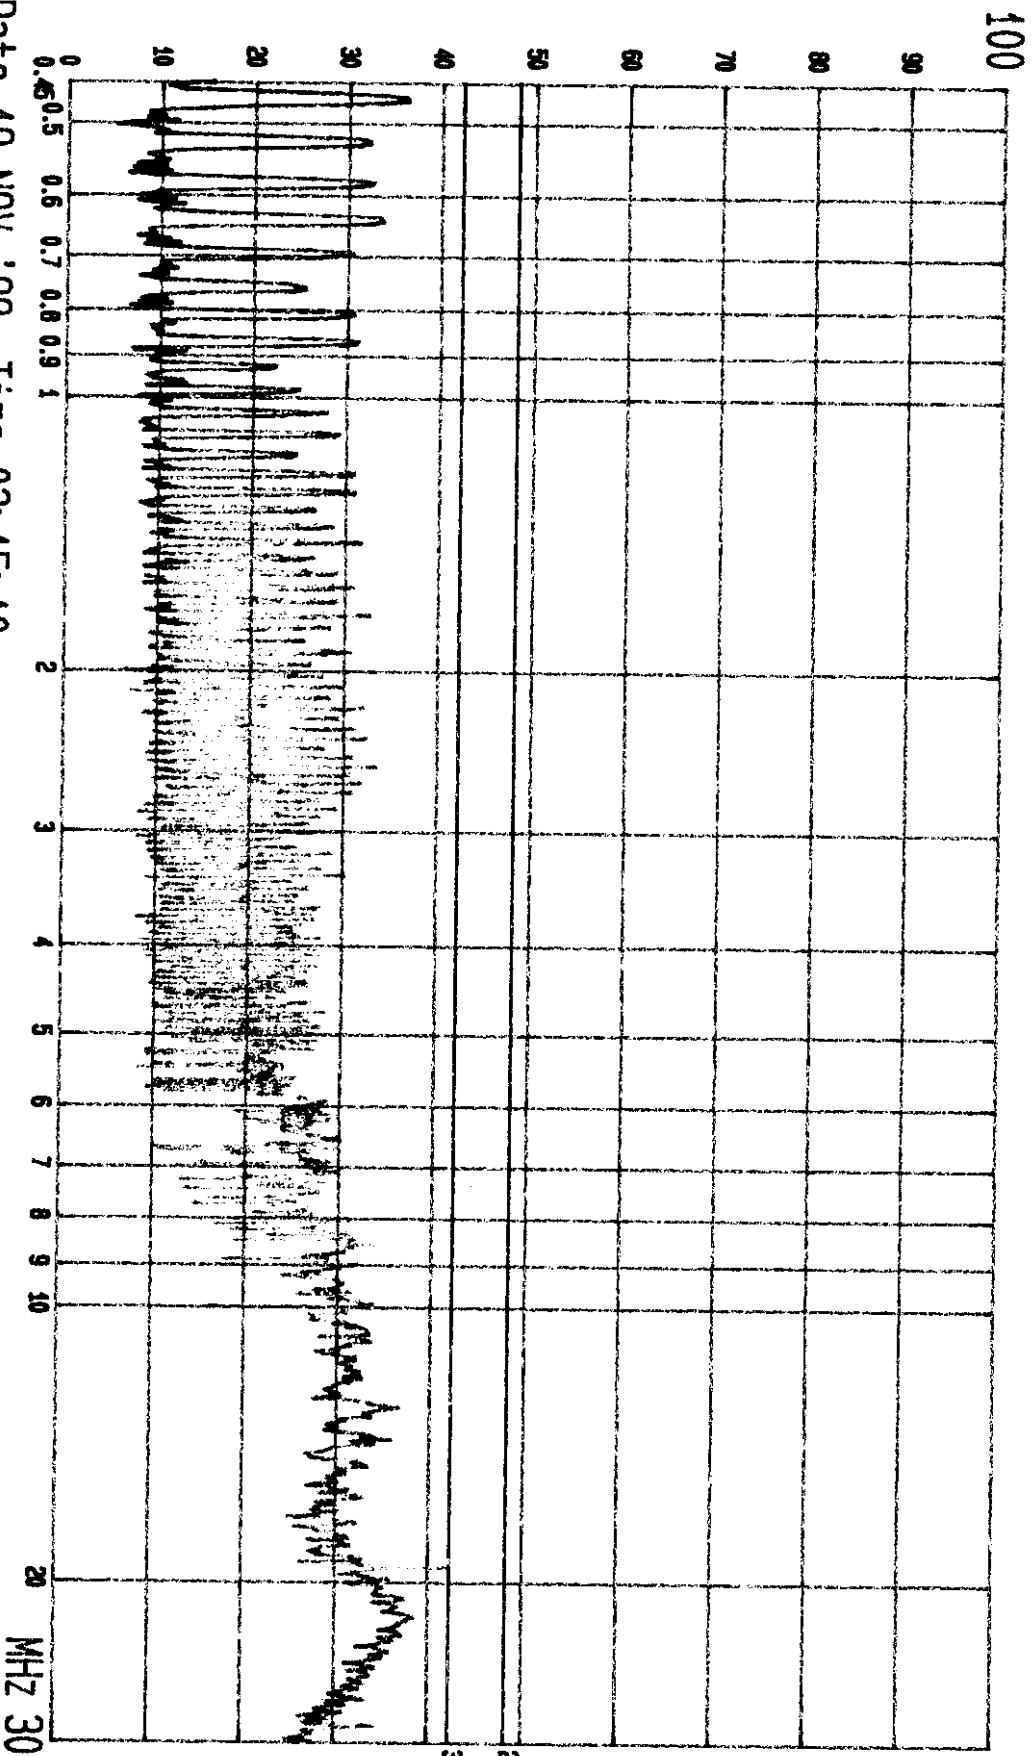

--- Date 19.NOV.'98
VIEW SONIC
LINE: VA.


Time 03:15:10
EUT: MONITOR
MEND: (1024X768; 58KHz)

M/N: VCDIS21403-2*
EUT TO LISN

PAGE: 005.
(PEAK VALUE) ITEM C.

dBuV

100

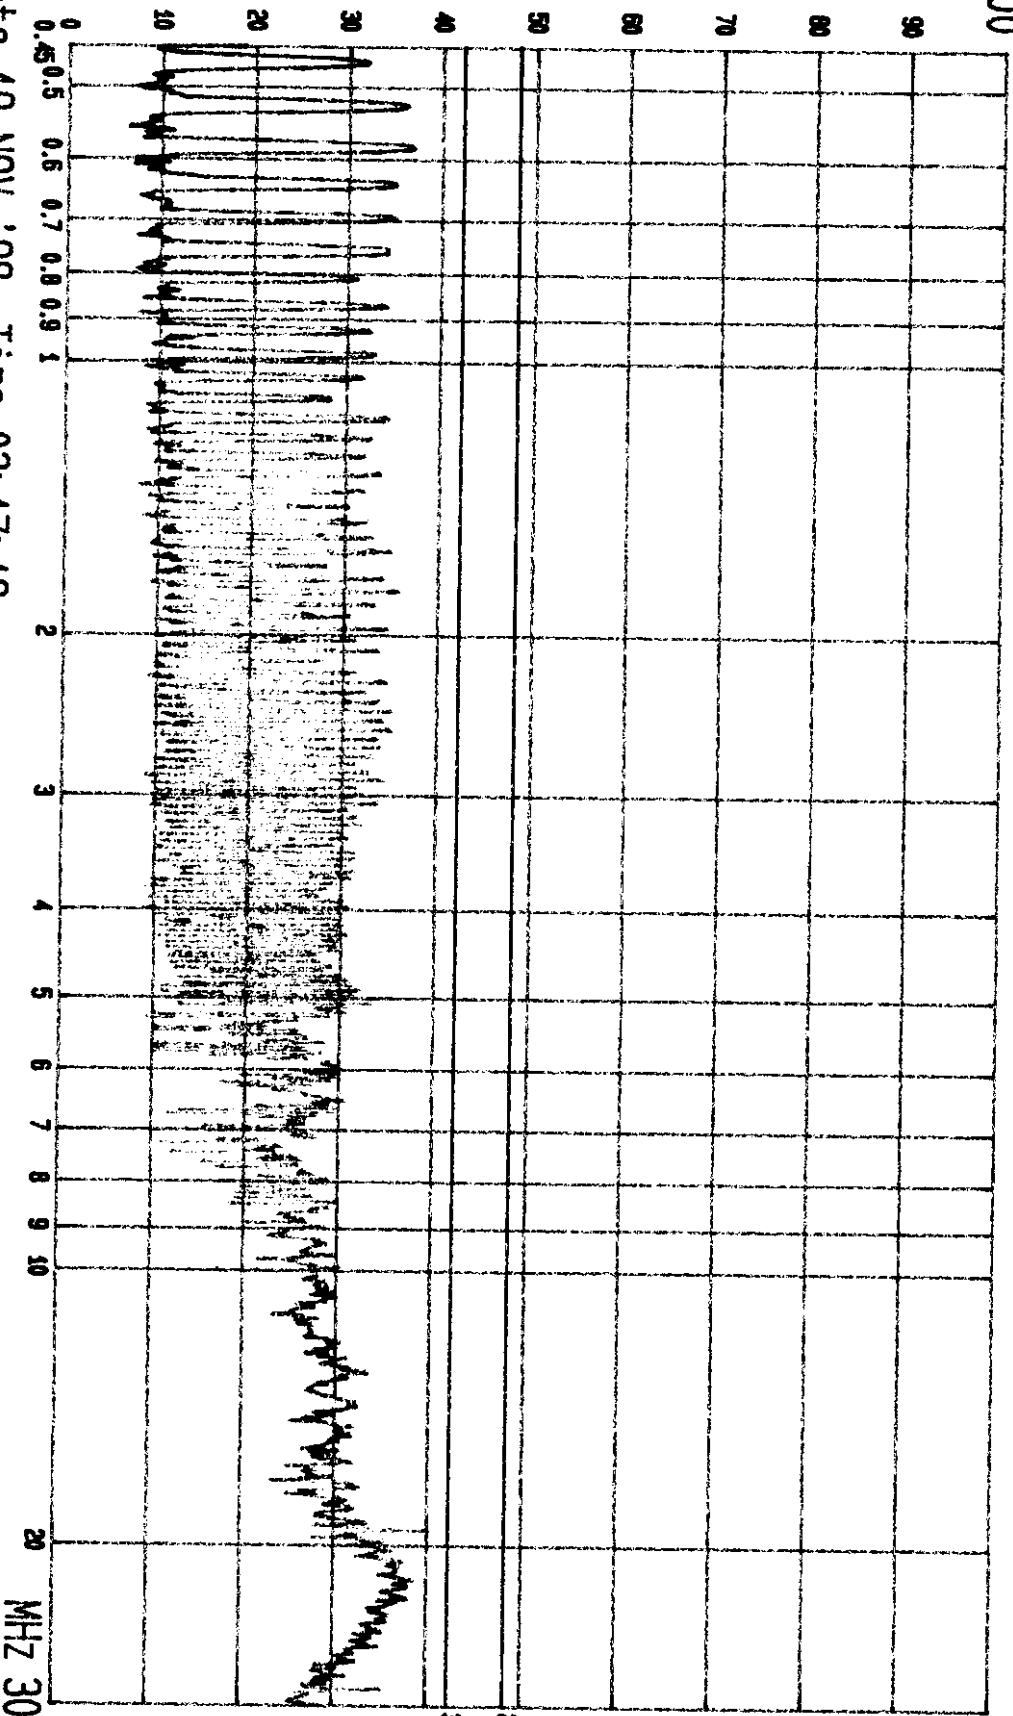

--- Date 19.NOV.'98
VIEW SONIC
LINE: VB.


Time 03:17:19
EUT: MONITOR
MENO: (1024X768; 58KHz)

M/N: VCDTS21403-2*
EUT TO LISN
(PEAK VALUE)

PAGE: 006.
ITEMC.

dBuV

100

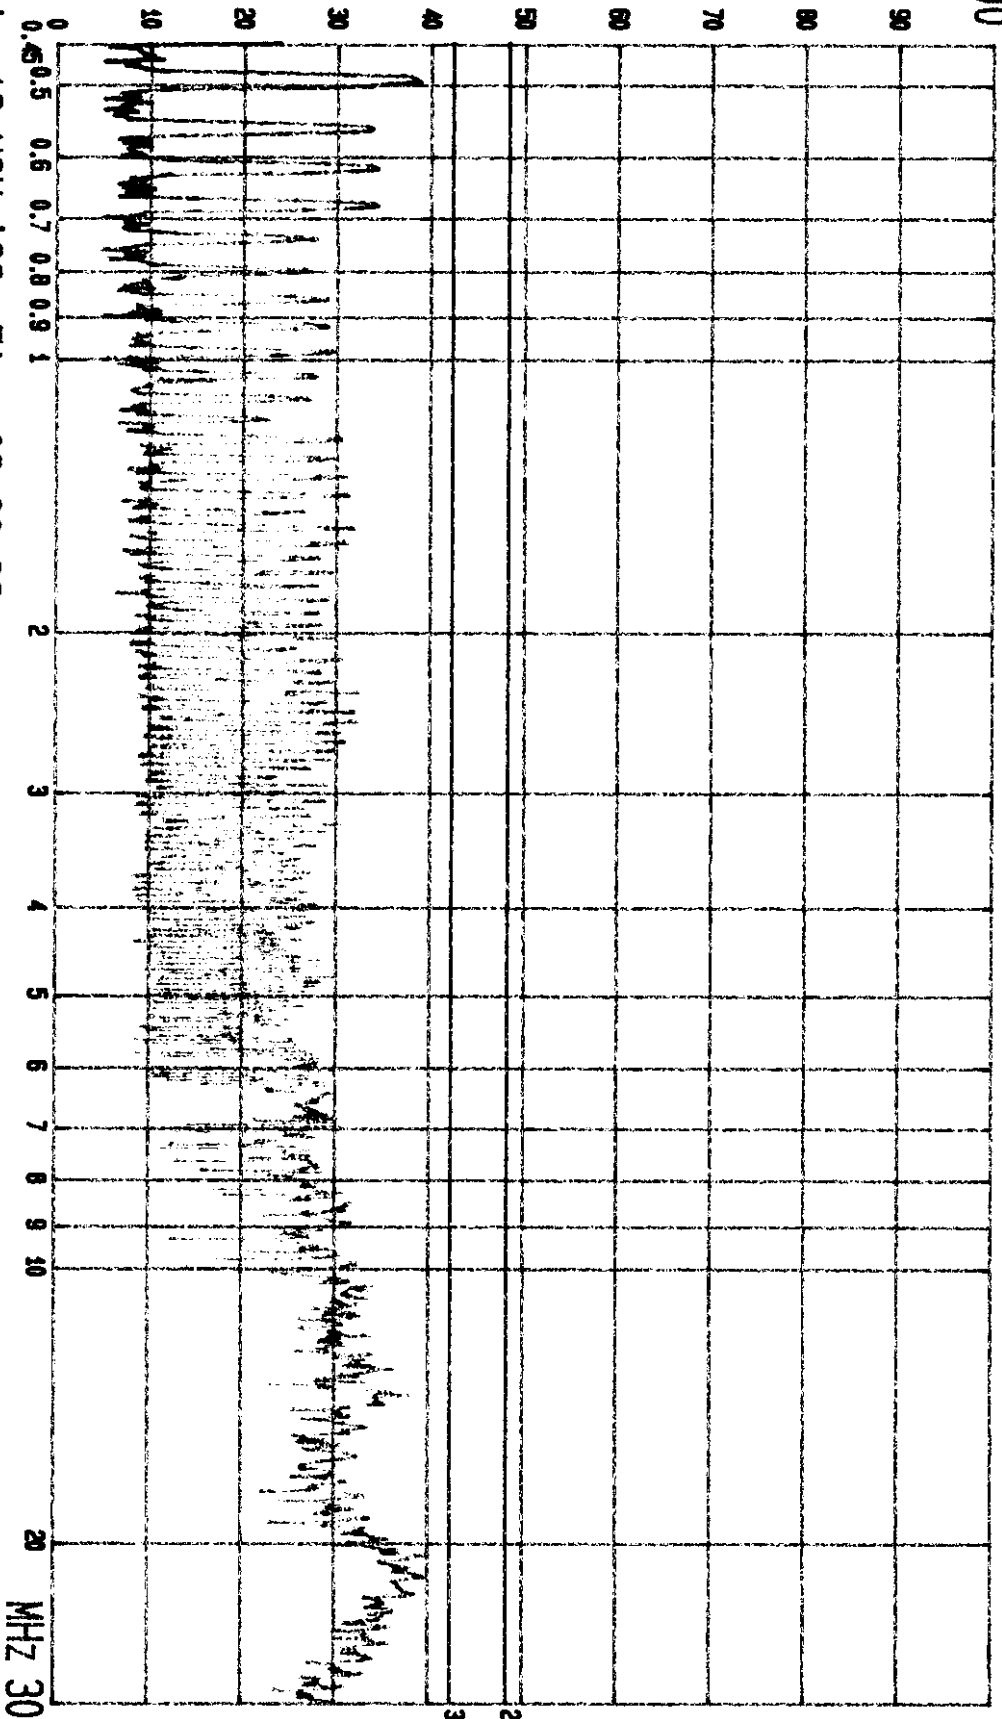


--- Date 19.NOV.'98
VIEW SONIC
LINE: VA.

Time 03:20:36
EUT: MONITOR
MEND: (1280X960; 61.6KHz)

M/N: VCDTS21403-2*
EUT TO LISN
(PEAK VALUE)


PAGE: 008.
ITEMC.

dBuV

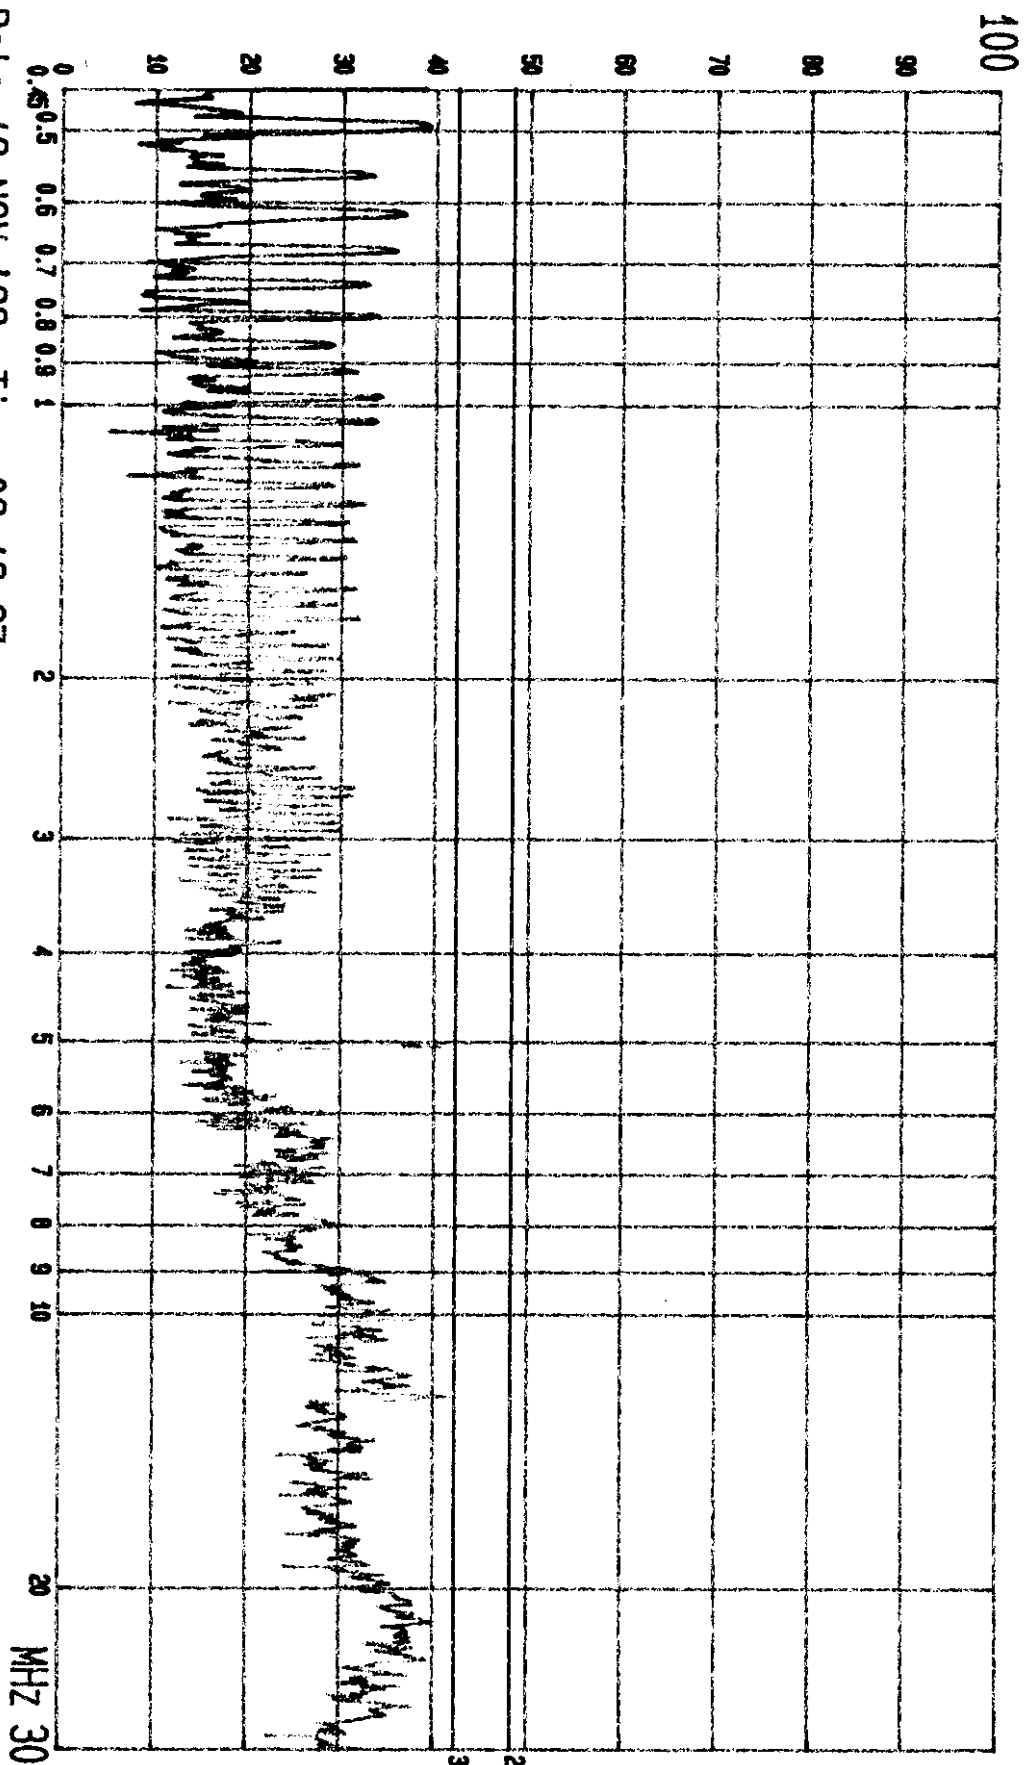

--- Date 19.NOV.'98 Time 03:19:27
VIEW SONIC EUT: MONITOR M/N: VCDTS21403-2*
LINE: VB. MEND: (1280X960; 61.6KHz) EUT TO LISN (7) (PEAK VALUE) TTEMC. PAGE: 007.

dBuV

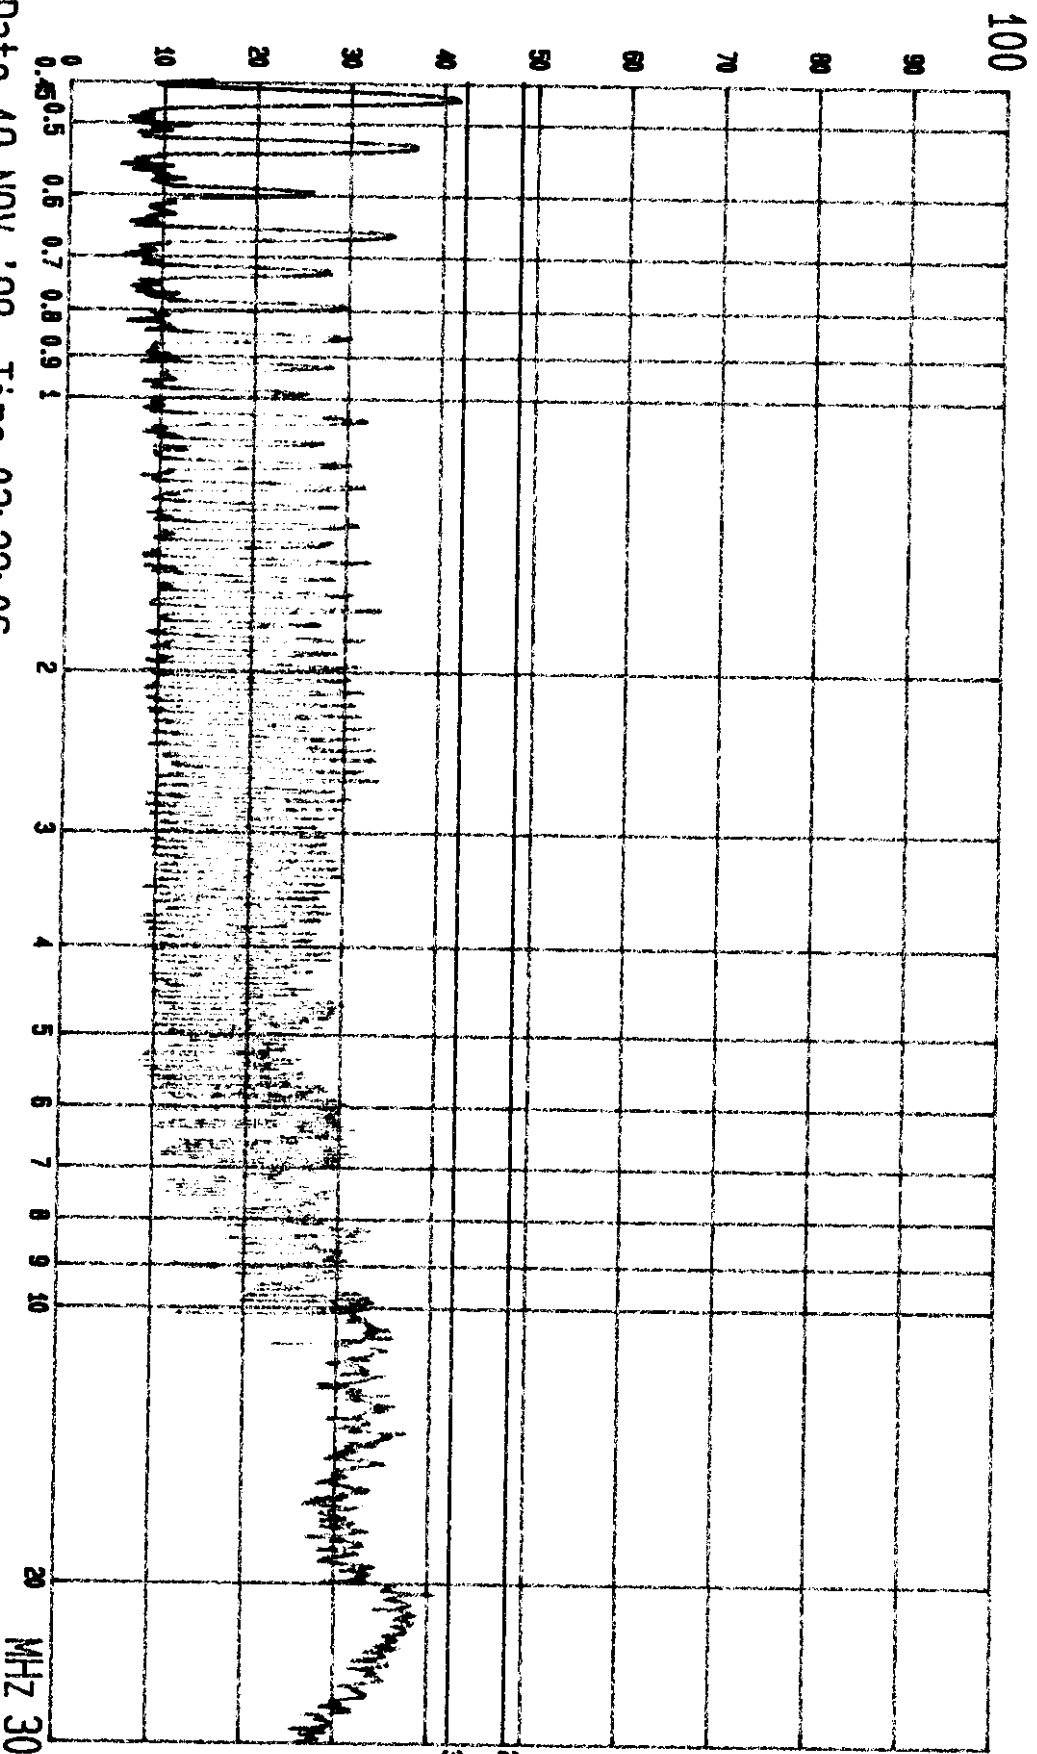


--- Date 19.NOV.'98
VIEW SONIC
LINE: VA.

Time 03:22:06
EUT: MONITOR
MENO: (1280X1024; 66KHz)

M/N: VCDTS21403-2*
EUT TO LISN
(PEAK VALUE) ITEM C.

PAGE: 009.

dBuV

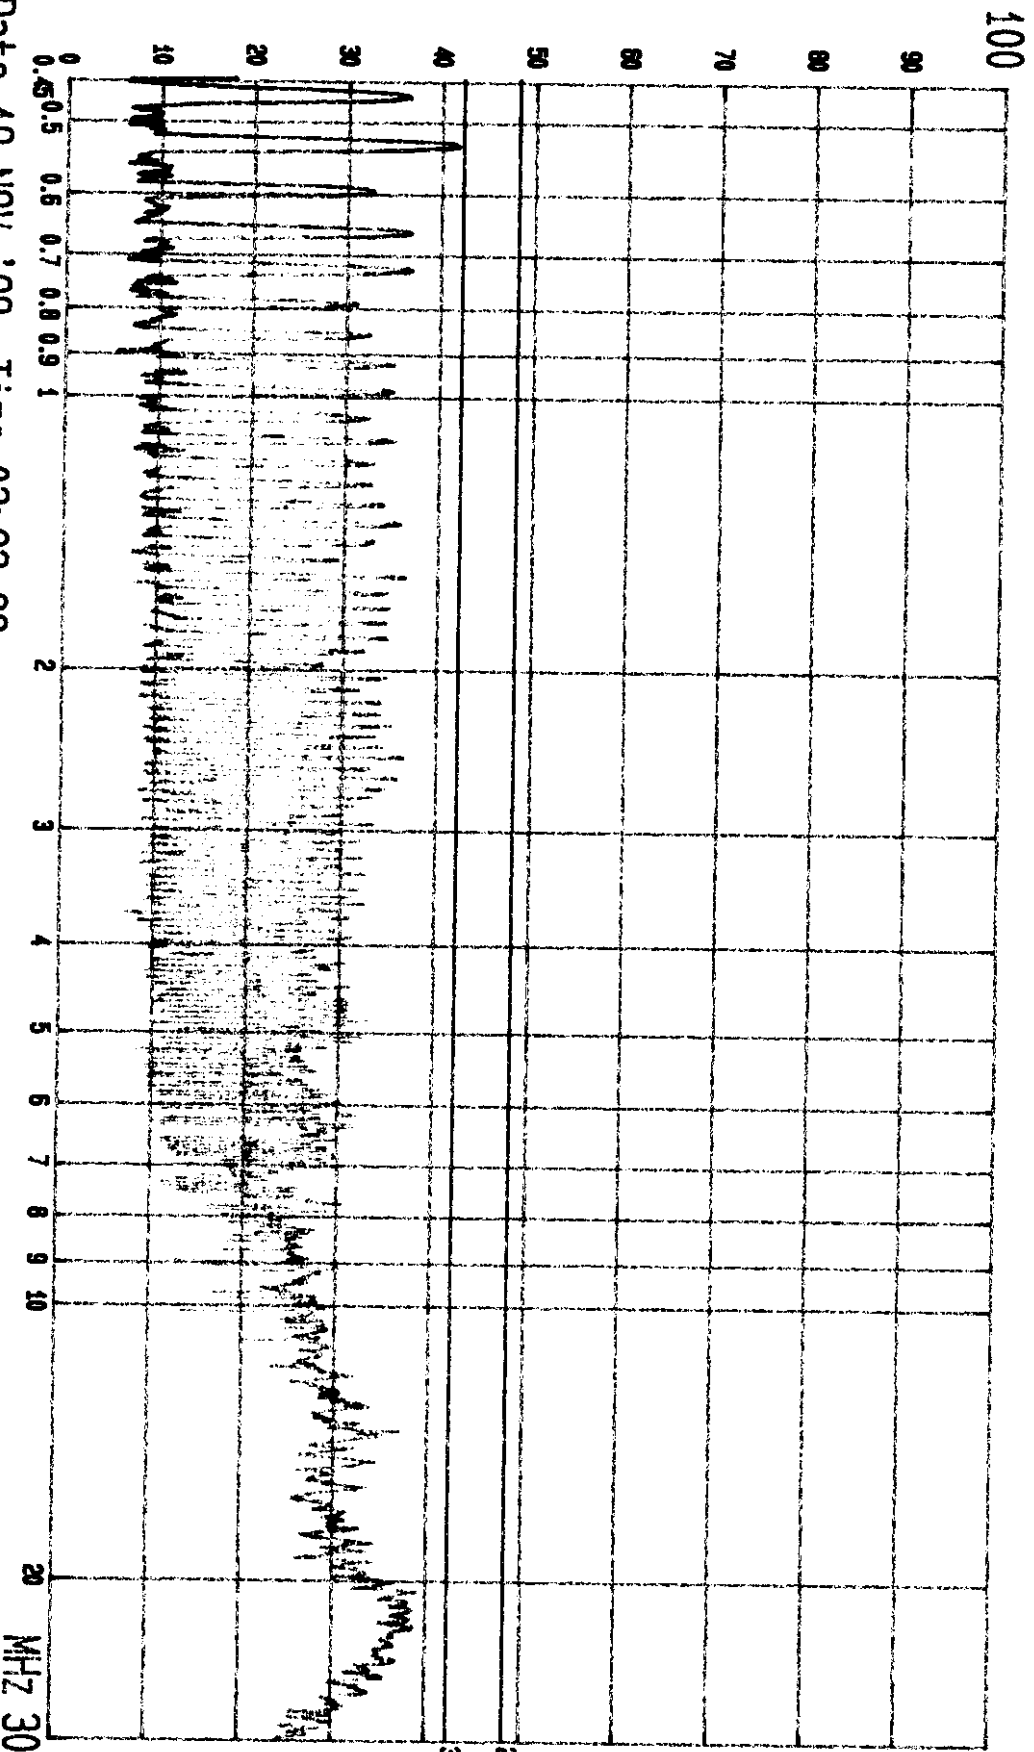

VIEW SONIC
LINE: VB.

Date 19.NOV.'98

Time 03:23:22

VIEW SONIC

EUT: MONITOR

MENO: (1280X1024; 66KHz)

EUT 10 LISN


M/N: VCDTS21403-2*

(PEAK VALUE) TTEM.C.

PAGE: 010.

dBuV


100

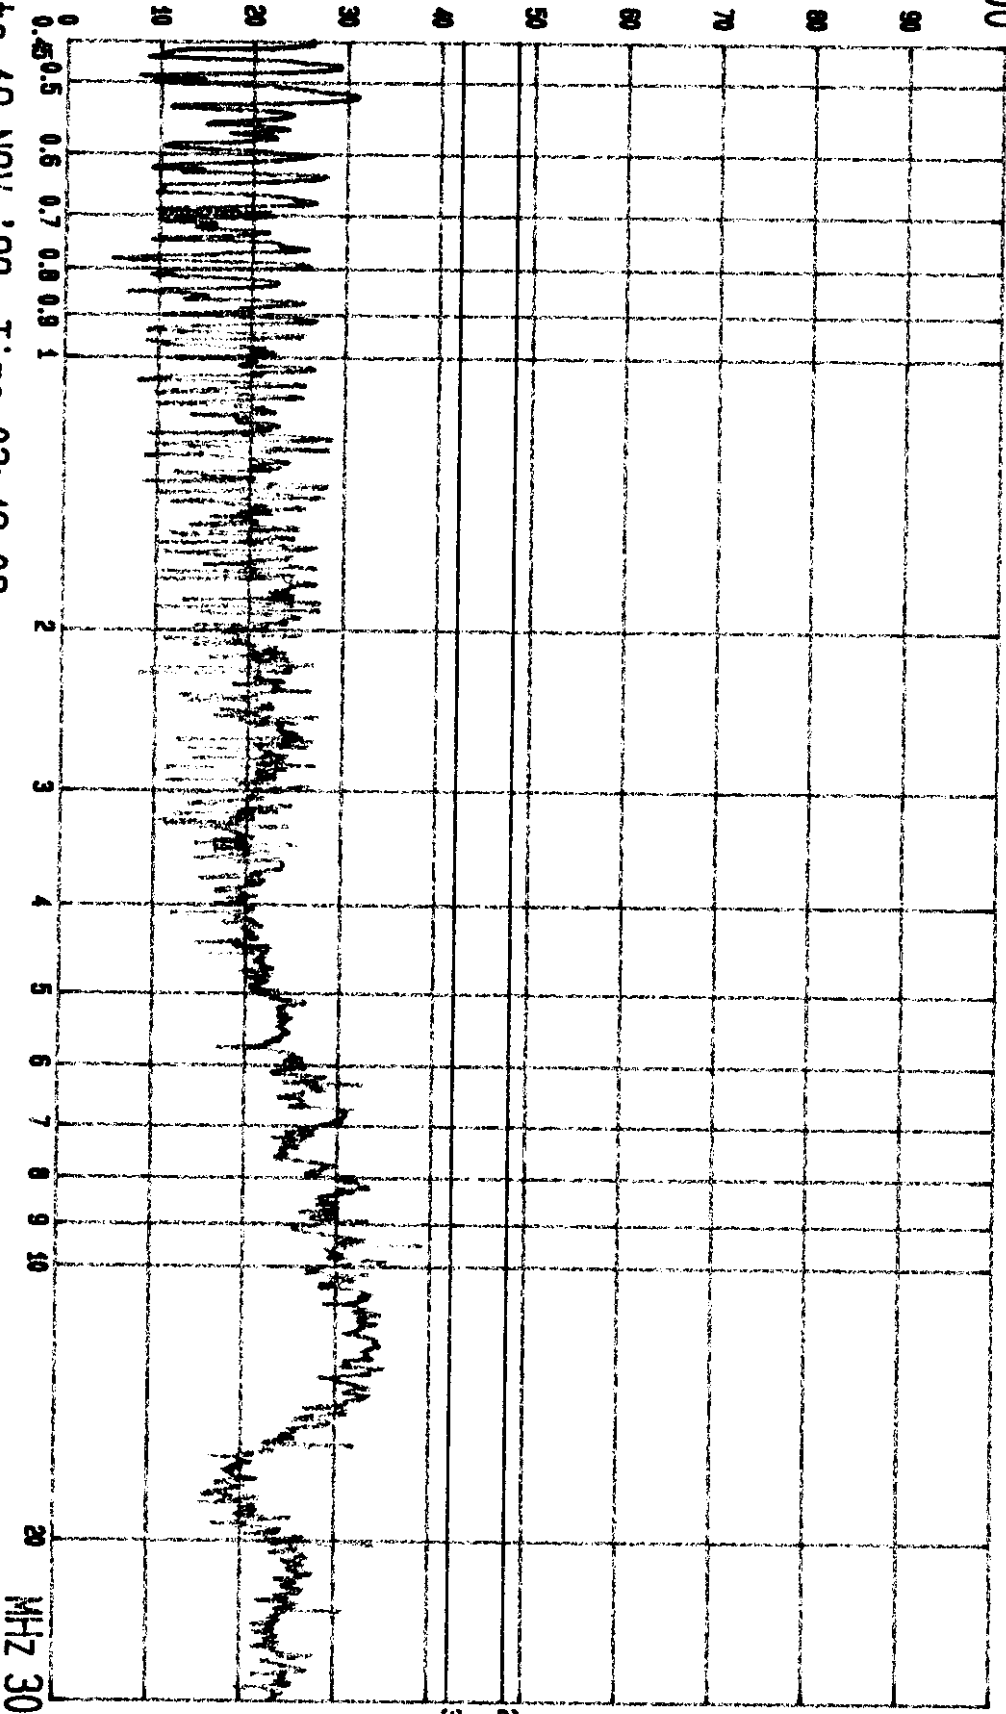

--- Date 19.NOV.'98 Time 03:42:08
VIEW SONIC EUT: MONITOR
LINE: VA. MEND: (640X480; 31.5KHz) M/N: VCDTS21403-2*
PAGE: 011.
(PEAK VALUE) TTEMC.

dBuV

100

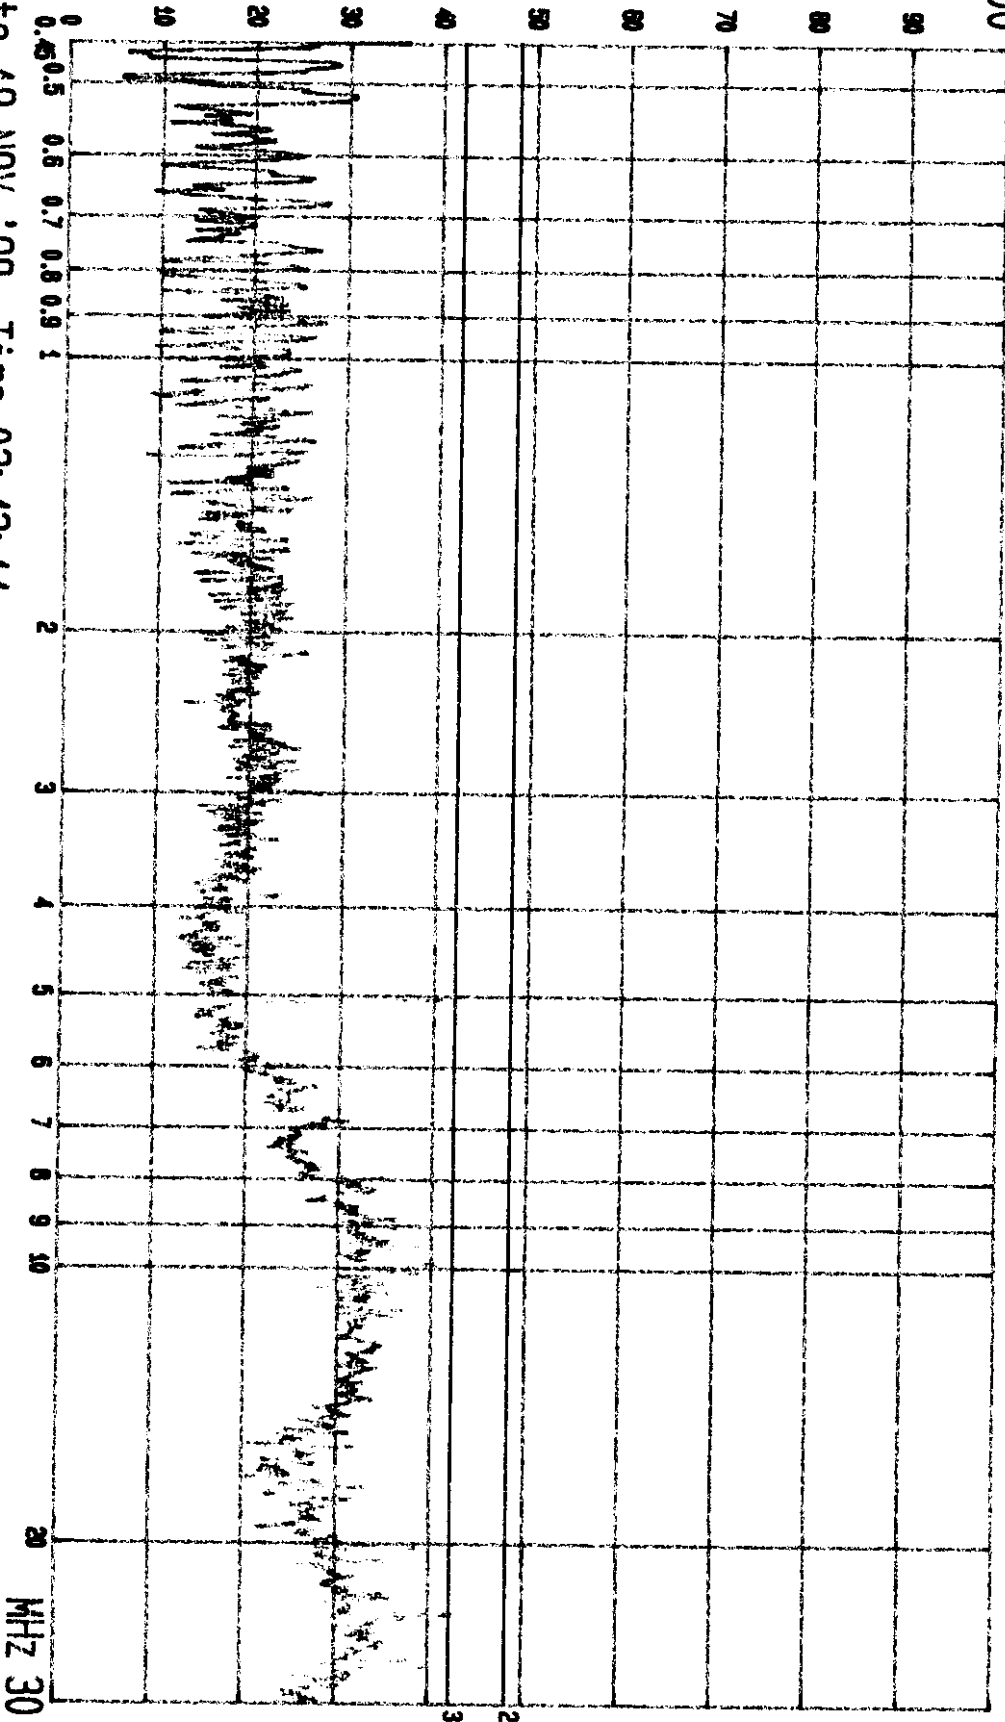

--- Date 19.NOV. '98
VIEW SONIC
LINE: VB.

Time 03:43:11


EUT: MONITOR
MEN0: (640X480; 31.5KHz)

M/N: VCDTS21403-2*
EUT TO PC

PAGE: 012.
(PEAK VALUE) TTEMC.

dBuV

100

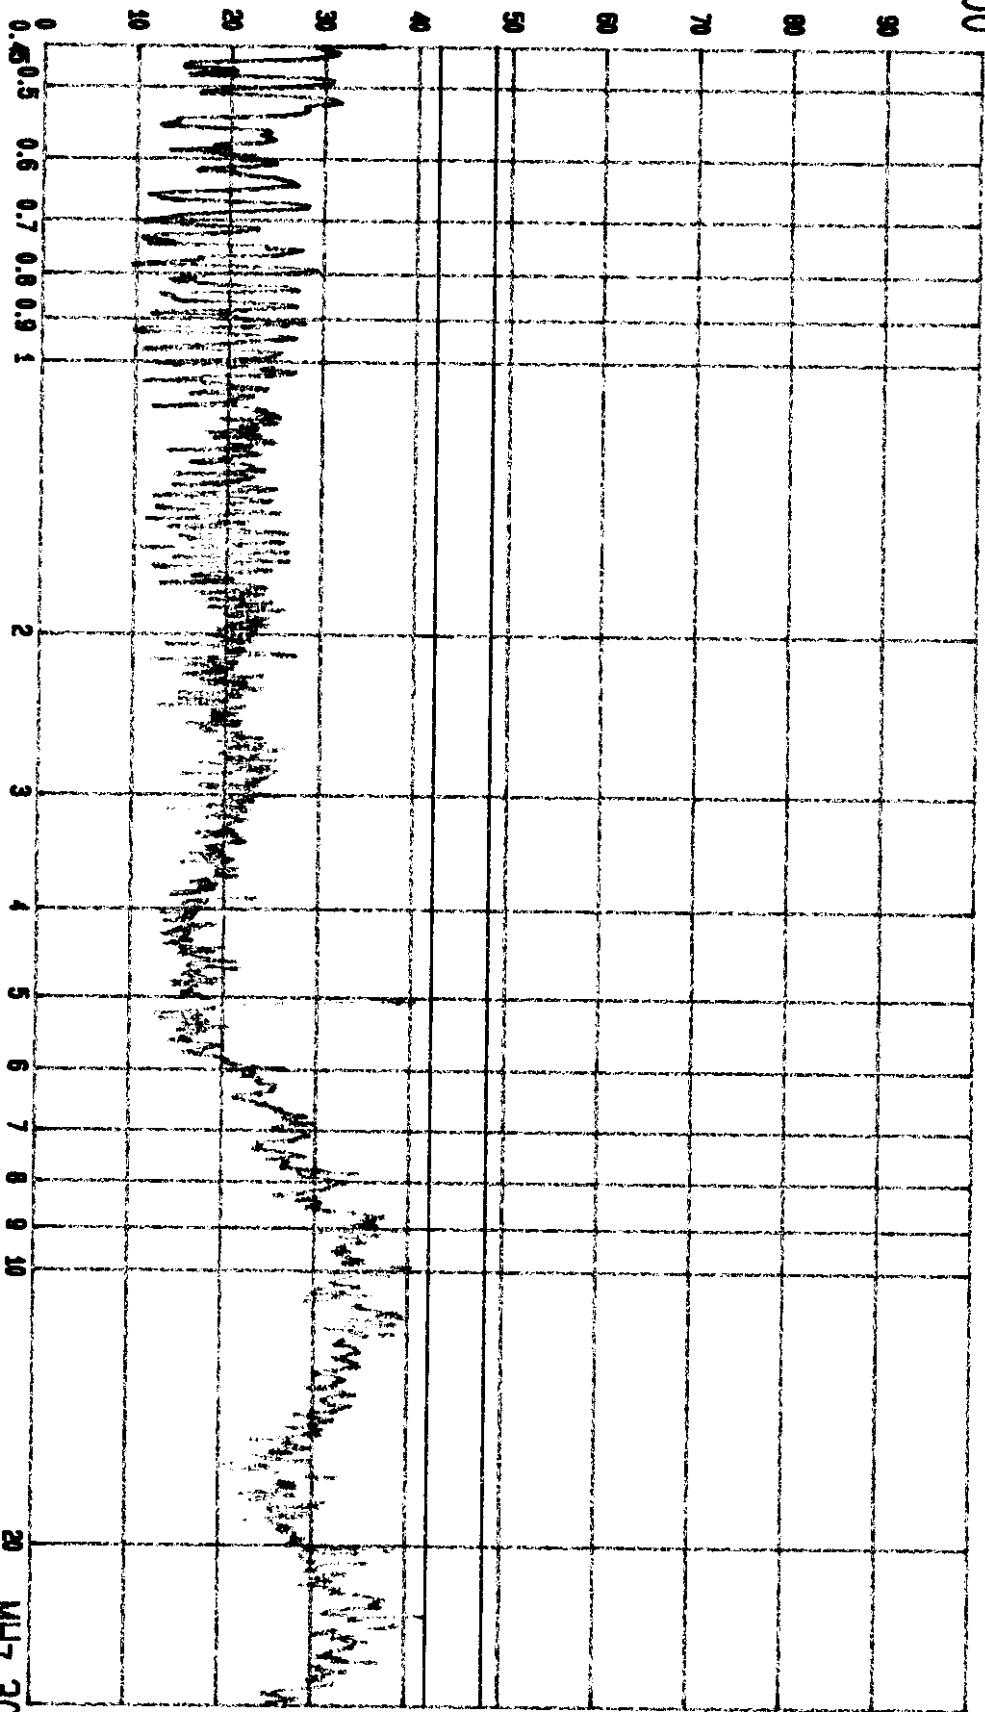

VIEW SONIC
LINE: VA.

Date 19.NOV.'98 Time 03:40:43


EUT: MONITOR
MENO: (640X480; 37.9KHz)

M/N: VCDTS21403-2*
EUT TO PC

PAGE: 010.
(PEAK VALUE) TTEMC.

dBuV

100

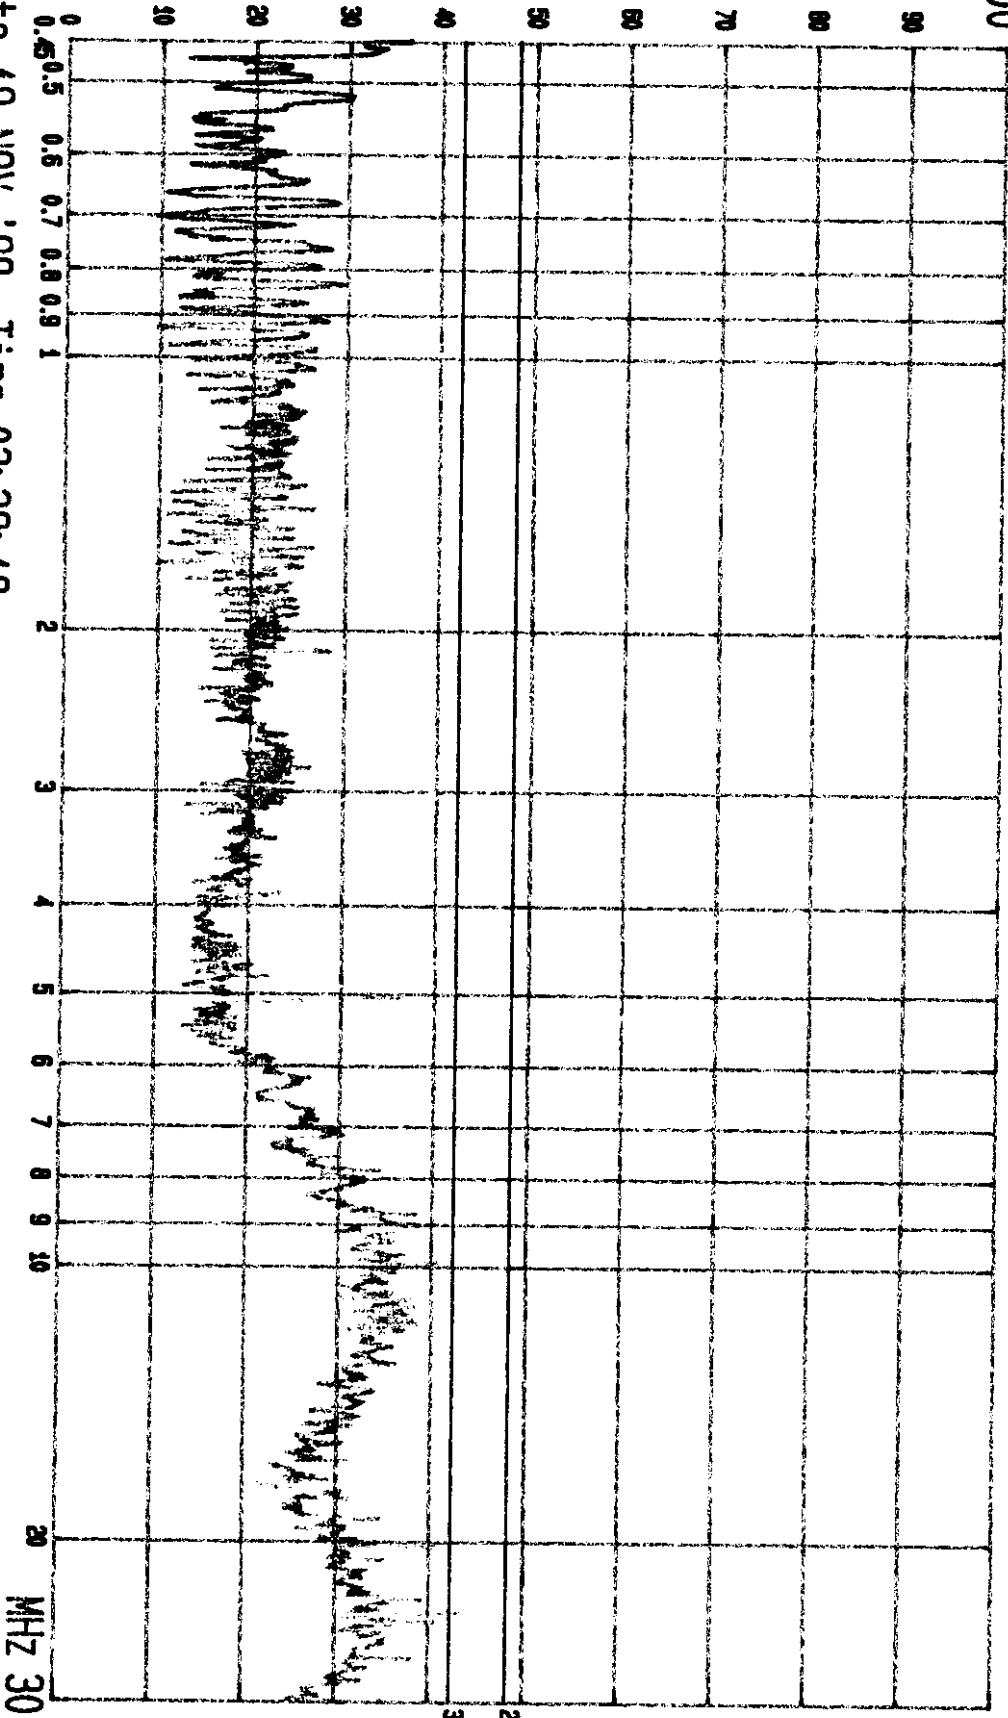

VIEW SONIC
LINE: VB.

Date 19.NOV.'98 Time 03:39:18


EUT: MONITOR
MEND: (640X480; 37.9KHz)

M/N: VCDTS21403-2x
EUT TO PC

PAGE: 009.
(PEAK VALUE) TTEMC.

dBuV

100

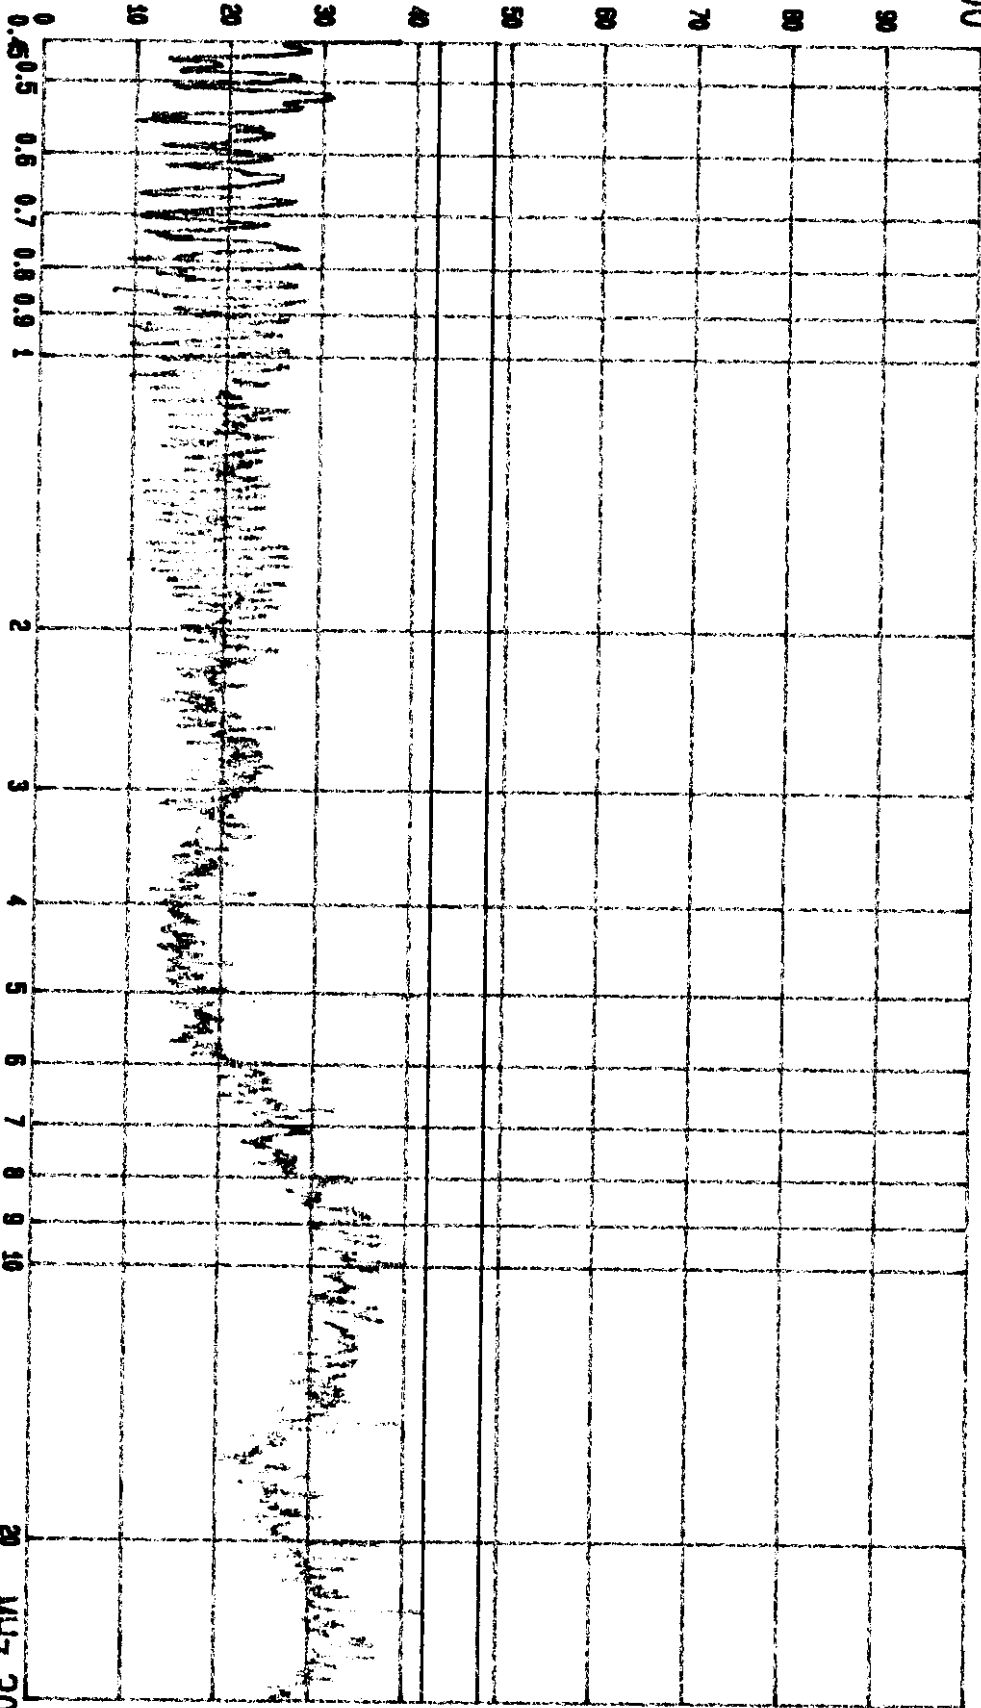

--- Date 19.NOV.'98
VIEW SONIC
LINE: VA.


Time 03:45:21

EUT: MONITOR
MENO: (800X600; 37.9KHz)

M/N: VCDTS21403-2*
EUT 10 PC

PAGE: 014.
(PEAK VALUE) TTEMC.

dBuV

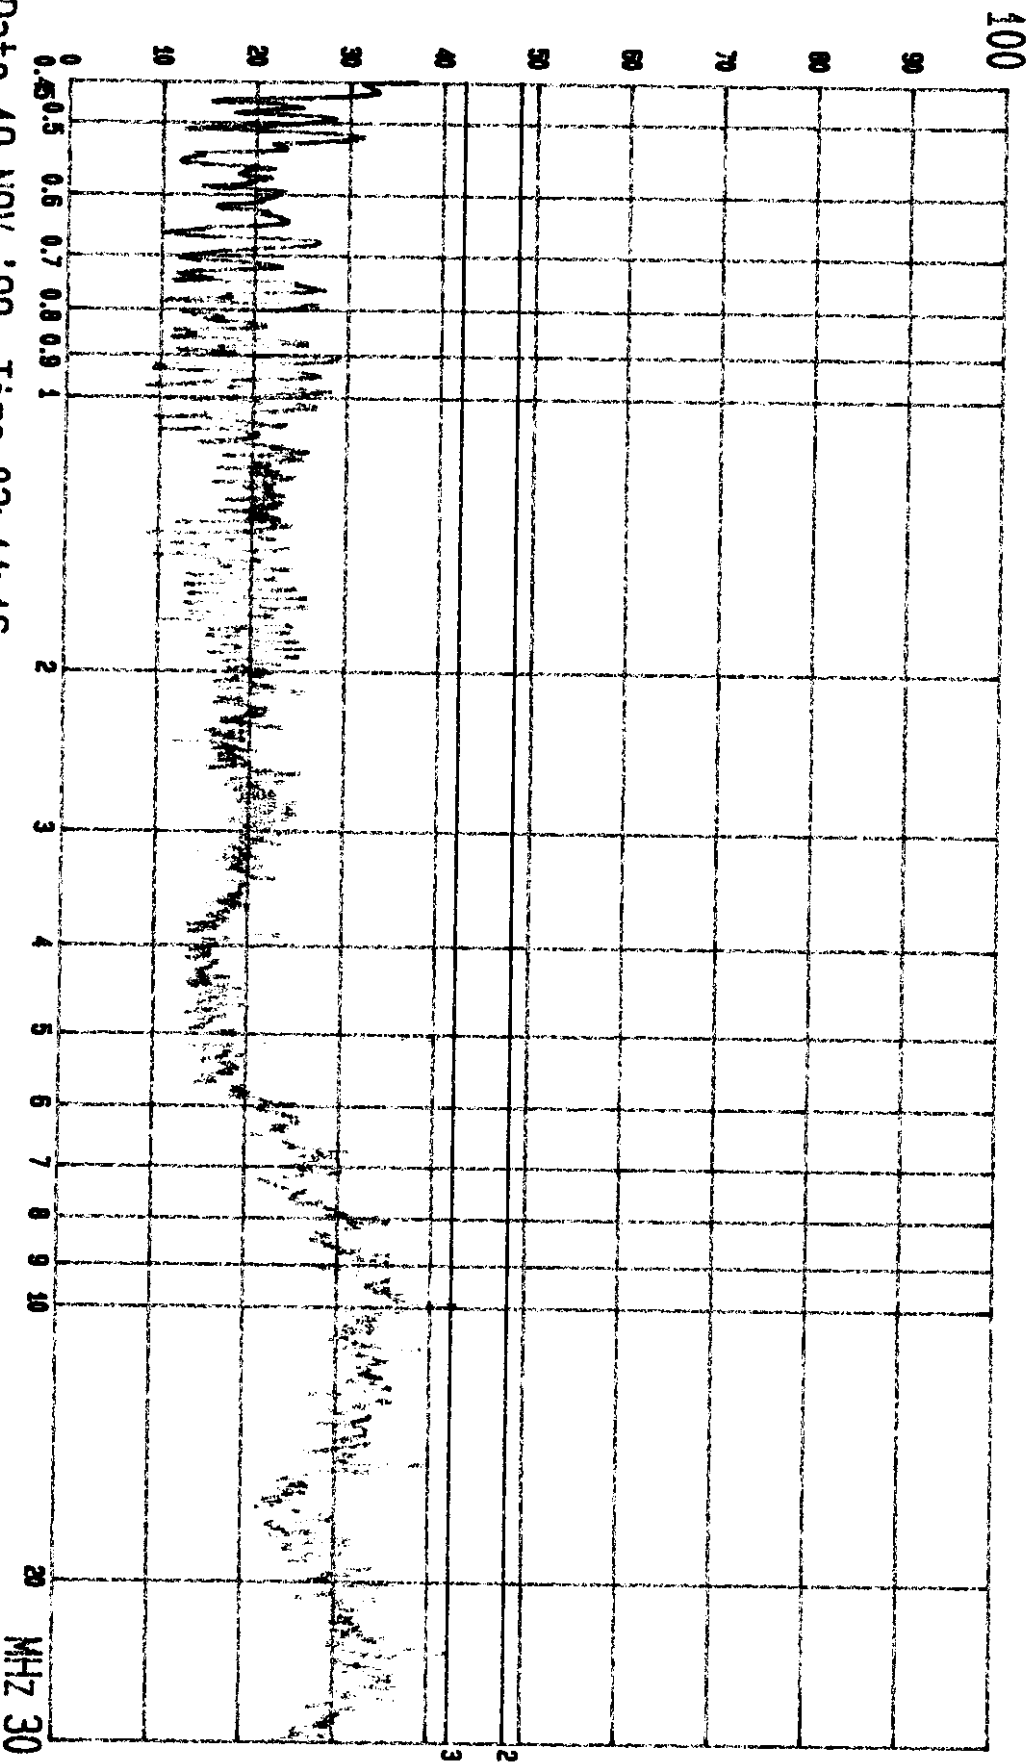

--- Date 19.NOV. '98
VIEW SONIC
LINE: VB.


Time 03:44:16
EUT: MONITOR
MENO: (800X600; 37.9KHz)

M/N: VCDTS21403-2*
EUT TO PC

PAGE: 013.
(PEAK VALUE) ITEM C.

dBuV


100

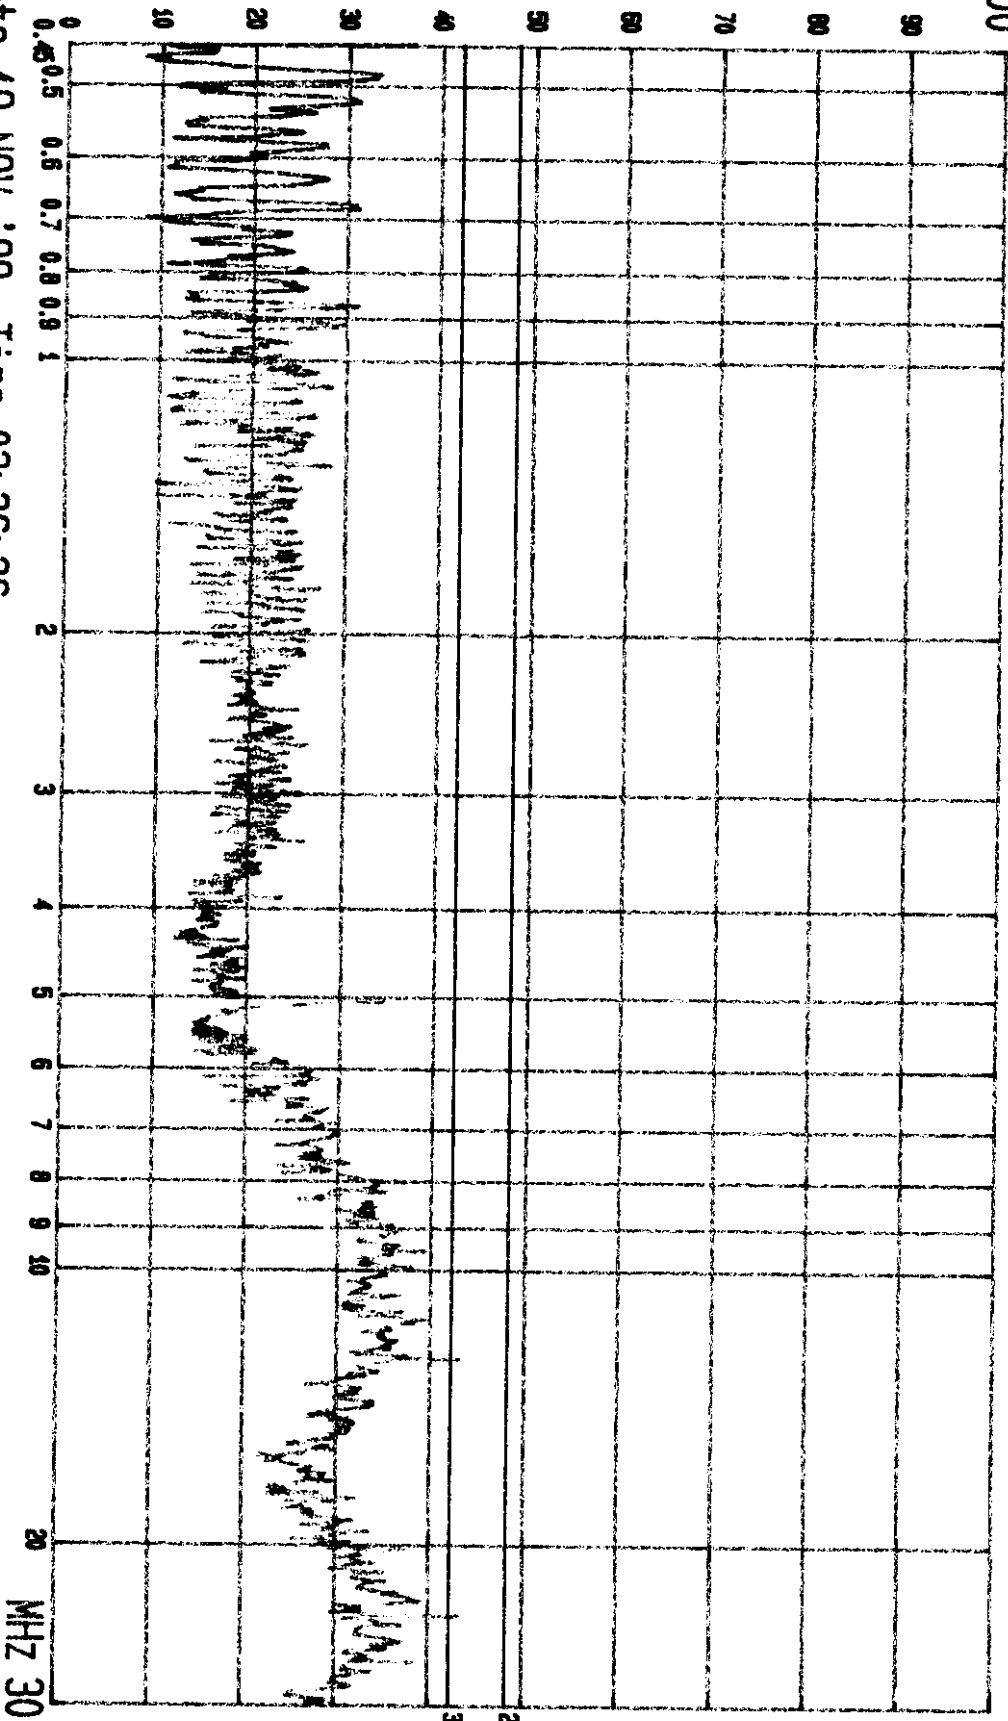

--- Date 19.NOV.'98 Time 03:36:36
VIEW SONIC EUT: MONITOR
LINE: VA. MEND: (800X600; 48.1KHz) M/N: VCDTS21403-2*
(PEAK VALUE) TTEMC. PAGE: 007.

dBuV


100

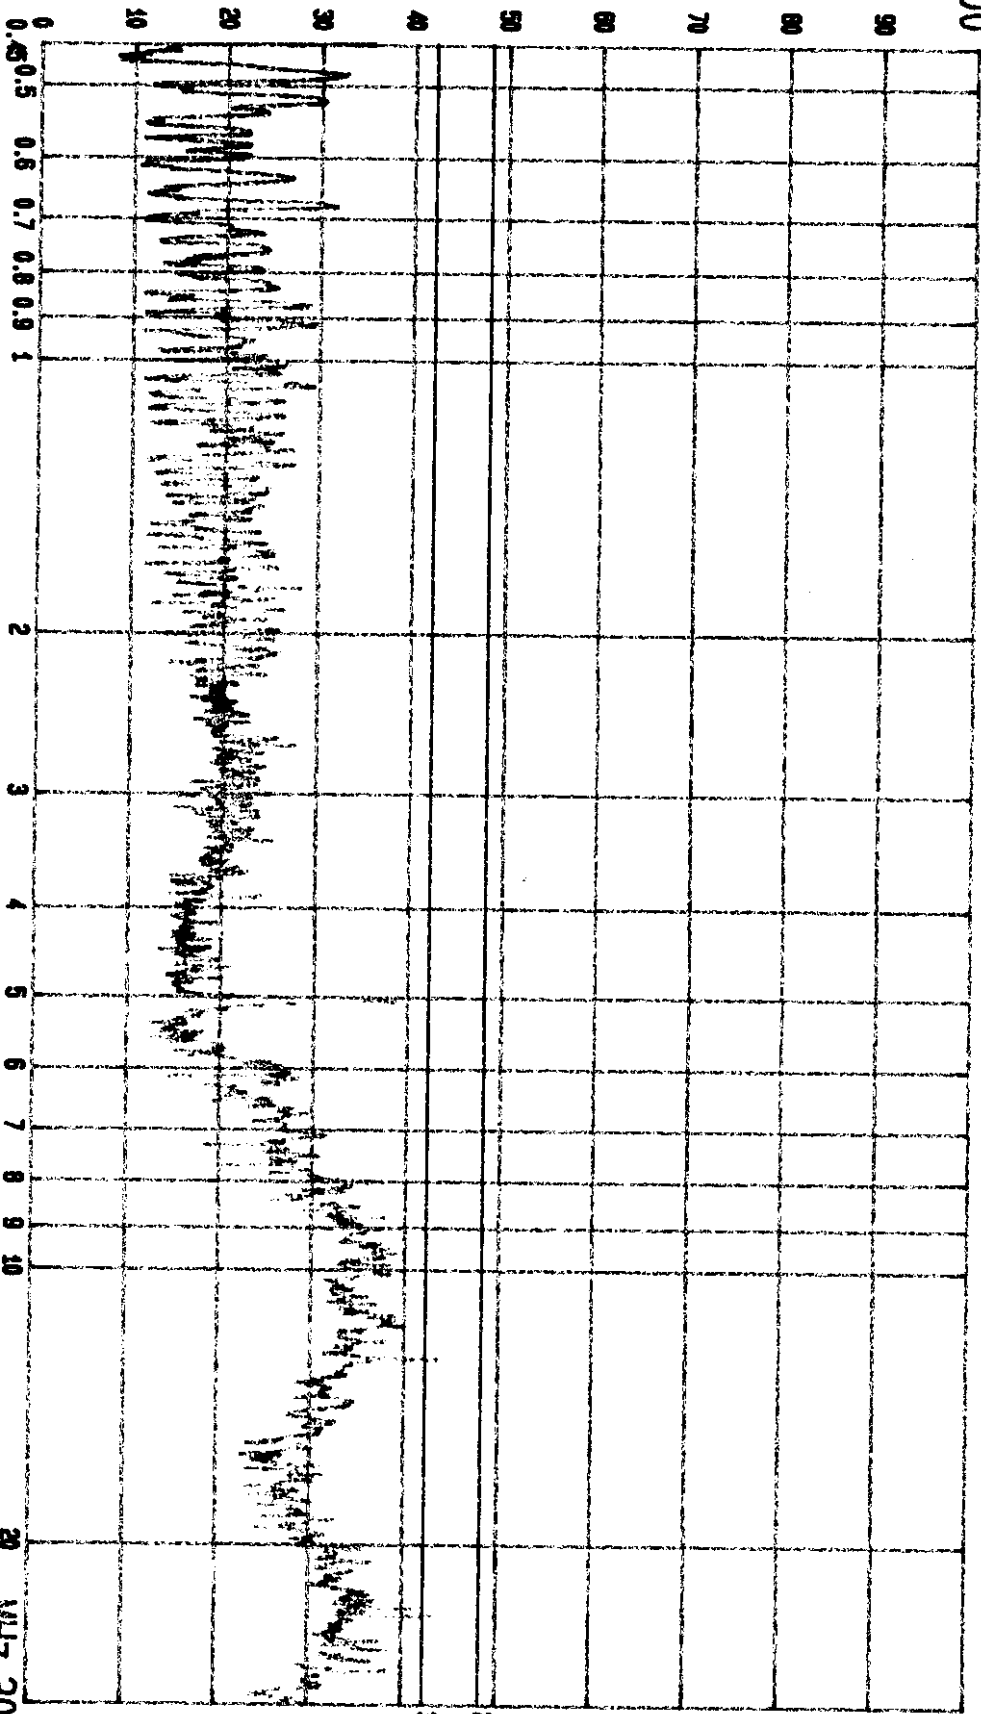

--- Date 19.NOV.'98 Time 03:37:58
VIEW SONIC EUT: MONITOR
LINE: VB. MENO: (800X600; 48.1KHz) M/N: VCDTS21403-2*
PAGE: 008.
(PEAK VALUE) TTEM.C.

dBuV

100

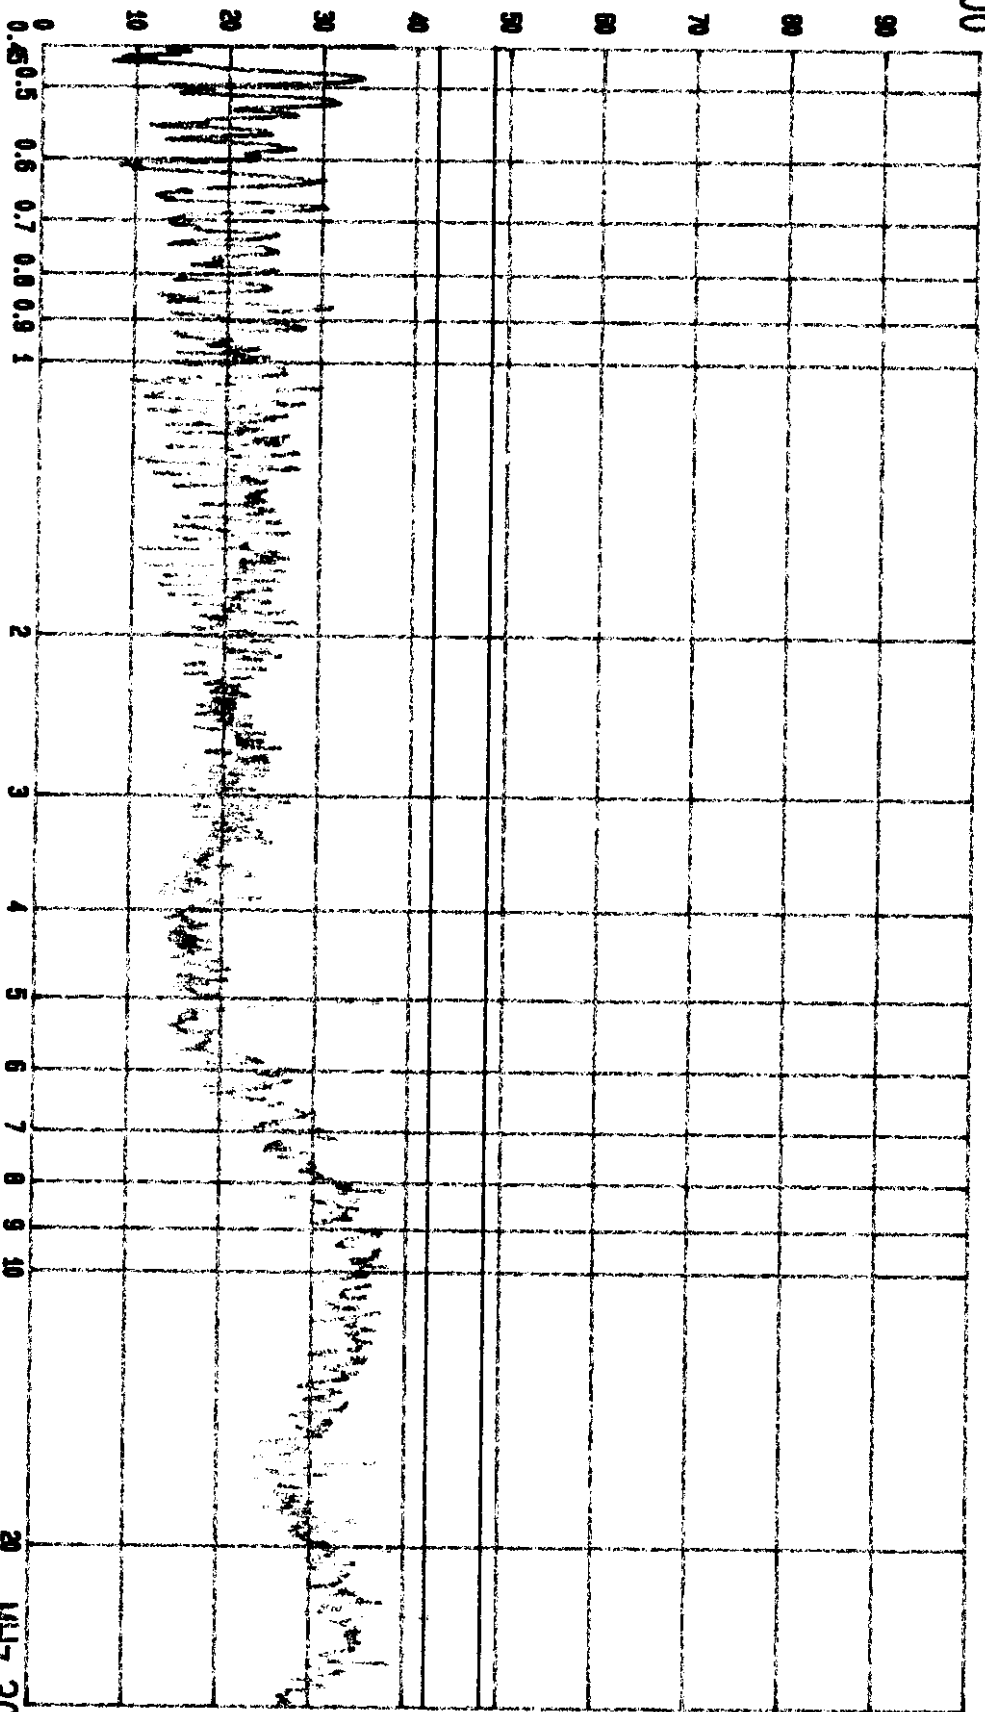


--- Date 19.NOV. '98 Time 03:46:54
VIEW SONIC EUT: MONITOR
LINE: VA. MEND: (1024X768; 48.4KHz) EUT TO PC

M/N: VCDTS21403-2*
PAGE: 015.
(PEAK VALUE) TTEMC.

dBuV


100

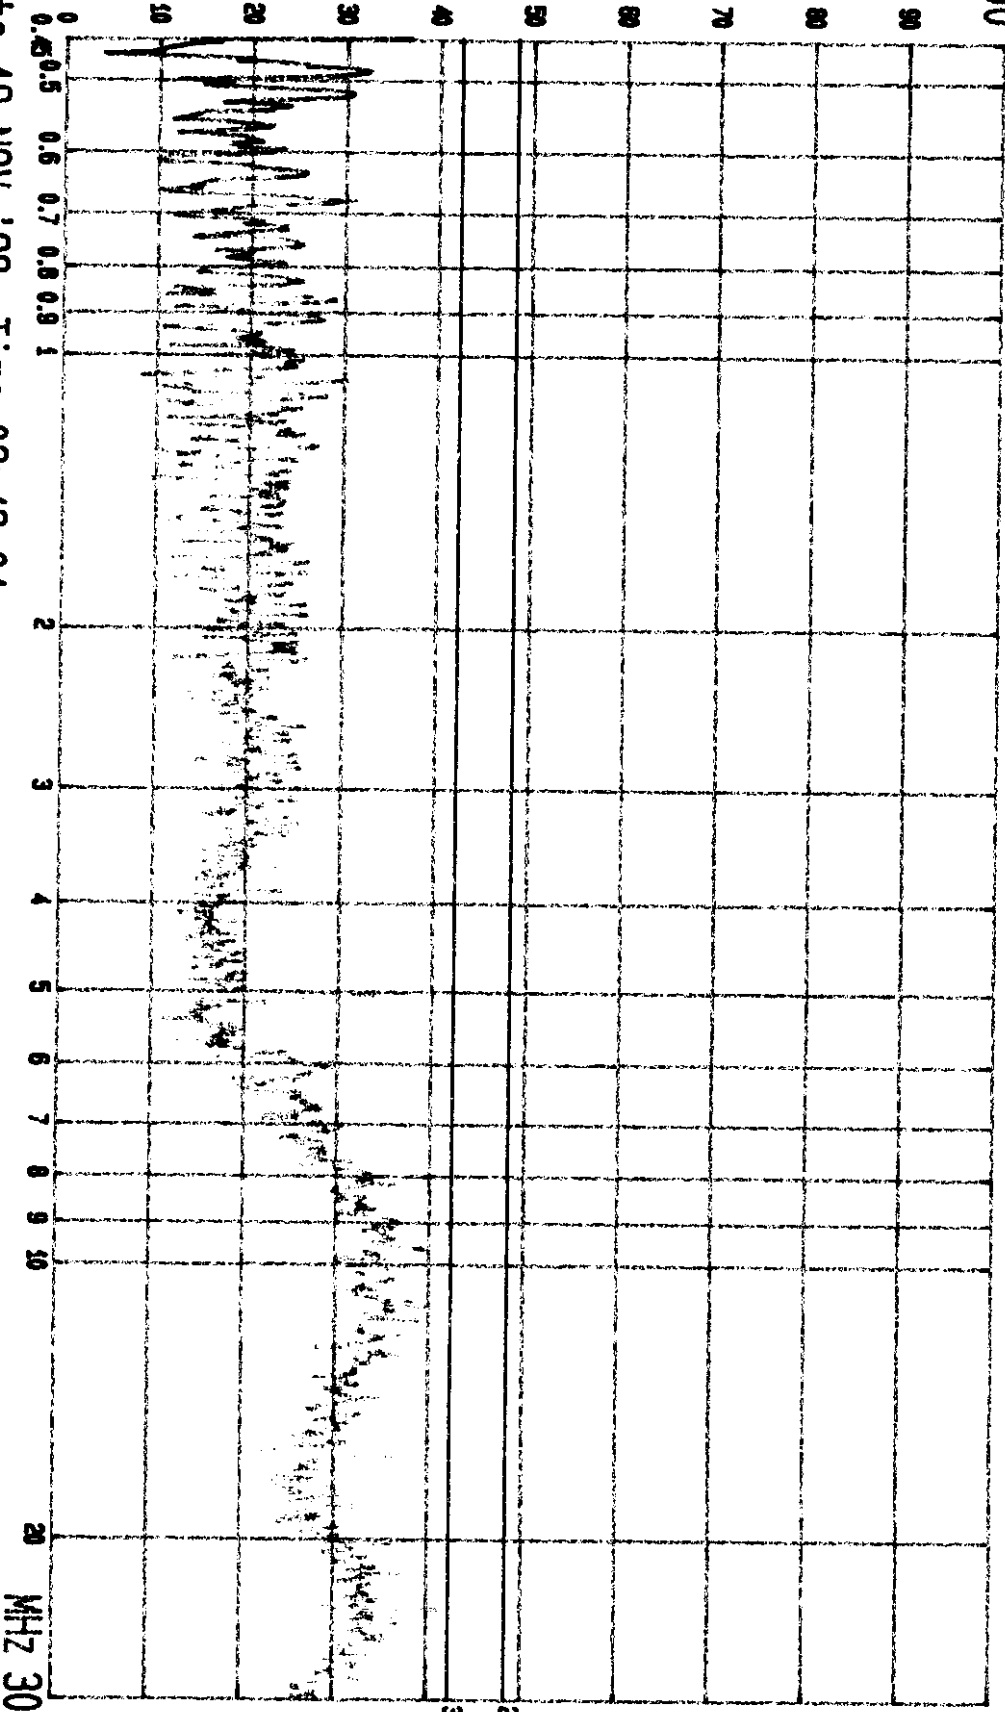

--- Date 19.NOV. '98 Time 03:48:01
VIEW SONIC EUT: MONITOR
LINE: VB. MEND: (1024X768; 48.4KHz) EUT TO PC M/N: VCDTS21403-2*
PAGE: 016.
(PEAK VALUE) TTEM.C.

dBuV

100

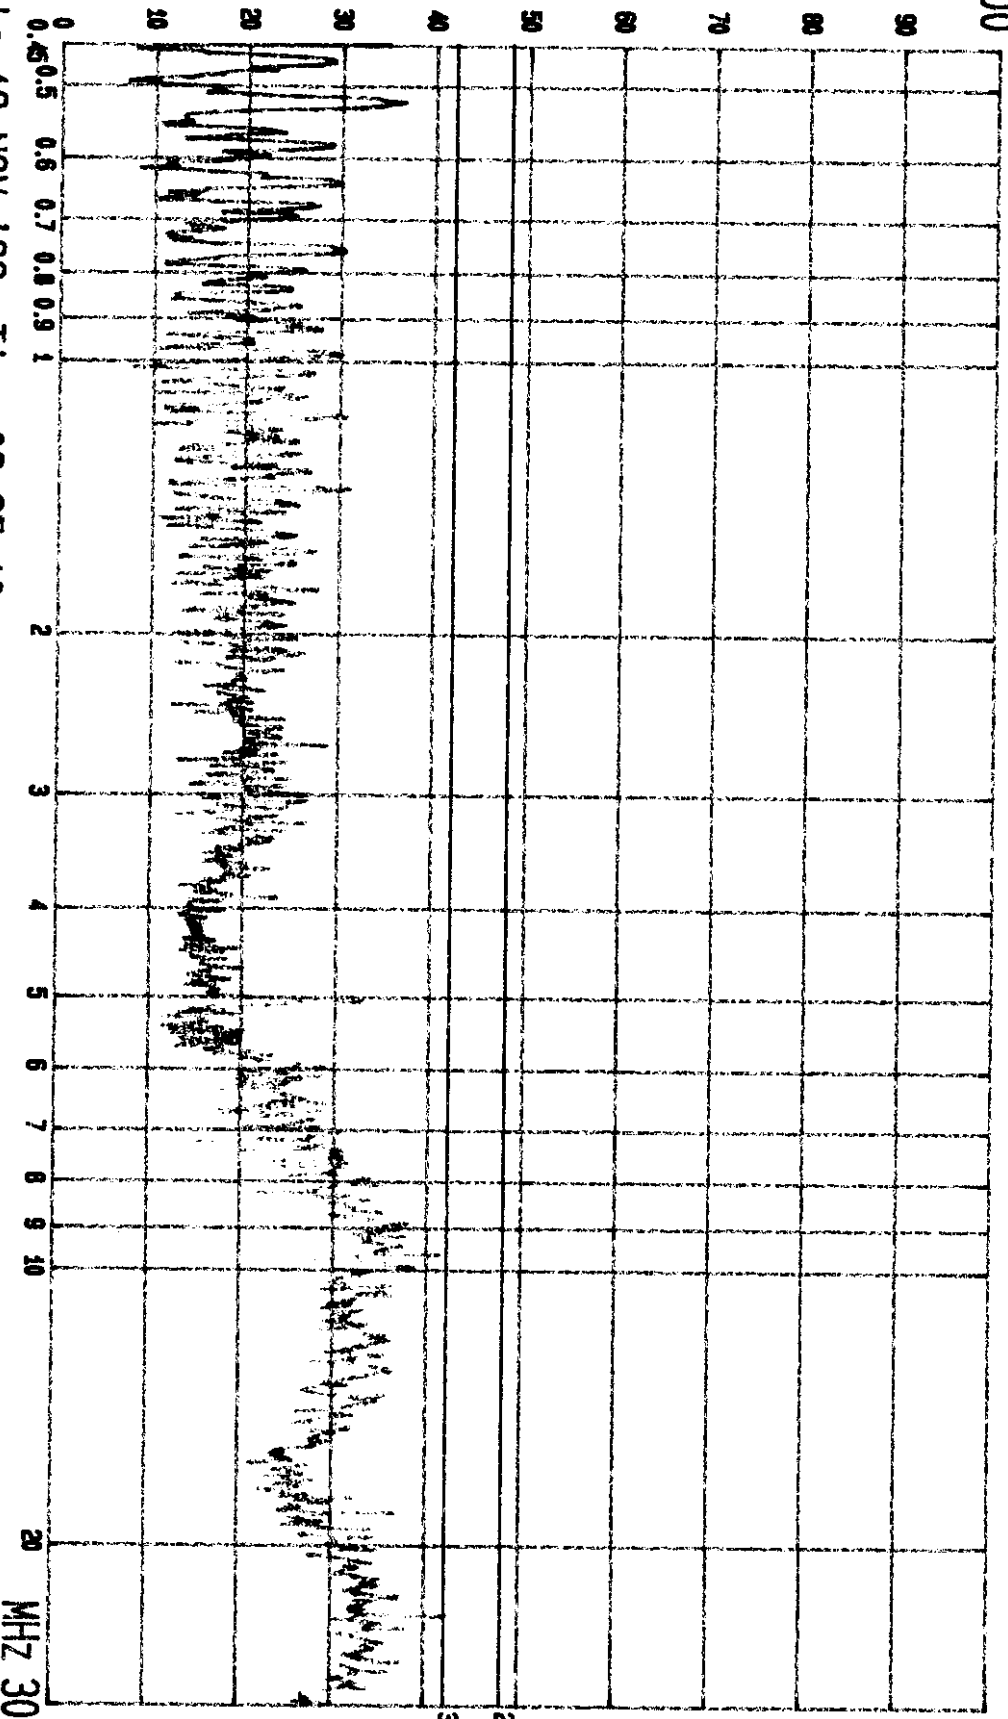

VIEW SONIC
LINE: VA.

Date 19.NOV.'98

Time 03:35:10

EUT: MONITOR

MENO: (1024X758; 58KHz)

EUT TO PC


M/N: VCDTS21403-2*

(PEAK VALUE) TTEMC.

PAGE: 006.

dBuV

100

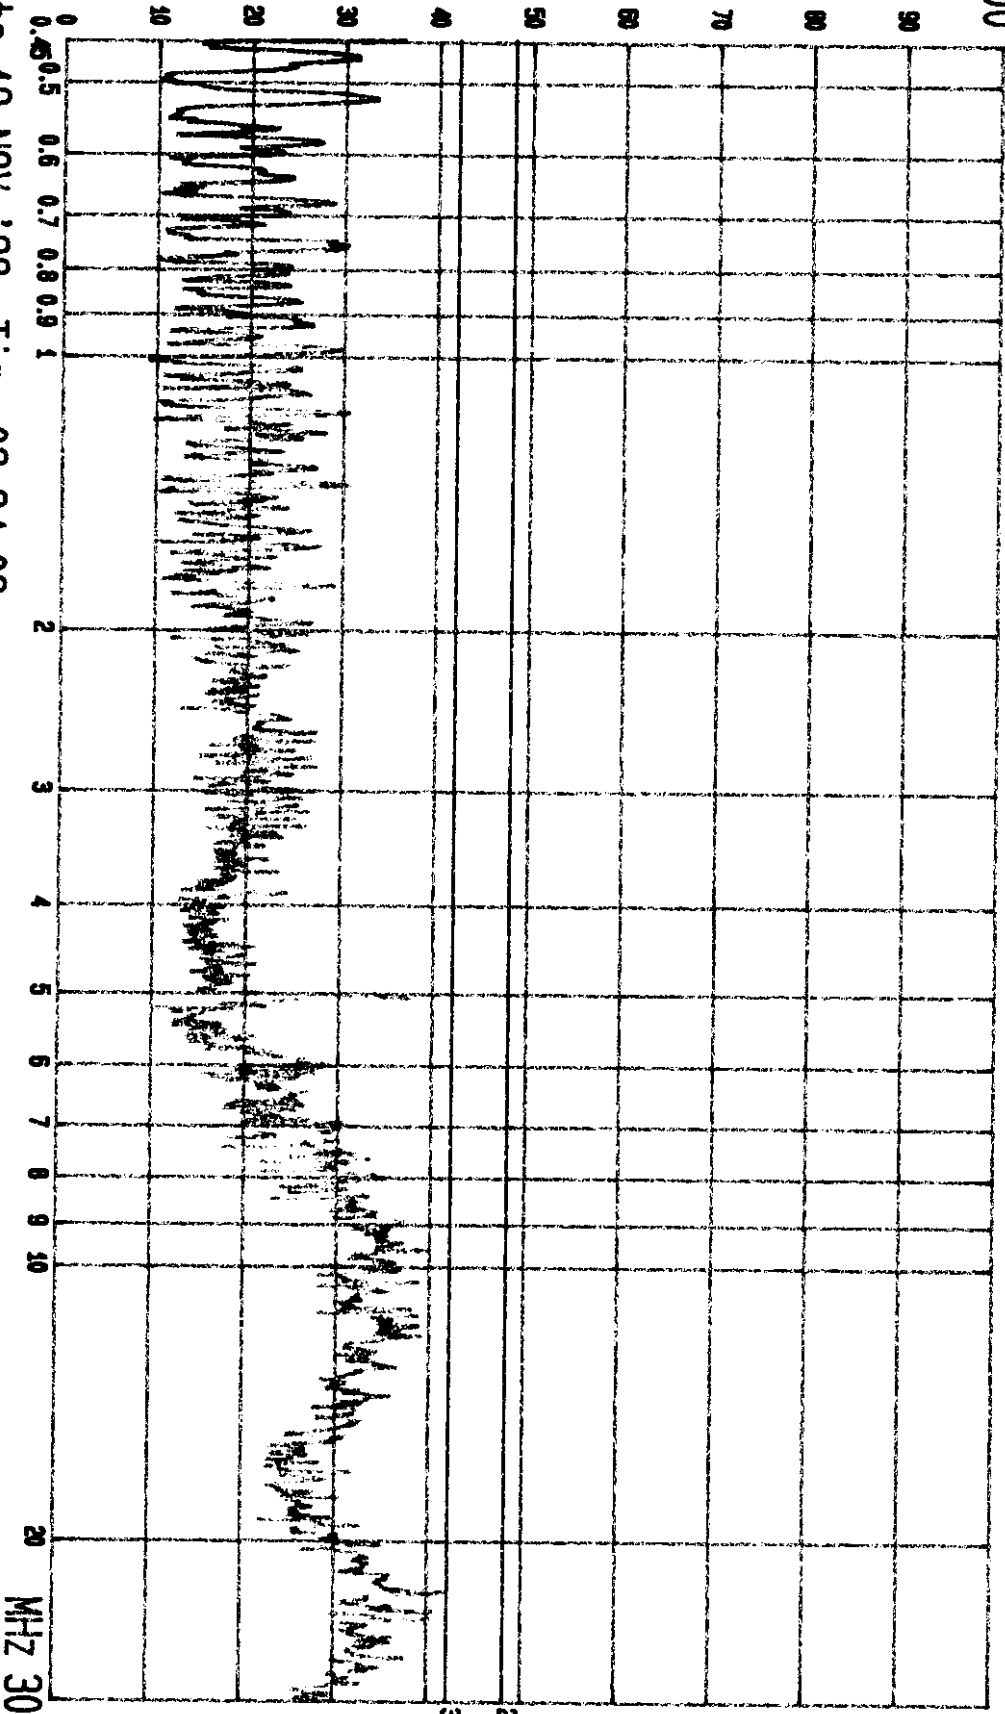

VIEW SONIC
LINE: VB.

Date 19.NOV.'98


Time 03:34:03

EUT: MONITOR
MENO: (1024X758; 58KHz)

M/N: VCDTS21403-2*
EUT 10 PC

PAGE: 005.
(PEAK VALUE) TTEM.C.

dBuV

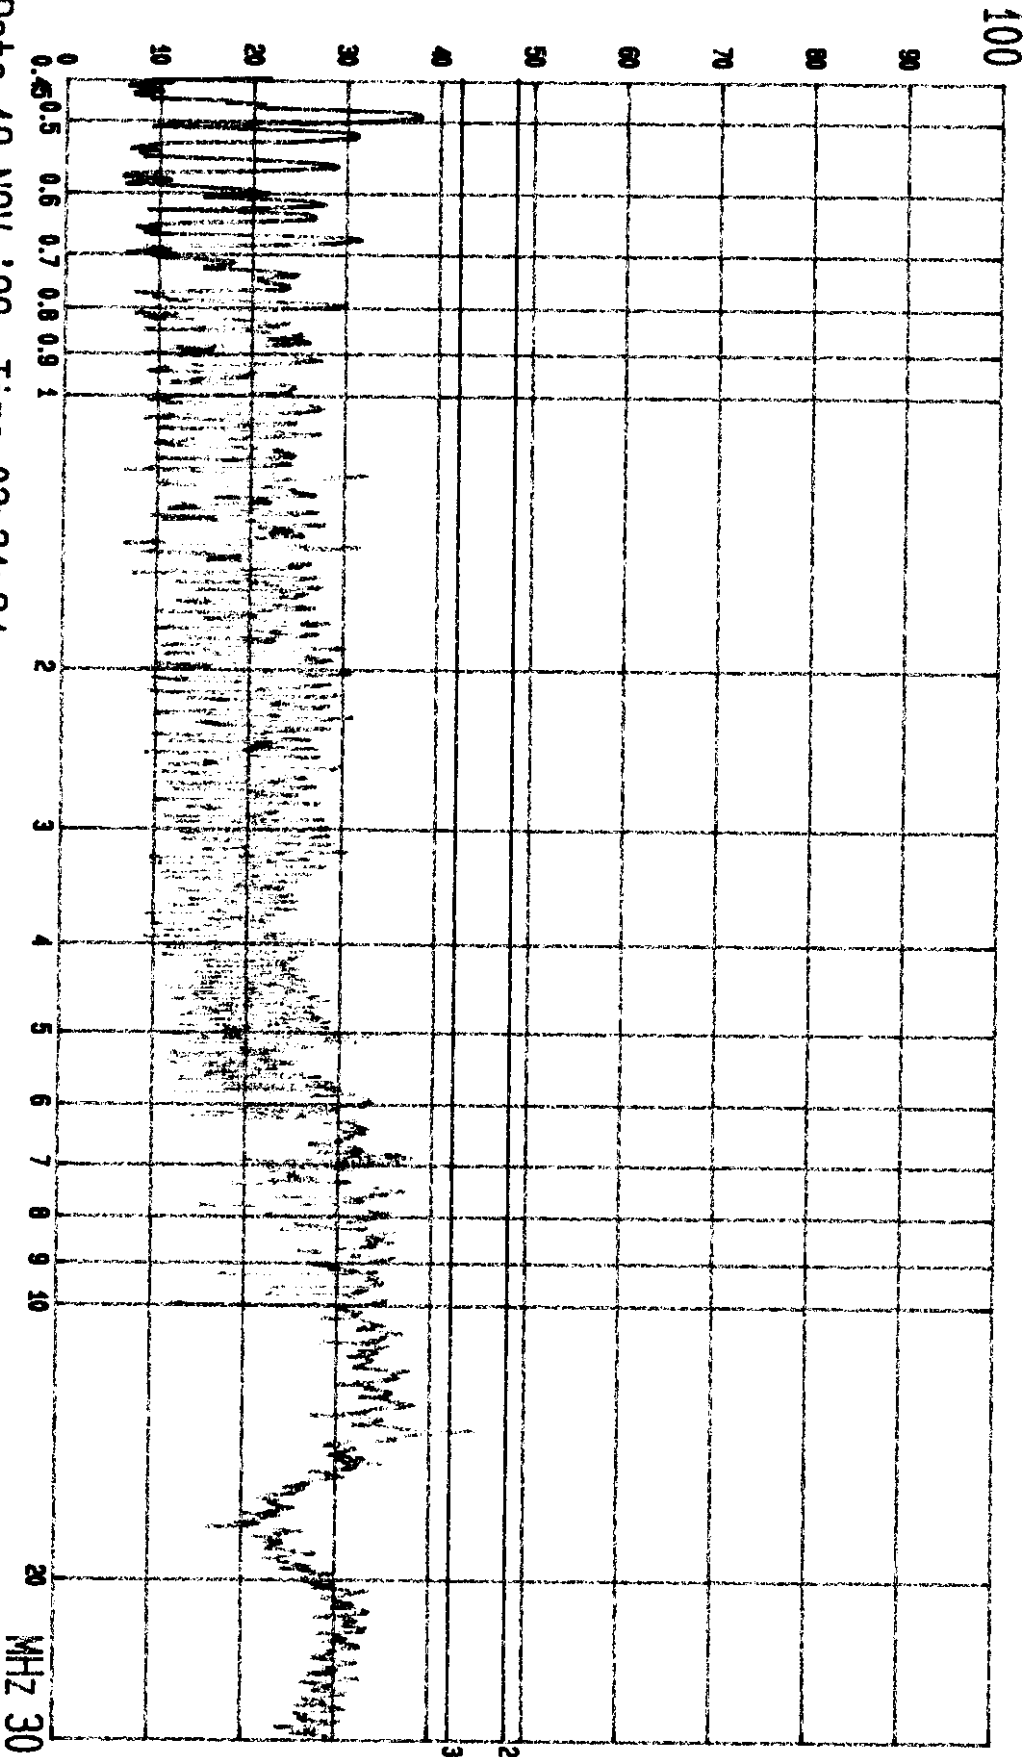

--- Date 19.NOV.'98 Time 03:31:34
VIEW SONIC EUT: MONITOR
LINE: VA. MEND: (1280X960; 61, 6KHz) EUT TO PC
M/N: VCDTS21403-2*
PAGE: 003.
(PEAK VALUE) TTEM.C.

dBuV

100

90

80

70

60

50


40

30

20

10

0

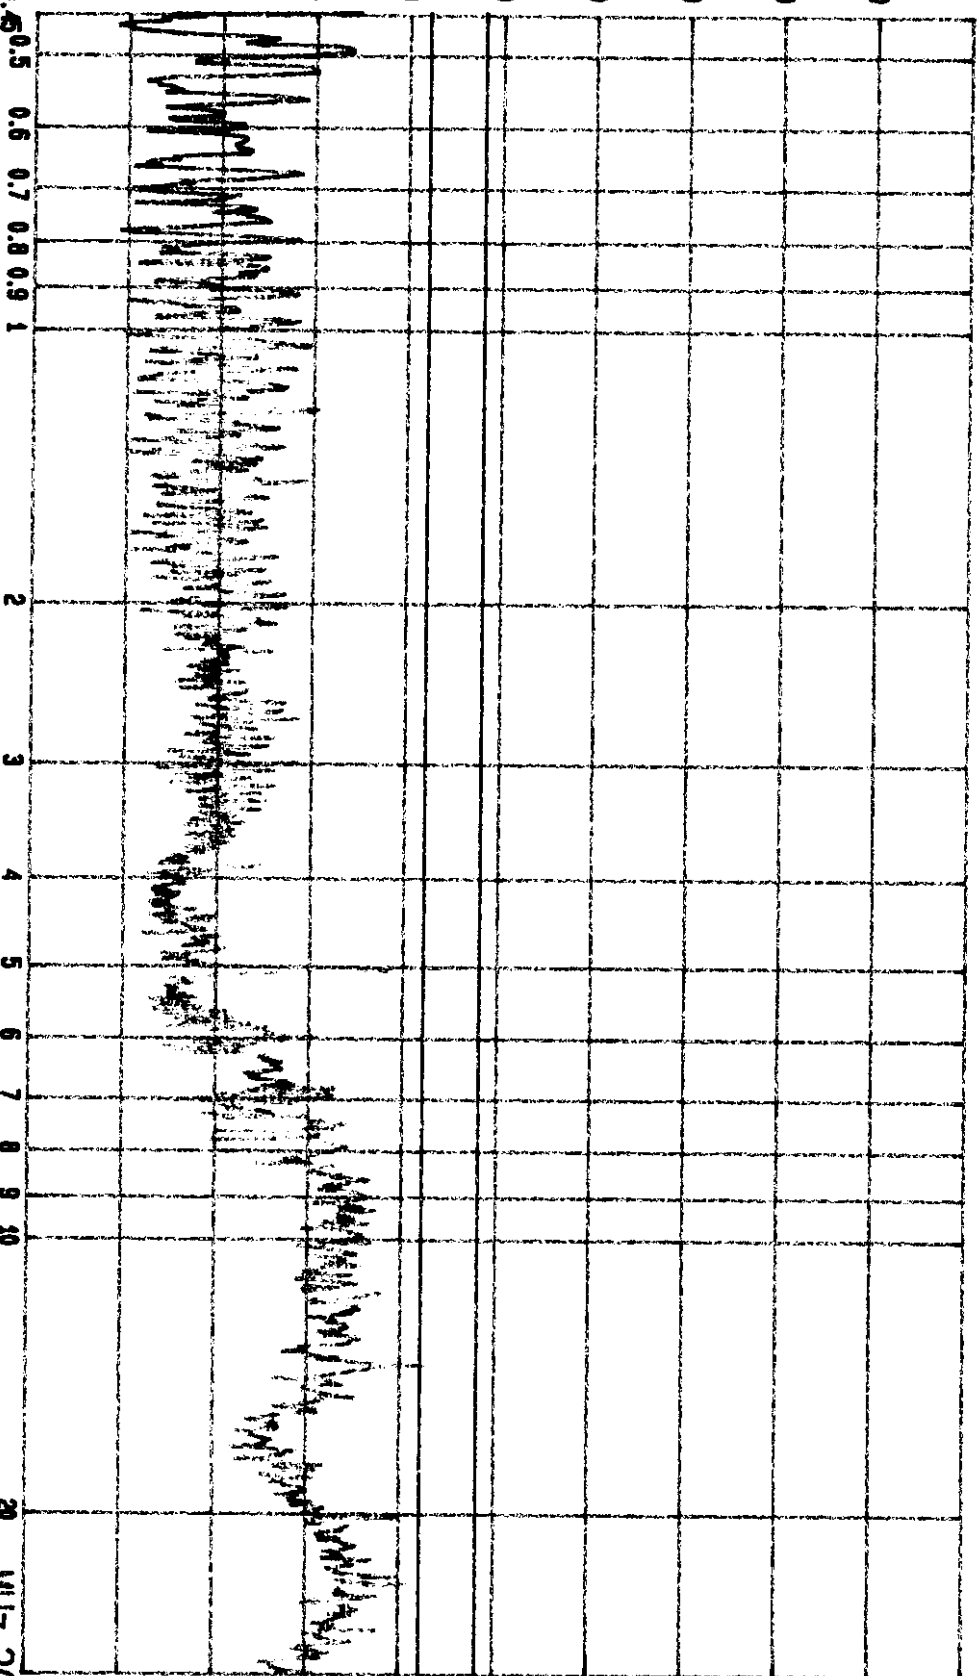

Date 19.NOV.'98 Time 03:32:52

VIEW SONIC

LINE: VB.

EUT: MONITOR

MEND: (1280X960; 61, 6KHz) EUT TO PC


M/N: VCDTS21403-2*

PAGE: 004.

(PEAK VALUE) ITEM: C.

dBuV

100

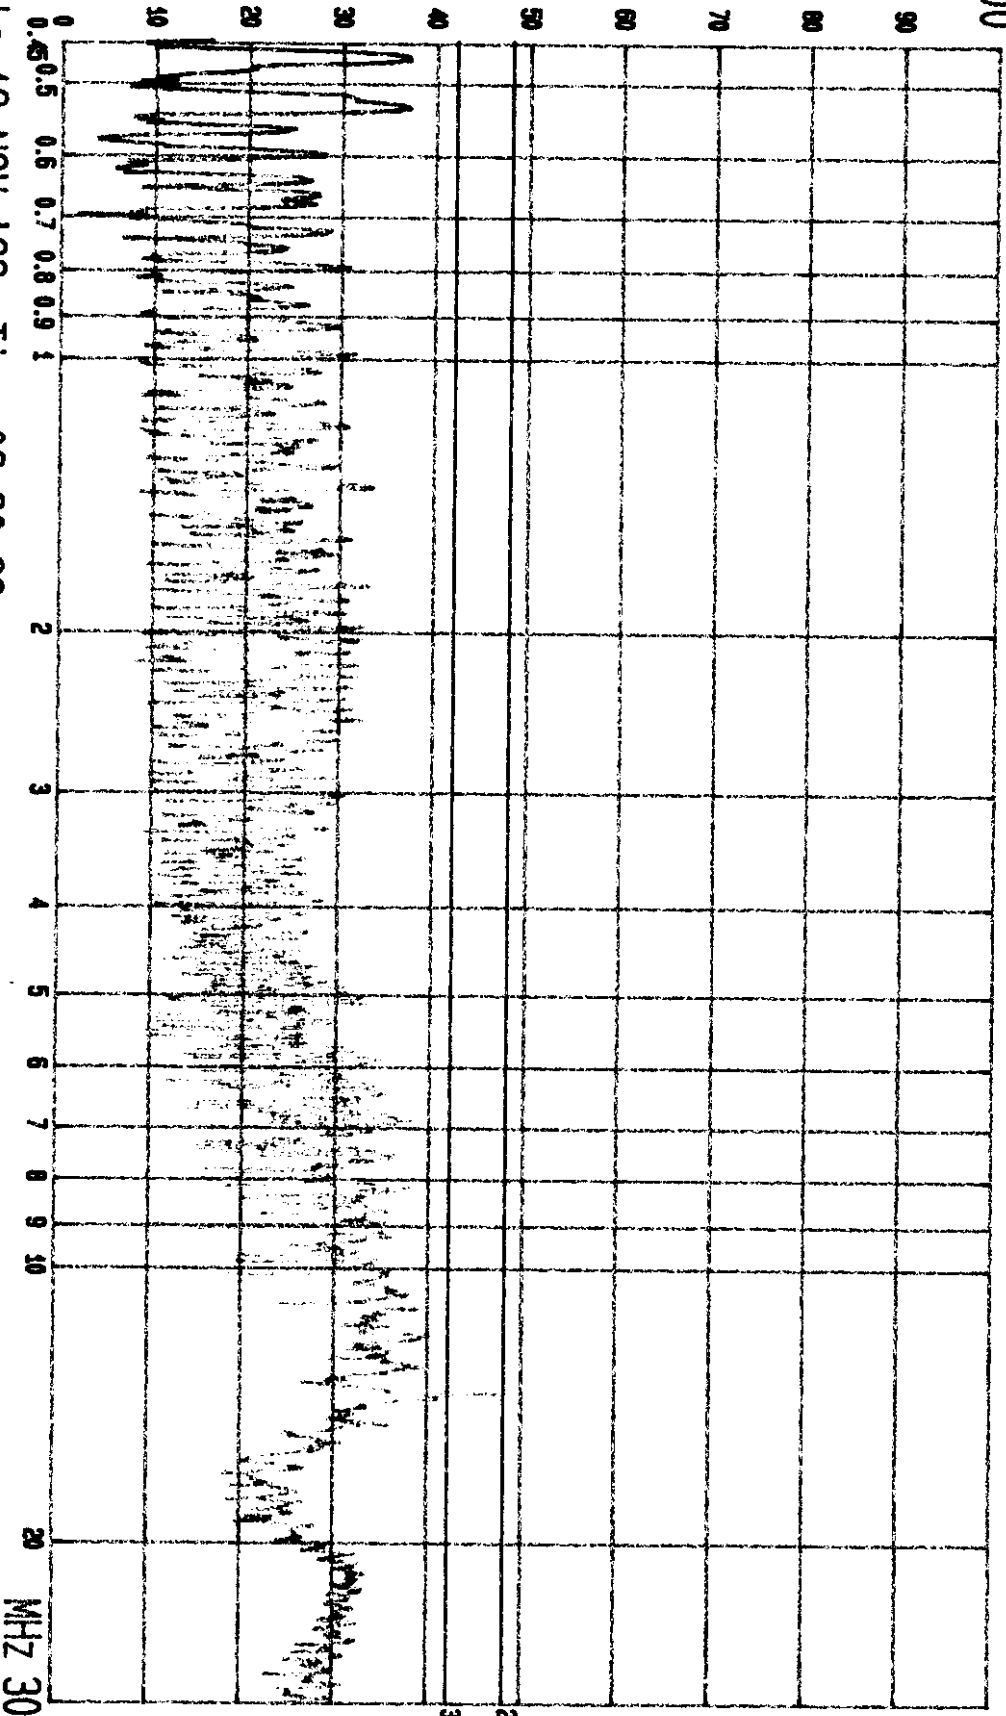


--- Date 19.NOV. '98
VIEW SONIC
LINE: VA.

Time 03:30:23
EUT: MONITOR
MENO: (1280X1024; 66KHz)

M/N: VCDTS21403-2*
EUT 10 PC
(PEAK VALUE)

PAGE: 002.
ITEMC.

dBuV

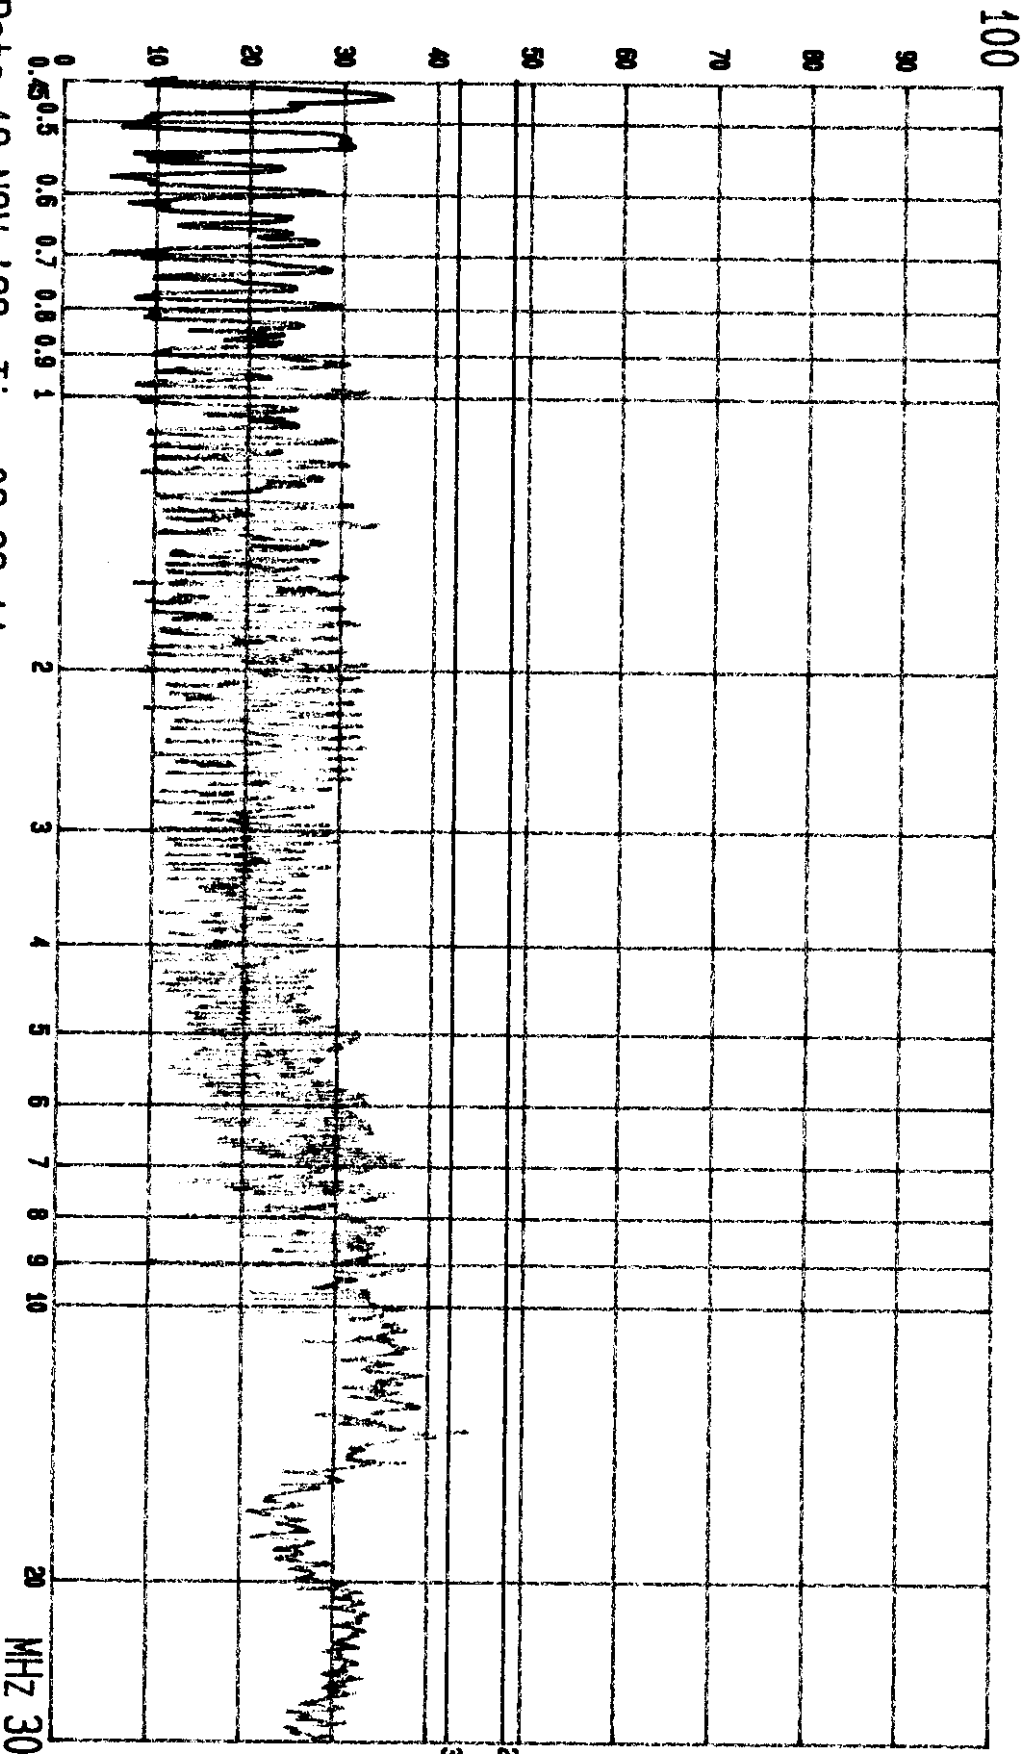

--- Date 19.NOV.'98
VIEW SONIC
LINE: VB.

Time 03:29:11
EUT: MONITOR
MENO: (1280X1024; 66KHz)

M/N: VCDTS21403-2*
EUT TO PC



(PEAK VALUE) ITEM: C.



PAGE: 001.



APPENDIX II



Radiated Test Data at Anechoic Chamber



(Total Pages : 16)

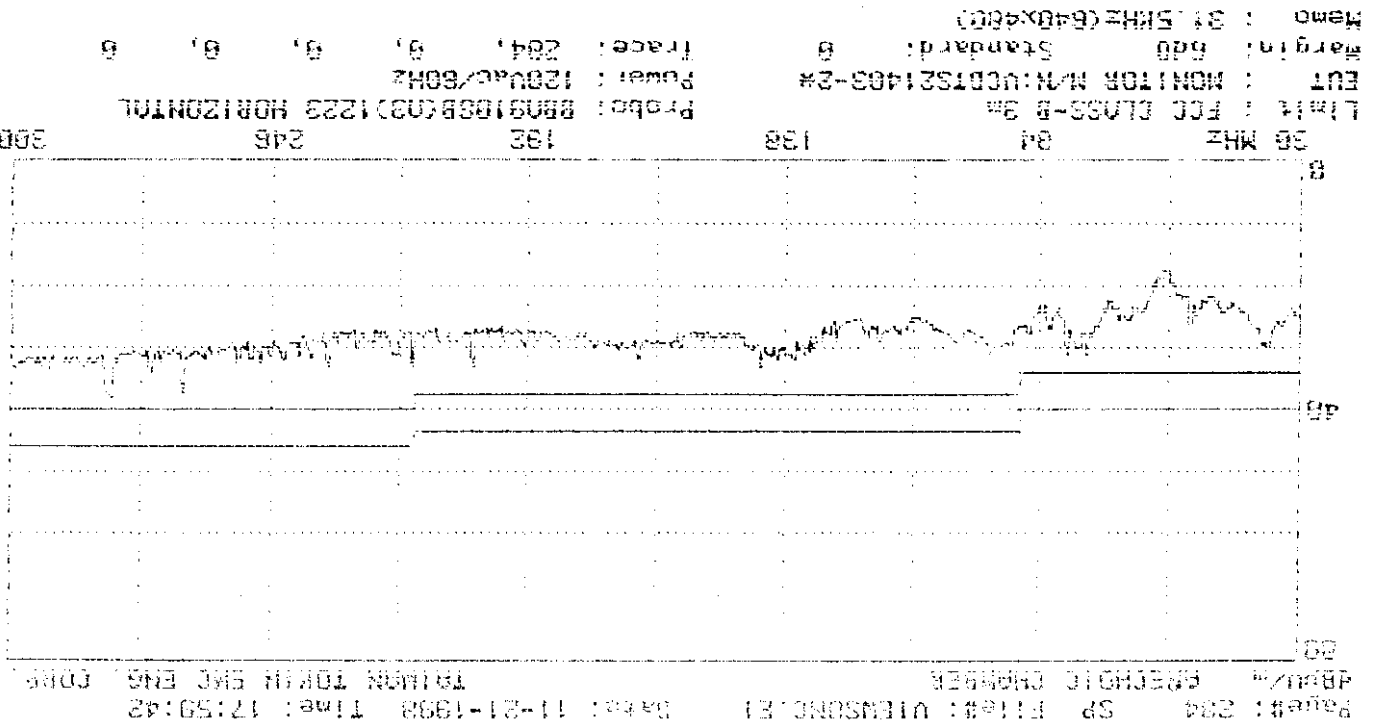
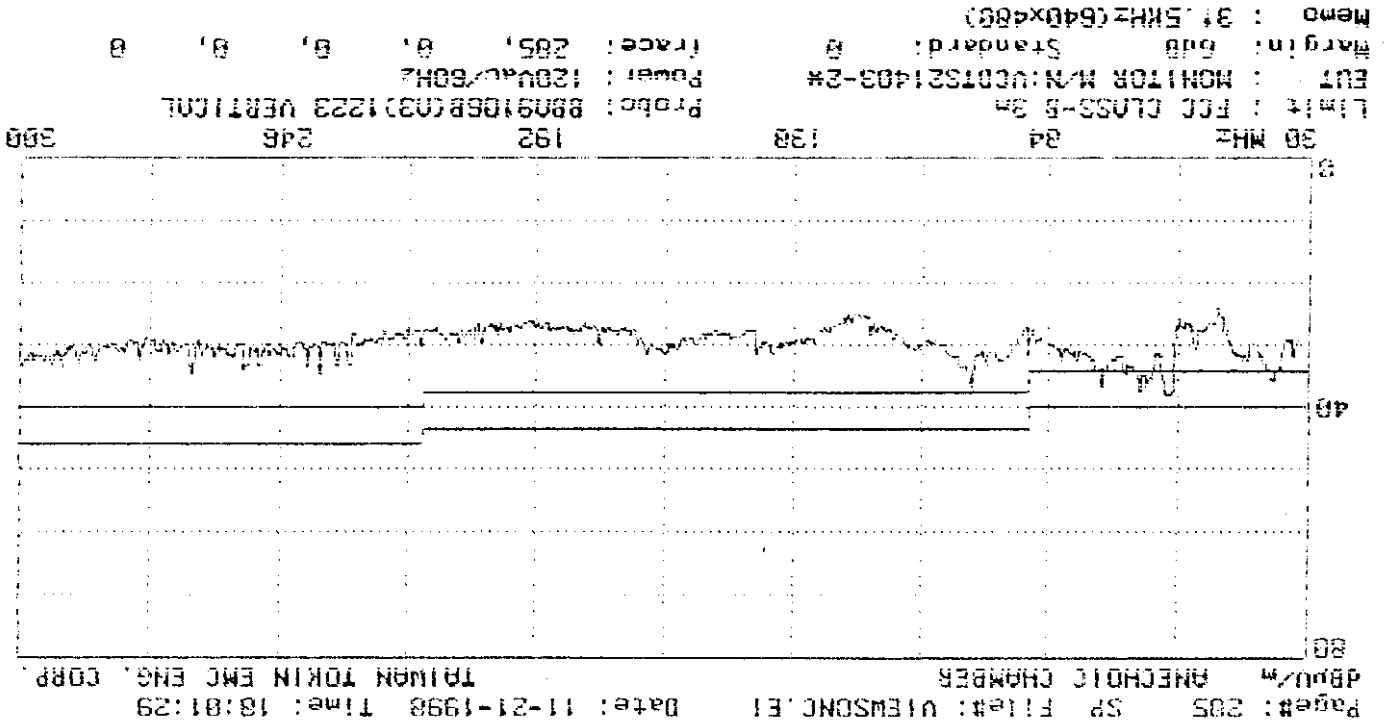


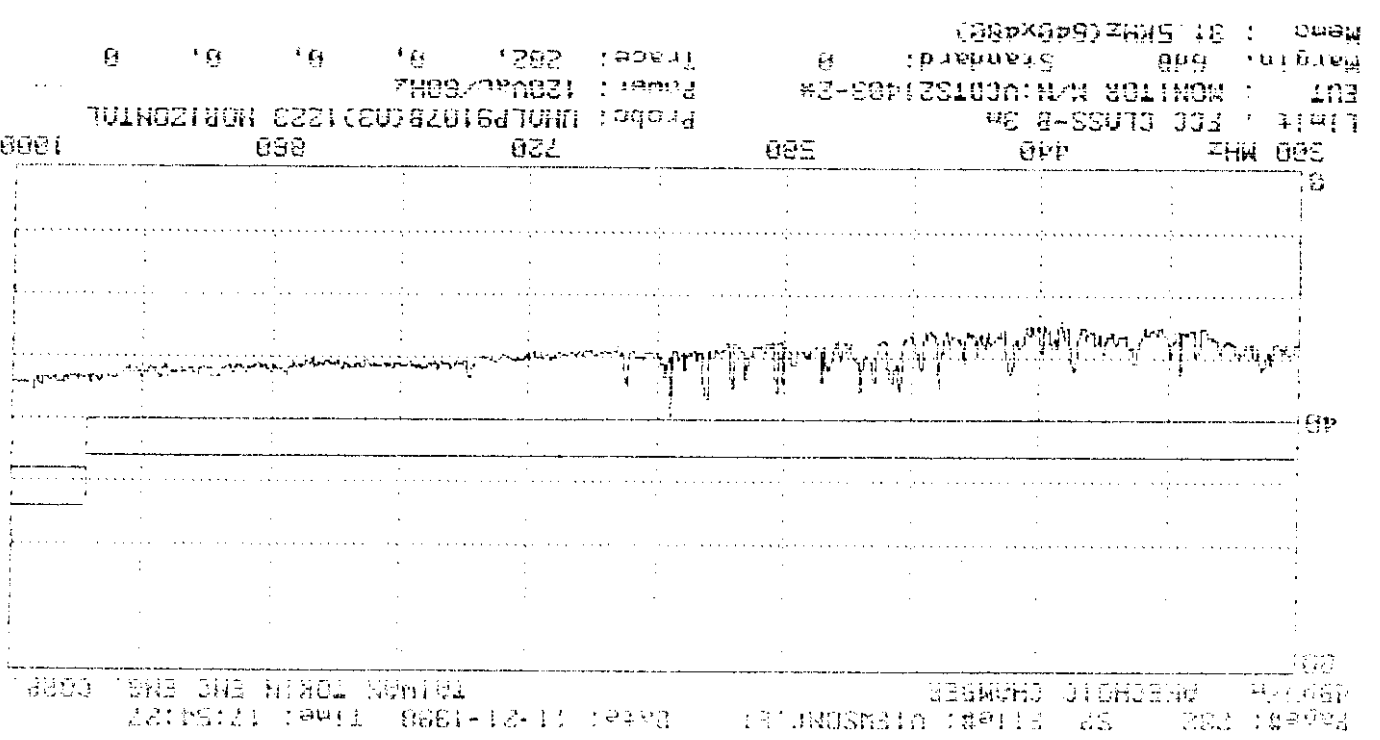
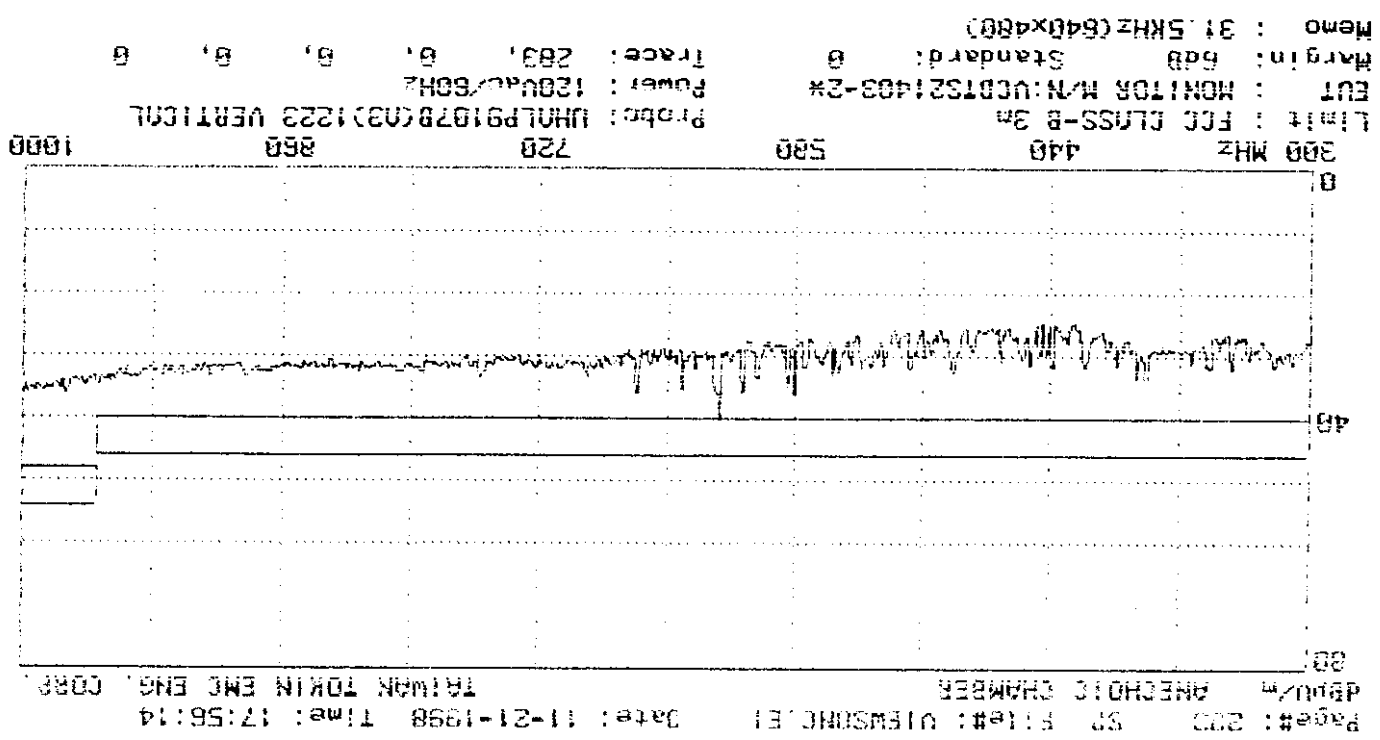


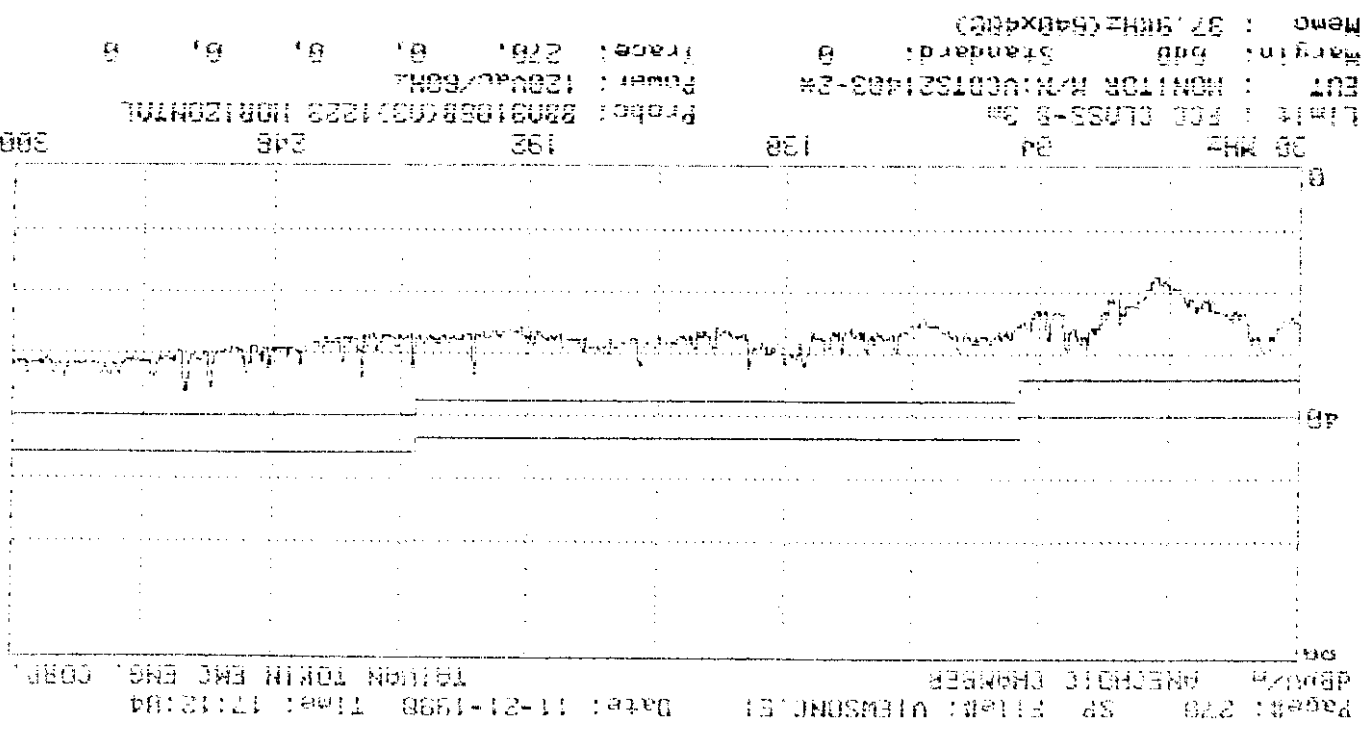
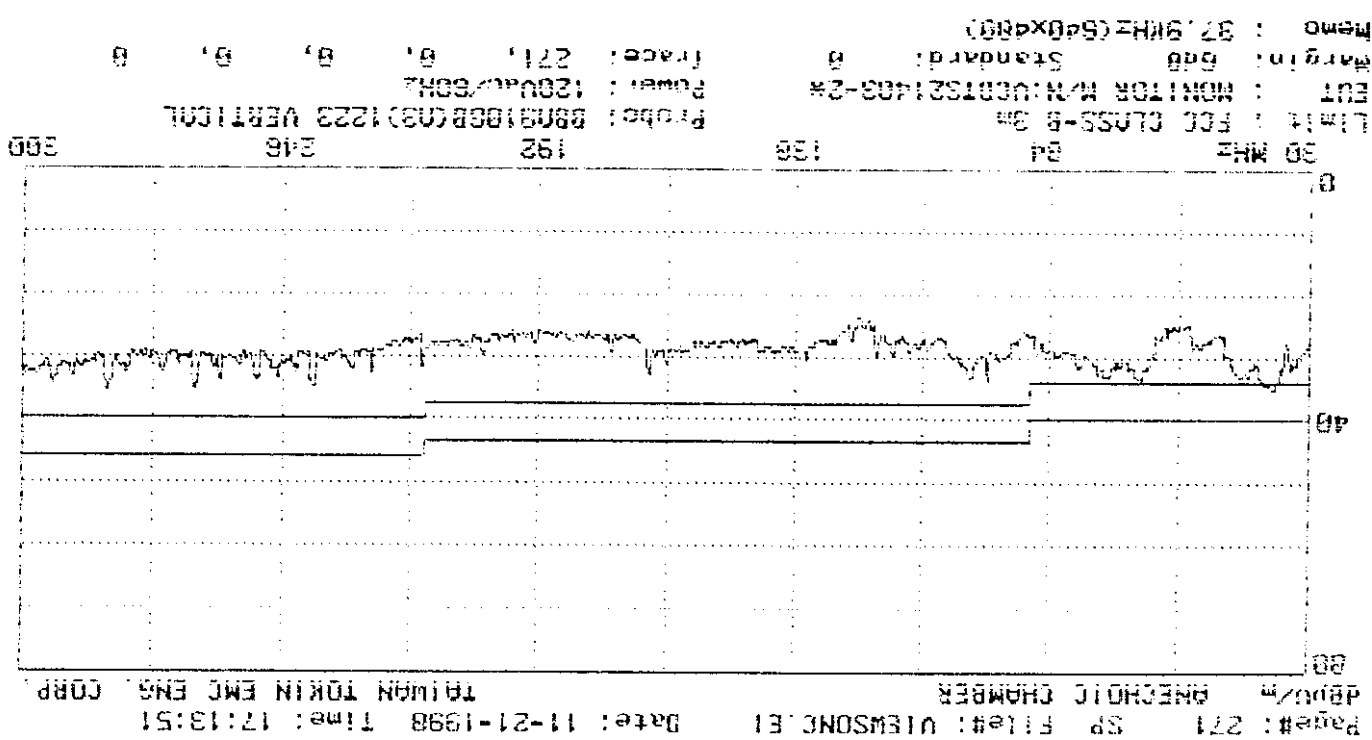


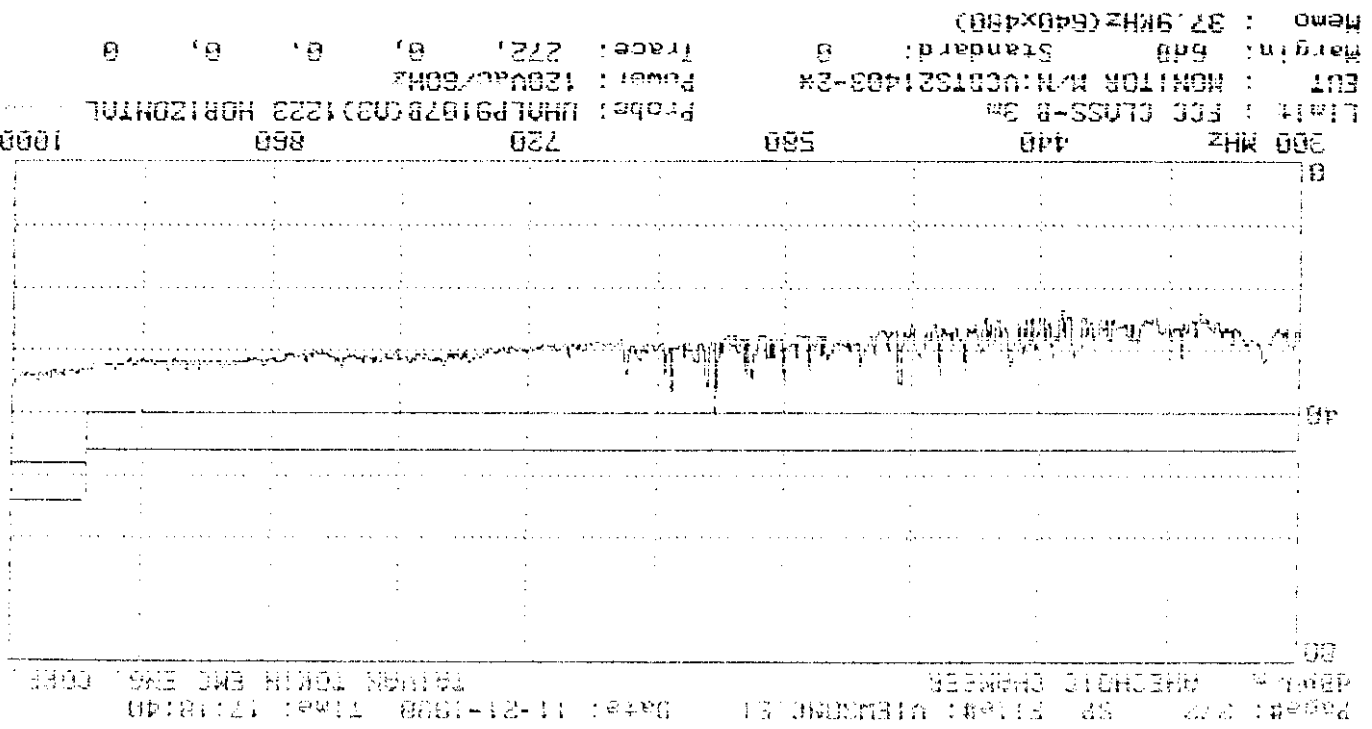
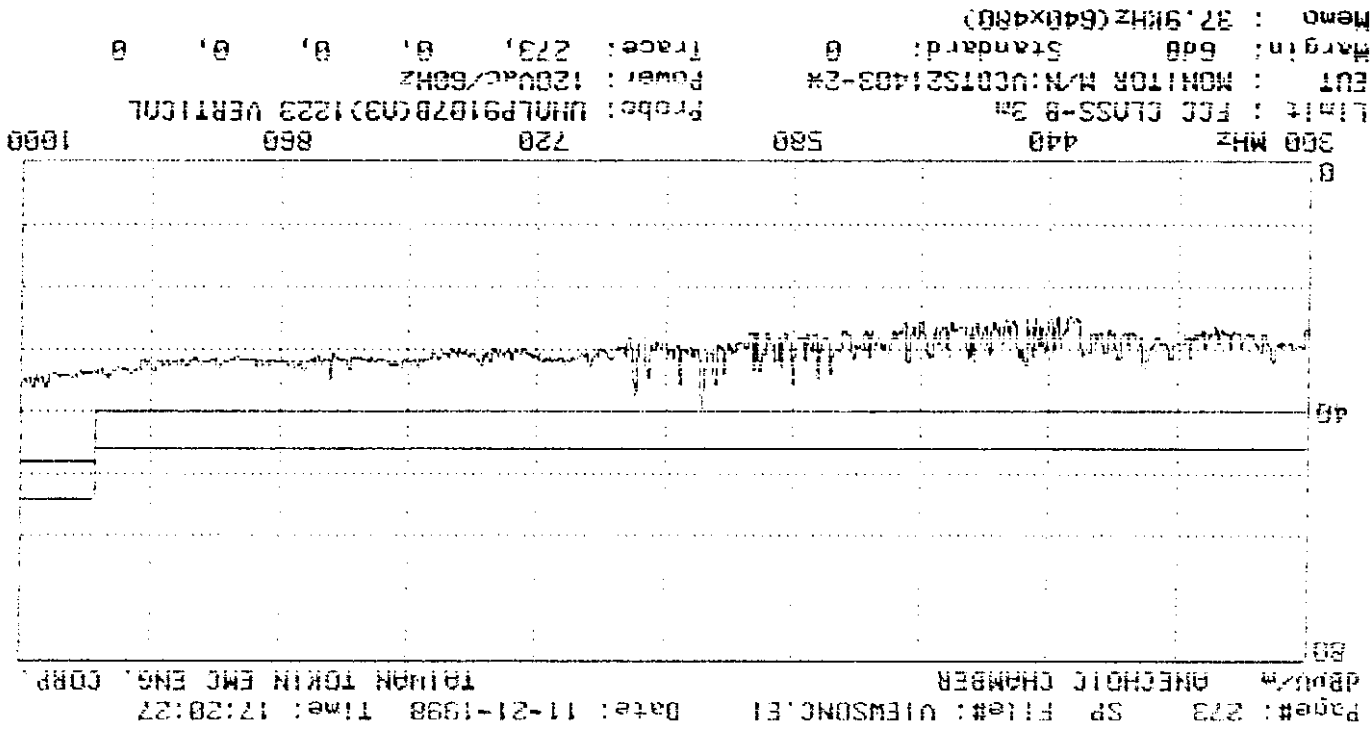


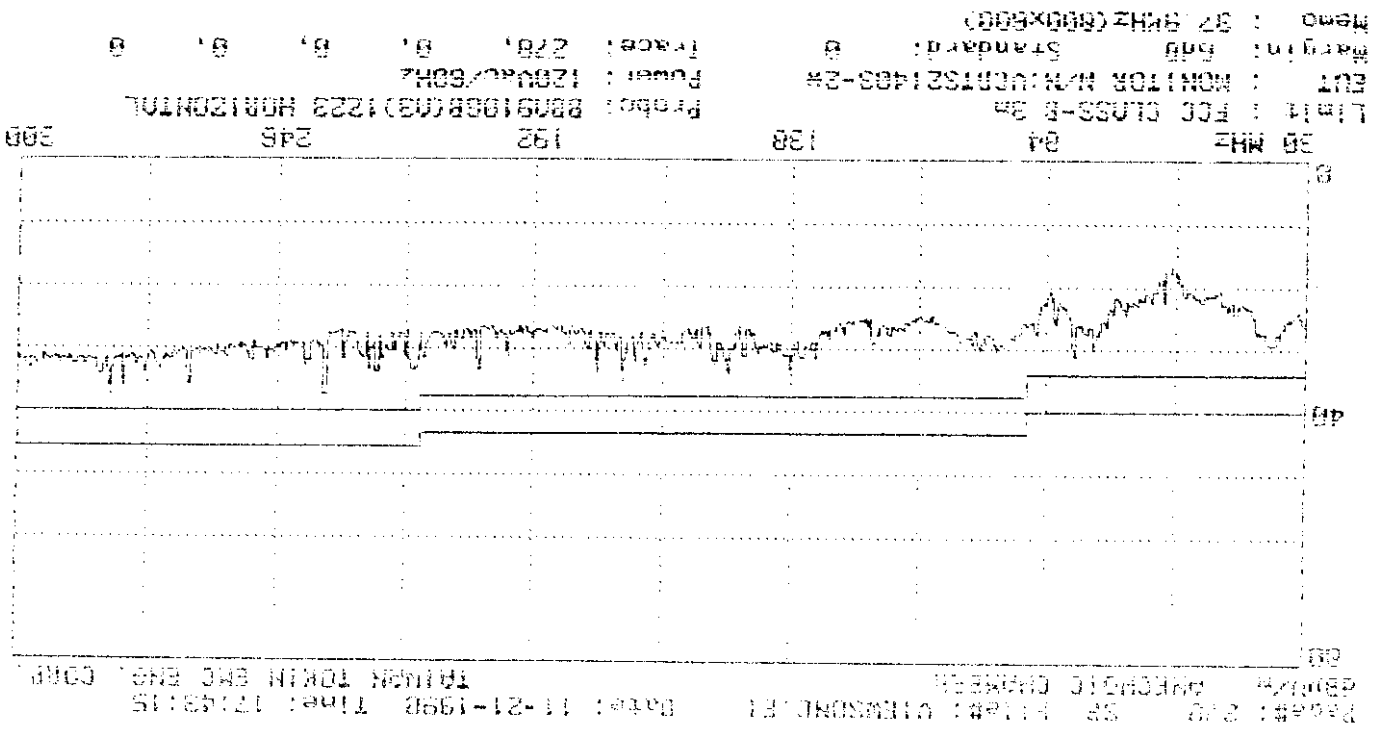
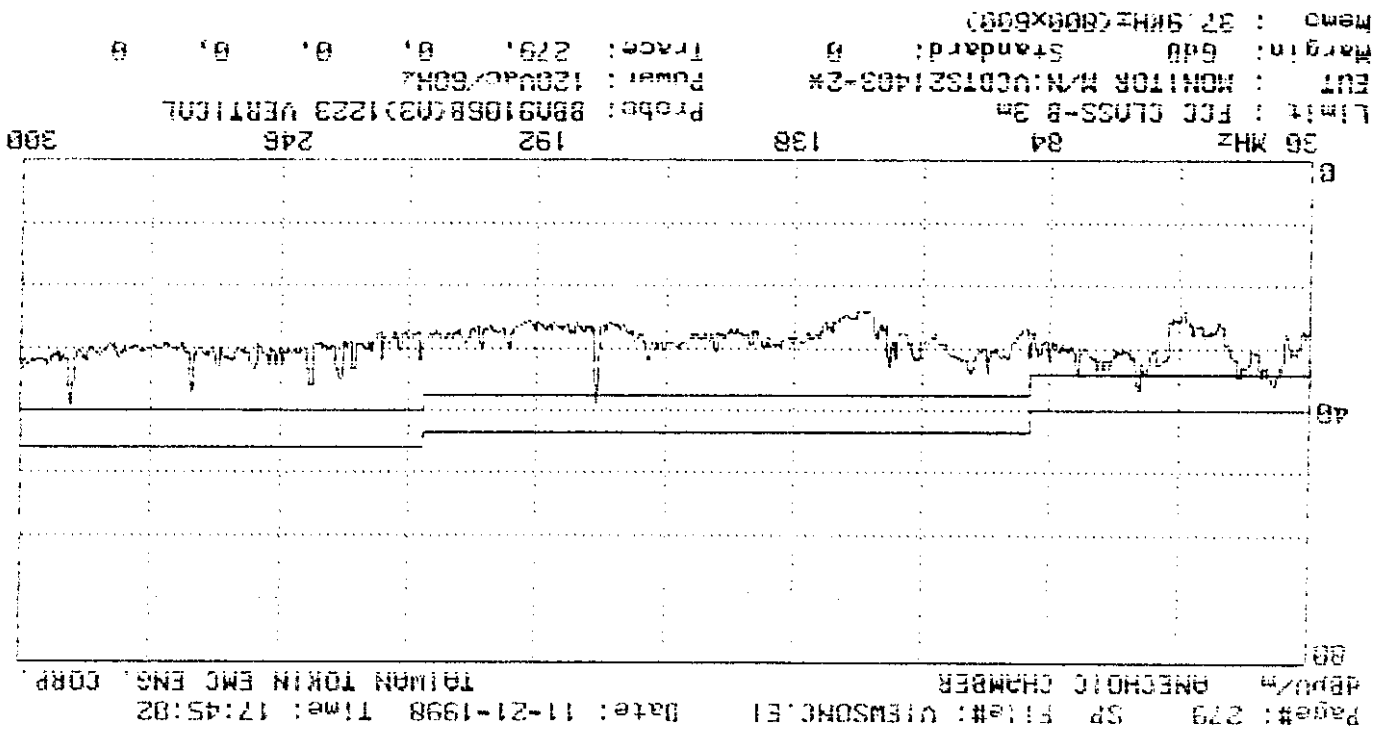


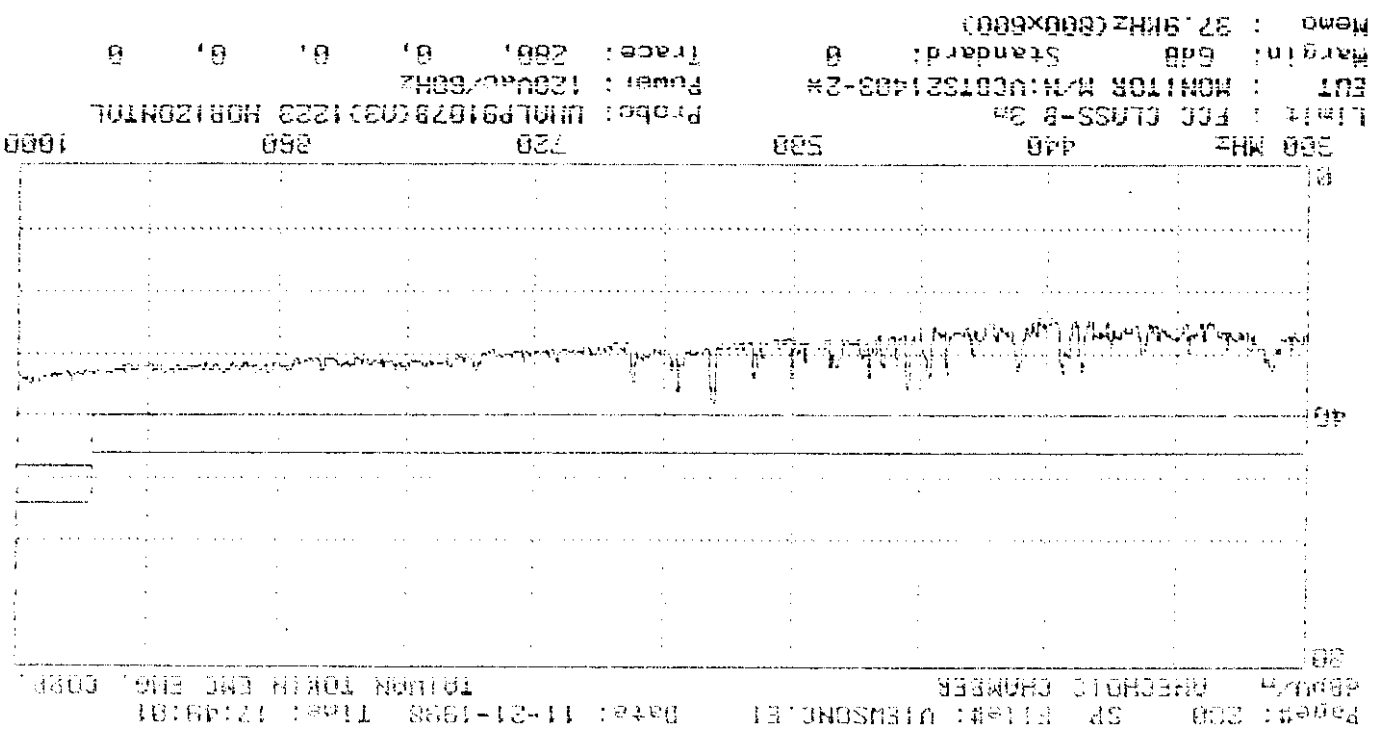
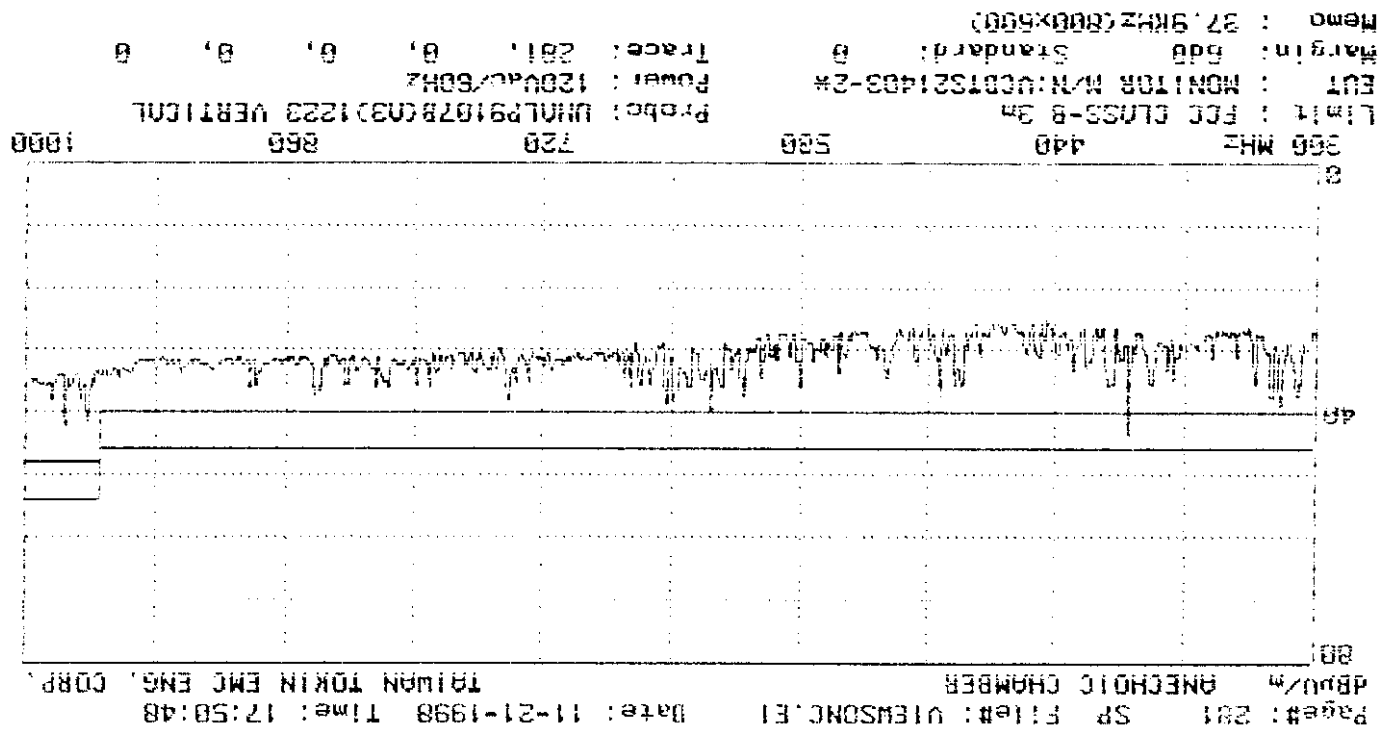


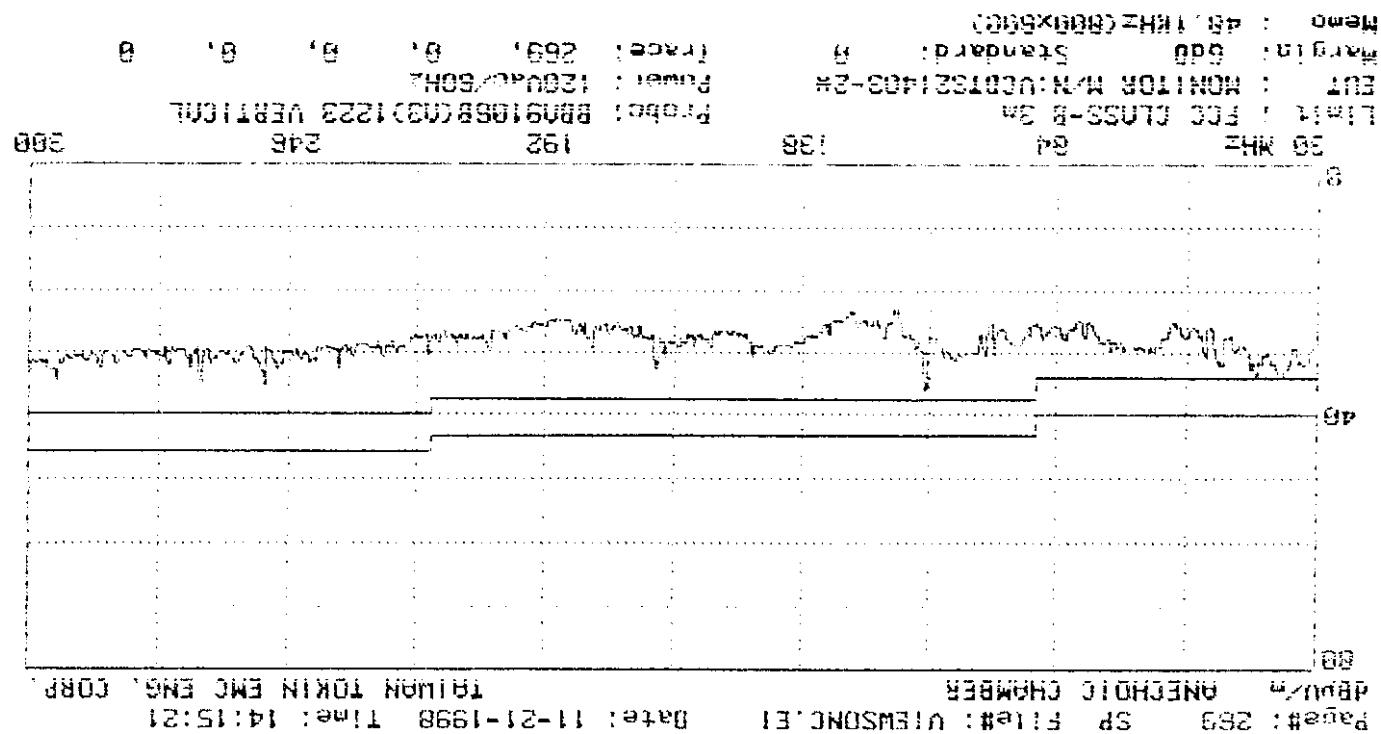
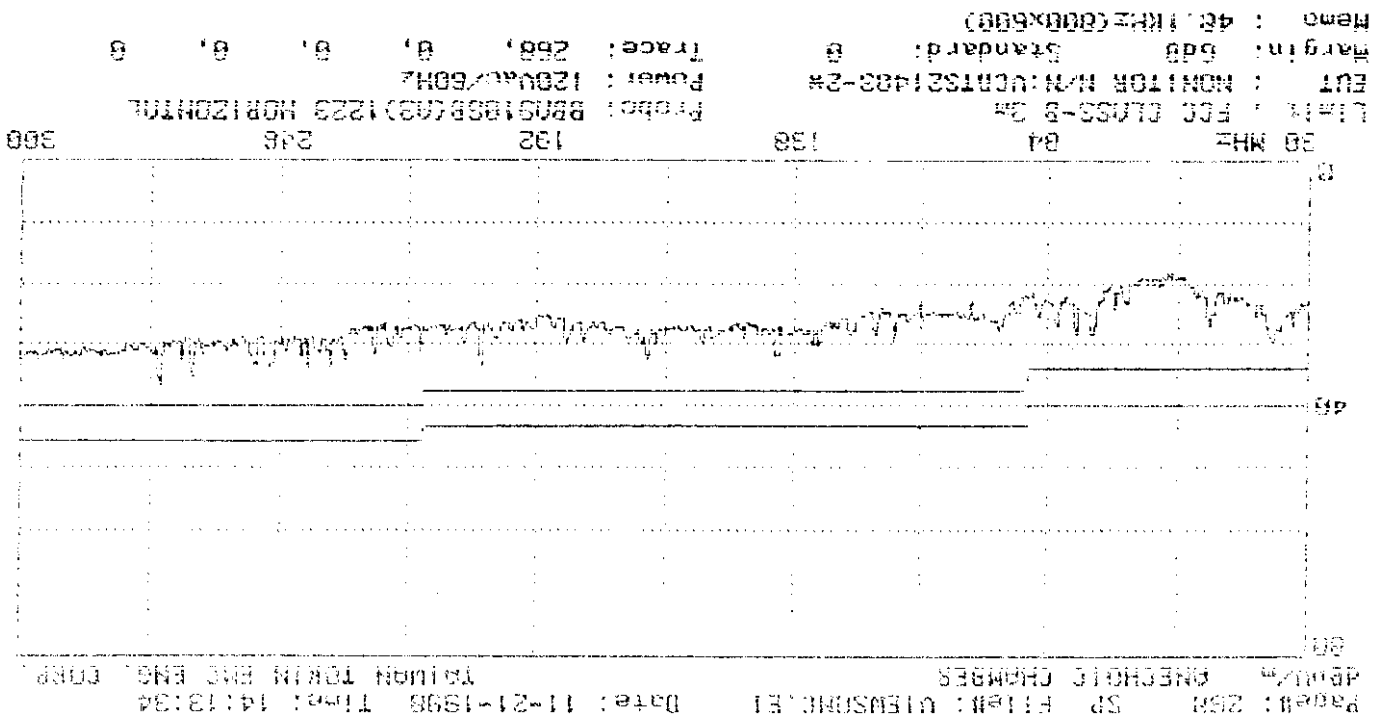


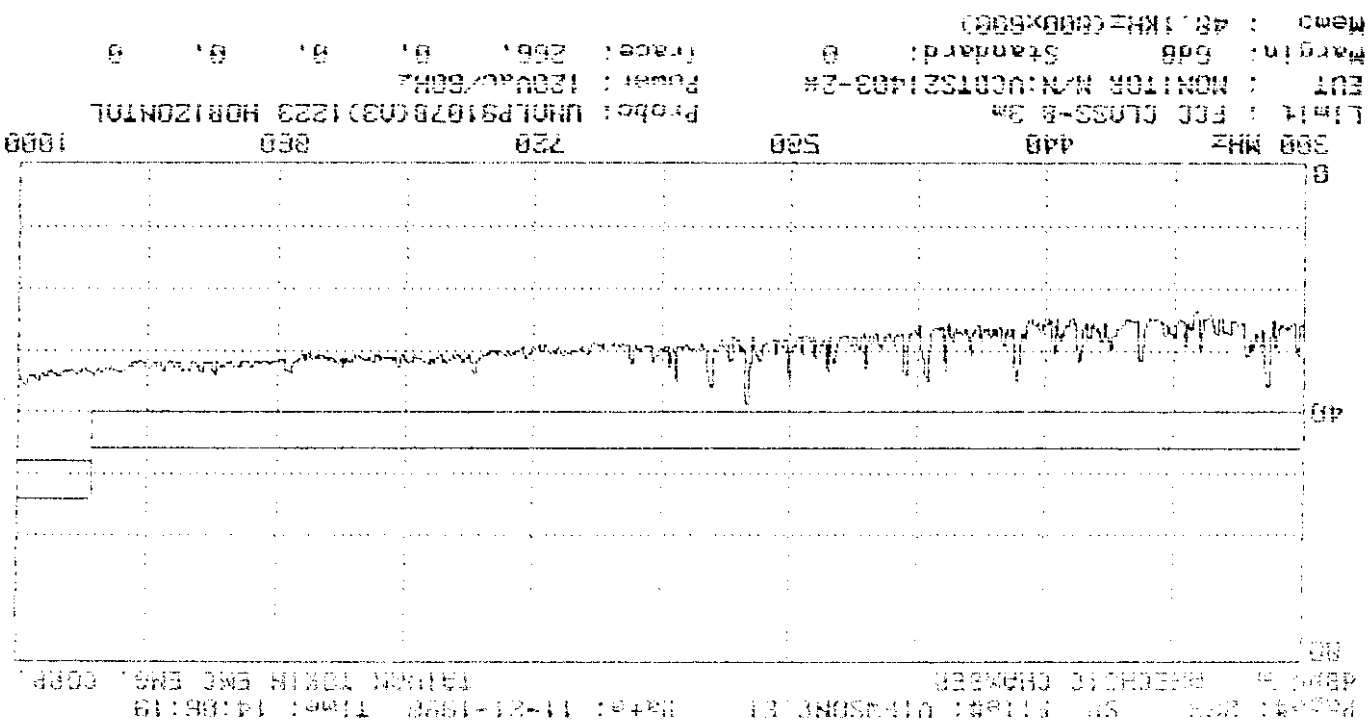
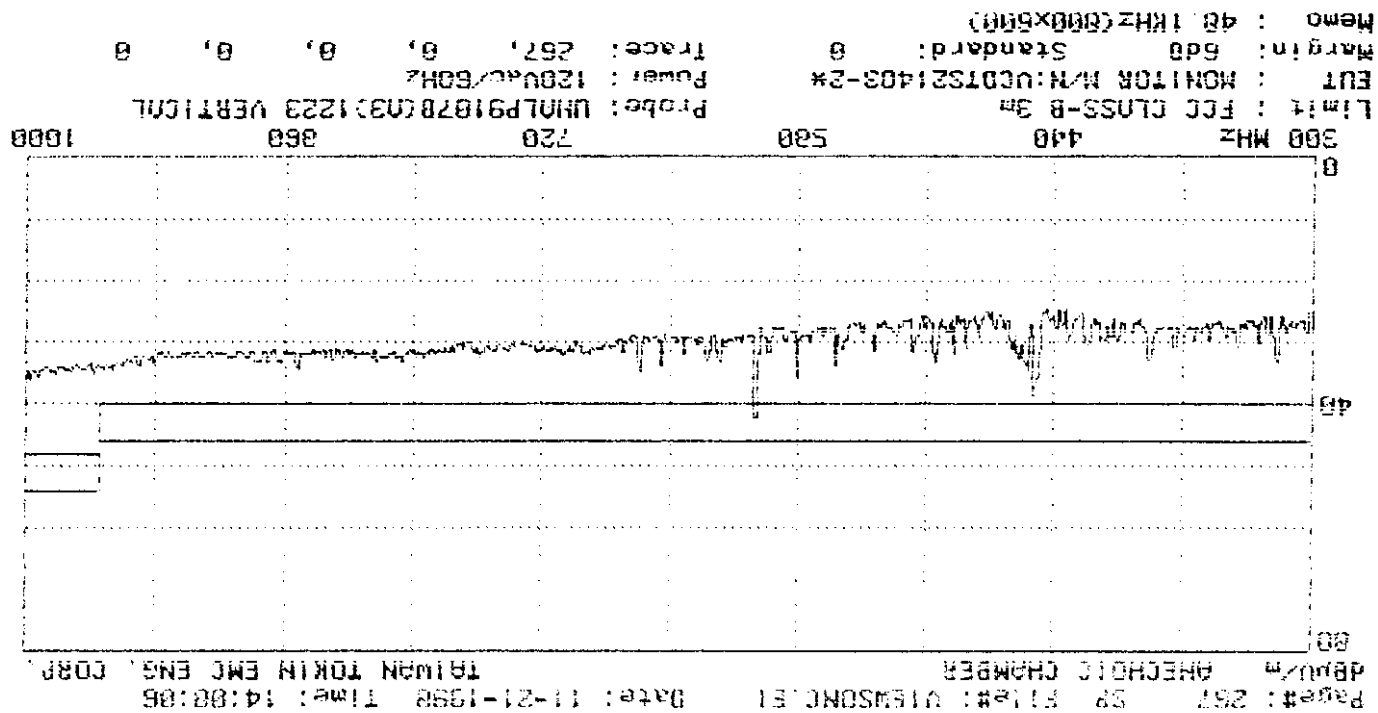


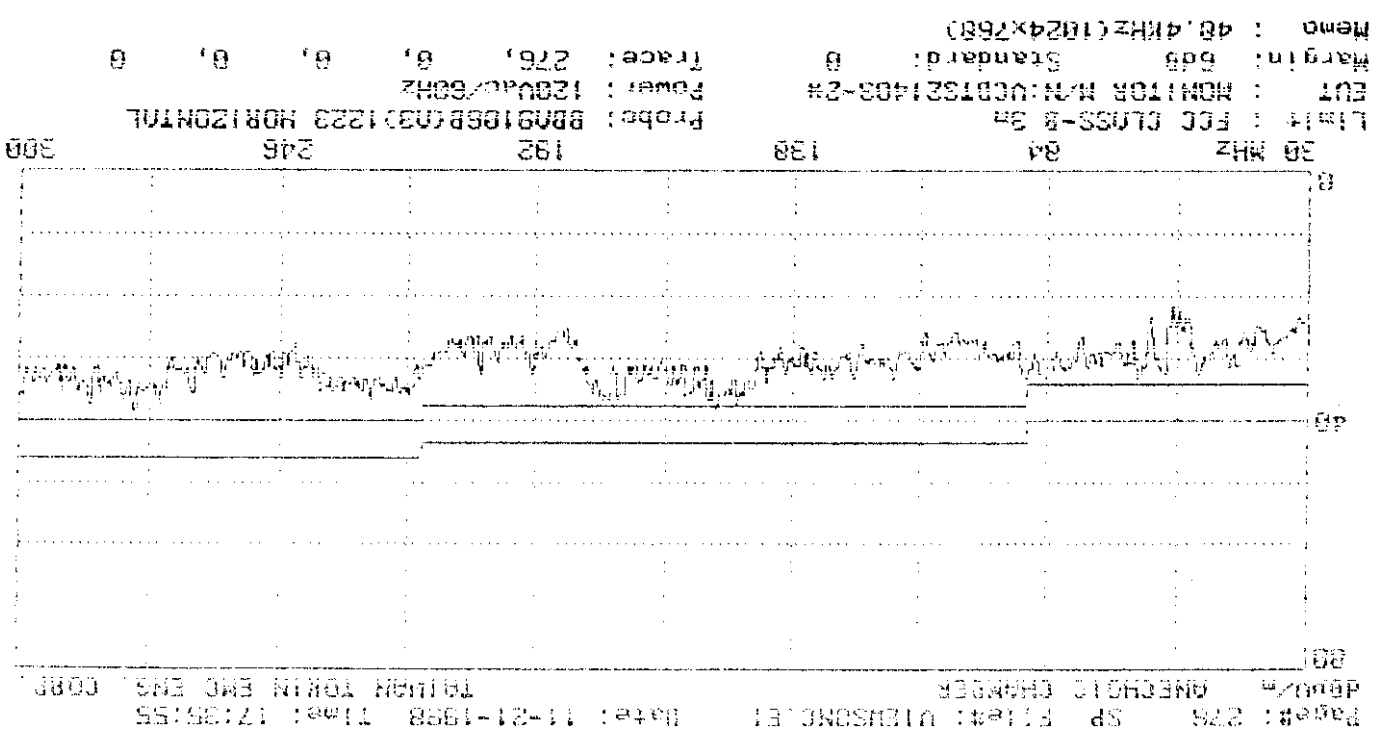
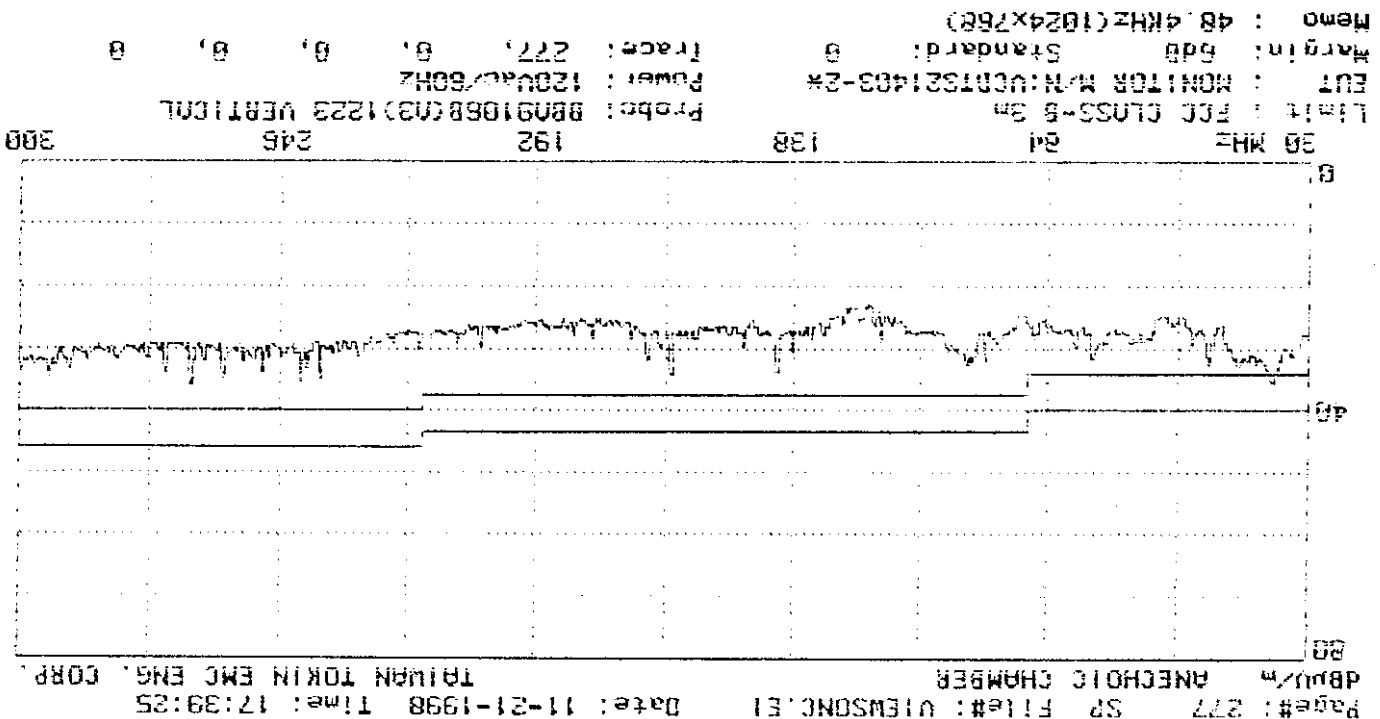


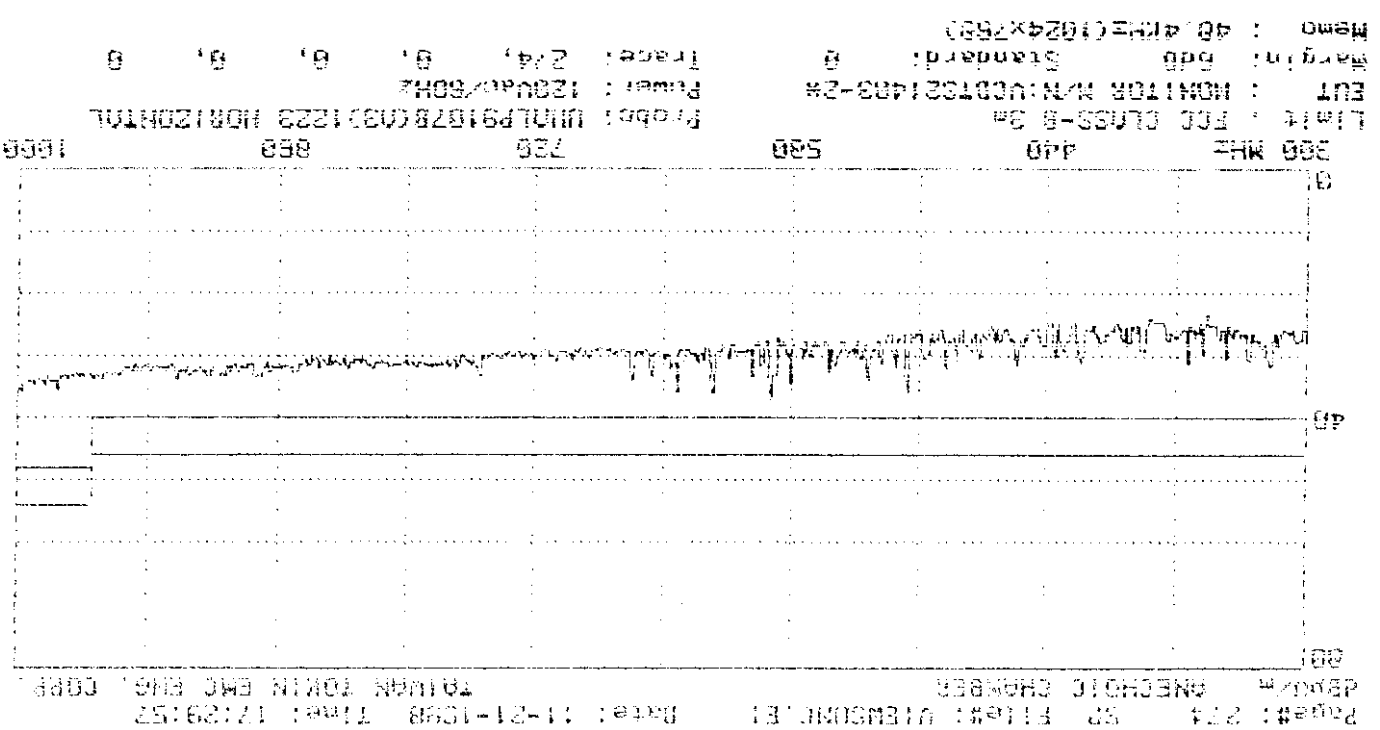
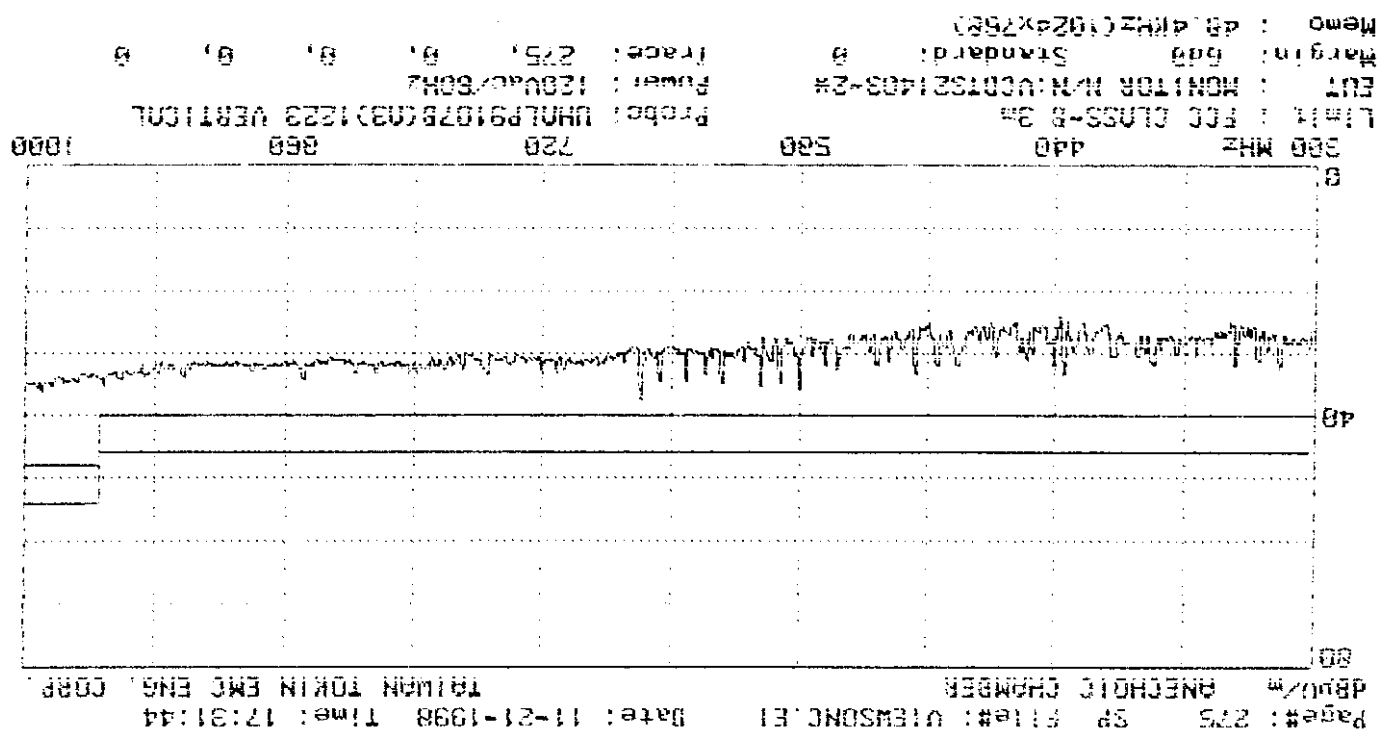


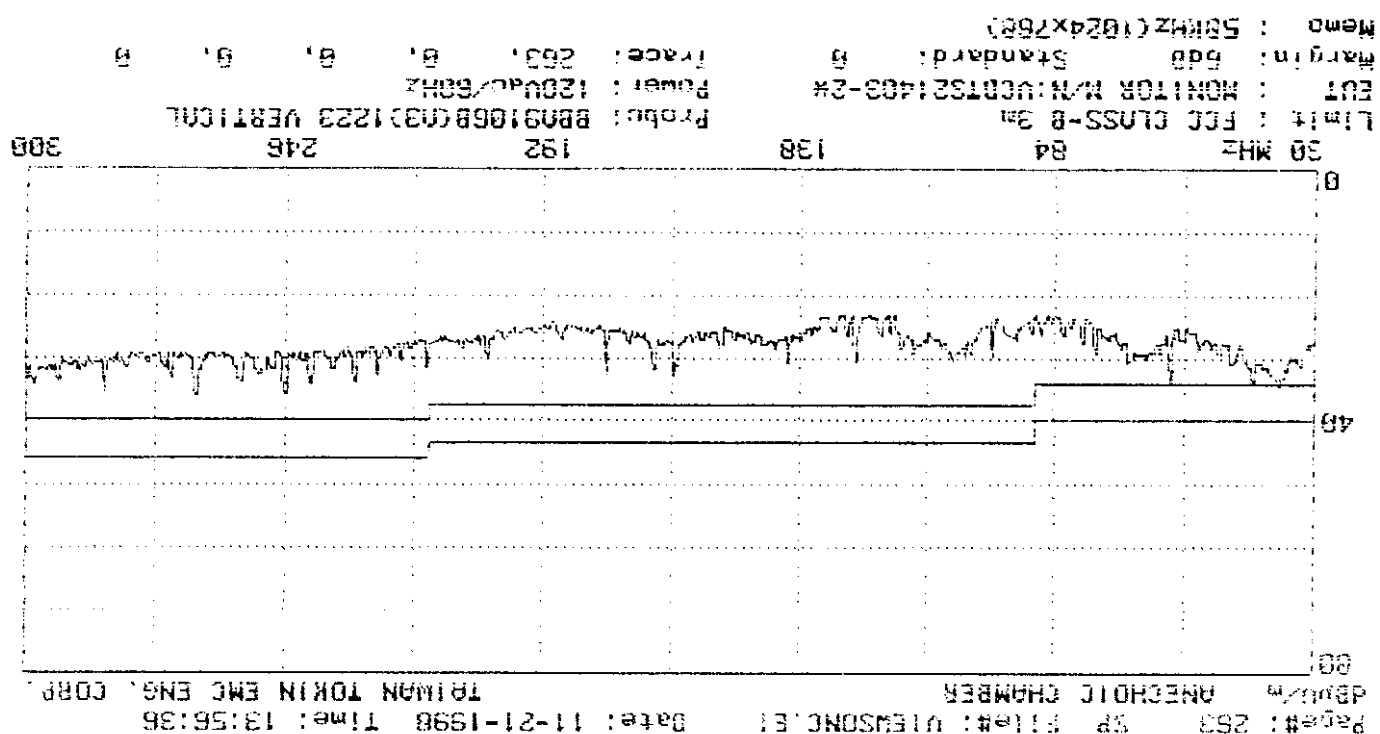
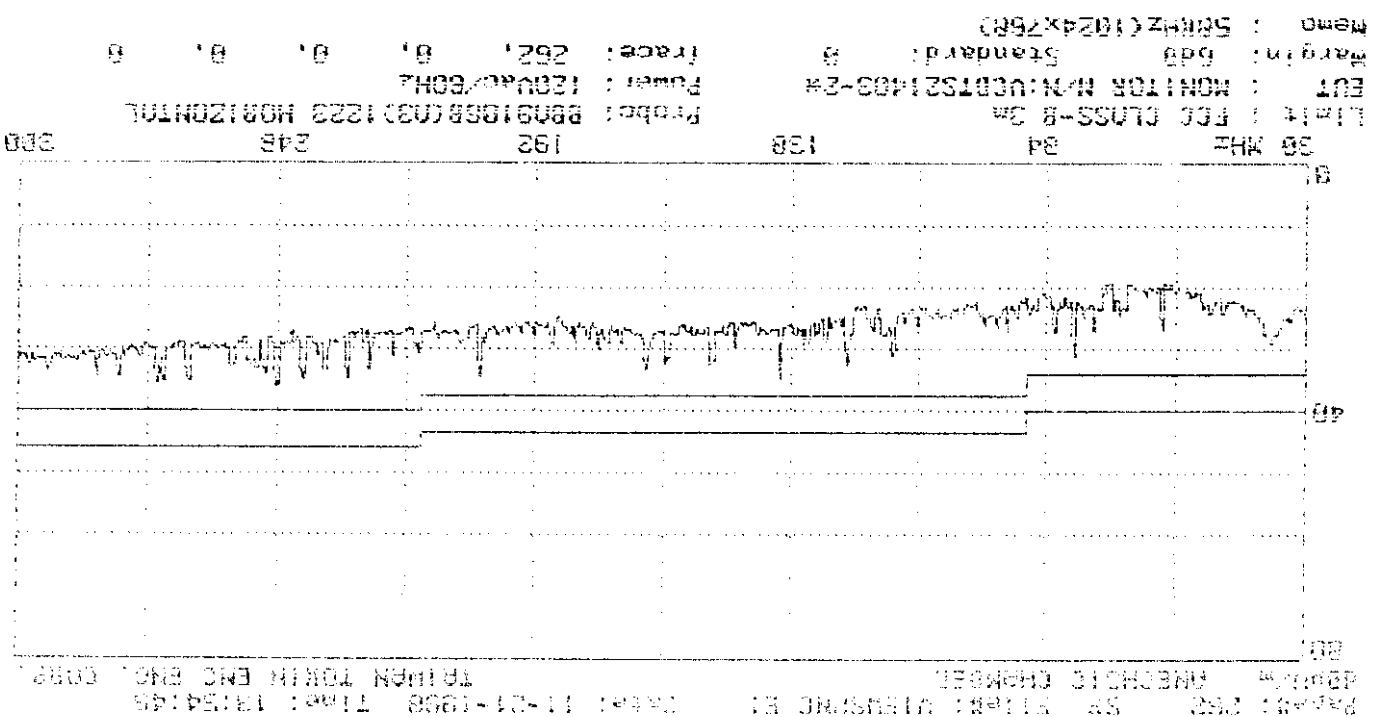


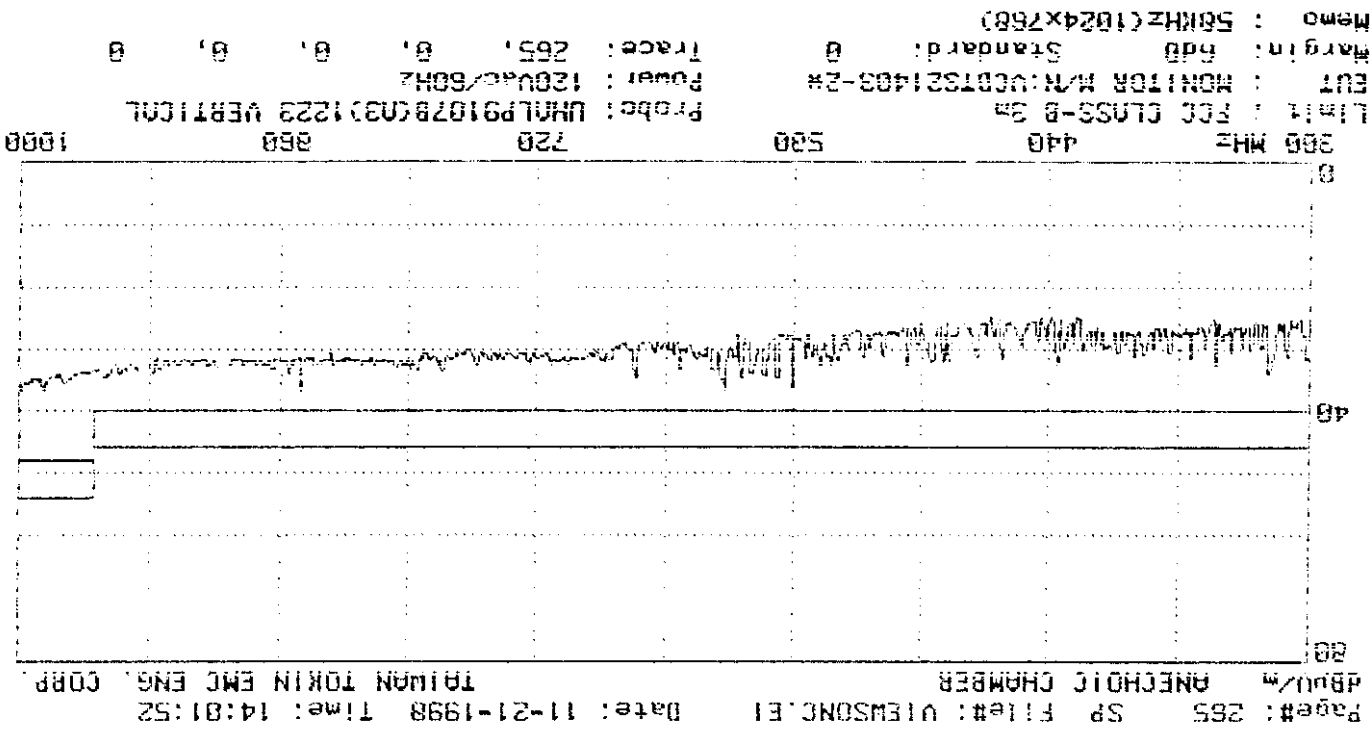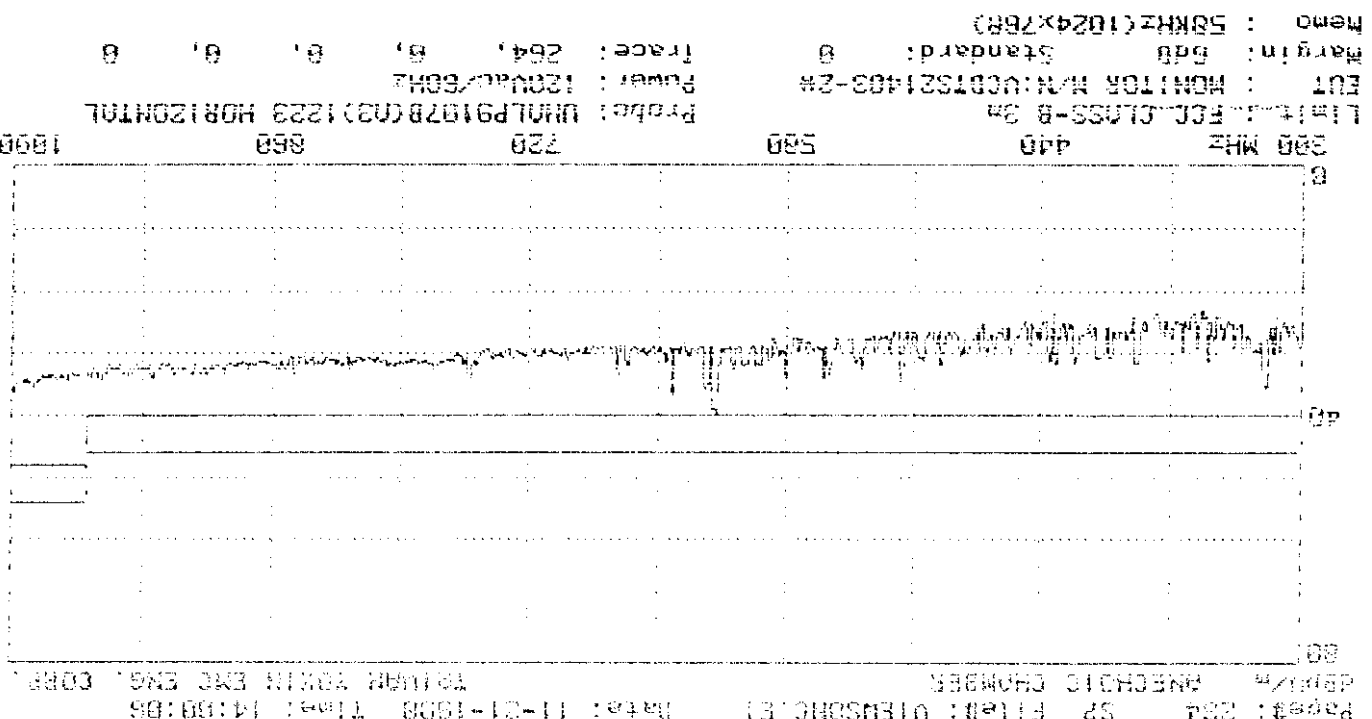

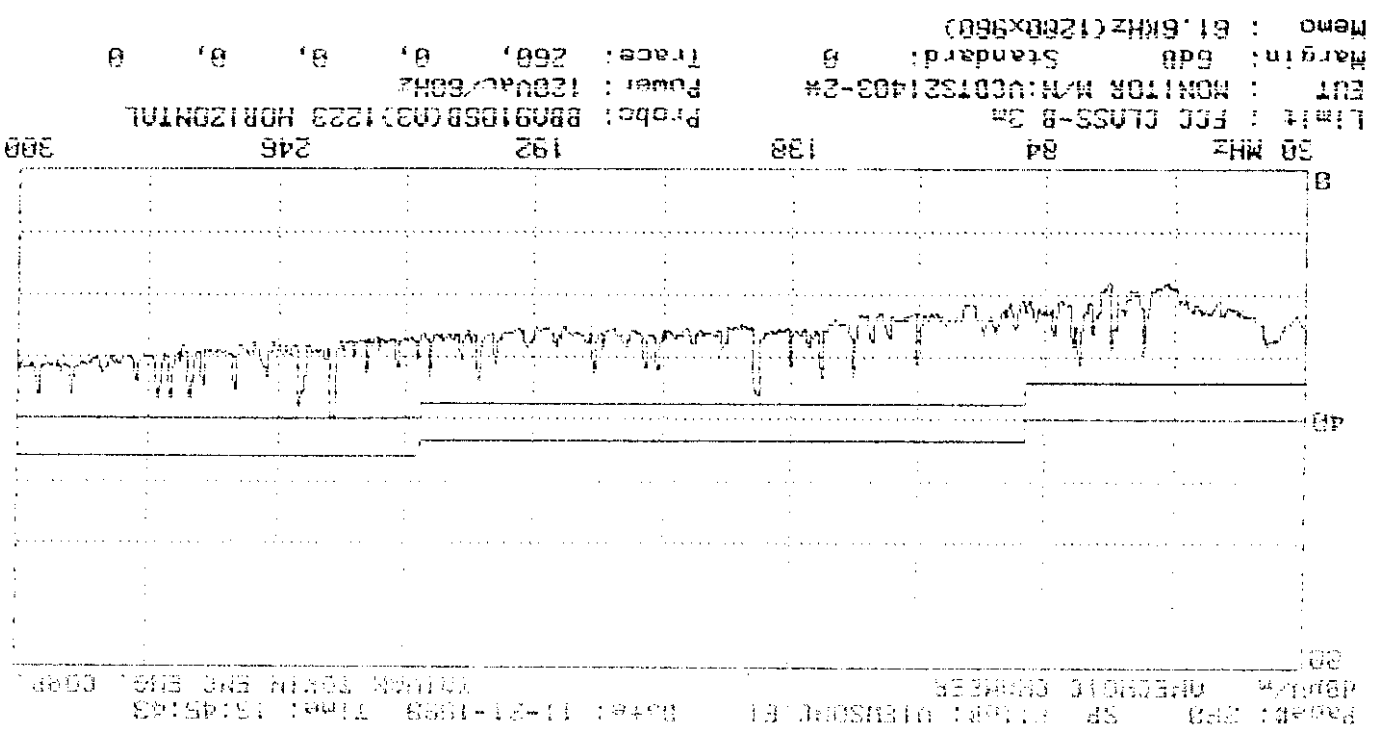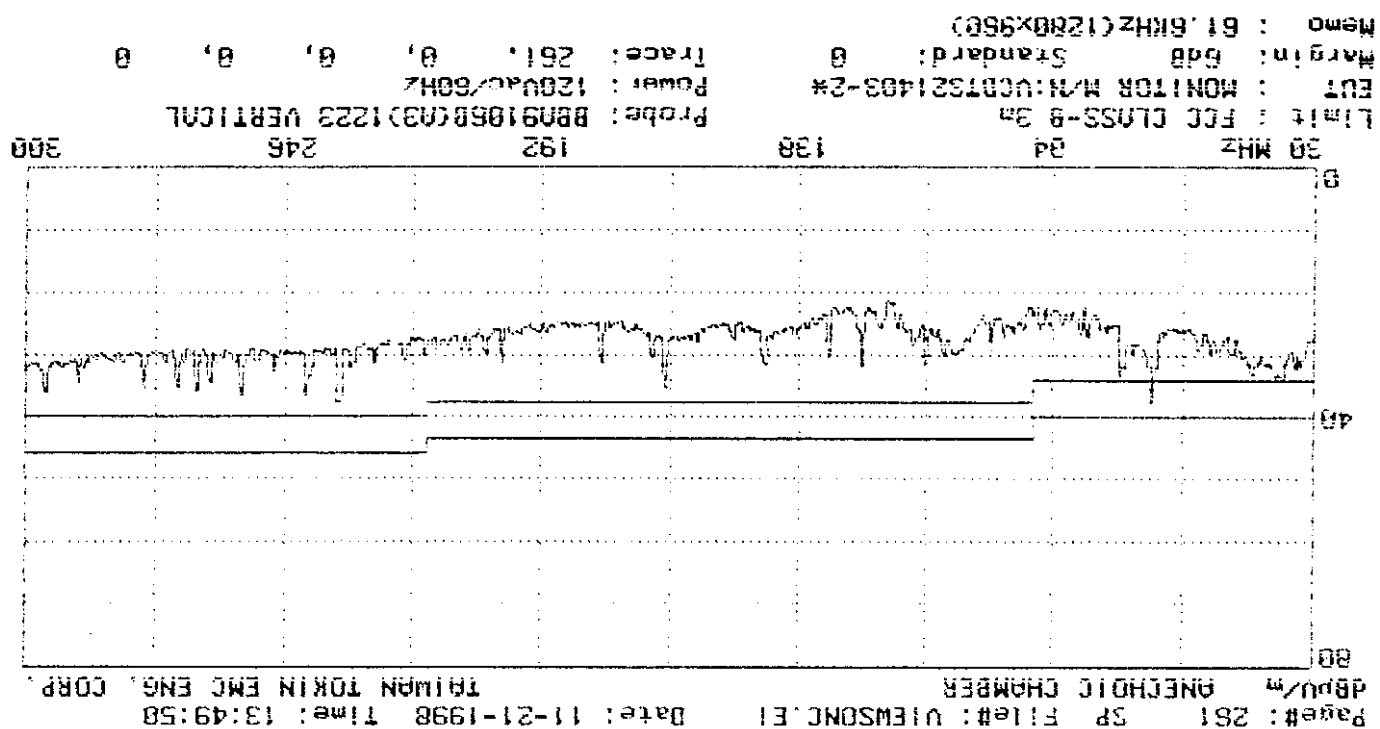

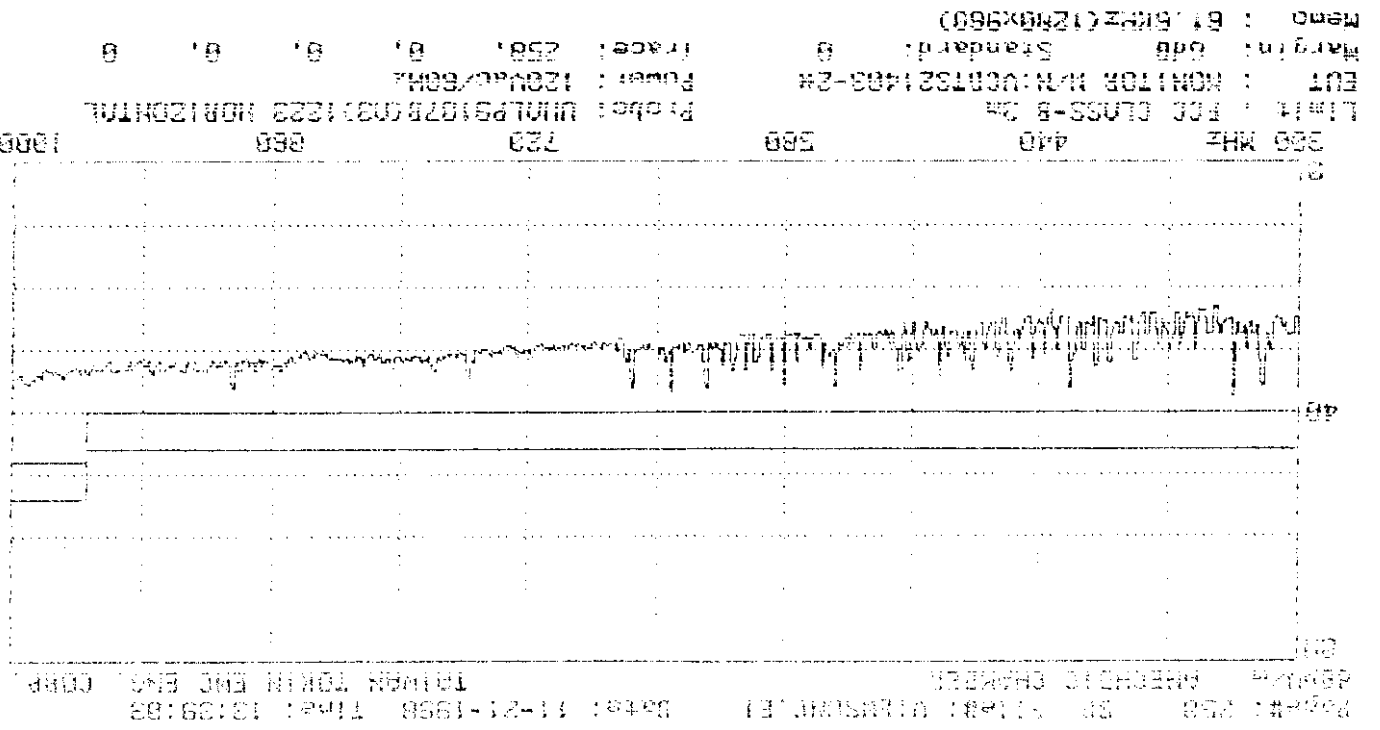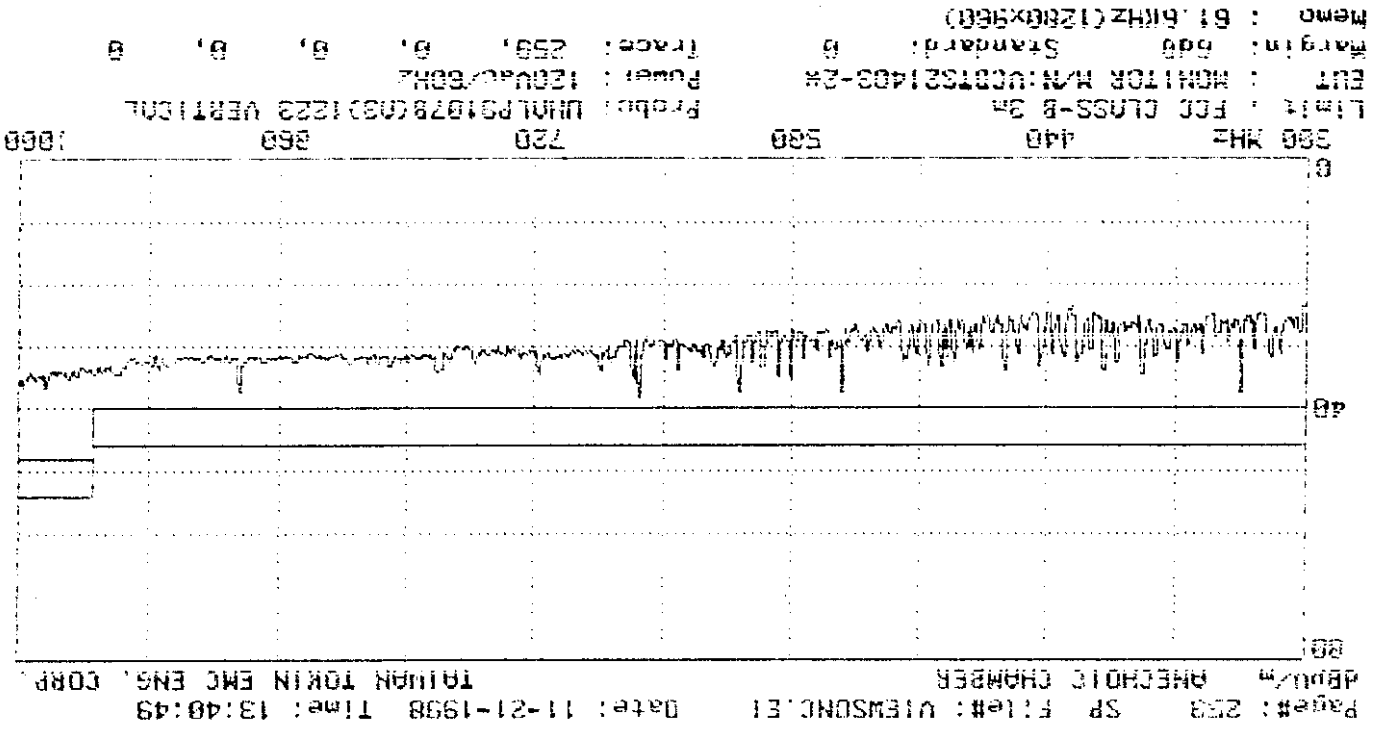

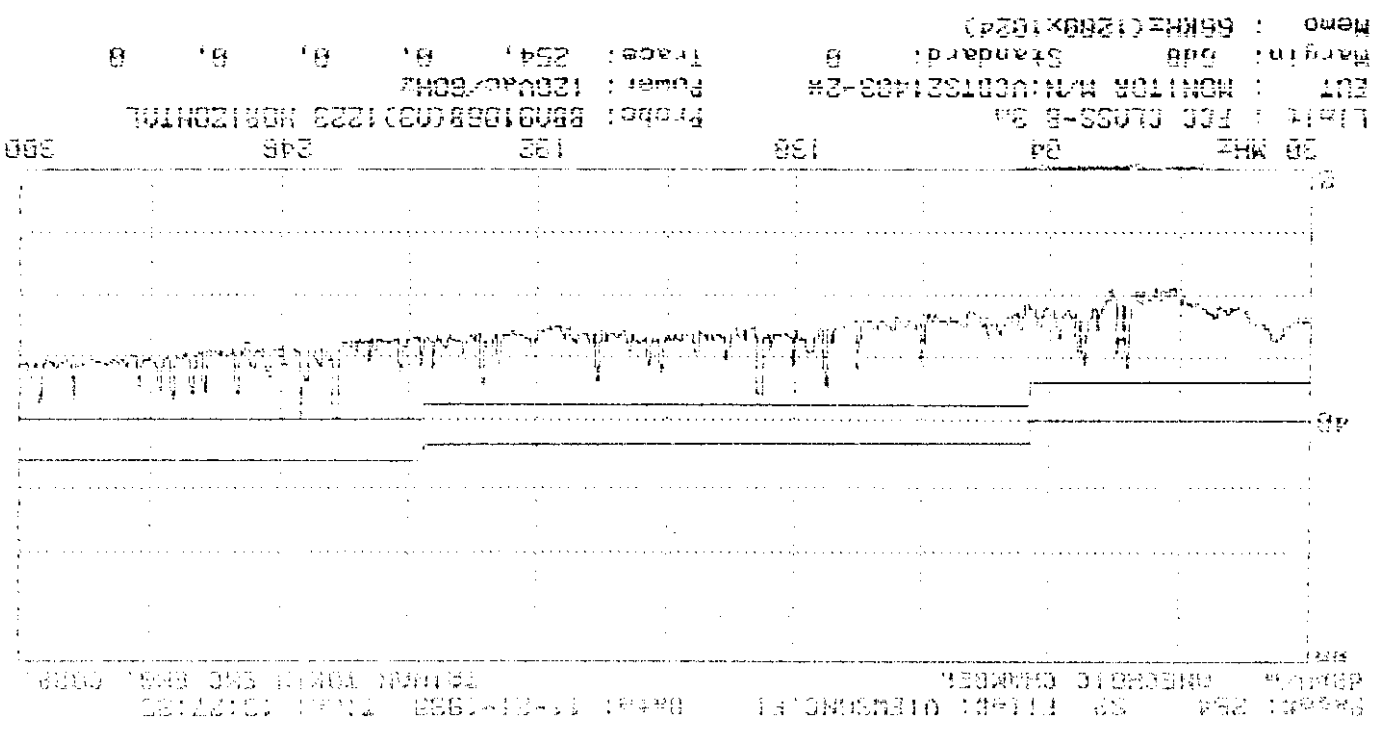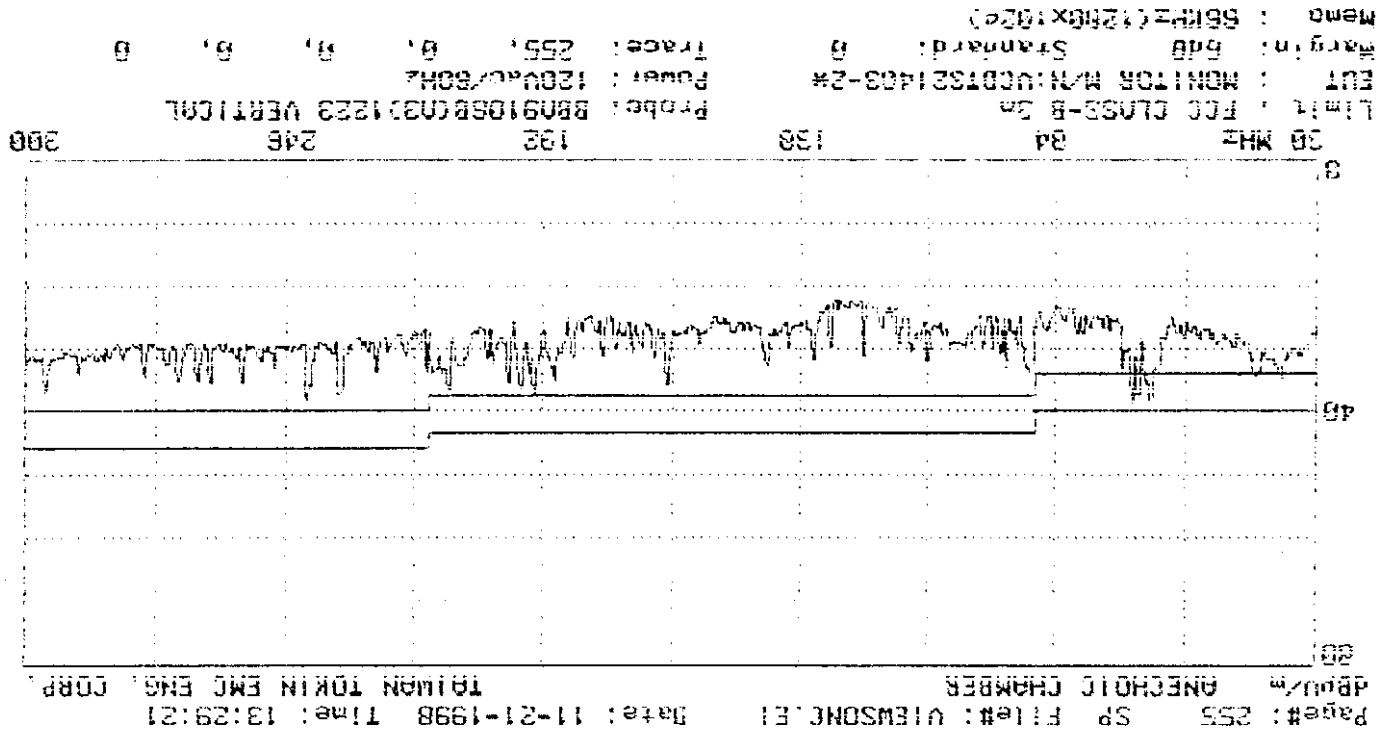

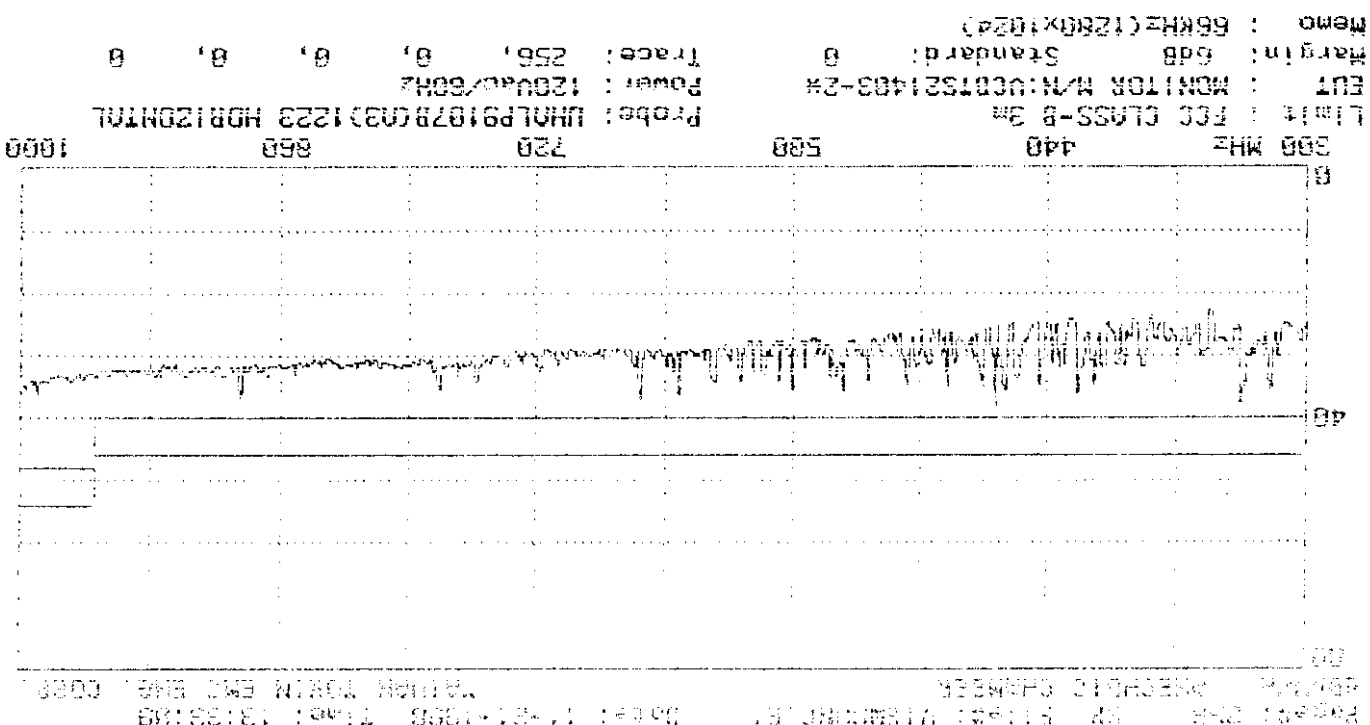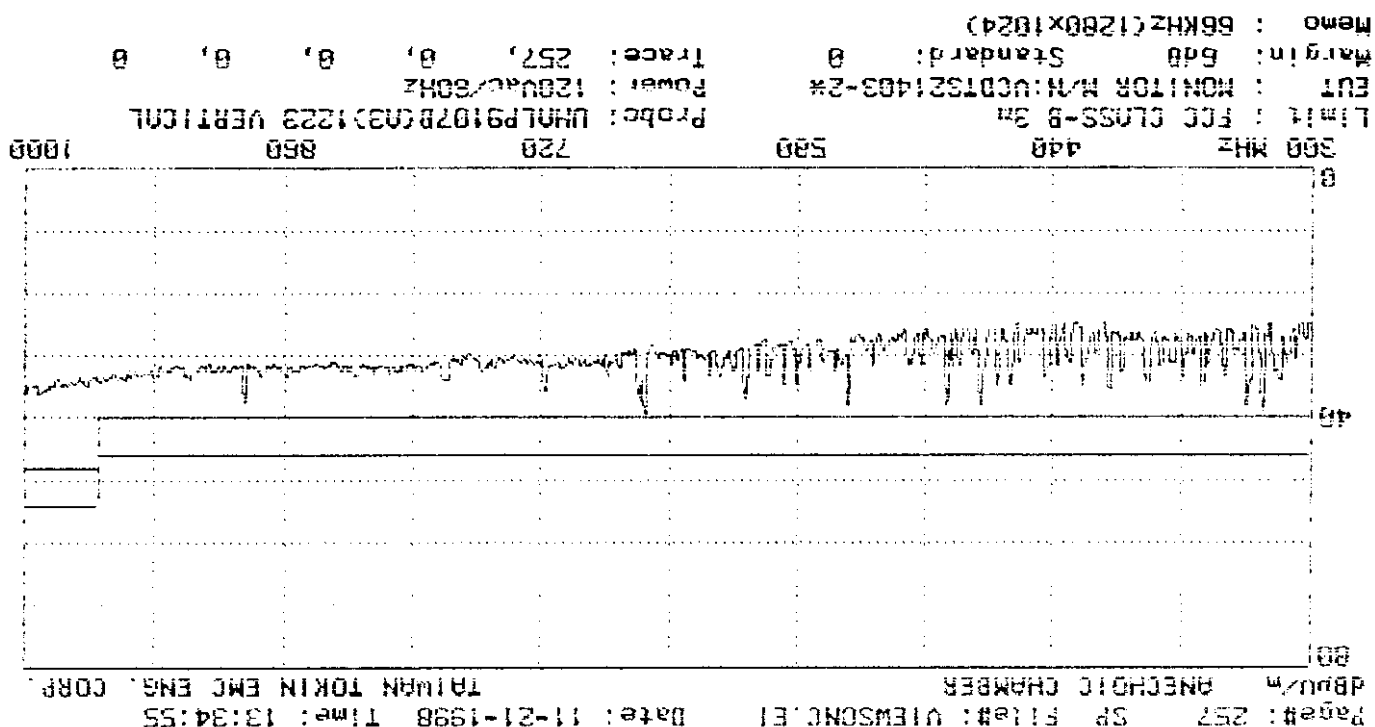

Photographs

EXHIBIT 6