

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Acer Incorporated

Notebook Computer

N24B4; Aspire Lite 15; AL15-41P; AL15-42P; GW15-41P

FCC ID: HLZGW1541P

Brand : acer; Gateway

Prepared for : Acer Incorporated

8F., No.88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City
221 Taiwan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F25002

Date of Test : Nov.26~Dec.30, 2024

Date of Report : Jan.09, 2025

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	5
1.1. Description of Standards and Results	5
2. GENERAL INFORMATION.....	6
2.1. Description of Equipment Under Test	6
2.2. Feature of Equipment Under Test.....	7
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators.....	9
2.5. Test Equipments.....	10
2.6. Test information	10
2.7. Test Facility	11
2.8. Measurement Uncertainty (95% confidence levels, k=2).....	11
3. POWER LINE CONDUCTED EMISSION TEST	12
3.1. Block Diagram of Test Setup	12
3.2. Power Line Conducted Emission Test Limits.....	12
3.3. Configuration of EUT on Test	12
3.4. Operating Condition of EUT.....	13
3.5. Test Procedure	13
3.6. Power Line Conducted Emission Test Results	13
4. RADIATED EMISSION MEASUREMENT.....	18
4.1. Block Diagram of Test Setup	18
4.2. Radiated Emission Limits Standard:.....	19
4.3. EUT Configuration on Test	19
4.4. Operating Condition of EUT.....	19
4.5. Test Procedure	20
4.6. Radiated Emission Test Results.....	20
5. CONDUCTED SPURIOUS EMISSIONS.....	50
5.1. Block Diagram of Test Setup	50
5.2. Limit.....	50
5.3. Test Procedure	50
5.4. Test result.....	50
6. 6DB & 99% BANDWIDTH TEST	57
6.1. Block Diagram of Test Setup	57
6.2. Limit.....	57
6.3. Test Procedure	57
6.4. Test Results.....	58
7. MAXIMUM PEAK OUTPUT POWER TEST.....	64
7.1. Limit.....	64
7.2. Test Procedure	64
7.3. Test Results.....	64
8. BAND EDGE COMPLIANCE TEST	67
8.1. Limit.....	67
8.2. Test Produce	67
8.3. Test Results	67
9. POWER SPECTRAL DENSITY TEST.....	76
9.1. Block Diagram of Test Setup	76
9.2. Limit.....	76
9.3. Test Procedure	76

9.4. Test Results..... 77

10. ANTENNA REQUIREMENT.....80

10.1. STANDARD APPLICABLE 80

10.2. ANTENNA CONNECTED CONSTRUCTION..... 80

11. DEVIATION TO TEST SPECIFICATIONS81

Appendix A. Photograph of Test

Appendix B. Photo of the EUT

TEST REPORT

Applicant : Acer Incorporated
Manufacturer : Acer Incorporated
Product : Notebook Computer
FCC ID : HLZGW1541P
(A) Model No. : N24B4; Aspire Lite 15; AL15-41P; AL15-42P;
GW15-41P
(B) Brand : acer; Gateway
(C) Test Voltage : AC 120V/60Hz

Tested for comply with:

FCC CFR47 Part 15 Subpart C
Test procedure used: ANSI C63.10:2020+Cor1:2023;
KDB 558074 D01v05r02

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

This report applies to single evaluation of one sample of above mentioned product and shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U. S. Government.

Date of Test : Nov.26~Dec.30, 2024 Date of Report: Jan.09, 2025

Prepared by : April Zeng Reviewed by : Thomas Chen
April Zeng / Assistant Thomas Chen / Assistant Manager



Approved & Authorized Signer : Signature: Sunny Li
Sunny Li / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10:2020+COR1:2023	PASS
Radiated Emission Test	FCC Part 15: 15.209 FCC Part 15: 15.205 FCC Part 15: 15.247(d) ANSI C63.10:2020+COR1:2023	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(d) ANSI C63.10:2020+COR1:2023	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1) ANSI C63.10:2020+COR1:2023	PASS
6dB Bandwidth Test	FCC Part 15: 15.247(a)(2) ANSI C63.10:2020+COR1:2023	PASS
Maximum Peak Output Power Test	FCC Part 15: 15.247(b)(1) ANSI C63.10:2020+COR1:2023	PASS
Band Edge Compliance Test	FCC Part 15: 15.247(d) ANSI C63.10:2020+COR1:2023	PASS
Power Spectral Density Test	FCC Part 15: 15.247(e) ANSI C63.10:2020+COR1:2023	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Note: Measurement uncertainty affection to the result is not considered, the EUT is technically compliant with standard requirements.		

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

Applicant	Acer Incorporated
Applicant Address	8F., No.88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221 Taiwan
Manufacturer	Acer Incorporated
Manufacturer Address	8F., No.88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221 Taiwan
Product	Notebook Computer
Model No.	N24B4; Aspire Lite 15; AL15-41P; AL15-42P; GW15-41P Model Difference declared by applicant: marketing purpose or color deviation
Test Model	N24B4
Brand	acer; Gateway
FCC ID	HLZGW1541P
Sample Type	Prototype production
Date of Receipt	Nov.19, 2024
Date of Test	Nov.26~Dec.30, 2024
Remark: This report only for BLE.	


2.2.Feature of Equipment Under Test

Product Feature & Specification		
Product	Notebook Computer	
Model No.	N24B4	
Power Source	☒ Commercial Power	AC 100-240V,50-60Hz ,1.6A
	☒ External Power Source	DC 5V 3A/ DC 9V 3A/ DC 12V 3A/ DC 15V 3A/ DC 20V 3.25A
	☐ Lithium battery	DC V, mAh
	☐ UM battery	DC V
Bluetooth		
Radio	BDR +EDR; BLE	
Frequency Range	2402-2480MHz	
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK	
Data Rate	1Mbps, 2Mbps, 3Mbps	
Quantity of Channels	79/40	
Channel Separation	1MHz/2MHz	
Antenna System		
Type of Antenna	FPC Antenna	
Antenna Peak Gain	Bluetooth Peak Gain: 2.93dBi.	
Remark: This report is for BLE radio specification only. EUT also supports other radio specification as below listed: BDR+EDR (Test report No. ACS-F25001) BLE (Test report No. ACS-F25002) WiFi 2.4GHz (Test report No. ACS-F25003) WiFi 5GHz (Test report No. ACS-F25004) SAR (Test report No. ACS-SF25001) DFS (Test report No. ACS-F25008)		

2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Monitor	---	ASUS	PB287	---
		HDMI Cable: Shielded, Detachable, 1.8m Power Cord: Unshielded, Detachable, 1.8m			
2.	HDD#1	ACS-EMC-HDD42	WD	WD Elements	WXA1A7396898
		Data Cable: Shielded, Detachable, 0.4m			
3.	HDD#2	ACS-EMC-HDD43	WD	WD Elements	WX31E63TU717
		Data Cable: Shielded, Detachable, 0.4m			
4.	HDD#3	ACS-EMC-HDD34	WD	WD Elements	WCAV4302542
		Data Cable: Shielded, Detachable, 0.4m			
5.	Headphone	ACS-EMC-EP01	OVANN	0V-T880V	---
		Data Cable: Shielded, Detachable, 4.0m			
6.	Notebook	N/A	ACER	ZOW	N/A
		Power Cord(3C): Unshielded, Detachabled, 1.8m Power Adapter: Manufacturer: Lite-On, M/N: PA-1900-32 Data Cable: Shielded, Undetectable, 4.0m(Bond one ferrite core)			

2.4. Block Diagram of connection between EUT and simulators for power line conducted emission and radiated emission test:

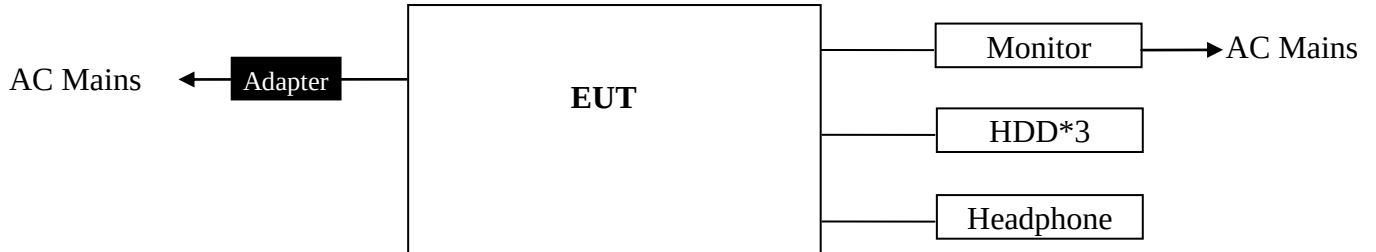

for the other test items:



(EUT: Notebook Computer)

2.5. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room(SE)	AUDIX	N/A	N/A	Nov.09,22	3 Year
2.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	3Year
3.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Mar.16,24	1 Year
5.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.07,24	1 Year
6.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jun.19,24	1 Year
7.	RF Cable	Eastsheep	RG223	190424	Sep.13,24	1Year
8.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	01313	Sep.26,24	1 Year
9.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.13,24	1 Year
10.	Coaxial Switch	Anritsu	MP59B	6201397223	Mar.17,24	1 Year
11.	RF Cable	TIMES MICROWAVE	SFT205-NMSM-10.00M	689241	Aug.13,24	1 Year
12.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Mar.17,24	1 Year
13.	Amplifier	EMCI	EMC0518A45SE	980965	Aug.13,24	1 Year
14.	Amplifier	KEYSIGHT	83017A	39500711	Mar.16,24	1 Year
15.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
16.	RF Cable	HUBER+SUHNER	SUCOFLEX-106	190423	Mar.16,24	1 Year
17.	Attenuator(10dB)	eastsheep	2W-SMA-JK-6G-10dB	No. 4	Sep.15,24	1 Year
18.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Mar.17,24	1 Year
19.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Sep.08,24	1 Year

Note: N/A means Not applicable.

2.6. Test information

A special software (AX Series MP Toolkit) was used to control EUT work in Continuous TX mode (GFSK modulation), and select test channel.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)	Channel	Frequency (MHz)
Tx Mode GFSK modulation	1,2	Low :CH 0	2402
	1,2	Middle: CH19	2440
	1,2	High: CH39	2480
Note: use the data rate which has the maximum power for the test.			

2.7. Test Facility
Site Description
Name of Firm

: Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab.

: Certificated by ISED, Canada
Company Number: 5183A
CAB identifier: CN0034
Valid Date: Mar.31, 2025

: Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2025


: Certificated by FCC, USA
Designation No: CN5022
Valid Date: Mar.31, 2025

2.8. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	2.6dB (150kHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	$\pm 3.8\text{dB}(30\sim 200\text{MHz}, \text{Polarization: H})$
	$\pm 3.8\text{dB}(30\sim 200\text{MHz}, \text{Polarization: V})$
	$\pm 4.0\text{dB}(200\text{M}\sim 1\text{GHz}, \text{Polarization: H})$
	$\pm 4.0\text{dB}(200\text{M}\sim 1\text{GHz}, \text{Polarization: V})$
Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz)	$\pm 4.0\text{dB}(1\sim 6\text{GHz}, \text{Distance: 3m})$
	$\pm 4.0\text{dB}(6\sim 25\text{GHz}, \text{Distance: 3m})$
Uncertainty for S_{VSWR} in 3m chamber	$\pm 2.8\text{dB}(1\sim 6\text{GHz}, \text{Distance: 3m})$
	$\pm 2.8\text{dB}(6\sim 25\text{GHz}, \text{Distance: 3m})$
Uncertainty for Radiated Spurious Emission test in RF chamber	$\pm 3.7\text{dB}(30\text{MHz}\sim 1000\text{MHz})$
	$\pm 3.3\text{dB}(1\sim 26.5\text{GHz})$
Uncertainty for Conduction Spurious emission test	$\pm 2.0\text{dB}$
Uncertainty for Output power test	$\pm 0.8\text{dB}$
Uncertainty for Bandwidth test	$\pm 83\text{kHz}$
Uncertainty for DC power test	$\pm 1\%$
Uncertainty for test site temperature and humidity	$\pm 0.6^{\circ}\text{C}$
	$\pm 3\%$

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Block Diagram of Test Setup

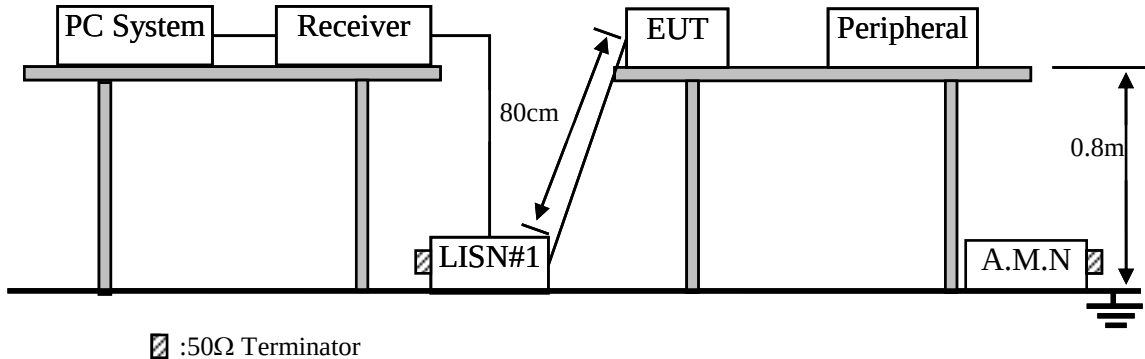

3.2. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limits shall apply at the transition frequencies.

3. Emission Level (dBμV) = Factor (L.I.S.N.) (dB) + Cable Loss (dB)+Reading (Receiver) (dBμV)

3.3. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.3.1. Notebook Computer (EUT)

Model No. : N24B4

Serial No. : N/A

3.3.2. Support Equipment: As Tested Supporting System Details, in Section 2.3.

3.4.Operating Condition of EUT

- 3.4.1. Setup the EUT as shown as Section 3.1.
- 3.4.2. Turn on the power of EUT.
- 3.4.3. PC run test software to control EUT work in Tx mode.

3.5.Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via Adapter unit connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.6.Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

1Mbps:

Data: 3

File: E:\1#CE\2024 Report Data\L\LanChen\A1Z2411083-RF.EM6 (10)

Date: 2024-12-28

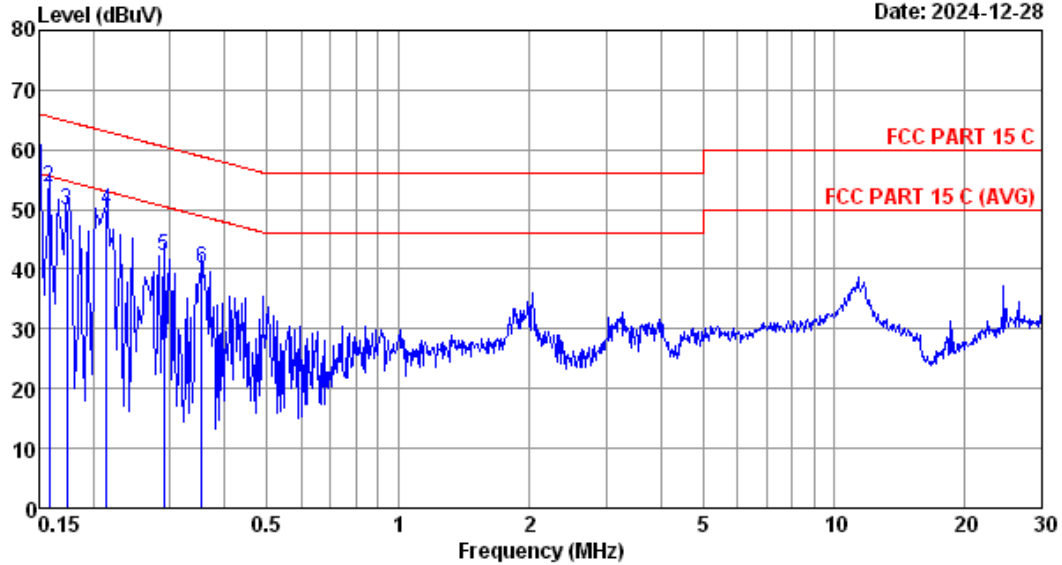


Site no :1# CE
Dis./Lisn :2024 ENV216-N
Limit :FCC PART 15 C
Env./Ins. :25.3°C/34%
Power Rating :AC 120V/60Hz
Test Mode :BLE1M TX Mode

Data No :3
Engineer :Hongjie

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.76	0.01	51.75	61.52	66.00	4.48	QP
2	0.158	9.76	0.01	43.87	53.64	65.56	11.92	QP
3	0.174	9.77	0.01	40.03	49.81	64.77	14.96	QP
4	0.214	9.78	0.01	40.05	49.84	63.05	13.21	QP
5	0.289	9.78	0.01	32.40	42.19	60.54	18.35	QP
6	0.354	9.78	0.02	30.38	40.18	58.87	18.69	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

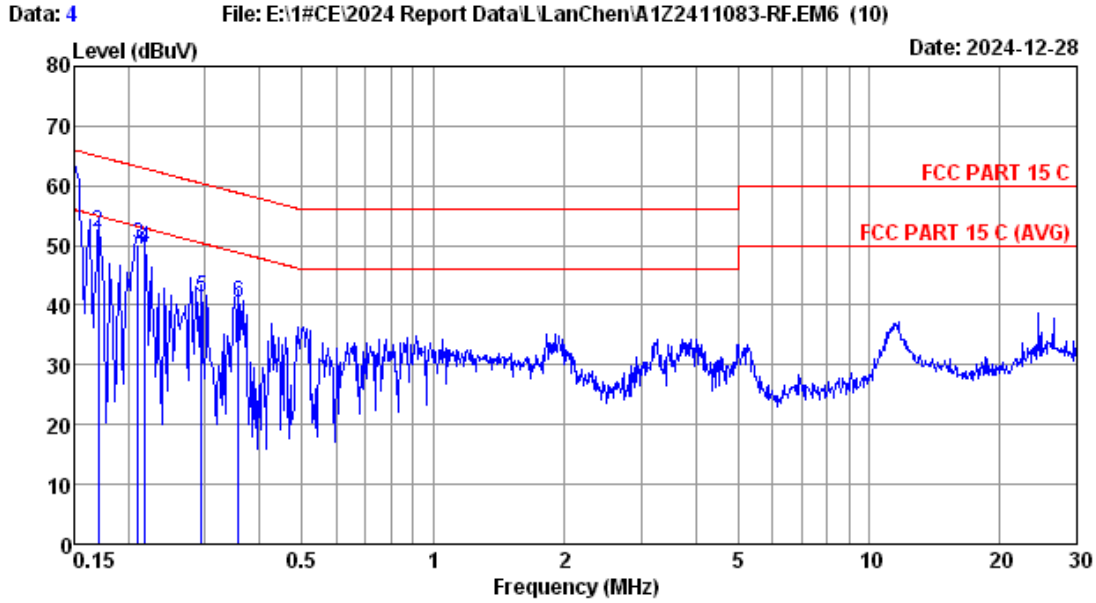

Site no :1# CE Data No :4
 Dis./Lisn :2024 ENV216-L
 Limit :FCC PART 15 C
 Env./Ins. :25.3°C/34% Engineer :Hongjie
 Power Rating :AC 120V/60Hz
 Test Mode :BLE1M TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.77	0.01	52.10	61.88	66.00	4.12	QP
2	0.170	9.77	0.01	42.58	52.36	64.94	12.58	QP
3	0.211	9.76	0.01	40.51	50.28	63.18	12.90	QP
4	0.219	9.76	0.01	39.87	49.64	62.88	13.24	QP
5	0.294	9.76	0.01	31.70	41.47	60.41	18.94	QP
6	0.358	9.76	0.02	30.64	40.42	58.78	18.36	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

2Mbps:

Data: 5

File: E:\1#CE\2024 Report Data\L\LanChen\A1Z2411083-RF.EM6 (10)

Date: 2024-12-28

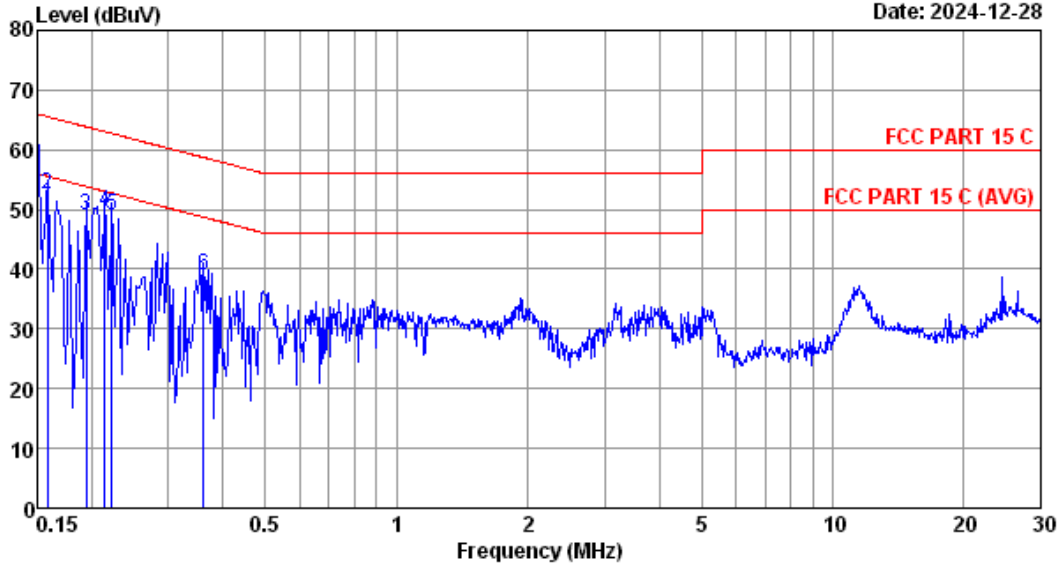

Site no :1# CE
Dis./Lisn :2024 ENV216-L
Limit :FCC PART 15 C
Env./Ins. :25.3°C/34%
Power Rating :AC 120V/60Hz
Test Mode :BLE2M TX Mode

Data No :5
Engineer :Hongjie


No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.77	0.01	51.56	61.34	66.00	4.66	QP
2	0.158	9.77	0.01	42.79	52.57	65.56	12.99	QP
3	0.194	9.76	0.01	39.30	49.07	63.84	14.77	QP
4	0.214	9.76	0.01	39.89	49.66	63.05	13.39	QP
5	0.222	9.76	0.01	39.38	49.15	62.74	13.59	QP
6	0.361	9.76	0.02	29.20	38.98	58.69	19.71	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector.
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Data: 6

File: E:\1#CE\2024 Report Data\LanChen\A1Z2411083-RF.EM6 (10)

Date: 2024-12-28

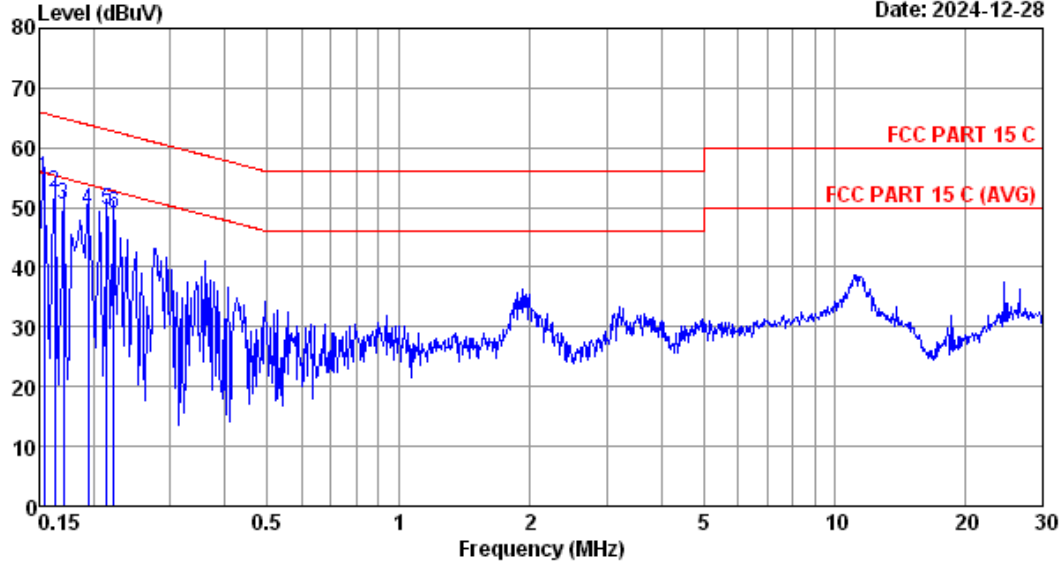

Site no :1# CE
Dis./Lisn :2024 ENV216-N
Limit :FCC PART 15 C
Env./Ins. :25.3°C/34%
Power Rating :AC 120V/60Hz
Test Mode :BLE2M TX Mode

Data No :6
Engineer :Hongjie


No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.154	9.76	0.01	45.20	54.97	65.78	10.81	QP
2	0.162	9.76	0.01	42.74	52.51	65.34	12.83	QP
3	0.170	9.77	0.01	40.74	50.52	64.94	14.42	QP
4	0.194	9.78	0.01	39.94	49.73	63.84	14.11	QP
5	0.214	9.78	0.01	39.67	49.46	63.05	13.59	QP
6	0.222	9.78	0.01	39.29	49.08	62.74	13.66	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


4. RADIATED EMISSION MEASUREMENT

4.1. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

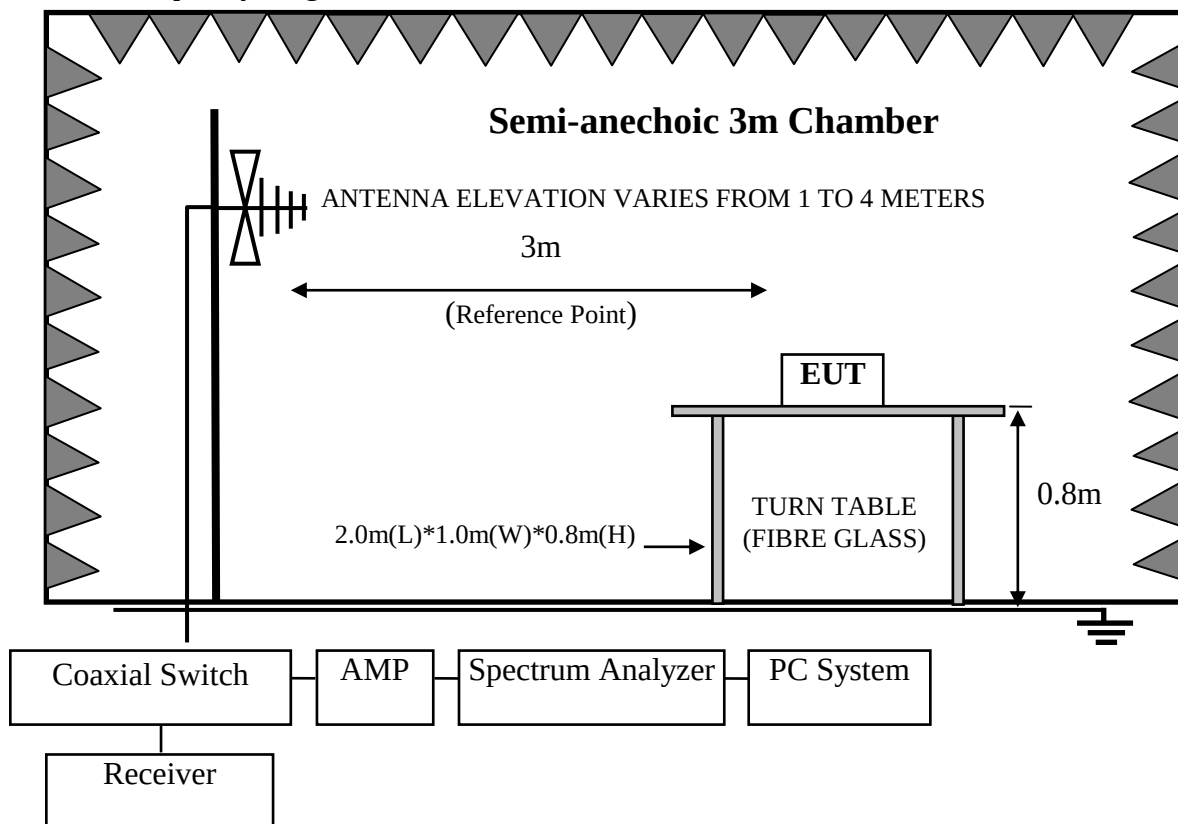

For frequency range 1GHz-25GHz

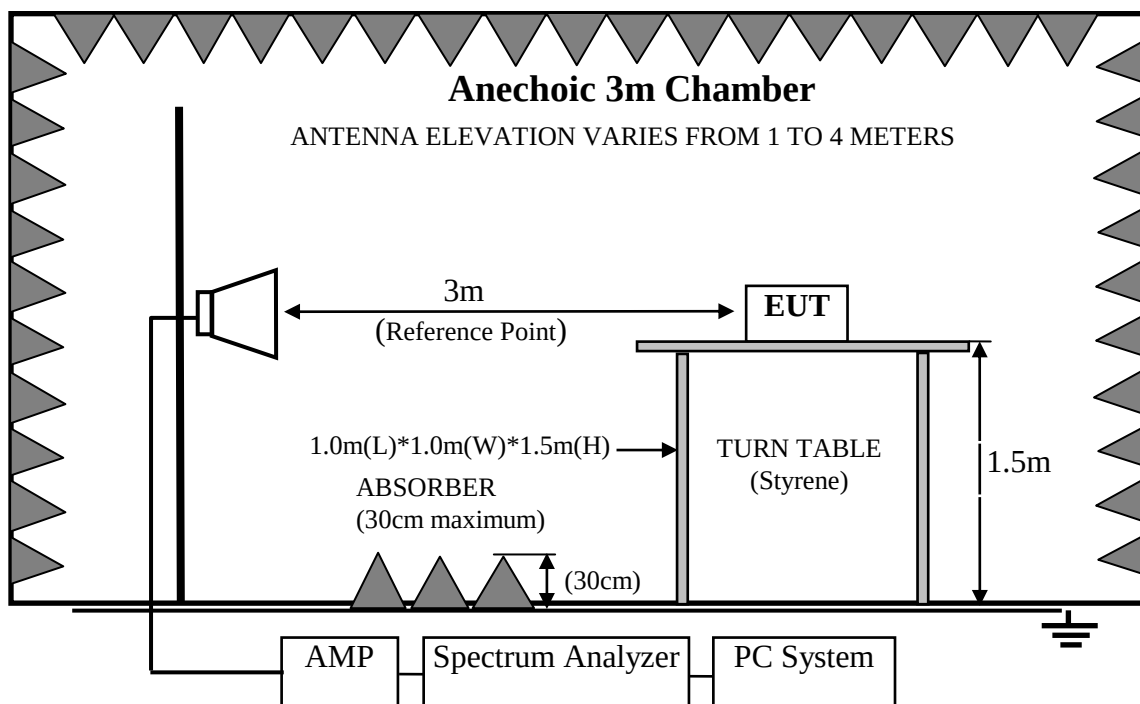

4.2. Radiated Emission Limits Standard:

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission Level ($\text{dB}\mu\text{V}/\text{m}$) = Reading (Receiver) ($\text{dB}\mu\text{V}$) + Antenna Factor (dB/m) + Cable Loss (dB)
Emission Level ($\text{dB}\mu\text{V}/\text{m}$) = Reading (Spectrum) ($\text{dB}\mu\text{V}$) + Antenna Factor (dB/m) – Amp Factor (dB) + Cable Loss (dB)(above 1000MHz)
 - (2) The smaller limits shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.3. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1. Notebook Computer (EUT)

Model Number : N24B4
Serial Number : N/A

4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT and simulator as shown as Section 4.1.
- 4.4.2. Turn on the power of all equipments.
- 4.4.3. Let EUT work in BLE Tx mode.

4.5. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found reported in report.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz.

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.6. Radiated Emission Test Results


PASS.

All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note: The duty cycle factor for calculate average level is 1Mbps 3.684dB for BLE, 2Mbps 9.00dB for BLE and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.


1Mbps:

$$\text{Duty cycle factor} = 20\log (1/\text{duty cycle}) = 3.648\text{dB}$$

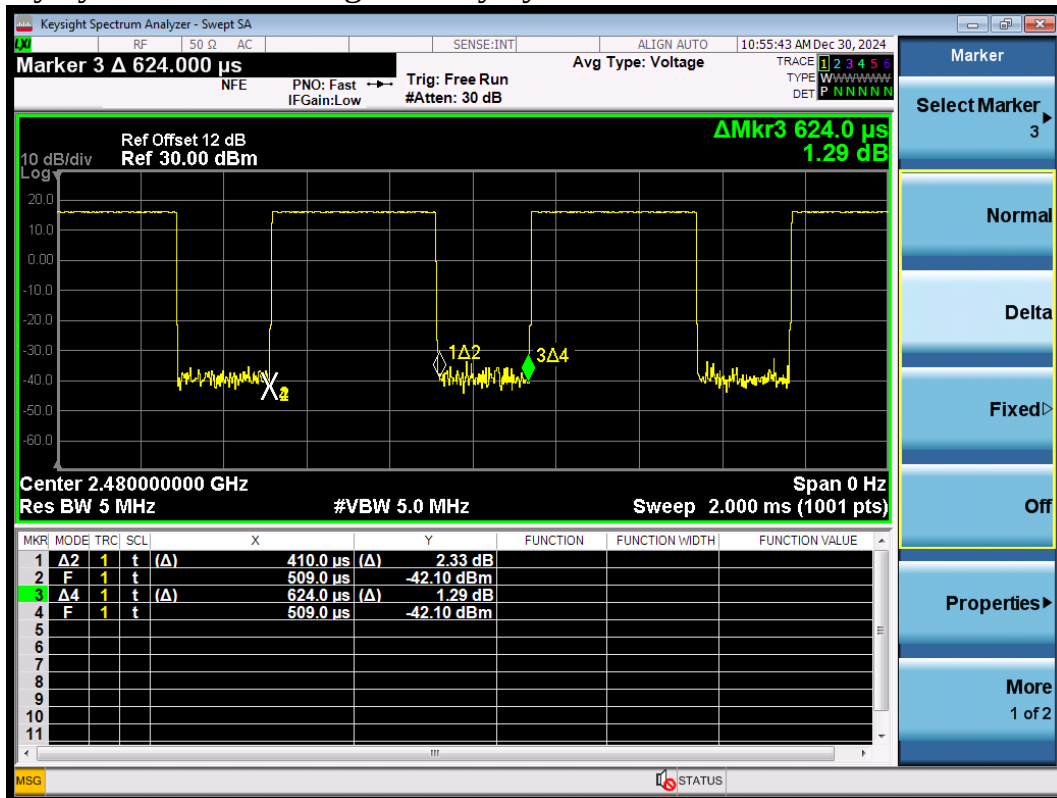


2Mbps:

$$\text{Duty cycle factor} = 20\log (1/\text{duty cycle}) = 9.00\text{dB}$$

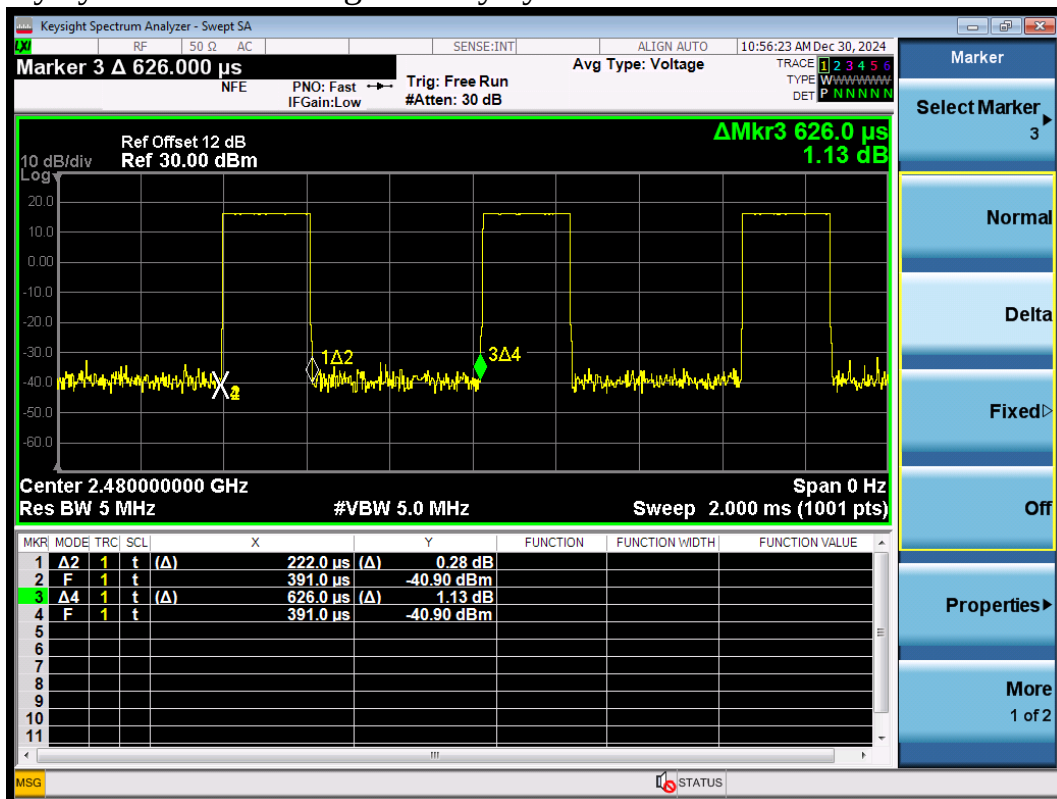

Frequency: 30MHz~1GHz
1Mbps:

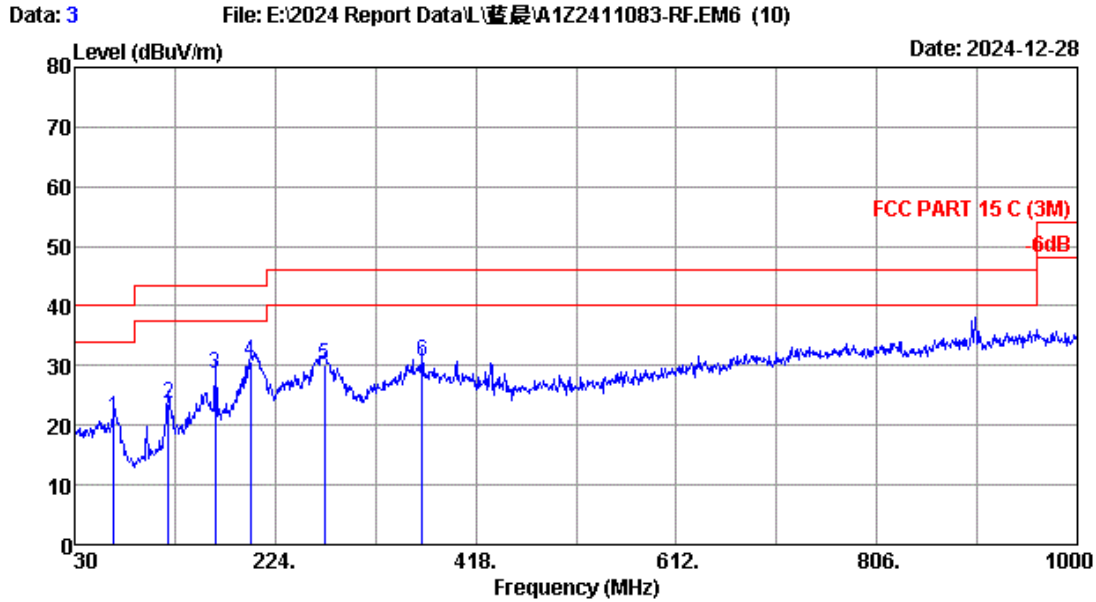


Site no. : 3m Chamber Data no. : 3
Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C (3M)
Env. / Ins. : 23.8°C/53% Engineer : Abel

Power rating : AC 120V/60Hz
Test Mode : BLE 1M TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	67.830	17.85	0.94	2.55	21.34	40.00	18.66	QP
2	121.180	17.02	1.22	5.39	23.63	43.50	19.87	QP
3	165.800	19.02	1.44	8.17	28.63	43.50	14.87	QP
4	199.750	15.92	1.61	13.10	30.63	43.50	12.87	QP
5	271.530	18.45	1.99	9.62	30.06	46.00	15.94	QP
6	366.590	20.90	2.58	7.24	30.72	46.00	15.28	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

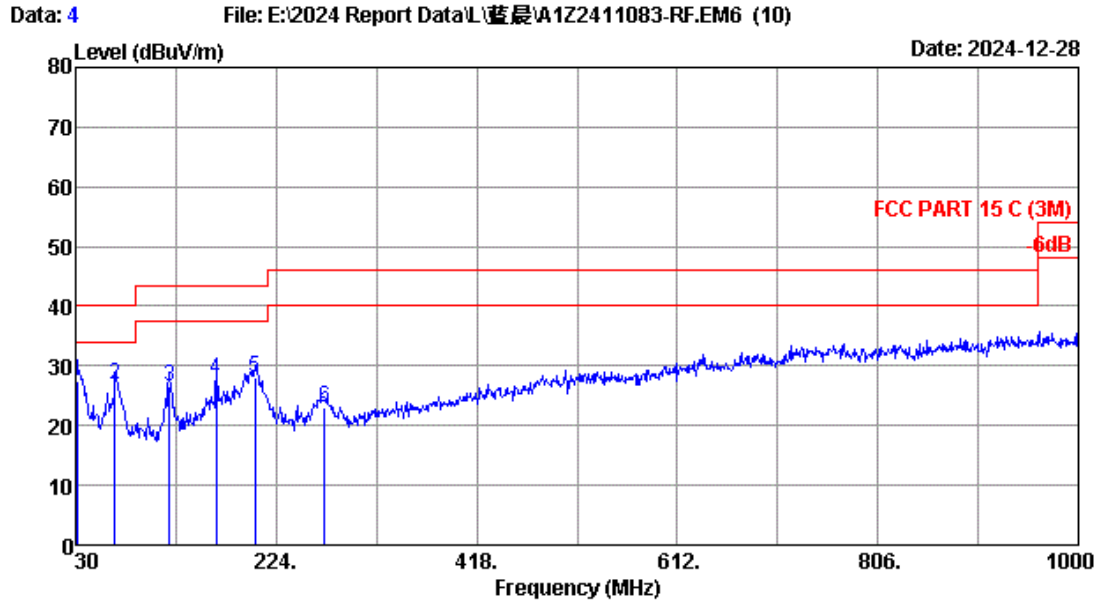


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.8°C/53% Engineer : Abel

Power rating : AC 120V/60Hz
 Test Mode : BLE 1M TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1	31.940	18.60	0.68	8.03	27.31	40.00	12.69	QP
2	67.830	17.85	0.94	8.09	26.88	40.00	13.12	QP
3	121.180	17.02	1.22	8.43	26.67	43.50	16.83	QP
4	165.800	19.02	1.44	7.40	27.86	43.50	15.64	QP
5	203.630	15.83	1.63	10.57	28.03	43.50	15.47	QP
6	270.560	18.36	1.98	2.59	22.93	46.00	23.07	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

2Mbps:

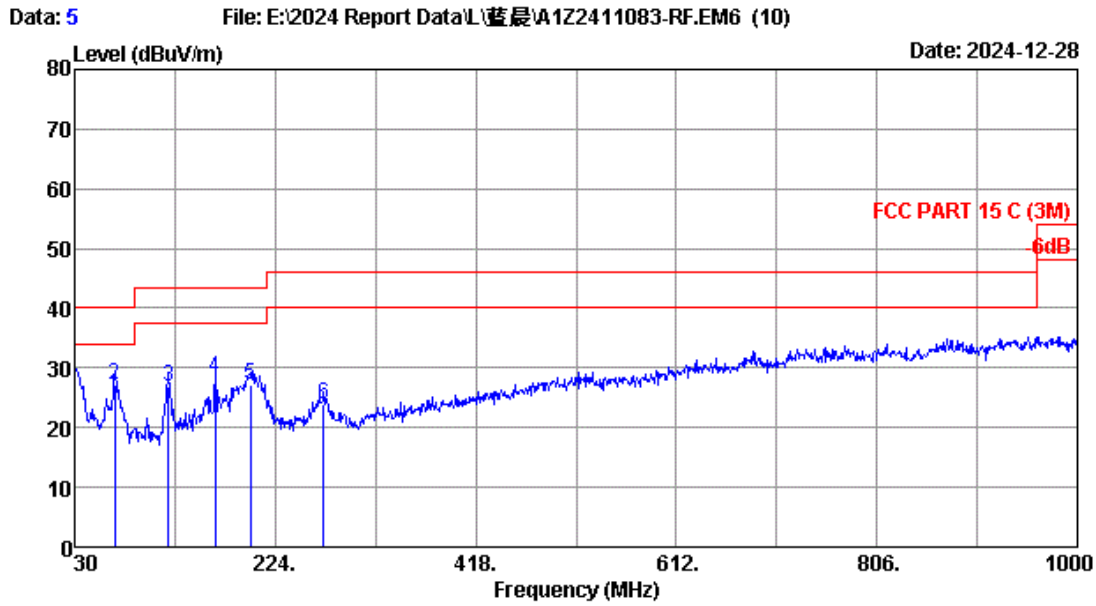


Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.8°C/53% Engineer : Abel

Power rating : AC 120V/60Hz
 Test Mode : BLE 2M TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	18.40	0.66	8.68	27.74	40.00	12.26	QP
2	68.800	17.64	0.95	8.54	27.13	40.00	12.87	QP
3	121.180	17.02	1.22	8.58	26.82	43.50	16.68	QP
4	165.800	19.02	1.44	7.95	28.41	43.50	15.09	QP
5	199.750	15.92	1.61	9.61	27.14	43.50	16.36	QP
6	270.560	18.36	1.98	3.63	23.97	46.00	22.03	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

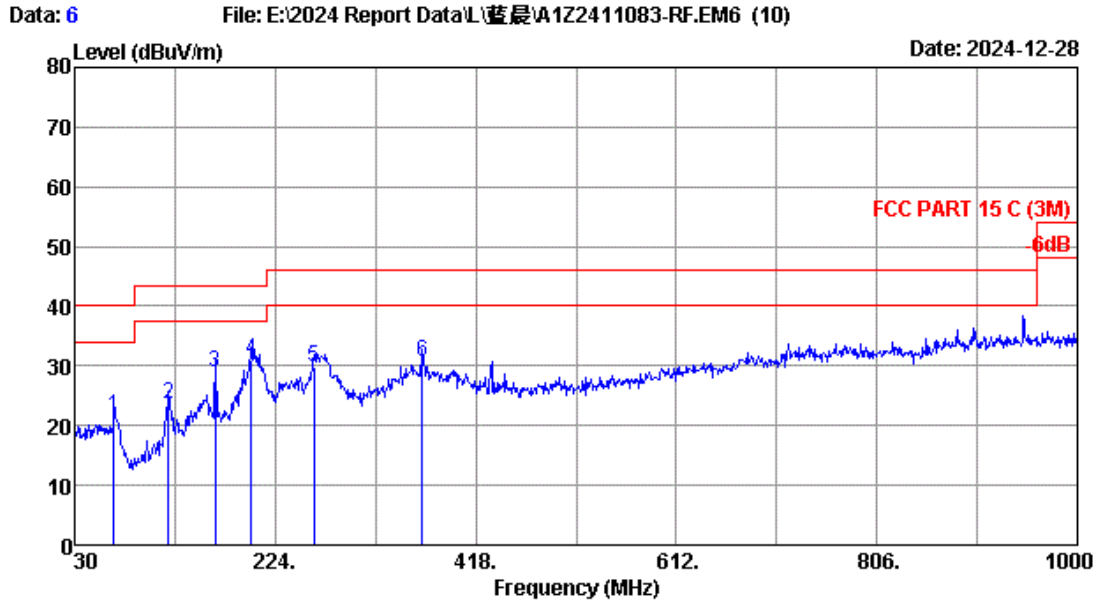

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.8°C/53% Engineer : Abel


Power rating : AC 120V/60Hz
 Test Mode : BLE 2M TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1	67.830	17.85	0.94	2.80	21.59	40.00	18.41	QP
2	121.180	17.02	1.22	5.35	23.59	43.50	19.91	QP
3	165.800	19.02	1.44	8.41	28.87	43.50	14.63	QP
4	200.720	15.89	1.61	13.58	31.08	43.50	12.42	QP
5	261.830	18.00	1.93	9.92	29.85	46.00	16.15	QP
6	366.590	20.90	2.58	7.28	30.76	46.00	15.24	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

1Mbps:

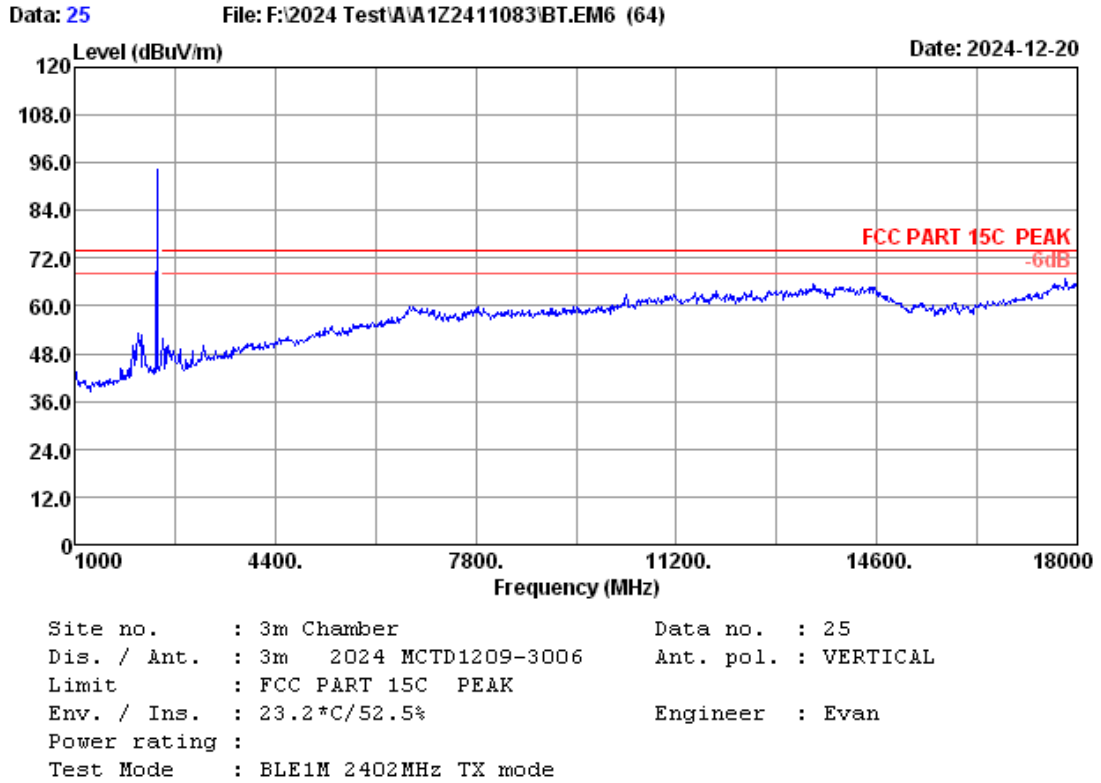


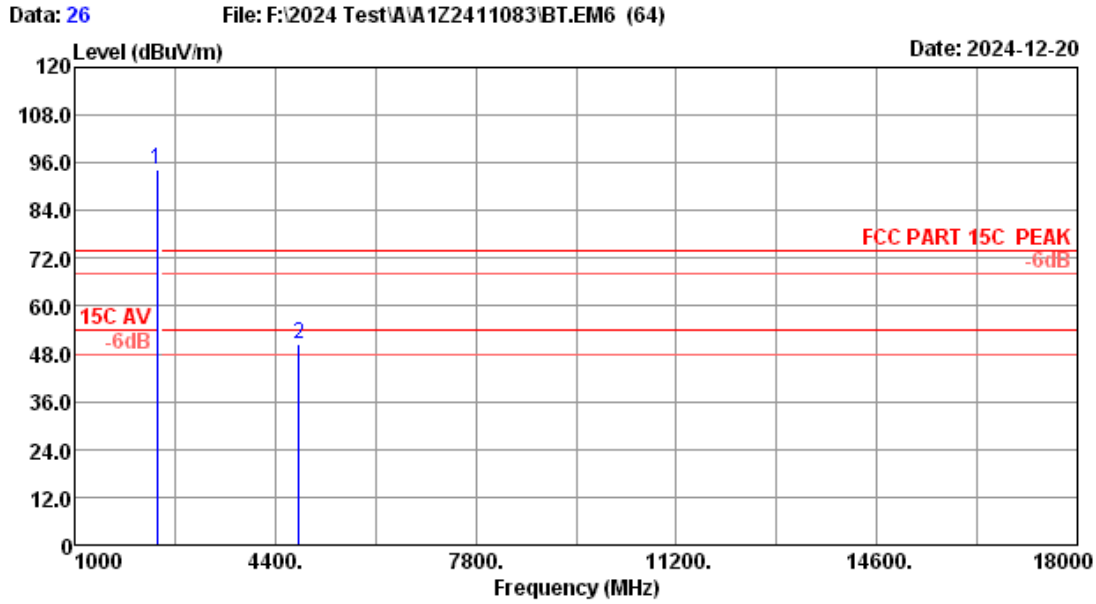


Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : BLE1M 2402MHz TX mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.70	5.23	93.19	31.70	94.42	-----	-----	Peak
2	4804.00	31.30	7.13	42.63	30.42	50.64	74.00	23.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

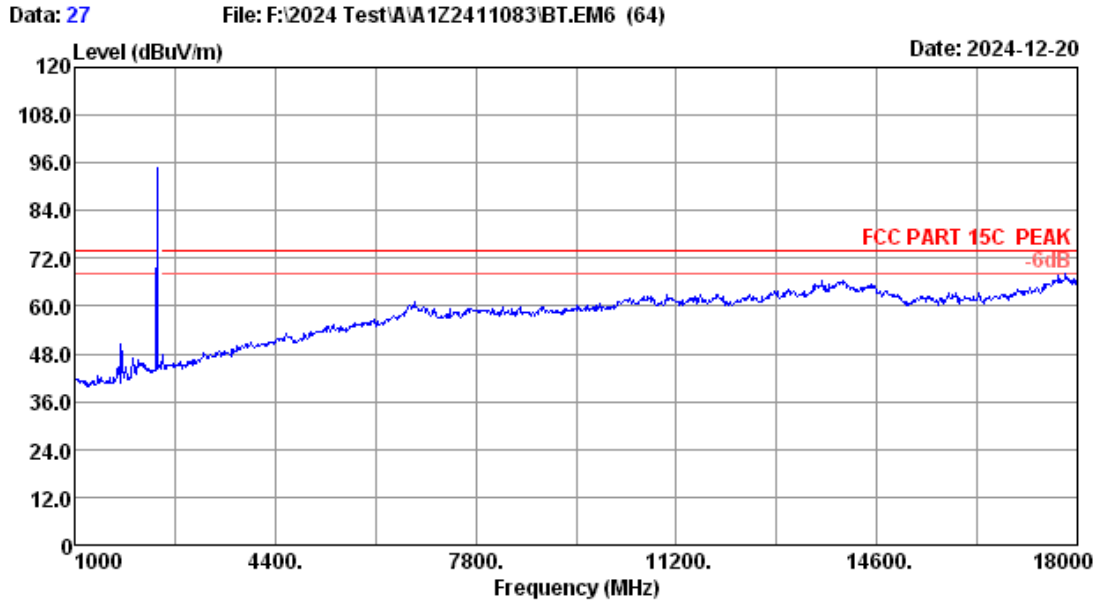


Site no.	: 3m Chamber	Data no.	: 27
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: BLE1M 2402MHz TX mode		

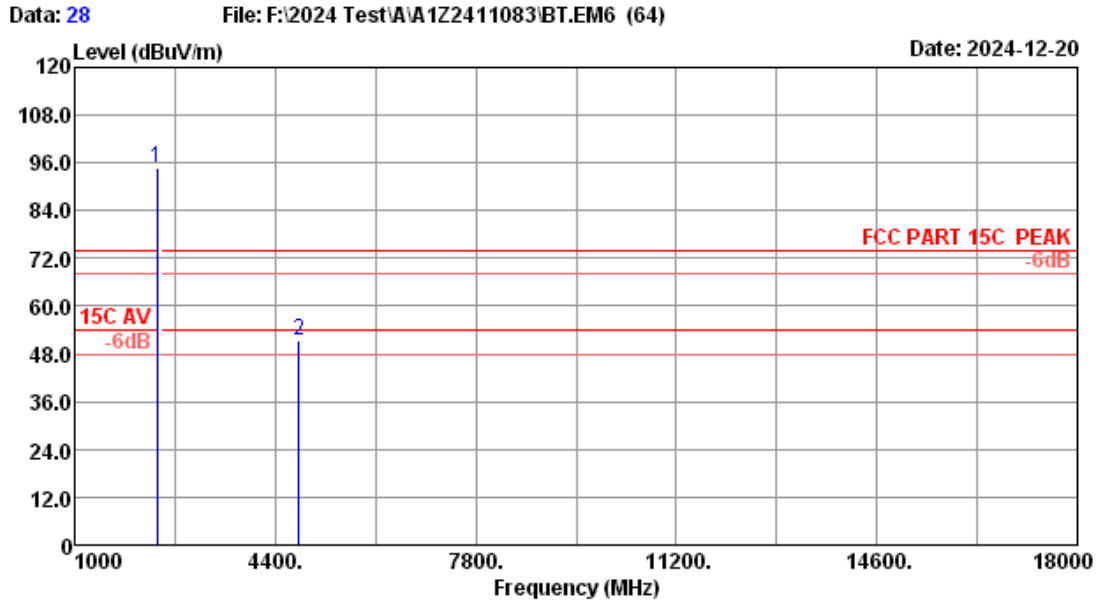


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : BLE1M 2402MHz TX mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.70	5.23	93.38	31.70	94.61	-----	-----	Peak
2	4804.00	31.30	7.13	43.45	30.42	51.46	74.00	22.54	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

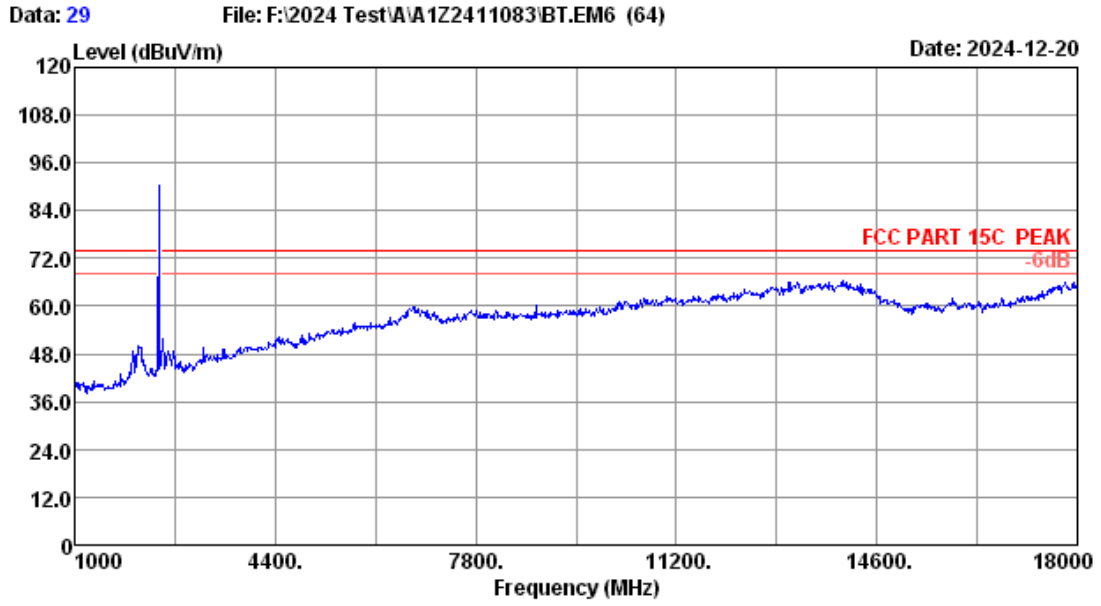


Site no.	: 3m Chamber	Data no.	: 29
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: BLE1M 2440 TX mode		

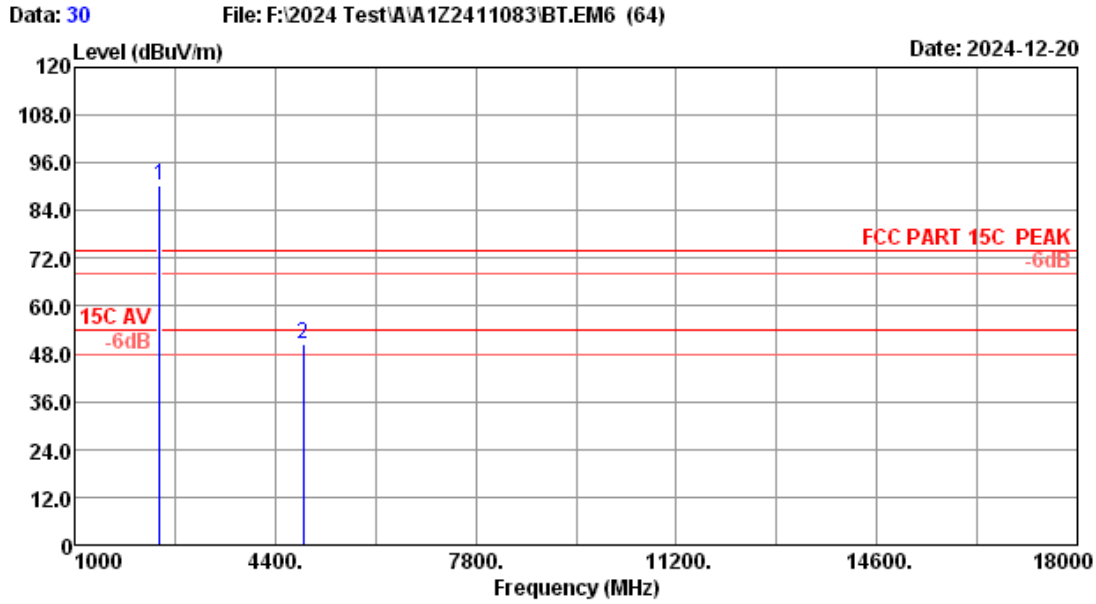


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : BLE1M 2440 TX mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.70	5.27	89.20	31.68	90.49	-----	-----	Peak
2	4880.00	31.36	7.18	42.52	30.41	50.65	74.00	23.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

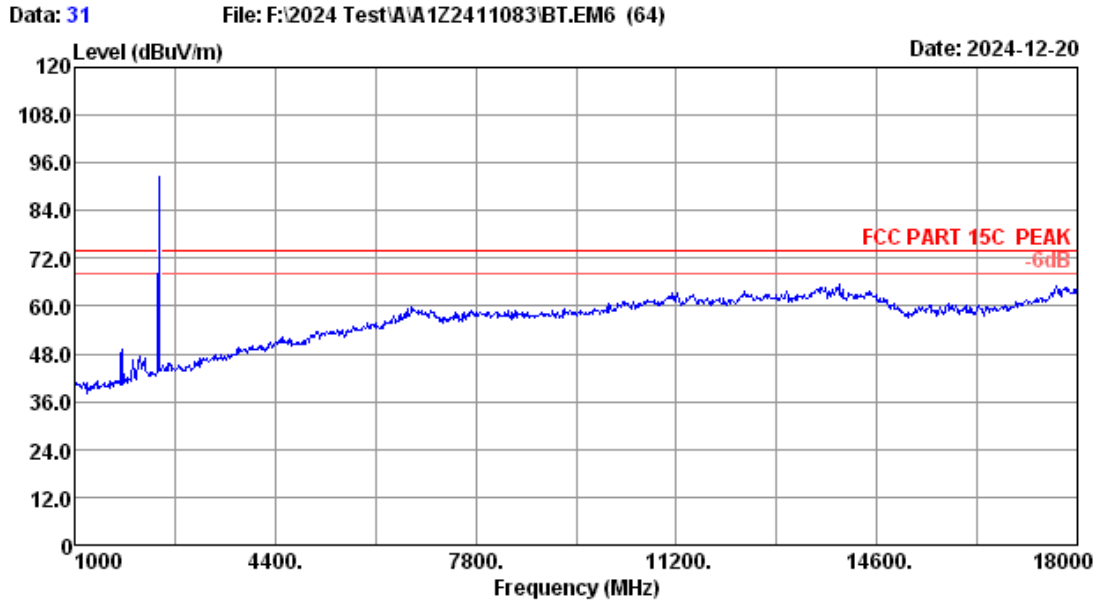


Site no.	: 3m Chamber	Data no.	: 31
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: BLE1M 2440 TX mode		

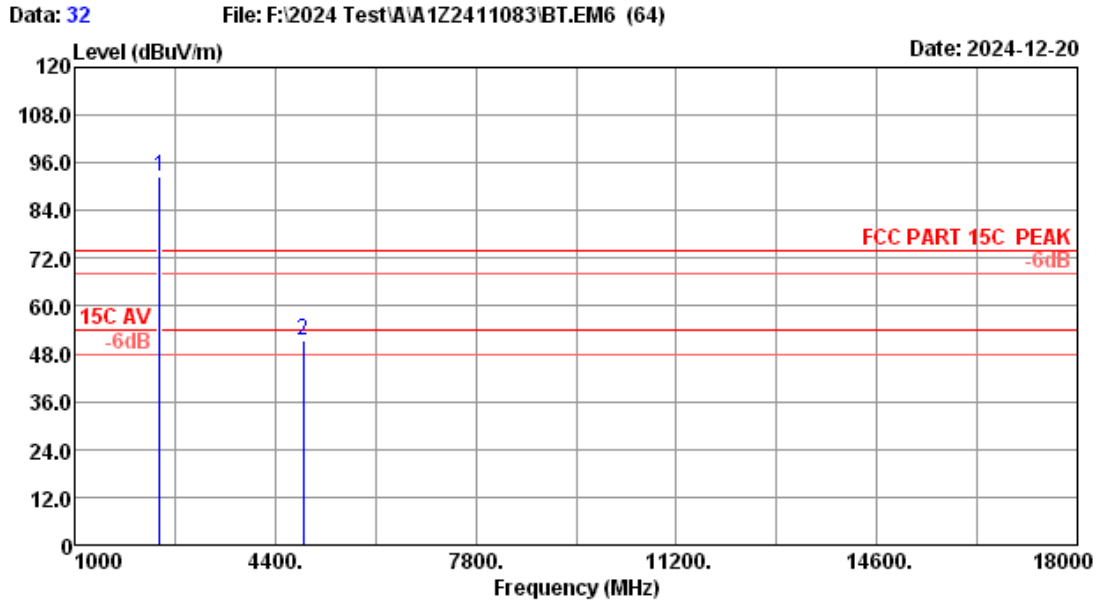


Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : BLE1M 2440 TX mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.70	5.27	91.46	31.68	92.75	-----	-----	Peak
2	4880.00	31.36	7.18	43.17	30.41	51.30	74.00	22.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

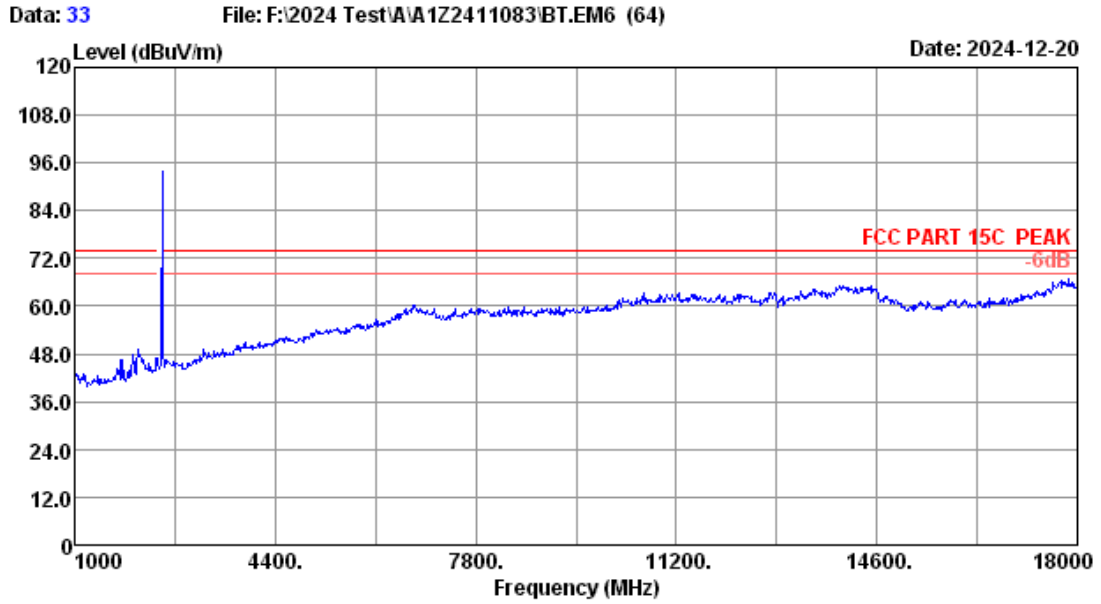


Site no.	: 3m Chamber	Data no.	: 33
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: BLE1M 2480 TX mode		

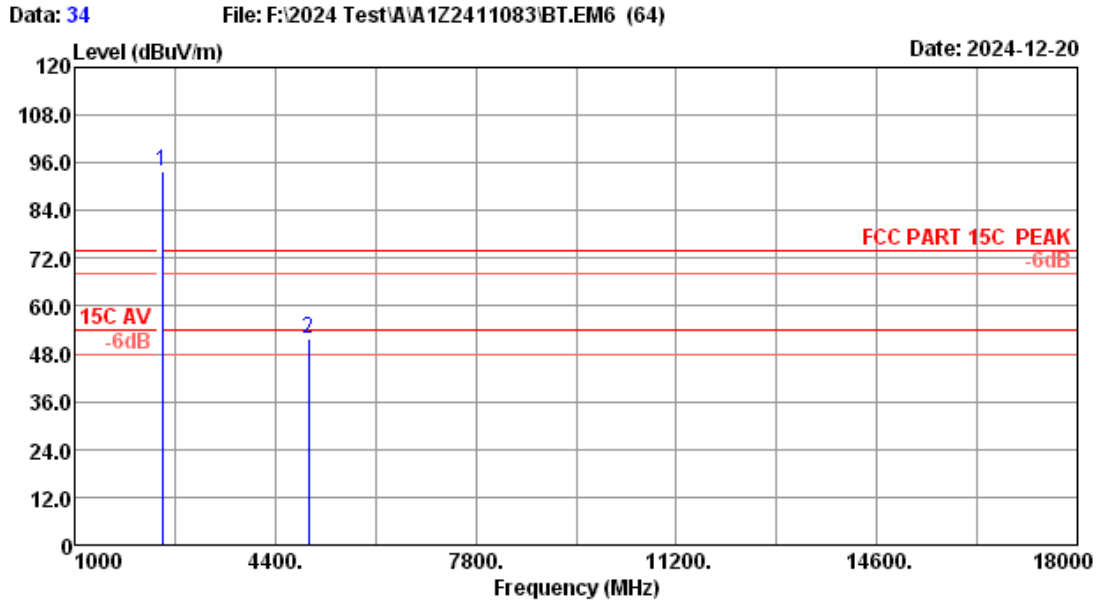


Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : BLE1M 2480 TX mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.82	5.30	92.62	31.66	94.08	-----	-----	Peak
2	4960.00	31.96	7.22	42.82	30.40	51.60	74.00	22.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

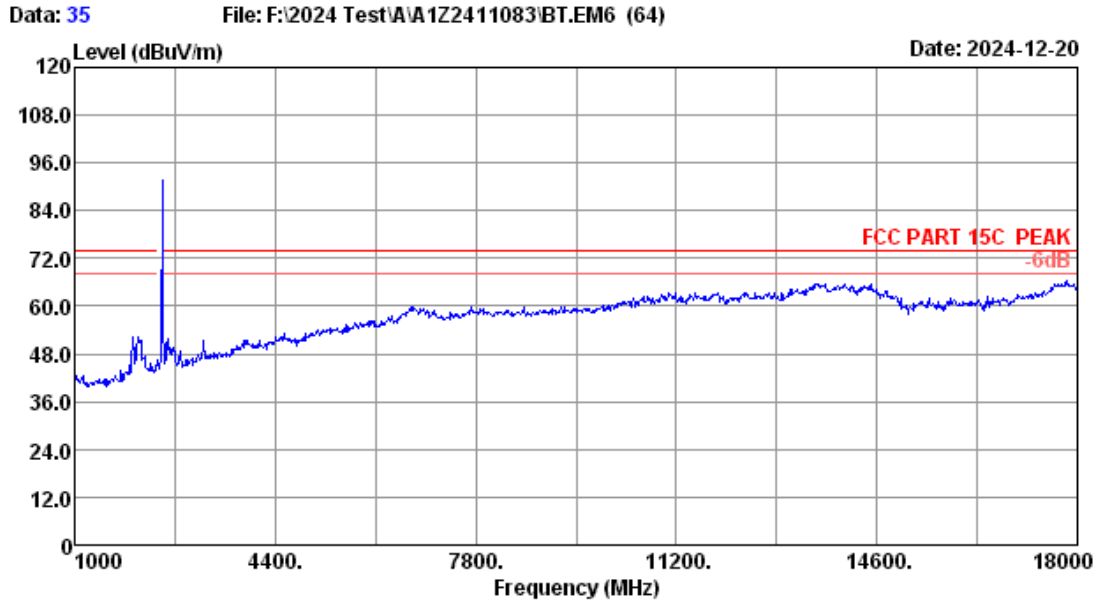

Site no.	: 3m Chamber	Data no.	: 35
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: BLE1M 2480 TX mode		

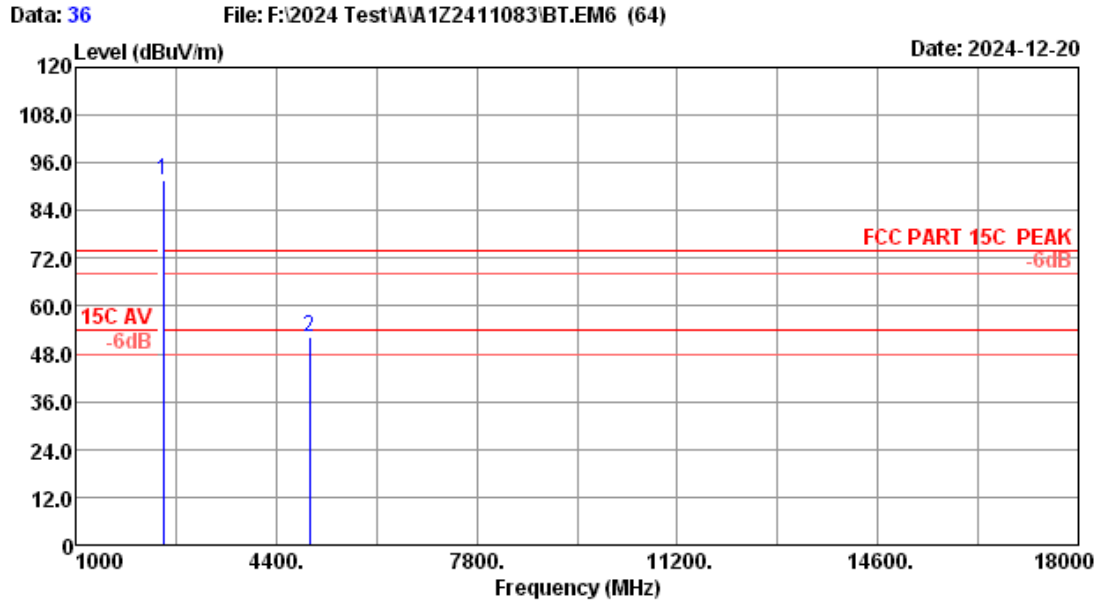


Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : BLE1M 2480 TX mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.82	5.30	90.31	31.66	91.77	-----	-----	Peak
2	4960.00	31.96	7.22	43.34	30.40	52.12	74.00	21.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

2Mbps:

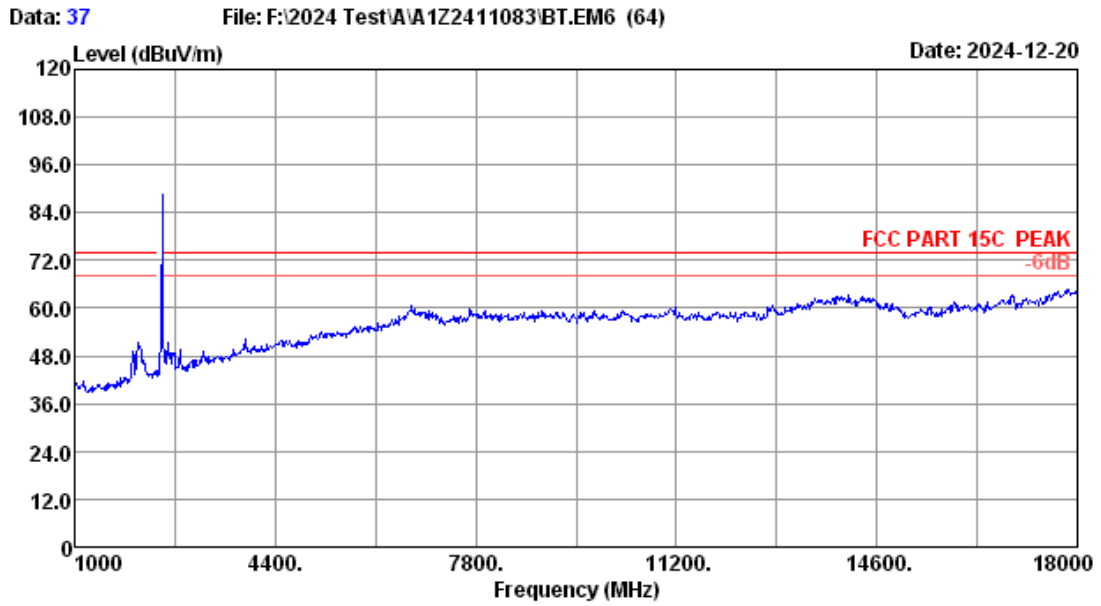


Site no.	: 3m Chamber	Data no.	: 37
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: BLE2M 2480 TX mode		

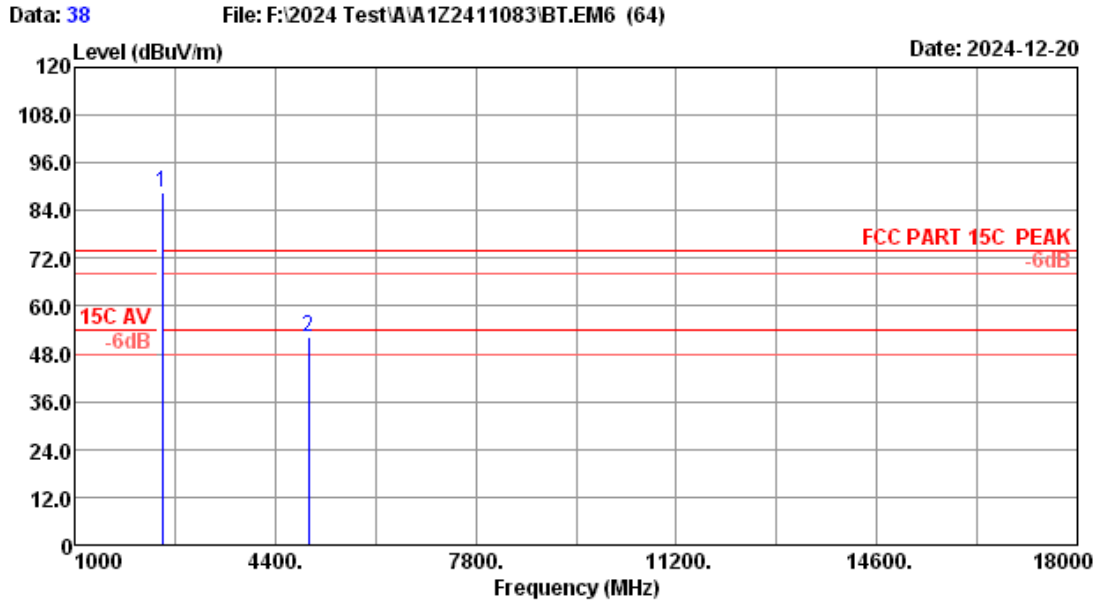


Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : BLE2M 2480 TX mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.82	5.30	87.17	31.66	88.63	-----	-----	Peak
2	4960.00	31.96	7.22	43.33	30.40	52.11	74.00	21.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

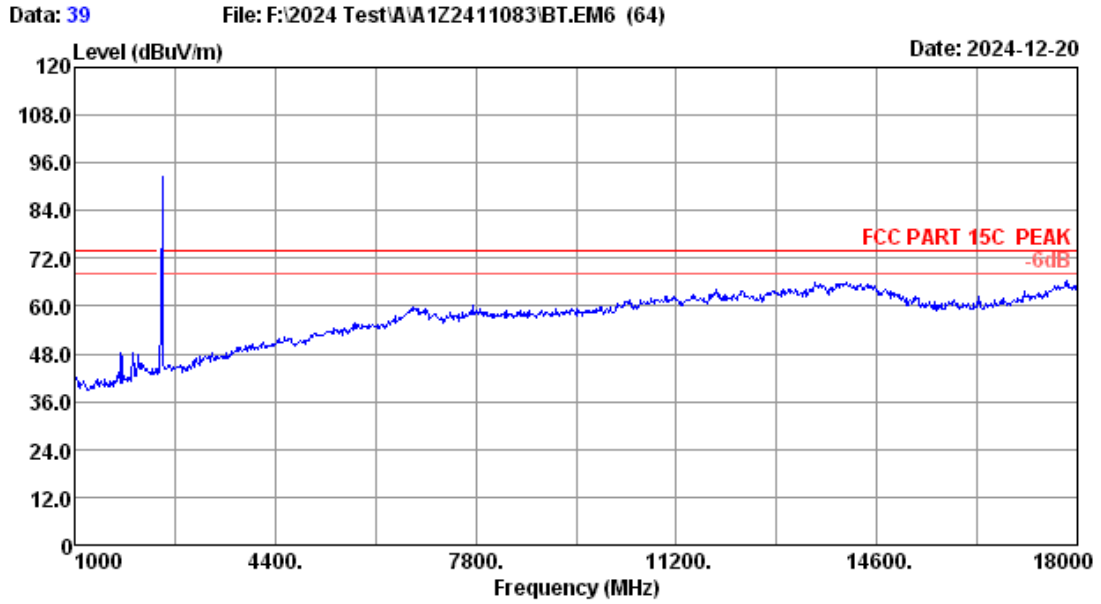


Site no.	: 3m Chamber	Data no.	: 39
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: BLE2M 2480 TX mode		

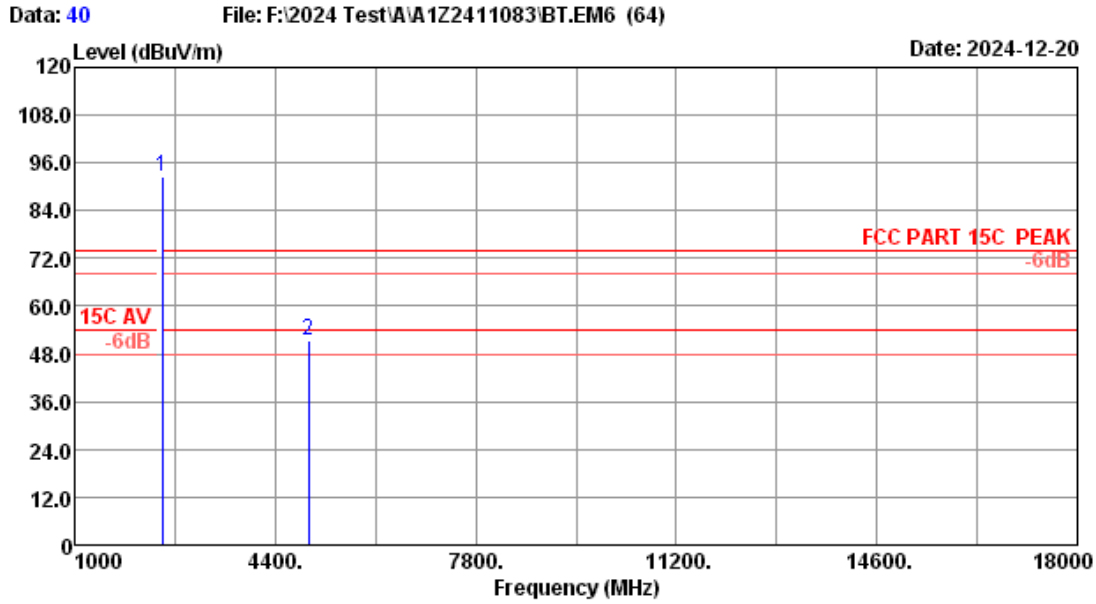


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : BLE2M 2480 TX mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.82	5.30	91.13	31.66	92.59	-----	-----	Peak
2	4960.00	31.96	7.22	42.62	30.40	51.40	74.00	22.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

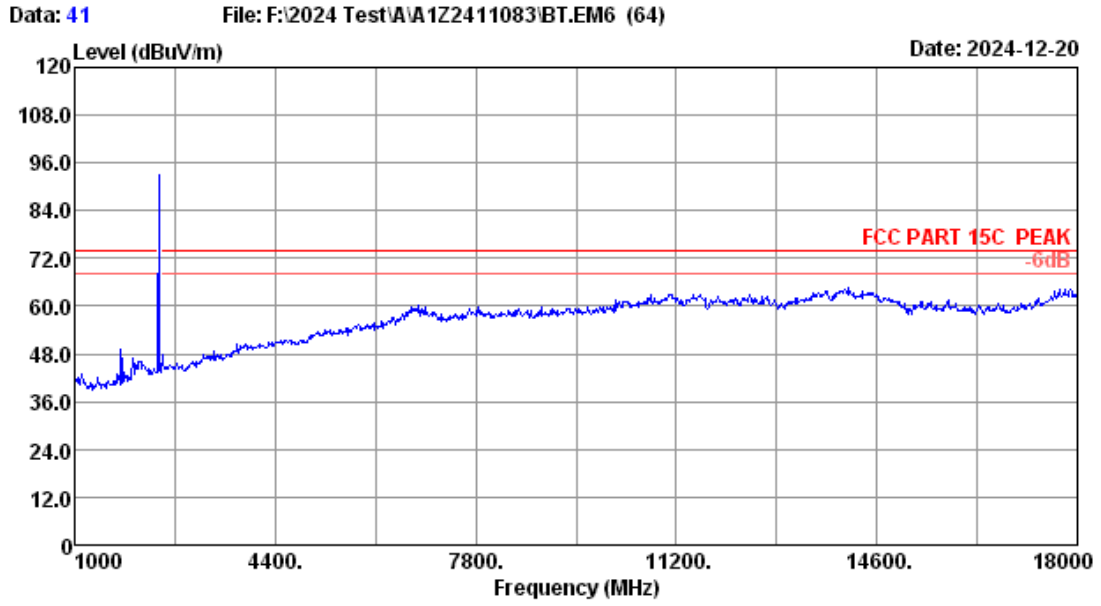


Site no.	: 3m Chamber	Data no.	: 41
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: BLE2M 2440 TX mode		

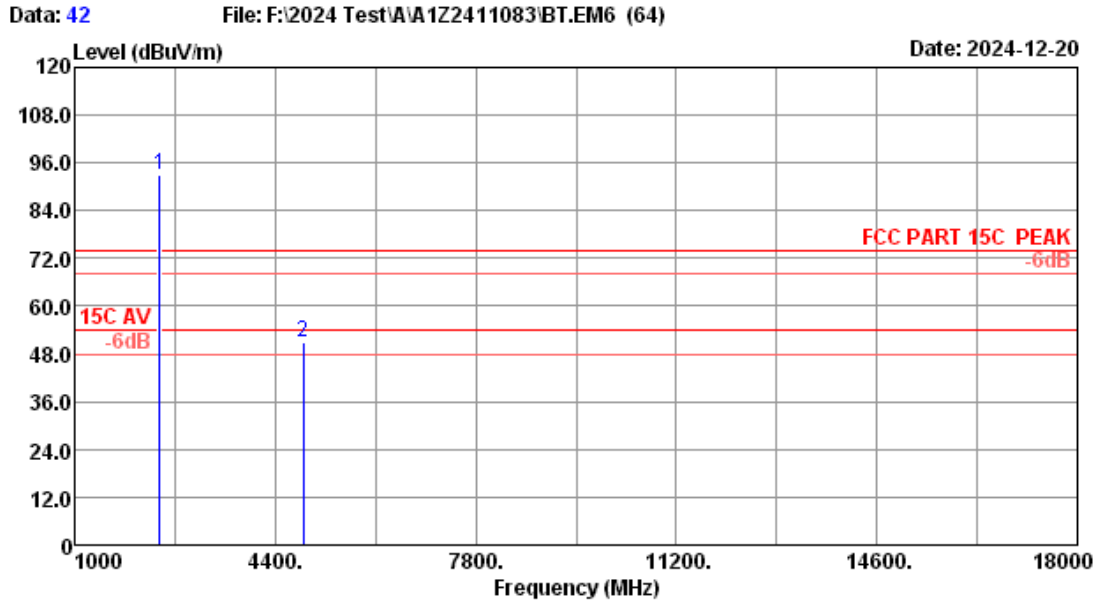


Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : BLE2M 2440 TX mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.70	5.26	91.87	31.68	93.15	-----	-----	Peak
2	4880.00	31.36	7.18	42.91	30.41	51.04	74.00	22.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

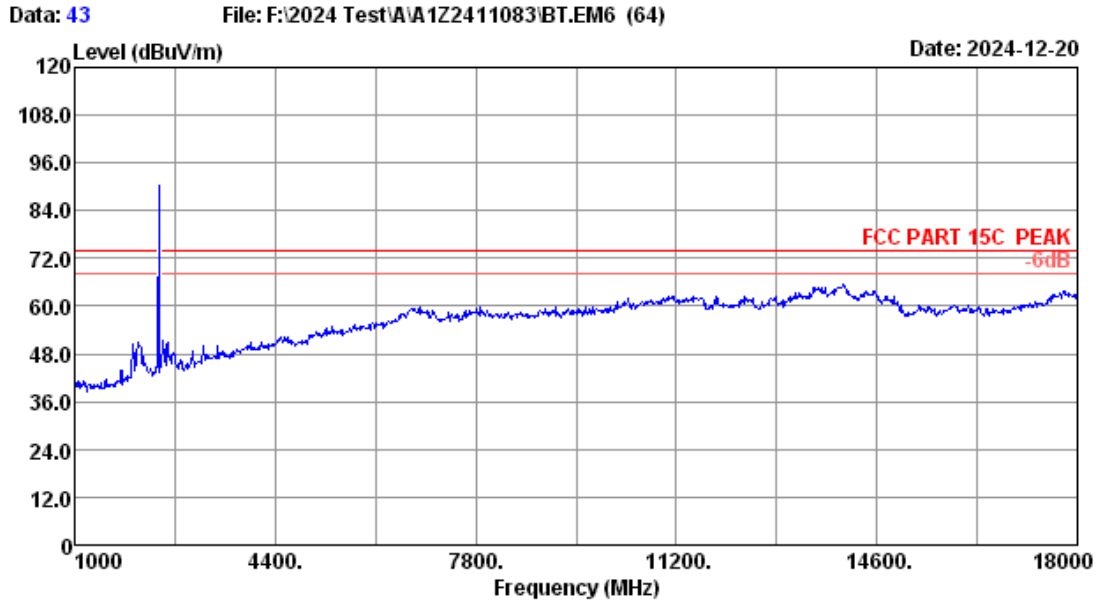


Site no.	: 3m Chamber	Data no.	: 43
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: BLE2M 2440 TX mode		

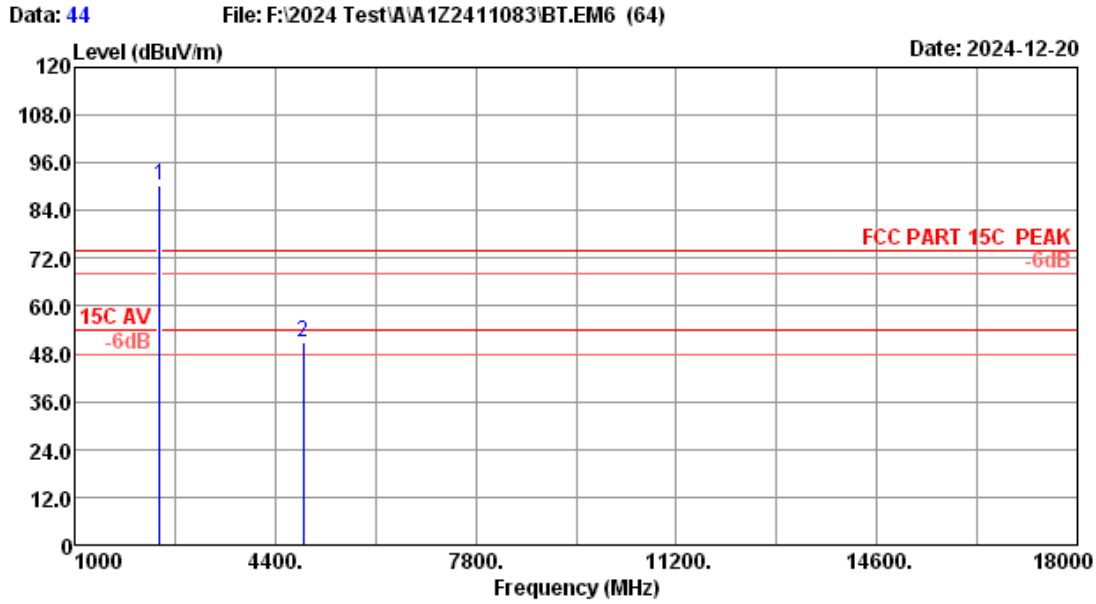


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : BLE2M 2440 TX mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.70	5.26	89.15	31.68	90.43	-----	-----	Peak
2	4880.00	31.36	7.18	42.90	30.41	51.03	74.00	22.97	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

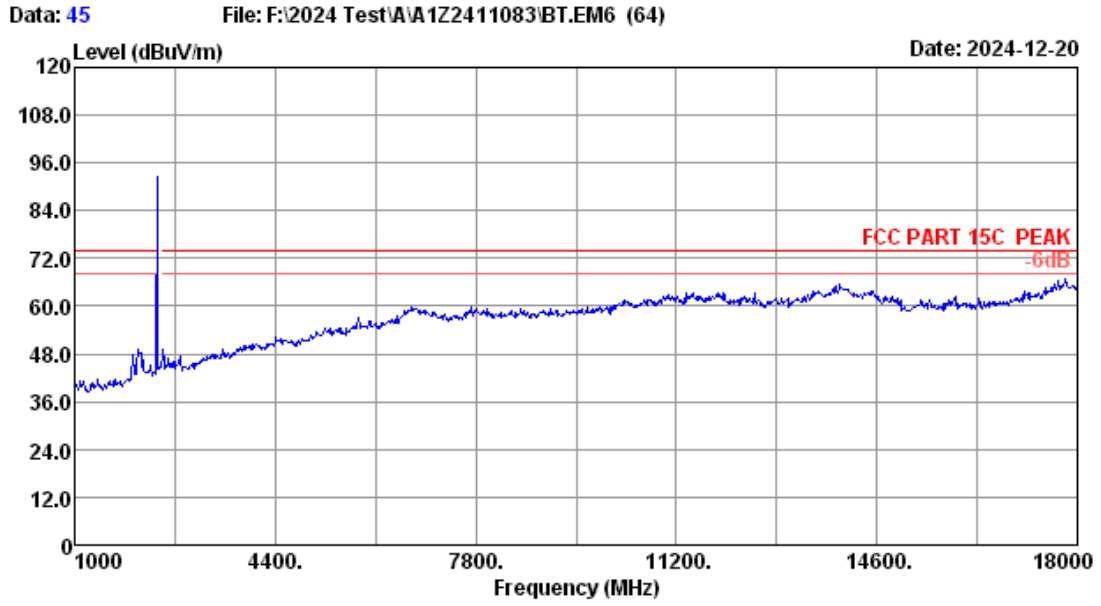


Site no.	: 3m Chamber	Data no.	: 45
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: BLE2M 2402 TX mode		

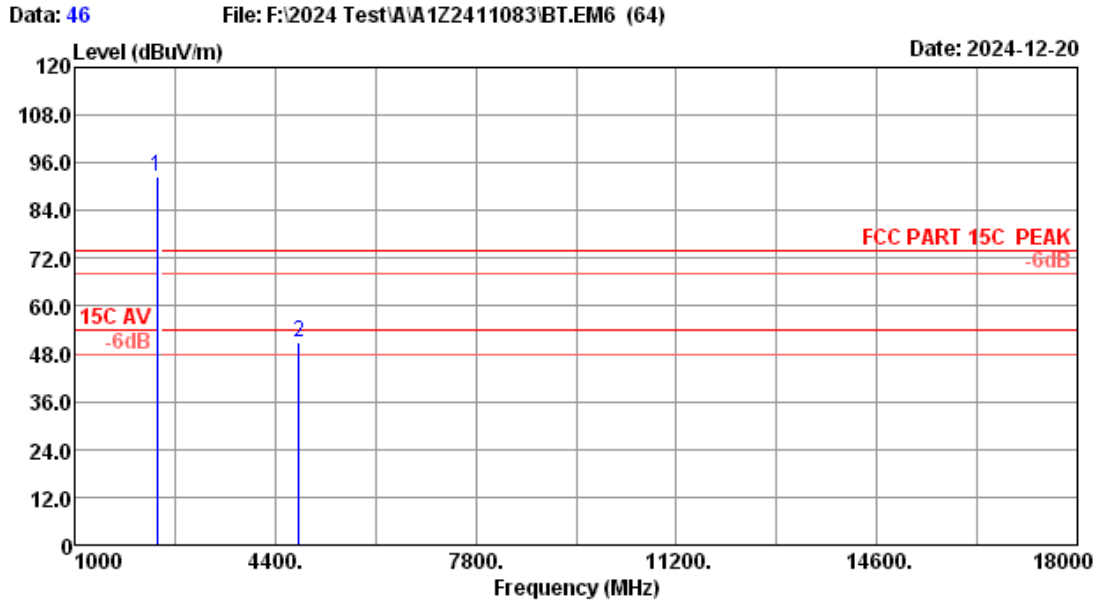


Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : BLE2M 2402 TX mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.70	5.22	91.20	31.70	92.42	-----	-----	Peak
2	4804.00	31.30	7.14	42.89	30.42	50.91	74.00	23.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

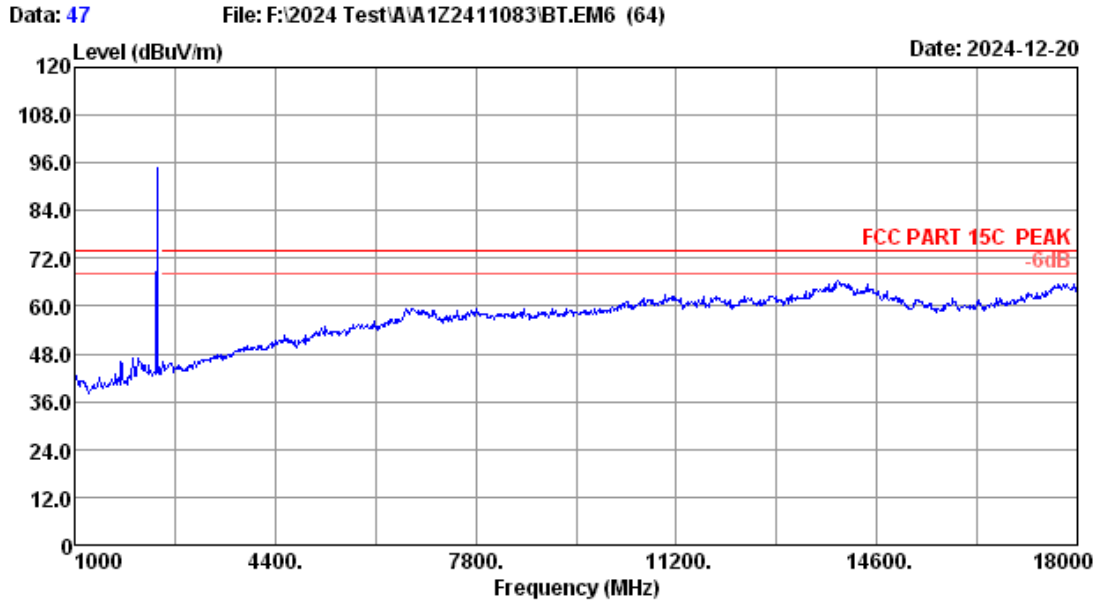

Site no.	: 3m Chamber	Data no.	: 47
Dis. / Ant.	: 3m 2024 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: Evan
Power rating	:		
Test Mode	: BLE2M 2402 TX mode		

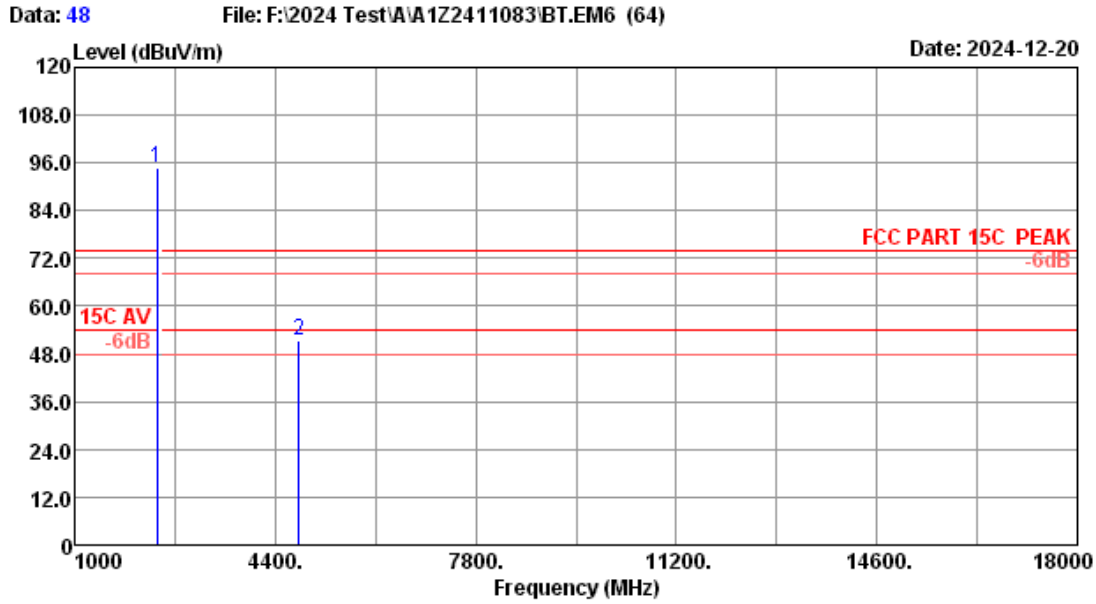

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2024 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : Evan
 Power rating :
 Test Mode : BLE2M 2402 TX mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.70	5.22	93.66	31.70	94.88	-----	-----	Peak
2	4804.00	31.30	7.14	43.24	30.42	51.26	74.00	22.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Block Diagram of Test Setup

Please reference to section 2.4.

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30dB instead of 20dB.

5.3. Test Procedure

Use the test method described in ANSI C63.10:

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.

5.4. Test result


PASS (The testing data was attached in the next pages.)

EUT: Notebook Computer		
M/N: N24B4		
Test date: 2024-12-30	Pressure: 102.3±1.0 kpa	Humidity: 53.5±3.0%
Tested by: Evan	Test site: RF site	Temperature: 25.4±0.6 °C


1Mbps:

GFSK


2402MHz

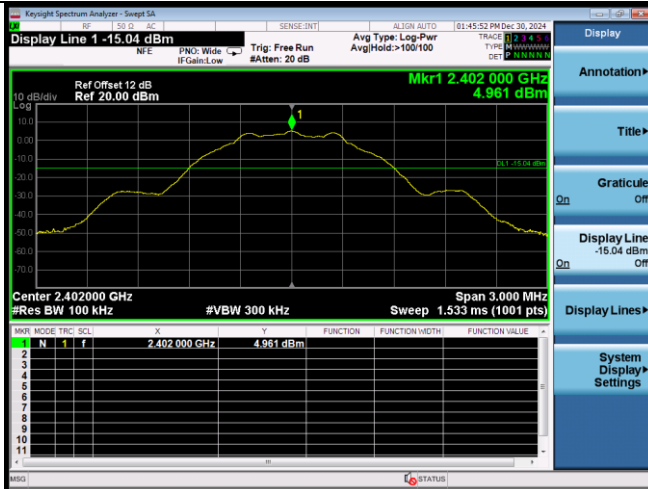


2402MHz(10GHz – 26GHz)

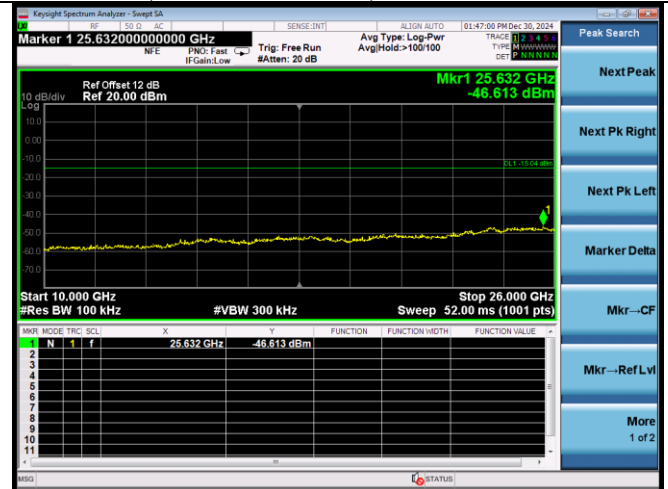


2402MHz(30MHz – 1GHz)

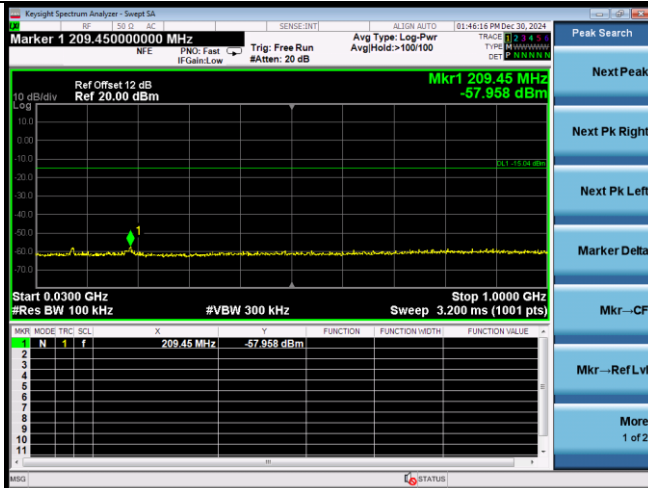


2402MHz(2.3GHz – 2.4GHz)

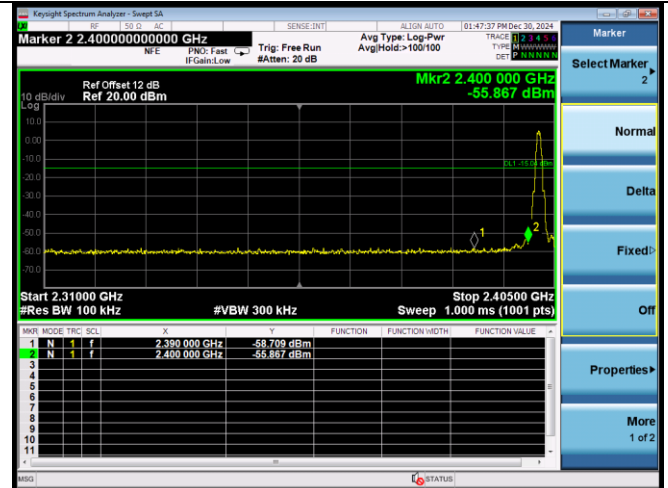


2402MHz(1GHz – 10GHz)

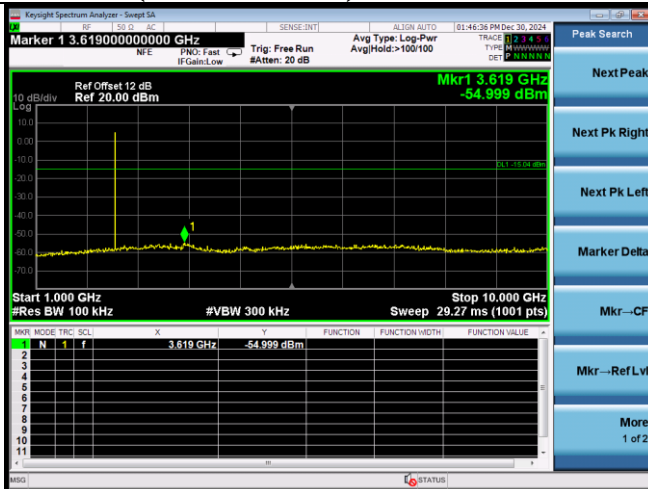





2440MHz

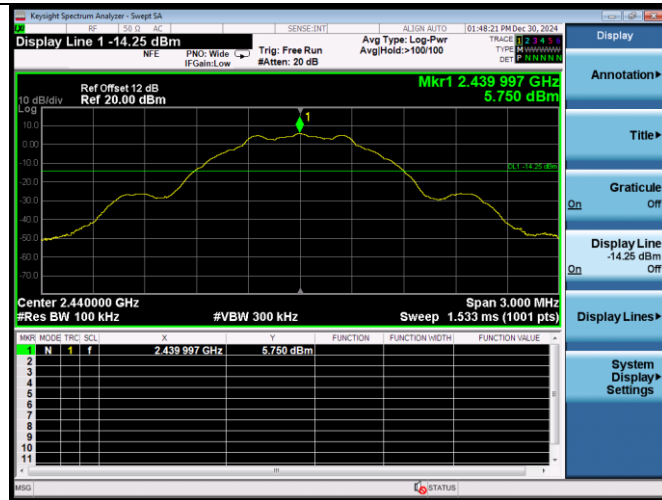


2440MHz(1GHz – 10GHz)

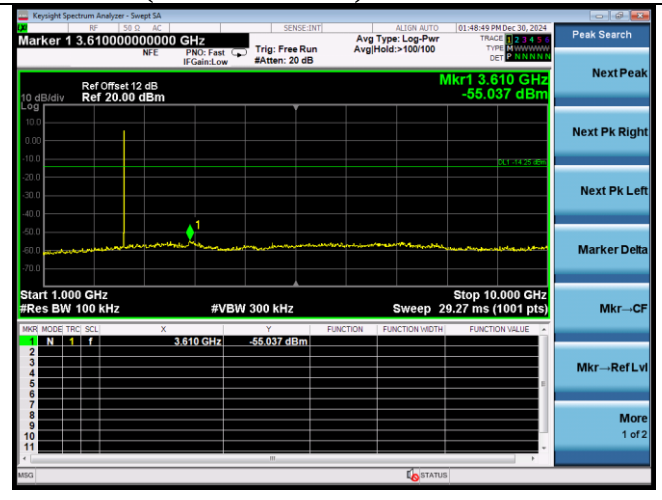


2440MHz(30MHz – 1GHz)

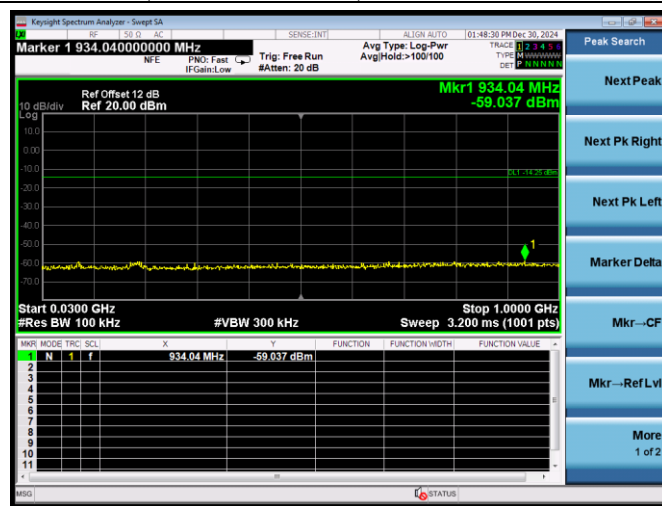


2440MHz(10GHz – 26GHz)

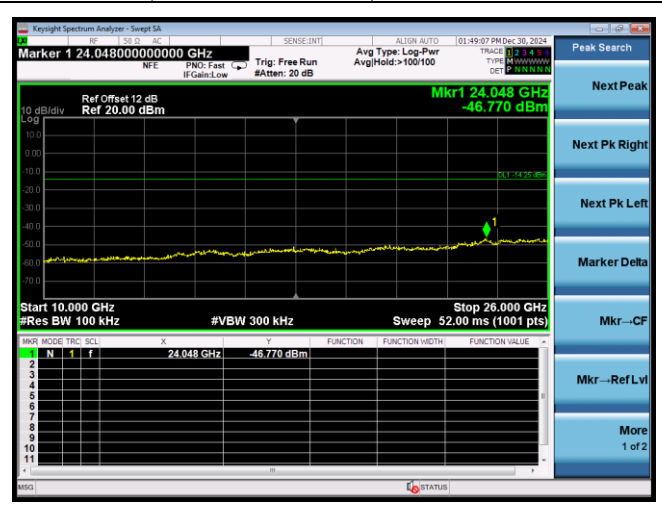


2480MHz

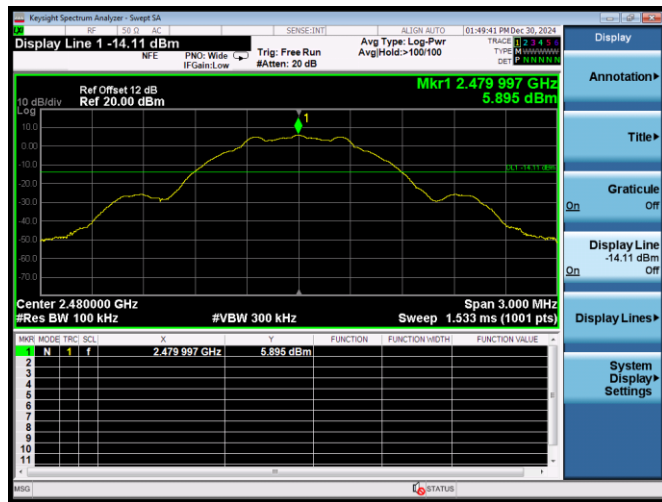


2480MHz(10GHz – 26GHz)

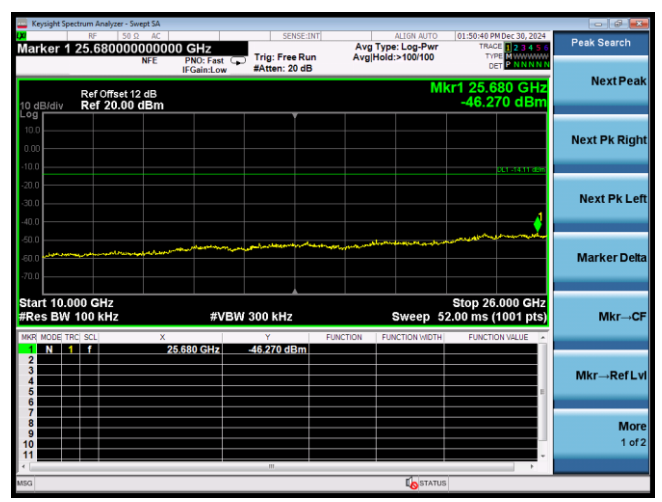



2480MHz(30MHz – 1GHz)

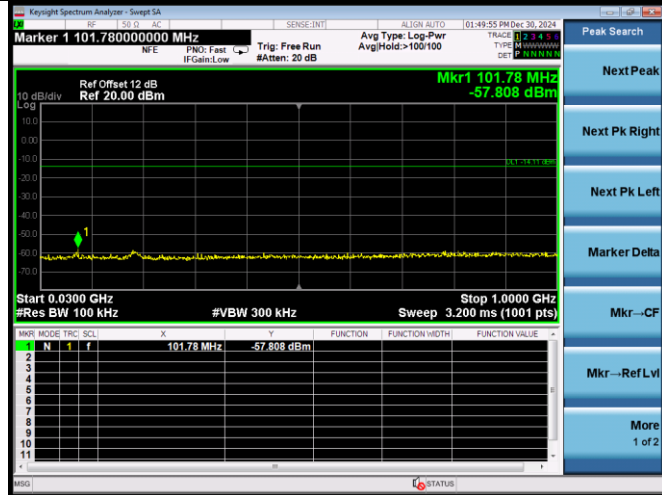

2480MHz(2.4GHz – 2.5GHz)

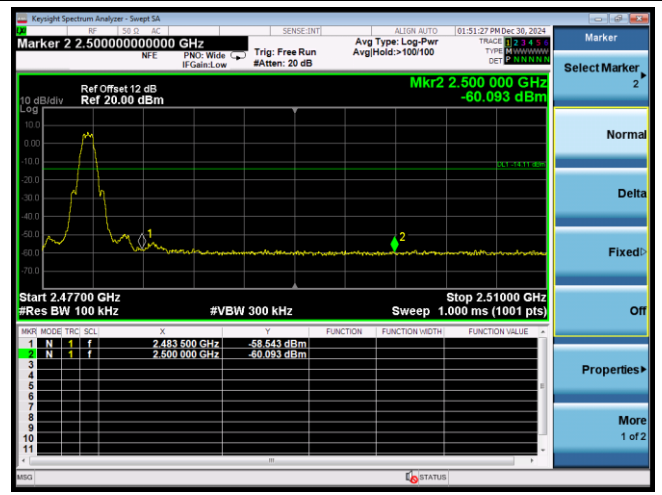


2480MHz(1GHz – 10GHz)

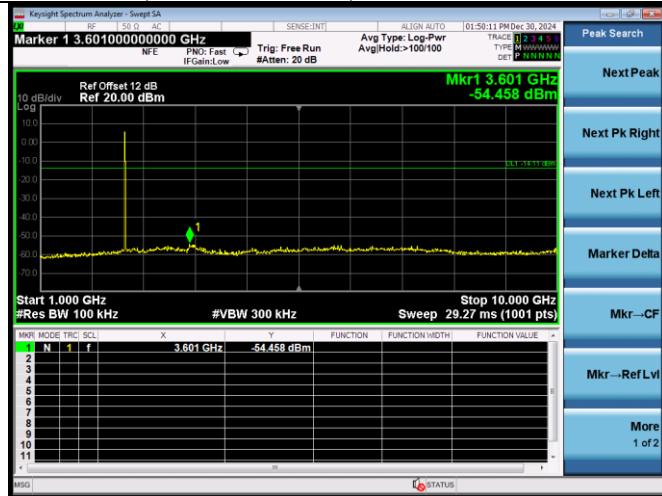


2Mbps:

GFSK


2402MHz

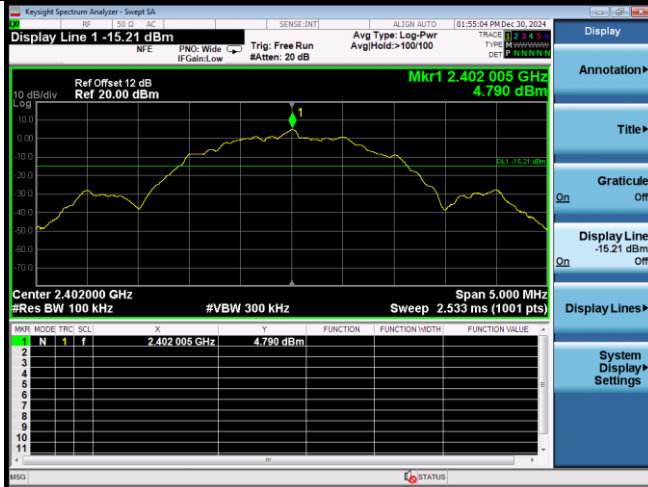


2402MHz(10GHz – 26GHz)

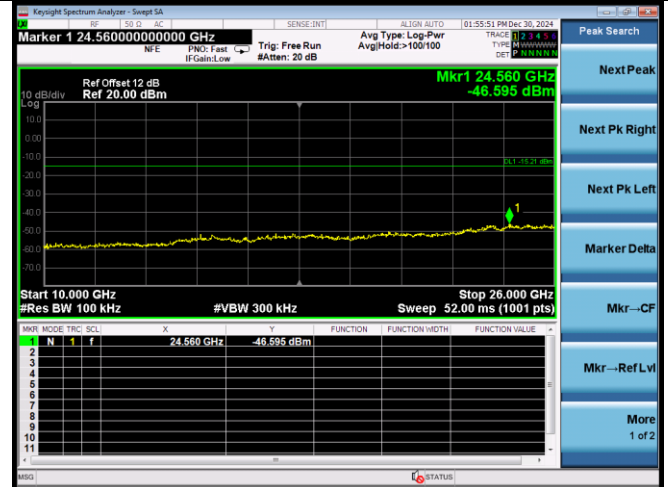



2402MHz(30MHz – 1GHz)

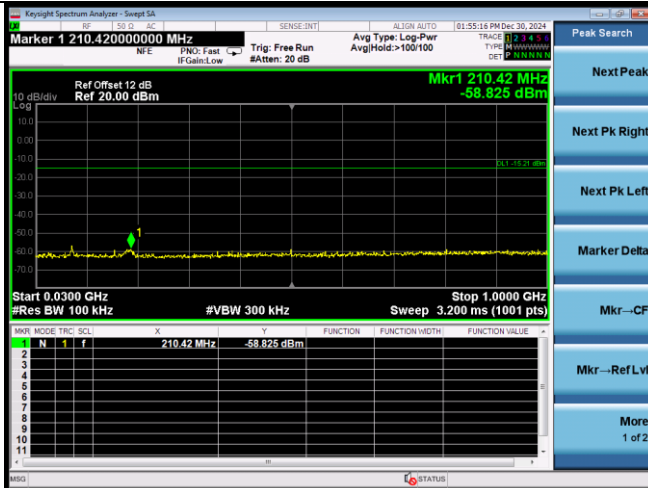


2402MHz(2.3GHz – 2.4GHz)

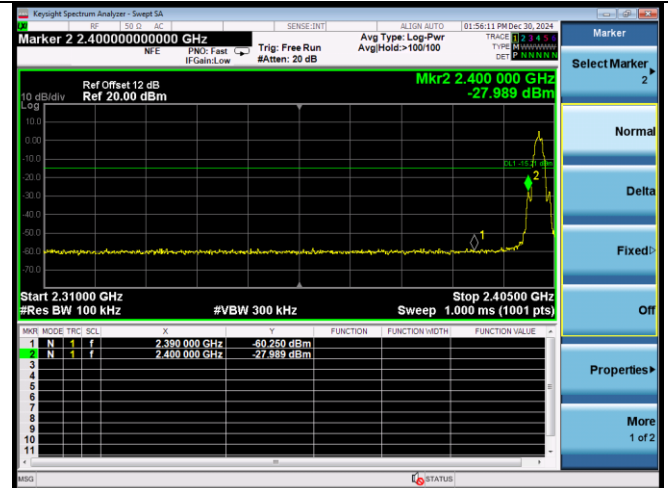


2402MHz(1GHz – 10GHz)

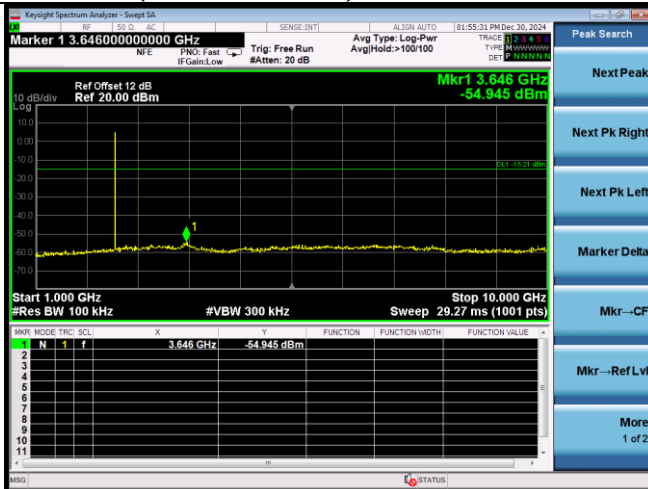


2440MHz

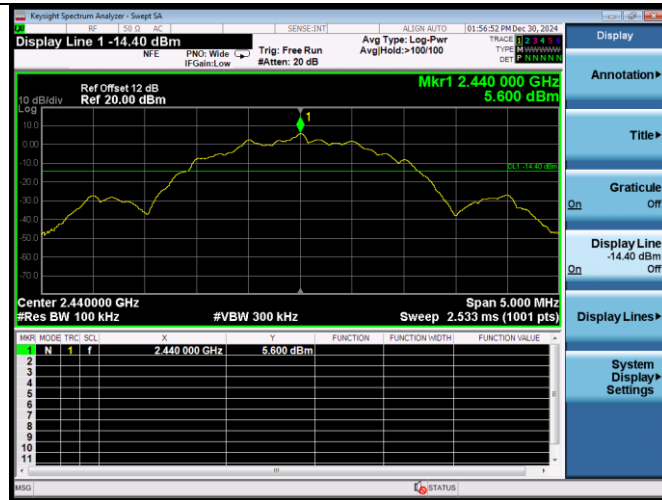


2440MHz(1GHz – 10GHz)

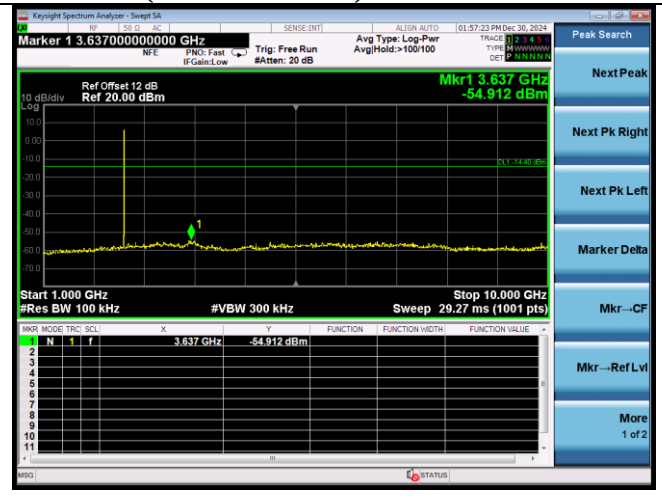


2440MHz(30MHz – 1GHz)

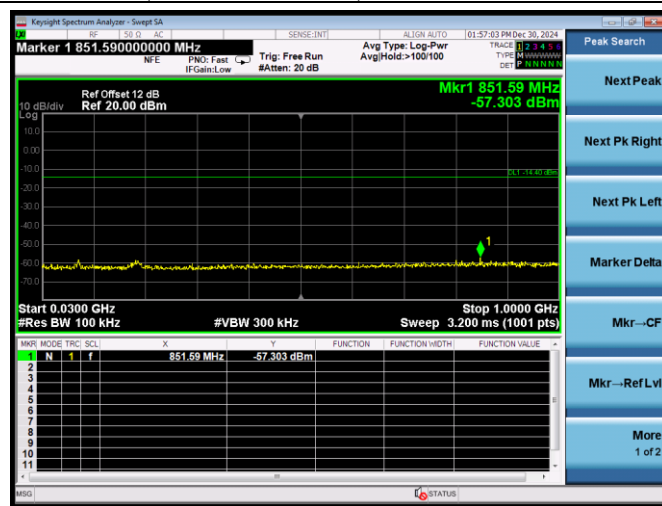


2440MHz(10GHz – 26GHz)

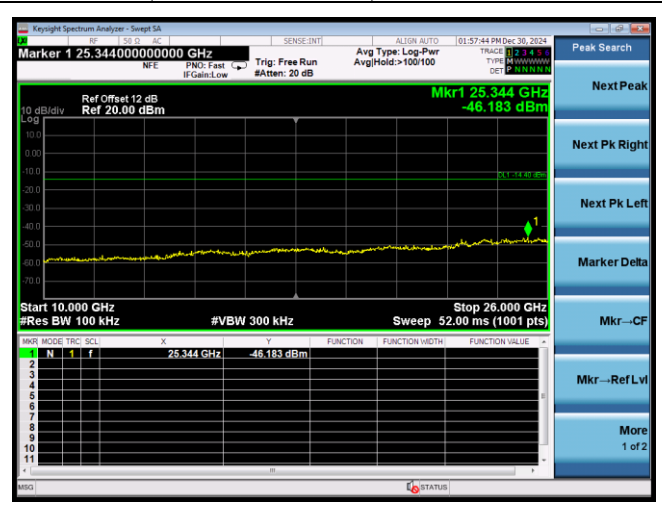


2480MHz

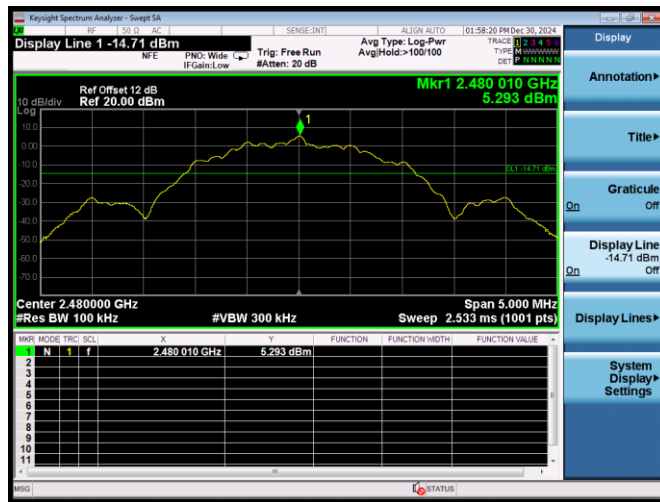


2480MHz(10GHz – 26GHz)

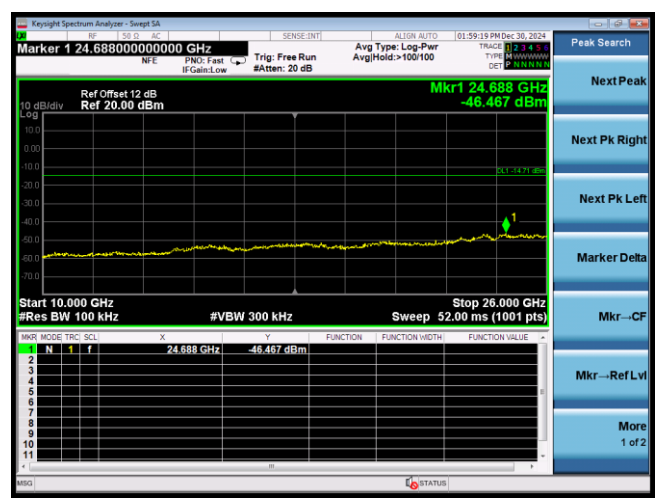



2480MHz(30MHz – 1GHz)

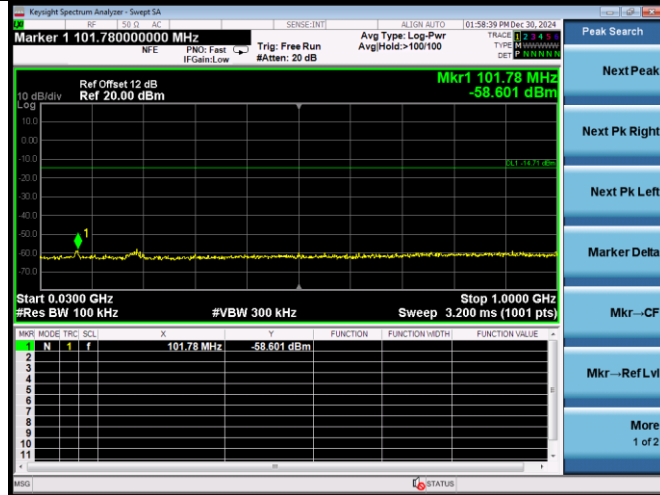

2480MHz(2.4GHz – 2.5GHz)

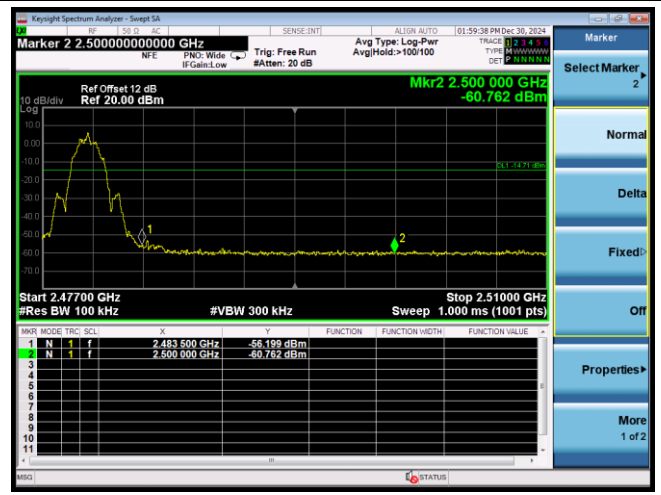

2480MHz(1GHz – 10GHz)

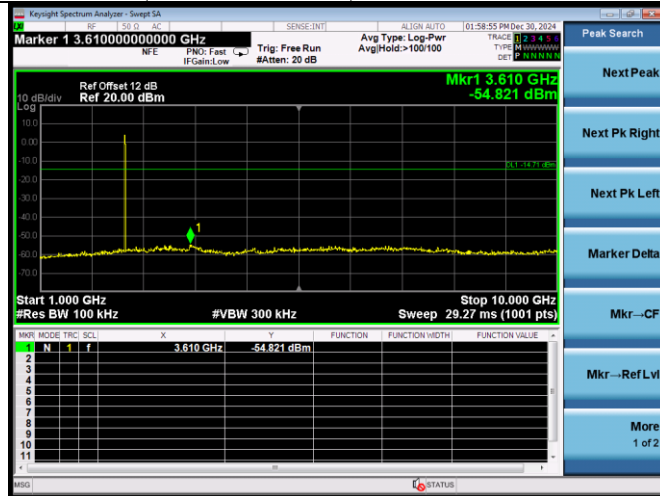

6. 6DB & 99% BANDWIDTH TEST

6.1. Block Diagram of Test Setup

Please reference to section 2.4.

6.2. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

6.3. Test Procedure

Use the test method described in ANSI C63.10 clause 11.8.2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100\text{ kHz}$, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq 6\text{ dB}$.

Use the test method described in ANSI C63.10 clause 6.9.2:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6.4. Test Results

EUT: Notebook Computer		
M/N: N24B4		
Test date: 2024-12-30	Pressure: 103.3±1.0 kpa	Humidity: 52.5±3.0%
Tested by: Evan	Test site: RF site	Temperature: 24.4±0.6℃

1Mbps:

Test Mode	Frequency (MHz)	-6dB Bandwidth (KHz)	Limit (KHz)
GFSK	2402	662.8	≥500
	2440	655.4	≥500
	2480	652.6	≥500
Conclusion : PASS			


2Mbps:

Test Mode	Frequency (MHz)	-6dB Bandwidth (KHz)	Limit (KHz)
GFSK	2402	1118	≥500
	2440	1117	≥500
	2480	957.6	≥500
Conclusion : PASS			


1Mbps:

GFSK


2402MHz

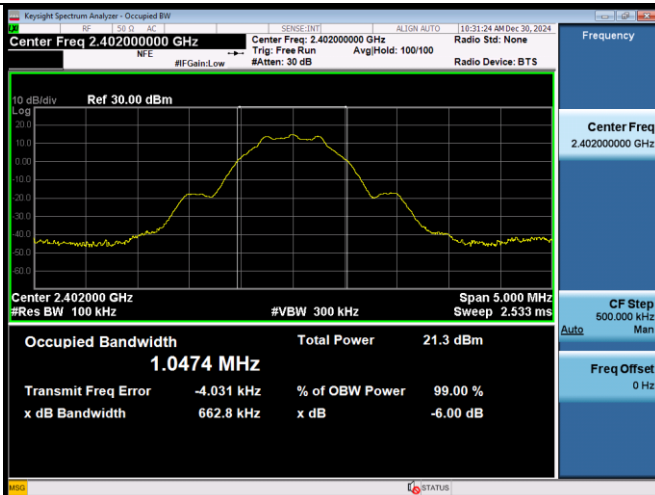

2440MHz

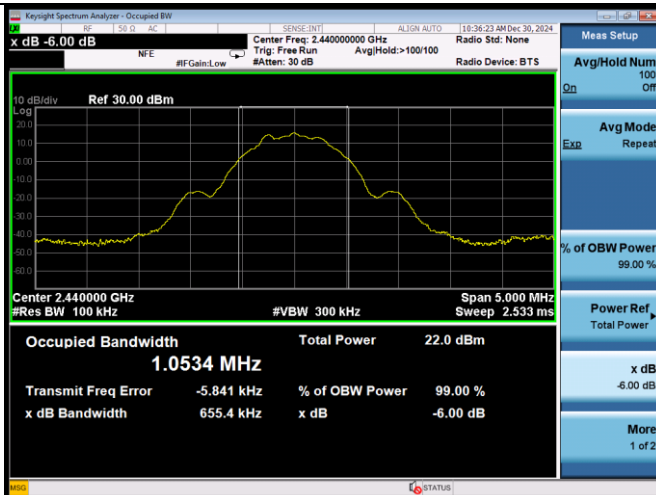

2480MHz

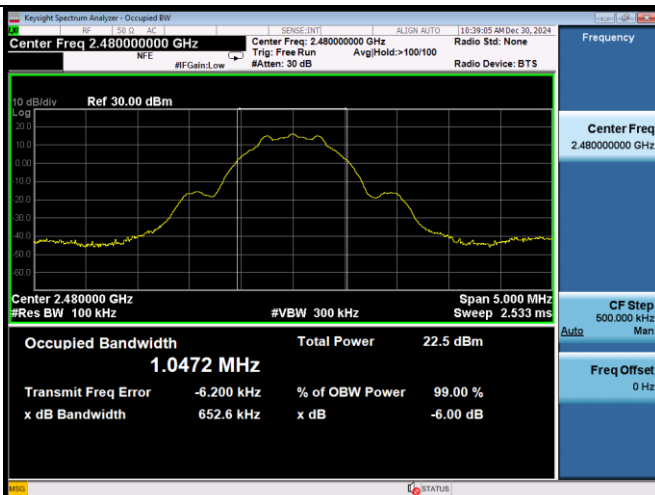


2Mbps:

GFSK

2402MHz



2440MHz

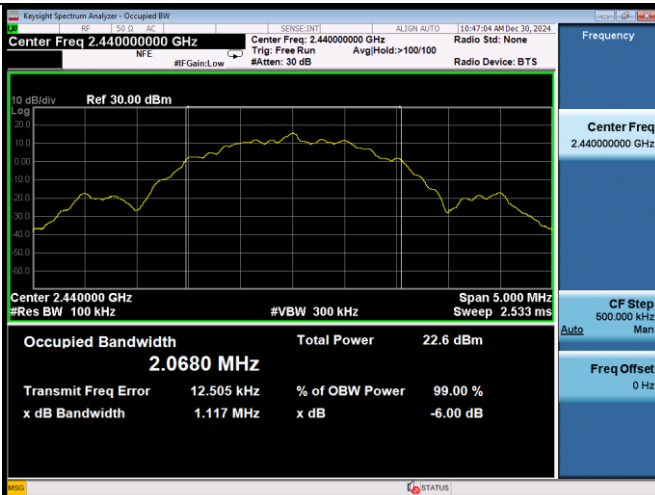

2480MHz



EUT: Notebook Computer		
M/N: N24B4		
Test date: 2024-12-30	Pressure: 103.3±1.0 kpa	Humidity: 52.5±3.0%
Tested by: Evan	Test site: RF site	Temperature: 24.4±0.6℃

1Mbps:

Test Mode	CH	99%Bandwidth (KHz)	Limit (MHz)
GFSK	2402	1046.8	N/A
	2440	1053.5	
	2480	1047.5	
Conclusion:Pass			

2Mbps:

Test Mode	CH	99%Bandwidth (KHz)	Limit (MHz)
GFSK	2402	2076	N/A
	2440	2068.3	
	2480	2078.4	
Conclusion:Pass			