

## **ATTACHMENT O – SAR TEST PLOTS (1 of 3)**

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA835 / Antenna : Fixed / Channel : 1013  
Liquid Temperature : 21.6°C  
Date Tested : May 12, 2006

DUT: PN-320; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.876 \text{ mho/m}$ ;  $\epsilon_r = 42.5$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

**Left touch 1013/Area Scan (51x101x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (interpolated) = 0.811 mW/g

**Left touch 1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 23.8 V/m; Power Drift = -0.031 dB  
Peak SAR (extrapolated) = 1.07 W/kg  
**SAR(1 g) = 0.751 mW/g; SAR(10 g) = 0.502 mW/g**  
Maximum value of SAR (measured) = 0.807 mW/g

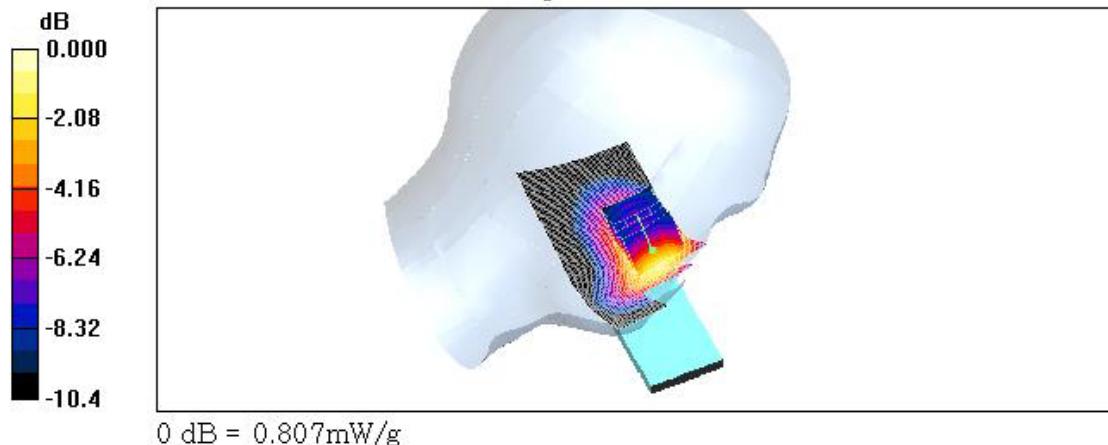

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA835 / Antenna : Fixed / Channel : 363  
Liquid Temperature : 21.6℃  
Date Tested : May 12, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 835.89 \text{ MHz}$ ;  $\sigma = 0.885 \text{ mho/m}$ ;  $\epsilon_r = 42.4$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 363/Area Scan (51x101x1): Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.842 mW/g

Left touch 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 25.0 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.802 mW/g; SAR(10 g) = 0.527 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.859 mW/g

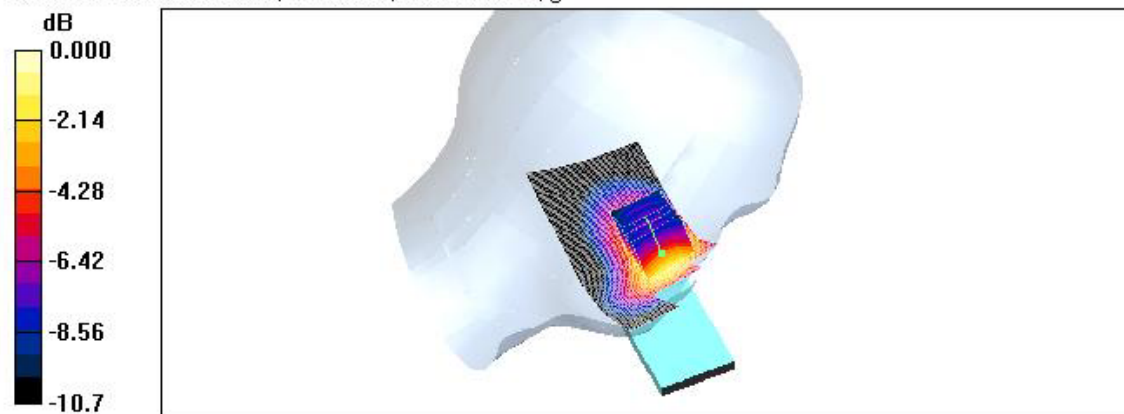

0 dB = 0.859mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : Fixed / Channel : 777

Liquid Temperature : 21.6℃

Date Tested : May 12, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31 \text{ MHz}$ ;  $\sigma = 0.897 \text{ mho/m}$ ;  $\epsilon_r = 42.3$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Area Scan (51x101x1): Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.809 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 22.7 V/m; Power Drift = 0.062 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.759 mW/g; SAR(10 g) = 0.497 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.811 mW/g

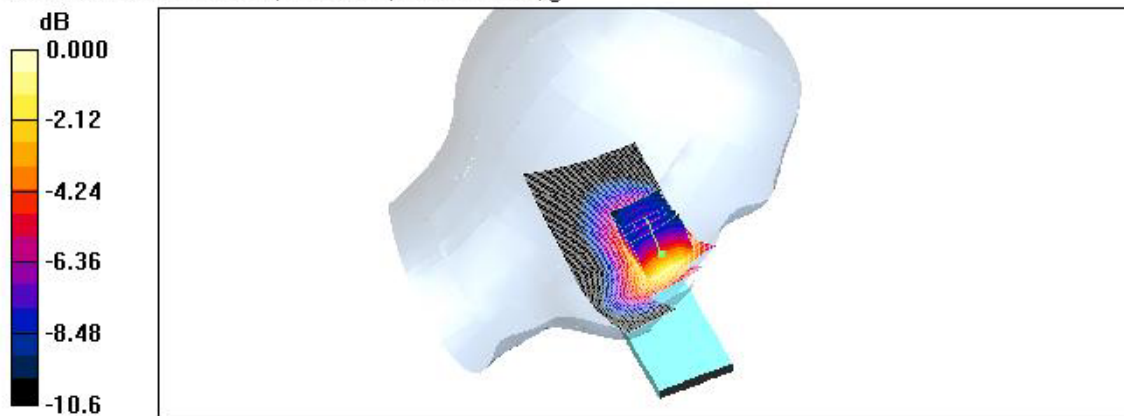

0 dB = 0.811mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : Fixed / Channel : 1013

Liquid Temperature : 21.6℃

Date Tested : May 12, 2006

**DUT: PN-320; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.876$  mho/m;  $\epsilon_r = 42.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

**Right touch 1013/Area Scan (51x101x1):** Measurement grid:  $\Delta x = 15$ mm,  $\Delta y = 15$ mm

Maximum value of SAR (interpolated) = 0.904 mW/g


**Right touch 1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $\Delta x = 8$ mm,  $\Delta y = 8$ mm,  $\Delta z = 5$ mm

Reference Value = 25.9 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.818 mW/g; SAR(10 g) = 0.536 mW/g**

Maximum value of SAR (measured) = 0.893 mW/g

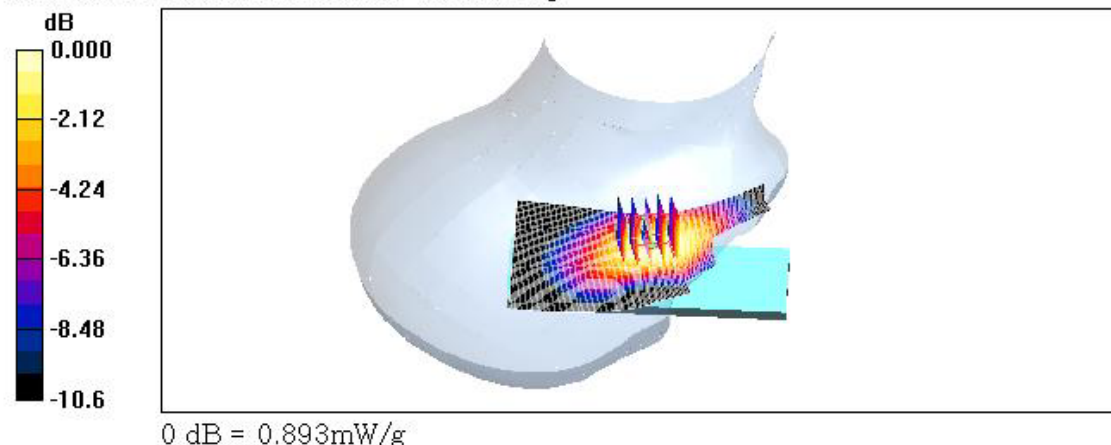



Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : Fixed / Channel : 363

Liquid Temperature : 21.6 °C

Date Tested : May 12, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835.89$  MHz;  $\sigma = 0.885$  mho/m;  $\epsilon_r = 42.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

**Right touch 363/Area Scan (51x101x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.967 mW/g

**Right touch 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 26.5 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 1.32 W/kg

**SAR(1 g) = 0.876 mW/g; SAR(10 g) = 0.572 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.938 mW/g

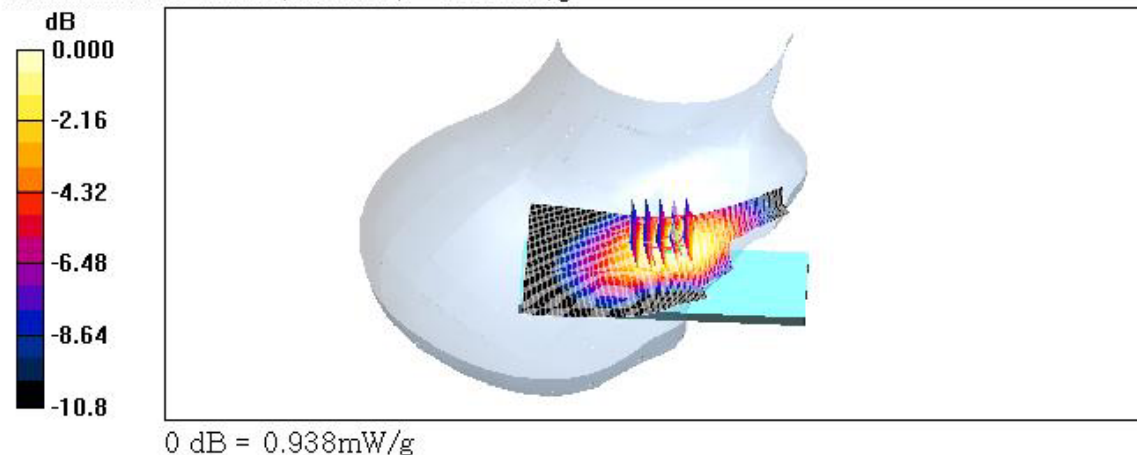

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA835 / Antenna : Fixed / Channel : 363(E-battery)  
Liquid Temperature : 21.6℃  
Date Tested : May 12, 2006

**DUT: PN-320; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 835.89$  MHz;  $\sigma = 0.885$  mho/m;  $\epsilon_r = 42.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section, Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

**Right touch 363/Area Scan (51x101x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.955 mW/g

**Right touch 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 25.4 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.837 mW/g; SAR(10 g) = 0.548 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.895 mW/g

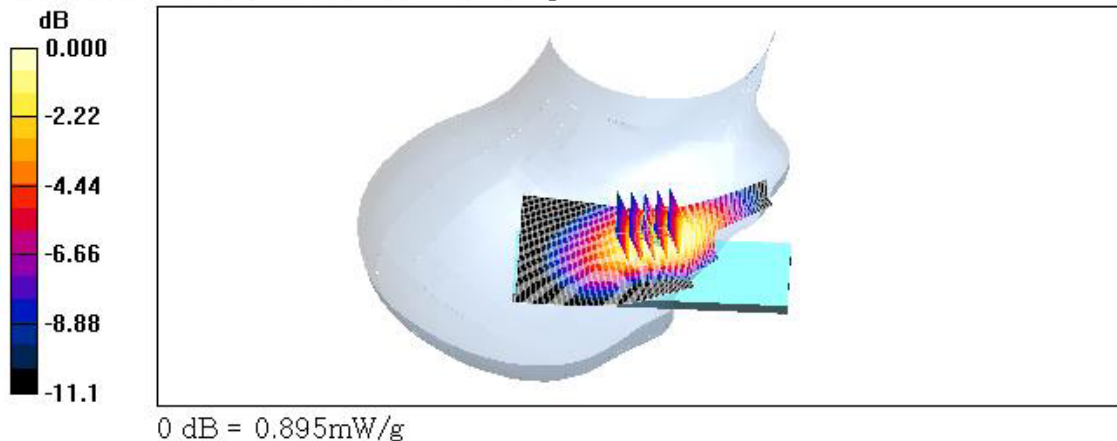

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA835 / Antenna : Fixed / Channel : 363(Bluetooth)  
Liquid Temperature : 21.6℃  
Date Tested : May 12, 2006

**DUT: PN-320; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 835.89$  MHz;  $\sigma = 0.885$  mho/m;  $\epsilon_r = 42.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

**Right touch 363/Area Scan (51x101x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.965 mW/g

**Right touch 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 26.1 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.566 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.940 mW/g

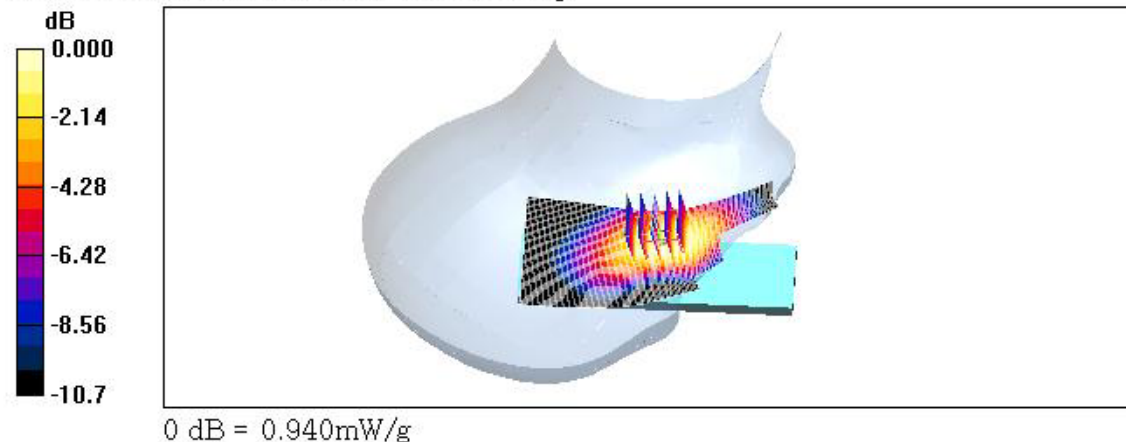



Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.  
Mode : CDMA835 / Antenna : Fixed / Channel : 777  
Liquid Temperature : 21.6℃  
Date Tested : May 12, 2006

**DUT: PN-320; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.897$  mho/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

**Right touch 777/Area Scan (51x101x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.903 mW/g

**Right touch 777/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 25.2 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.816 mW/g; SAR(10 g) = 0.525 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.896 mW/g

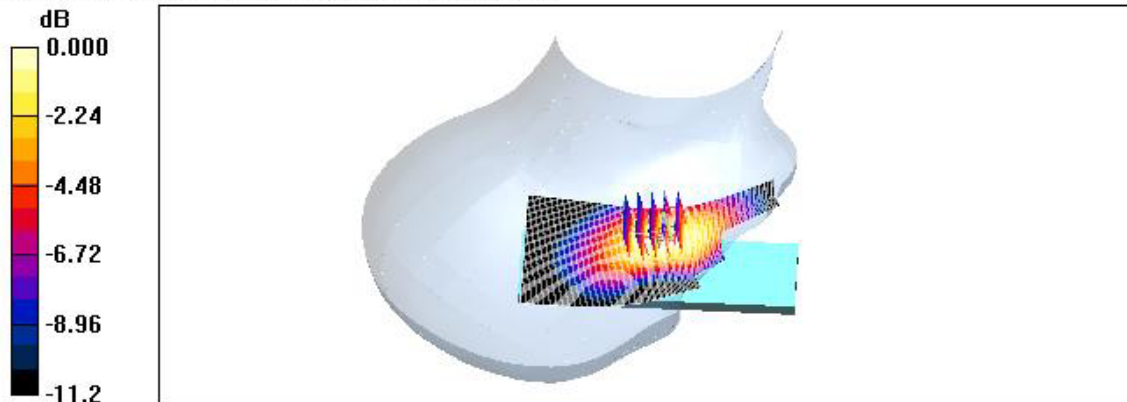

0 dB = 0.896mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : Fixed / Channel : 363

Liquid Temperature : 21.6°C

Date Tested : May 12, 2006

**DUT: PN-320; Type: Folder; Serial: #1**

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835.89$  MHz;  $\sigma = 0.885$  mho/m;  $\epsilon_r = 42.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

**Left tilt 363/Area Scan (51x101x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.306 mW/g

**Left tilt 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 16.4 V/m; Power Drift = -0.097 dB

Peak SAR (extrapolated) = 0.370 W/kg

**SAR(1 g) = 0.289 mW/g; SAR(10 g) = 0.213 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.308 mW/g

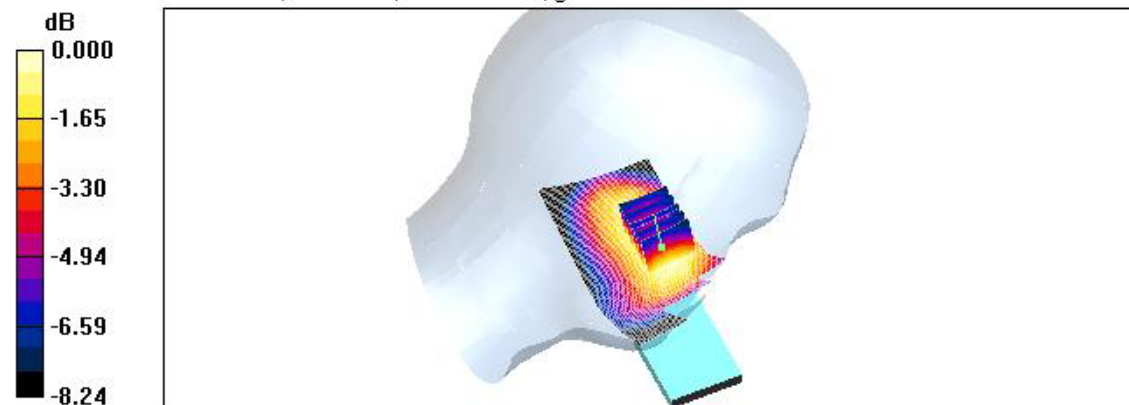

0 dB = 0.308mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : Fixed / Channel : 363

Liquid Temperature : 21.6°C

Date Tested : May 12, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835.89$  MHz;  $\sigma = 0.885$  mho/m;  $\epsilon_r = 42.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

**Right tilt 363/Area Scan (51x101x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.331 mW/g

**Right tilt 363/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 17.3 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.393 W/kg

**SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.230 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.330 mW/g

