


# QUICKSTART GUIDE

This quickstart guide applies to the MaxiSYS® Elite II, MaxiSYS® MS906 Pro and MaxiSYS® MS906 Pro-TS. Ensure your Wi-Fi network is accessible and has a stable connection.


## CONNECTING TO Wi-Fi



- Tap on the lower-right corner of the screen
- The Quick Settings menu will appear.
- Tap **No Internet Connection** next to the **Wi-Fi** signal icon




- A larger menu with additional options, including **Wi-Fi**, will appear.
- Select **Wi-Fi**




- Make sure **Wi-Fi** is turned on
- Select your local network



- Once connected, follow the instructions on the "Updating your MaxiSYS" document
- The **Wi-Fi** icon will appear when connection is established.



- From the Android screen, select **Settings**



- Make sure **Wi-Fi** is turned on
- Select your local network



- Enter your network password to connect the Wi-Fi




- Ensure you are connected to Wi-Fi: The **Wi-Fi** icon will appear in the lower-right corner

# QUICKSTART GUIDE

This quickstart guide applies to the MaxiSYS® Elite II, MaxiSYS® MS906 Pro and MaxiSYS® MS906 Pro-TS. Ensure your Wi-Fi network is accessible and has a stable connection.

## TOOL REGISTRATION VIA PC

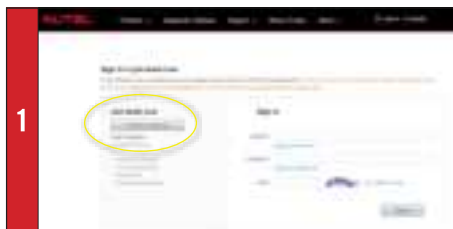

1

- Go to <http://pro.autel.com>
- Click **Create Autel ID** on the left side of the screen
- If you already have an Autel ID, sign in and skip to Step 6




2

- Set preferred language
- Enter your email address as your Autel ID
- Click **Get Verification Code**




3

- An email titled "Verification Code for New User Registration" will be sent to you.
- Open the email and copy the 6-digit verification code
- Return to <http://pro.autel.com> to continue registration

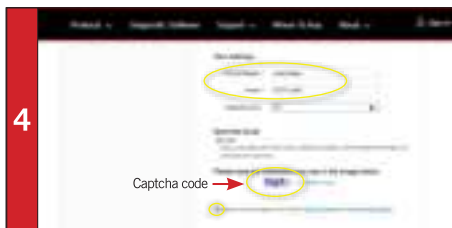

4

- Enter the verification code from your email and all other required information marked with a red asterisk
- Enter the Captcha code as shown
- Read the Autel **Terms of Use** and **Privacy Policy** and select the check box to accept the terms

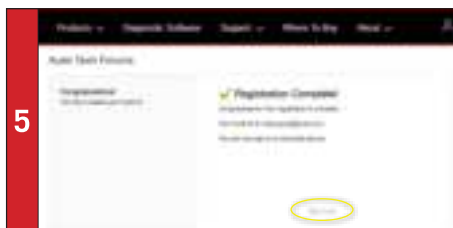

5

- Click **Create Autel ID** at the bottom of the screen
- Registration Complete screen will appear.
- Click **Sign in Now** and log in




6

- Select **Product Registration** from the menu list
- Product Registration screen will appear.



7

- To locate the tablet's serial number and password: Select the **Settings** icon from the Main Menu and tap **About**

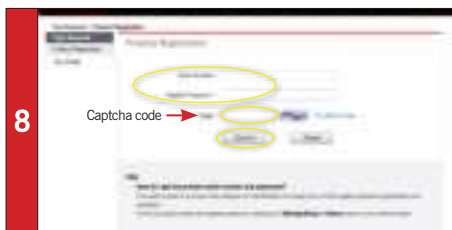


8

- Input your tablet's product serial number and password
- Type the Captcha code as shown
- Click **Submit** to complete tablet registration

# QUICKSTART GUIDE

## TOOL REGISTRATION VIA TABLET



- A dialog box will appear asking you to register your tablet.

- Tap **Register**



- A sign-in screen will appear
- Create an Autel ID using an accessible email address



- Check your email on a computer or mobile device
- On the tablet registration screen, enter your email address, password, and the verification code provided in your email



- The serial number and password fields will be automatically completed
- Tap **Register**

**NOTE:** To find your product serial number and register password, go to the Main Menu, and select **Settings > About**

## DOWNLOAD SOFTWARE UPDATES

Software updates are available for **FREE** for the first year from date of purchase. Your tool must be registered as per the directions on Page 1 to download software updates.




- Connect your tablet to Wi-Fi and plug it into a power source




- If updates are available, the number of available updates will appear on the green **Update** button
- Select the **Update** button to view a list of available updates



- Download the system update by selecting the update button on the right



- Download any available updates for each vehicle manufacturer you service
- Select the  Information icon next to each update to view update details

**NOTE:** We recommend you update one app at a time. Selecting **Update All** will take more time.

# QUICKSTART GUIDE

EXTEND INITIAL YEAR OF COVERAGE WITH

# 1 YEAR-TCP

TOTAL CARE PROGRAM

PURCHASE TO **EXTEND** MAXISYS  
**WARRANTY & SOFTWARE**  
SUBSCRIPTION COVERAGE FOR **ONE YEAR**

DON'T WAIT FOR INITIAL YEAR EXPIRATION

PURCHASE & ACTIVATE A NEW TCP SUBSCRIPTION BEFORE UPDATES EXPIRE TO LIMIT DOWNTIME AND ENSURE CONTINUED VEHICLE COVERAGE

**NEW SAME DAY ORDER & ACTIVATION**  
GET YOUR SUBSCRIPTION FASTER  
RECEIVE ACTIVATION CODES VIA EMAIL  
**ASK YOUR LOCAL TOOL DEALER**



REGISTER YOUR MAXISYS AT  
PRO.AUTEL.COM & PURCHASE TCP

USE ACTIVATION CODE ON CARD OR  
DIGITAL CODE PROVIDED IN EMAIL

REDEEM CODE TO ACTIVATE  
SUBSCRIPTION & WARRANTY



YouTube  
TRAINING  
VIDEOS  
@AutelTools



View More Autel Videos at: <https://www.youtube.com/auteltools>

## PRINTING INSTALLATION & SETUP


Works with any printer with a Wi-Fi connection. No need for special software or driver on the tablet.




- Make sure your Windows PC and tablet are on the same Wi-Fi network
- On your computer, go to Autel.com, select **Support > Downloads > Autel Update Tools**



- Locate the **Maxisys PC Suite** software and click on the **Download Here** button
- Open the .zip file

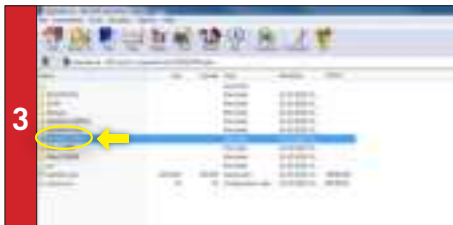

- Select **Maxisys Print**, then click the setup.exe file to install the program

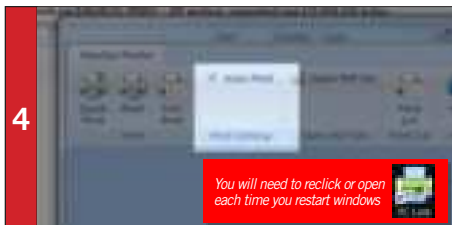

- Within the program dialogue box, check **Auto Print** to automatically use the default printer
- Select **Quick Print** to use the default printer or select **Print** to choose a printer

You will need to **reclick or open** each time you restart windows

## QUICKSTART GUIDE

This quickstart guide applies to the MaxiSYS® Elite II, MaxiSYS® MS906 Pro and MaxiSYS® MS906 Pro-TS. Ensure your Wi-Fi network is accessible and has a stable connection.

### VCI CONNECTION VIA BLUETOOTH




- Select the **VCI Manager** application icon from the Main Menu or from the bottom toolbar.
- Choose **VCI BT** from the left side of the screen.



- Your tablet will automatically start scanning for available VCI devices. Found devices are listed on the right side of the screen.



- When a connection is established, the status of the connected device will read, "Connected."




- When the VCI device is ready for use, a green badge will appear on the VCI button at the bottom of the screen.

### VCI SOFTWARE UPDATES



- Connect the VCI device to the MaxiSYS tablet via USB
- Connect the VCI to a power source to ensure updates are installed correctly.



- Select the **VCI Manager** application from the Main Menu.



- Select **VCI Update** from the Connection Mode list on the left side of the screen.



- The current and latest version of the VCI software will appear.
- If available, tap the **Update Now** button to download software.


# QUICKSTART GUIDE

This quickstart guide applies to the MaxiSYS® Elite II, MaxiSYS® MS906 Pro and MaxiSYS® MS906 Pro-TS.  
Ensure your Wi-Fi network is accessible and has a stable connection.

## VID — VEHICLE IDENTIFICATION DETECTION | SCAN VIN



- Select **Diagnostics** from the Main Menu.



- Select the blue **VID** button on the top left of the screen.
- Select **Scan VIN** from the drop-down menu.




- Position the camera so the VIN (located on the vehicle dash or vehicle door jamb) appears within the scanning frame.




- The VIN is scanned and recognized automatically.  
The result will appear in the Recognition result dialog box.
- Tap **OK** to confirm the VIN and continue.


## VID — VEHICLE IDENTIFICATION DETECTION AUTO VIN DETECT (COMPATIBLE WITH VEHICLES 2007 AND NEWER)



- Select **Diagnostics** from the Main Menu.



- Select the blue **VID** button on the top left of the screen.



- Select **Auto Detect** from the drop-down menu.




- Once the vehicle is successfully identified, the Diagnostics Menu will appear.

# QUICKSTART GUIDE

This quickstart guide applies to the MaxiSYS® Elite II, MaxiSYS® MS906 Pro and MaxiSYS® MS906 Pro-TS. Ensure your Wi-Fi network is accessible and has a stable connection.


## AUTO-SCAN



- Select **Diagnostics** from the Main Menu.



- Select the vehicle manufacturer.



- Select **Automatic Selection** to acquire VIN automatically. Tap **Manual input** to type in the VIN.



- All available systems will appear.

## FAULT SCAN



- Select **Diagnostics** from the Main Menu.



- A System List of all available systems will appear after the Auto Scan. The third column displays Not Scanned indicating the system has not been scanned.

- Tap **Fault scan** at the bottom of the screen to scan system faults.



- Data Trouble Codes (DTCs) can be viewed directly after scanning.

- Fault I#: Indicates faults are present; “#” indicates the number of detected faults.

- Pass I/No Fault: Indicates the system was scanned and no fault was detected.

- No Response: Indicates the system was unresponsive.

# QUICKSTART GUIDE

This quickstart guide applies to the MaxiSYS® Elite II, MaxiSYS® MS906 Pro and MaxiSYS® MS906 Pro-TS. Ensure your Wi-Fi network is accessible and has a stable connection.

## PRE/POST SCAN REPORTS

Prior to Running Pre/Post Scans, we recommend you take the following steps to customize your reports.



- Select the **Data Manager** icon on the MaxiSYS Main Menu.



- Complete the fields on this screen by tapping on each field and entering information. The information entered here will appear on every Pre- and Post-Scan report generated.




- The generated Pre- and Post-Scan reports are now complete with shop information and ready to be emailed to an insurance company or printed for the customer.



- Access stored reports.




- Tap the **Workshop Information** icon.

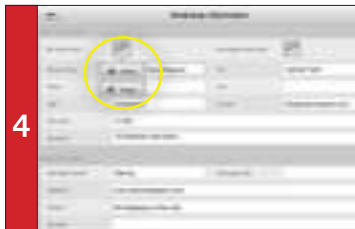

- To Add logo: Tap the image icon and select from the drop-down menu to either take a photo with the tablet or upload an image from the tablet.



- Reports are stored in Vehicle History, accessible through Data Manager or through **Diagnostics > History**.

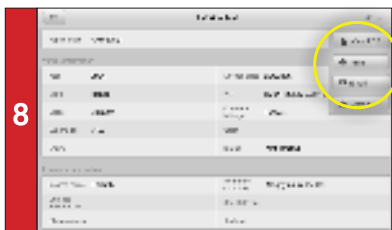

- Select the pencil icon from the drop-down menu, choose View PDF, Print, E-mail or Delete.

# QUICKSTART GUIDE

This quickstart guide applies to the MaxiSYS® Elite II, MaxiSYS® MS906 Pro and MaxiSYS® MS906 Pro-TS.  
Ensure your Wi-Fi network is accessible and has a stable connection.

## MAXISYS SYSTEM SUITE APPS

### SERVICE



#### SERVICE

Designed to provide quick access to the vehicle systems for various service and maintenance tasks.

Comprehensive service functions, including Oil Reset, EPB, SAS, DPF, TPMS, and BMS.

### DATA LOGGING



#### DATA LOGGING


Interactive recording sessions save vehicle testing data and enable direct contact with Autel technical support staff for first-hand troubleshooting of diagnostic bugs and errors.

# QUICKSTART GUIDE

This quickstart guide applies to the MaxiSYS® Elite II, MaxiSYS® MS906 Pro and MaxiSYS® MS906 Pro-TS.  
Ensure your Wi-Fi network is accessible and has a stable connection.

## MAXISYS SYSTEM SUITE APPS

### REMOTE DESKTOP

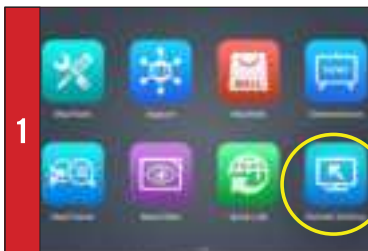

#### REMOTE DESKTOP

Enables you to authorize our tech-support specialists to remotely log into the tablet to help you update software on the tablet and VCI, and perform difficult diagnostic procedures or complicated vehicle services. This real-time support provides quick and accurate solutions.

### DATA MANAGER



#### DATA MANAGER

Designed to store all data files, including customer information, vehicle ID, and vehicle diagnostic records.

#### FCC STATEMENT :

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

RELEASED FOR REUSE  
RENAME VOL.006



颜色	备注

注：AUTEL设计图不标注颜色时，效果按照  
“标准色”一致即可。

DIM	Internal	Machine
0-6	0.10	0.05
6-30	0.15	0.10
30-120	0.25	0.15
120-300	0.35	0.20
300-600	0.50	0.25
600-1200	0.60	0.30
≥1200	0.80	0.50
ANSI	1	3

**AUTEL** 道通科技股份有限公司  
Autel Intelligent Technology Corp.Ltd.

True Drawing (As Specified)  
See The Property Of AUTEL And Autel  
NOT To Be Reproduced Copied Or Used  
In Any Manner Without The Prior  
Written Consent Of AUTEL

PROJ

快速指引	
DRW: 何群	UNIT: 132x190mm
CHD: 兰金香	INOH:
STD:	MSDRG:
PH: 廖岩龙	GAH:
THB: 1 50 1	PRODUCT: MS Elite II
PART NO: AUT62060592	
500005584	
Material: 157g铜版纸	