
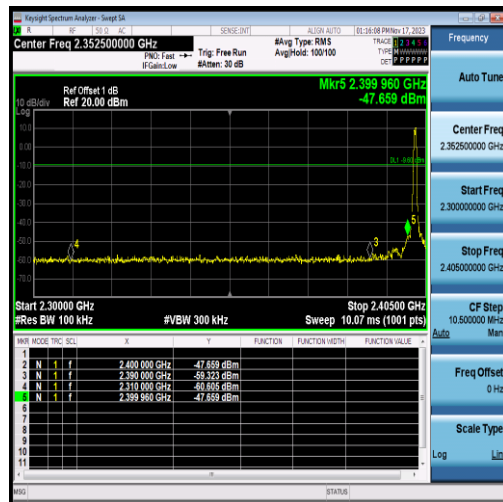
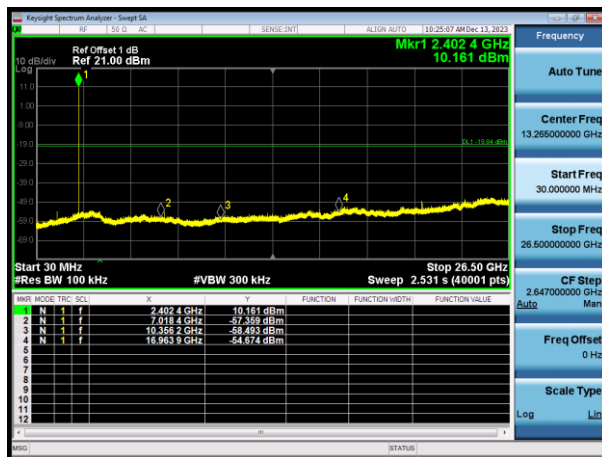
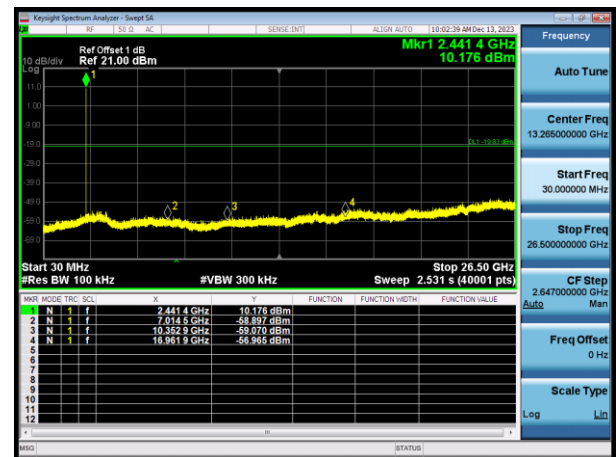
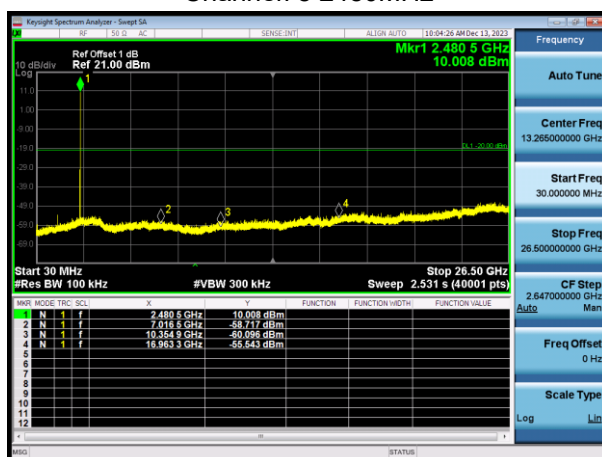



2.4GHz FSK**Channel00 2402MHz****Channel78 2480MHz****Channel00 2402MHz****Channel39 2441MHz****Channel78 2480MHz**

812kHz LoRa


Channel00 2403MHz

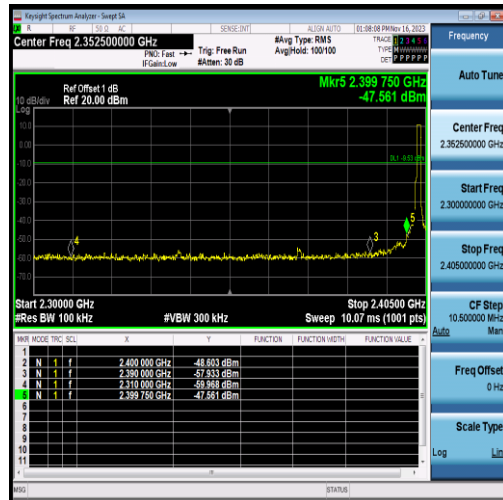


Channel76 2479MHz

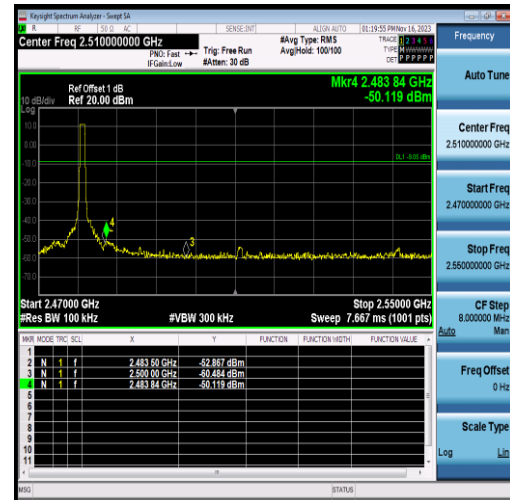


Channel00 2403MHz

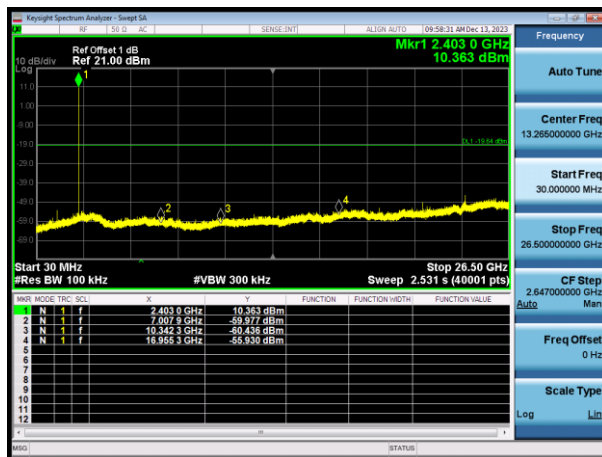

Channel39 2442MHz

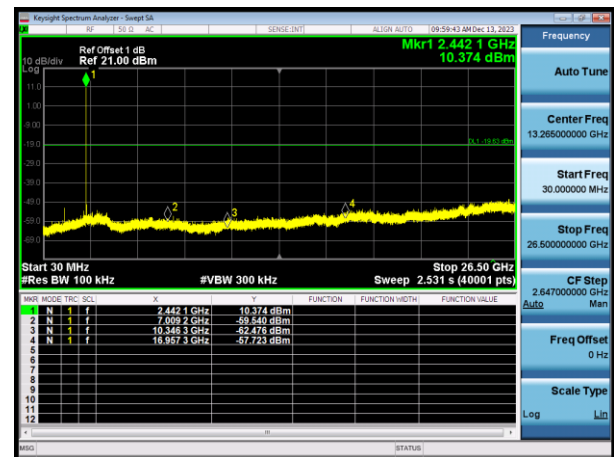


Channel76 2479MHz

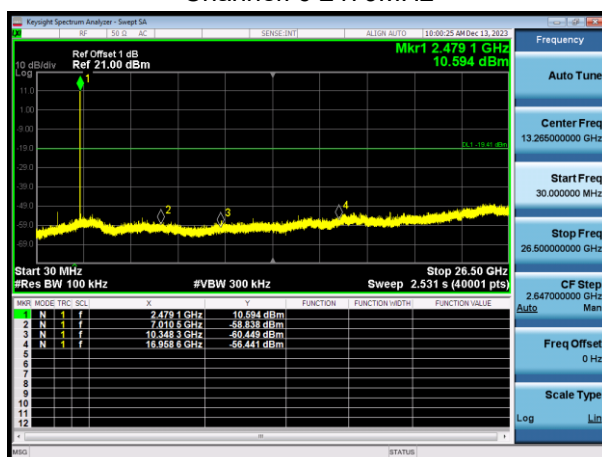


SubG CSS

Channel01 902.5

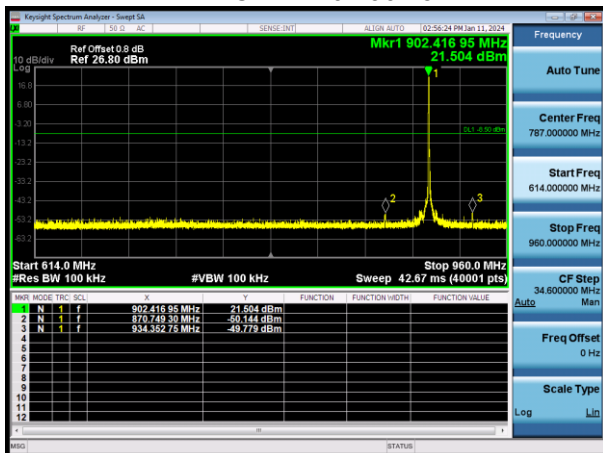


MHz


Channel01 902.5MHz

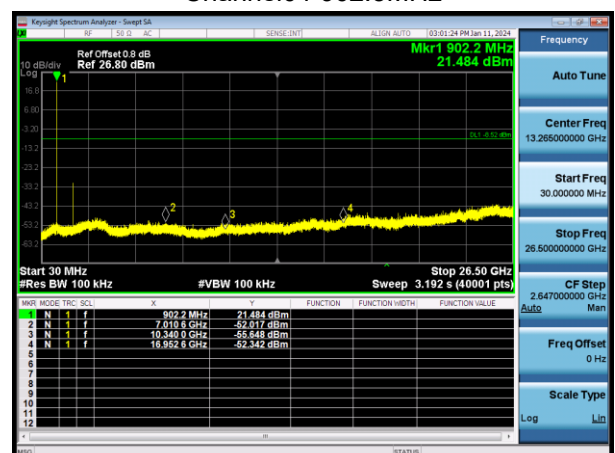


Channel16 914.5MHz

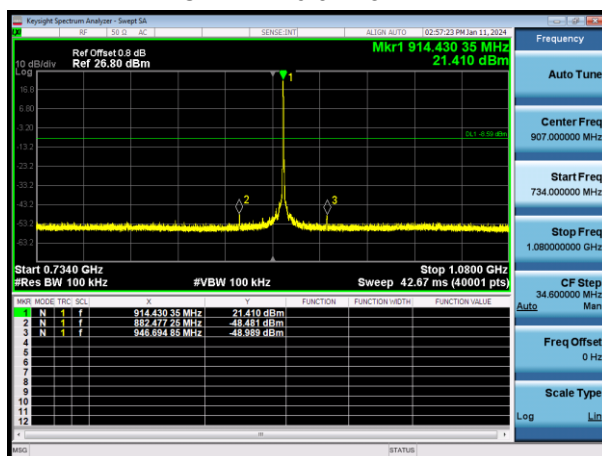


Channel16 914.5MHz

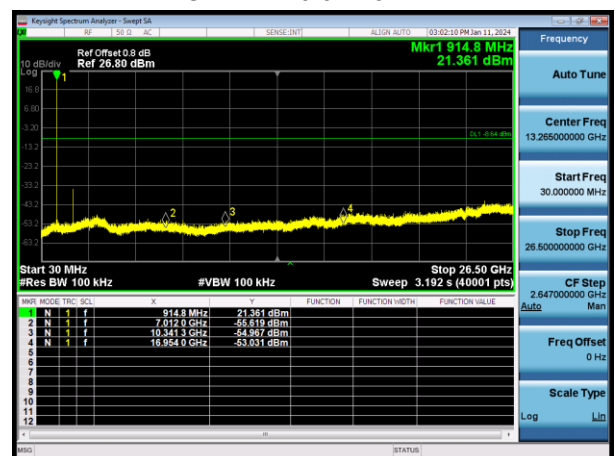

Channel31 926.5MHz

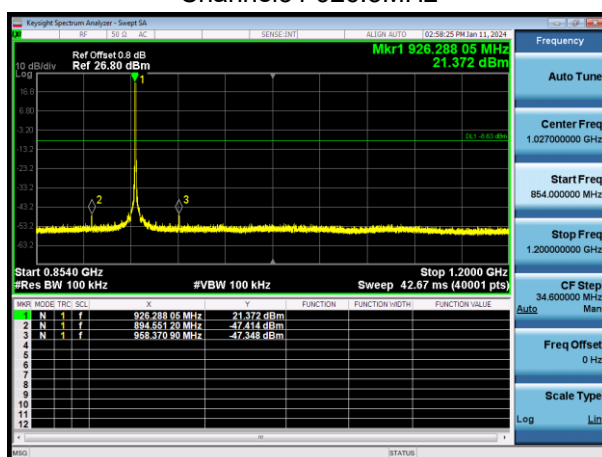


Channel31 926.5MHz

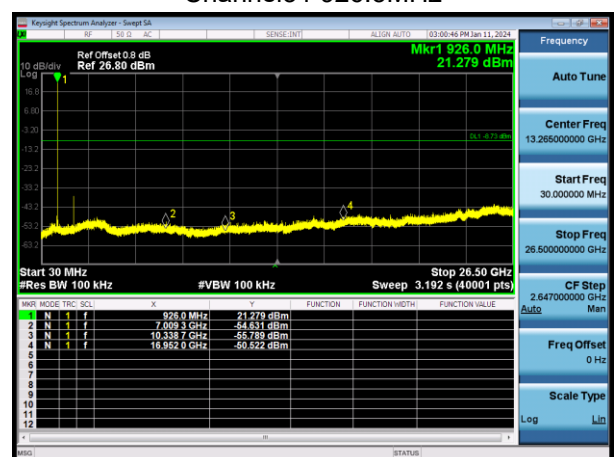


SubG FSK


Channel01 902.2MHz

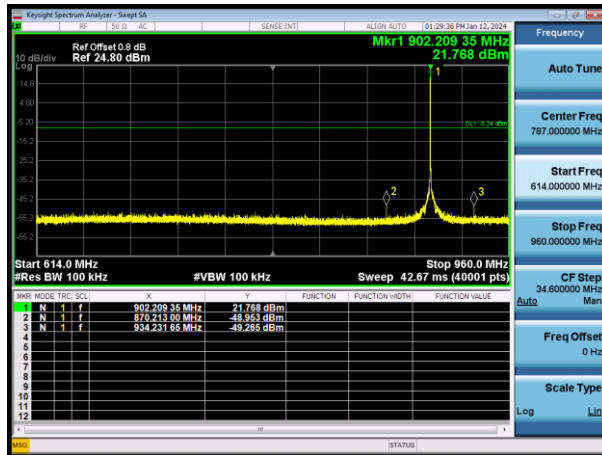


Channel01 902.2MHz

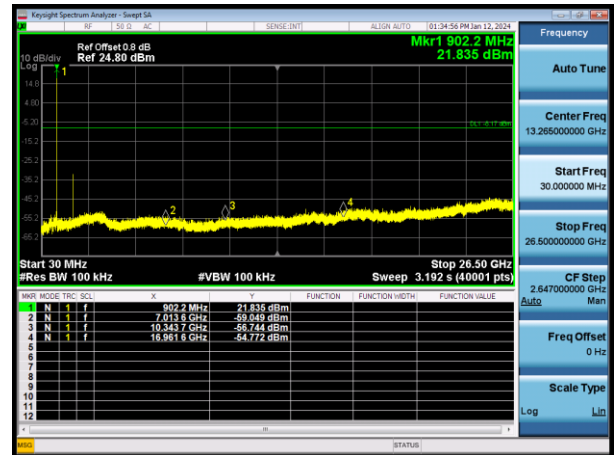


Channel65 915MHz

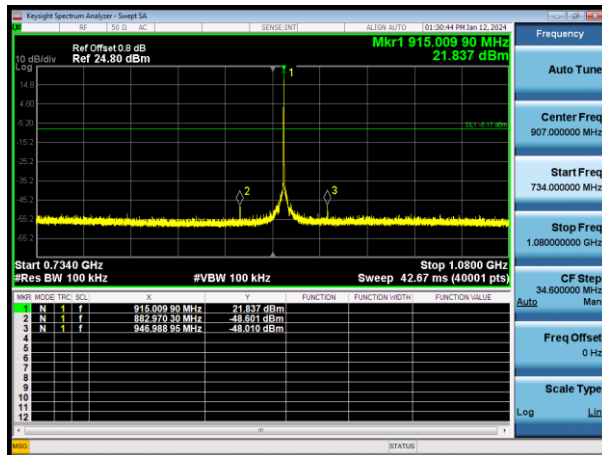


Channel65 915MHz

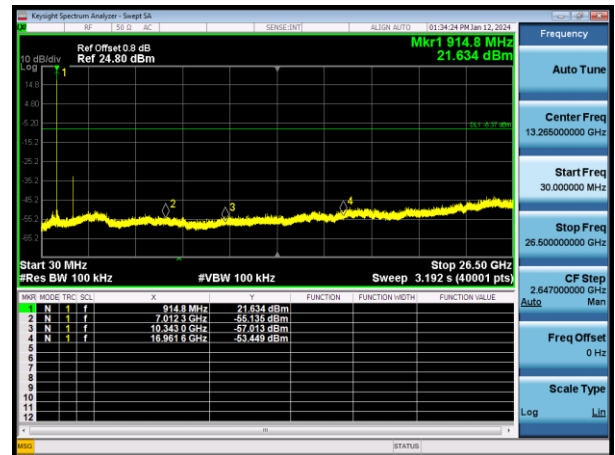


Channel129 927.8MHz

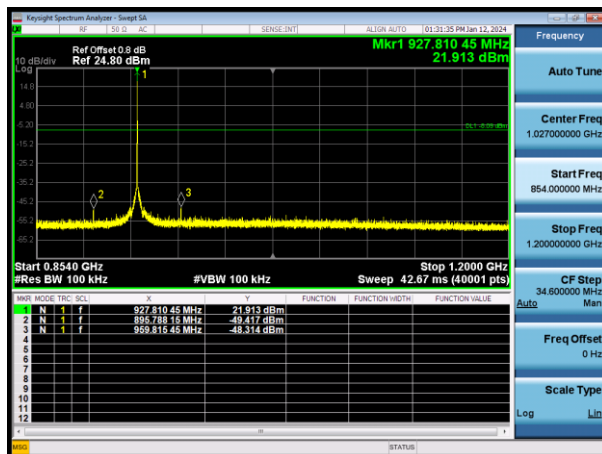

Channel129 927.8MHz

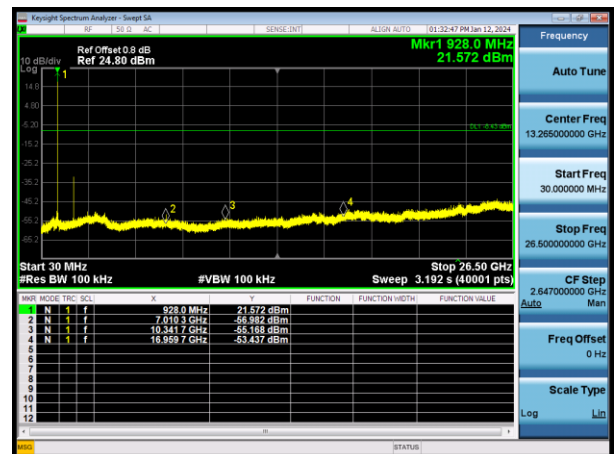

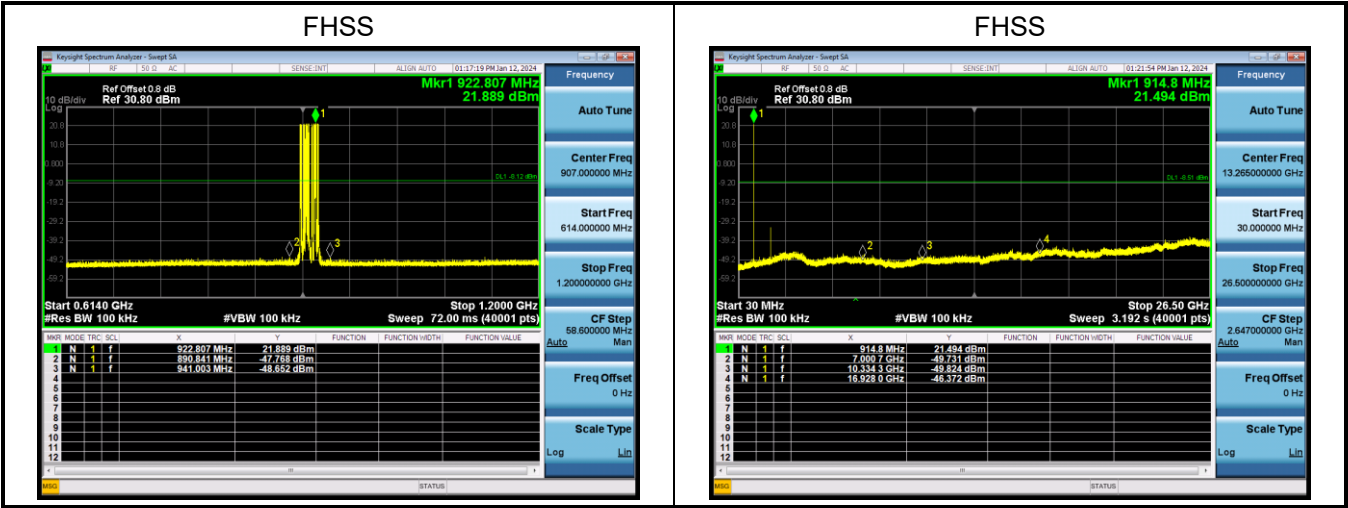


4.4 Radiated Emission Band Edge**VERDICT: PASS****4.4.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.205, 15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.4.2 Test Setup


Above 1GHz Test Setup:

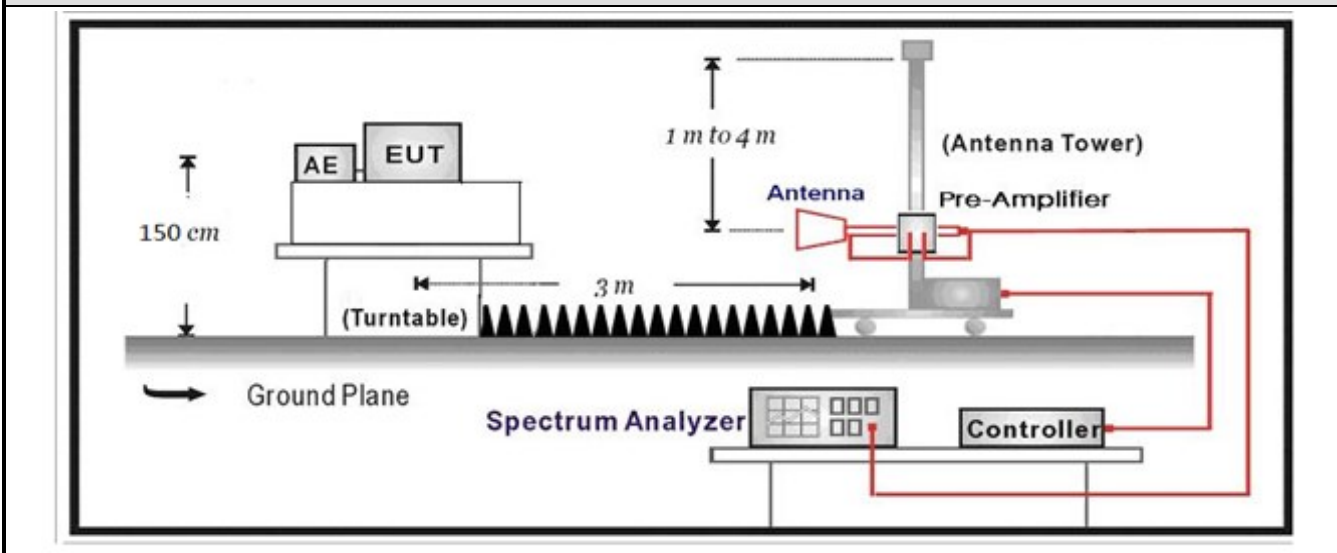

4.4.3 Test Procedure				
	References Rule		Chapter	Description
☒	ANSI C63.10		6.10	Band-edge testing
	☒	ANSI C63.10	6.10.5	Restricted-band band-edge measurements
	☐	ANSI C63.10	6.10.6	Marker-delta method
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	6.3	Radiated spurious emission test
☐	ANSI C63.10		6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10		6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10		6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☐	ANSI C63.10	11.12.2	Antenna-port conducted measurements
		☐	ANSI C63.10	11.12.2.3 Quasi-peak measurement procedure
		☐	ANSI C63.10	11.12.2.4 Peak power measurement procedure
		☐	ANSI C63.10	11.12.2.5 Average power measurement procedures
		☐	ANSI C63.10	11.12.2.5.1 Trace averaging with continuous EUT transmission at full power
		☐	ANSI C63.10	11.12.2.5.2 Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		☐	ANSI C63.10	11.12.2.5.3 Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold


4.4.4 Test Data

Profile: 23B0020R	Page No.: 9
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 21:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Horizontal
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 4:Transmit at 2402MHz by LoRa with 2.4GHz FSK	

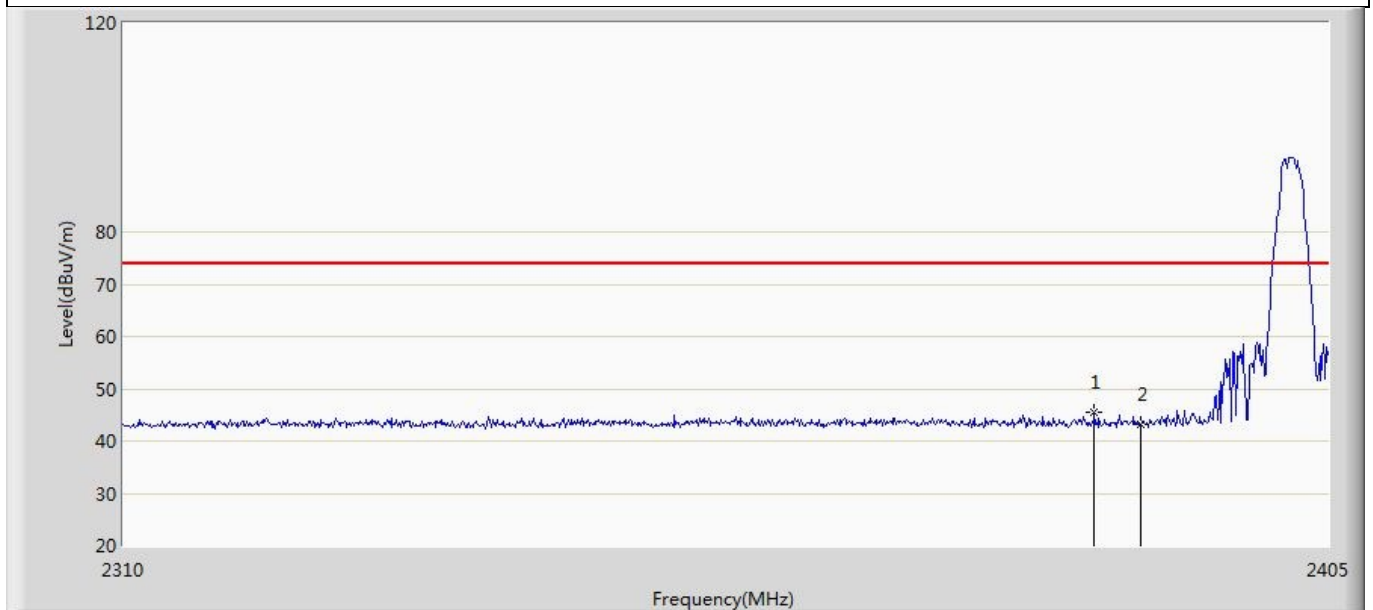


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2386.285	45.371	13.298	-28.629	74.000	32.073	PK
2		2390.000	43.059	10.979	-30.941	74.000	32.080	PK

Profile: 23B0020R	Page No.: 10
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 21:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Horizontal
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 4:Transmit at 2402MHz by LoRa with 2.4GHz FSK	

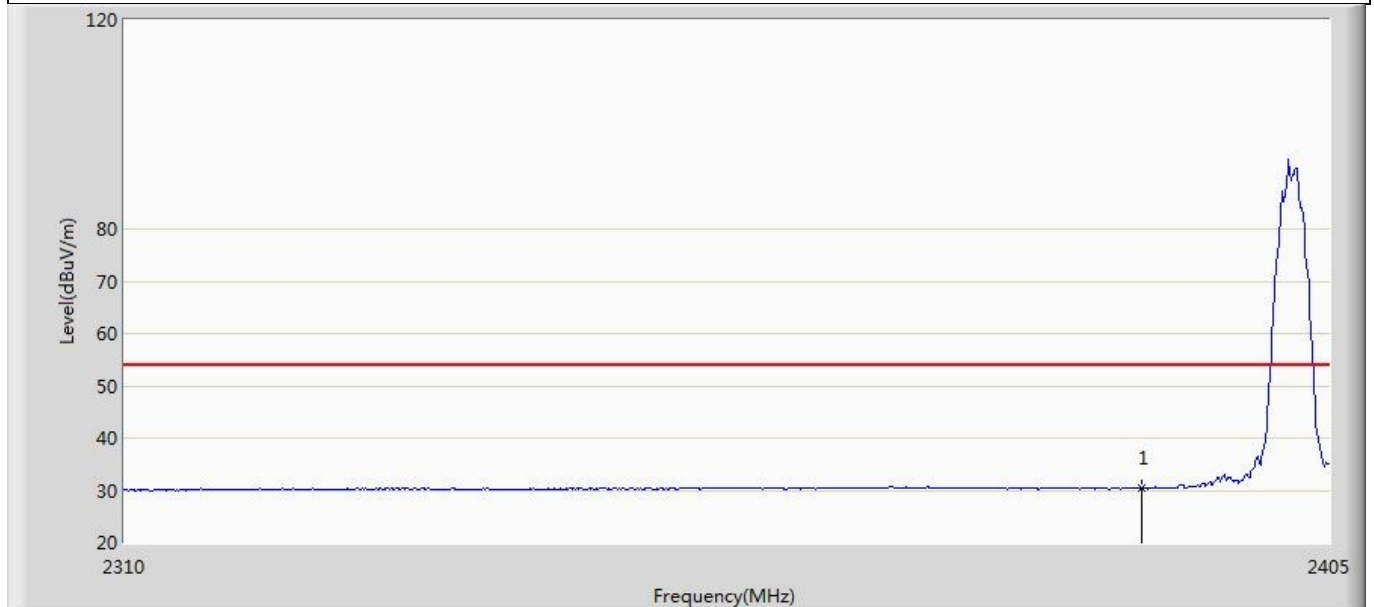


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	30.317	-1.763	-23.683	54.000	32.080	AV

Profile: 23B0020R	Page No.: 11
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 21:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Vertical
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 4:Transmit at 2402MHz by LoRa with 2.4GHz FSK	

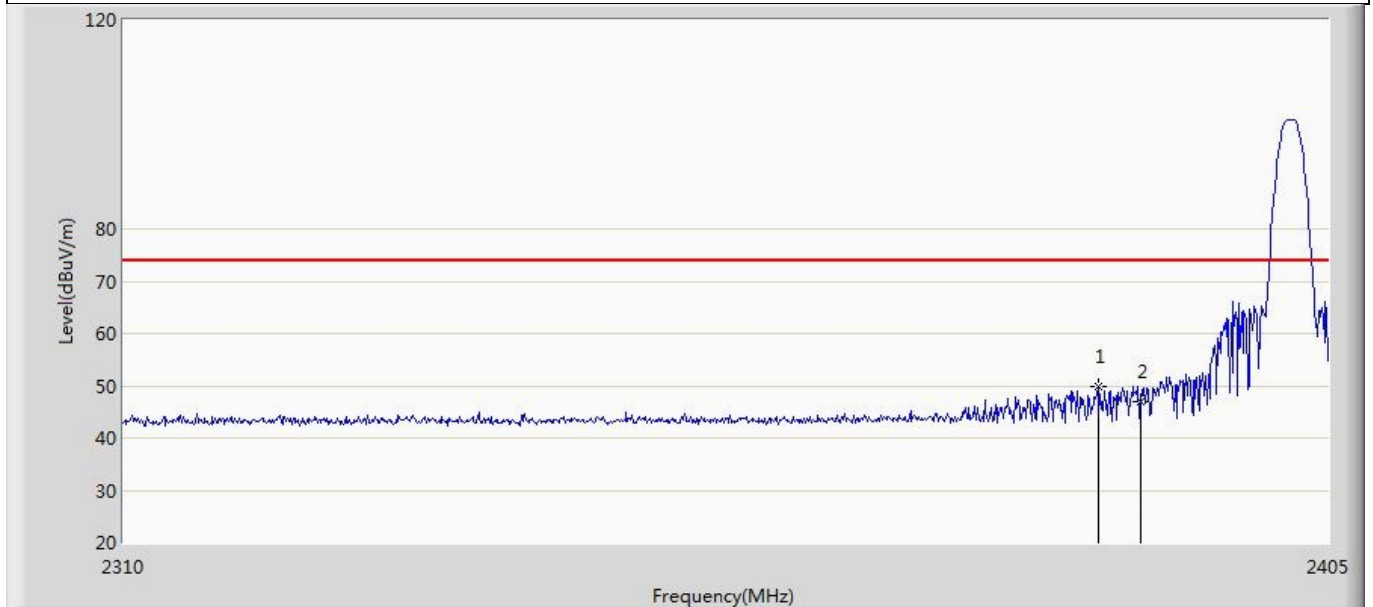


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2386.570	49.818	17.744	-24.182	74.000	32.074	PK
2		2390.000	47.057	14.977	-26.943	74.000	32.080	PK

Profile: 23B0020R	Page No.: 12
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 21:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Vertical
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 4:Transmit at 2402MHz by LoRa with 2.4GHz FSK	

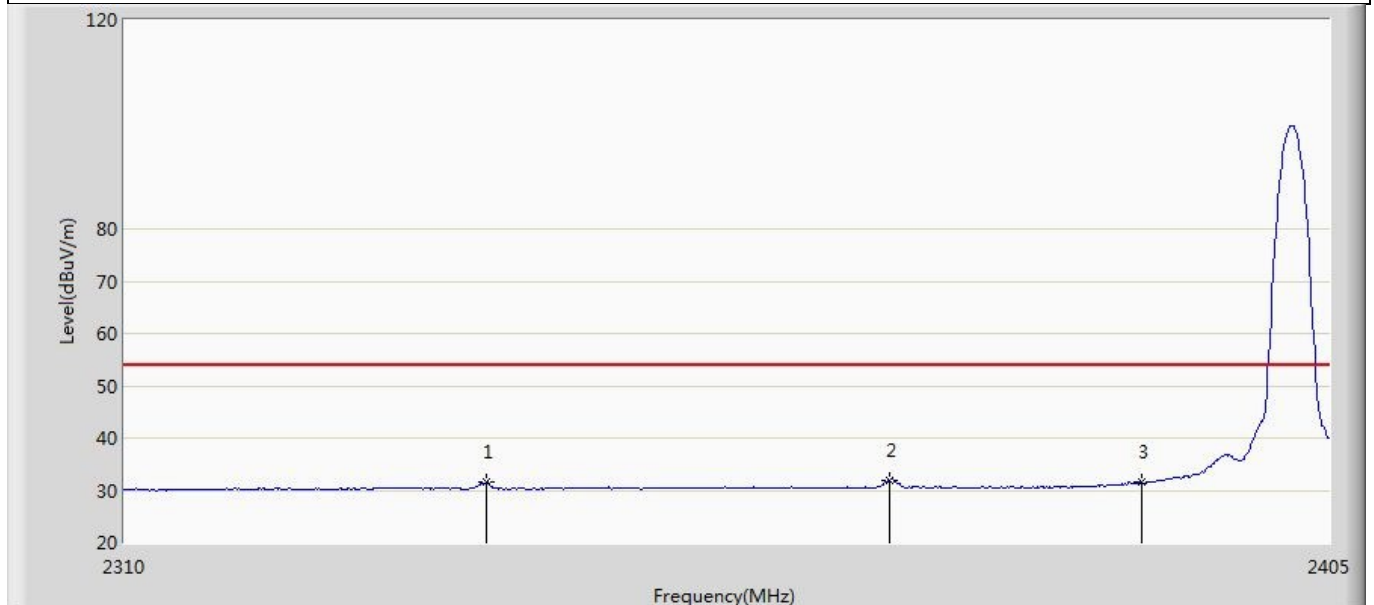


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2338.215	31.506	-0.474	-22.494	54.000	31.980	AV
2	*	2369.945	32.013	-0.028	-21.987	54.000	32.041	AV
3		2390.000	31.464	-0.616	-22.536	54.000	32.080	AV

Profile: 23B0020R	Page No.: 13
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 21:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Horizontal
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 4:Transmit at 2480MHz by LoRa with 2.4GHz FSK	

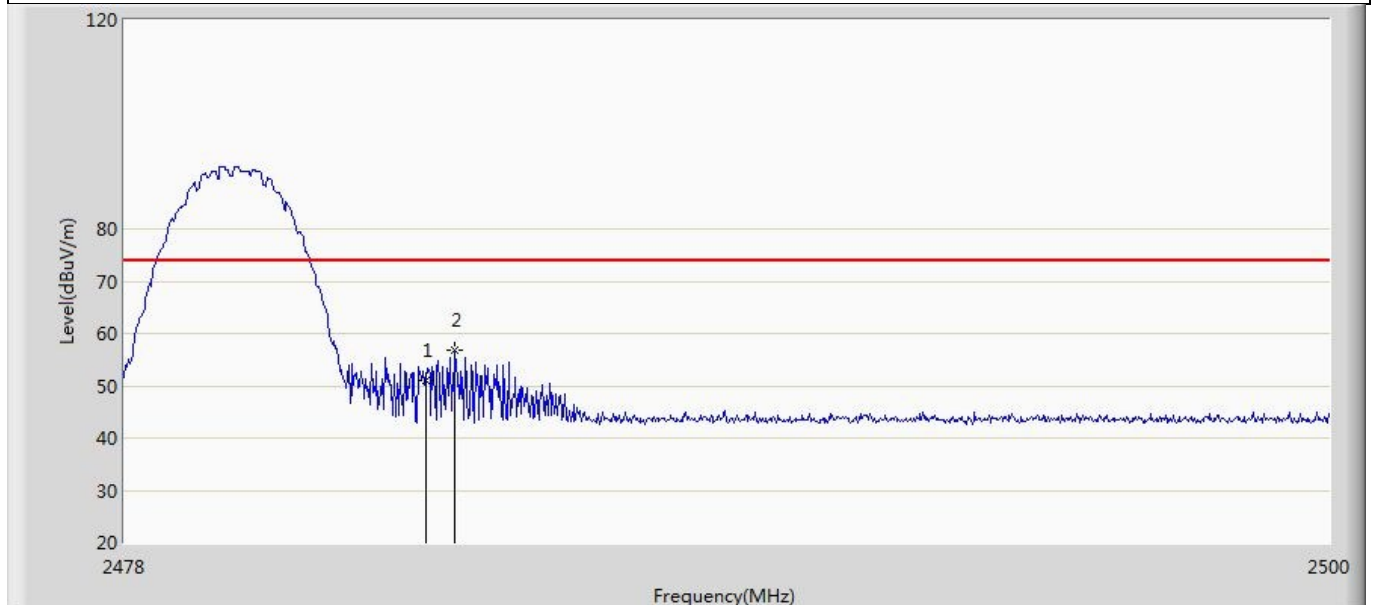


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	51.143	19.013	-22.857	74.000	32.130	PK
2	*	2484.028	56.841	24.711	-17.159	74.000	32.130	PK

Profile: 23B0020R	Page No.: 14
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 21:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Horizontal
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 4:Transmit at 2480MHz by LoRa with 2.4GHz FSK	

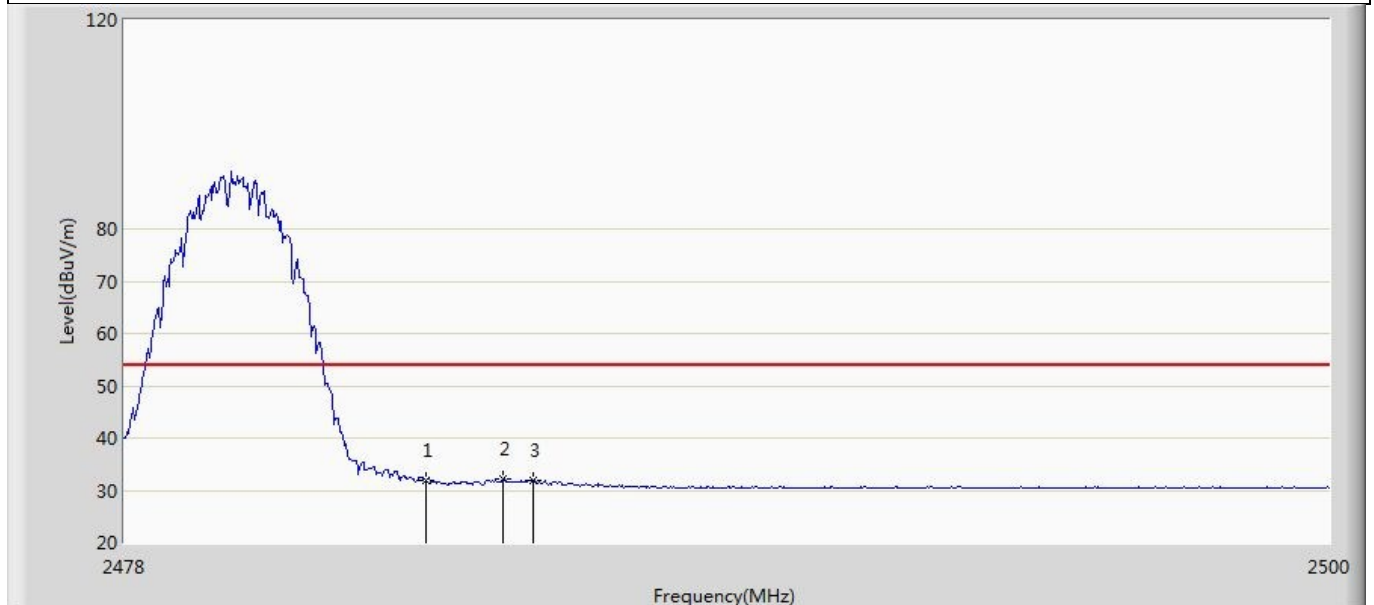


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	31.768	-0.362	-22.232	54.000	32.130	AV
2	*	2484.908	32.029	-0.101	-21.971	54.000	32.130	AV
3		2485.436	32.006	-0.124	-21.994	54.000	32.130	AV

Profile: 23B0020R	Page No.: 15
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 21:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Vertical
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 4:Transmit at 2480MHz by LoRa with 2.4GHz FSK	

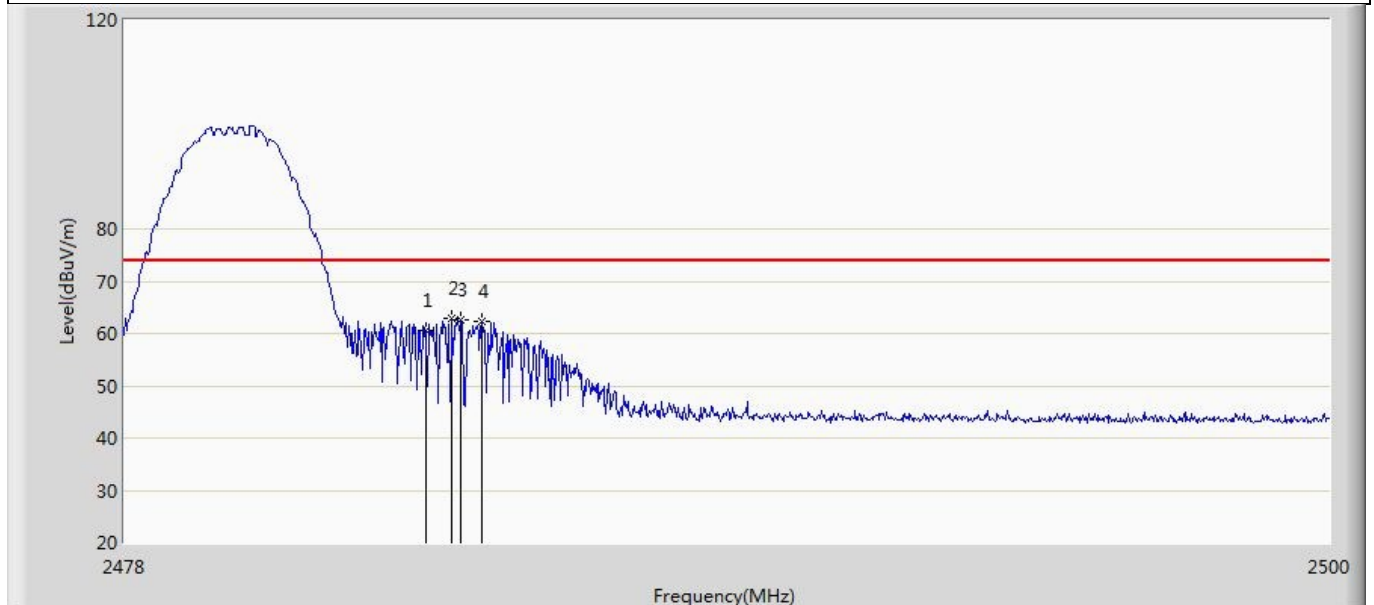


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	60.635	28.505	-13.365	74.000	32.130	PK
2	*	2483.962	62.797	30.667	-11.203	74.000	32.130	PK
3		2484.138	62.498	30.368	-11.502	74.000	32.130	PK
4		2484.512	62.393	30.263	-11.607	74.000	32.130	PK

Profile: 23B0020R	Page No.: 16
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 21:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Vertical
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 4:Transmit at 2480MHz by LoRa with 2.4GHz FSK	

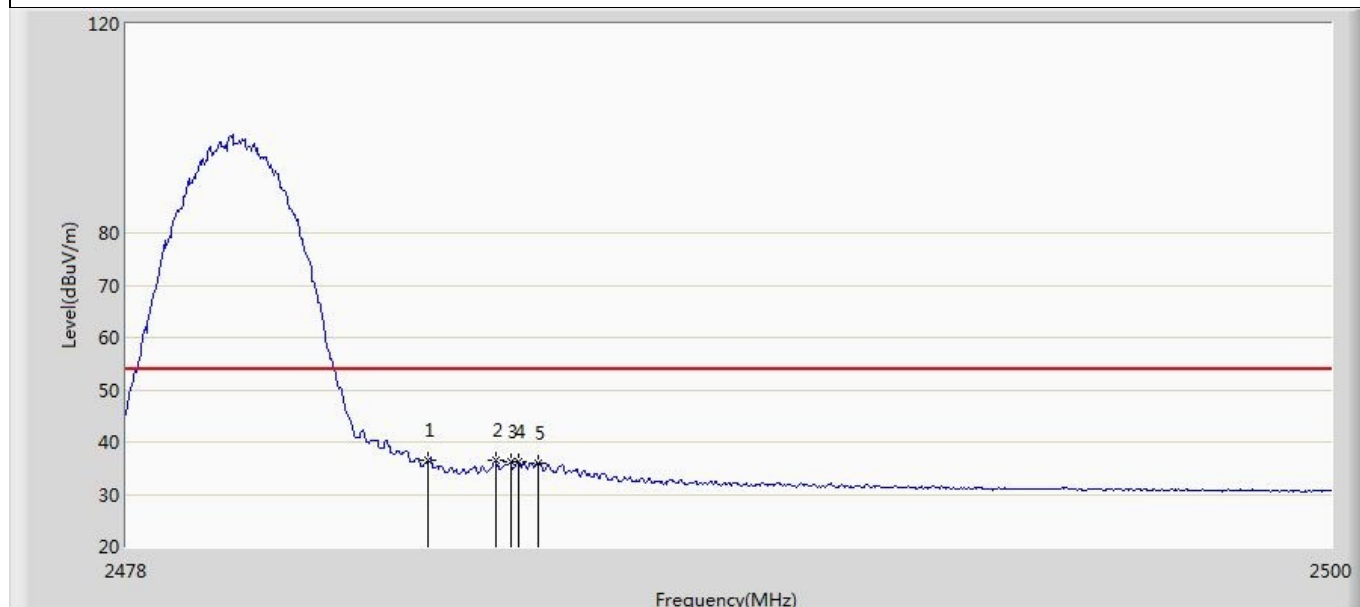


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	36.622	4.492	-17.378	54.000	32.130	AV
2		2484.732	36.476	4.346	-17.524	54.000	32.130	AV
3		2484.996	36.304	4.174	-17.696	54.000	32.130	AV
4		2485.150	36.340	4.210	-17.660	54.000	32.130	AV
5		2485.502	36.077	3.947	-17.923	54.000	32.130	AV

Profile: 23B0020R	Page No.: 1
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Horizontal
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 5:Transmit at 2403MHz by LoRa with 812kHz LoRa	

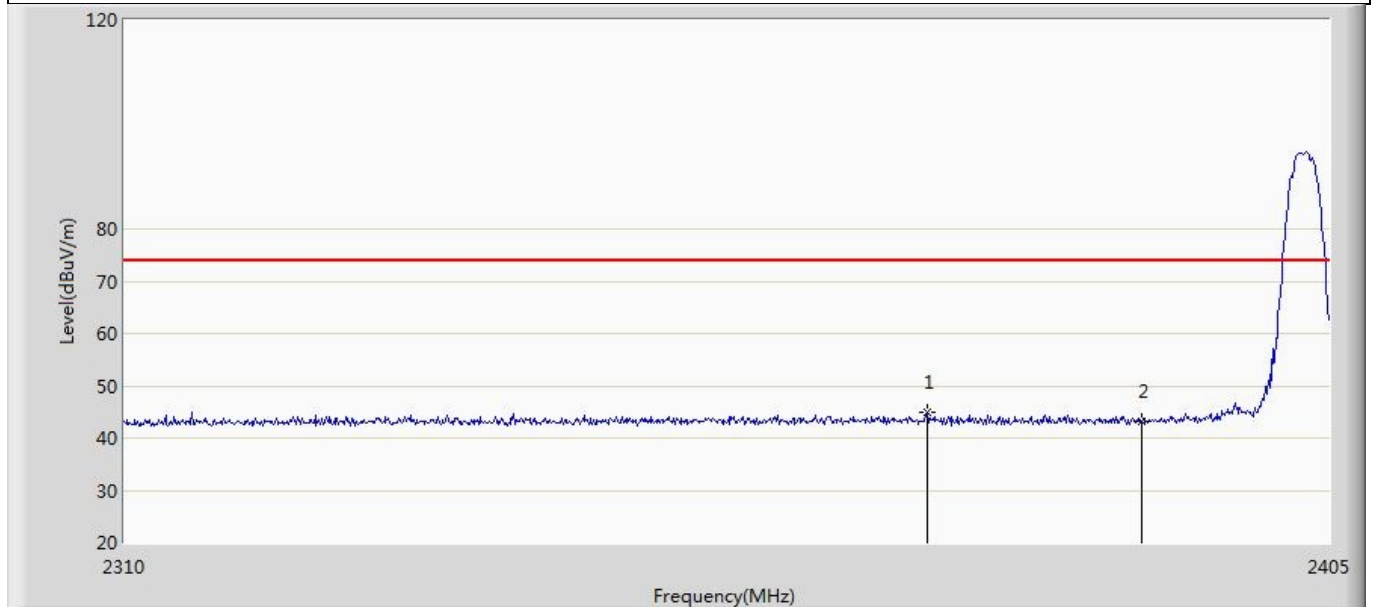


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2372.890	45.004	12.957	-28.996	74.000	32.047	PK
2		2390.000	43.101	11.021	-30.899	74.000	32.080	PK

Profile: 23B0020R	Page No.: 2
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 00:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Horizontal
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 5:Transmit at 2403MHz by LoRa with 812kHz LoRa	

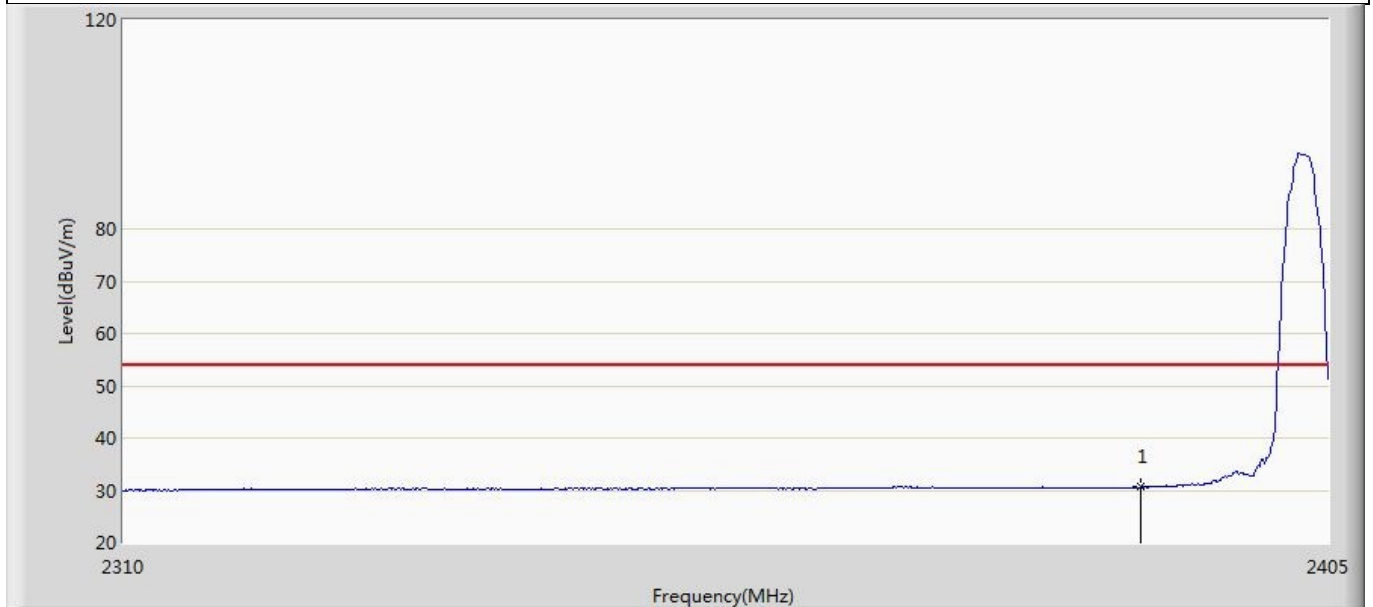


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	30.586	-1.494	-23.414	54.000	32.080	AV

Profile: 23B0020R	Page No.: 3
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 00:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Vertical
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 5:Transmit at 2403MHz by LoRa with 812kHz LoRa	

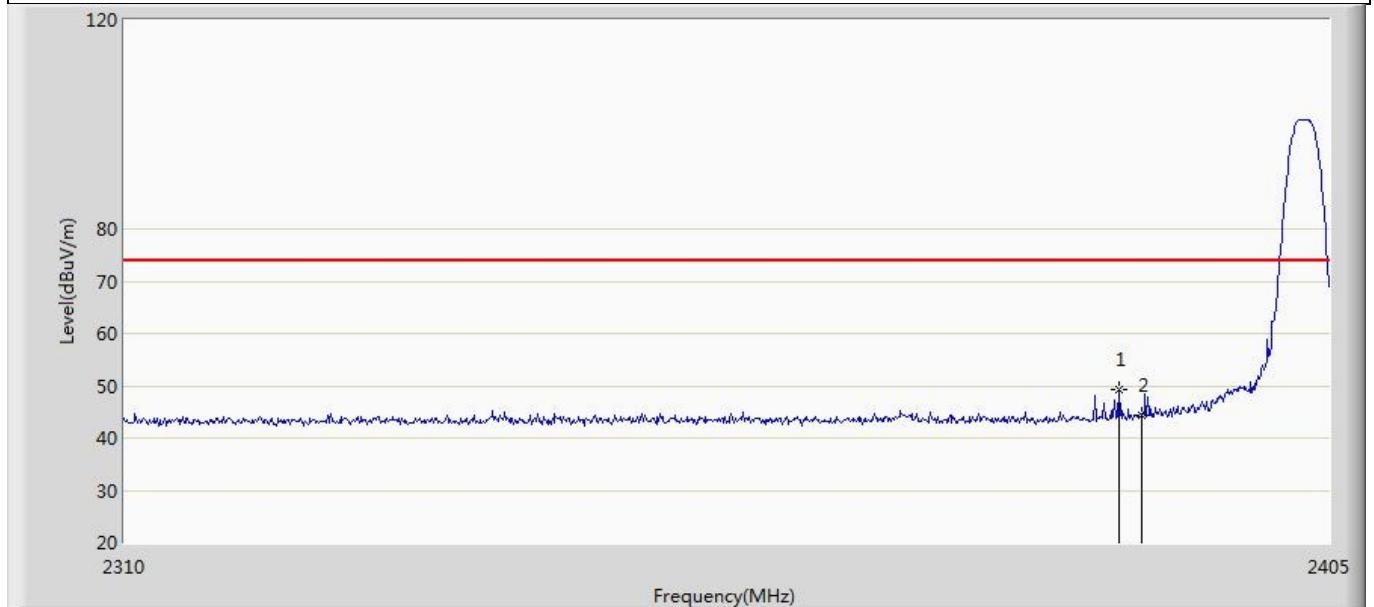


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2388.185	49.243	17.166	-24.757	74.000	32.077	PK
2		2390.000	44.302	12.222	-29.698	74.000	32.080	PK

Profile: 23B0020R	Page No.: 4
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 00:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Vertical
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 5:Transmit at 2403MHz by LoRa with 812kHz LoRa	

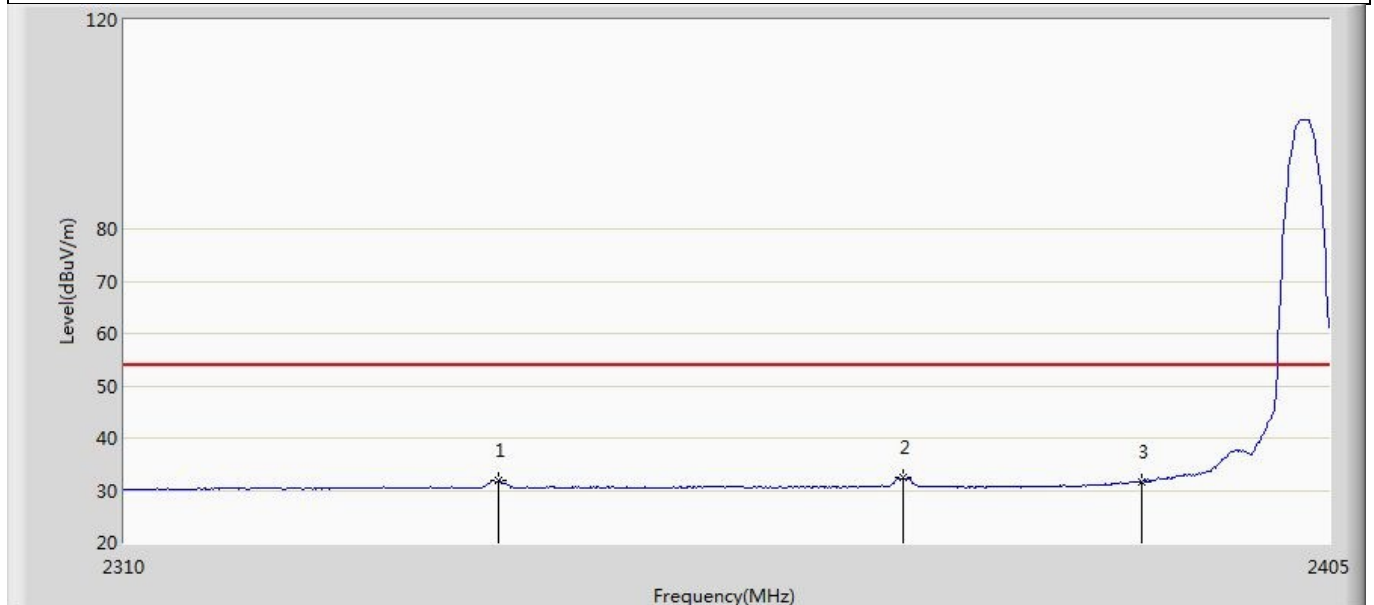


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2339.070	32.009	0.028	-21.991	54.000	31.981	AV
2	*	2370.990	32.349	0.306	-21.651	54.000	32.043	AV
3		2390.000	31.707	-0.373	-22.293	54.000	32.080	AV

Profile: 23B0020R	Page No.: 5
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 21:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Horizontal
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 5:Transmit at 2479MHz by LoRa with 812kHz LoRa	

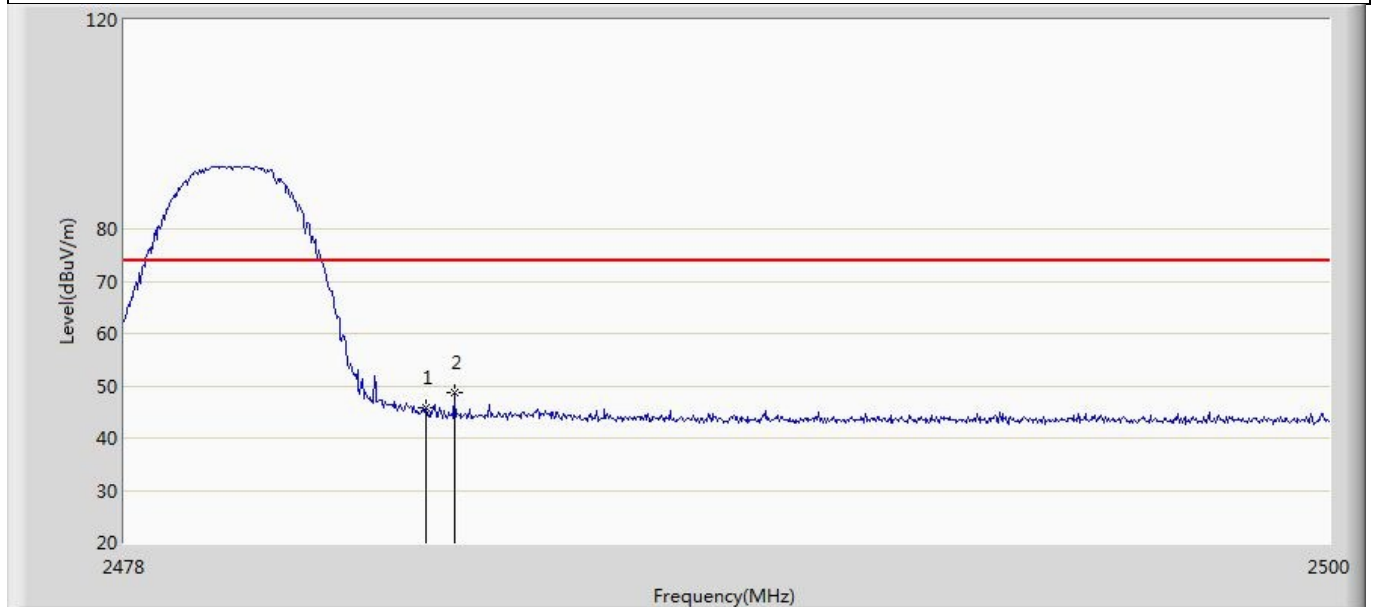


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	45.656	13.526	-28.344	74.000	32.130	PK
2	*	2484.006	48.683	16.553	-25.317	74.000	32.130	PK

Profile: 23B0020R	Page No.: 6
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 21:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Horizontal
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 5:Transmit at 2479MHz by LoRa with 812kHz LoRa	

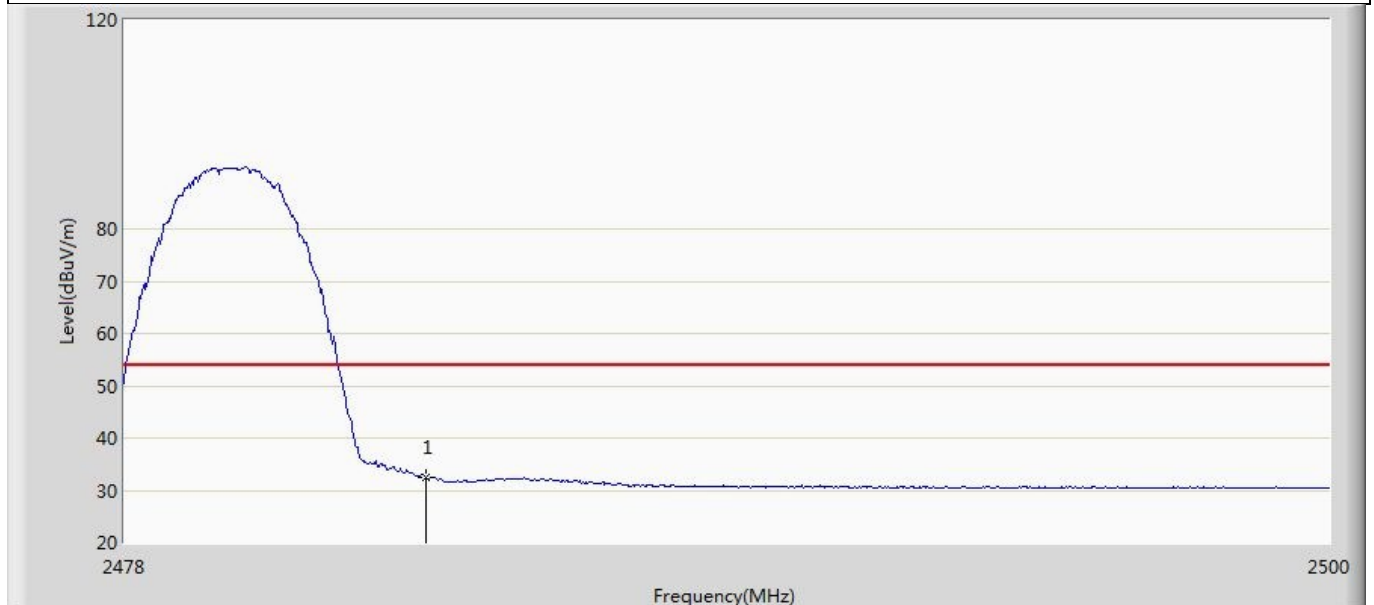


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	32.363	0.233	-21.637	54.000	32.130	AV

Profile: 23B0020R	Page No.: 7
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 21:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Vertical
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 5:Transmit at 2479MHz by LoRa with 812kHz LoRa	

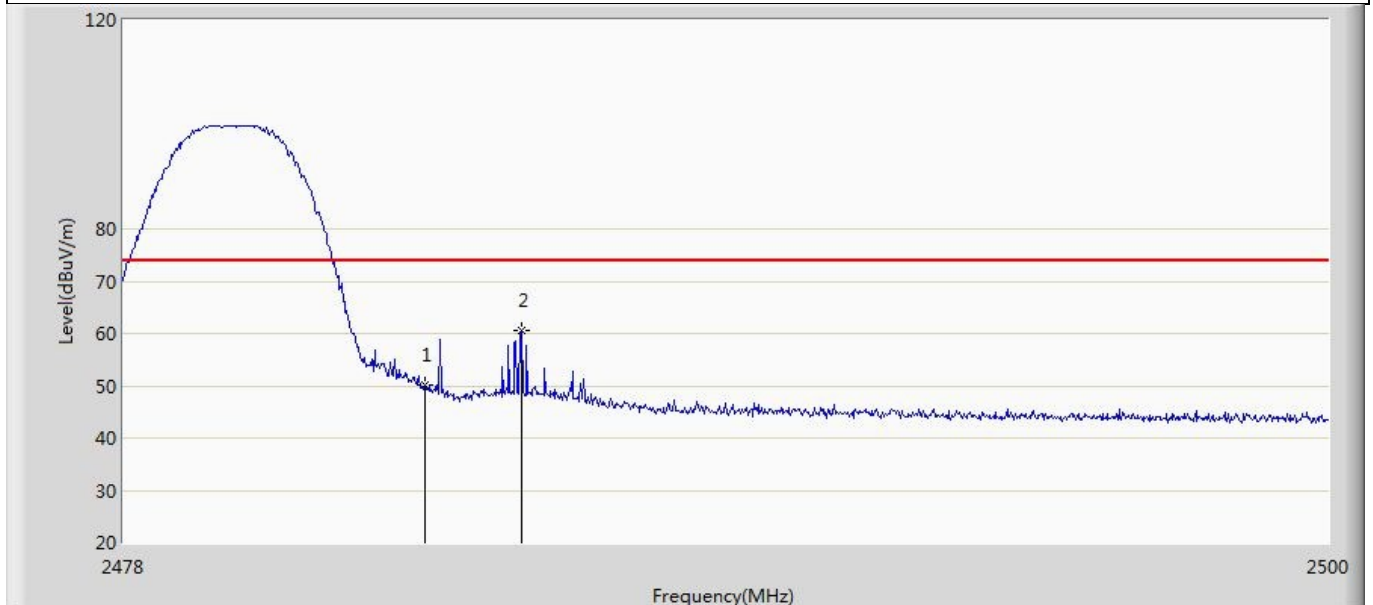

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	50.013	17.883	-23.987	74.000	32.130	PK
2	*	2485.260	60.723	28.593	-13.277	74.000	32.130	PK

Profile: 23B0020R	Page No.: 8
Engineer: Pengchengyang	
Site: AC5	Time: 2023/11/25 - 21:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988(1-18GHz)	Polarity: Vertical
EUT: LoRa Module	Power: DC 3.3V
Note: Mode 5:Transmit at 2479MHz by LoRa with 812kHz LoRa	

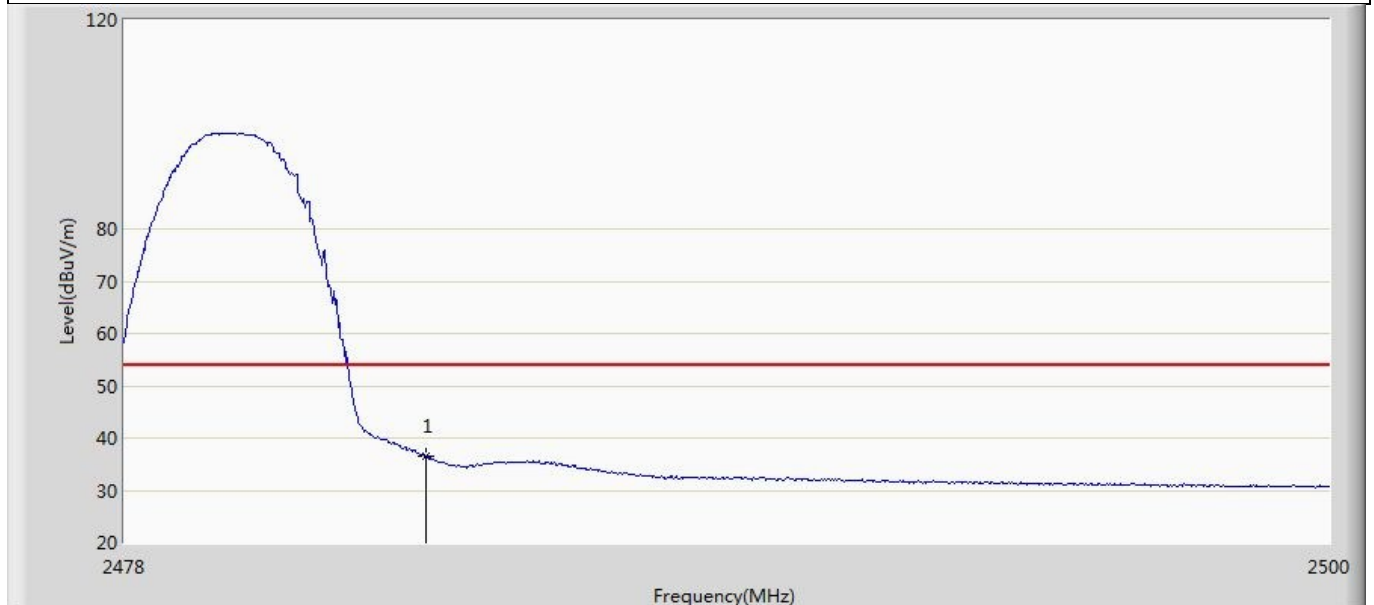

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	36.417	4.287	-17.583	54.000	32.130	AV


Remark	No restricted band in the range ± 2 channel bandwidths of the Band-edges of the specified emission band! (608 MHz – 614 MHz and 960 MHz – 1240 MHz).
--------	--

4.5 6dB and 20dB Bandwidth**VERDICT: PASS****4.5.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247 (a)(1)(2)
(1) Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz	
(2) For frequency hopping systems operating in 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.	

Standard	ANSI C63.10 Paragraph 6.7
----------	---------------------------

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs. The occupied bandwidth should be within the required frequency range.

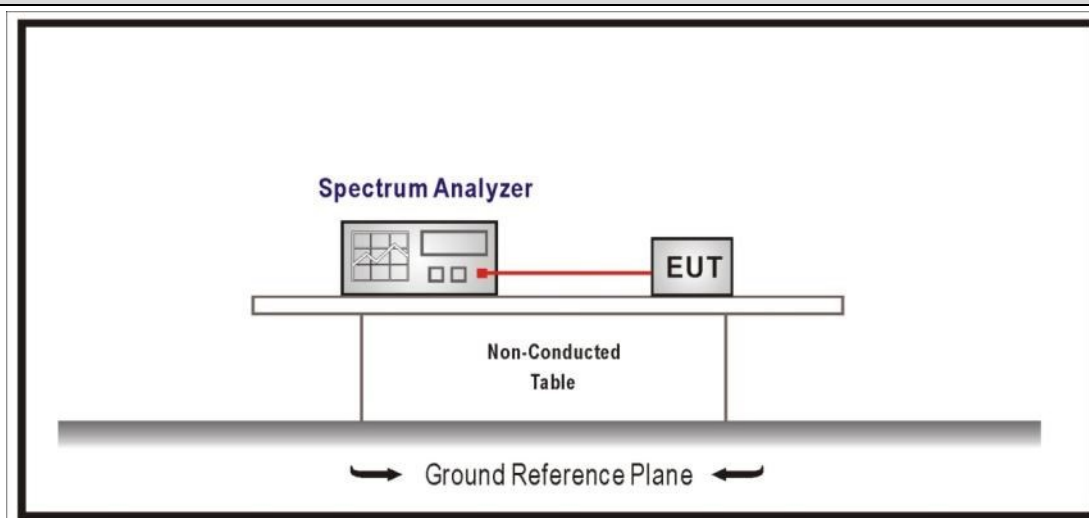4.5.2 Test Setup**4.5.3 Test Procedure**


	Reference Rule	Chapter	Description
☒	ANSI C63.10	11.8	DTS bandwidth
☐	ANSI C63.10	11.8.1	Option 1
☒	ANSI C63.10	11.8.2	Option 2
☒	ANSI C63.10	6.9	Occupied bandwidth
☐	ANSI C63.10	6.9.2	relative measurement procedure
☒	ANSI C63.10	6.9.3	power bandwidth (99%) measurement procedure

4.5.4 Test Data


Mode	CH.	Test Freq. (MHz)	20dB Occupied Bandwidth (kHz)	Limit (kHz)	Result
1	00	902.3	139.5	≤ 250	Pass
	31	908.5	139.5	≤ 250	Pass
	63	914.9	143.2	≤ 250	Pass


20dB Occupied Bandwidth

CH00 (902.3MHz)

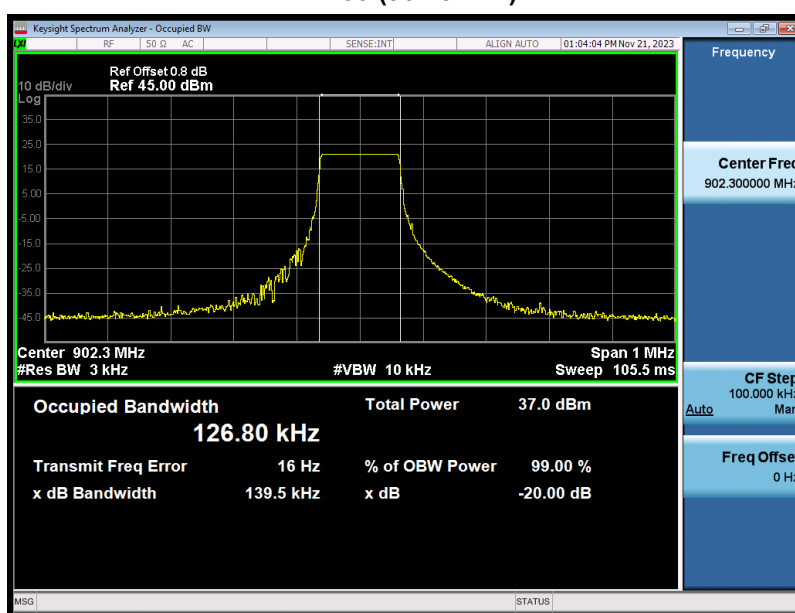

CH31 (908.5MHz)

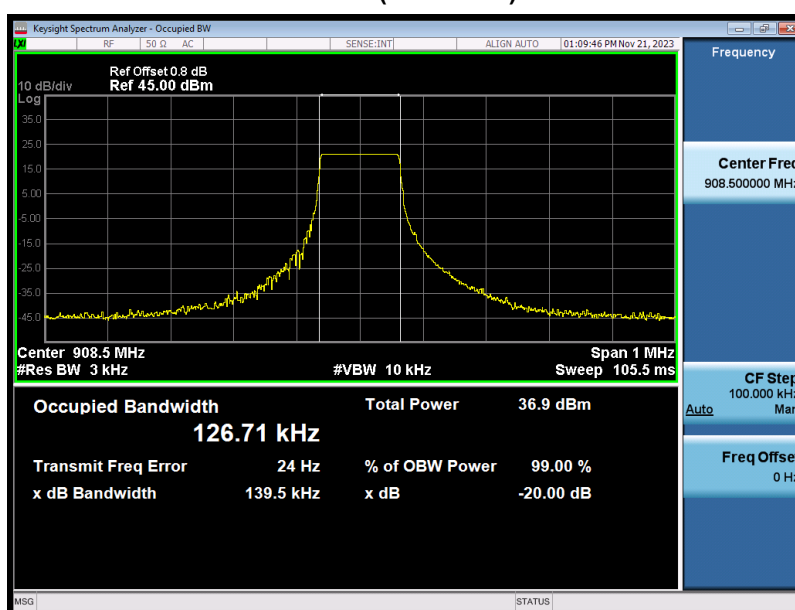


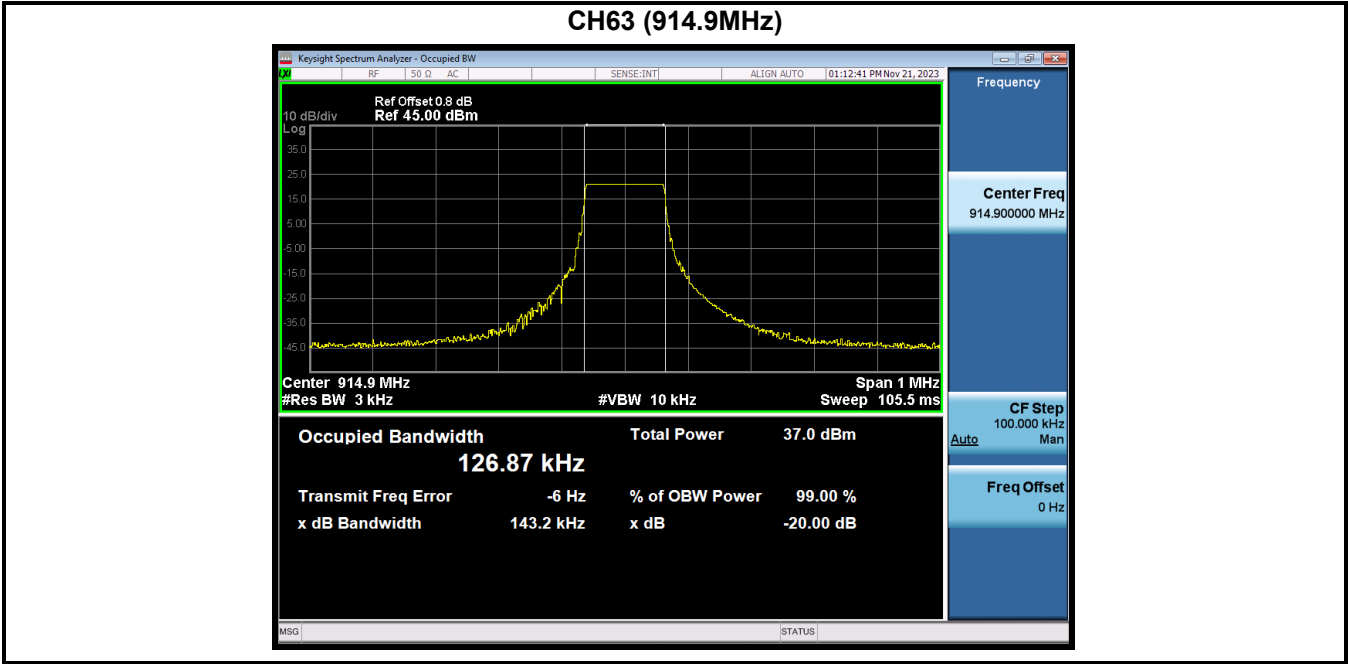


Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (KHz)	Limit (kHz)	Result
2	64	903	637.5	≥ 500	Pass
	67	907.8	637.1	≥ 500	Pass
	71	914.2	635.7	≥ 500	Pass


6dB Occupied Bandwidth

CH64 (903MHz)

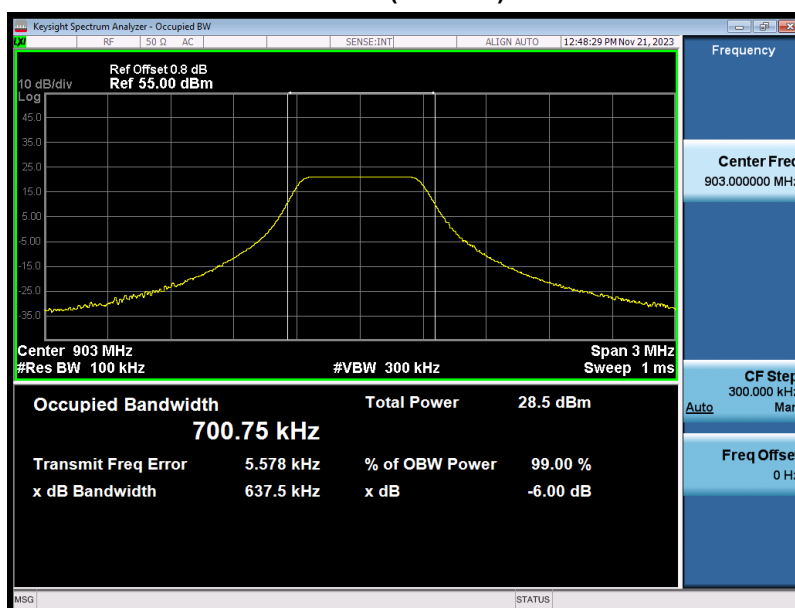

CH67 (907.8MHz)

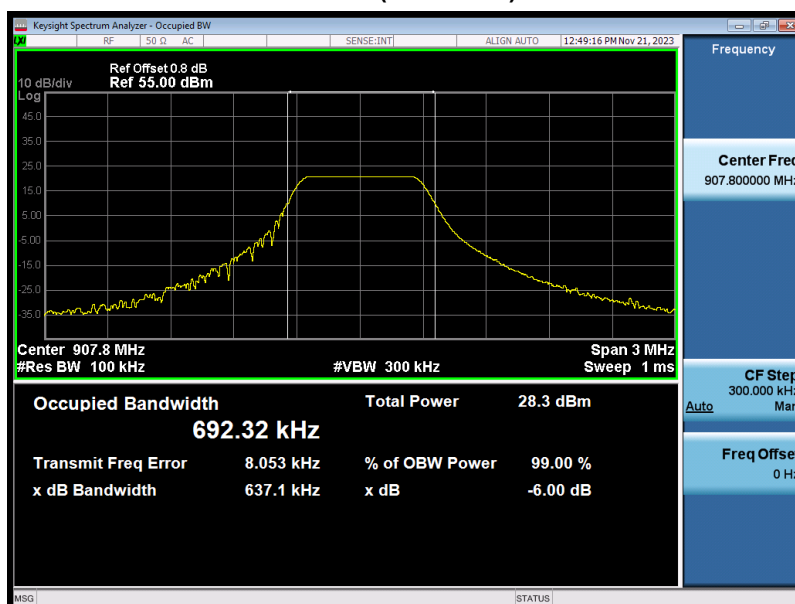


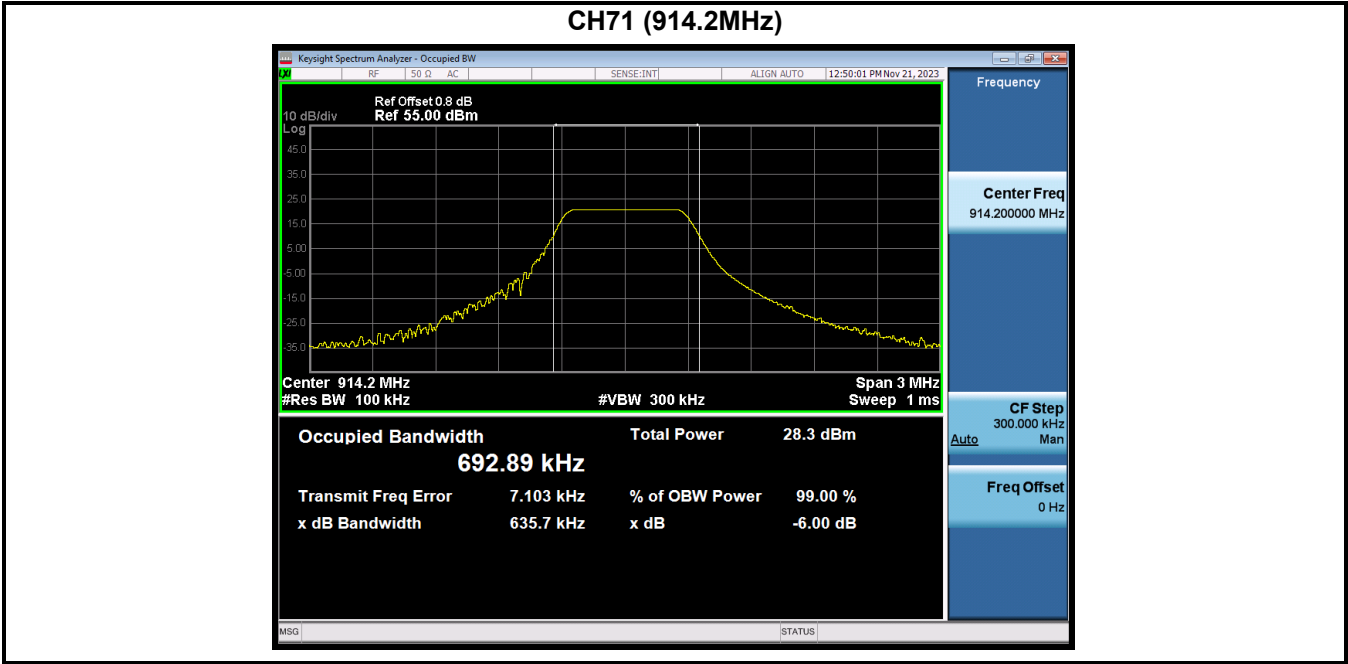


Mode	CH.	Test Freq. (MHz)	20dB Occupied Bandwidth (Hz)	Limit (kHz)	Result
3	64	903	636	≤250	Pass
	67	907.8	678	≤250	Pass
	71	914.2	584	≤250	Pass


20dB Occupied Bandwidth

CH64 (903MHz)

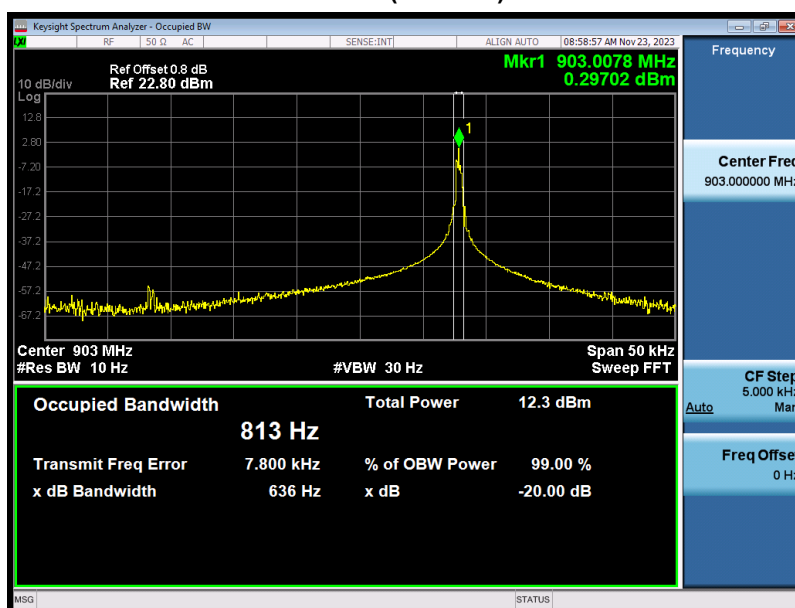

CH67 (907.8MHz)

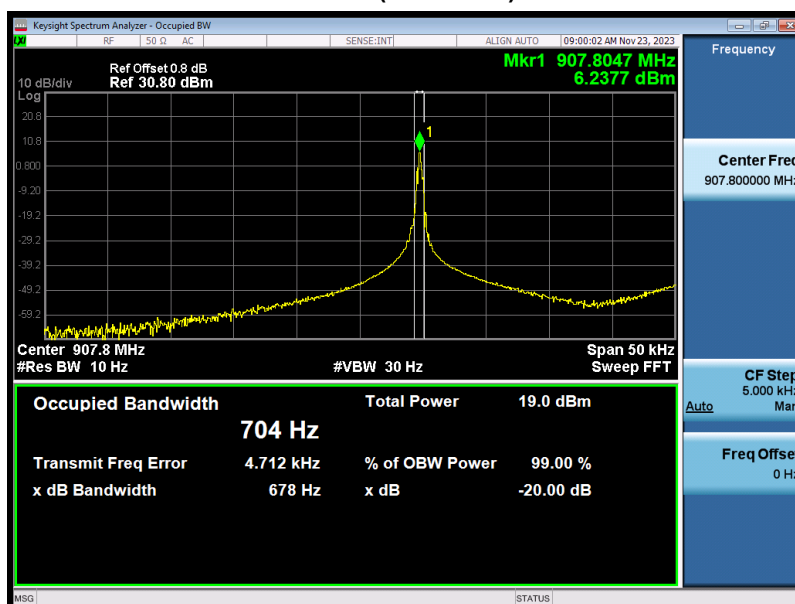


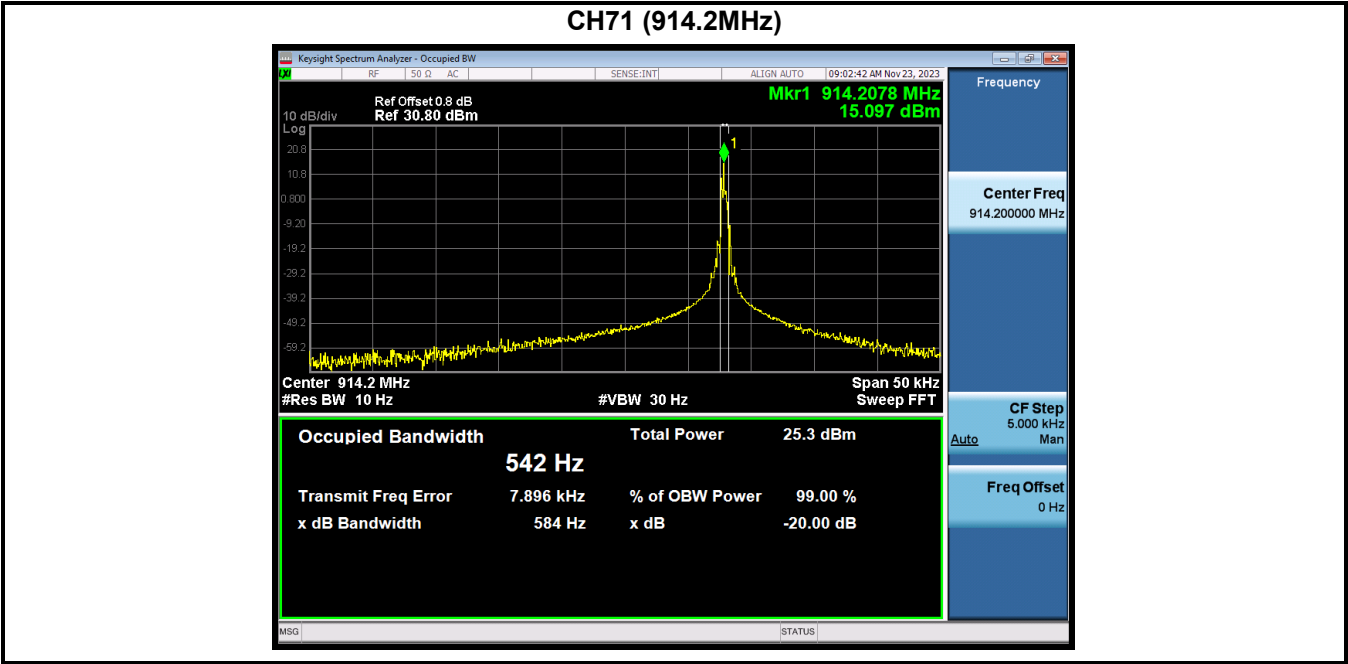


Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (KHz)	Limit (kHz)	Result
4	00	2402	548	≥ 500	Pass
	39	2441	540	≥ 500	Pass
	78	2480	536	≥ 500	Pass


6dB Occupied Bandwidth

CH00 (2402MHz)

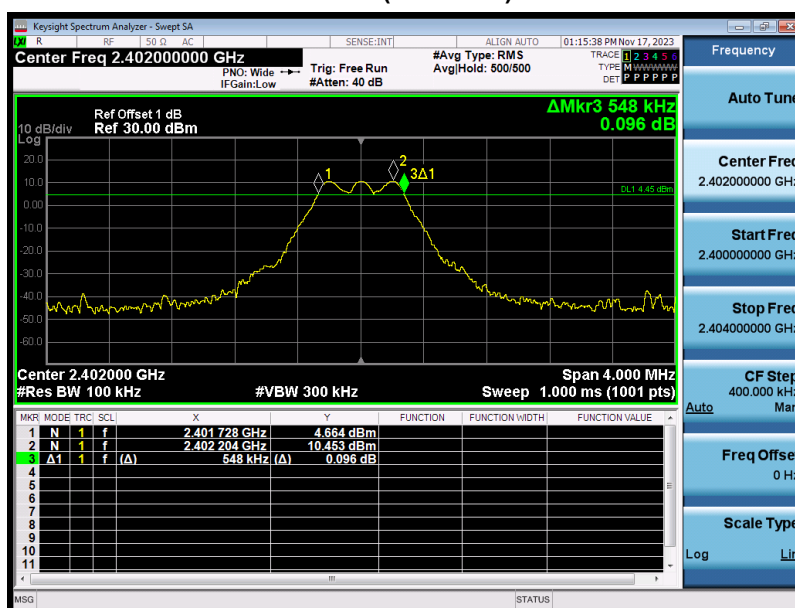

CH39 (2441MHz)

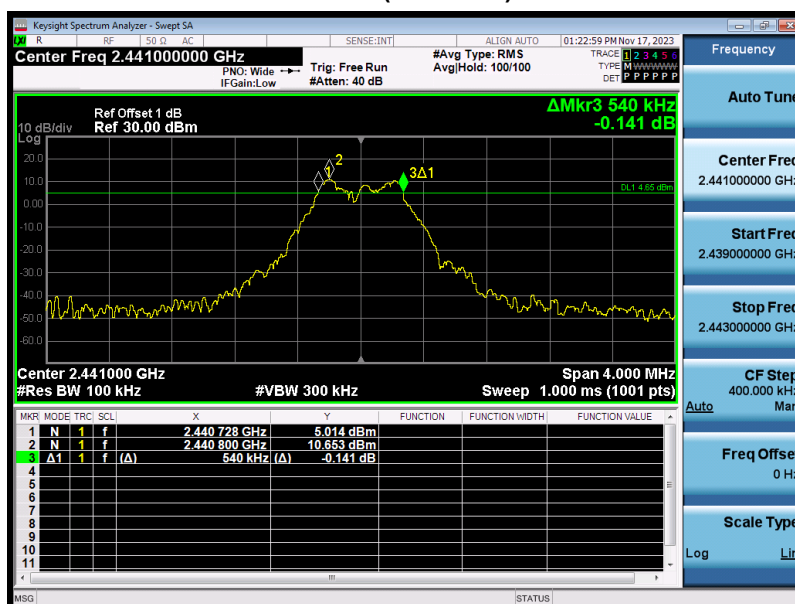

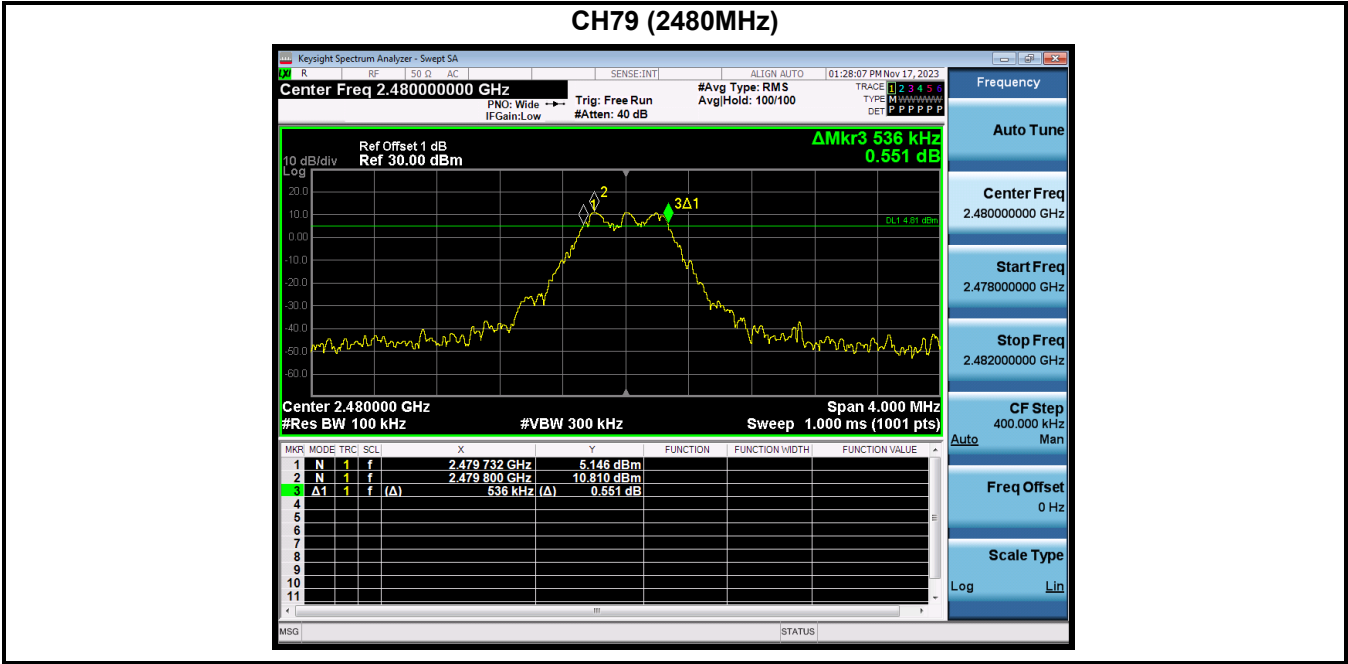


Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (KHz)	Limit (kHz)	Result
5	00	2403	944	≥ 500	Pass
	39	2442	936	≥ 500	Pass
	76	2479	952	≥ 500	Pass


6dB Occupied Bandwidth

CH00 (2403MHz)



CH39 (2442MHz)

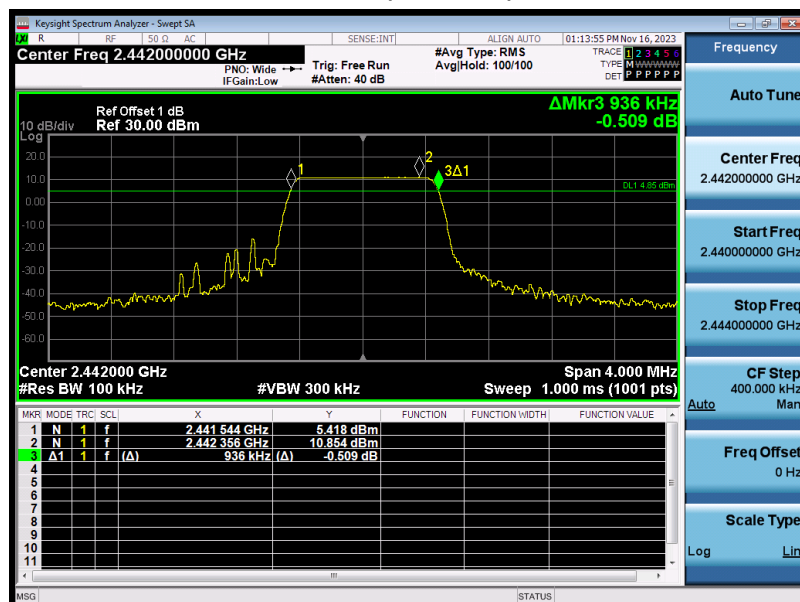


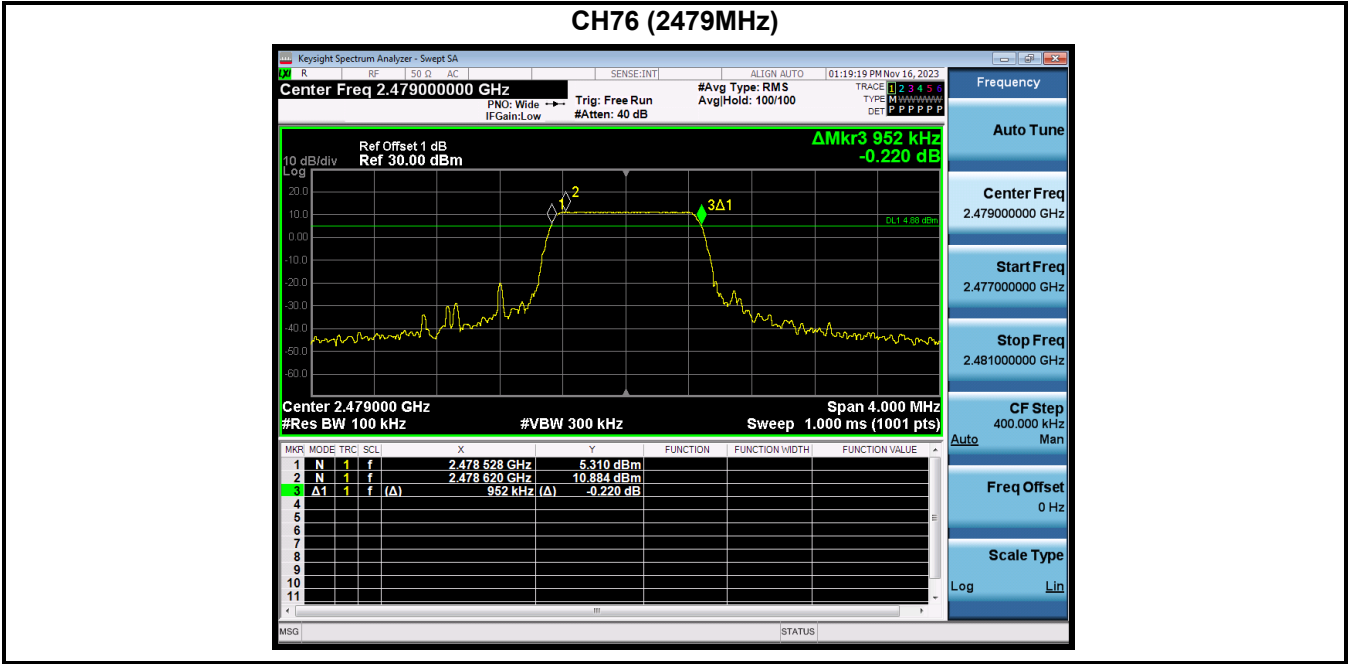


Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (KHz)	Limit (kHz)	Result
6	01	902.5	646.4	≥ 500	Pass
	16	914.5	646.6	≥ 500	Pass
	31	926.5	645.0	≥ 500	Pass


6dB Occupied Bandwidth

CH01 (902.5MHz)

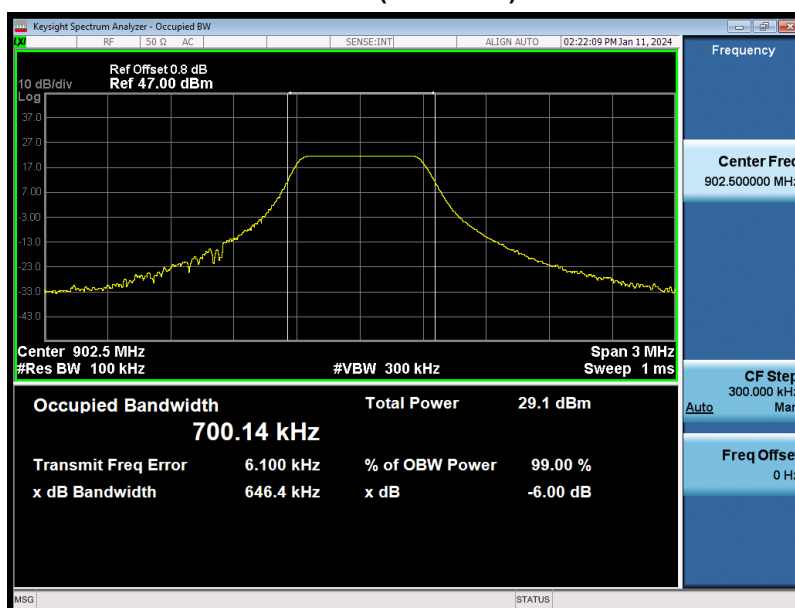

CH16 (914.5MHz)

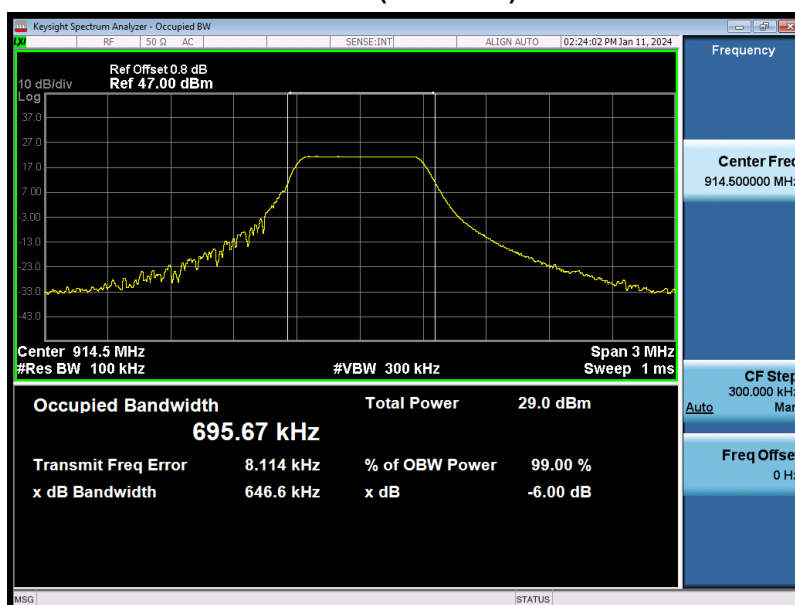


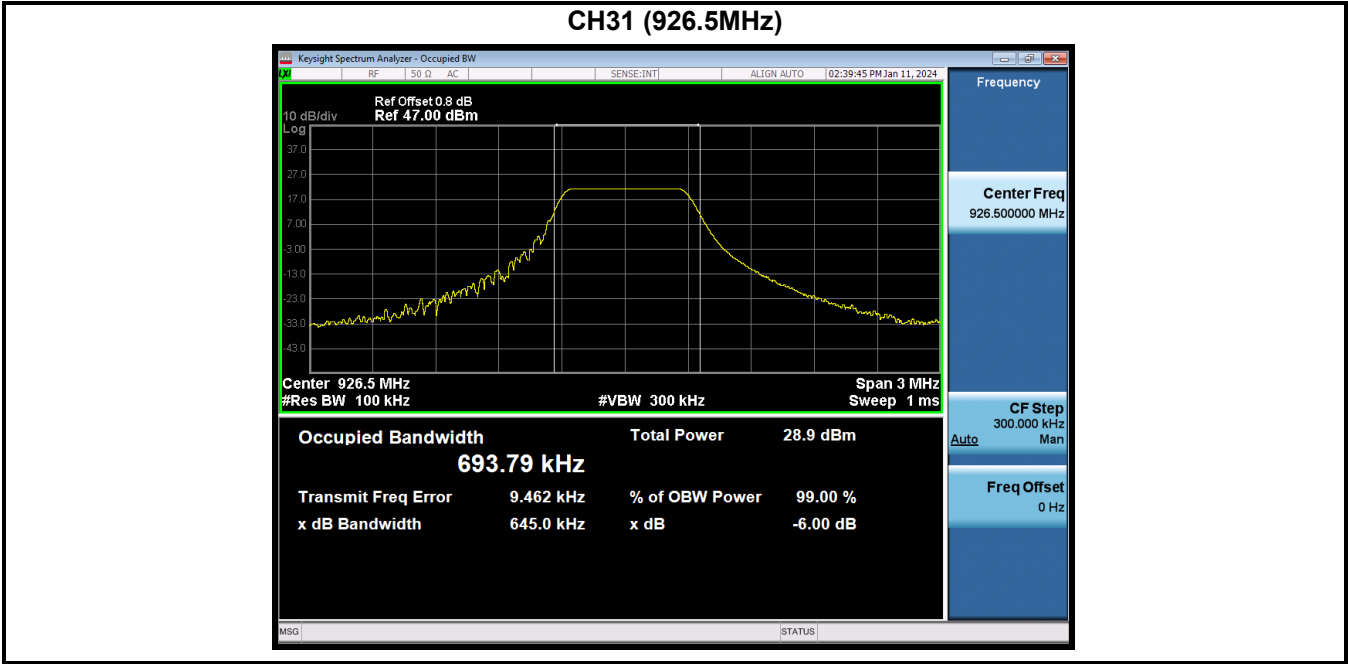


Mode	CH.	Test Freq. (MHz)	20dB Occupied Bandwidth (Hz)	Limit (kHz)	Result
7	01	902.2	106.9	≤250	Pass
	65	915	106.0	≤250	Pass
	129	927.8	105.5	≤250	Pass


20dB Occupied Bandwidth

CH01 (902.2MHz)

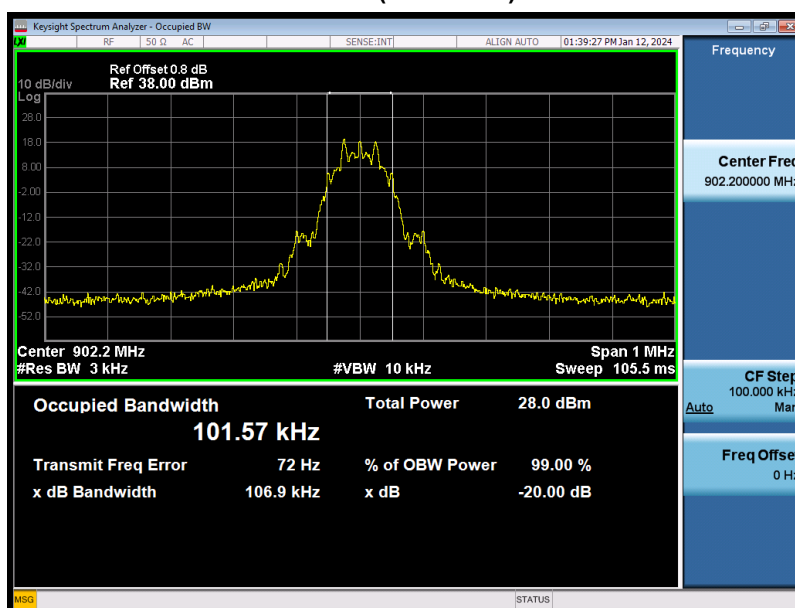

CH65 (915MHz)

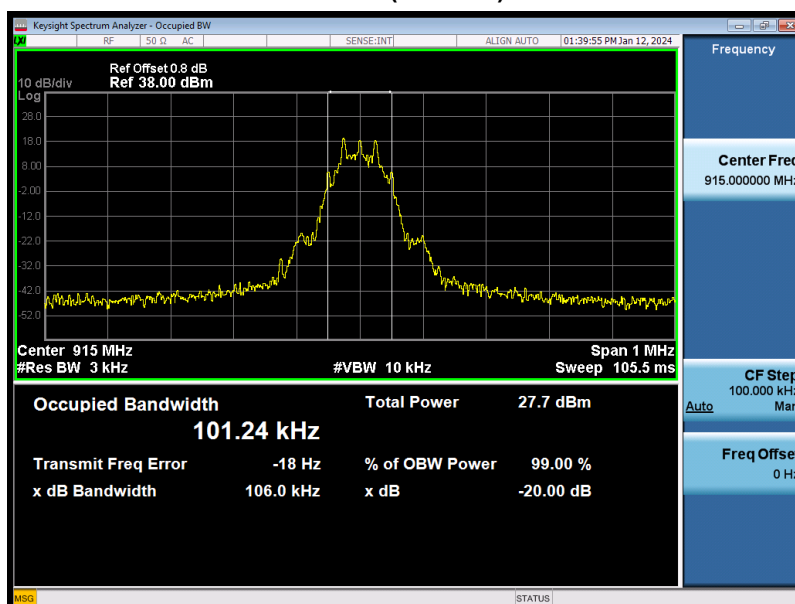


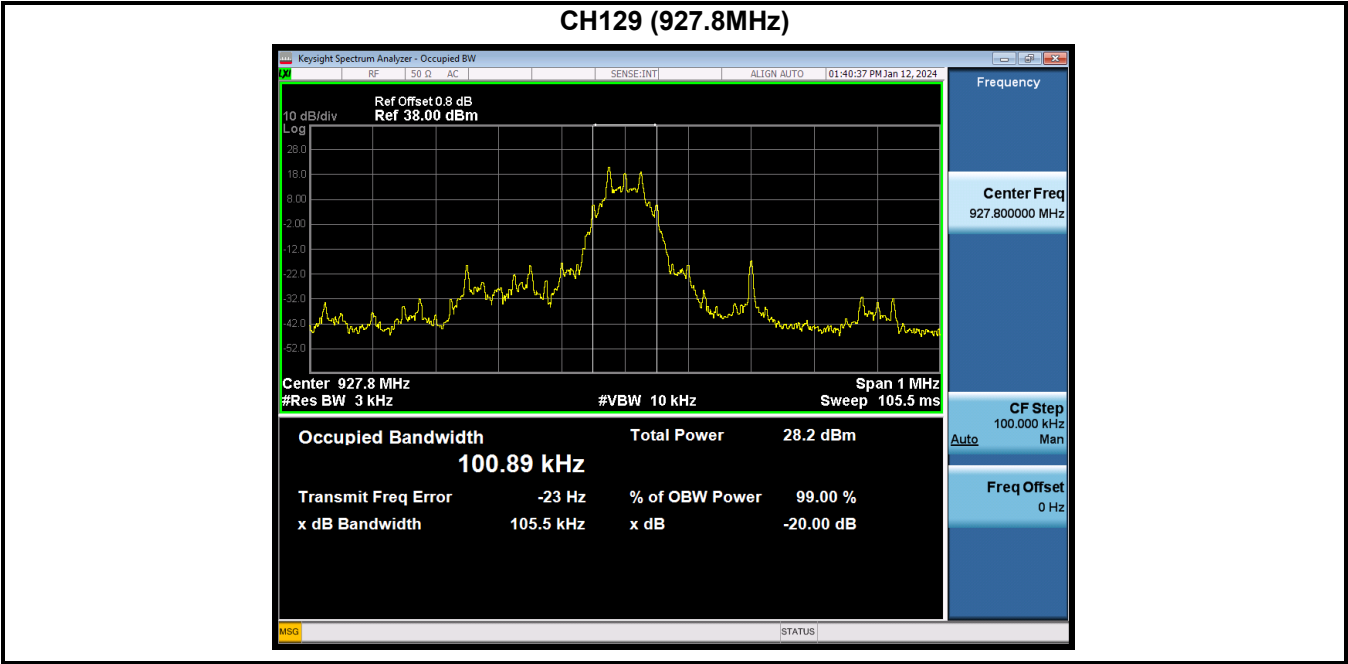


Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (kHz)	Limit	Result
1	00	902.3	126.89	Within frequency range	Pass
	31	908.5	126.80	Within frequency range	Pass
	63	914.9	126.75	Within frequency range	Pass
2	64	903.0	507.13	Within frequency range	Pass
	67	907.8	504.72	Within frequency range	Pass
	71	914.2	505.75	Within frequency range	Pass
3	64	903.0	0.813	Within frequency range	Pass
	67	907.8	0.704	Within frequency range	Pass
	71	914.2	0.542	Within frequency range	Pass
4	00	2402	606.48	Within frequency range	Pass
	39	2441	596.89	Within frequency range	Pass
	78	2480	568.74	Within frequency range	Pass
5	00	2403	857.18	Within frequency range	Pass
	39	2442	847.87	Within frequency range	Pass
	76	2479	853.54	Within frequency range	Pass
6	01	902.5	505.02	Within frequency range	Pass
	16	914.5	504.10	Within frequency range	Pass
	31	926.5	503.60	Within frequency range	Pass
7	01	902.2	99.636	Within frequency range	Pass
	65	915	101.590	Within frequency range	Pass
	129	927.8	100.700	Within frequency range	Pass

99% Occupied Bandwidth


Mode 1 CH00 (902.3MHz)

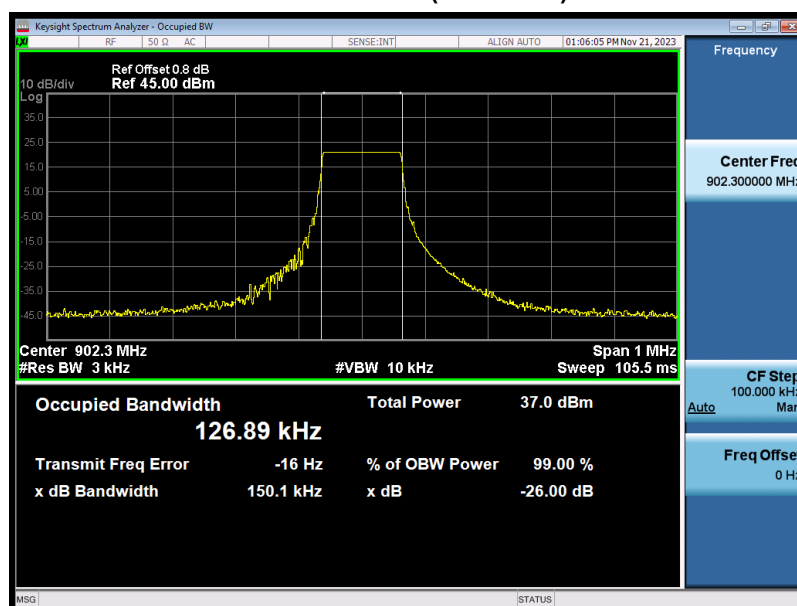


Mode 1 CH31 (908.5MHz)

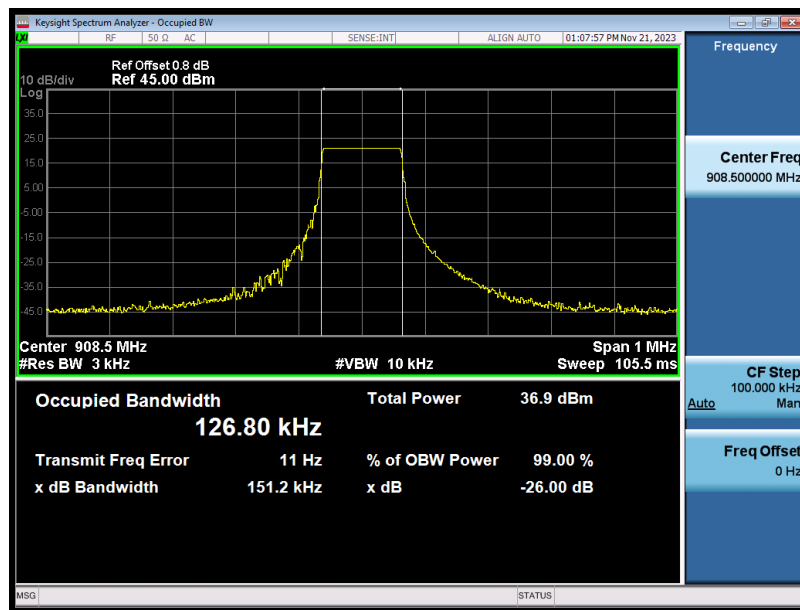


Mode 1 CH63 (914.9MHz)

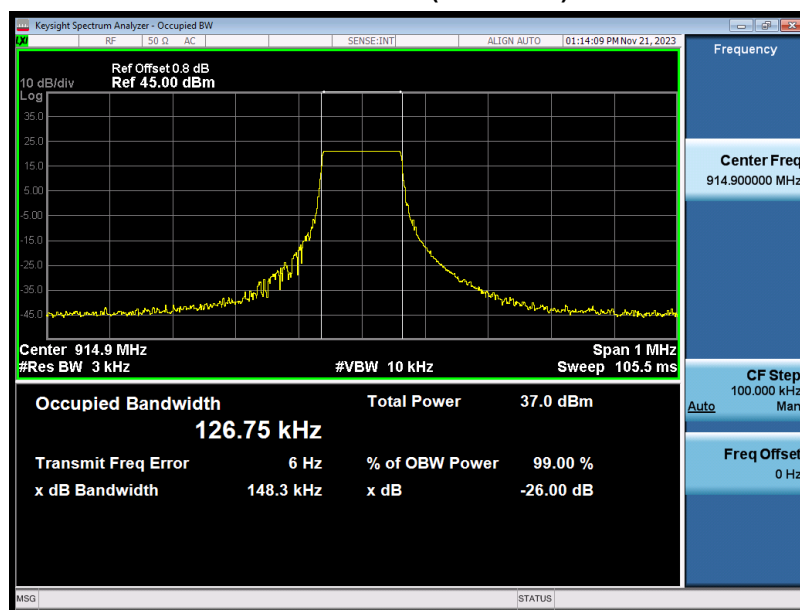


Mode 2 CH64 (903.0MHz)

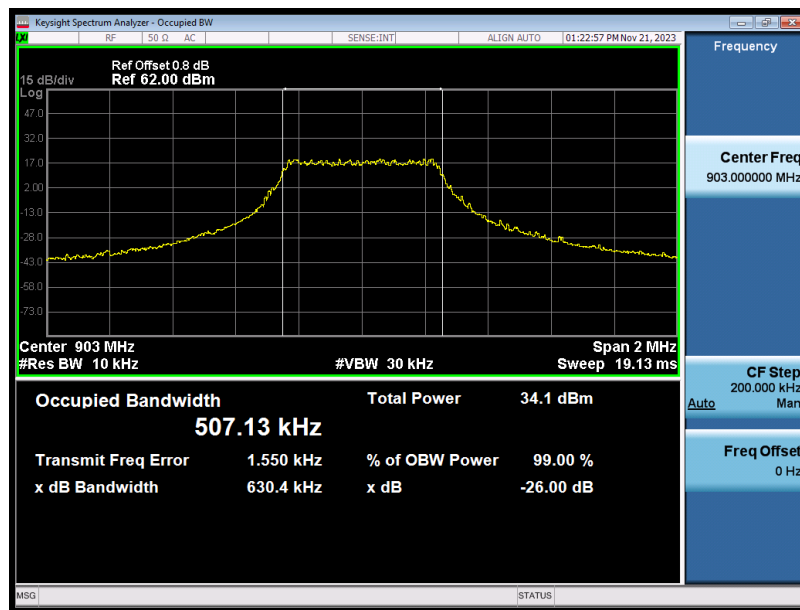


Mode 2 CH67 (907.8MHz)

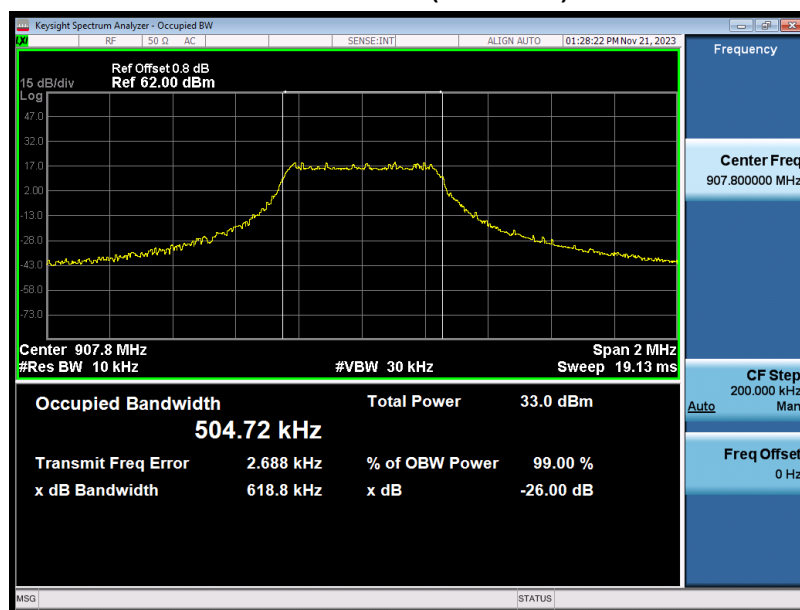


Mode 2 CH71 (914.2MHz)

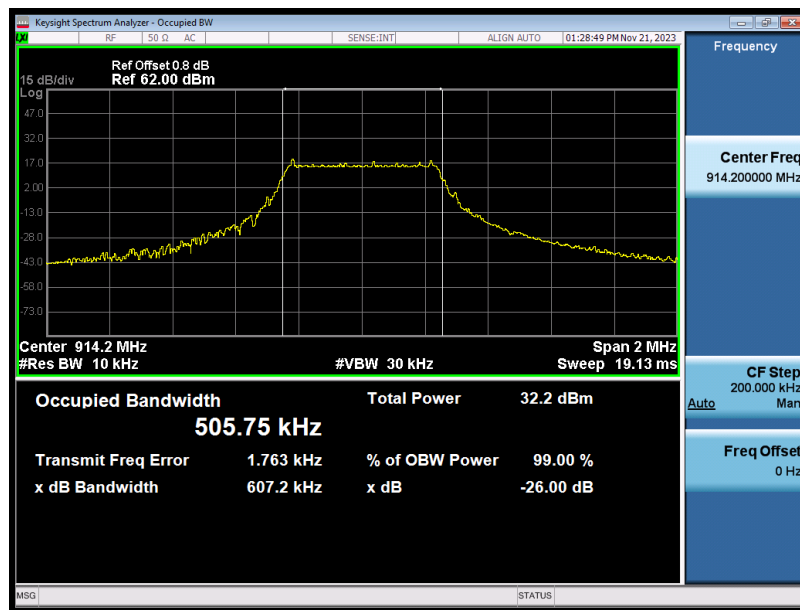


Mode 3 CH64 (903.0MHz)

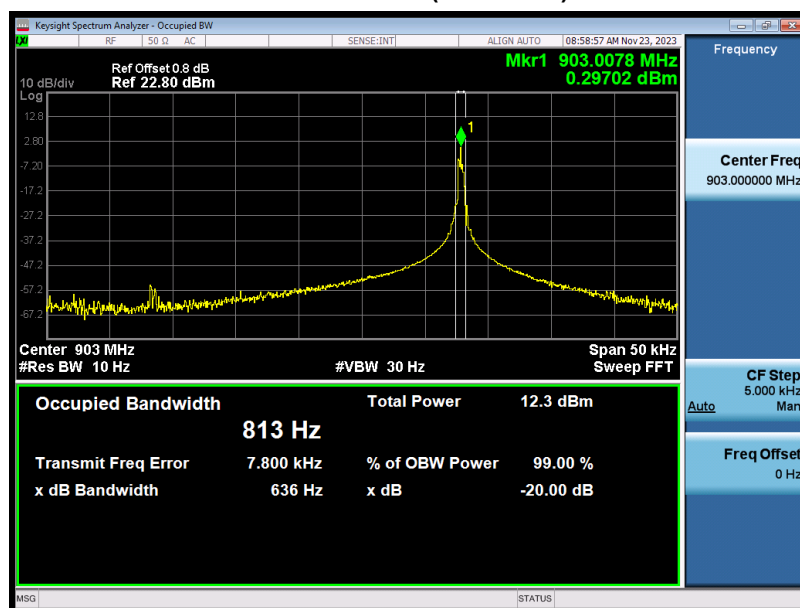


Mode 3 CH67 (907.8MHz)

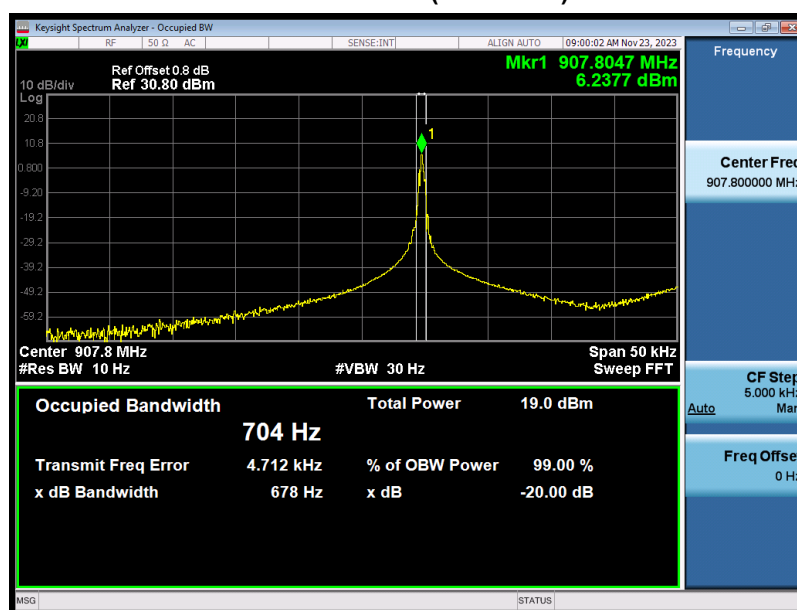

Mode 3 CH67 (914.2MHz)

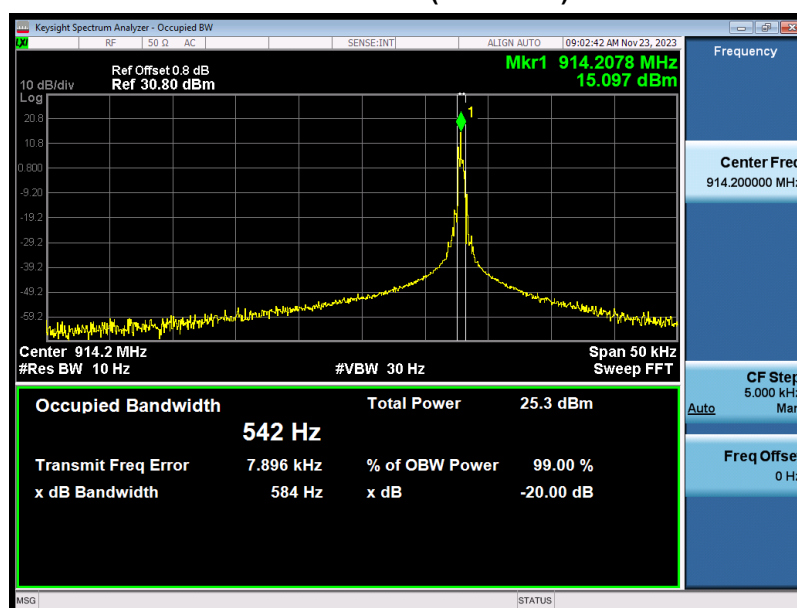

Mode 4 CH00 (2402MHz)

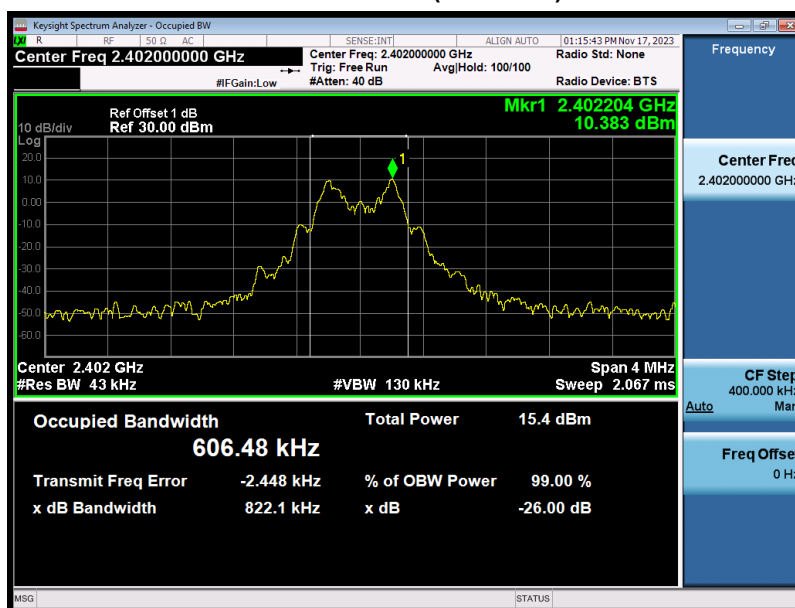

Mode 4 CH39 (2441MHz)




Mode 4 CH78 (2480MHz)



Mode 5 CH00 (2403MHz)




Mode 5 CH39 (2442MHz)

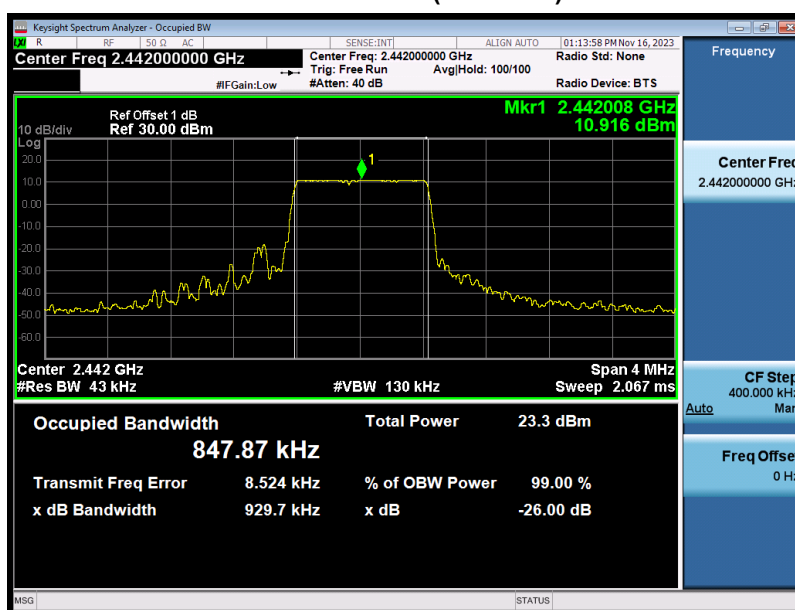


Mode 5 CH76 (2479MHz)




Mode 6 CH01 (902.5MHz)

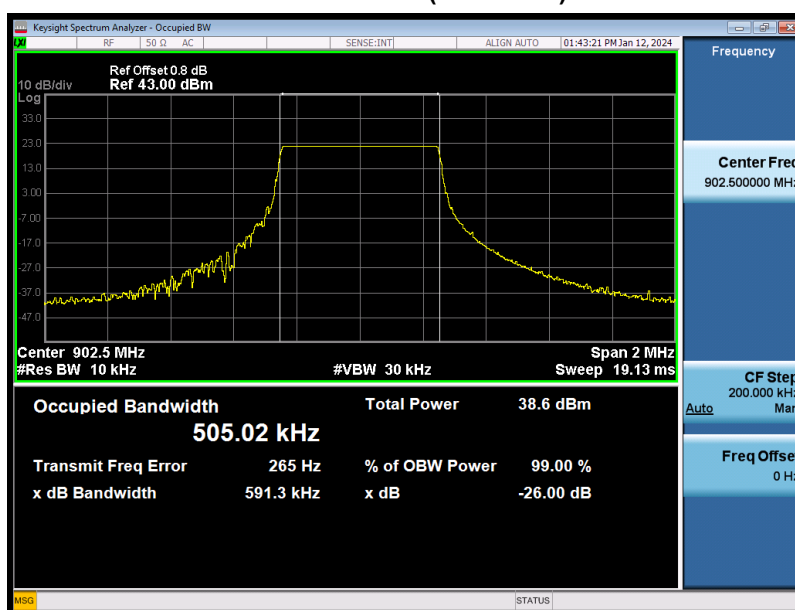


Mode 6 CH16 (914.5MHz)

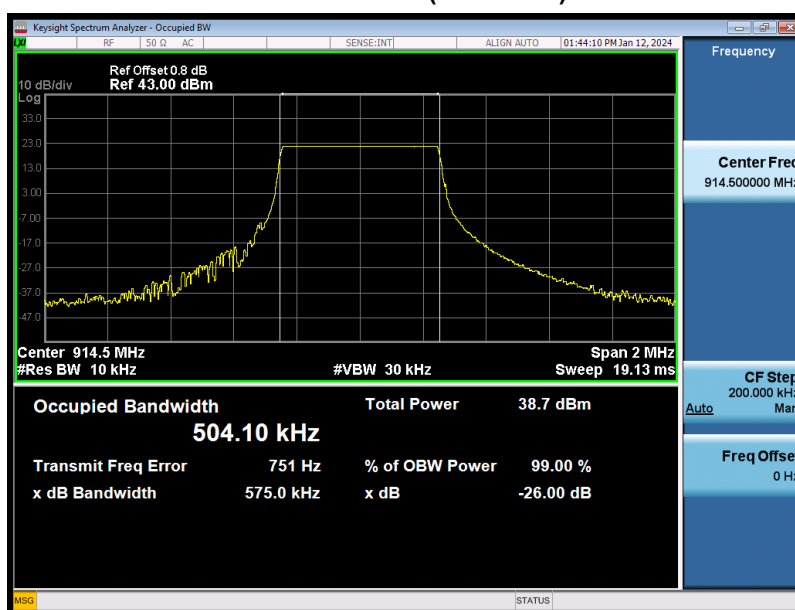


Mode 6 CH31 (926.5MHz)

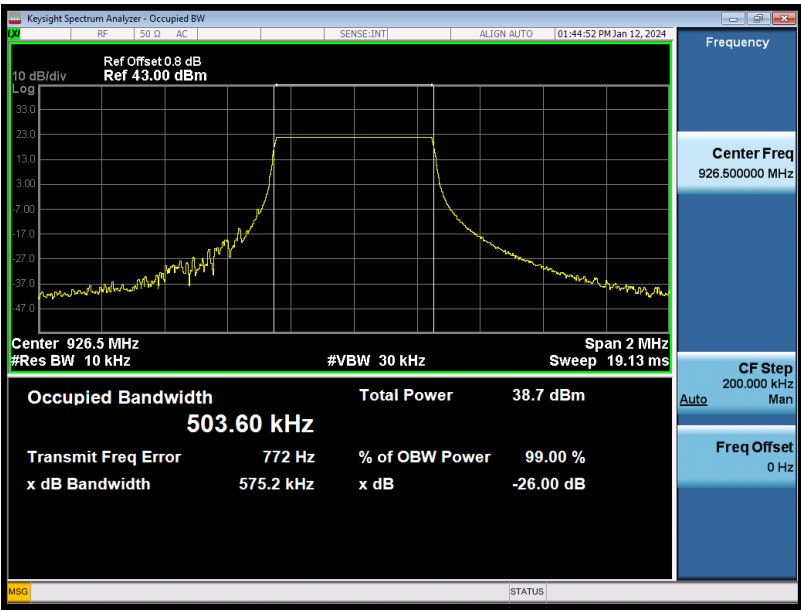


Mode 7 CH01 (902.2MHz)

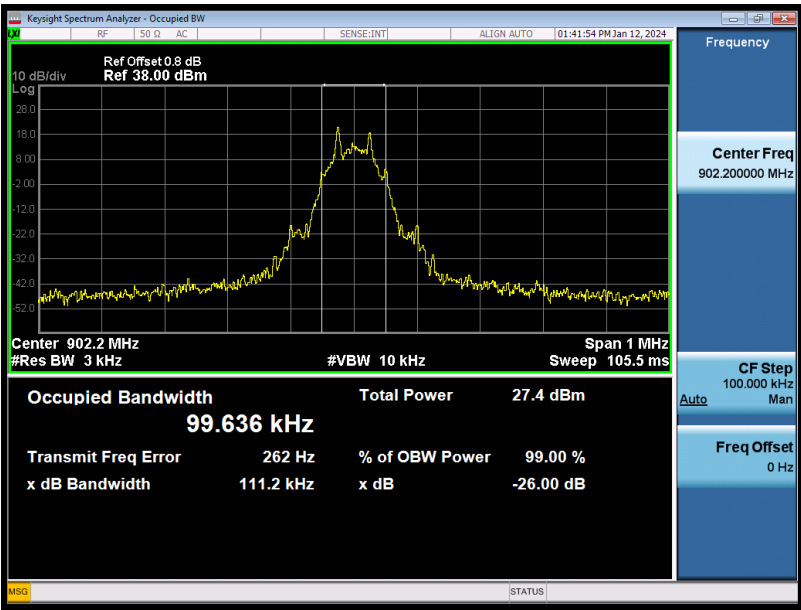

Mode 7 CH65 (915MHz)

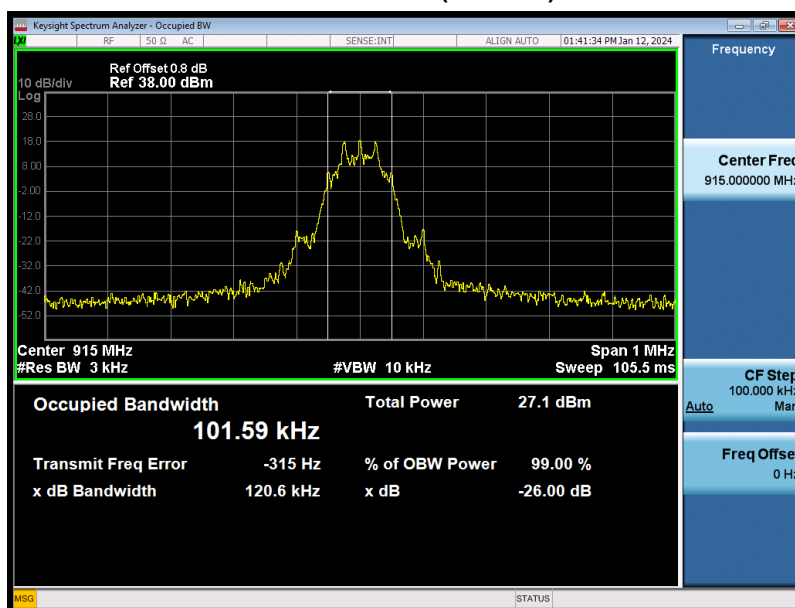


Mode 7 CH129 (927.8MHz)

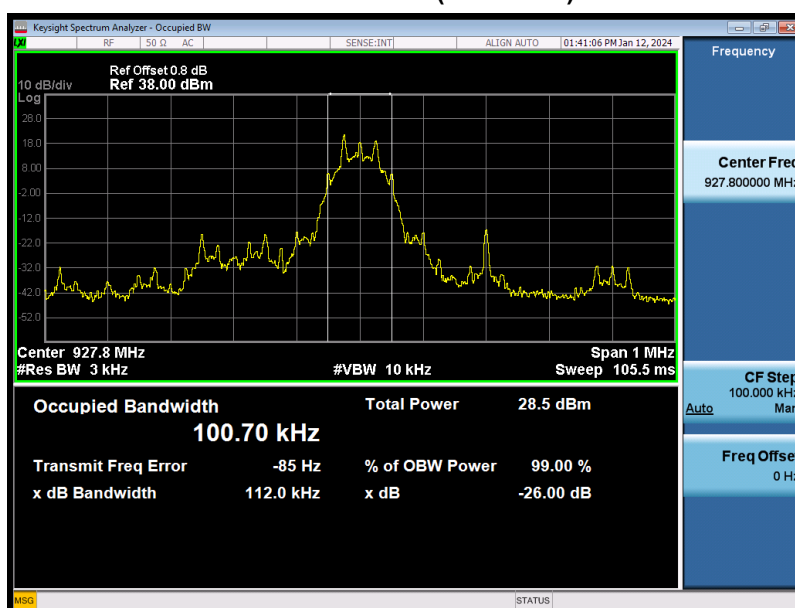

4.6 Fundamental emission output power**VERDICT: PASS****4.6.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3)	
☒	GTX < 6dBi		Pout≤30dBm
☐	GTX > 6dBi		
	☐	Non-Fix point-point	Pout≤30-(GTX -6)
	☐	Fix point-point	Pout≤30-[(GTX-6)]/3
	☐	Point-to-multipoint	Pout≤30-(GTX-6)
	☐	Overlap Beams	Pout≤30-[(GTX-6)]/3
	☐	Aggregate power transmitted simultaneously on all beams	Pout≤30-[(GTX-6)]/3
	☐	single directional beam	Pout≤30-[(GTX-6)]/3+8dB
☒	For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels		
Note 1 : GTX directional gain of transmitting antennas.			
Note 2 : Pout is maximum peak conducted output power .			

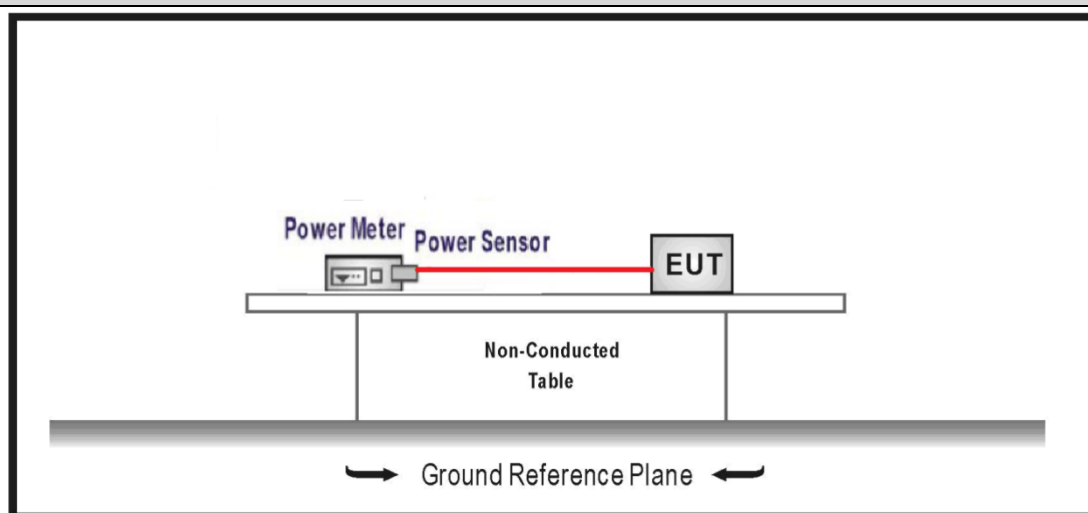4.6.2 Test Setup

4.6.3 Test Procedure				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.9	Fundamental emission output power
	☐	ANSI C63.10		Maximum peak conducted output power
	☐	ANSI C63.10	11.9.1.1	RBW $\geq$ DTS bandwidth
		ANSI C63.10	11.9.1.2	Integrated band power method
		ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method
	☒	ANSI C63.10		Maximum conducted (average) output power
	☒	ANSI C63.10	11.9.2.2	Measurement using a spectrum analyzer (SA)
		☐	ANSI C63.10	Method AVGSA-1(Duty cycle $\geq$ 98%)
		☐	ANSI C63.10	Method AVGSA-1A(Duty cycle $\geq$ 98%)
		☒	ANSI C63.10	Method AVGSA-2(Duty cycle $\leq$ 98%)
		☐	ANSI C63.10	Method AVGSA-2A(Duty cycle $\leq$ 98%)
		☐	ANSI C63.10	Method AVGSA-3
		☐	ANSI C63.10	Method AVGSA-3A
		☒	ANSI C63.10	Measurement using a power meter (PM)
		☒	ANSI C63.10	Method AVGPM
		☐	ANSI C63.10	Method AVGPM-G
☒	ANSI C63.10		7.8.5	Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices

4.6.4 Test Data


Mode	Channel	Test Frequency (MHz)	Output Power (dBm)	E.I.R.P (dBm)	Conducted Limit (dBm)	E.I.R.P Limit (dBm)	Result
1	00	902.3	21.37	23.37	30.00	36.00	Pass
	31	908.5	21.39	23.39	30.00	36.00	Pass
	63	914.9	21.43	23.43	30.00	36.00	Pass
2	64	903.0	21.38	23.38	30.00	36.00	Pass
	67	907.8	21.42	23.42	30.00	36.00	Pass
	71	914.2	21.44	23.44	30.00	36.00	Pass
3	64	903.0	21.42	23.42	30.00	36.00	Pass
	67	907.8	21.38	23.38	30.00	36.00	Pass
	71	914.2	21.42	23.42	30.00	36.00	Pass
4	00	2402	10.24	12.74	30.00	36.00	Pass
	39	2441	10.66	13.16	30.00	36.00	Pass
	78	2480	10.78	13.28	30.00	36.00	Pass
5	00	2403	10.28	12.78	30.00	36.00	Pass
	39	2442	10.62	13.12	30.00	36.00	Pass
	76	2479	10.72	13.22	30.00	36.00	Pass
6	01	902.5	21.56	23.56	30.00	36.00	Pass
	16	914.5	21.42	23.42	30.00	36.00	Pass
	31	926.5	21.35	23.35	30.00	36.00	Pass
7	01	902.2	21.39	23.39	30.00	36.00	Pass
	65	915	21.43	23.43	30.00	36.00	Pass
	129	927.8	21.35	23.35	30.00	36.00	Pass

Note:

1. E.I.R.P.= Output Power + Antenna Gain
2. Please refer to clause 1.2 for antenna gain.

4.7 Power Density**VERDICT: PASS****4.7.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.247 (e)


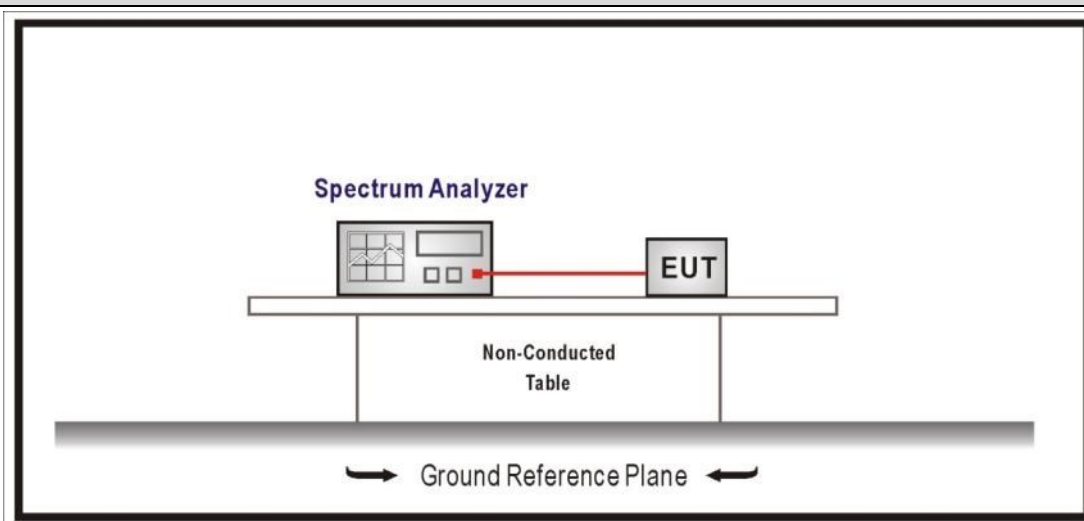
Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$ **4.7.2 Test Setup****4.7.3 Test Procedure**

	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☐	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$)
	☒	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A


4.7.4 Test Data

Mode	Channel	Test Frequency (MHz)	Reading level (dBm/3kHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
1	00	902.3	5.339	5.519	≤ 8	Pass
	31	908.5	5.502	5.682	≤ 8	Pass
	63	914.9	5.630	5.810	≤ 8	Pass
2	64	903.0	-0.75	1.14	≤ 8	Pass
	67	907.8	-0.99	0.9	≤ 8	Pass
	71	914.2	-1.04	0.85	≤ 8	Pass
4	00	2402	-14.239	-3.159	≤ 8	Pass
	39	2441	-14.585	-3.505	≤ 8	Pass
	78	2480	-15.451	-4.371	≤ 8	Pass
5	00	2403	-10.916	-10.916	≤ 8	Pass
	39	2442	-11.054	-11.054	≤ 8	Pass
	76	2479	-10.456	-10.456	≤ 8	Pass
6	01	902.5	1.472	1.832	≤ 8	Pass
	16	914.5	1.534	1.894	≤ 8	Pass
	31	926.5	1.602	1.962	≤ 8	Pass


Note 1: Measurement PSD = Reading level + Duty factor

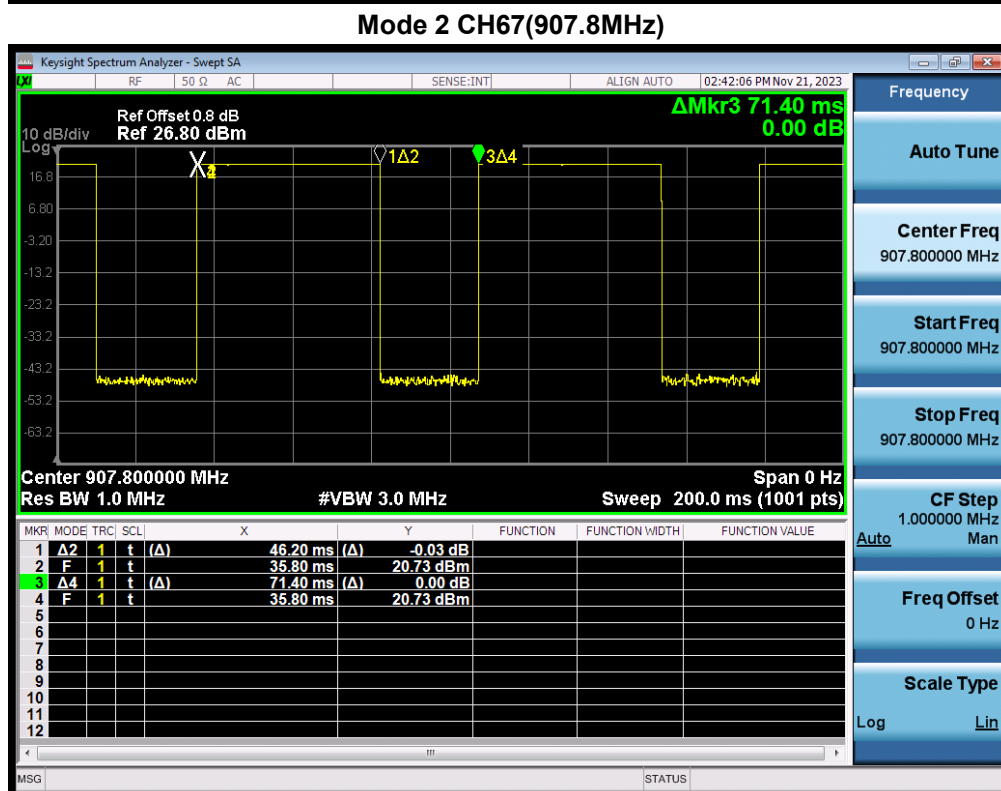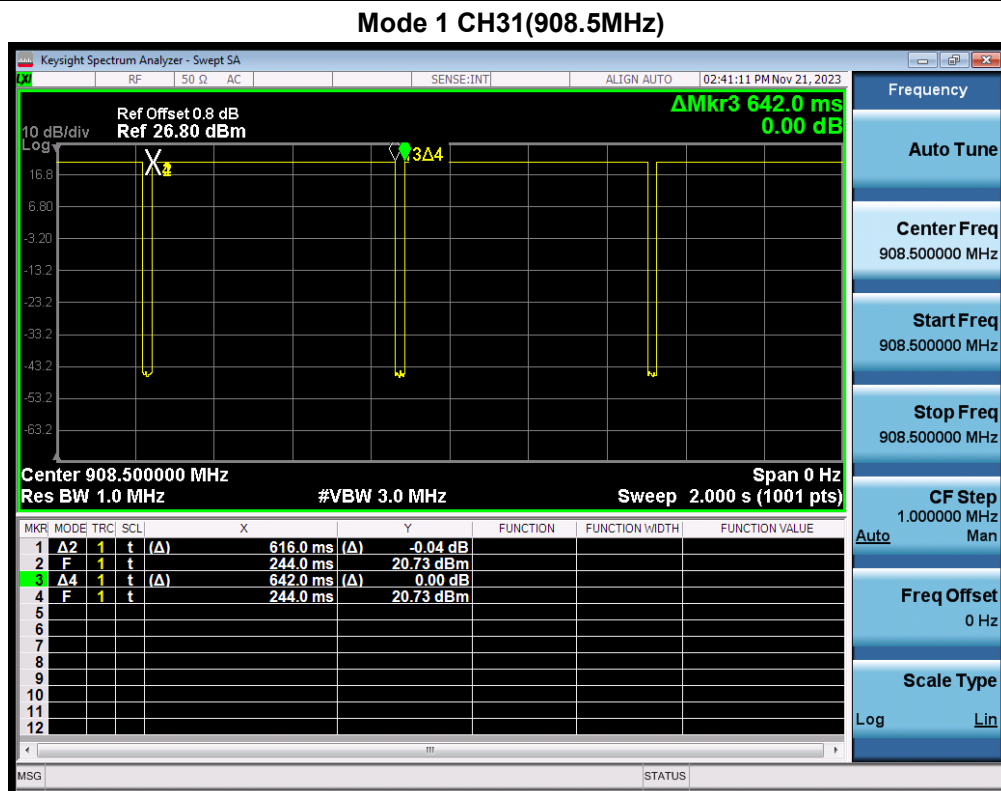


Mode 4 CH39(2441MHz)

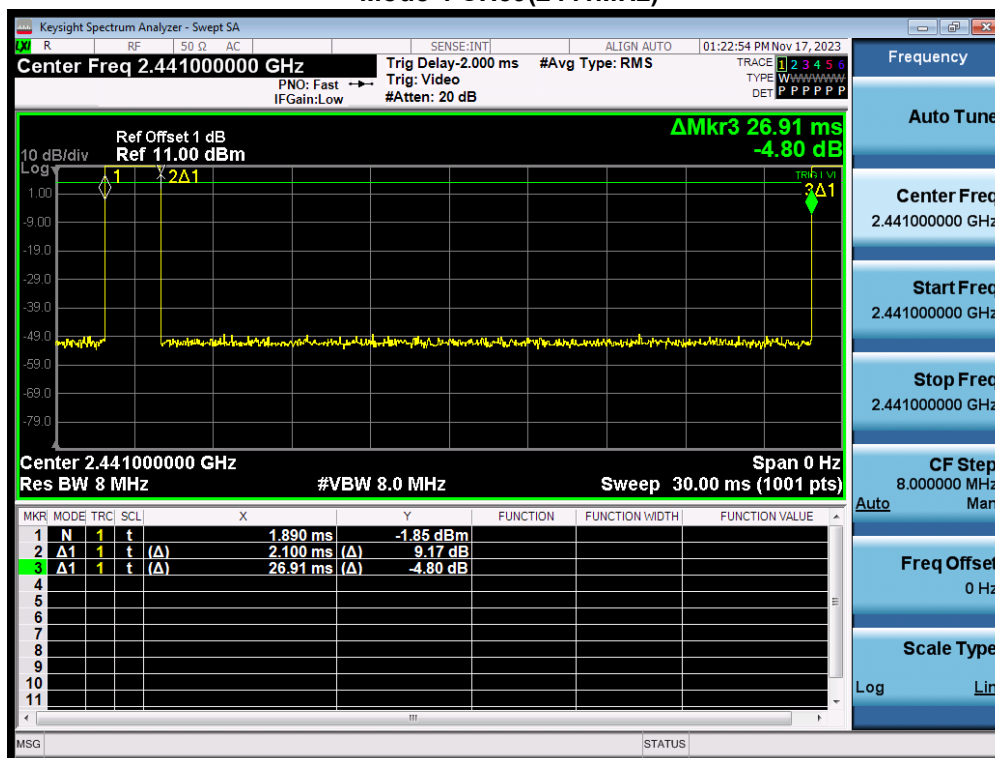

Mode 5 CH39(2442MHz)

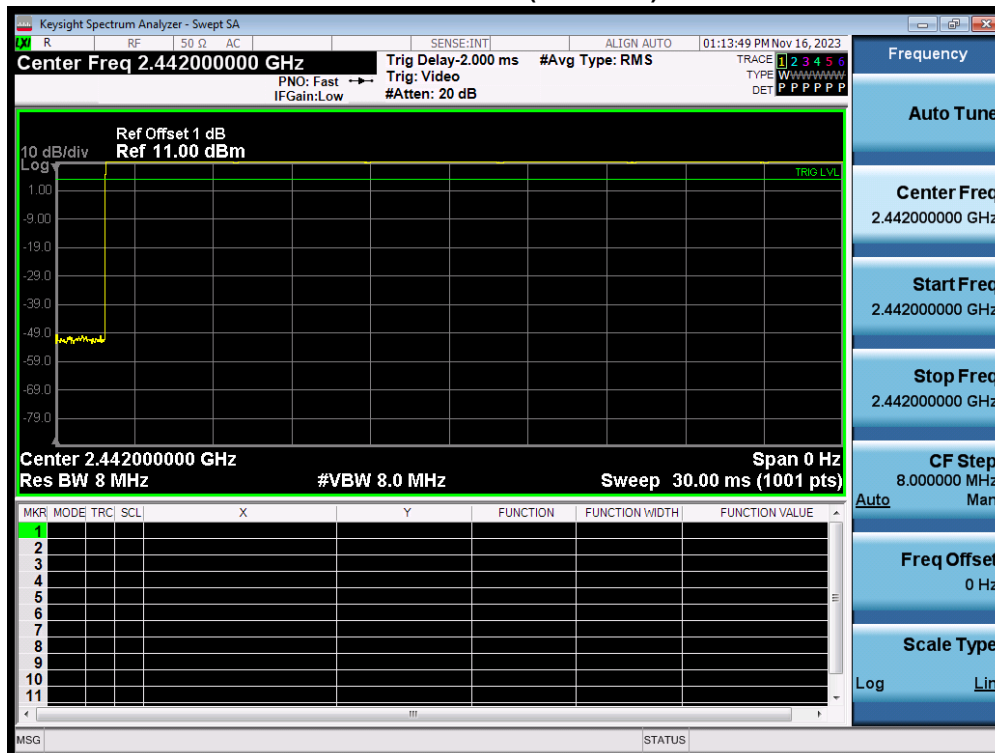


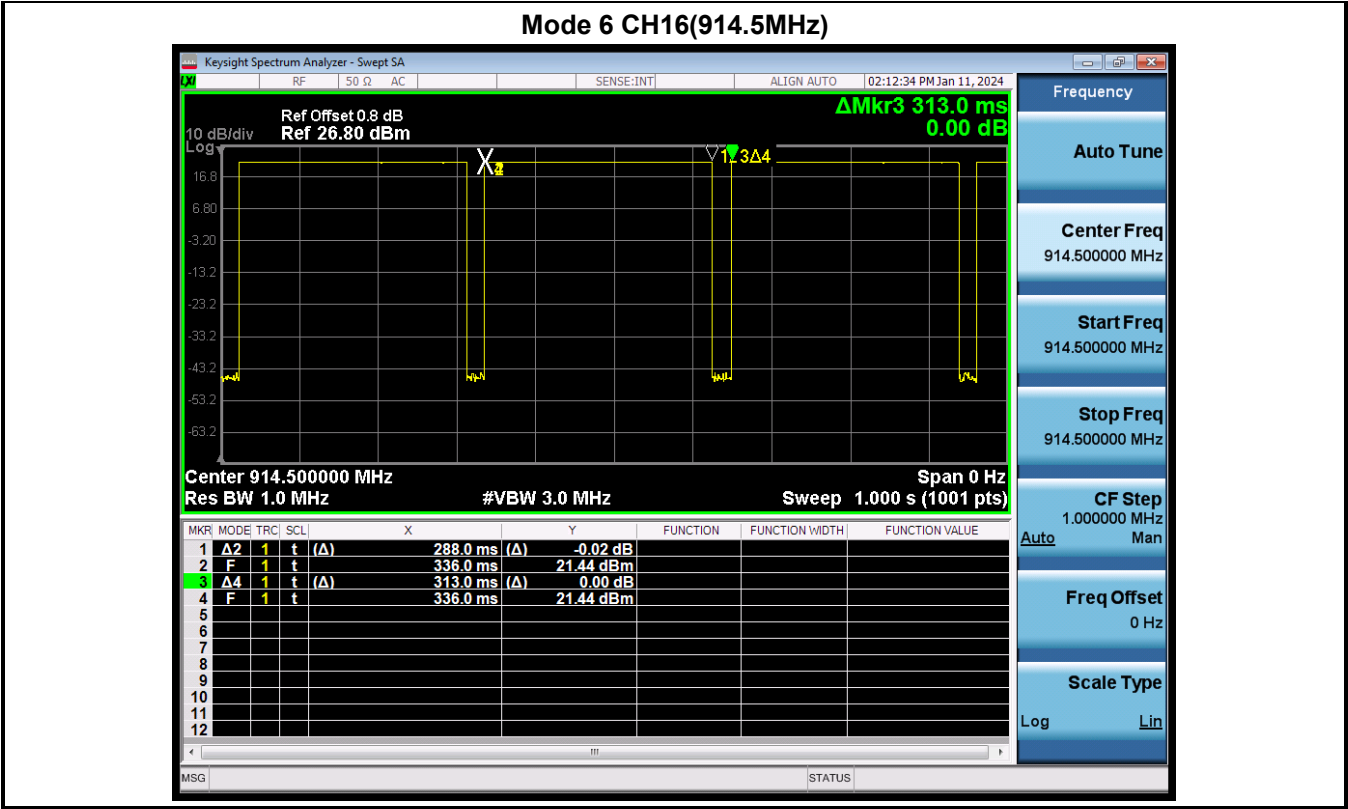


Mode 1 CH00(902.3MHz)




Mode 1 CH31(908.5MHz)

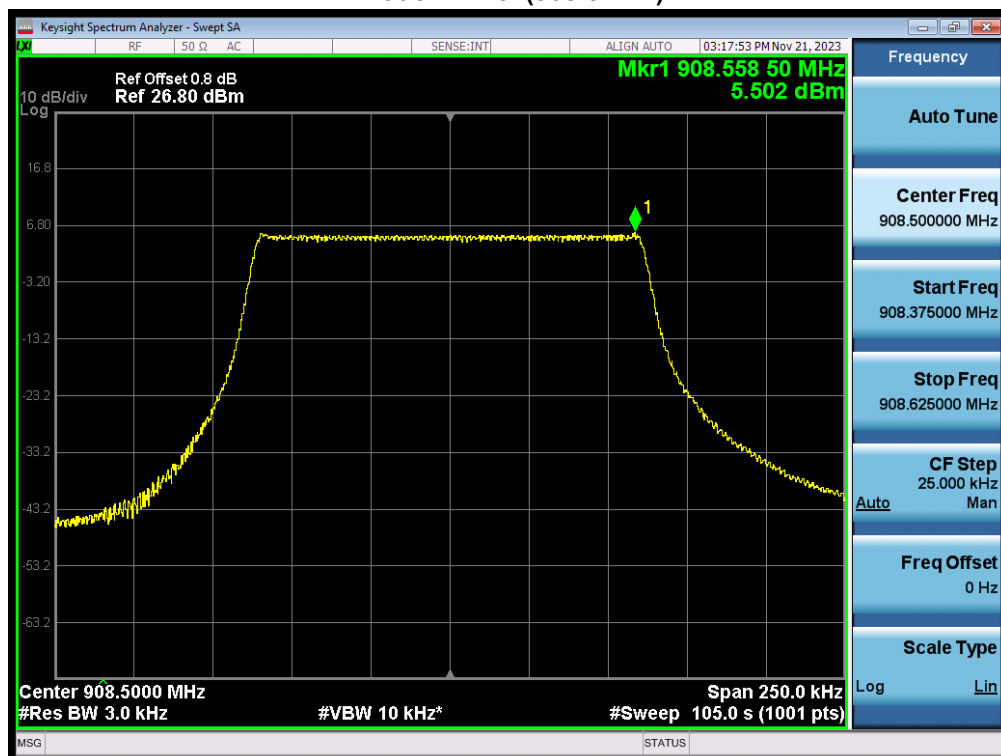


Mode 1 CH63(914.9MHz)

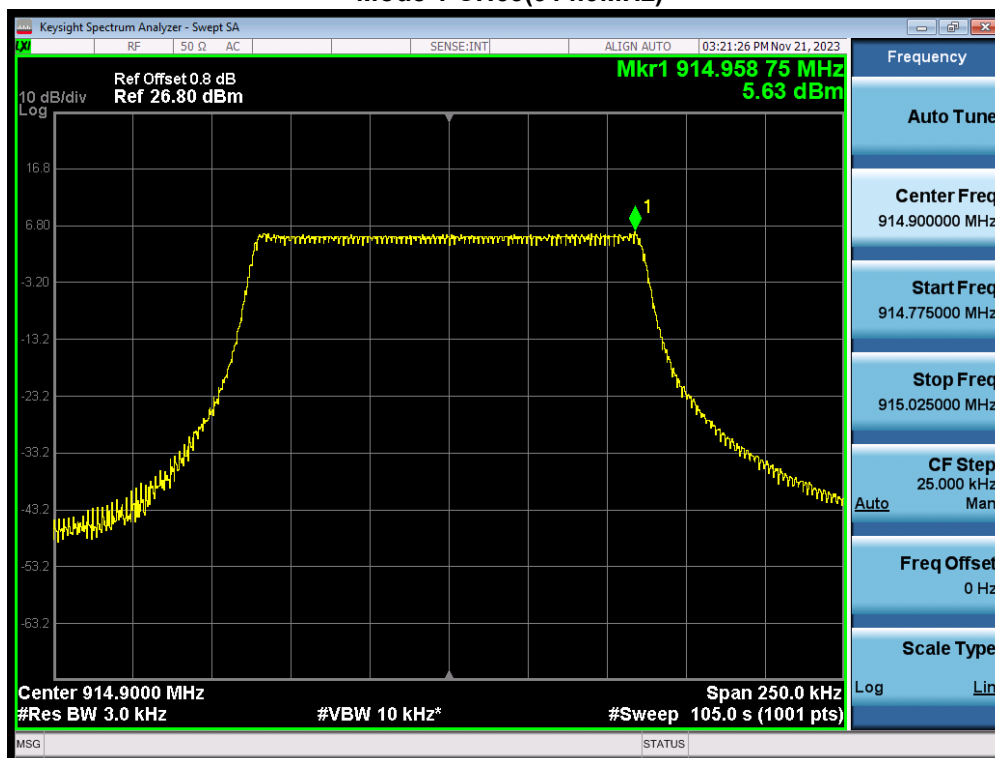


Mode 2 CH64(903.0MHz)

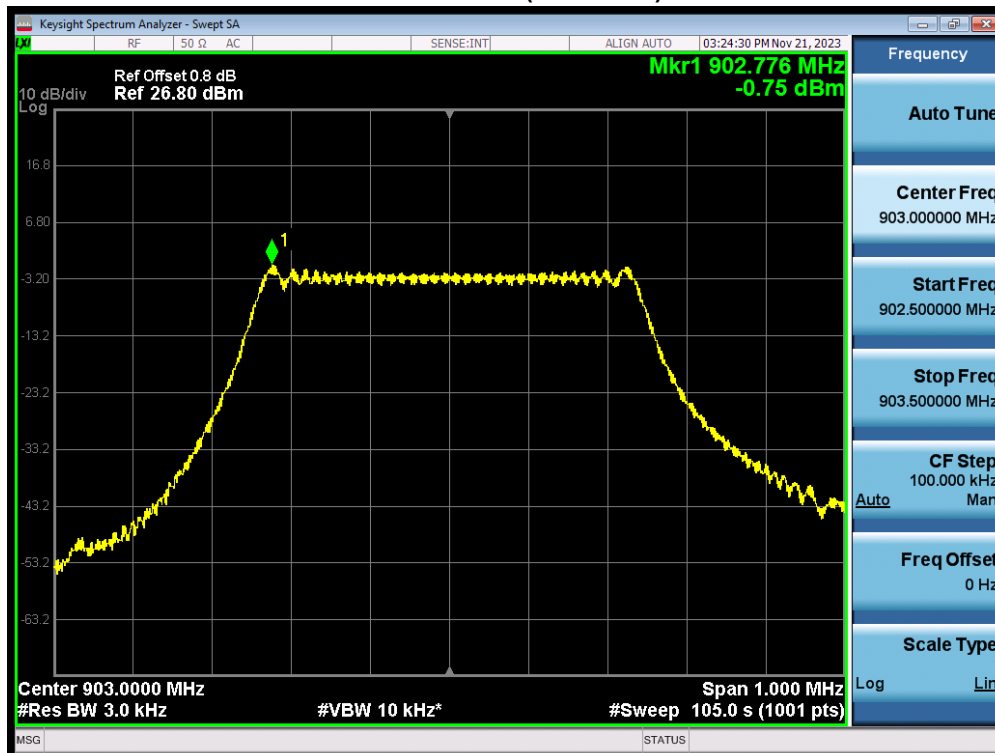

Mode 2 CH67(907.8MHz)

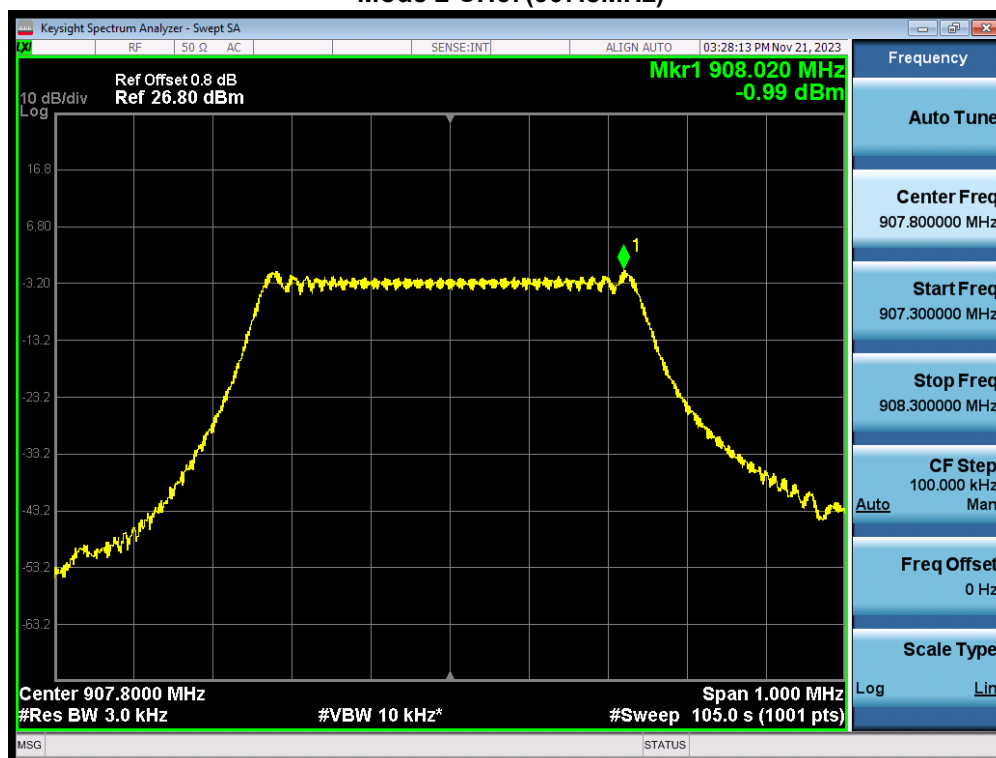

Mode 2 CH71(914.2MHz)

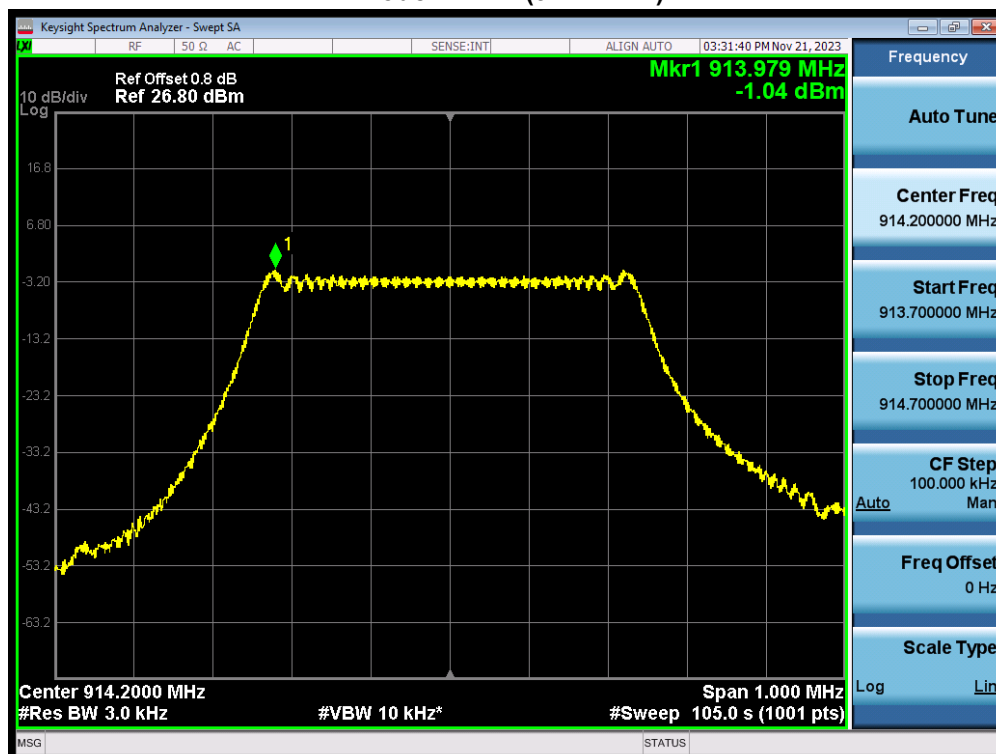

Mode 4 CH00(2402MHz)



Mode 4 CH39(2441MHz)

