



HERMON LABORATORIES



Electrical

Hermon Laboratories Ltd.
P.O.Box 23
Binyamina 30500, Israel
Tel. +972 46288001
Fax. +972 46288277
e-mail: mail@hermonlabs.com

RADIO TEST REPORT

according to 47CFR Part 15, §15.247 and subpart B
for

Airspan Networks (Israel) Ltd.

EQUIPMENT UNDER TEST:

Base station radio unit

Models: BSR 900 MHz, SPRL 900 MHz

This report is in conformity with ISO/IEC 17025. The A2LA logo endorsement applies only to the test methods and the standards that are listed in the scope of Hermon Laboratories accreditation.
The test results relate only to the items tested. **This test report must not be reproduced in any form except in full with the approval of Hermon Laboratories Ltd.**

Page 1 of 131

Document ID: AIRRAD_FCC.15694_internal.doc
Date of Issue: February 2004



Contents

1	Project information	3
2	Summary of tests and signatures	4
3	EUT description.....	5
3.1	GENERAL DESCRIPTION.....	5
3.2	EUT TEST CONFIGURATION.....	5
4	Test results.....	6
4.1	PEAK POWER SPECTRAL DENSITY OF A HYBRID SYSTEM ACCORDING TO § 15.247(F),(D)	6
4.2	AVERAGE TIME OF HOPPING FREQUENCY OCCUPANCY ACCORDING TO § 15.247(F), (A)(1).....	7
4.3	MAXIMUM PEAK OUTPUT POWER TEST ACCORDING TO §15.247(B)(3)	8
4.4	MINIMUM CHANNEL SEPARATION AND OCCUPIED BANDWIDTH ACCORDING TO § 15.247(A)(1), (2).....	9
4.5	OUT OF BAND CONDUCTED EMISSIONS TEST ACCORDING TO §15.247(C)	10
4.6	RADIATED EMISSIONS WHICH FALL IN RESTRICTED BANDS TEST ACCORDING TO §15.247(C) AND § 15.205, §15.209(A).....	11
4.7	CONDUCTED EMISSIONS TEST ACCORDING TO §15.107, 15.207	13
4.8	UNINTENTIONAL RADIATED EMISSIONS TEST ACCORDING TO §15.109	15
	Appendix A Plots.....	17
	Appendix B Test equipment used for tests	117
	Appendix C Test equipment correction factors	119
	Appendix D General information.....	131
	TEST FACILITY DESCRIPTION	131
	ABBREVIATIONS AND ACRONYMS	131
	SPECIFICATION REFERENCES.....	131



1 Project information

EUT attributes

Test item	Outdoor radio unit
Type (Model)	BSR 900 MHz, SPRL 900 MHz
Equipment FCC code	DSS

Applicant information

Applicant's responsible person	Mr. Zion Levi, compliance & testing engineer
Applicant/Manufacturer	Airspan Networks (Israel) Ltd.
Address	1, Harava street, "Unitronics" building
P.O.B.	199
City	Airport City
Postal code	70100
Country	Israel
Telephone number	+972 3977 7444
Telefax number	+972 3977 7400

Test details

Project number	15694
Location	Hermon Laboratories
Test started	February 9, 2004
Test completed	February 10, 2004
Purpose of test	Apparatus compliance verification in accordance with emission requirements
Test specifications	47CFR Part 15, §15.247 and subpart B



2 Summary of tests and signatures

The tests listed in the table below were performed.
The EUT was found complying with the limits of 47CFR Part 15, §15.247 and subpart B.

Test description	Specification reference	Tested by	Date tested	Test report paragraph	Verdict
Hybrid system					
Peak power spectral density at frequency hopping operation turned off	15.247(f)	Mr. Y. Neuman, test engineer	October 2, 2003	4.1	Pass
Average time of occupancy at frequency hopping operation turned on	15.247(f)	Mr. Y. Neuman, test engineer	October 15, 2003	4.2	Pass
Maximum peak output power at frequency hopping operation turned off	15.247(b)(3)	Mr. Y. Neuman, test engineer	February 10, 2004	4.3	Pass
Minimum channel separation	15.247(a)(1)	Manufacturer statement	NA	4.4	Pass
6 dB bandwidth	15.247(a)(2)	Mr. Y. Neuman, test engineer	October 2, 2003	4.4	Pass
Spurious emissions (conducted)	15.247(c)	Mr. Y. Neuman, test engineer	February 10, 2004	4.5	Pass
Spurious emissions (radiated) in restricted bands	15.209(a), 15.205(a, c)	Mr. Y. Neuman, test engineer	February 9, 2004	4.6	Pass
Unintentional radiation					
Conducted emissions	15.207, 15.107	Mr. Y. Neuman, test engineer	October 19, 2003	4.7	Pass
Radiated emissions	15.109	Mr. Y. Neuman, test engineer	February 9, 2004	4.8	Pass

Test report prepared by:

Mrs. M. Cherniavsky, MScEE, certification engineer

Test report approved by:

Mr. Michael Nikishin, MScEE, group leader

Mr. Edward Usoskin, PhD, C.E.O.



3 EUT description

3.1 General description

The EUTs, outdoor units (ODU), models "BSR 900 MHz" and "SPRL 900 MHz", are part of a WipLL broadband fixed cellular wireless access system. The system provides a radio link between an end-user (a subscriber) and a network itself to give high-speed data access. The EUT is a hybrid system transceiver operating in 903 MHz to 927 MHz range, equipped with a 8 dBi gain internal antenna. The BSR is installed outside the base station site and typically is mounted on a pole, the SPRL is installed at the subscriber's premises. The SPRL is a radio transceiver that transmits and receives traffic to and from the base station (i.e., BSR), respectively. The SPRL provides subscribers with "always-on" Internet, high-speed data-only, or data and voice (VoIP) services and is configured with a unique BSR reference number, preventing the SPRL from relocating to another subscriber premises without authorization.

The SPRL has identical to the BSR chassis, the same dimensions, contains the same PCB components and differs only in the software.

The EUT is powered via a subscriber data adapter (SDA), which provides 48 V DC power.

3.2 EUT test configuration

Throughout testing the radio communication was established. The EUT operating frequencies generated by clocks and oscillators: 350 MHz - first IF, 6 MHz – second IF, $[F_{\text{operating}} + 350 \text{ MHz}]$ – first LO, 356 MHz – second LO.



4 Test results

4.1 Peak power spectral density of a hybrid system according to § 15.247(f),(d)

METHOD OF MEASUREMENTS	FCC Docket No.96-8; FCC 97-114
DATE of TEST:	October 2, 2003
AMBIENT TEMPERATURE:	23°C
RELATIVE HUMIDITY:	46 %
AIR PRESSURE:	1012 hPa
RATED OUTPUT POWER:	18 dBm
OPERATING FREQUENCY RANGE:	903 - 927 MHz
MEASUREMENT UNCERTAINTY:	± 3.5 dB

Frequency hopping function was turned off.

Carrier frequency, MHz	Data transmission rate, Mbit/s	Peak power spectral density, dBm		Verdict	Reference to Plots in Appendix A
		Measured	Limit		
903	4	7.67	8	Pass	A1
903	3	7.00		Pass	A2
915	4	7.17		Pass	A3
915	3	8.00		Pass	A4
927	4	7.67		Pass	A5
927	3	7.00		Pass	A6

LIMIT

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

TEST PROCEDURE

The EUT RF output was connected via attenuator to the spectrum analyzer; the settings are shown in the plots. Spectrum analyzer readings were corrected for external attenuation and cable loss. The measurements were performed in continuous transmission mode of operation for carrier (channel) frequency modulated with PRBS at low and high edges and at the middle of the range according to method #1 for peak power spectral density.

TEST EQUIPMENT USED:

HL 1097	HL 1424	HL 2399				
---------	---------	---------	--	--	--	--



4.2 Average time of hopping frequency occupancy according to § 15.247(f), (a)(1)

METHOD OF MEASUREMENT: ANSI 63.4 §13.1.7
DATE of TEST: October 15, 2003
AMBIENT TEMPERATURE: 23°C
RELATIVE HUMIDITY: 44 %
AIR PRESSURE: 1012 hPa
OPERATING FREQUENCY RANGE: 903 - 927 MHz
MEASUREMENT UNCERTAINTY: ± 1%

Frequency hopping function was turned on.

Carrier frequency, MHz	Quantity of transmissions at one frequency	Tx ON of 1 transmission at one frequency, ms	Average time of occupancy during 10 s period, ms	Verdict	Reference to Plots in Appendix A
903	8	25.583	204.664	Pass	A7, A8

Average factor calculation according to §15.35(c):
 $20 \log (25.583/100) = -11.84 \text{ dB}$

LIMIT

Operating mode	Limit
Hybrid	With the hopping system operation turned on, an average time of occupancy on any frequency shall not exceed 0.4 s within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4: $25 \times 0.4 = 10 \text{ (sec)}$

TEST PROCEDURE

The EUT RF output was connected via attenuator to spectrum analyzer, which settings are shown in the plots. Spectrum analyzer readings were corrected for external attenuation and cable loss.

TEST EQUIPMENT USED:

HL 1097	HL 1424	HL 2399				
---------	---------	---------	--	--	--	--



4.3 Maximum peak output power test according to §15.247(b)(3)

METHOD OF MEASUREMENTS: ANSI 63.4 §13.1.4
DATE of TEST: February 10, 2004
AMBIENT TEMPERATURE: 23°C
RELATIVE HUMIDITY: 55 %
AIR PRESSURE: 1016 hPa
OPERATING FREQUENCY RANGE: 903 - 927 MHz
MEASUREMENT UNCERTAINTY: ± 3.5 dB

Carrier frequency, MHz	Peak output power, dBm	Limit, dBm	Margin, dB	Verdict	Reference to Plots in Appendix A
903	17.93	28	11.07	Pass	A9
915	17.93	28	11.07	Pass	A10
927	17.43	28	11.57	Pass	A11

LIMIT

Operating frequency range, MHz	Number of hopping channels	Maximum peak output power*, W
Hybrid	any admissible	1

* Notes to table

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced below the stated values by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Antenna gain is 8 dBi, peak output power limit is 28 dBm.

TEST PROCEDURE

The EUT RF output was connected via attenuator to spectrum analyzer, which settings are shown in the plots. Spectrum analyzer readings were corrected for external attenuation and cable loss.

TEST EQUIPMENT USED:

HL 1424	HL 1650	HL 1651	HL 2399			
---------	---------	---------	---------	--	--	--



4.4 Minimum channel separation and occupied bandwidth according to § 15.247(a)(1), (2)

METHOD OF MEASUREMENTS: ANSI 63.4 §13.1.7
DATE of TEST: October 2, 2003
AMBIENT TEMPERATURE: 23°C
RELATIVE HUMIDITY: 46 %
AIR PRESSURE: 1012 hPa
OPERATING FREQUENCY RANGE: 903 -927 MHz
MEASUREMENT UNCERTAINTY: ± 2.3 dB

According to applicant statement the minimum channel separation is 1 MHz.

Carrier frequency, MHz	Data rate, Mbit/s	6 dB bandwidth, kHz		Verdict	Reference to Plots in Appendix A
		Measured	Limit		
903	4	808	500	Pass	A12
903	3	525	500	Pass	A13
915	4	808	500	Pass	A14
915	3	515	500	Pass	A15
927	4	800	500	Pass	A16
927	3	515	500	Pass	A17

LIMIT

Operating frequency range, MHz	Allowed bandwidth	Channel carrier frequency separation (minimum)
Hybrid	any admissible	25 kHz or 20 dB bandwidth, which is greater

TEST PROCEDURE

The EUT RF output was connected to the spectrum analyzer, which settings are shown in the plots. Spectrum analyzer readings were corrected for external attenuation and cable loss.

TEST EQUIPMENT USED:

HL 1097	HL 1424	HL 2399				
---------	---------	---------	--	--	--	--



4.5 Out of band conducted emissions test according to §15.247(c)

METHOD OF MEASUREMENTS: ANSI 63.4 §13.1.5
DATE of TEST: February 10, 2004
AMBIENT TEMPERATURE: 23°C
RELATIVE HUMIDITY: 55 %
AIR PRESSURE: 1016 hPa
OPERATING FREQUENCY RANGE: 903 -927 MHz
MODULATION TECHNIQUE: hybrid
FREQUENCY RANGE: 9 kHz – 9.3 GHz
MEASUREMENT UNCERTAINTY: ± 4.3 dB

The frequency spectrum was investigated from 9 kHz up to 10th harmonic, 9.3 GHz.
All measured emissions were found below specified limit. Test results are shown in Plots A18 to A45.
No effect of the data rate was observed therefore only 4 Mbit/s rate was used for measurements.

Frequency, MHz	Carrier frequency, MHz	Resolution bandwidth, kHz	Spurious emission level, dBm	Spurious calculated limit, dBm	Margin, dB	Reference to Plots in Appendix A
901.710	903	100	-17.83	-2.4	15.43	A18, A23
902.000	903	100	-17.90	-2.4	15.50	A18, A24
928.000	927	100	-19.00	-3.0	16.00	A36, A41
928.217	927	100	-18.50	-3.0	15.50	A36, A42

LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

TEST PROCEDURE

The EUT RF output was connected via attenuator to spectrum analyzer, which settings are shown in the plots. Spectrum analyzer readings were corrected for external attenuation and cable loss. Spurious emission measurements were performed at the lowest (903 MHz), the highest (927 MHz) and one of the middle channel (915 MHz) frequencies.

TEST EQUIPMENT USED:

HL 1424	HL 1650	HL 1651	HL 2399			
---------	---------	---------	---------	--	--	--



4.6 Radiated emissions which fall in restricted bands test according to §15.247(c) and § 15.205, §15.209(a)

METHOD OF MEASUREMENTS:	ANSI 63.4 §13.1.4/ §13.1.5
TEST PERFORMED IN:	Anechoic chamber, OATS
DATE of TEST:	October 14, 15, 2003
AMBIENT TEMPERATURE:	24°C
RELATIVE HUMIDITY:	38 %
AIR PRESSURE:	1012 hPa
OPERATING FREQUENCY RANGE:	903 -927 MHz
RATED RF OUTPUT POWER:	18 dBm
ANTENNA GAIN:	15.5 dBi
TEST DISTANCE	3 m
MEASUREMENT UNCERTAINTY:	± 4.3 dB

The frequency spectrum was investigated from 90 kHz to the tenth harmonic of the highest fundamental frequency. All emissions were found below the specified limit. For test results refer to Plots A46 – A93.

LIMIT

Radiated emissions, which fall in the restricted bands, must comply with §15.209(a) limits.

TEST PROCEDURE

The test was performed with transmitter operating at 3 carrier frequencies $F_{\min} = 903$ MHz, $F_{\text{middle}} = 915$ MHz, $F_{\max} = 927$ MHz. The measurements were performed at 3 m test distance from 150 kHz to 9.3 GHz. The EUT was placed on a wooden 80 cm height turntable.

150 kHz – 30 MHz frequency range. The loop antenna was positioned with its plane vertical. The loop center was 1 meter above the ground plane. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated about its vertical axis.

30 MHz – 9.3 GHz frequency range. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antennas polarization was changed from vertical to horizontal.

Quasi-peak detector

Frequency, MHz	Antenna type	Radiated emissions, dB (μV/m)	Limit, dB (μV/m)	Margin, dB	Reference to Plots in Appendix A
38.17	Biconilog	18.42	40.00	21.58	A64, A78
280.01	Biconilog	41.89	46.00	4.11	A64, A78
334.08	Biconilog	31.07	46.00	14.93	A64, A78

The recorded test results were obtained through measurements with biconilog antenna at 1 m height in vertical polarization. Turntable position: 0° = EUT front panel faces the receiving antenna

**Peak value**

Frequency, MHz	Antenna polarization	Antenna height, m	Turntable position, °	Radiated emissions, dB (mV/m)	Limit, dB (mV/m)	Margin, dB	Reference to Plots in Appendix A
1146.8	Horizontal	1.1	210	42.30*	74	31.70	A52
1520.0	Horizontal	1.1	208	45.30*	74	28.7	A51
4272.0	Horizontal	1.0	0	50.33	74	23.67	A87
4628.0	Horizontal	1.0	0	47.17	74	26.83	A85
5012.0	Horizontal	1.0	0	52.17	74	21.83	A57
5060.0	Horizontal	1.0	0	50.17	74	23.83	A71
5108.0	Horizontal	1.0	0	50.00	74	24.00	A89
7518.0	Vertical	1.0	0	55.50	74	18.50	A60
7590.0	Vertical	1.0	0	55.67	74	18.33	A74
7662.0	Vertical	1.0	0	56.00	74	18.00	A92

* Below average limit

Average value

Frequency, MHz	Antenna polarization	Antenna height, m	Turntable position, °	Radiated emissions, dB (mV/m)	Limit, dB (mV/m)	Margin, dB	Reference to Plots in Appendix A
4272.0	Horizontal	1.0	0	47.33	54	6.67	A86
4628.0	Horizontal	1.0	0	42.00	54	12.00	A84
5012.0	Horizontal	1.0	0	38.49	54	15.51	A56
5060.0	Horizontal	1.0	0	34.49	54	19.51	A70
5108.0	Horizontal	1.0	0	34.49	54	19.51	A88
7518.0	Vertical	1.0	0	38.16	54	15.84	A59
7590.0	Vertical	1.0	0	37.33	54	16.67	A73
7662.0	Vertical	1.0	0	38.16	54	15.84	A91

The recorded test results were obtained through measurements with double ridged guide antenna.

Table abbreviations:

Margin = dB below (negative if above) specification limit.

Turntable position: 0° = EUT front panel faces the receiving antenna

TEST EQUIPMENT USED AT OATS:

HL 0038	HL 0091	HL 0287	HL 1424	HL 1942	HL 1984	HL 2254
HL 2259						

TEST EQUIPMENT USED IN ANECHOIC CHAMBER:

HL 0446	HL 0465	HL 0521	HL 0589	HL 0592	HL 0593	HL 0594
HL 0604	HL 1004	HL 1947	HL 2009	HL 2432		



4.7 Conducted emissions test according to §15.107, 15.207

METHOD OF MEASUREMENTS: ANSI 63.4 §13.1.3
DATE of TEST: October 19, 2003
AMBIENT TEMPERATURE: 22°C
RELATIVE HUMIDITY: 44 %
AIR PRESSURE: 1008 hPa
FREQUENCY RANGE: 150 kHz – 30 MHz
OPERATION MODE: Transmit, receive
RESOLUTION BANDWIDTH: 9 kHz
MEASUREMENT UNCERTAINTY, dB
± 3.9 dB in 9 – 150 kHz
± 3.8 dB in 150 kHz – 30 MHz

Quasi-peak detector

Frequency, MHz	Line identification	Measured emissions, dB (μV)	Specification QP limit, dB (μV)	Margin, dB	Verdict	Reference to Plots in Appendix A
0.347355	Line 2	44.55	59.09	14.54	Pass	A98, A100
1.239205	Line 1	40.92	56.00	15.08	Pass	A97, A99
1.638965	Line 2	41.47	56.00	14.53	Pass	A98, A100
2.629685	Line 1	43.13	56.00	12.87	Pass	A97, A99
2.925295	Line 2	43.45	56.00	12.55	Pass	A98, A100
4.959983	Line 2	48.81	56.00	7.19	Pass	A98, A100

Average detector

Frequency, MHz	Line identification	Measured emissions, dB (μV)	Specification AVRG limit, dB (μV)	Margin, dB	Verdict	Reference to Plots in Appendix A
0.347355	Line 2	37.95	49.09	11.14	Pass	A98, A100
1.239205	Line 1	35.18	46.00	10.82	Pass	A97, A99
1.638965	Line 2	33.13	46.00	12.87	Pass	A98, A100
2.629685	Line 1	32.50	46.00	13.50	Pass	A97, A99
2.925295	Line 2	32.07	46.00	13.93	Pass	A98, A100
4.959983	Line 2	44.23	46.00	1.77	Pass	A98, A100

**Limit**

Frequency, MHz	Class B equipment, dB(μV)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

*The limit decreases linearly with the logarithm of frequency.

TEST PROCEDURE

The measurements were performed at mains terminals by means of LISN, connected to spectrum analyzer in the frequency range as referred to in the table above. The unused coaxial connector of the LISN was terminated with 50 Ω. The measurements were made with quasi-peak and average detectors as referred to in the tables. The position of the EUT cables was varied to determine maximum emission level.

TEST EQUIPMENT USED:

HL 0447	HL 0466	HL 0521	HL 0787	HL 1003	HL 1205	HL 1503
---------	---------	---------	---------	---------	---------	---------



4.8 Unintentional radiated emissions test according to §15.109

METHOD OF MEASUREMENT: ANSI 63.4 §11.6 / ANSI 63.4 §12.1.4
DATE of TEST: February 9, 2004
AMBIENT TEMPERATURE: 21°C
RELATIVE HUMIDITY: 55 %
AIR PRESSURE: 1020 hPa
DISTANCE BETWEEN ANTENNA AND EUT: 3 m
THE EUT WAS TESTED AS: TABLE-TOP
FREQUENCY RANGE: 30 MHz – 5 GHz

Frequency, MHz	Detector type	RBW, kHz	Antenna type	Ant. pol.	Ant. height, m	TT pos. (°)	Radiated emissions, dB (μV/m)	Limit, dB (μV/m)	Margin, dB	Verdict
66.48	Quasi-peak	120	Biconilog	H	4.0	227	34.99	40.00	5.01	Pass
80.00	Quasi-peak	120	Biconilog	V	1.0	285	33.77	40.00	6.23	Pass
360.00	Quasi-peak	120	Biconilog	H	1.0	158	45.01	46.00	0.99	Pass
465.34	Quasi-peak	120	Biconilog	V	1.0	167	44.73	46.00	1.27	Pass
731.24	Quasi-peak	120	Biconilog	V	1.1	122	39.49	46.00	6.51	Pass
797.72	Quasi-peak	120	Biconilog	H	1.0	154	45.18	46.00	0.82	Pass
930.67	Quasi-peak	120	Biconilog	H	1.0	164	45.17	46.00	0.83	Pass
4272.02	Average	1000	Double ridged guide	H	1.1	0	46.18	54.00	7.82	Pass

Table abbreviations:

RBW = resolution bandwidth
Ant. pol. = antenna polarization, V – vertical, H - horizontal
TT pos. = turntable position, 0° = EUT front panel faces the receiving antenna

	The EUT highest used frequency (not including operating frequency), MHz	Upper frequency of measurement range, MHz
	Below 1.705	30
	1.705 – 108	1000
	108 – 500	2000
X	500 – 1000	5000
	Above 1000	5 th harmonic of the highest frequency

**LIMIT (§ 15.109)**

Frequency, MHz	Class B equipment @ 3 m dB(μV/m)
30 - 88	40
88 - 216	43.5
216 - 960	46
960 - 5000	54

TEST PROCEDURE

The test was performed in anechoic chamber in 30 MHz – 5 GHz range. The EUT was placed on a wooden 80 cm height turntable. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antenna polarization was changed from vertical to horizontal.

TEST EQUIPMENT USED IN ANECHOIC CHAMBER:

HL 0465	HL 0521	HL 0589	HL 0592	HL 0593	HL 0594	HL 0604
HL 1004	HL 1947	HL 2009	HL 2432			




Appendix A Plots

Plot A1

Power density measurements

Mode: Hybrid
F_{Low}: 903 MHz
Bit rate: 4 Mbit/s

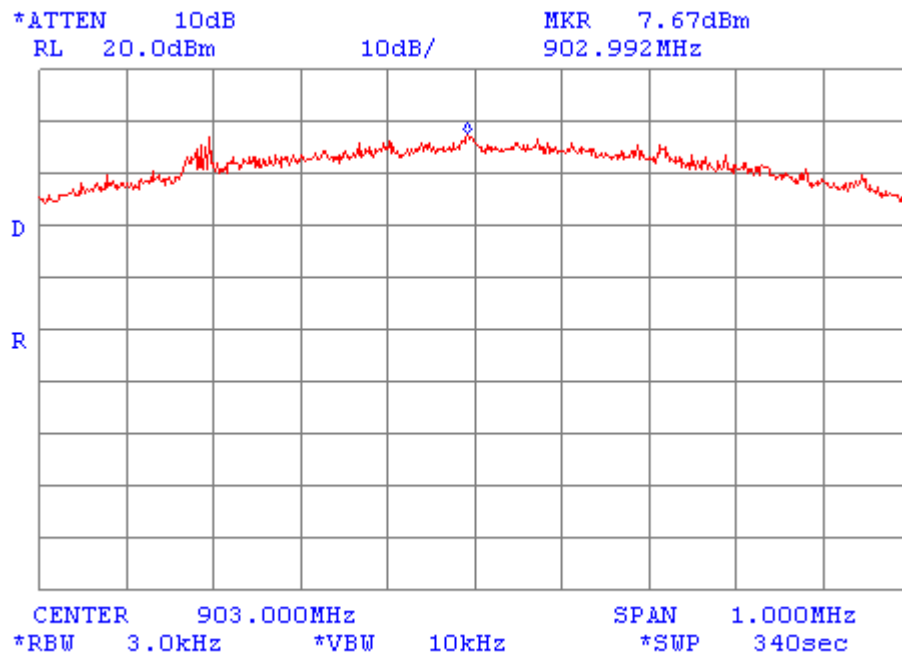




Plot A2

Power density measurements

Mode: Hybrid
F_{LOW}: 903 MHz
Bit rate: 3 Mbit/s

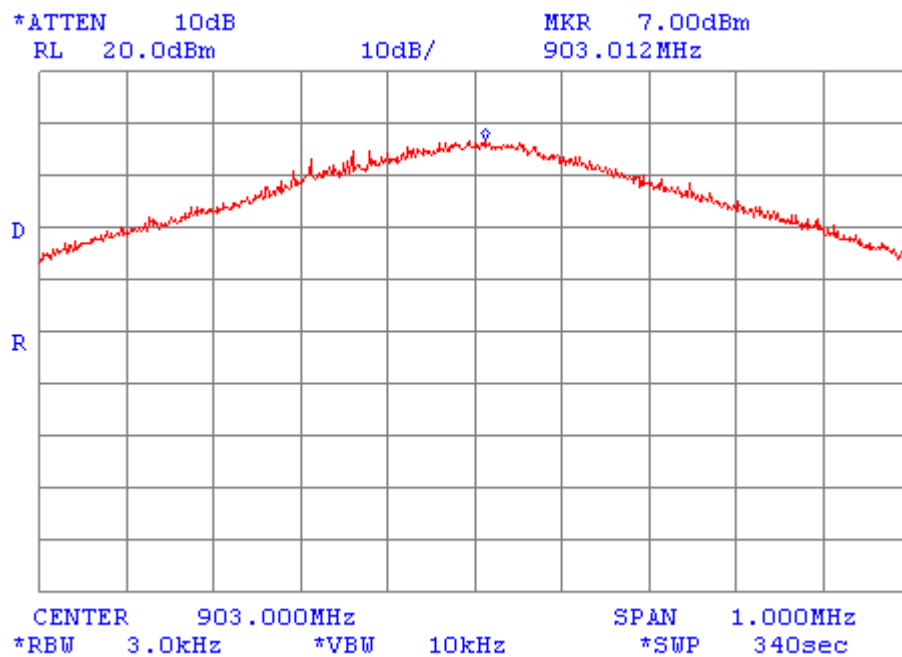




Plot A3

Power density measurements

Mode: Hybrid
F_{MIDDLE}: 915 MHz
Bit rate: 4 Mbit/s

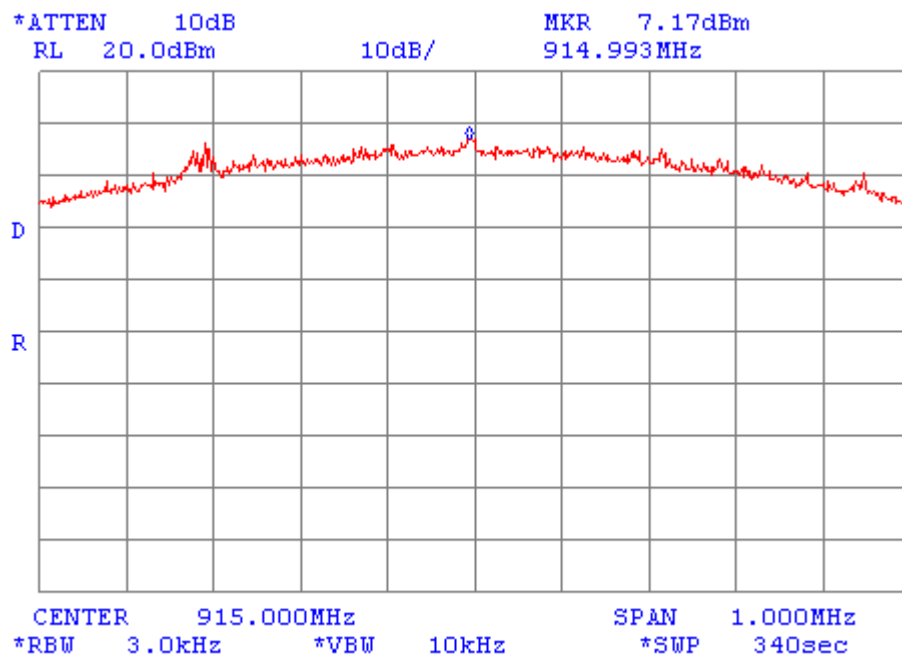




Plot A4

Power density measurements

Mode: Hybrid
F_{MIDDLE}: 915 MHz
Bit rate: 3 Mbit/s

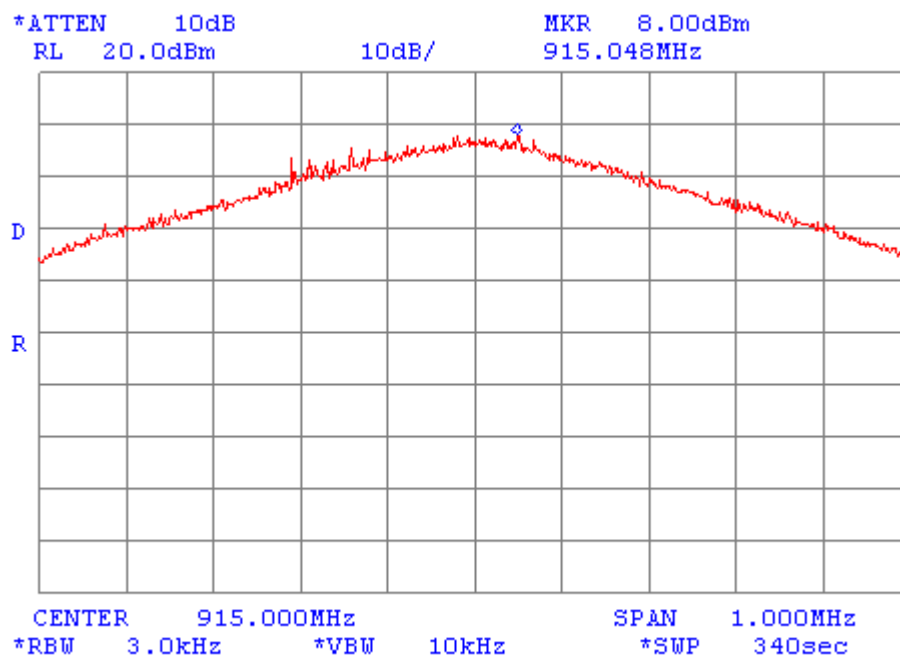




Plot A5

Power density measurements

Mode: Hybrid
F_{HIGH}: 927 MHz
Bit rate: 4 Mbit/s

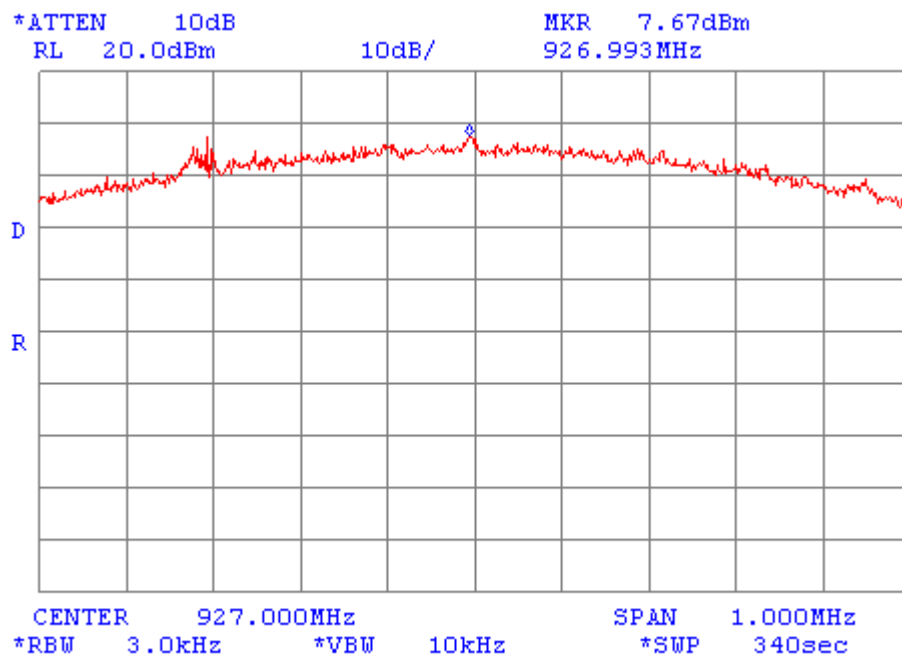




Plot A6

Power density measurements

Mode: Hybrid
F_{HIGH}: 927 MHz
Bit rate: 3 Mbit/s

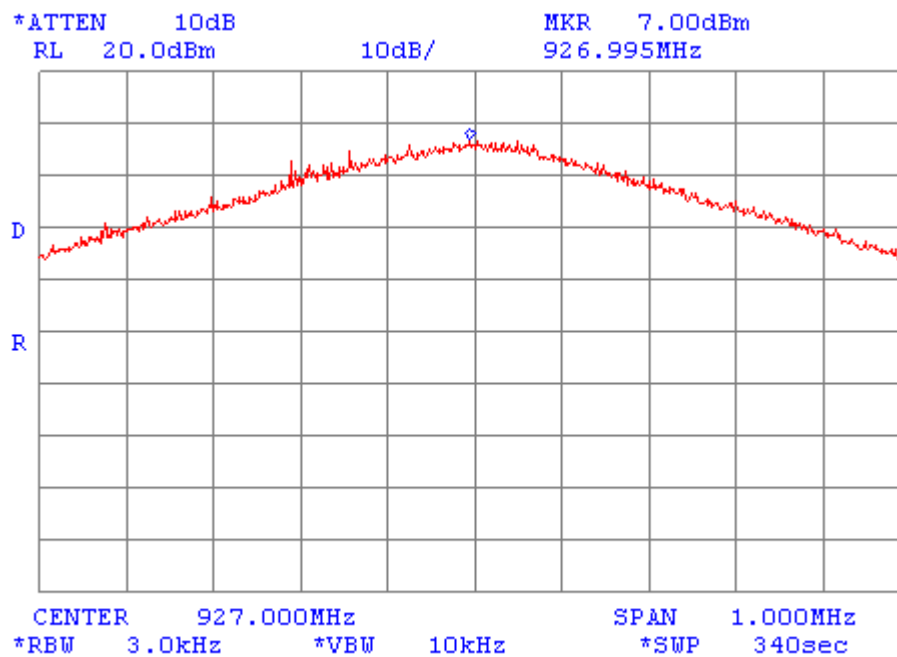




Plot A7

Average time of occupancy

Mode: Hopping turned on

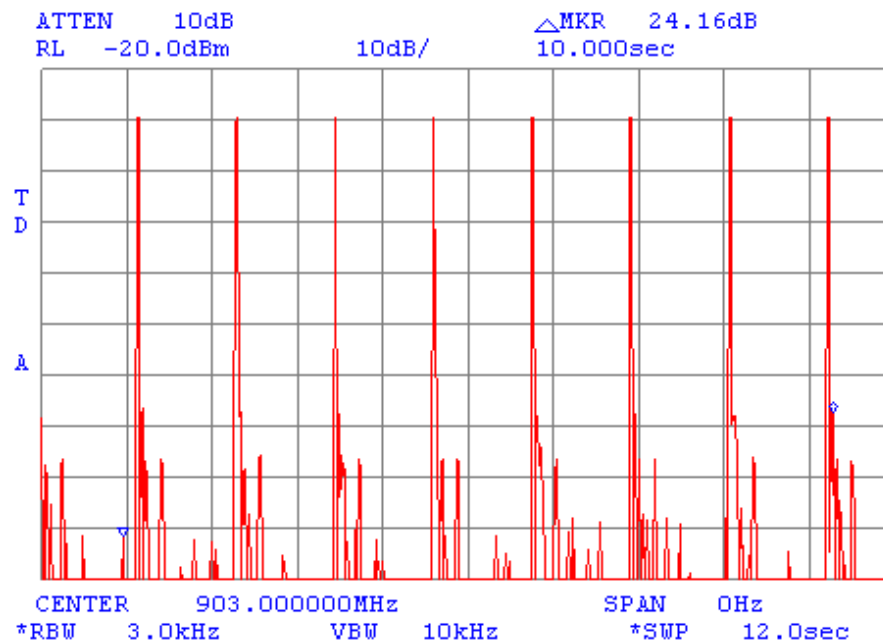


8 transmissions within 10 sec interval



Plot A8

Average time of occupancy

Mode: Hopping turned on

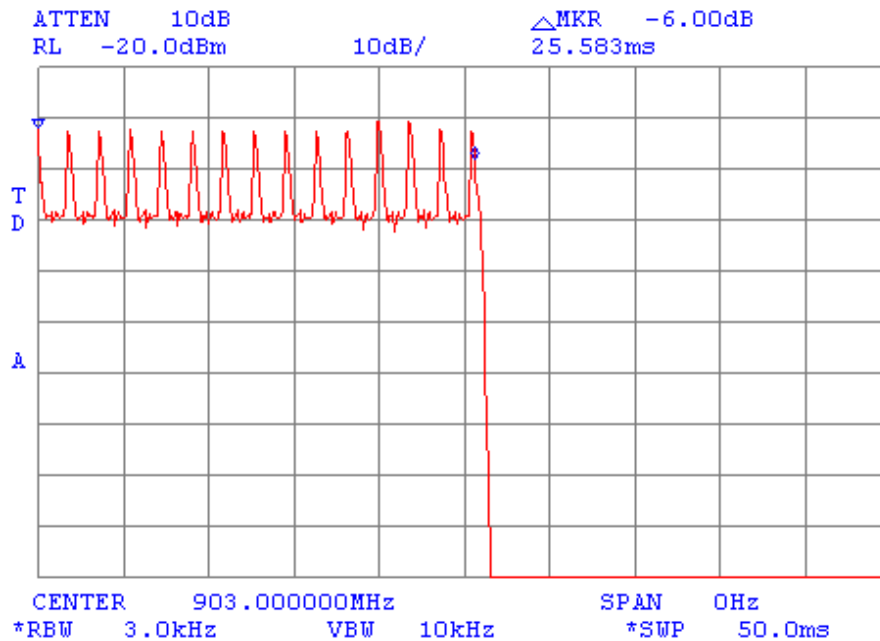

Average time of occupancy calculation:

25.583 ms x 8 times=204.664 ms

204.664 ms <400 ms


Verdict: PASS



Plot A9

Peak output power

Mode: Hybrid
F_{LOW}: 903 MHz

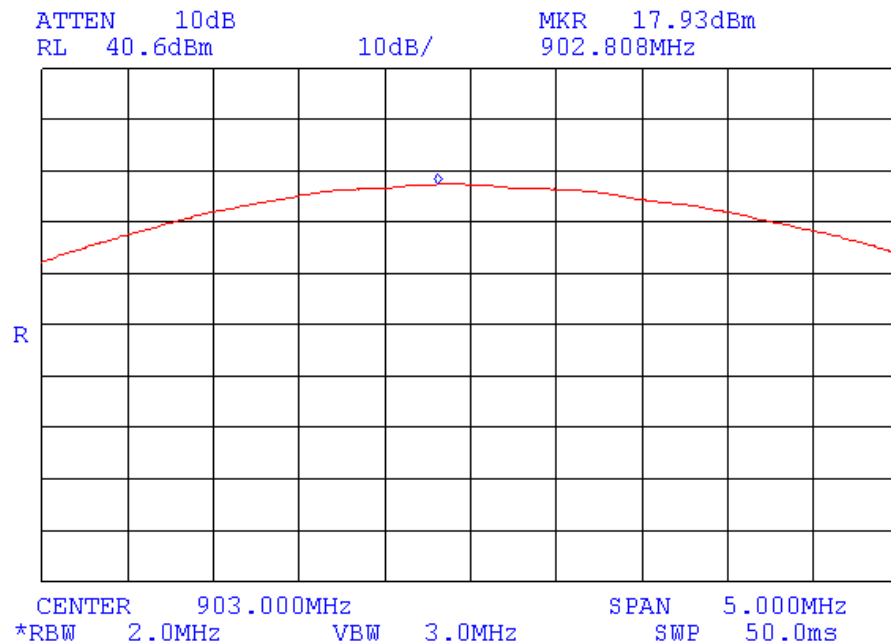




Plot A10

Peak output power

Mode: Hybrid
F_{MIDDLE}: 915 MHz

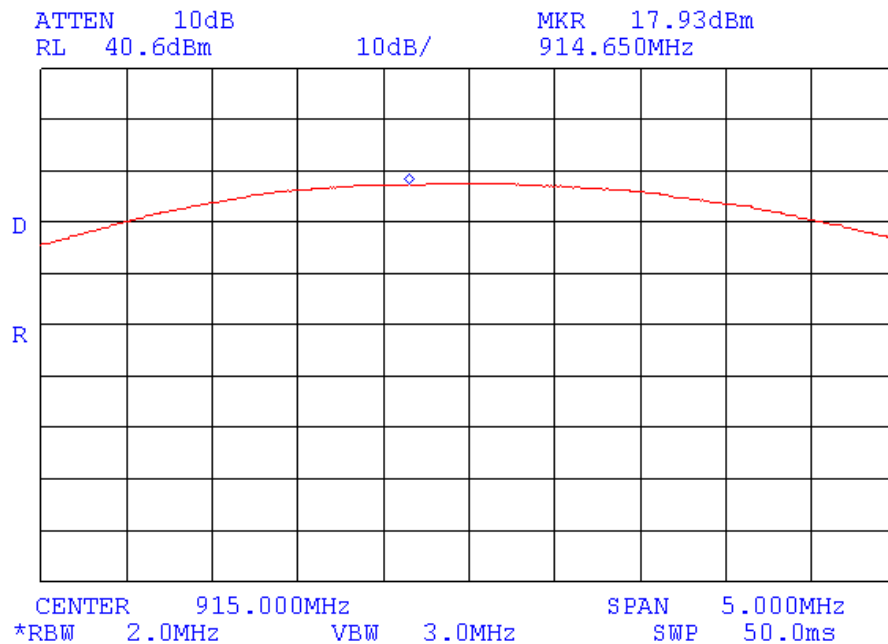




Plot A11

Peak output power

Mode: Hybrid
F_{HIGH}: 927 MHz

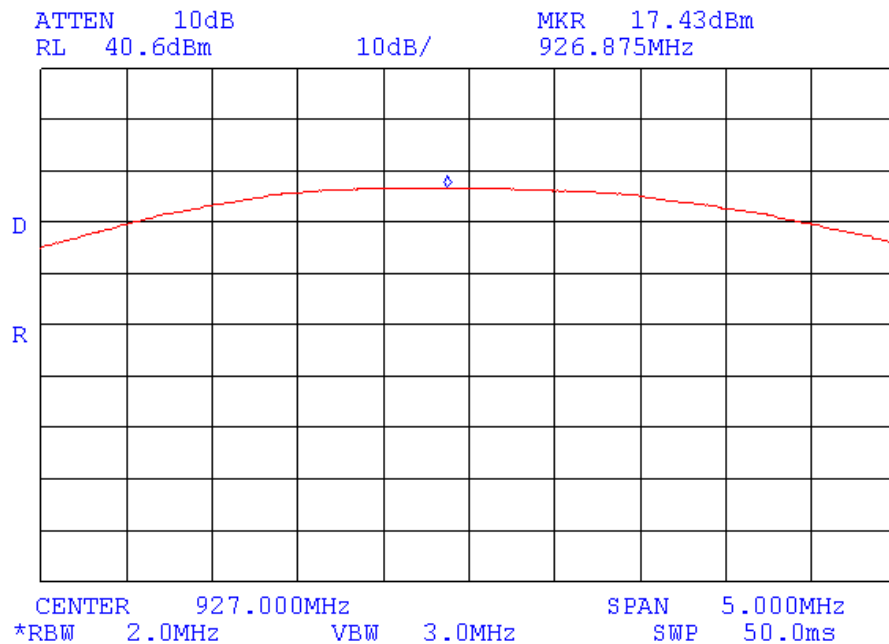




Plot A12

6 dB bandwidth

Mode: Hybrid
F_{LOW}: 903 MHz
Bit rate: 4 Mbit/s

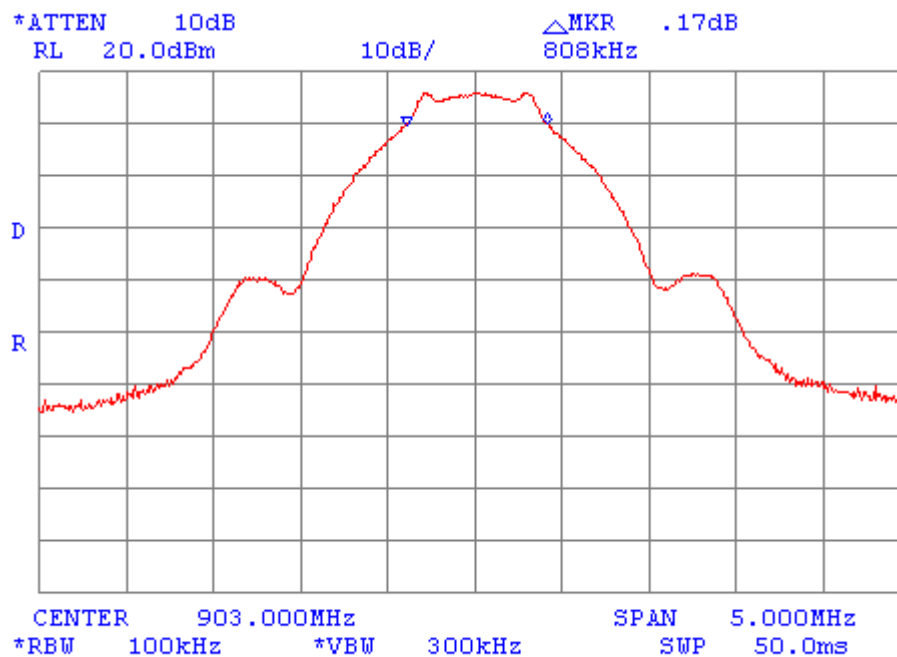




Plot A13

6 dB bandwidth

Mode: Hybrid
F_{LOW}: 903 MHz
Bit rate: 3 Mbit/s

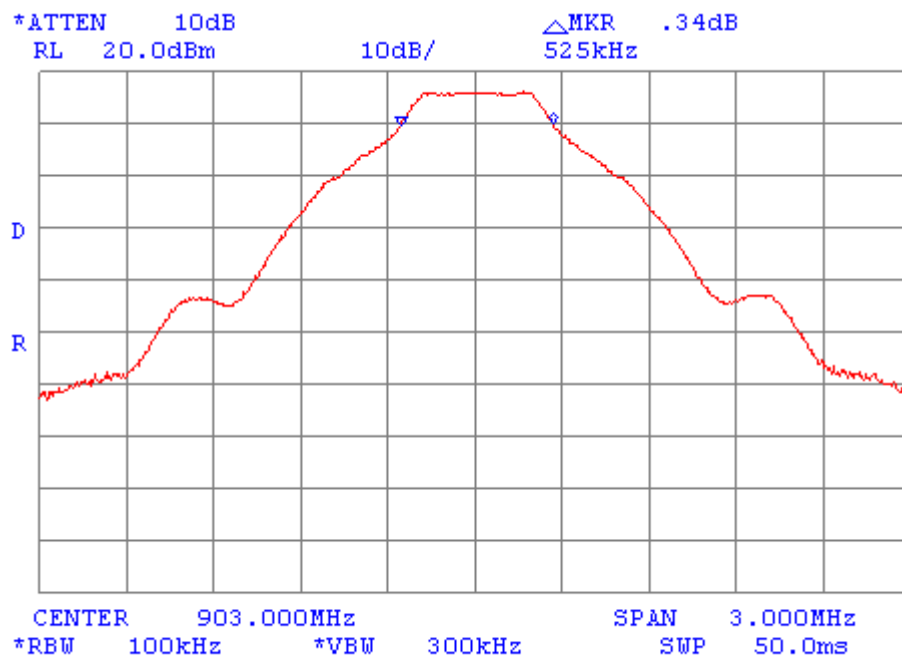




Plot A14

6 dB bandwidth

Mode: Hybrid
F_{MIDDLE}: 915 MHz
Bit rate: 4 Mbit/s

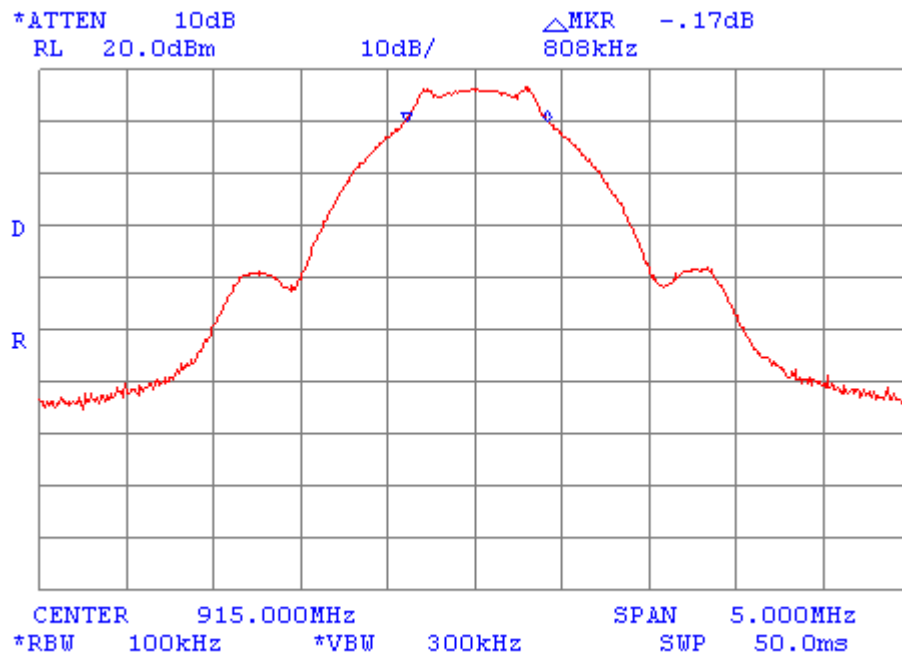




Plot A15

6 dB bandwidth

Mode: Hybrid
F_{MIDDLE}: 915 MHz
Bit rate: 3 Mbit/s

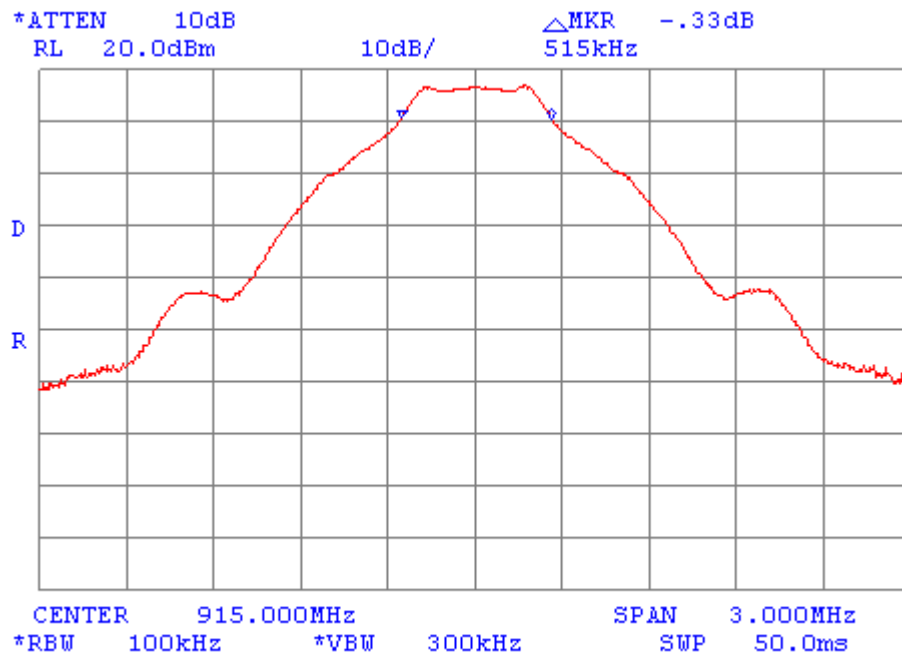




Plot A16

6 dB bandwidth

Mode: Hybrid
F_{HIGH}: 927 MHz
Bit rate: 4 Mbit/s

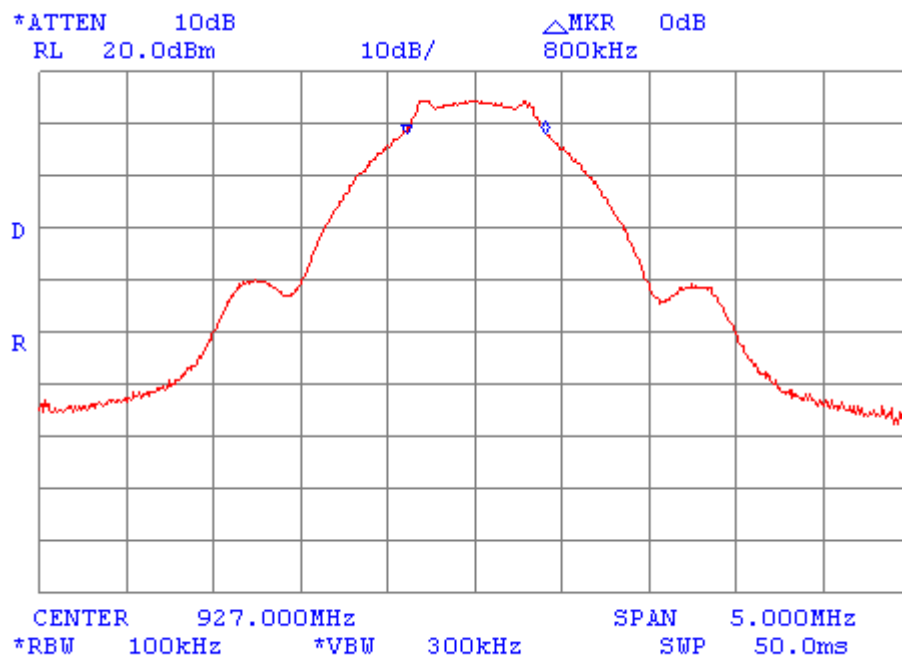




Plot A17

6 dB bandwidth

Mode: Hybrid
F_{HIGH}: 927 MHz
Bit rate: 3 Mbit/s

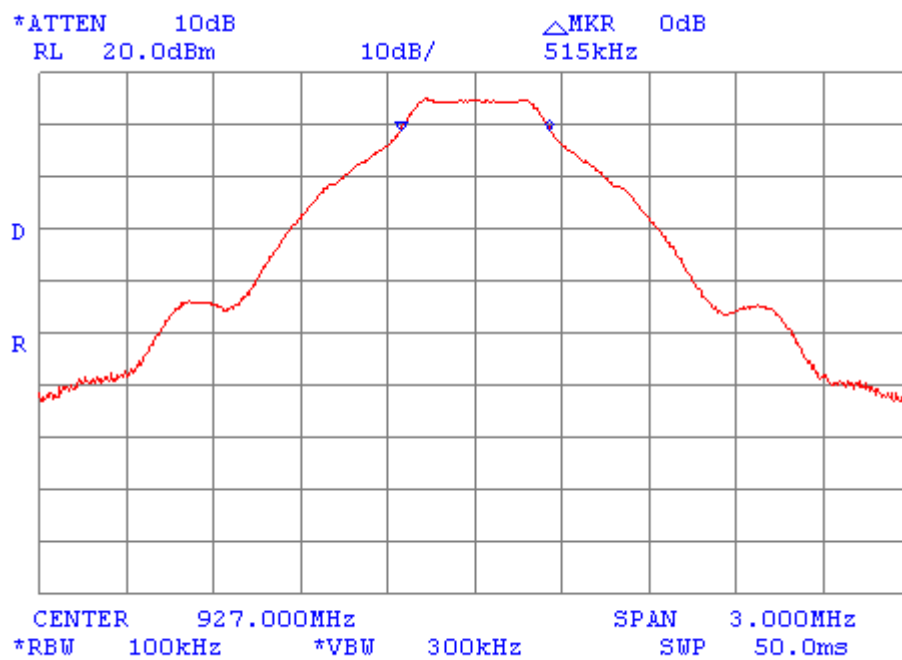




Plot A18

Conducted emission measurements within the band

Mode: Hybrid
F_{LOW}: 903 MHz
Bit rate: 4 Mbit/s

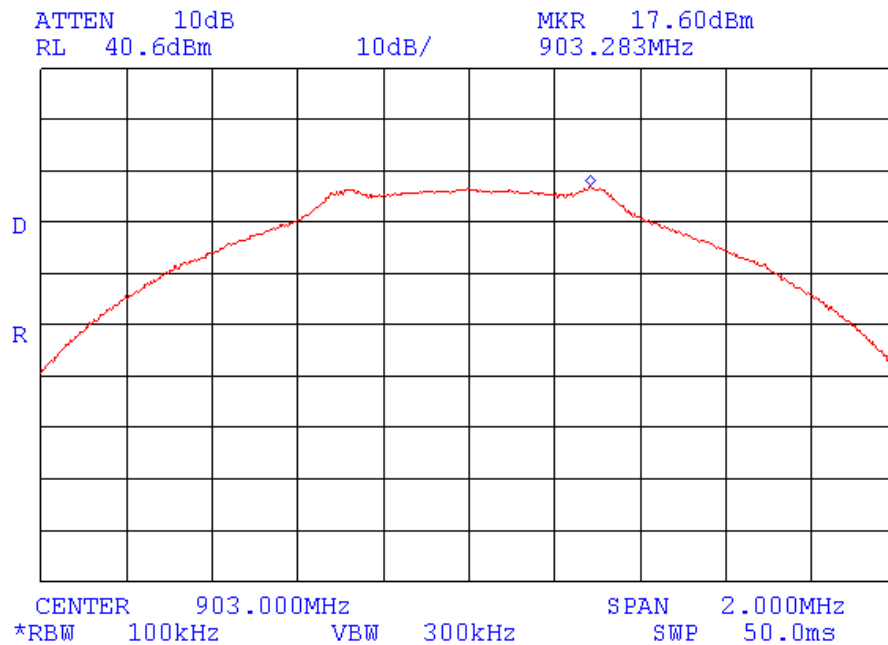


Limit for spurious emissions=17.6-20=-2.4 dBm



Plot A19

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 903 MHz
Bit rate: 4 Mbit/s
Frequency range: 9 kHz - 100 kHz

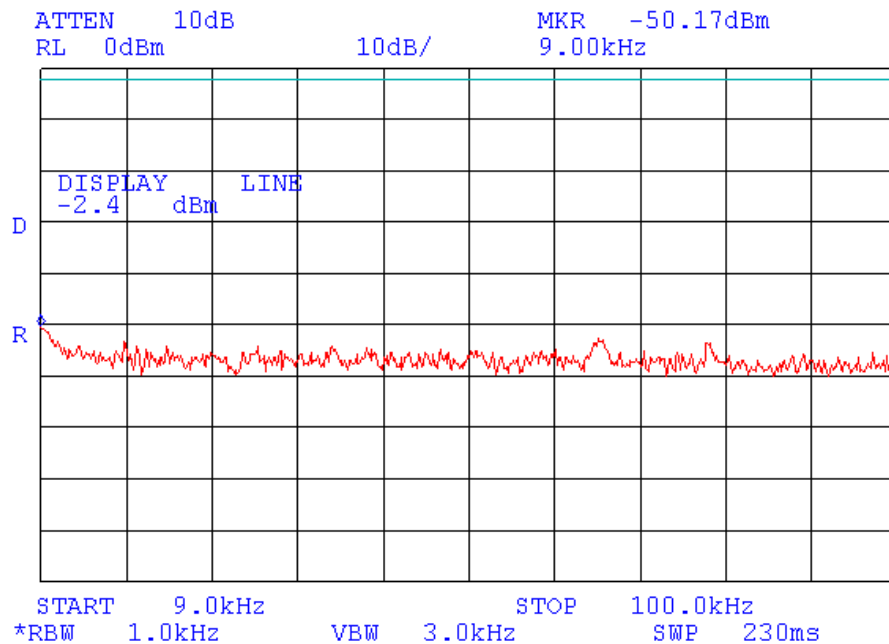




Plot A20

Conducted spurious emission measurements

Mode: Hybrid
F_{HIGH}: 903 MHz
Bit rate: 4 Mbit/s
Frequency range: 100 kHz – 1 MHz

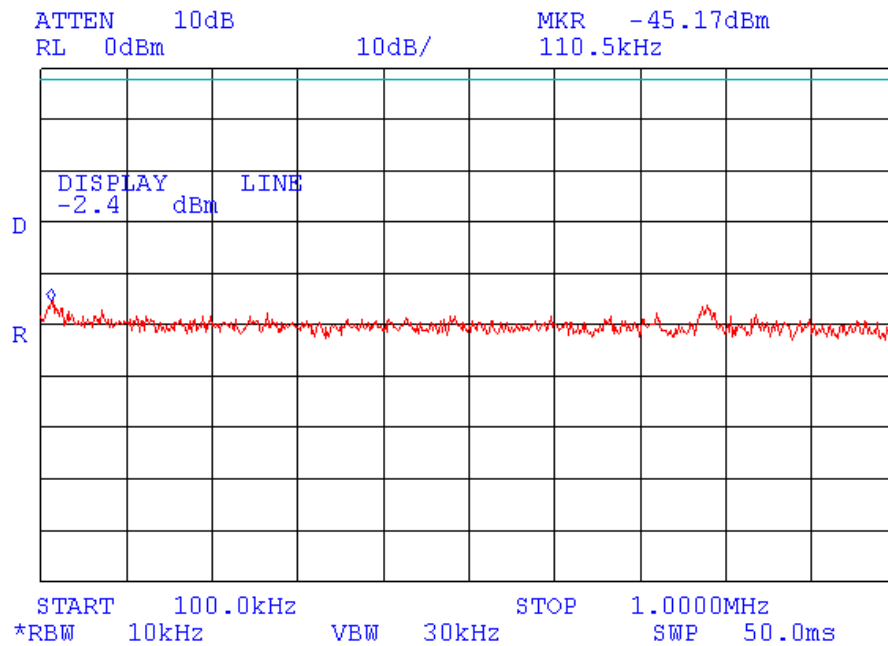




Plot A21

Conducted spurious emission measurements

Mode: Hybrid
F_{HIGH}: 903 MHz
Bit rate: 4 Mbit/s
Frequency range: 1 MHz - 30 MHz

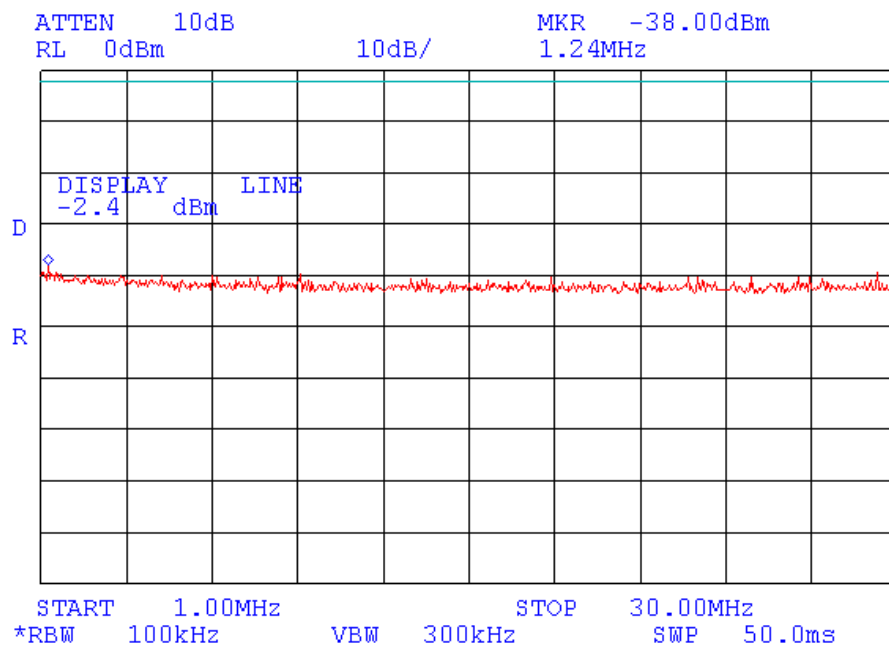




Plot A22

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 903 MHz
Bit rate: 4 Mbit/s
Frequency range: 30 MHz – 900 MHz

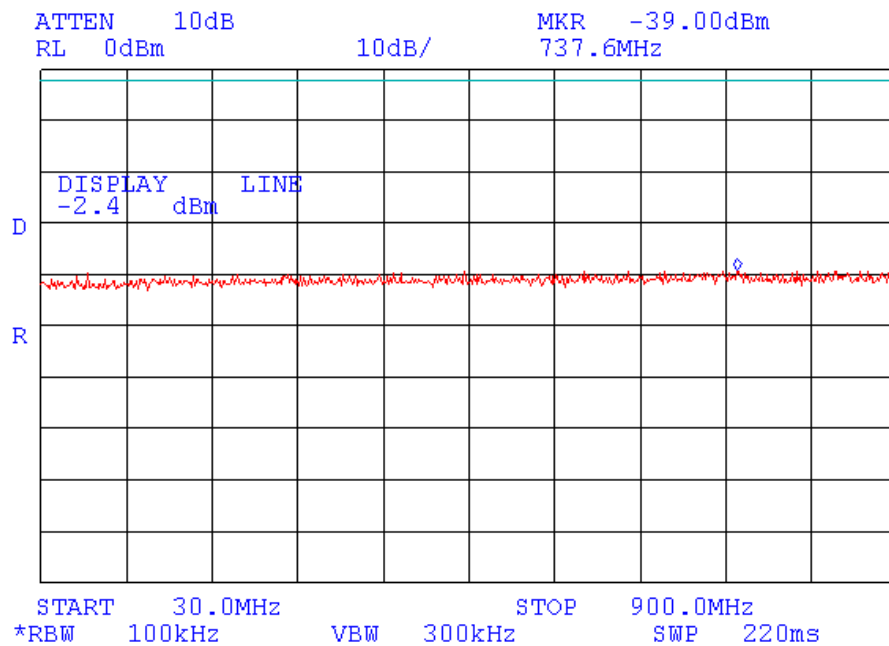




Plot A23

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 903 MHz
Bit rate: 4 Mbit/s
Frequency range: 900 – 902 MHz

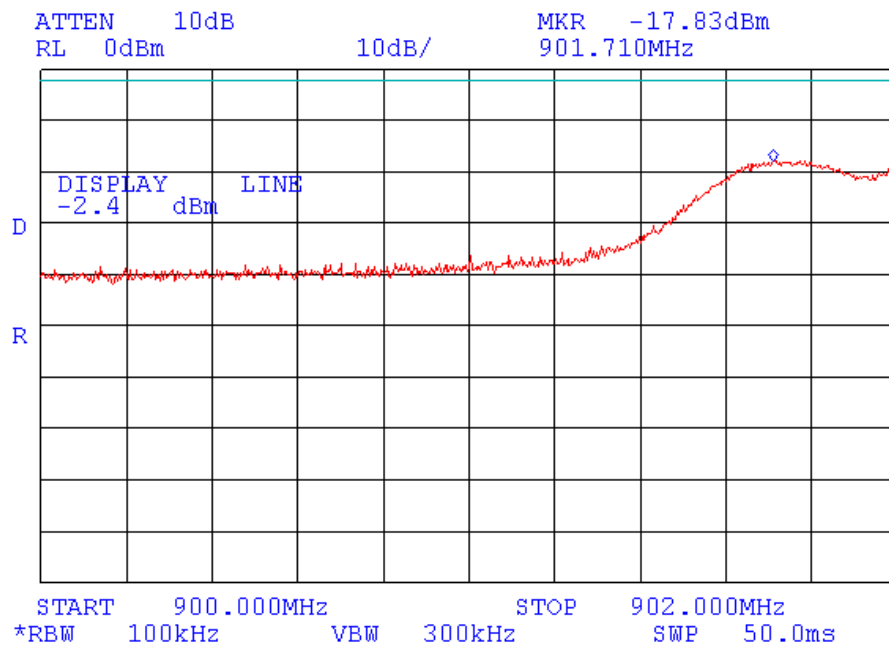


40 dB attenuator and cable loss are included in test result



Plot A24

Conducted spurious emission measurements at band edges

Mode: Hybrid
F_{LOW}: 903 MHz
Bit rate: 4 Mbit/s
Frequency range: 902 – 904 MHz

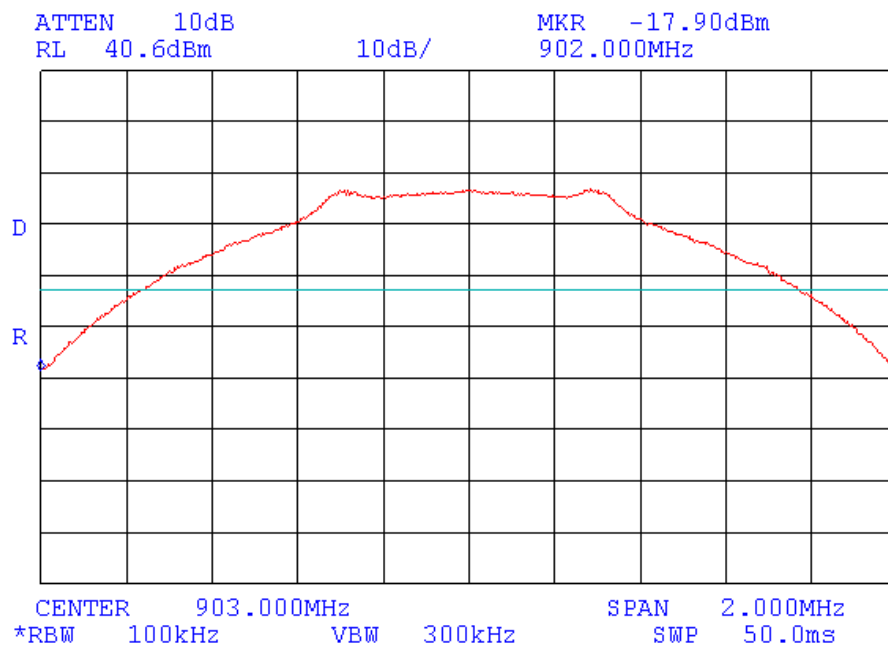




Plot A25

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 903 MHz
Bit rate: 4 Mbit/s
Frequency range: 928 MHz - 1 GHz

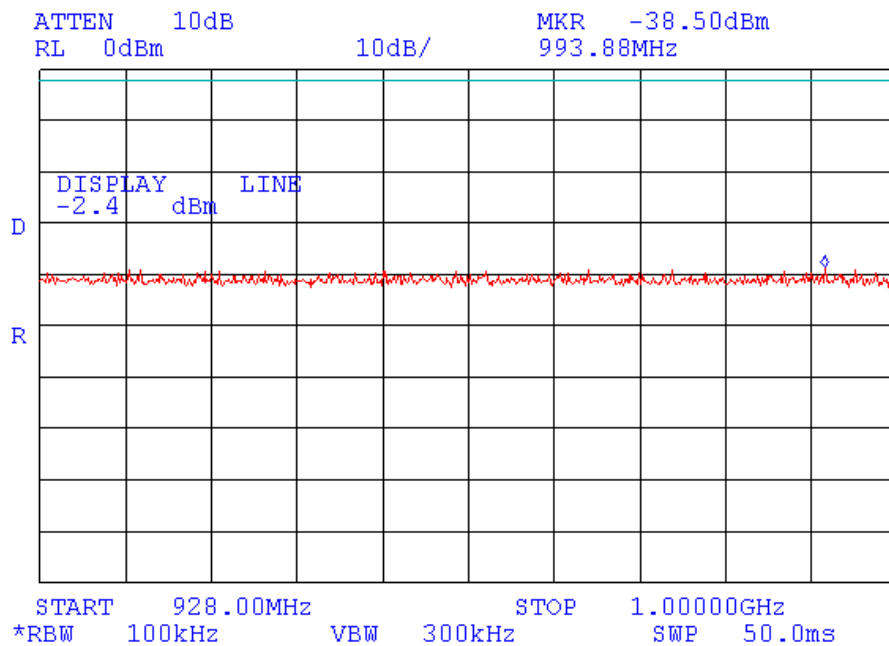




Plot A26

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 903 MHz
Bit rate: 4 Mbit/s
Frequency range: 1 GHz – 5 GHz

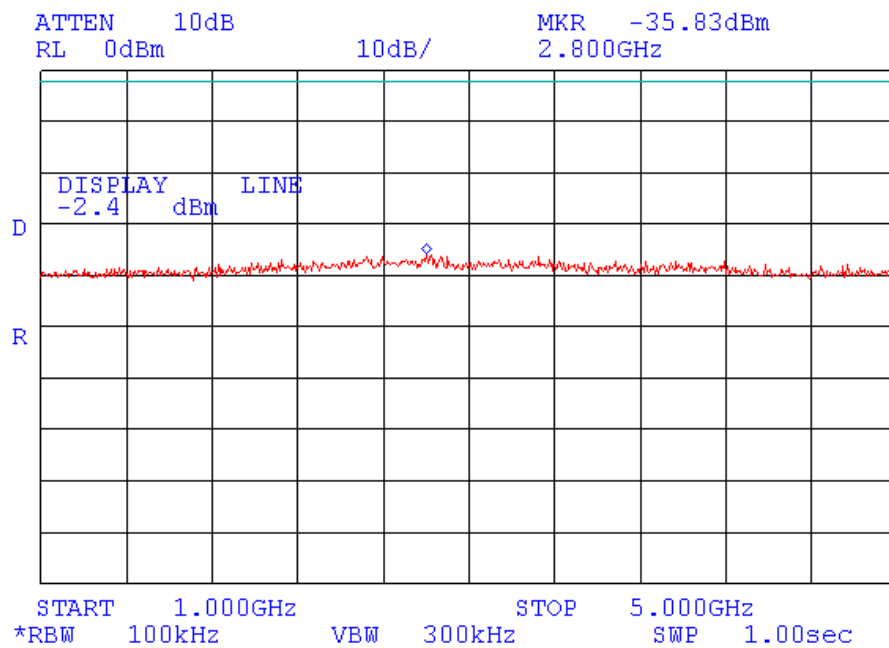




Plot A27

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 903 MHz
Bit rate: 4 Mbit/s
Frequency range: 5 GHz – 9.3 GHz

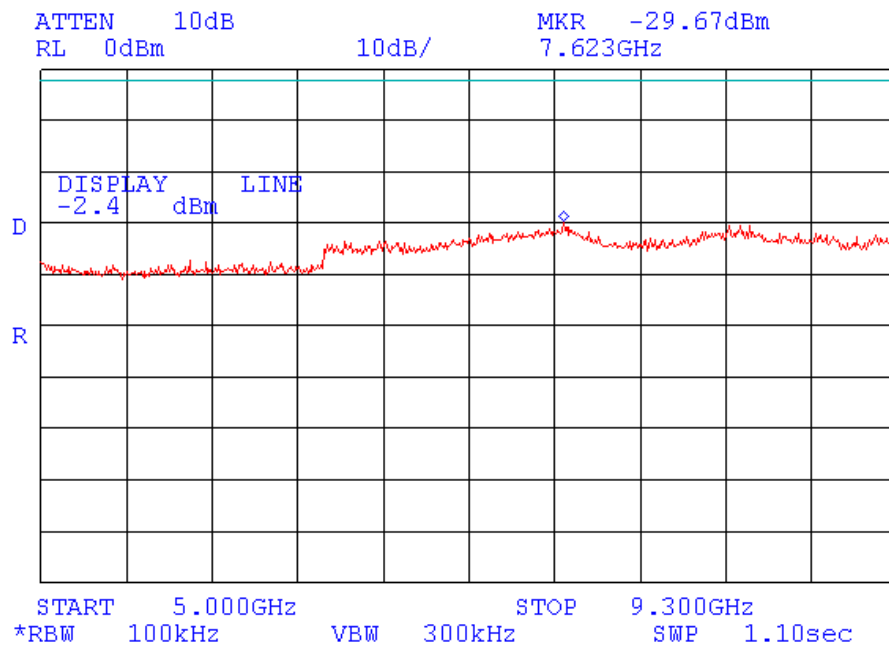




Plot A28

Conducted emission measurements within the band

Mode: Hybrid
F_{MIDDLE}: 915 MHz
Bit rate: 4 Mbit/s

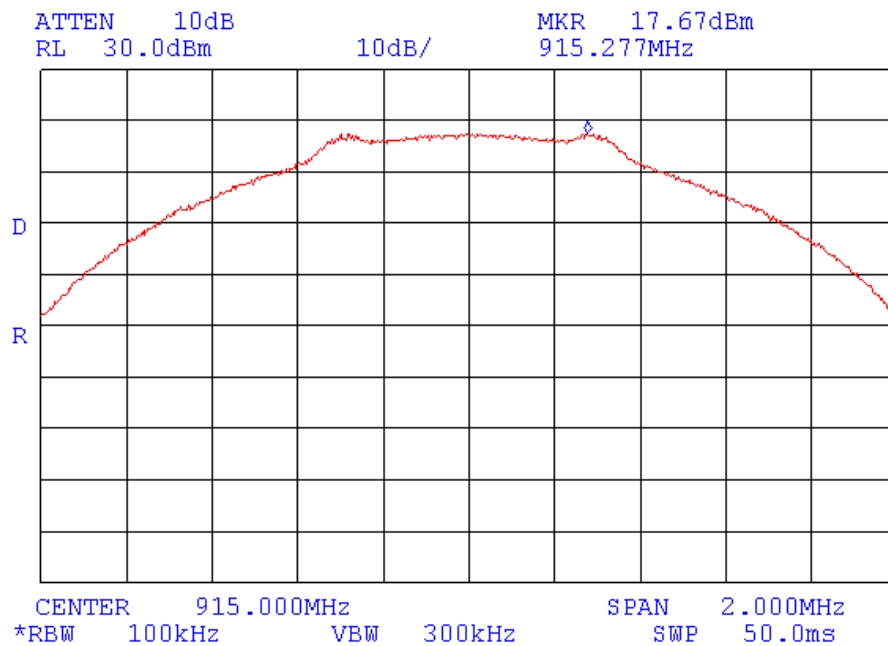


Limit for spurious emissions = 17.67 dBm -20 dB = -2.33 dBm



Plot A29

Conducted spurious emission measurements

Mode: Hybrid
F_{MIDDLE}: 915 MHz
Bit rate: 4 Mbit/s
Frequency range: 9 kHz - 100 kHz

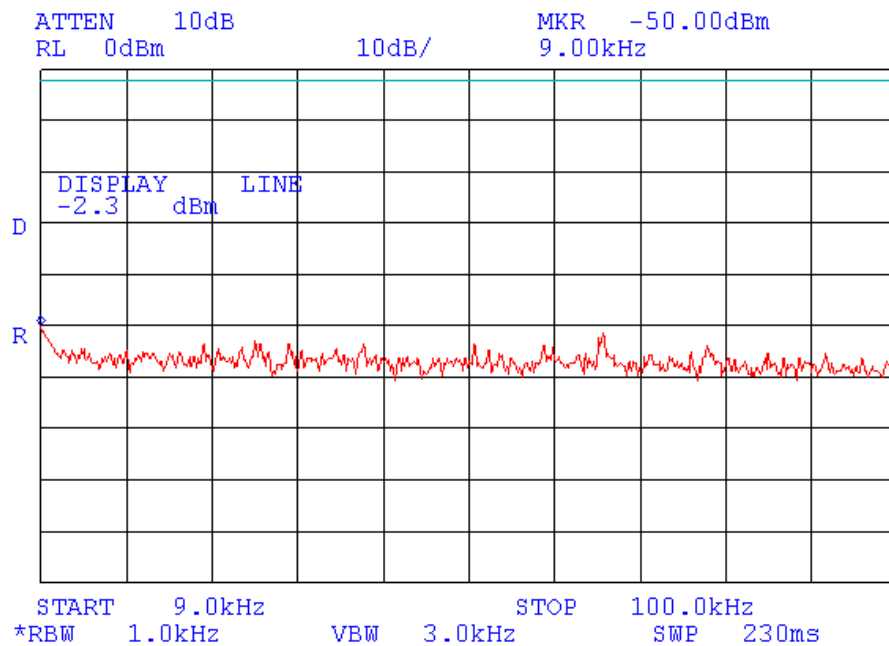




Plot A30

Conducted spurious emission measurements

Mode: Hybrid
F_{HIGH}: 915 MHz
Bit rate: 4 Mbit/s
Frequency range: 100 kHz – 1 MHz

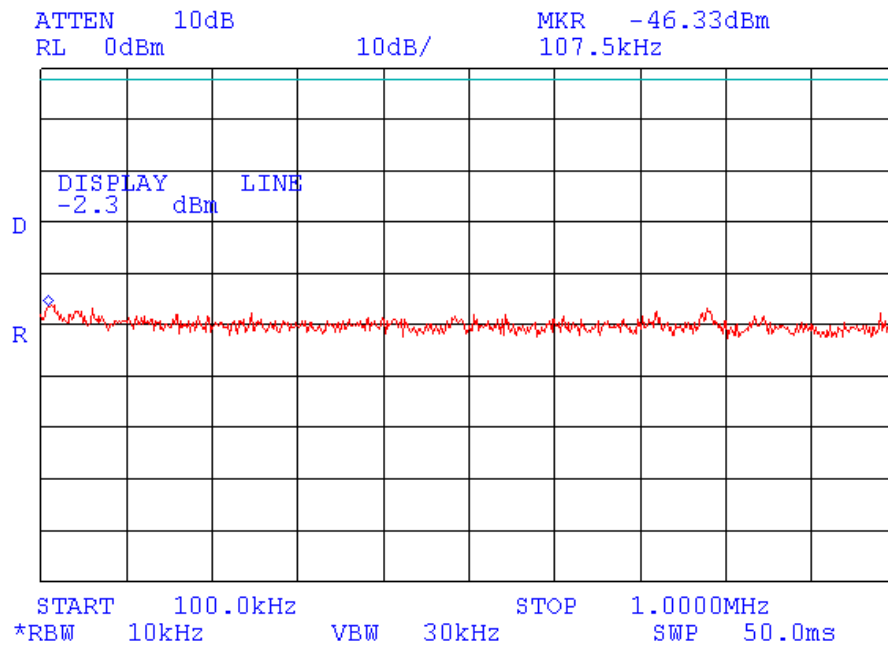




Plot A31

Conducted spurious emission measurements

Mode: Hybrid
F_{HIGH}: 915 MHz
Bit rate: 4 Mbit/s
Frequency range: 1 MHz - 30 MHz

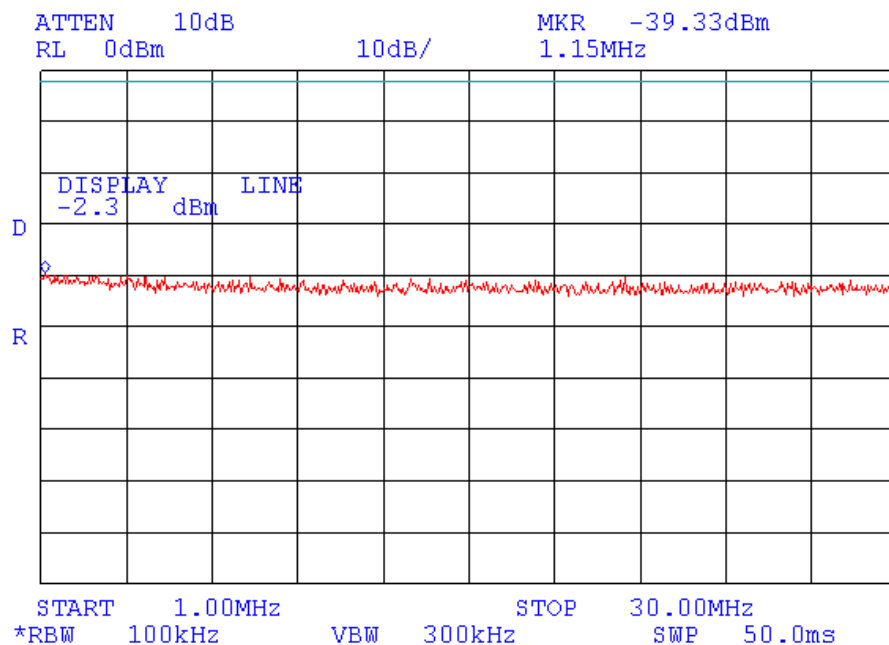




Plot A32

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 915 MHz
Bit rate: 4 Mbit/s
Frequency range: 30 MHz – 902 MHz

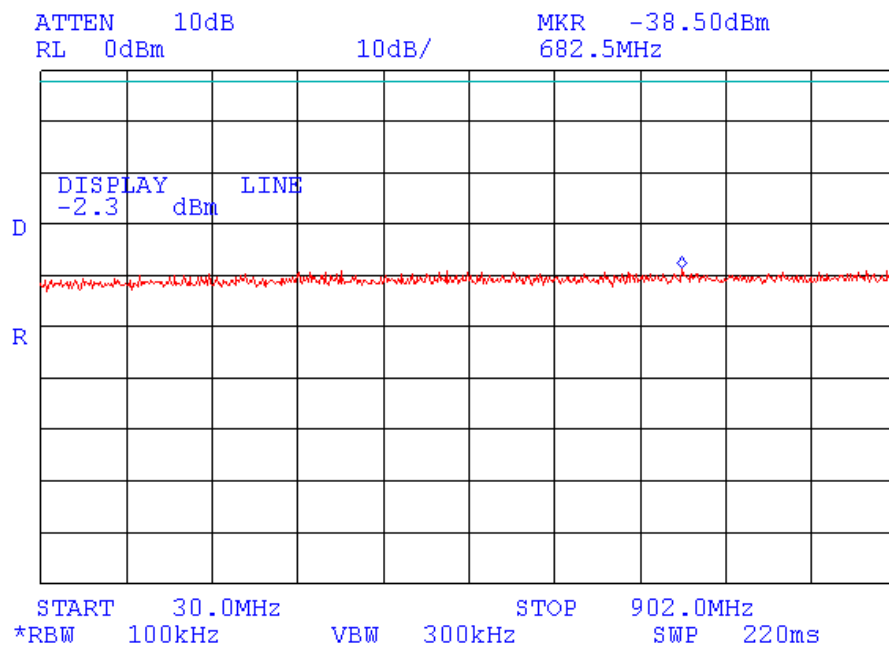




Plot A33

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 915 MHz
Bit rate: 4 Mbit/s
Frequency range: 928 MHz - 1 GHz

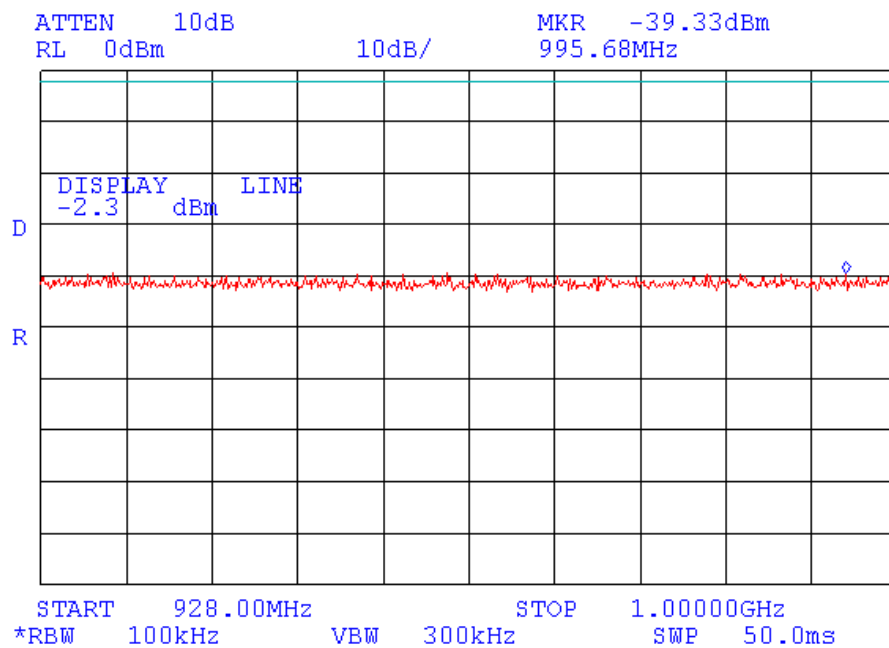




Plot A34

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 915 MHz
Bit rate: 4 Mbit/s
Frequency range: 1 GHz – 5 GHz

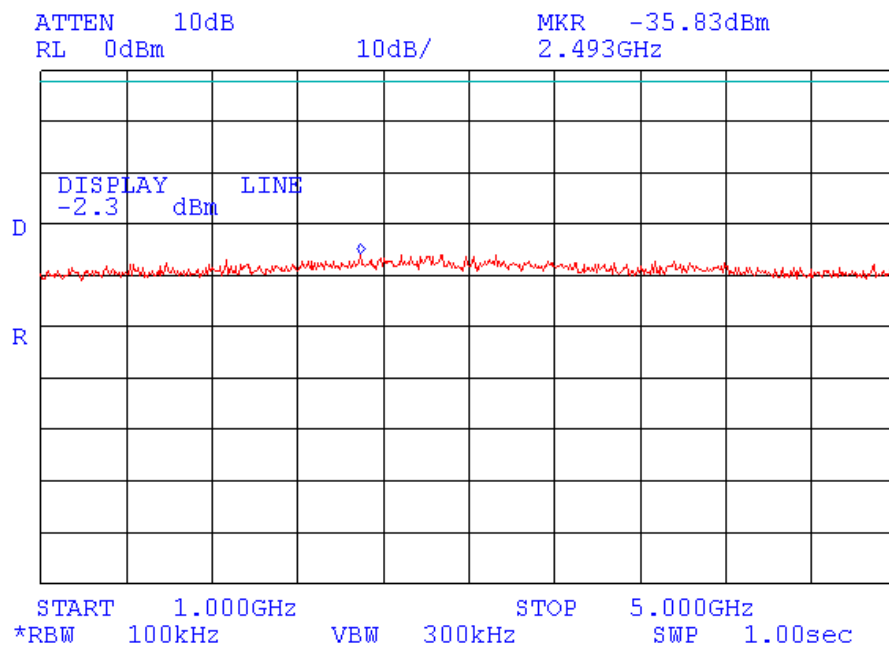




Plot A35

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 915 MHz
Bit rate: 4 Mbit/s
Frequency range: 5 GHz – 9.3 GHz

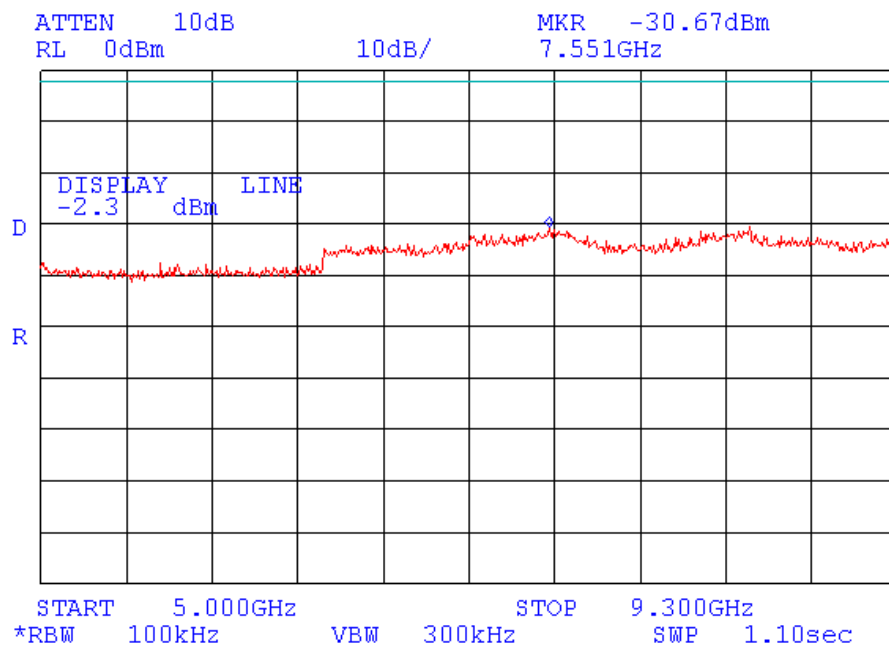




Plot A36

Conducted emission measurements within the band

Mode: Hybrid
F_{MIDDLE}: 927 MHz
Bit rate: 4 Mbit/s

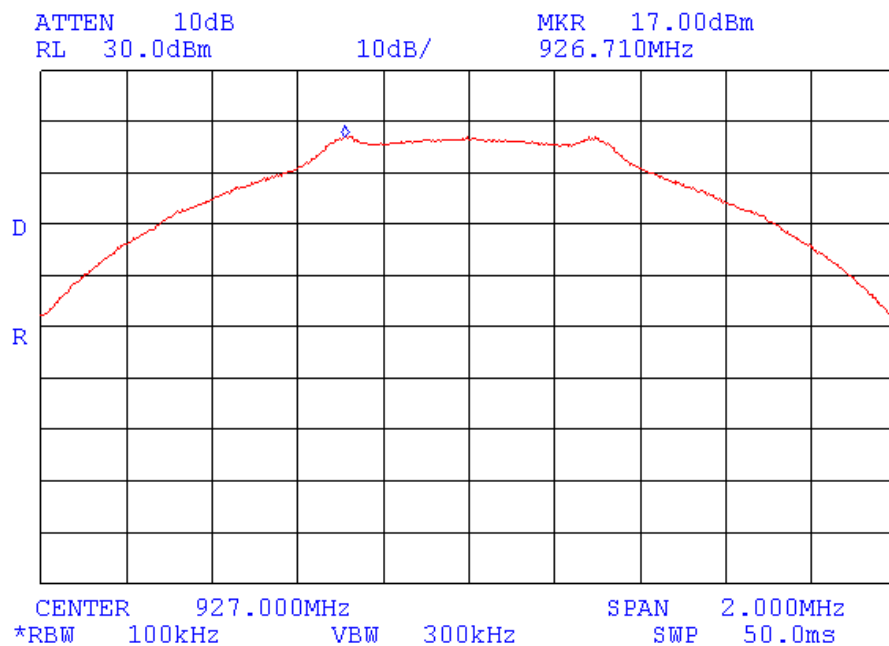


Limit for spurious emissions = 17.0 dBm -20 dB = -3 dBm



Plot A37

Conducted spurious emission measurements

Mode: Hybrid
F_{MIDDLE}: 927 MHz
Bit rate: 4 Mbit/s
Frequency range: 9 kHz - 100 kHz

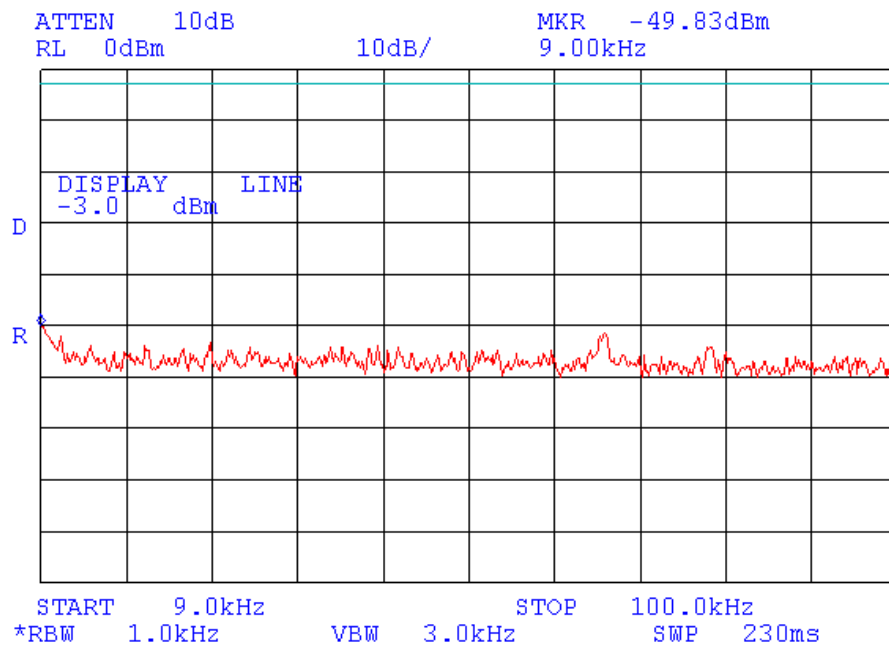




Plot A38

Conducted spurious emission measurements

Mode: Hybrid
F_{HIGH}: 927 MHz
Bit rate: 4 Mbit/s
Frequency range: 100 kHz – 1 MHz

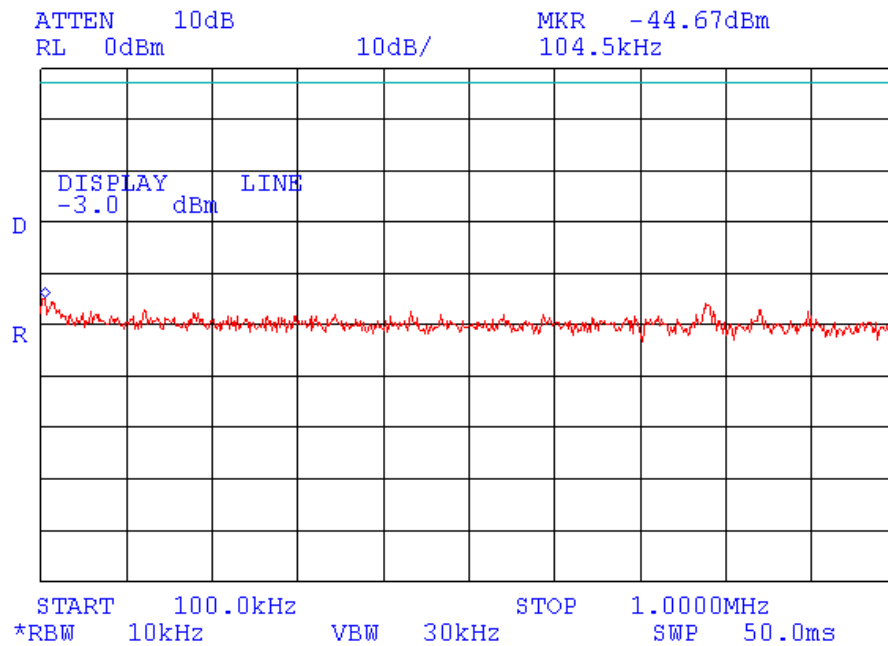




Plot A39

Conducted spurious emission measurements

Mode: Hybrid
F_{HIGH}: 927 MHz
Bit rate: 4 Mbit/s
Frequency range: 1 MHz - 30 MHz

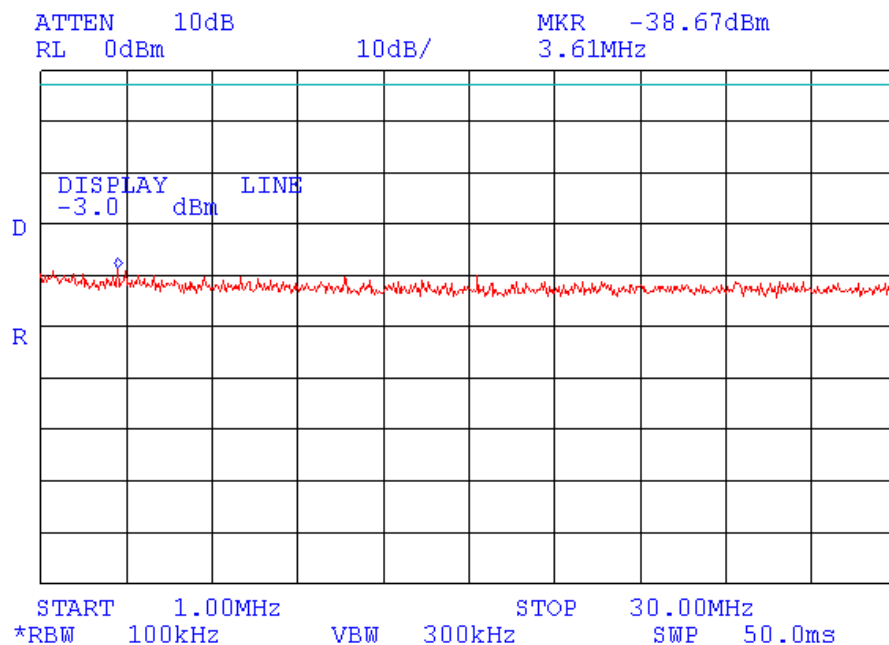




Plot A40

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 927 MHz
Bit rate: 4 Mbit/s
Frequency range: 30 MHz – 902 MHz

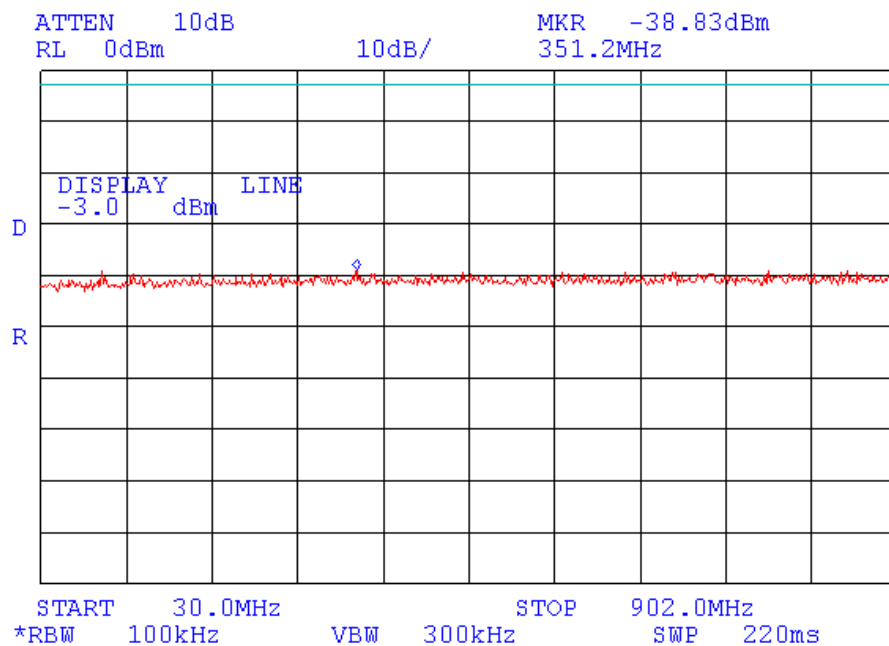




Plot A41

Conducted spurious emission measurements at band edges

Mode: Hybrid
F_{LOW}: 927 MHz
Bit rate: 4 Mbit/s
Frequency range: 926 – 928 MHz

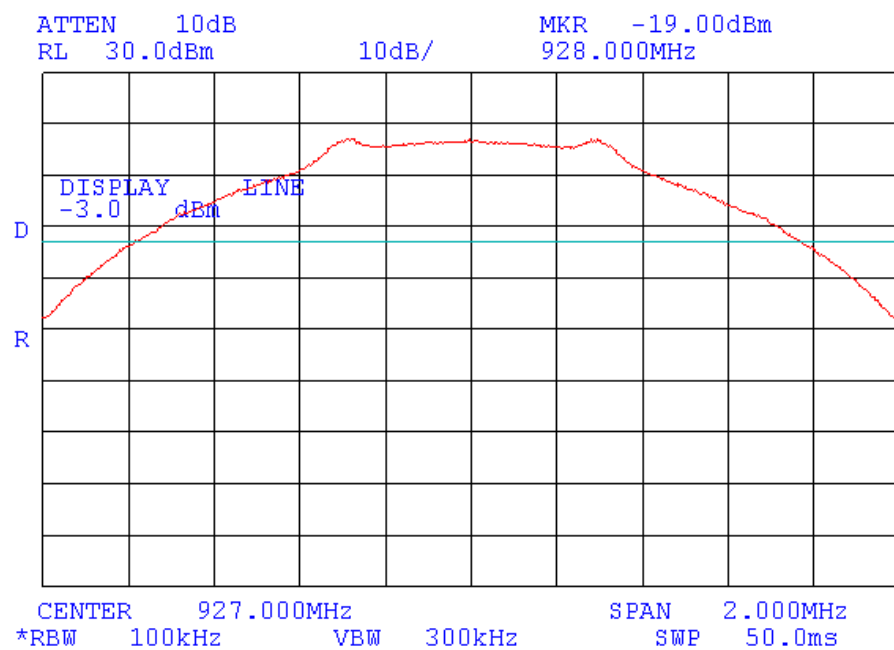




Plot A42

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 927 MHz
Bit rate: 4 Mbit/s
Frequency range: 928 MHz – 930 MHz

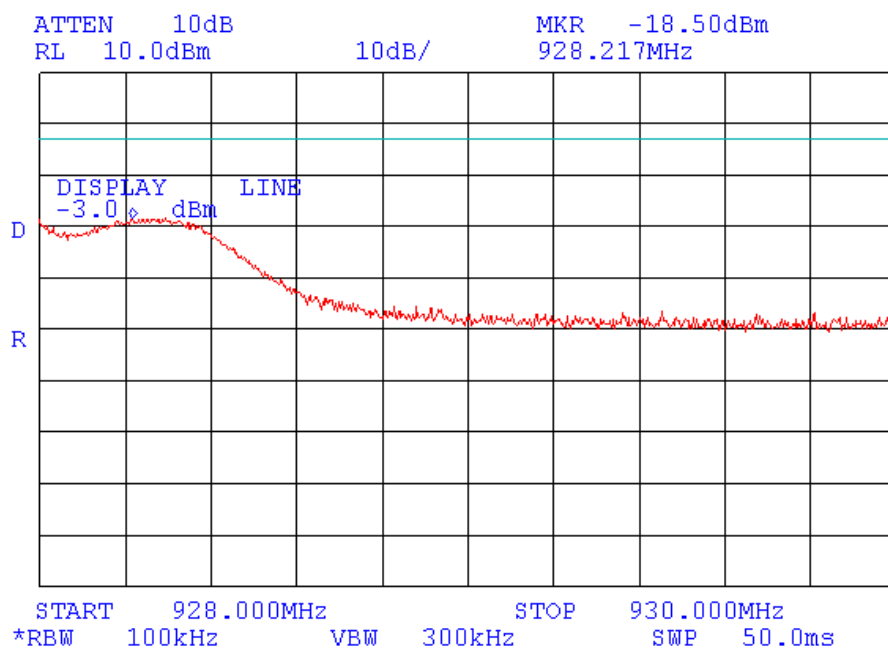




Plot A43

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 927 MHz
Bit rate: 4 Mbit/s
Frequency range: 930 MHz - 1 GHz

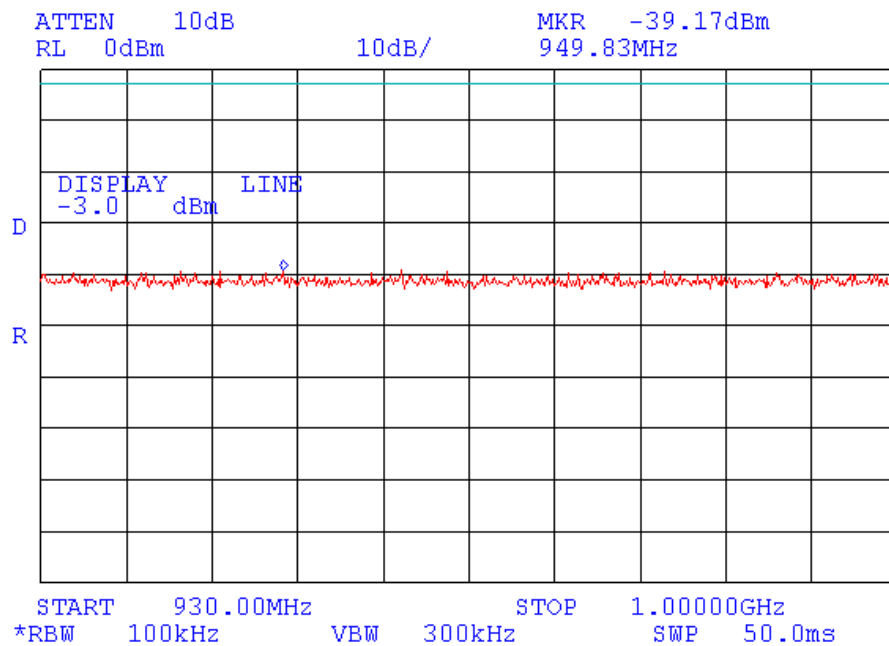




Plot A44

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 927 MHz
Bit rate: 4 Mbit/s
Frequency range: 1 GHz – 5 GHz

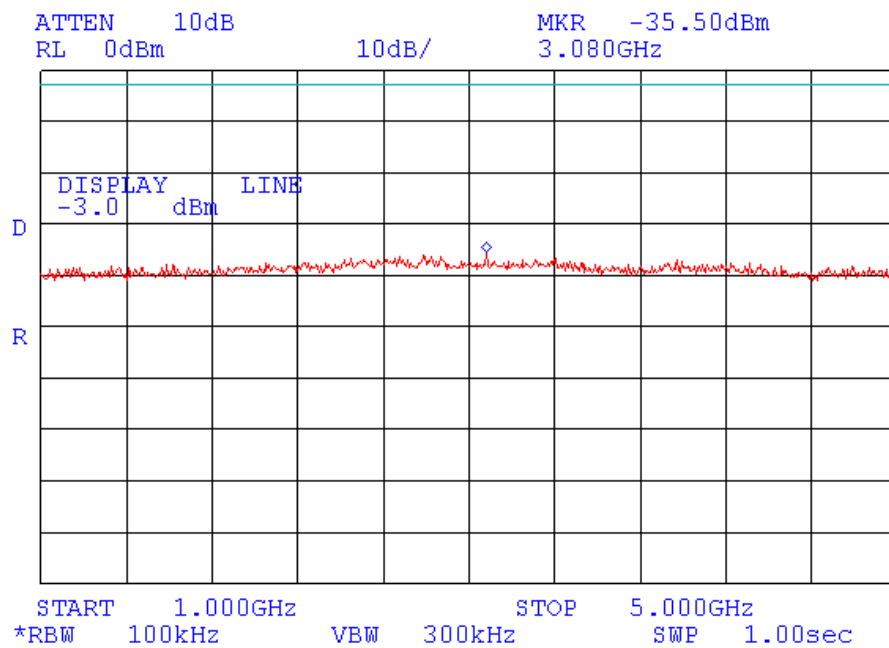




Plot A45

Conducted spurious emission measurements

Mode: Hybrid
F_{LOW}: 927 MHz
Bit rate: 4 Mbit/s
Frequency range: 5 GHz – 9.3 GHz

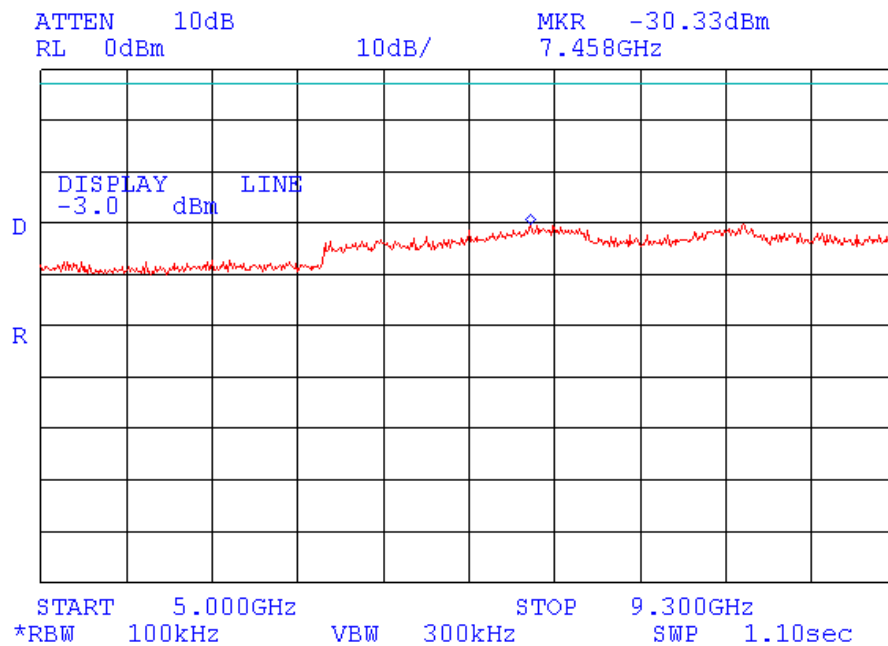



Plot A46

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 903 MHz

16:21:33 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 94.30 kHz
62.63 dB μ V/m

LOG REF 116 0 dB μ V/m

10

dB/

ATN

40 dB

VA SB

SC FC

ACORR

START 90.00 kHz

R #1F BW 9.0 kHz

AVG BW 30 kHz

STOP 110.00 kHz

SWP 50.0 msec




Plot A47

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 903 MHz

16:18:26 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 440 kHz
48.46 dB μ V/m

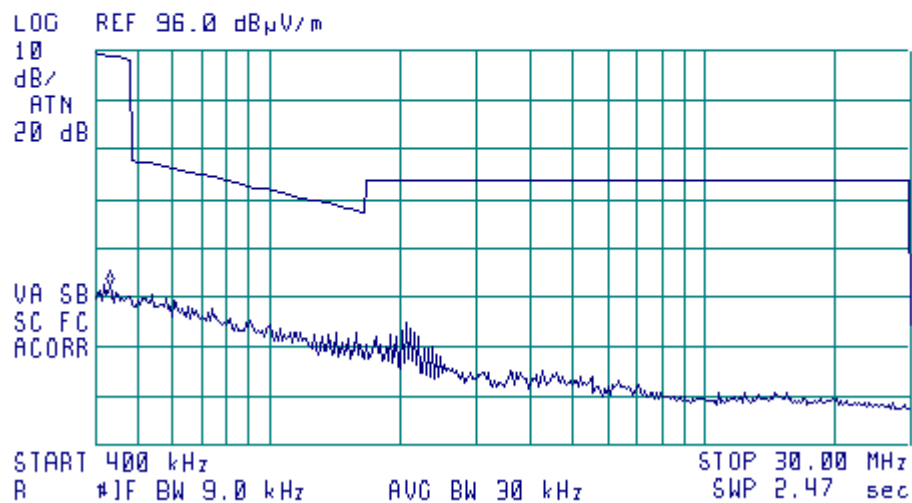




Plot A48

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 903 MHz

16:05:17 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 280.3 MHz
40.01 dB μ V/m

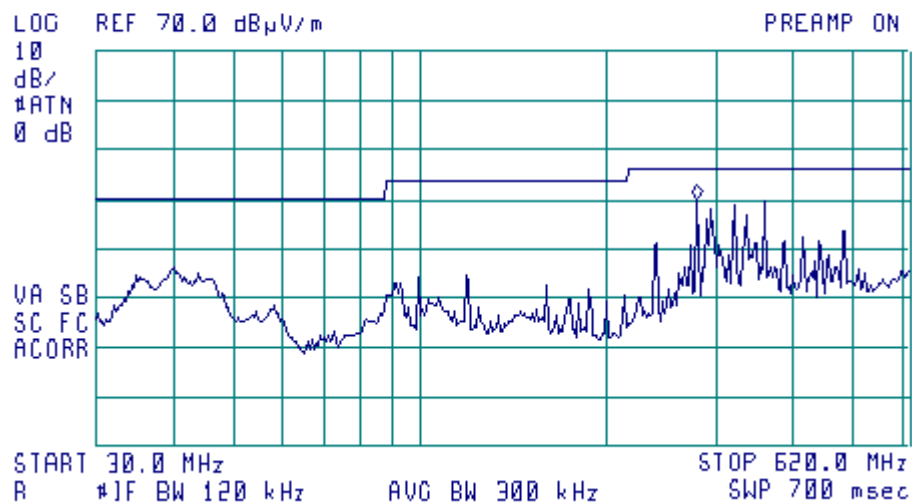




Plot A49

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 903 MHz

16:00:32 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 960.20 MHz
36.78 dB μ V/m

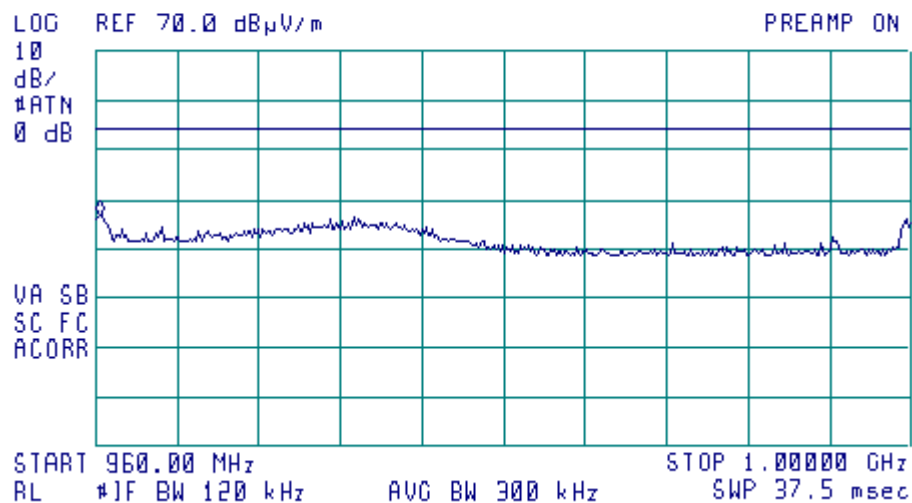




Plot A50

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 903 MHz

13:29:19 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 1.5220 GHz
43.63 dB μ V/m

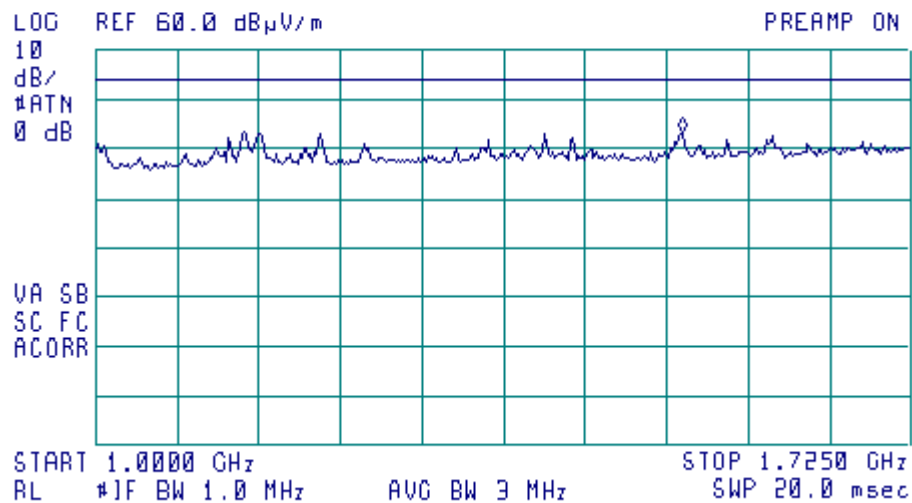




Plot A51

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 903 MHz

13:43:17 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 1.52020 GHz
34.69 dB μ V/m

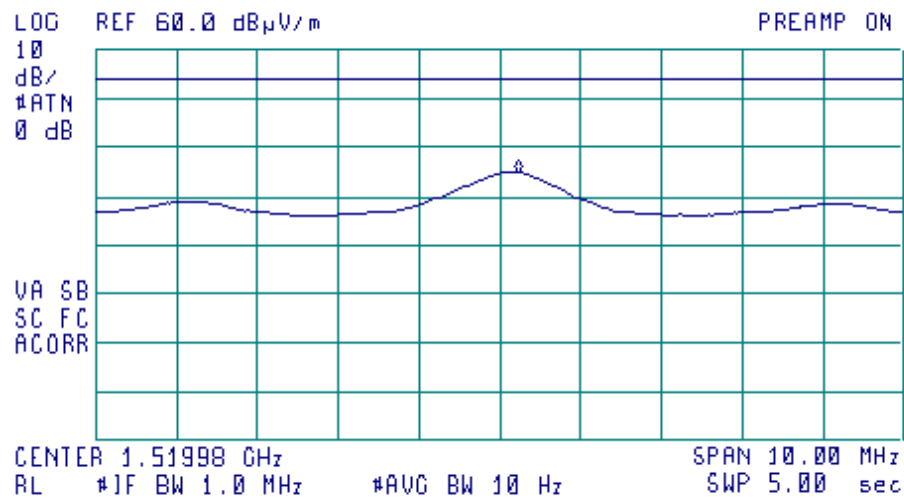

E(peak)=45.3 dBuV/m; Horizontal polarization; H=1.1 m; 208°




Plot A52

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 903 MHz

13:49:20 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 1.14695 GHz
34.33 dB μ V/m

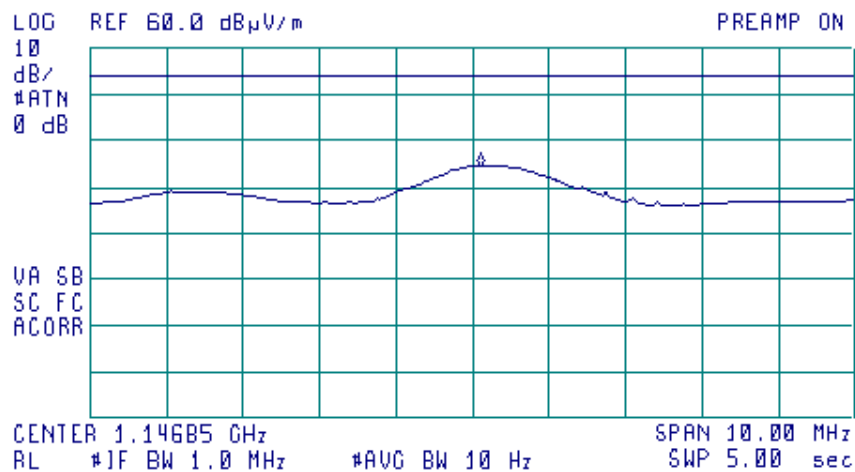

E(peak)=42.3 dB μ V/m; Horizontal polarization; H=1.1 m; 210°




Plot A53

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 903 MHz

13:58:29 FEB 09, 2004


ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 2.8948 GHz
46.61 dB μ V/m

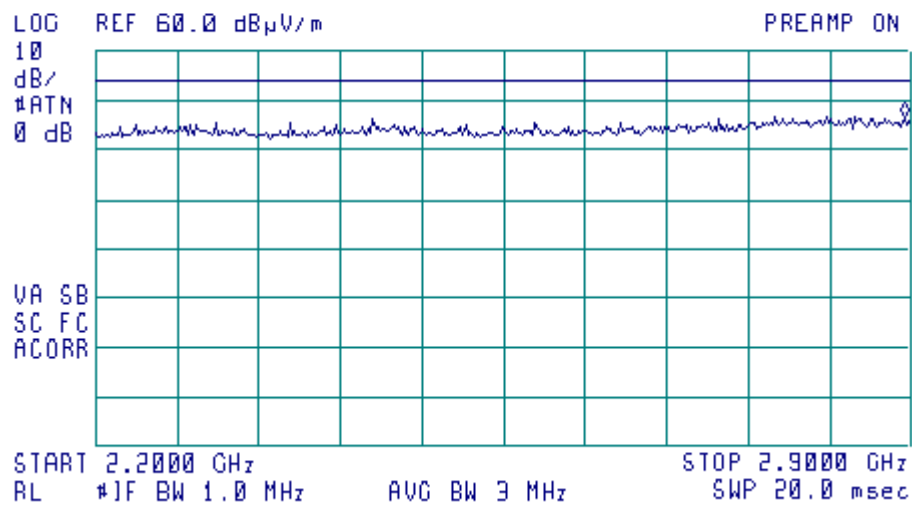



Plot A54


Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 903 MHz

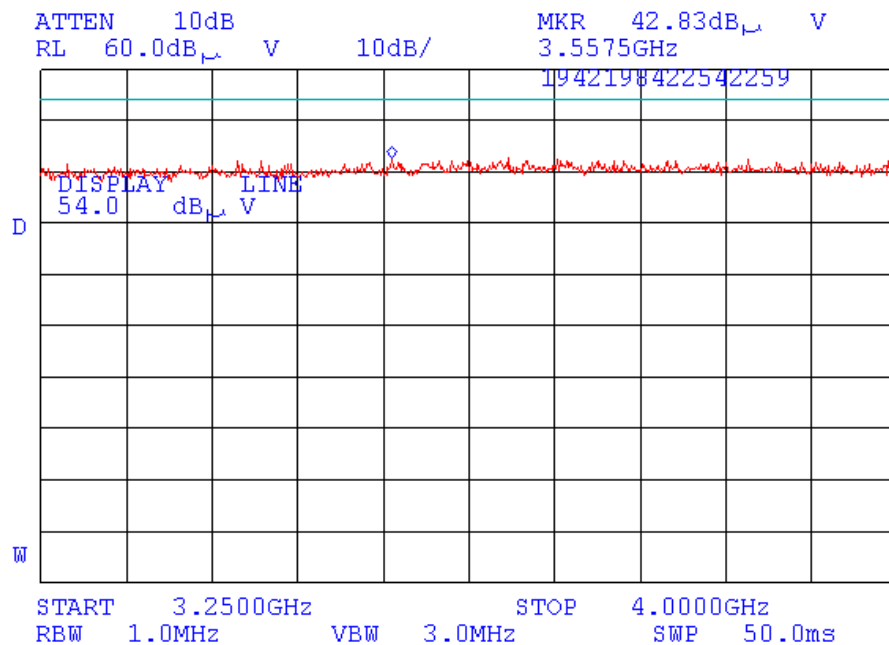



Plot A55


Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 903 MHz

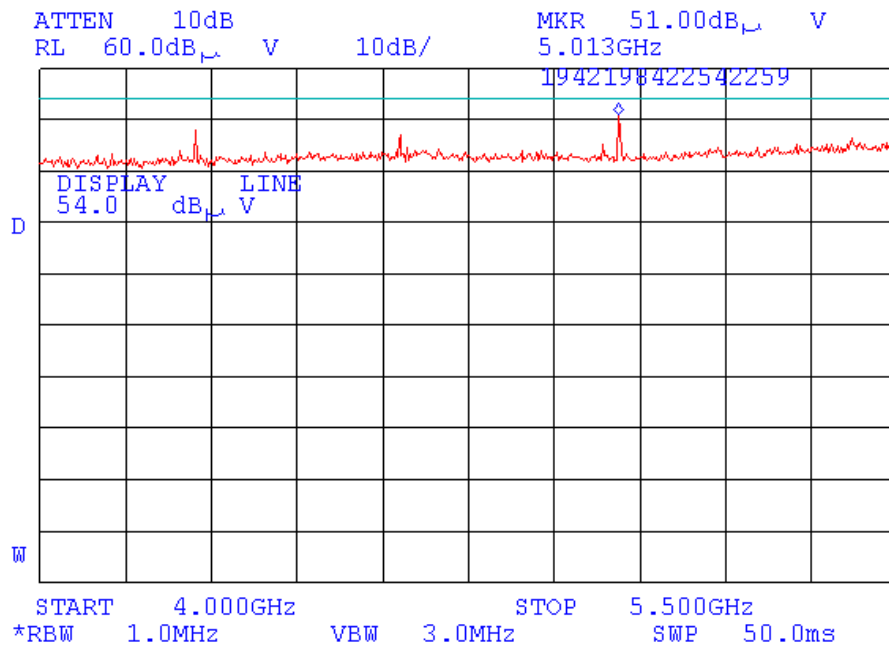



Plot A56

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 903 MHz

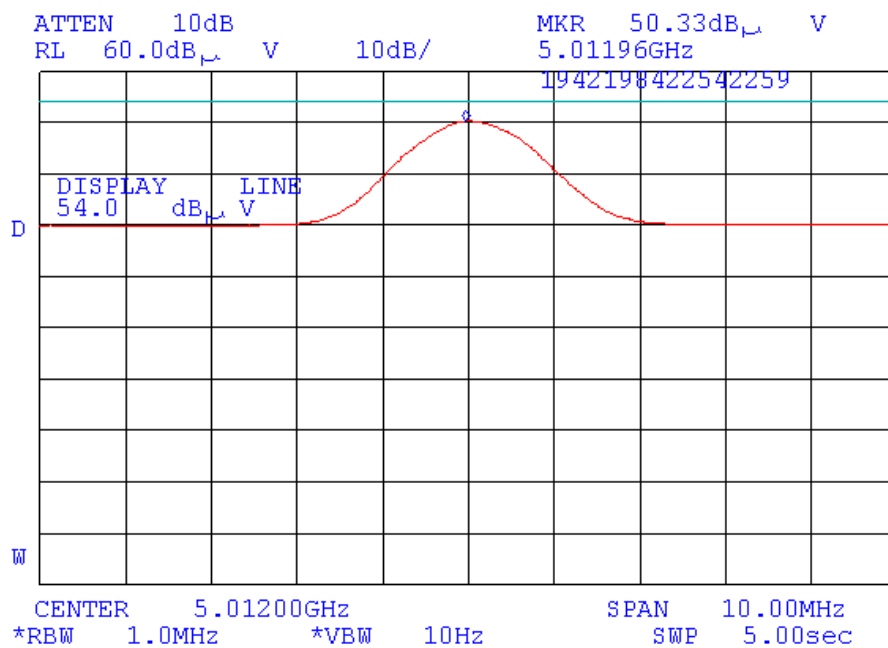

The 4th harmonic of the 1st LO (903+350=1253 MHz) x 4 = 5012 MHz

Peak value.


Average value = 50.33 dB(μ V/m) + Average factor = 50.33 dB(μ V/m) - 11.84 dB = 38.49 dB(μ V/m)

Horizontal polarization



Plot A57

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 903 MHz

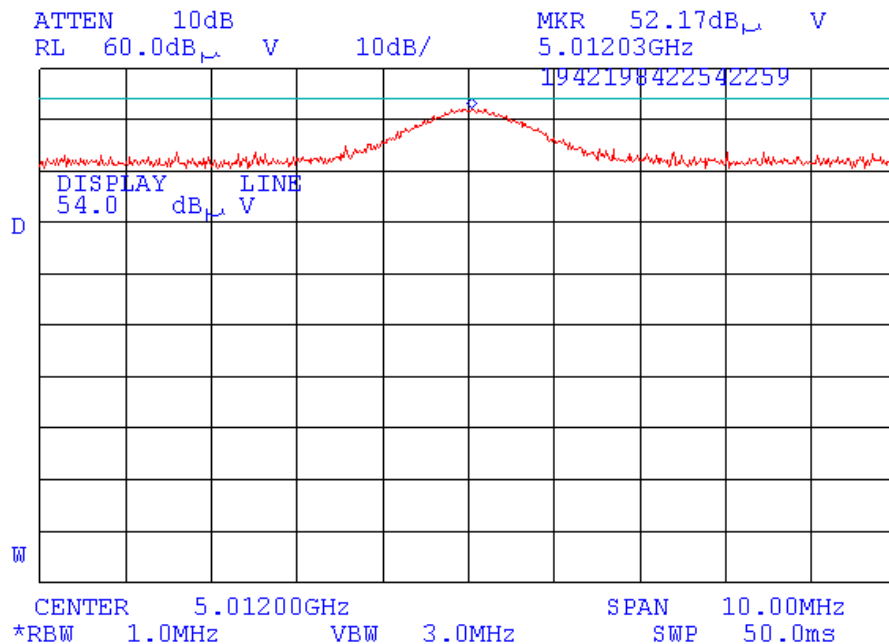


Peak value.



Plot A58

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 903 MHz

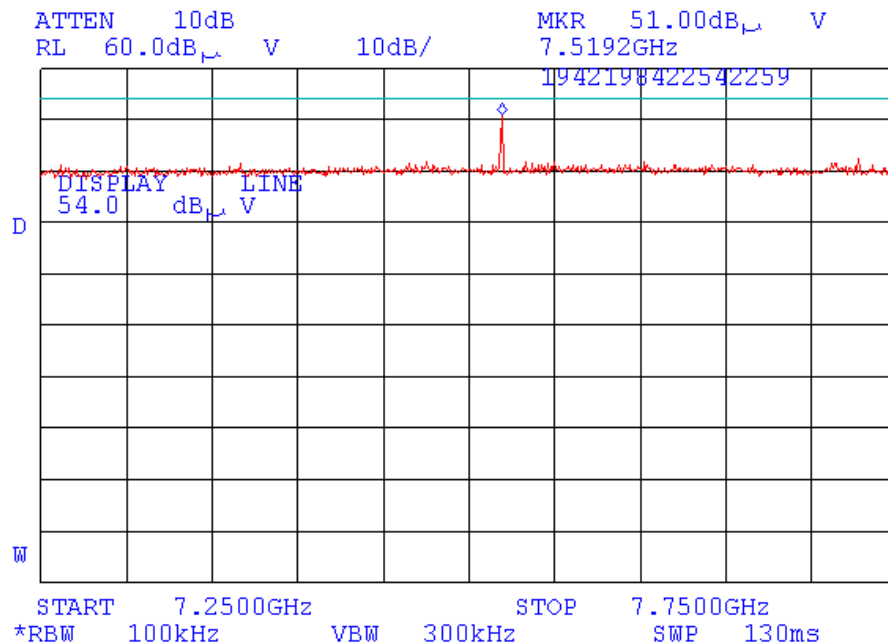


No other spurious except the 6th harmonic of the 1st LO.



Plot A59

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 903 MHz

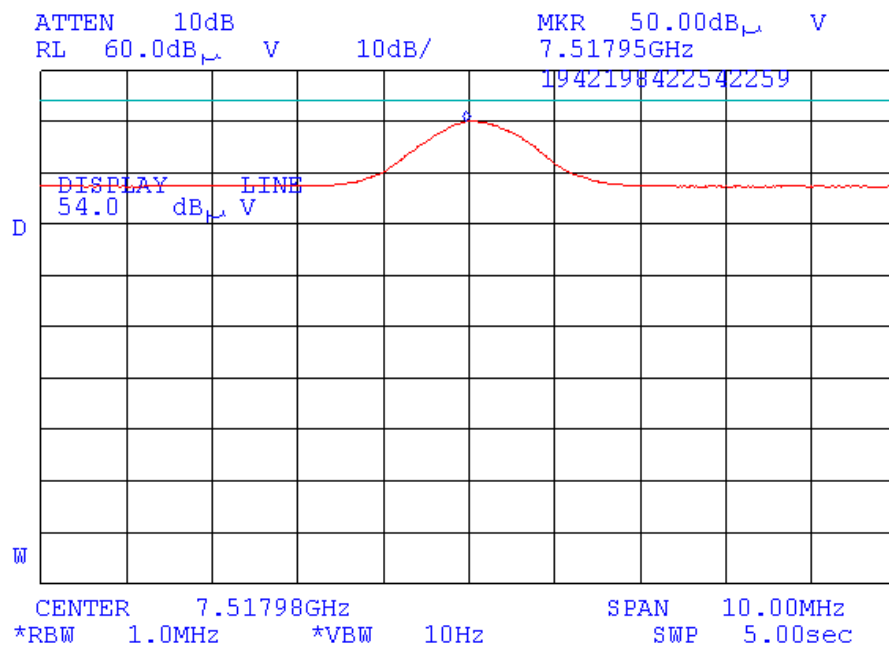

6th harmonic of the 1st LO: (903 MHz+350 MHz) x 6 = 7518 MHz


Average value = 50.0 dB(μ V/m) + Average factor = 50.0 dB(μ V/m) - 11.84 dB = 38.16 dB(μ V/m)

Vertical polarization



Plot A60

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 903 MHz

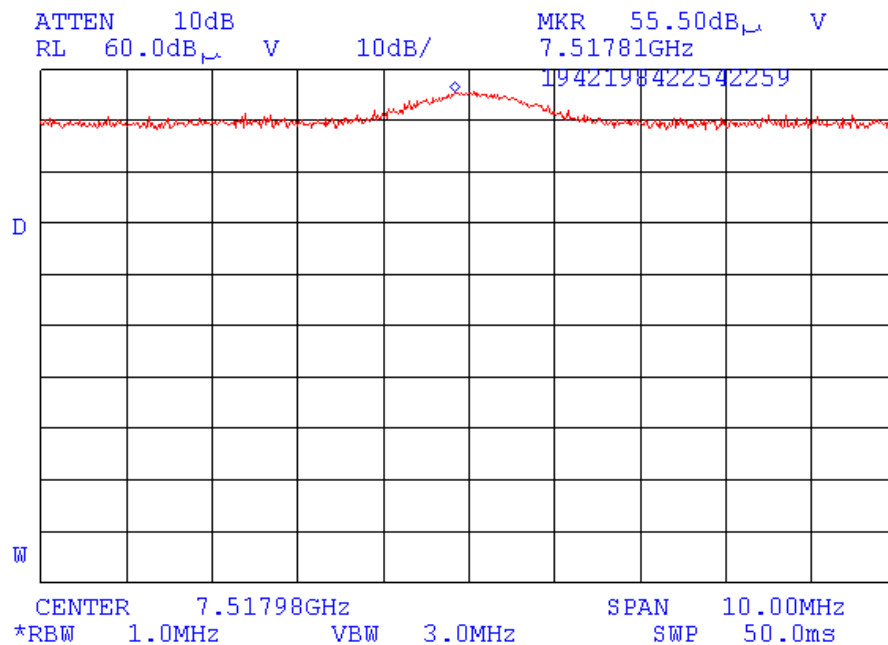


Peak value.



Plot A61

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 903 MHz

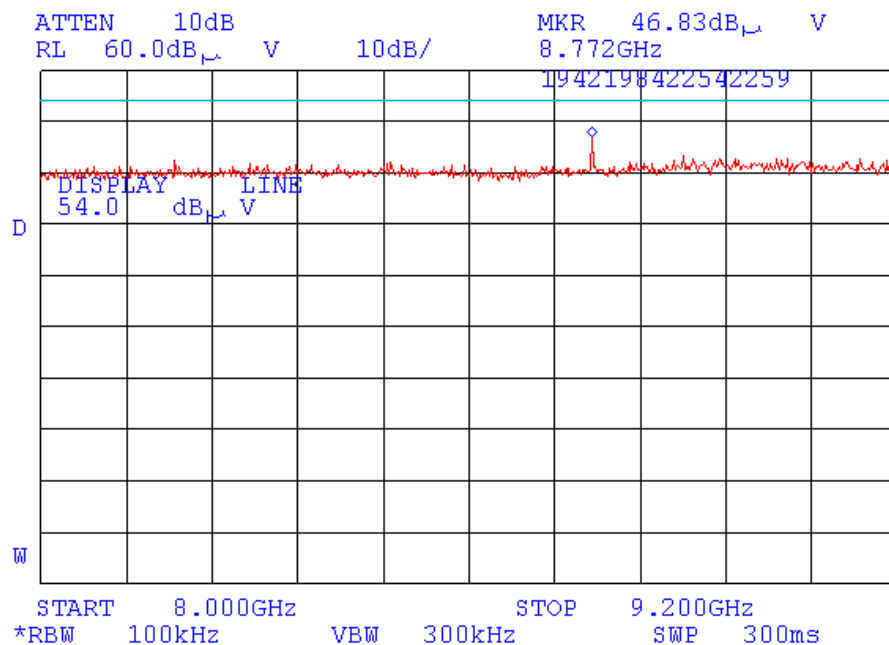

(903 MHz+350 MHz) x 7= 8771 MHz - not restricted band



Plot A62

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 915 MHz

16:27:14 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 93.45 kHz
62.80 dB μ V/m

LOG REF 116 0 dB μ V/m

10

dB/

ATN

40 dB

VA SB

SC FC

ACORR

START 90.00 kHz

R #1F BW 9.0 kHz

AVC BW 30 kHz

STOP 110.00 kHz

SWP 50.0 msec




Plot A63

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 915 MHz

16:29:53 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 440 kHz
48.21 dB μ V/m

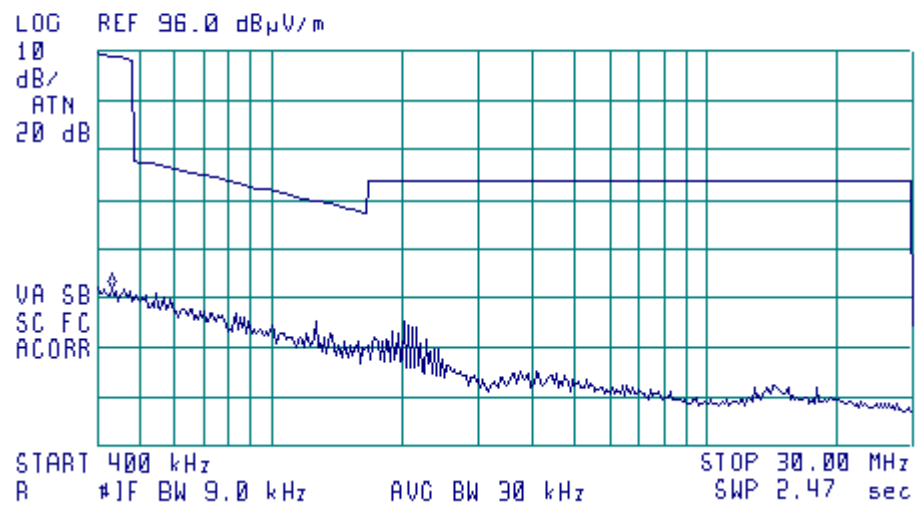




Plot A64

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 915 MHz

15:34:53 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 292.3 MHz
40.33 dB μ V/m

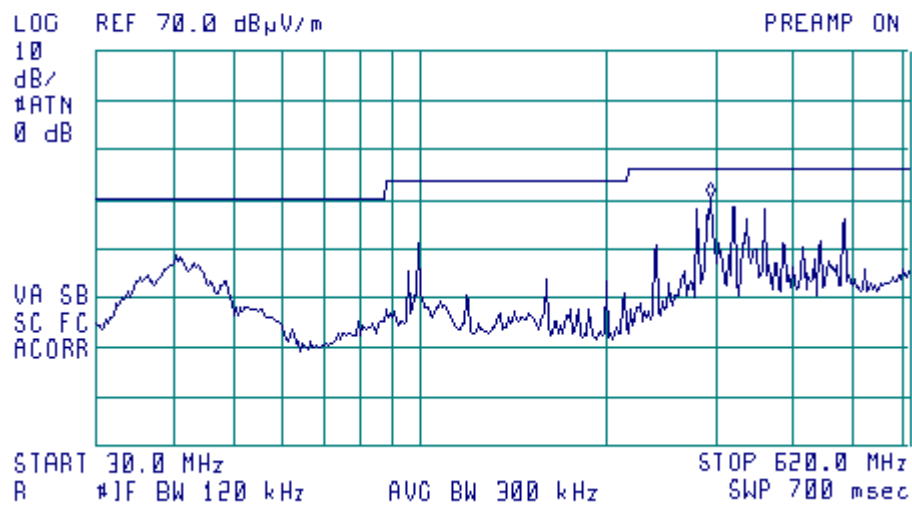




Plot A65

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 915 MHz

15:54:30 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 960.20 MHz
37.37 dB μ V/m

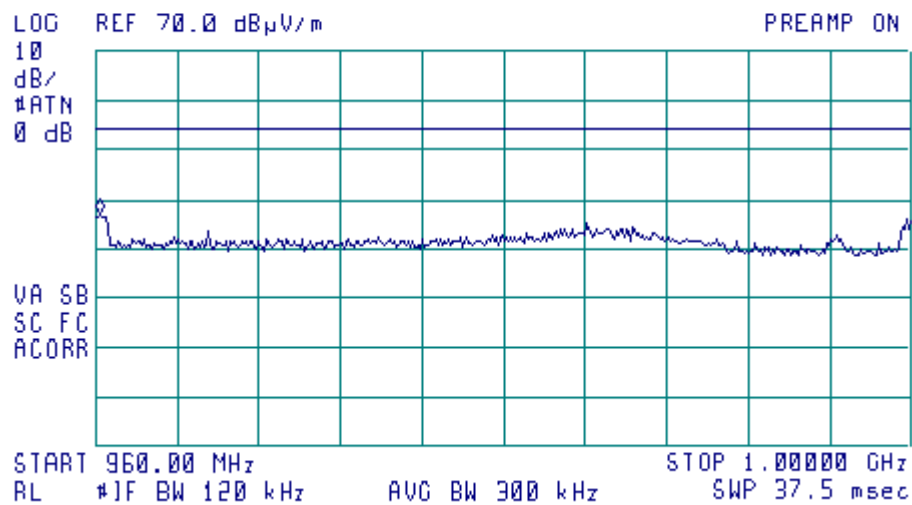




Plot A66

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 915 MHz

14:09:09 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 1.1450 GHz
43.97 dB μ V/m

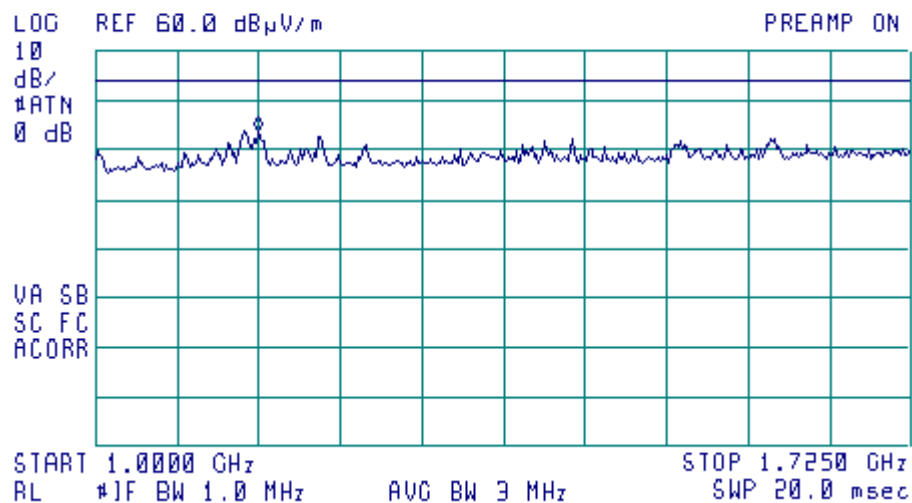




Plot A67

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 915 MHz

14:15:26 FEB 09. 2004


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.8720 GHz
46.50 dB μ V/m

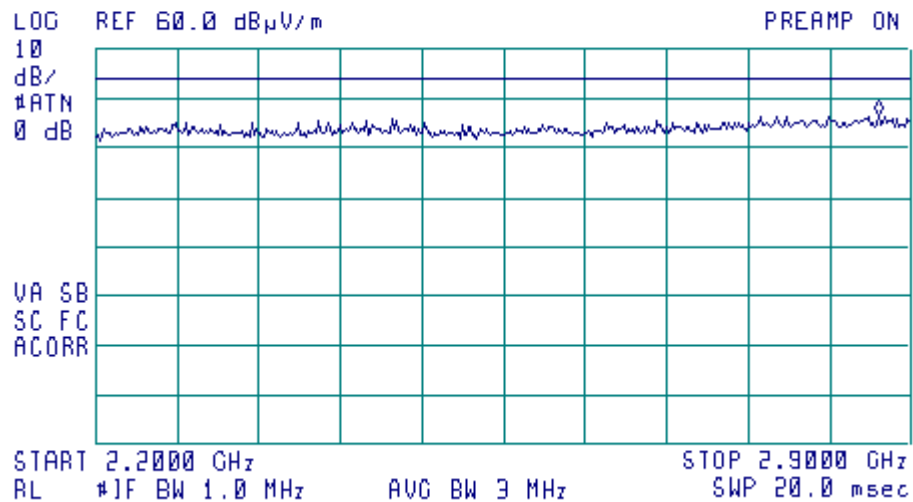



Plot A68


Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 915 MHz

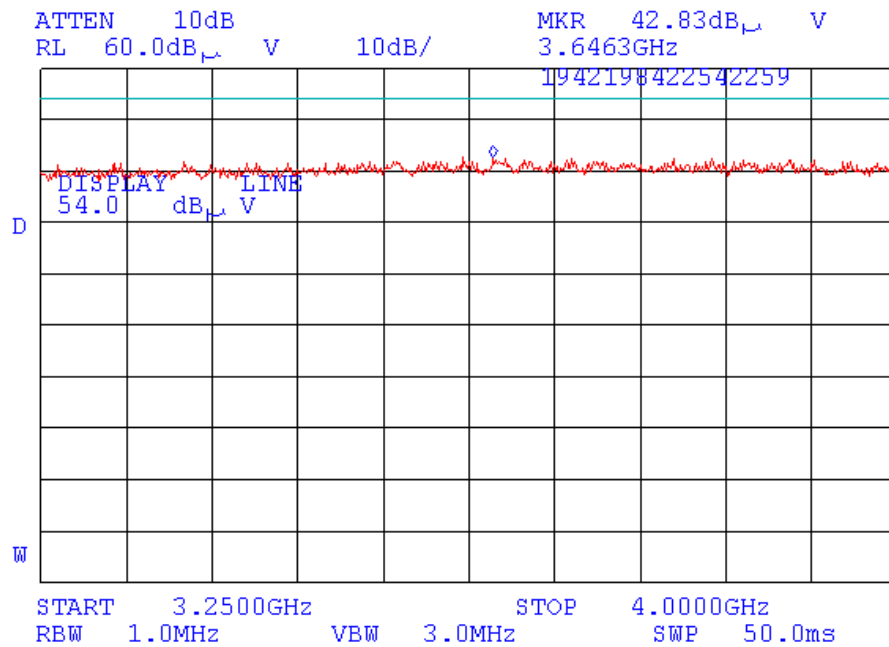



Plot A69


Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 915 MHz

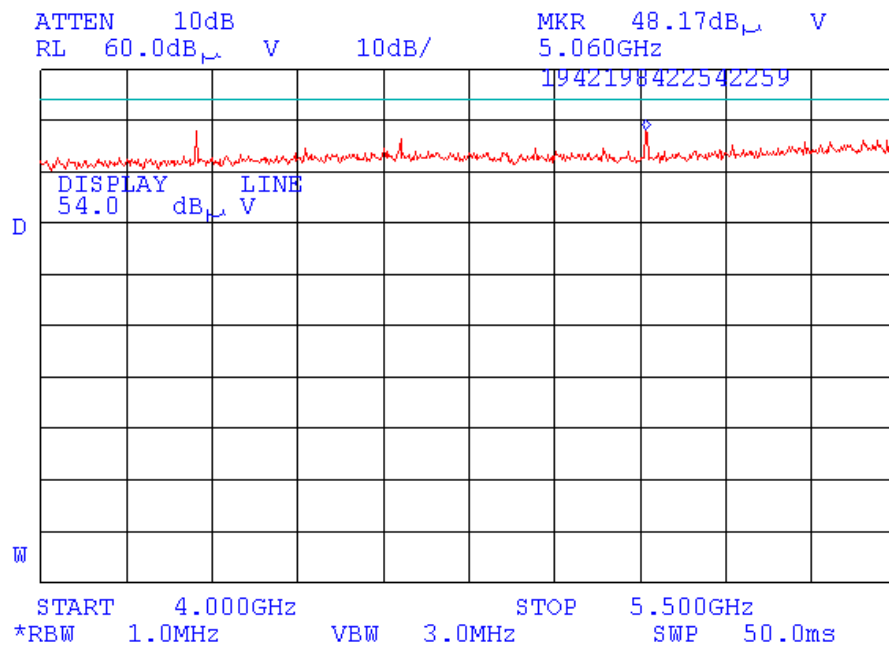



Plot A70

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 915 MHz

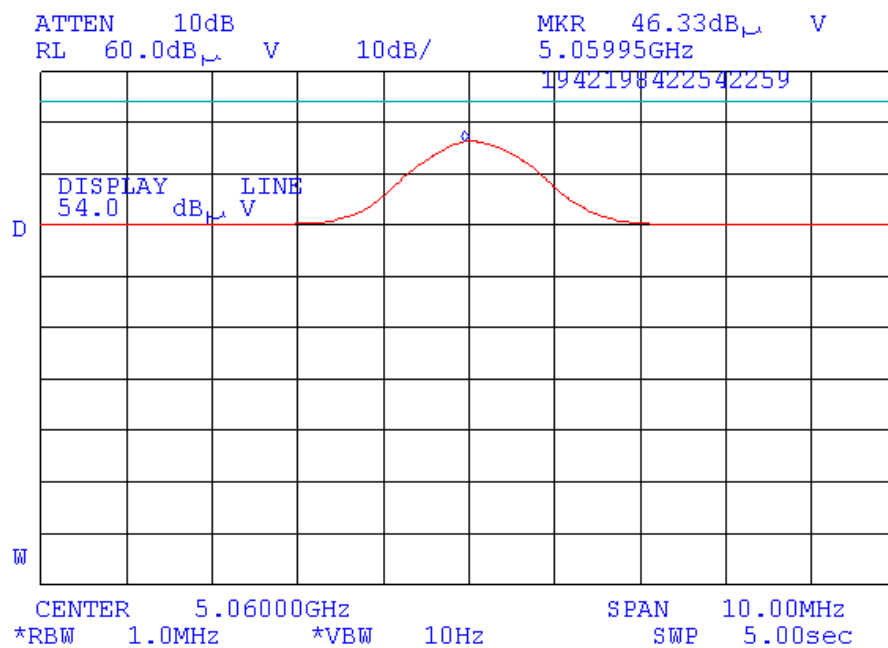

4th harmonic of the 1st LO: (915 MHz+350 MHz) x 4=5060 MHz


Average value=46.33 dB(μ V/m) + Average factor = 46.33 dB(μ V/m) - 11.84 dB = 34.49 dB(μ V/m)

Horizontal polarization



Plot A71

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 915 MHz

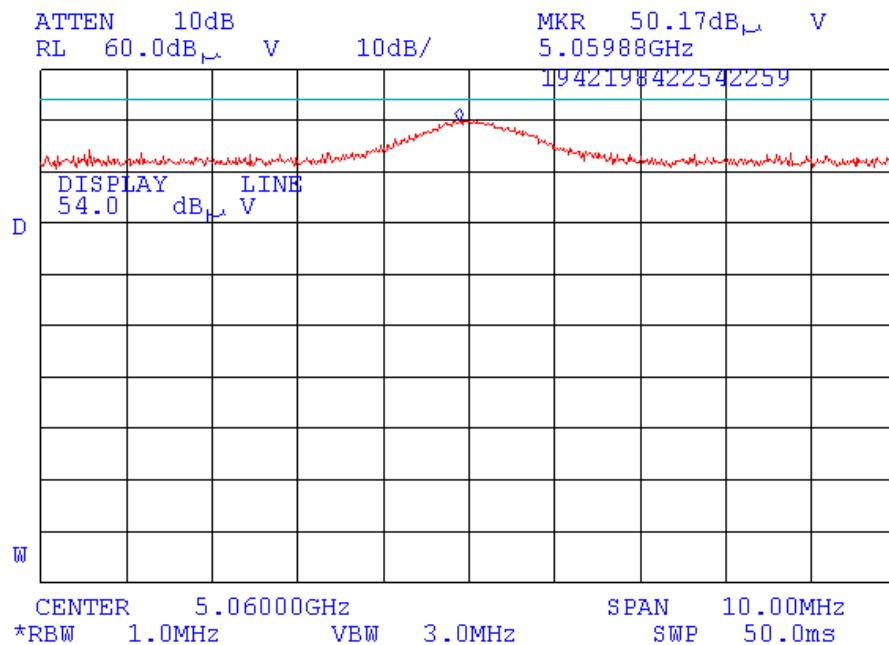


Peak value.



Plot A72


Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 915 MHz

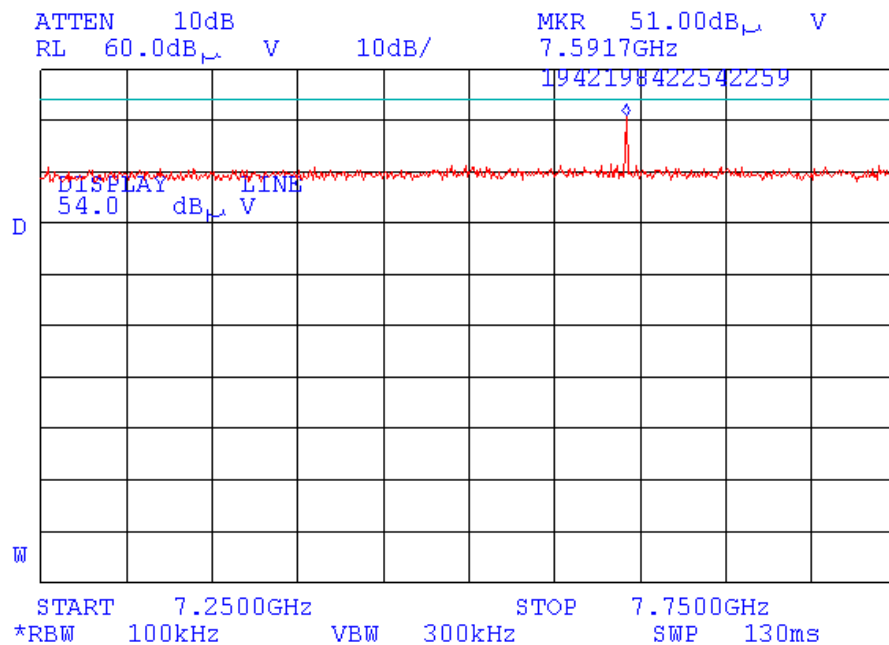



Plot A73

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 915 MHz

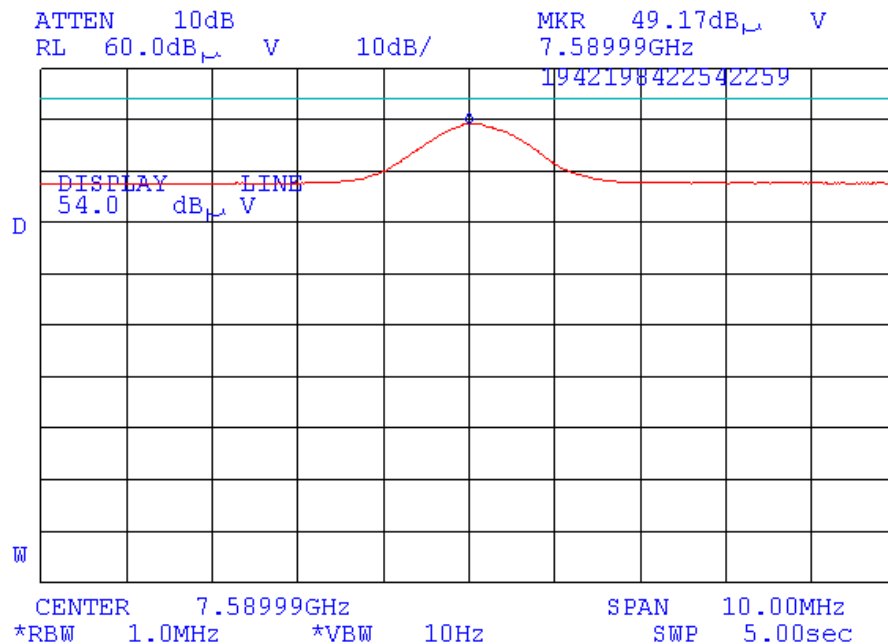

The 6th harmonic of the 1st LO: (915+350=1265 MHz) x 6=7590 MHz


Test result: measured value + average factor = 49.17 dB(μ V/m) – 11.84 dB = 37.33 dB(μ V/m)

Vertical polarization



Plot A74

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 915 MHz

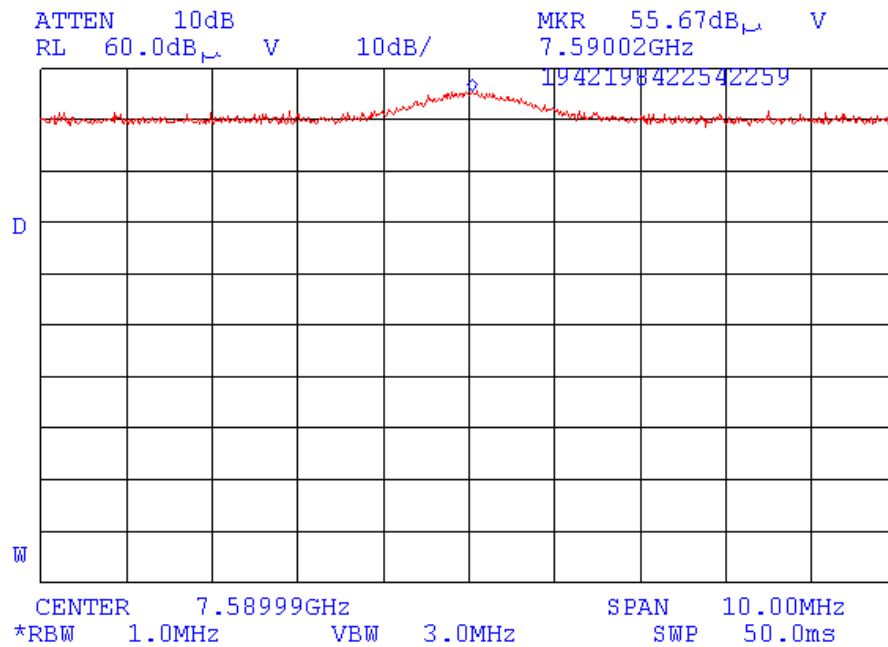


Peak value.



Plot A75

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 915 MHz

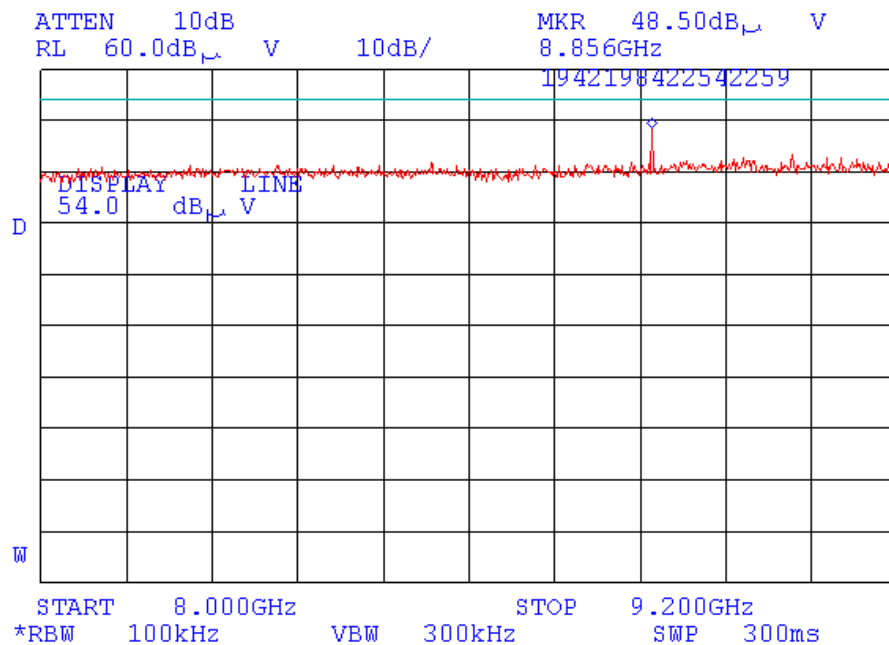

(915 MHz+350 MHz) (1st LO) x 7=8855 MHz - not restricted band



Plot A76

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 927 MHz

16:35:27 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 90.50 kHz
62.83 dB μ V/m

LOG REF 116 0 dB μ V/m

10

dB/

ATN

40 dB

VA SB

SC FC

ACORR

START 90.00 kHz

RL #1F BW 9.0 kHz

AVC BW 30 kHz

STOP 110.00 kHz

SWP 50.0 msec




Plot A77

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 927 MHz

16:32:50 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 410 kHz
47.96 dB μ V/m

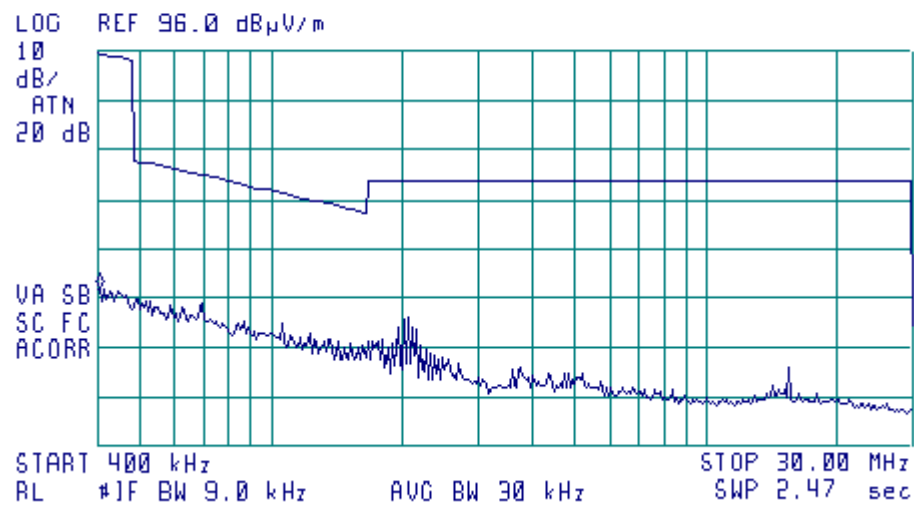




Plot A78

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 927 MHz

15:43:03 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 280.3 MHz
40.78 dB μ V/m

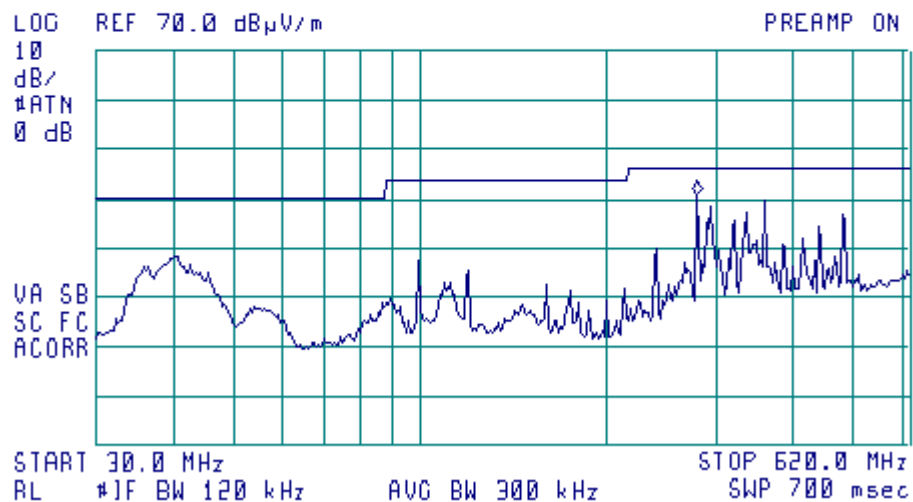




Plot A79

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 927 MHz

15:47:14 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 960.10 MHz
36.92 dB μ V/m

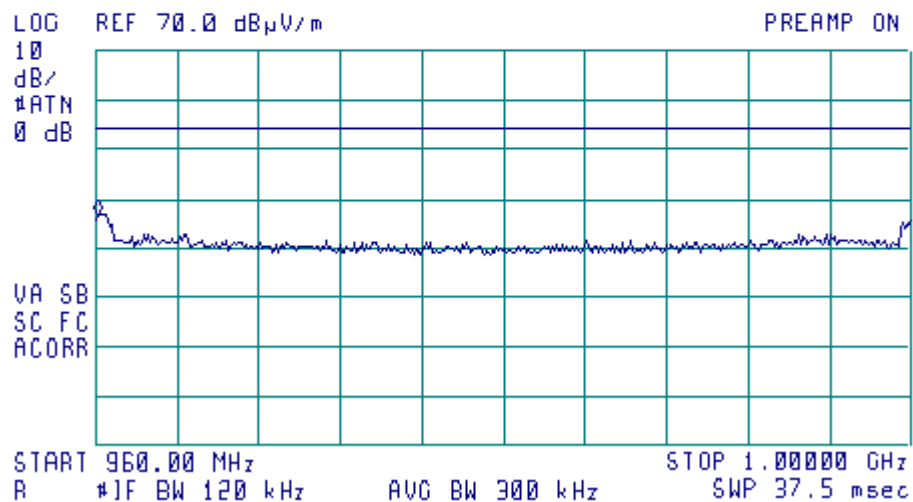




Plot A80

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 927 MHz

14:34:20 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 1.1450 GHz
43.56 dB μ V/m

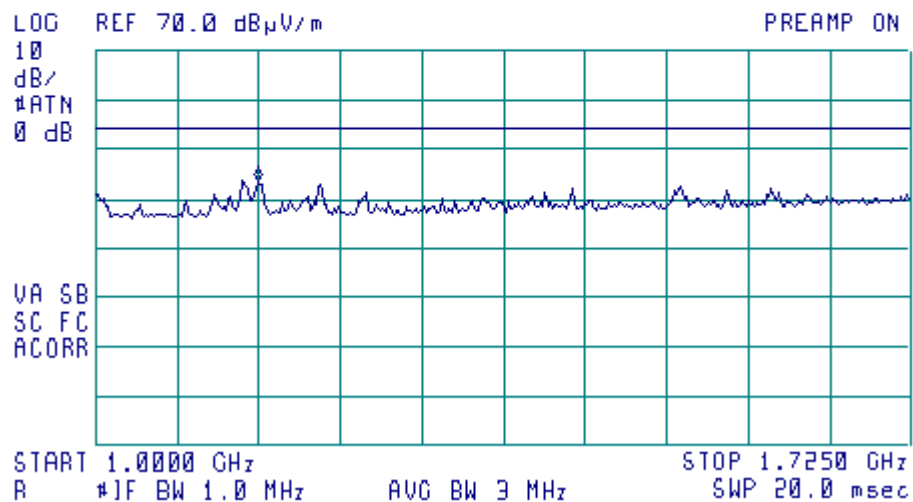




Plot A81

Radiated spurious emission measurements in the anechoic chamber in restricted bands,
carrier frequency 927 MHz

14:29:13 FEB 09, 2004


ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 2.8598 GHz
46.35 dB μ V/m

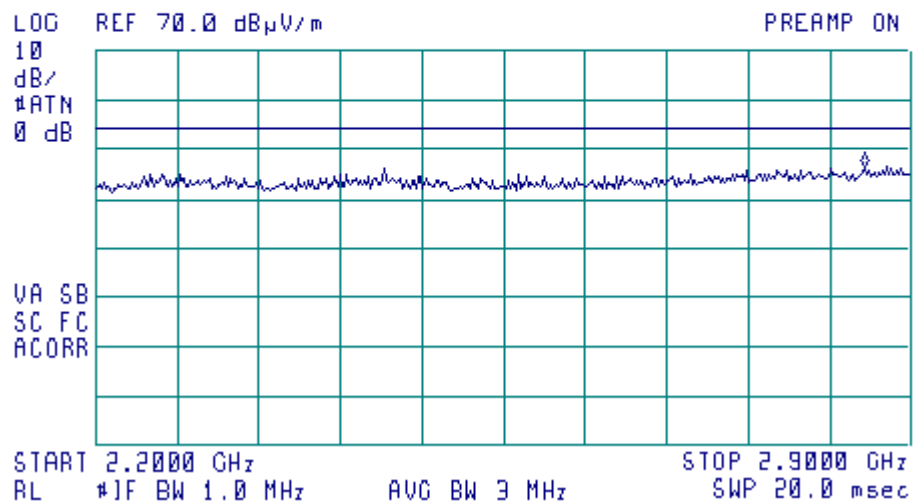



Plot A82


Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 927 MHz

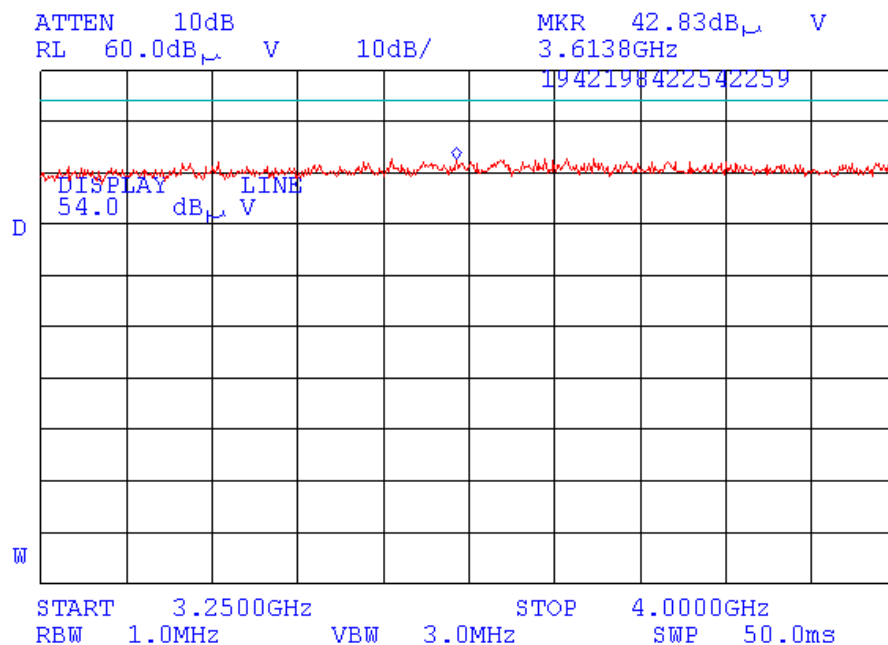



Plot A83


Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 927 MHz

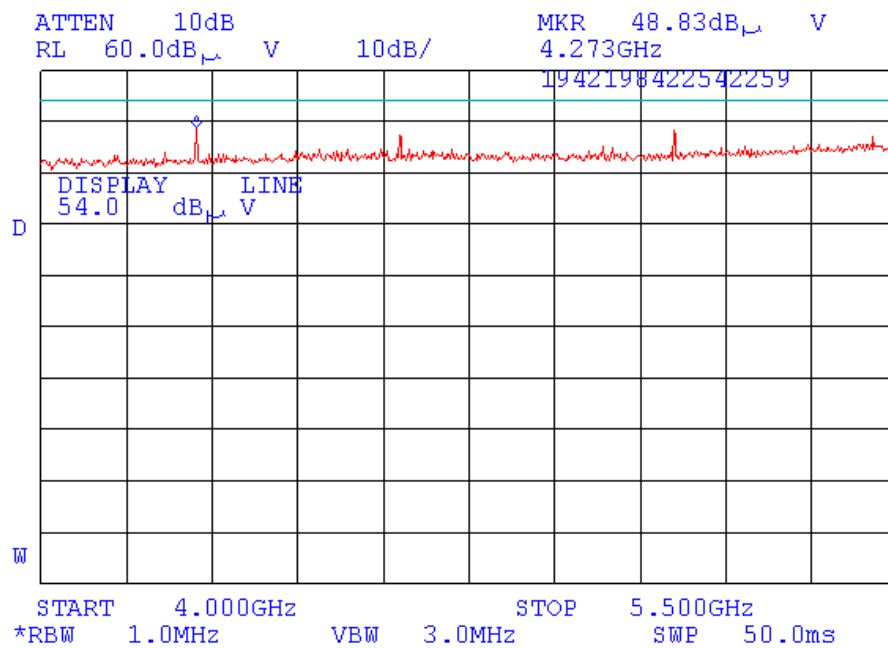



Plot A84

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 927 MHz

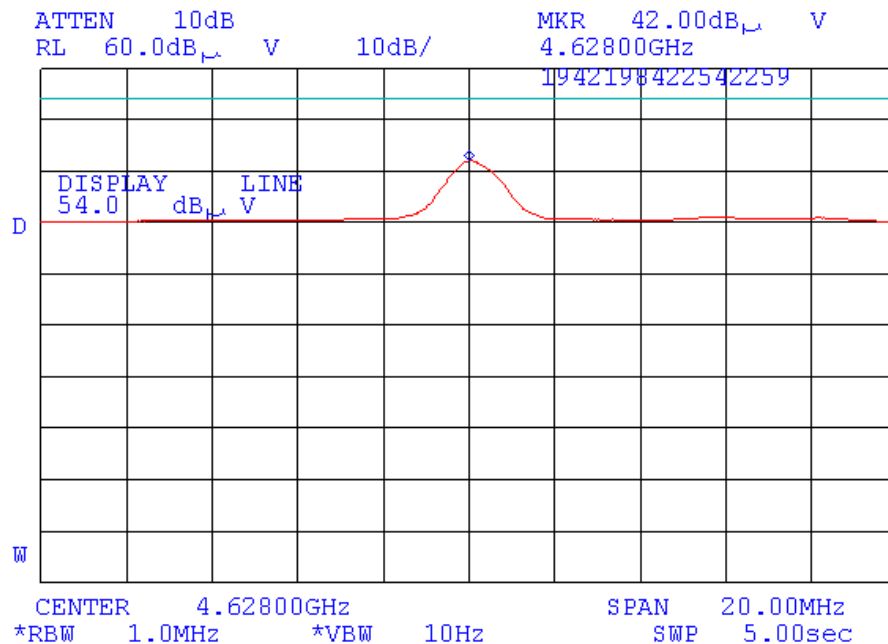

13th harmonic of 2nd LO: 356 MHz x 13 = 4628 MHz

Average value


No average factor applicable.

Horizontal polarization



Plot A85

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 927 MHz

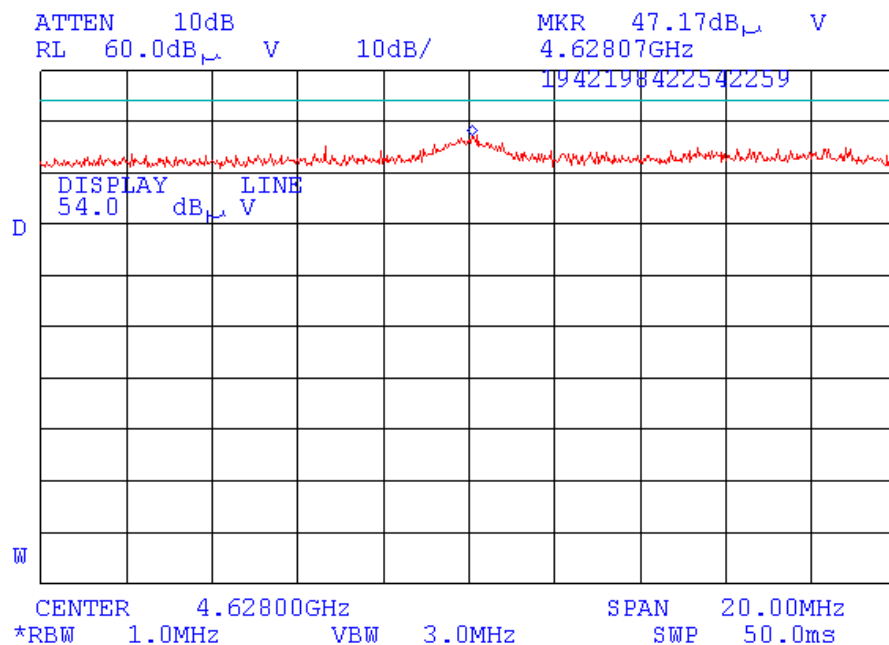


Peak value



Plot A86

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 927 MHz

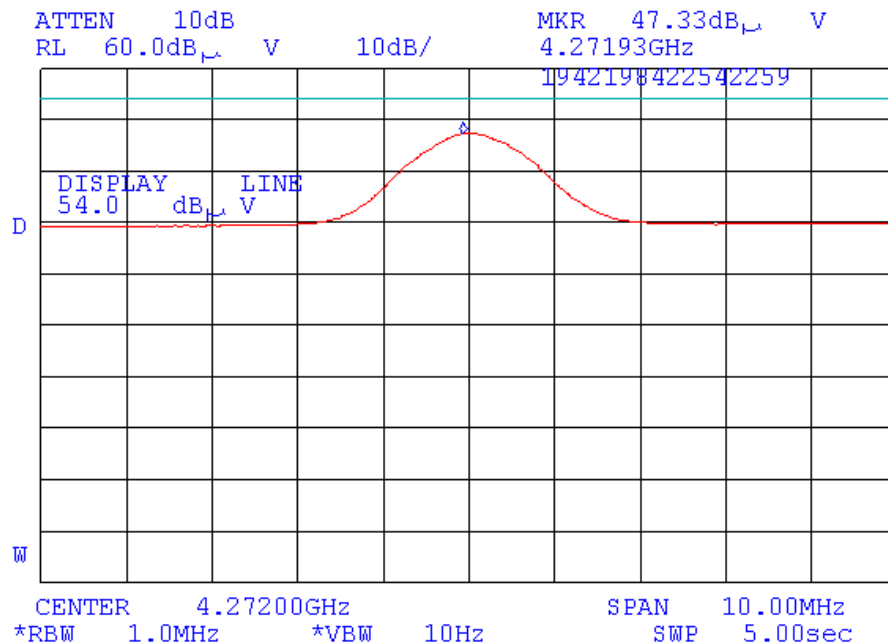

12th harmonic of 2nd LO: 356 MHz x 12 = 4272 MHz

Average value


No average factor applicable

Horizontal polarization



Plot A87

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 927 MHz

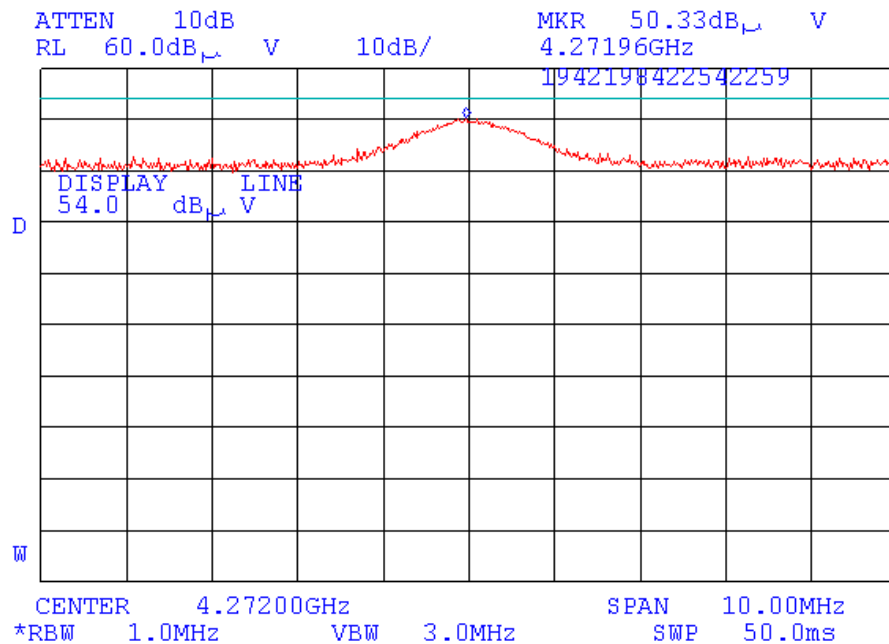


Peak value



Plot A88

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 927 MHz

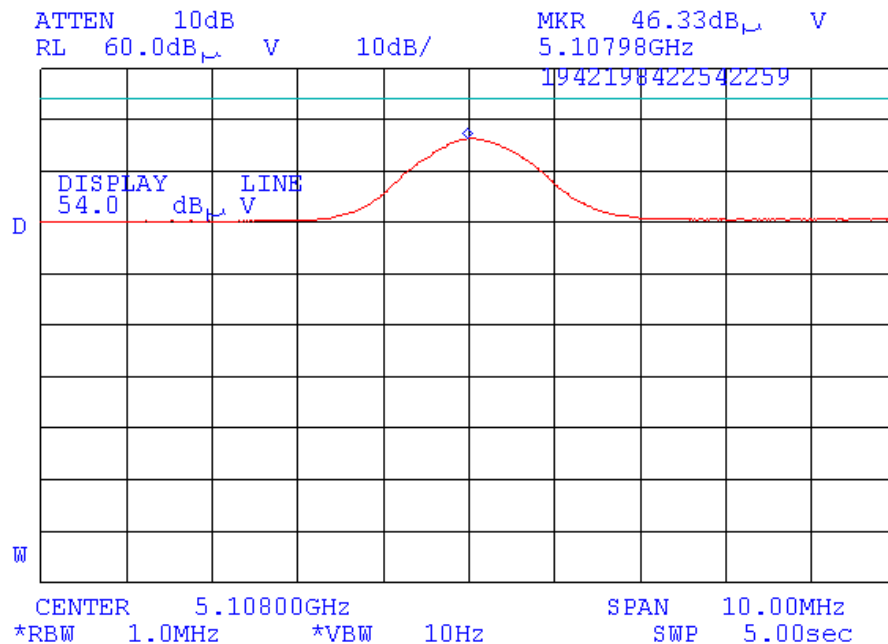

4th harmonic of the 1st LO: (927 MHz+350 MHz) x 4 = 5108 MHz


Average value = 46.33 dB(μV/m) + Average factor = 46.33 dB(μV/m) - 11.84 dB = 34.49 dB(μV/m)

Horizontal polarization



Plot A89

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 927 MHz

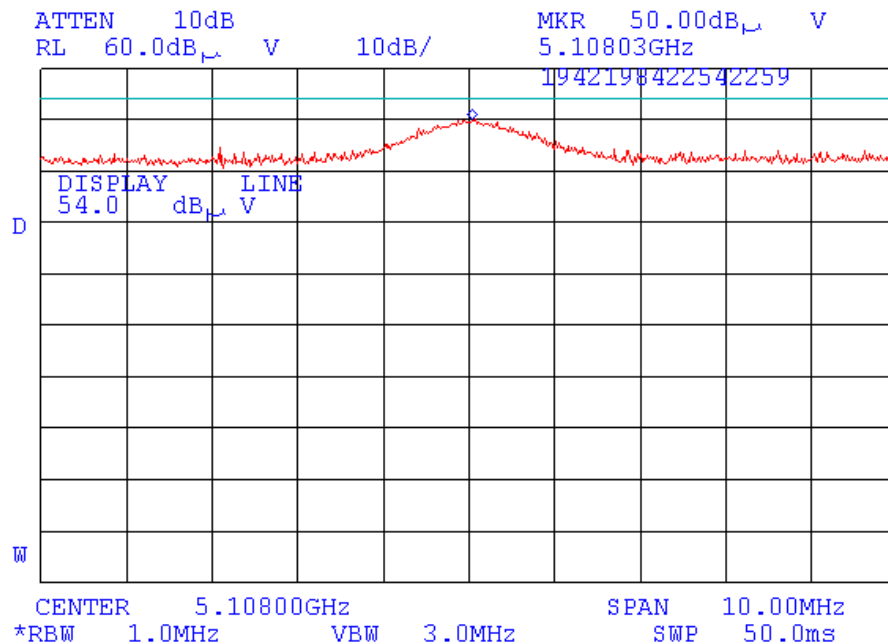


Peak value



Plot A90


Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 927 MHz

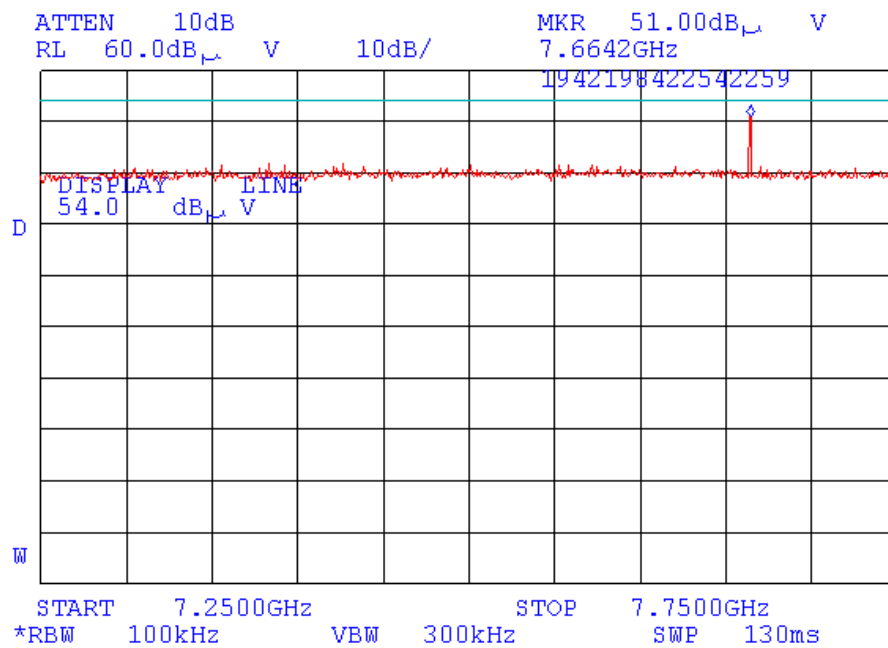



Plot A91

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 927 MHz

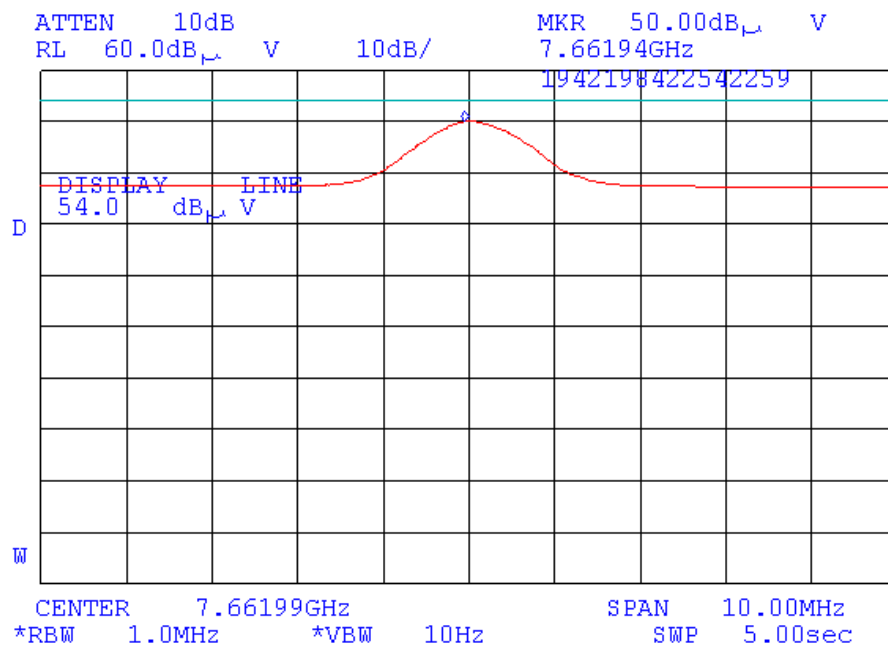

6th harmonic of the 1st LO: (927 MHz+350 MHz) x 6 = 7662 MHz


Average value = 50.0 dB(μ V/m) + Average factor = 50.0 dB(μ V/m) - 11.84 dB = 38.16 dB(μ V/m)

Vertical polarization



Plot A92

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 927 MHz

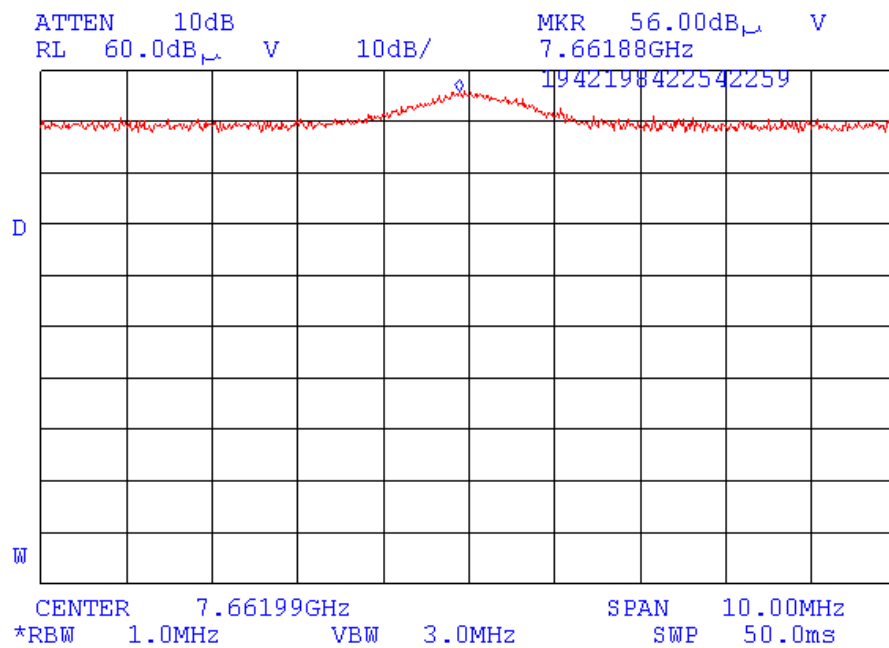


Peak value



Plot A93

Radiated spurious emission measurements at the OATS in restricted bands,
carrier frequency 927 MHz

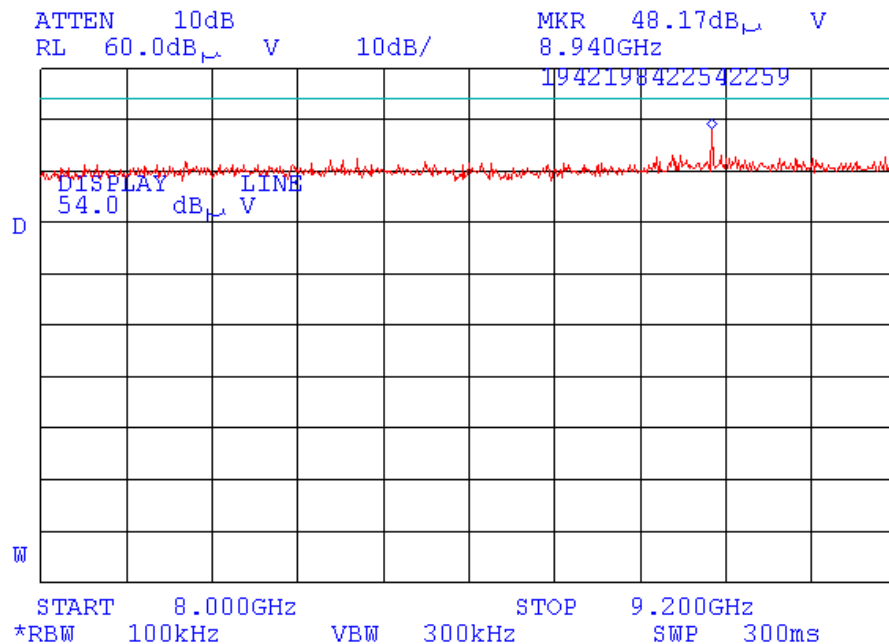

7th harmonic of 1st LO (927 MHz+350 MHz) x 7 = 8939 MHz-not restricted band




Plot A94

Radiated emission measurements in the anechoic chamber in receive mode

10:48:47 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 360.2 MHz
43.99 dB μ V/m

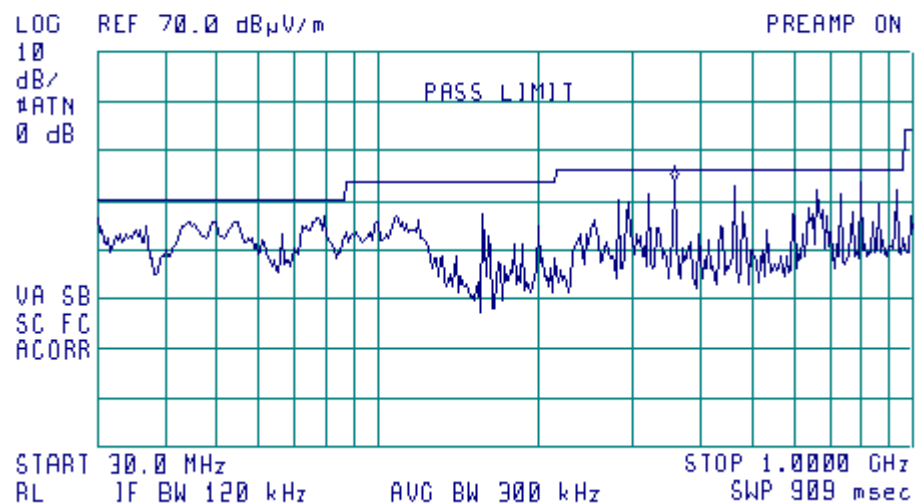




Plot A95

Radiated emission measurements in the anechoic chamber in receive mode

12:04:34 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.881 GHz
47.35 dB μ V/m

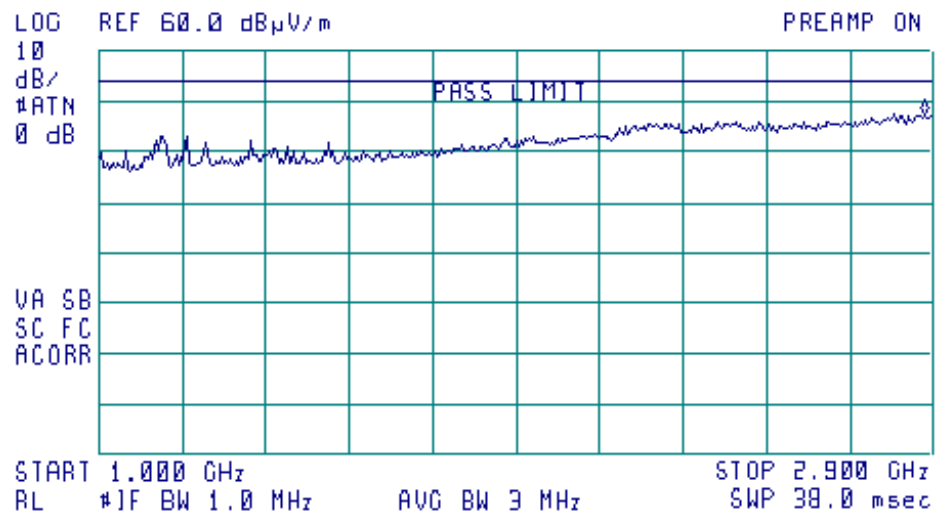




Plot A96

Radiated emission measurements in the anechoic chamber in receive mode

12:18:31 FEB 09, 2004

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 4.280 GHz
48.69 dB μ V/m

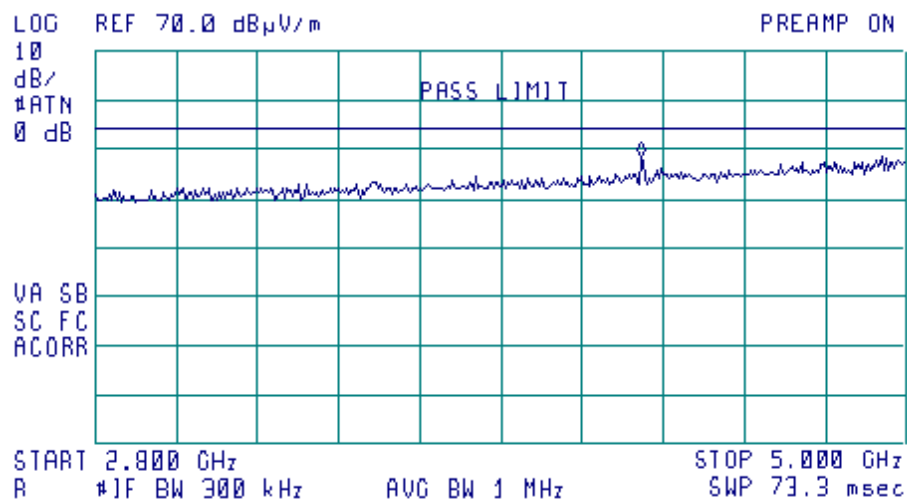



Plot A97

Conducted emission measurements at AC power line in receive mode

Line identification: Line 1
Limit: Quasi-peak, average

12:05:41 OCT 19, 2003

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.04 MHz
45.62 dB μ V/m

LOG REF 70.4 dB μ V/m

10
dB/
ATN
10 dB

PASS LIMIT

VA SB
SC FC
ACORR

START 150 kHz STOP 30.00 MHz
R #IF BW 9.0 kHz AVG BW 30 kHz SWP 2.49 sec



Plot A98

Conducted emission measurements at AC power line in receive mode

Line identification: Line 2
Limit: Quasi-peak, average


12:22:42 OCT 19, 2003

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 4.88 MHz
49.67 dB μ V

LOG REF 70.4 dB μ V

10
dB/
ATN
10 dB

VA SB
SC FC
ACORR

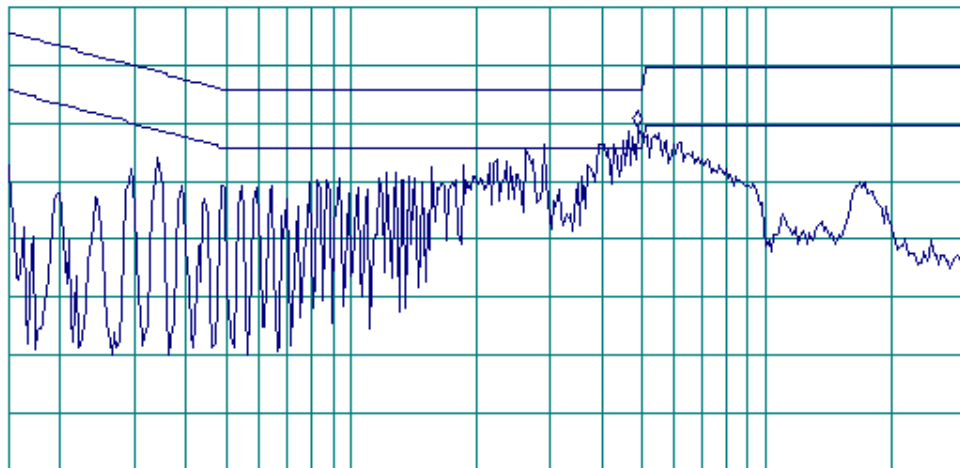

START 150 kHz STOP 30.00 MHz
RL #IF BW 9.0 kHz AVG BW 30 kHz SWP 2.49 sec



Plot A99

Conducted emission measurements at AC power line in transmit mode

Line identification: Line 1
Limit: Quasi-peak, average

 12:45:12 OCT 19, 2003

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 4.88 MHz
49.57 dB μ V

LOG REF 70.4 dB μ V

10
dB/
ATN
10 dB

VA SB
SC FC
ACORR

START 150 kHz STOP 30.00 MHz
RL IF BW 9.0 kHz AVG BW 30 kHz SWP 2.49 sec




Plot A100

Conducted emission measurements at AC power line in transmit mode

Line identification: Line 2
Limit: Quasi-peak, average

(hp) 12:37:15 OCT 19, 2003

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 14.99 MHz
30.55 dB μ V

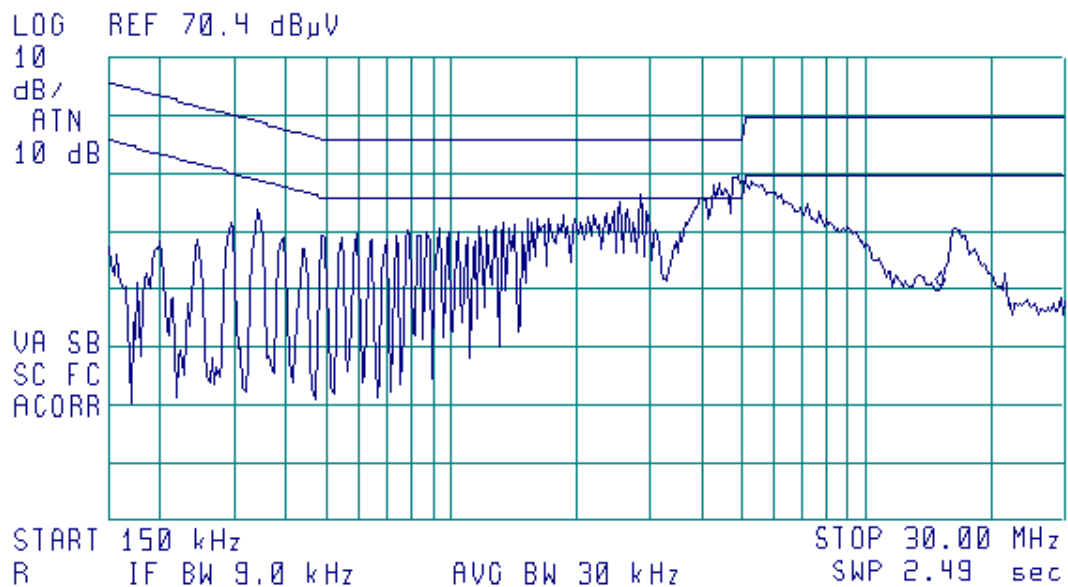



Appendix B Test equipment used for tests

HL Serial No.	Description	Manufacturer information			Due calibration Month/ year
		Name	Model No.	Serial No.	
0038	Antenna Mast, 1-4 m	Hermon Labs	AM-1	028	2/05 check
0091	Position controller for antenna mast + turntable, OFTS	Hermon Labs	CRL-2	091	4/04 check
0287	Turntable, motorized diameter, 2 m	Hermon Labs	TMD-2	042	11/04 check
0446	Active loop antenna 10 kHz-30 MHz	Electro-Mechanics	6502	2857	10/04
0447	LISN, 16/2, 300 V RMS	Hermon Labs	LISN 16-1	447	11/04
0465	Anechoic chamber 9 (L) x 6.5 (W) x 5.5 (H) m	Hermon Labs	AC-1	023	10/04
0466	Shielded room 3 (L) x 3 (W) x 2.4 (H) m	Hermon Labs	SR-1	024	11/04 check
0521	Spectrum analyzer with RF filter section (EMI receiver 9 kHz - 6.5 GHz)	Hewlett Packard	8546A	0319	7/04
0589	Cable coaxial, GORE A2POL118.2, 3m	Hermon Labs	GORE-3	589	11/04
0592	Position controller	Hermon Labs	L2-SR3000	100	5/04 check
0593	Antenna Mast, 1-4 m/ 1-6 m Pneumatic	Hermon Labs	AM-F1	101	2/05 check
0594	Turntable for Anechoic Chamber, flush mounted, d=1.2 m, pneumatic	Hermon Labs	WDC1	102	1/05 check
0604	Antenna biconilog log-periodic/T bow- tie, 26 - 2000 MHz	EMCO	3141	9611-1011	1/05
0787	Transient limiter	Hewlett Packard	11947A-8ZE	3107A01877	11/04
1003	Cable coaxial, M17/164, 10 m	Hermon Labs	C17164-10	161	11/04
1004	Cable coaxial, ANDREW PSWJ4, 6 m	Hermon Labs	ANDREW-6	163	12/04
1097	Attenuator, 50 Ohm, 2 W, DC to 8 GHz, 20 dB	Midwest Microwave	0793-20-NN- 07	1097	1/05
1205	One phase voltage regulator, 2kVA, 0- 250V	Hermon Labs	TDGC-2	109	6/04 check
1424	Spectrum analyzer, 30 Hz - 40 GHz	Agilent Technologies	8564EC	3946A00219	8/04



HL Serial No.	Description	Manufacturer information			Due calibration Month/ year
		Name	Model No.	Serial No.	
1503	Cable RF, 6 m	Belden	M17/167 MIL-C-17	1503	9/04 check
1650	Attenuators set (2, 3, 5, 20 dB), DC – 18 GHz	M/A –COM	2082	1650	3/04
1651	Attenuators set (2, 3, 5, 20 dB), DC – 18 GHz	M/A –COM	2082	1651	3/04
1942	Cable 18 GHz, 4 m, blue	Rhophase Microwave Ltd	SPS-1803A-4000-NPS	T4658	10/04
1947	Cable 18 GHz, 6.5 m, blue	Rhophase Microwave Ltd	NPS-1803A-6500-NPS	T4974	10/04
1984	Antenna, double ridged waveguide horn, 1-18 GHz, 300W, N-type	EMC Test Systems	3115	9911-5964	3/04
2009	Cable RF, 8 m	Alpha Wire	RG-214	2009	12/04
2254	Cable 40GHz, 0.8 m, blue	Rhophase Microwave Limited	KPS-1503A-800-KPS	W4907	11/04
2259	Amplifier low noise 2-20 GHz	Sophia Wireless	LNA0220-C	0223	11/04
2399	Cable 40 GHz, 1.5 m, blue	Rhophase Microwave Ltd.	KPS-1503A-1500-KPS	X2945	6/04
2432	Antenna, double-ridged waveguide horn, 1-18 GHz	EMC Test Systems	3115	000271777	7/04



Appendix C Test equipment correction factors

Correction factor
Line impedance stabilization network
Model LISN 16 - 1
Hermon Laboratories

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.

Antenna factor
Active Loop Antenna
Model 6502, S/N 2857

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



**Antenna factor,
biconilog antenna EMCO, model 3141,
serial number 1011 (HL 0604)**

Frequency, MHz	Antenna factor, dB(1/m)
26	7.8
28	7.8
30	7.8
40	7.2
60	7.1
70	8.5
80	9.4
90	9.8
100	9.7
110	9.3
120	8.8
130	8.7
140	9.2
150	9.8
160	10.2
170	10.4
180	10.4
190	10.3
200	10.6
220	11.6
240	12.4
260	12.8
280	13.7
300	14.7
320	15.2
340	15.4
360	16.1
380	16.4
400	16.6
420	16.7
440	17.0
460	17.7
480	18.1
500	18.5
520	19.1
540	19.5
560	19.8
580	20.6
600	21.3
620	21.5
640	21.2
660	21.4
680	21.9
700	22.2
720	22.2
740	22.1
760	22.3
780	22.6
800	22.7
820	22.9
840	23.1
860	23.4
880	23.8
900	24.1
920	24.1

Frequency, MHz	Antenna factor, dB(1/m)
940	24.0
960	24.1
980	24.5
1000	24.9
1020	25.0
1040	25.2
1060	25.4
1080	25.6
1100	25.7
1120	26.0
1140	26.4
1160	27.0
1180	27.0
1200	26.7
1220	26.5
1240	26.5
1260	26.5
1280	26.6
1300	27.0
1320	27.8
1340	28.3
1360	28.2
1380	27.9
1400	27.9
1420	27.9
1440	27.8
1460	27.8
1480	28.0
1500	28.5
1520	28.9
1540	29.6
1560	29.8
1580	29.6
1600	29.5
1620	29.3
1640	29.2
1660	29.4
1680	29.6
1700	29.8
1720	30.3
1740	30.8
1760	31.1
1780	31.0
1800	30.9
1820	30.7
1840	30.6
1860	30.6
1880	30.6
1900	30.6
1920	30.7
1940	30.9
1960	31.2
1980	31.6
2000	32.0

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL2432

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

**Cable loss**

Cable Coaxial, GORE A2P01POL118, 2.3 m, model:GORE-3, HL 0589
+ Cable Coaxial, ANDREW PSWJ4, 6m, model: ANDREW-6, HL 1004

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	30	0.33	6.5	±0.12
2	50	0.40		
3	100	0.57		
4	300	0.97		
5	500	1.25		
6	800	1.59		
7	1000	1.81		
8	1200	1.97		
9	1400	2.15		
10	1600	2.28		
11	1800	2.43		
12	2000	2.61		
13	2200	2.75		
14	2400	2.89		
15	2600	2.97		
16	2800	3.21	6.5	±0.12
17	3000	3.32		
18	3300	3.47		
19	3600	3.62		
20	3900	3.84		
21	4200	3.92		±0.17
22	4500	4.07		
23	4800	4.36		
24	5100	4.62		
25	5400	4.78		
26	5700	5.16		
27	6000	5.67		
28	6500	5.99		



Cable loss
Cable coaxial, M17/164, model: C17164-10, s/n 161, HL 1003

No.	Frequency, MHz	Cable loss, dB	Tolerance, dB	Measurement uncertainty, dB
1	30	0.41	12.5	±0.12
2	50	0.52		
3	100	0.75		
4	300	1.45		
5	500	2.01		
6	800	2.71		
7	1000	3.14		
8	1200	3.56		
9	1400	3.93		
10	1600	4.31		
11	1800	4.63		
12	2000	4.97		
13	2200	5.32		
14	2400	5.65		
15	2600	6.01		
16	2800	6.42	12.5	±0.12
17	3000	6.76		
18	3300	7.12		
19	3600	7.53		
20	3900	7.95		
21	4200	8.32		±0.17
22	4500	8.72		
23	4800	9.14		
24	5100	9.59		
25	5400	10.00		
26	5700	10.49		
27	6000	11.07		
28	6500	11.80		



Cable loss
Cable coaxial, 6 m, model: M17/167 MIL-C-17, HL 1503

Frequency, MHz	Cable loss, dB
0.1	0.02
1	0.07
3	0.15
5	0.17
10	0.26
30	0.43
50	0.57
80	0.72
100	0.81
300	1.48
500	2.00
800	2.70
1000	3.09

**Cable loss****Cable 18 GHz, 4 m, blue, model: SPS-1803A-4000-NPS, S/N T4658, HL 1942**

Frequency, GHz	Cable loss, dB
0.03	0.21
0.05	0.26
0.10	0.36
0.20	0.50
0.30	0.61
0.40	0.70
0.50	0.78
0.60	0.85
0.70	0.93
0.80	0.99
0.90	1.04
1.00	1.10
1.10	1.16
1.20	1.22
1.30	1.26
1.40	1.31
1.50	1.35
1.60	1.41
1.70	1.45
1.80	1.49
1.90	1.53
2.00	1.57
2.10	1.61
2.20	1.65
2.30	1.69
2.40	1.72
2.50	1.76
2.60	1.79
2.70	1.83
2.80	1.87
2.90	1.90
3.10	1.97
3.30	2.04
3.50	2.11
3.70	2.18
3.90	2.24
4.10	2.31
4.30	2.38
4.50	2.43
4.70	2.53
4.90	2.53
5.10	2.63
5.30	2.65
5.90	2.79

Frequency, GHz	Cable loss, dB
6.10	2.88
6.30	2.90
6.50	2.97
6.70	3.02
6.90	3.04
7.10	3.07
7.30	3.12
7.50	3.13
7.70	3.19
7.90	3.24
8.10	3.30
8.30	3.36
8.50	3.45
8.70	3.41
8.90	3.45
9.10	3.42
9.30	3.55
9.50	3.48
9.70	3.58
9.90	3.61
10.10	3.66
10.30	3.68
10.50	3.70
10.70	3.70
10.90	3.75
11.10	3.78
11.30	3.86
11.50	3.98
11.70	4.10
11.90	4.12
12.10	4.09
12.40	4.13
13.00	4.23
13.50	4.35
14.00	4.40
14.50	4.44
15.00	4.57
15.50	4.66
16.00	4.64
16.50	4.66
17.00	4.75
17.50	4.85
18.00	4.93

**Cable loss****Cable 18 GHz, 6.5 m, blue, model: NPS-1803A-6500-NPS, S/N T4974, HL 1947**

Frequency, GHz	Cable loss, dB
0.03	0.30
0.05	0.38
0.10	0.53
0.20	0.74
0.30	0.91
0.40	1.05
0.50	1.18
0.60	1.29
0.70	1.40
0.80	1.50
0.90	1.59
1.00	1.68
1.10	1.77
1.20	1.86
1.30	1.94
1.40	2.01
1.50	2.08
1.60	2.16
1.70	2.22
1.80	2.29
1.90	2.36
2.00	2.42
2.10	2.48
2.20	2.54
2.30	2.60
2.40	2.66
2.50	2.71
2.60	2.77
2.70	2.83
2.80	2.89
2.90	2.95
3.10	3.06
3.30	3.17
3.50	3.28
3.70	3.39
3.90	3.51
4.10	3.62
4.30	3.76
4.50	3.87
4.70	4.01
4.90	4.10
5.10	4.21
5.30	4.31
5.50	4.43
5.70	4.56
5.90	4.71

Frequency, GHz	Cable loss, dB
6.10	4.87
6.30	4.95
6.50	4.94
6.70	4.88
6.90	4.87
7.10	4.83
7.30	4.85
7.50	4.86
7.70	4.91
7.90	4.96
8.10	5.03
8.30	5.08
8.50	5.13
8.70	5.21
8.90	5.22
9.10	5.34
9.30	5.35
9.50	5.52
9.70	5.51
9.90	5.66
10.10	5.70
10.30	5.78
10.50	5.79
10.70	5.82
10.90	5.86
11.10	5.94
11.30	6.06
11.50	6.21
11.70	6.44
11.90	6.61
12.10	6.76
12.40	6.68
13.00	6.66
13.50	6.81
14.00	6.90
14.50	6.90
15.00	6.97
15.50	7.17
16.00	7.28
16.50	7.27
17.00	7.38
17.50	7.68
18.00	7.92



Cable loss
RF cable 8 m, model RG-214, HL 2009

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	1	0.10	NA	±0.12
2	10	0.14		
3	30	0.25		
4	50	0.34		
5	100	0.53		
6	300	0.99		
7	500	1.31		
8	800	1.73		
9	1000	1.98		
10	1100	2.11		
11	1200	2.21		
12	1300	2.35		
13	1400	2.46		
14	1500	2.55		
15	1600	2.68		
16	1700	2.78		
17	1800	2.88		
18	1900	2.98		
19	2000	3.09		



Cable loss
Cable 40 GHz, 0.8 m, blue, model: KPS-1503A-800-KPS, serial number W4907 (HL 2254)

Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB
0.03	0.04	5.10	0.80	15.00	1.49
0.05	0.07	5.30	0.83	15.50	1.49
0.10	0.09	5.50	0.83	16.00	1.46
0.20	0.15	5.70	0.84	16.50	1.47
0.30	0.19	5.90	0.87	17.00	1.50
0.40	0.25	6.10	0.86	17.50	1.57
0.50	0.29	6.30	0.89	18.00	1.63
0.60	0.33	6.50	0.90	18.50	1.57
0.70	0.37	6.70	0.89	19.00	1.63
0.80	0.41	6.90	0.93	19.50	1.65
0.90	0.44	7.10	0.92	20.00	1.64
1.00	0.45	7.30	0.95	20.50	1.75
1.10	0.48	7.50	0.96	21.00	1.72
1.20	0.51	7.70	0.97	21.50	1.78
1.30	0.53	7.90	1.01	22.00	1.76
1.40	0.54	8.10	1.00	22.50	1.72
1.50	0.57	8.30	1.05	23.00	1.83
1.60	0.59	8.50	1.04	23.50	1.80
1.70	0.04	8.70	1.07	24.00	1.90
1.80	0.07	8.90	1.11	24.50	1.81
1.90	0.09	9.10	1.09	25.00	1.98
2.00	0.15	9.30	1.14	25.50	1.91
2.10	0.19	9.50	1.12	26.00	2.02
2.20	0.25	9.70	1.15	26.50	1.92
2.30	0.29	9.90	1.16	27.00	1.97
2.40	0.33	10.10	1.16	28.00	2.02
2.50	0.37	10.30	1.19	29.00	1.95
2.60	0.41	10.50	1.14	30.00	1.94
2.70	0.44	10.70	1.19	31.00	2.11
2.80	0.45	10.90	1.17	32.00	2.17
2.90	0.48	11.10	1.13	33.00	2.27
3.10	0.61	11.30	1.20	34.00	2.27
3.30	0.64	11.50	1.13	35.00	2.29
3.50	0.65	11.70	1.20	36.00	2.35
3.70	0.68	11.90	1.18	37.00	2.37
3.90	0.69	12.10	1.14	38.00	2.40
4.10	0.71	12.40	1.19	39.00	2.57
4.30	0.73	13.00	1.34	40.00	2.36
4.50	0.75	13.50	1.33		
4.70	0.77	14.00	1.48		
4.90	0.79	14.50	1.45		



Cable loss
Cable coaxial, 40GHz, 1.5 m, Blue, Rhophase Microwave Limited, model: KPS-1503A-1500-KPS,
HL 2399

Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB
0.03	0.07	6.5	1.57	15.50	2.50
0.05	0.10	6.7	1.60	16.00	2.51
0.1	0.16	6.9	1.55	16.50	2.58
0.2	0.26	7.1	1.65	17.00	2.65
0.3	0.33	7.3	1.65	17.50	2.73
0.5	0.38	7.5	1.70	18.00	2.74
0.7	0.41	7.7	1.71	18.50	2.67
0.9	0.58	7.9	1.73	19.00	2.67
1.1	0.64	8.1	1.79	19.50	2.74
1.3	0.70	8.3	1.81	20.00	2.69
1.5	0.75	8.5	1.84	20.50	2.80
1.7	0.79	8.7	1.85	21.00	2.82
1.9	0.83	8.9	1.90	21.50	2.87
2.1	0.88	9.1	1.95	22.00	2.87
2.3	0.93	9.3	1.93	22.50	2.92
2.5	0.97	9.5	1.98	23.50	3.04
2.7	1.01	9.7	1.96	24.00	3.05
2.9	1.04	9.9	2.03	24.50	3.03
3.1	1.08	10.1	1.99	25.00	3.11
3.3	1.14	10.30	2.02	25.50	3.10
3.5	1.17	10.50	2.02	26.00	3.17
3.7	1.21	10.70	2.02	26.50	3.11
3.9	1.24	10.90	2.08	27.00	3.16
4.1	1.26	11.10	2.02	28.00	3.19
4.3	1.26	11.30	2.09	29.00	3.19
4.5	1.29	11.50	2.05	30.00	3.30
4.7	1.34	11.70	2.11	31.00	3.31
4.9	1.34	11.90	2.11	32.00	3.35
5.1	1.40	12.10	2.12	33.00	3.46
5.3	1.43	12.40	2.17	34.00	3.45
5.5	1.45	13.00	2.29	35.00	3.49
5.7	1.47	13.50	2.31	36.00	3.54
5.9	1.40	14.00	2.43	37.00	3.62
6.1	1.53	14.50	2.43	39.00	3.69
6.3	1.55	15.00	2.46	40.00	3.75



Appendix D General information

Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, telecommunications, environmental, safety standards, and by AMTAC (UK) for safety of medical devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: PO Box 23, Binyamina 30500, Israel.

Telephone: +972 4628 8001

Fax: +972 4628 8277

e-mail: mail@hermonlabs.com

website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, QA manager.

Abbreviations and acronyms

The following abbreviations and acronyms are applicable to this test report:

AC	alternating current
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
DSS	Part 15 spread spectrum transmitter
EMC	electromagnetic compatibility
EUT	equipment under test
GHz	gigahertz
H	height
Hz	hertz
IF	intermediate frequency
kHz	kilohertz
kV	kilovolt
L	length
LISN	line impedance stabilization network
LO	local oscillator
m	meter
MHz	megahertz
NA	not applicable
QP	quasi-peak
RF	radio frequency
RE	radiated emission
rms	root mean square
s	second
V	volt
W	width

Specification references

47CFR part 15: 2003	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2001	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.