

Antenna specification

Antenna Sample Confirmation From

Name of supplier	ShenZhen Aihui Technology Co. , Ltd				
Customer name	Zhi niu				
Sample name	YD-D38HP				
model	505-1-WIFI-AH				
Sample size	Line length: Main antenna: 120mm 1st generation terminal Secondary antenna: 180mm 1st generation				
Inspection item	Performance test	Visual inspection	Structure	In the news	Test results
Notes					
Quality Audit		Project Audit		Business confirmation	
The following is to be completed by the client					

# Shenzhen Aihui Technology Co. , Ltd.

Customer feedback	
Customer signature/seal	<div>date:</div>

## Antenna specification

Test Unit: Shenzhen Aihui Technology Co. , Ltd.			
Materials	Coaxial line+Copper pipes		
Antenna form	PIFA	Polarization mode	Linear
Application scenario	Wifi /BT		

Address: 402TEL: 0755-23203435fax: 0755-23203435, Block C, Juxin Science and Technology Industrial Park, Nanchang community, xixiang, Baoan District, Shenzhen

# Shenzhen Aihui Technology Co. , Ltd.

Working band	2400Mhz-2500Mhz5 100Mhz-5850Mhz	VSWR	≤2
Power	Max : 2W	Impedance	50Ω
dBi	≥		
Test Equipment	HPE5071C、Shielding Room、3D automatic turntable		
<p>Antenna Description: :</p> <p>1. Grounding processing and picture description: no</p> <p>2. Need to change the motherboard to match: no</p> <ul style="list-style-type: none"><li>● Test voltage: 3.6V, check the antenna contact is good before testing.</li><li>● The RF cable of the integrated tester is kept in a natural state and can not be curled.</li></ul> <p>Specification:test the specified power level, all indicators must conform to the specifications.</p>			

1.Project Image

2.Test Fixture

3.Antenna matching circuit

4.S11 test

5.Antenna passive efficiency and gain

6.Darkroom test equipment and data

7.Schematic diagram of antenna assembly

8.Antenna environment handling

9.Antenna mass production index

10.Structural drawing


1.Project Image

The final verification antenna performance prototype in our company for at least one year, easy to analyze and solve the problem of antenna mass production, to ensure the quality of antenna shipment

2.Test Fixture

Objective: to test the passive parameters of antenna as accurately as possible. Making Method: the handset is made of a 50 ohm coaxial cable, one end of which is connected to the test point of the back end of the matching circuit of the handset motherboard (front end of the RF test hole) , and the other end is connected to the SMA joint. The diagram is as follows:

3、Antenna matching circuit

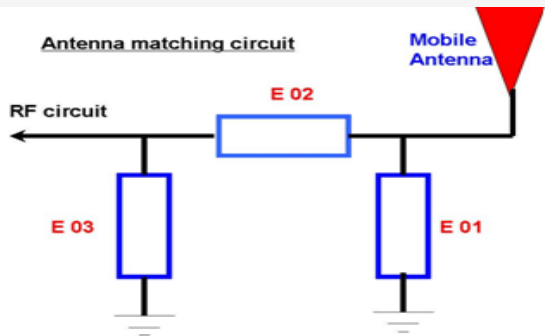

Modify

E01	E02	E03
-----	-----	-----


---

No	No	No
----	----	----


Note: The match is unmodified.

## 4.S11 test

4.0 4.0s11 test method description of test equipment: Network Analyzer (E5071C) test method: a 50 ohm CABLE is used to export from the instrument test port. The SMA connector for connecting the handset is calibrated using a calibration piece, record the echo loss and standing wave ratio corresponding to the relevant frequency points. The test schematic is as follows:

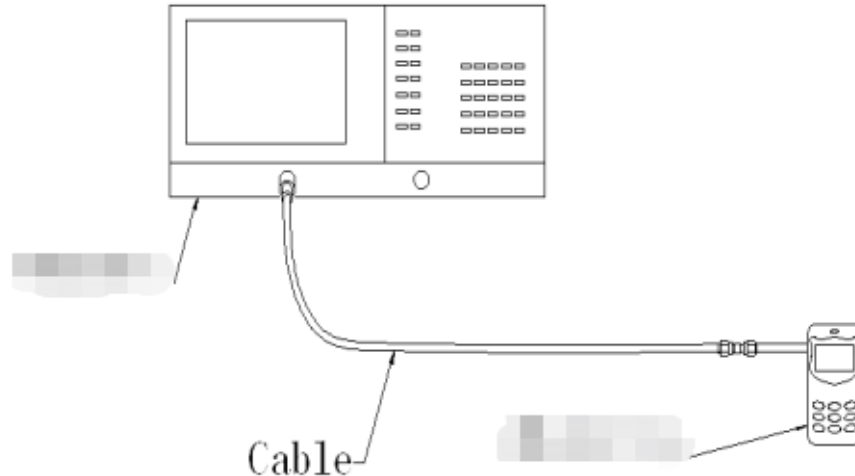

## 5.Darkroom test equipment and data

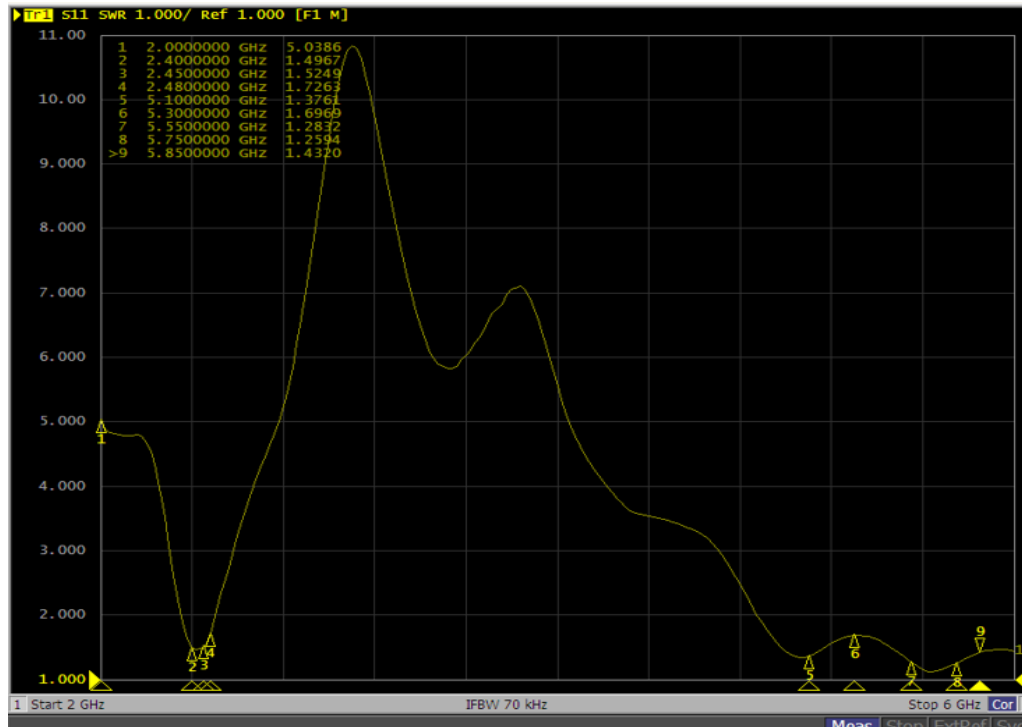


## 6.Test Equipment

Test system: shielded darkroom

The temperature was  $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$  and the humidity was  $50\% \pm 15\%$

Test equipment: when testing passive data, use the Network analyzer AGILENTE5071C  
to test active data, use the omnibus CMW500

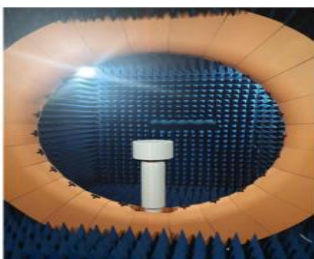


nce and  
Shenzhen

7.Active antenna test data


Frequency Band	2.4GWIFI-B模			2.4WIFI-G模		
channel	L	M	H	L	M	H
TRP	14.40	14.65	13.64	13.74	13.86	12.91
TIS	-77.12	-77.40	-77.14	-68.17	-68.37	-68.12
Frequency Band	2.4WIFI-N模			5.8WIFI-A模		
channel	L	M	H	L	M	H
TRP	13.04	13.37	12.24	14.90	15.12	13.64
TIS	-67.30	-67.22	-67.31	-68.12	-68.80	-68.24

测试数据:		
WIFI 2.4G		
Freq(MHz)	Efficiency (%)	Gain (dBi)
2400	58.4	1.12
2410	59.5	1.05
2420	50.2	1.31
2430	51.5	1.66
2440	53.5	1.54
2450	51.5	1.48
2460	59.6	1.88
2470	58.7	1.04
2480	59.3	1.21

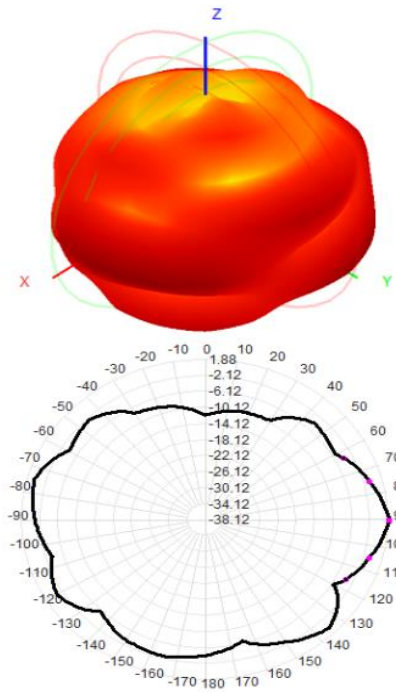



测试数据:		
WIFI 5. 8G		
Freq(MHz)	Efficiency (%)	Gain (dBi)
5000	55.2	1.11
5100	54.5	1.05
5200	56.3	1.32
5300	57.5	1.41
5400	59.8	1.31
5500	59.6	1.42
5600	58.7	1.31
5700	51.2	1.05
5800	52.5	1.14
5850	53.1	1.32

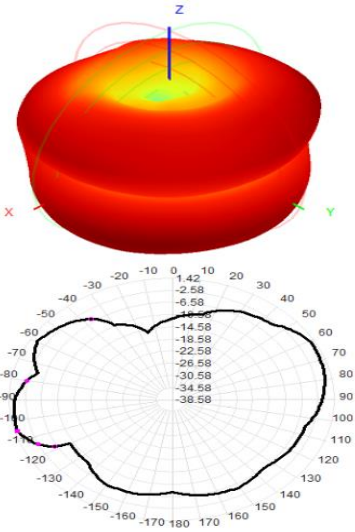

8.The panel matches the change schematic

/

9.Antenna environment handling

The original environment, we do not do processing

10Antenna mass production index



When the antenna is mass-produced, the standing wave ratio is taken as the mass-produced test standard.

Based on the differences of the project itself, the following criteria are given:

Frequency	Standard for volume production
2400 MHZ -2500MHZ	VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5
5100Mhz-5850Mhz	VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5

## 11.Structural drawings

# Shenzhen Aihui Technology Co. , Ltd.

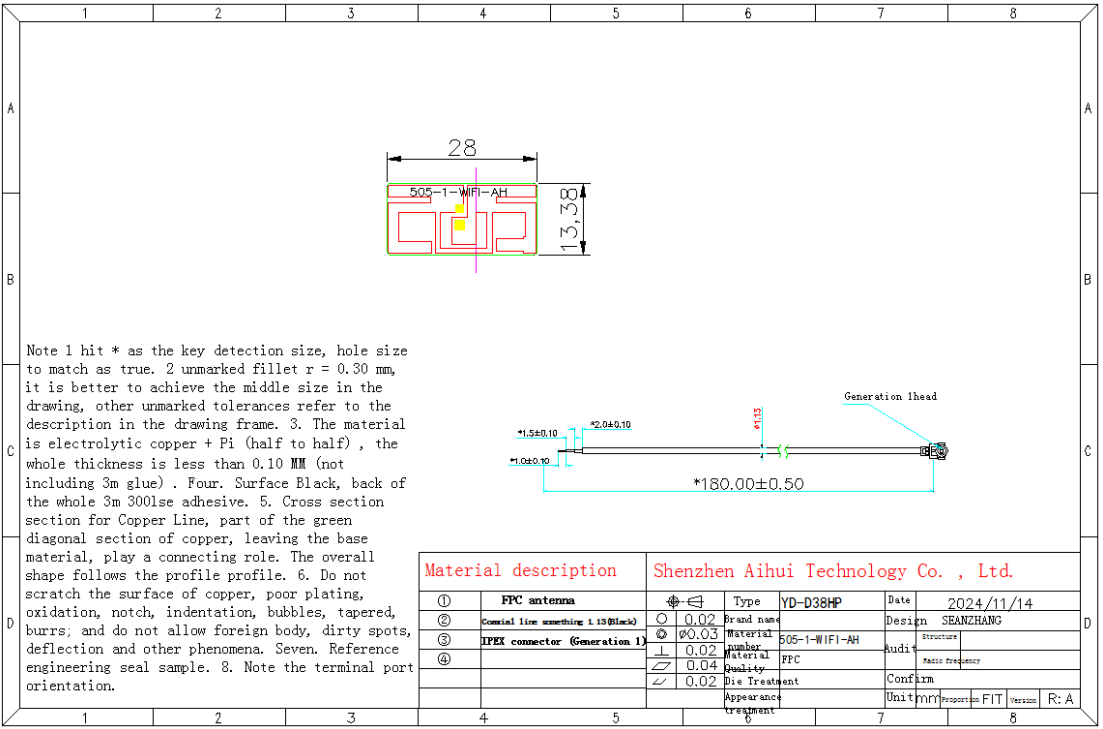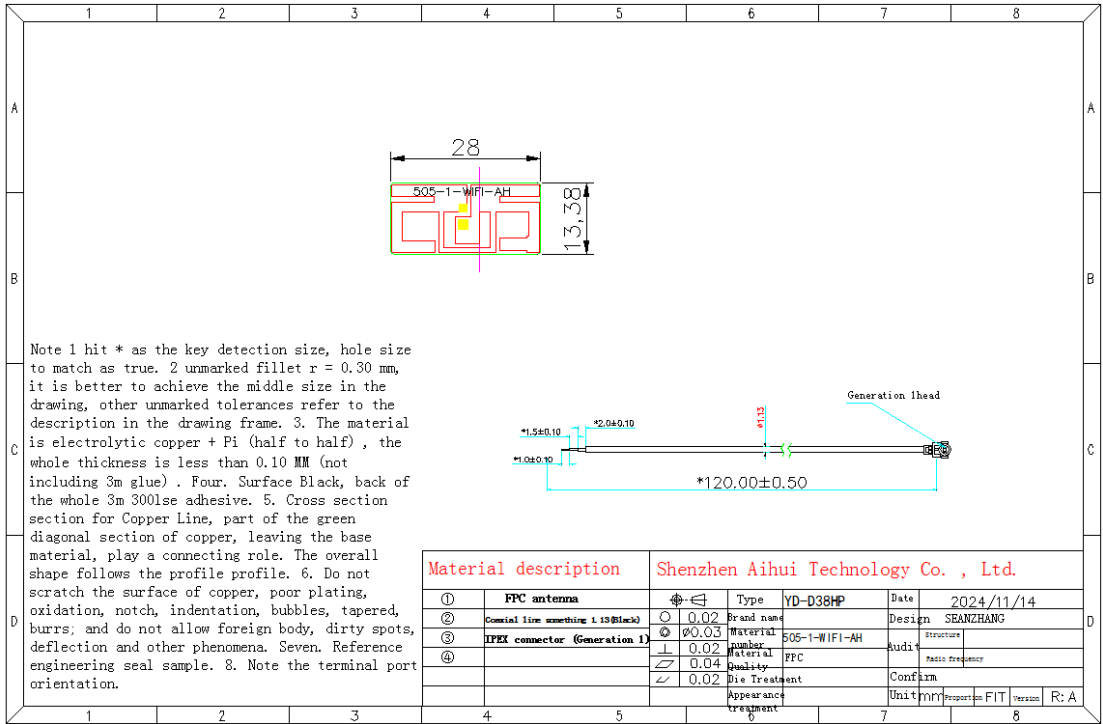

Address: 402TEL: 0755-23203435fax: 0755-23203435, Block C, Juxin Science and Technology Industrial Park, Nanchang community, xixiang, Baoan District, Shenzhen