

FCC Test Report

Equipment : AC750 Wireless LAN Repeater
Brand Name : EDIMAX
Model No. : EW-7336RPC / GRP-336RPC /
EW-7438AC
FCC ID : NDD9573361403
Standard : 47 CFR FCC Part 15.247
Operating Band : 5725 MHz – 5850 MHz
Equipment Class : DTS
Applicant : EDIMAX TECHNOLOGY CO., LTD.
Manufacturer : No.3, Wu-Chuan 3rd Road,
Wu-Ku Industrial Park,
New Taipei City, Taiwan

The product sample received on Apr. 23, 2014 and completely tested on May 02, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Support Equipment.....	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information.....	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT	9
2.1	The Worst Case Modulation Configuration	9
2.2	The Worst Case Power Setting Parameter	9
2.3	The Worst Case Measurement Configuration.....	10
2.4	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	13
3.1	AC Power-line Conducted Emissions	13
3.2	6dB Bandwidth	16
3.3	RF Output Power.....	18
3.4	Power Spectral Density	22
3.5	Transmitter Bandedge Emissions	24
3.6	Transmitter Unwanted Emissions.....	28
4	TEST EQUIPMENT AND CALIBRATION DATA	61

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.54068MHz 22.71 (Margin 23.29dB) - AV 33.85 (Margin 22.15dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	Bandwidth	6dB Bandwidth [MHz] a/n(HT20): 16.36 n(HT40): 34.52 ac(VHT20): 16.69 ac(VHT40): 34.64 ac(VHT80): 74.96	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]: 26.90	Power [dBm]:30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/100kHz]: -4.10	PSD [dBm/MHz]:17 replace 8dBm/3kHz	Complied
3.5	15.247(c)	Transmitter Bandedge Emissions	Non-Restricted Bands: 5725MHz 24.80 dB	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 435.46MHz 40.16 (Margin 5.84dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-327-0973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
5725-5850	a	5745-5825	149-165 [5]	1	26.85	Yes
5725-5850	n(HT20)	5745-5825	149-165 [5]	1	26.90	Yes
5725-5850	n(HT40)	5755-5795	151-159 [2]	1	26.79	Yes
5725-5850	ac(VHT20)	5745-5825	149-165 [5]	1	26.24	Yes
5725-5850	ac(VHT40)	5755-5795	151-159 [2]	1	26.20	Yes
5725-5850	ac(VHT80)	5775	155 [1]	1	23.03	Yes

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
 Note 3: 802.11ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
 Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☐	Temporary RF connector provided
☒	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
☐	External antenna (dedicated antennas)
☐	Single power level with corresponding antenna(s).
☐	Multiple power level and corresponding antenna(s).

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	PIFA	4.44

Remark: 11a/n/ac only include 1TX and Port1 for emission.

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☐ Production ; ☐ Pre-Production ; ☒ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
☐	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle		
☐ Operated normally mode for worst duty cycle		
☒ Operated test mode for worst duty cycle		
Test Signal Duty Cycle (x)	N _{TX}	Power Duty Factor [dB] – (10 log 1/x)
☒ 100.00% - IEEE 802.11a	1	0.00
☒ 100.00% - IEEE 802.11n (HT20)	1	0.00
☒ 100.00% - IEEE 802.11n (HT40)	1	0.00
☒ 100.00% - IEEE 802.11ac (VHT20)	1	0.00
☒ 100.00% - IEEE 802.11ac (VHT40)	1	0.00
☒ 100.00% - IEEE 802.11ac (VHT80)	1	0.00

1.1.5 EUT Operational Condition

Supply Voltage	☒ AC mains	☐ DC	☐ System
Type of DC Source	☒ Internal DC supply	☐ External DC from USB cable	☐ External DC adapter

1.2 Support Equipment

Support Equipment - RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5520	-

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 558074
- ◆ FCC KDB 789033
- ◆ FCC KDB 644545 D01
- ◆ FCC KDB 644545 D02
- ◆ FCC KDB 662911

1.4 Testing Location Information

Testing Location			
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
		TEL : 886-3-327-3456 FAX : 886-3-327-0973	
Test Condition		Test Site No.	Test Engineer
AC Conduction		CO04-HY	Zeus
RF Conducted		TH01-HY	Cain
Radiated Emission		03CH02-HY	Hunter
			Test Environment
			25°C / 53%
			22.1°C / 61%
			25°C / 53%

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		± 2.26 dB
Emission bandwidth, 6dB bandwidth		± 1.42 %
RF output power, conducted		± 0.63 dB
Power density, conducted		± 0.81 dB
Unwanted emissions, conducted	9 – 150 kHz	± 0.38 dB
	0.15 – 30 MHz	± 0.42 dB
	30 – 1000 MHz	± 0.51 dB
	1 – 18 GHz	± 0.67 dB
	18 – 40 GHz	± 0.83 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	± 2.49 dB
	0.15 – 30 MHz	± 2.28 dB
	30 – 1000 MHz	± 2.56 dB
	1 – 18 GHz	± 3.59 dB
	18 – 40 GHz	± 3.82 dB
	40 – 200 GHz	N/A
Temperature		± 0.8 °C
Humidity		± 3 %
DC and low frequency voltages		± 3 %
Time		± 1.42 %
Duty Cycle		± 1.42 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11a,6-54Mbps	1	6-54Mbps	6 Mbps
HT20,M0-7	1	M0-7	MCS 0
HT40,M0-7	1	M0-7	MCS 0
VHT20,M0-8	1	M0-8	MCS 0
VHT40,M0-9	1	M0-9	MCS 0
VHT80,M0-9	1	M0-9	MCS 0

2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (5725-5850MHz band)							
Test Software / Version	MT76XXE QA_V2.0.10.0						
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		NCB: 80MHz
		5745	5785	5825	5755	5795	5775
11a,6-54Mbps	1	27	2A	2A	-	-	-
HT20,M0-7	1	26	2A	2A	-	-	-
HT40,M0-7	1	-	-	-	1D	2A	-
VHT20,M0-8	1	27	2A	2A	-	-	-
VHT40,M0-9	1	-	-	-	22	2A	-
VHT80,M0-9	1	-	-	-	-	-	1F


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC power & Radio link


The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a, HT20, HT40, VHT20, VHT40, VHT80

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement		
User Position	☐ EUT will be placed in fixed position.		
	☒ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst plane is Z.		
	☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes.		
Operating Mode	☒ 2. AC power & Transmitter		
Modulation Mode	11a, HT20, HT40, VHT20, VHT40, VHT80		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			


2.4 Test Setup Diagram

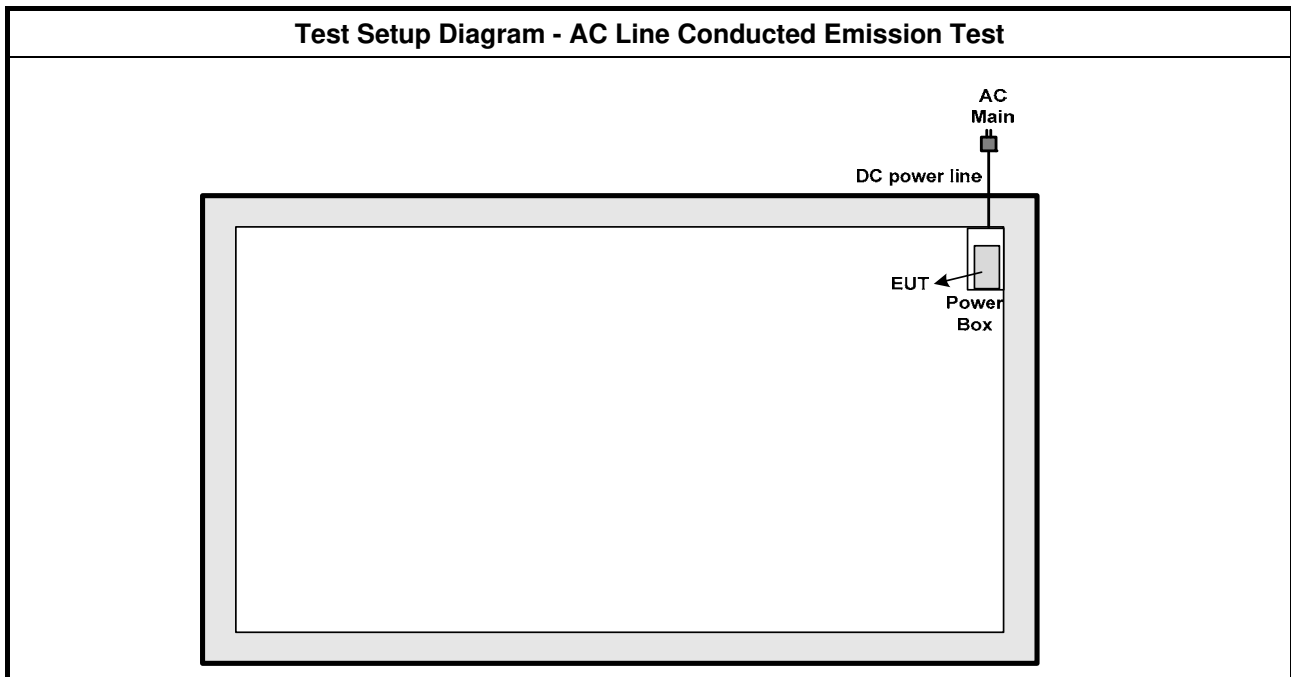

Test Setup Diagram - Radiated Emission (Below 1GHz)

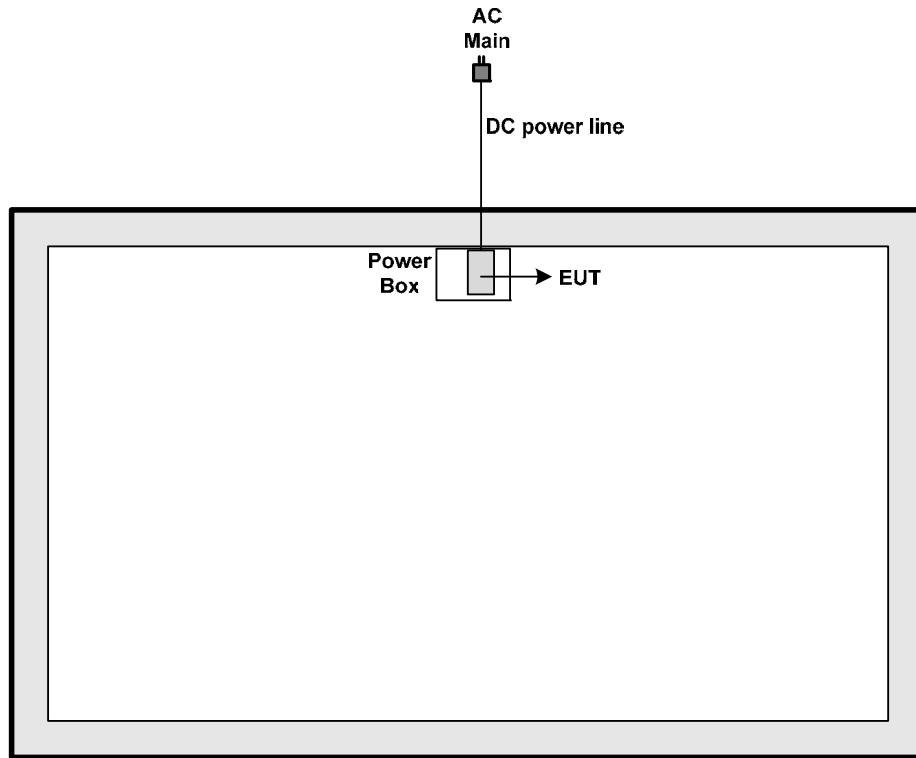

Test Setup Diagram - Radiated Emission (Above 1GHz)

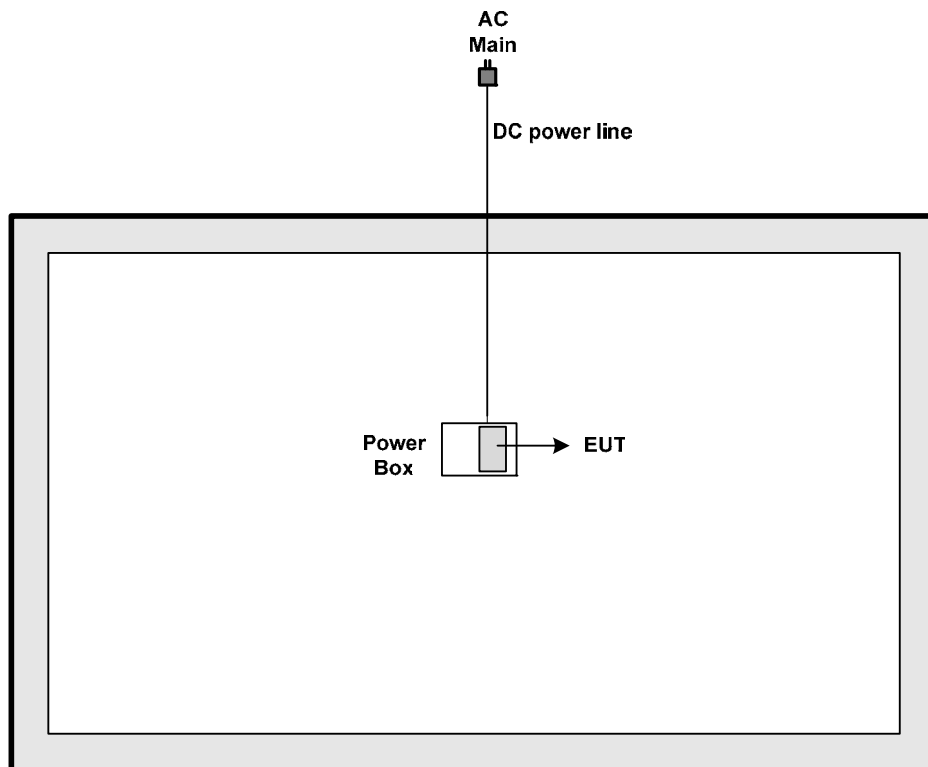

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

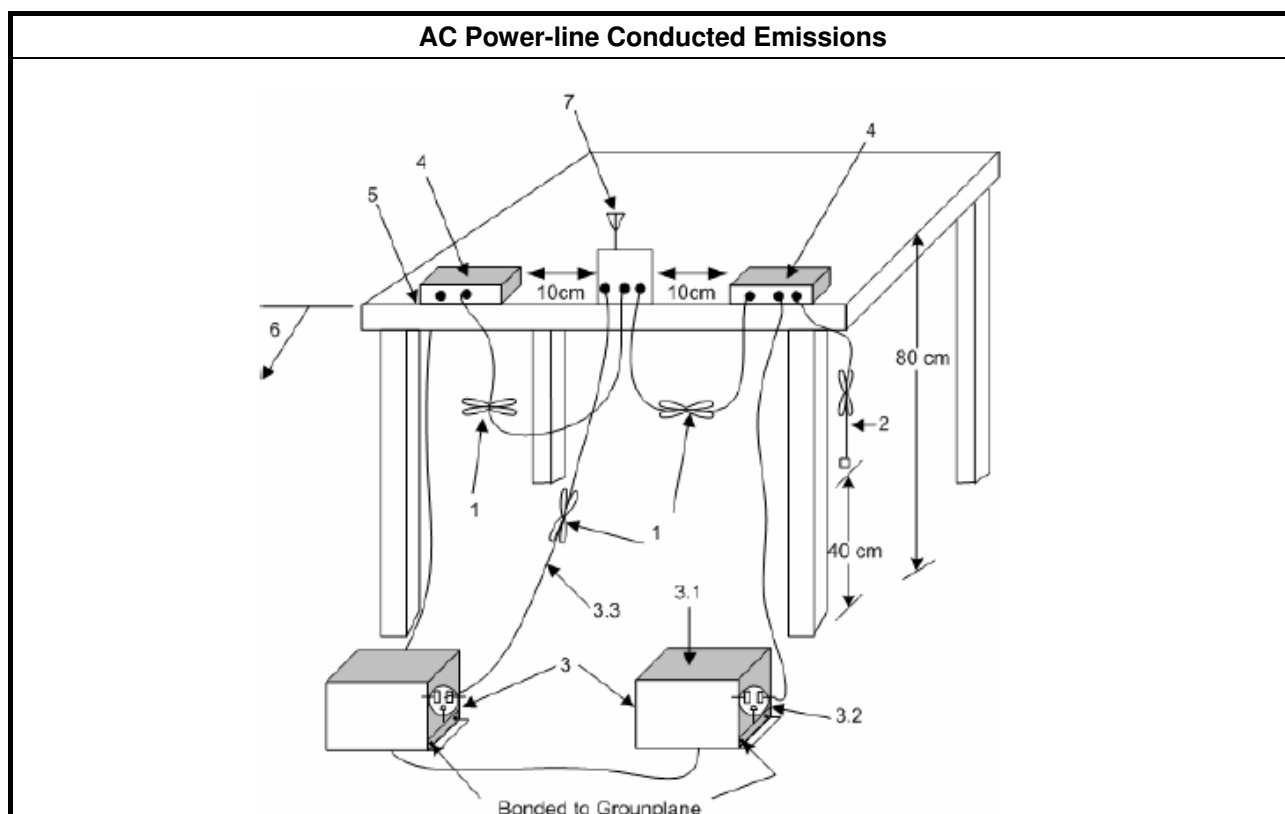


3.1.5 Test Result of AC Power-line Conducted Emissions

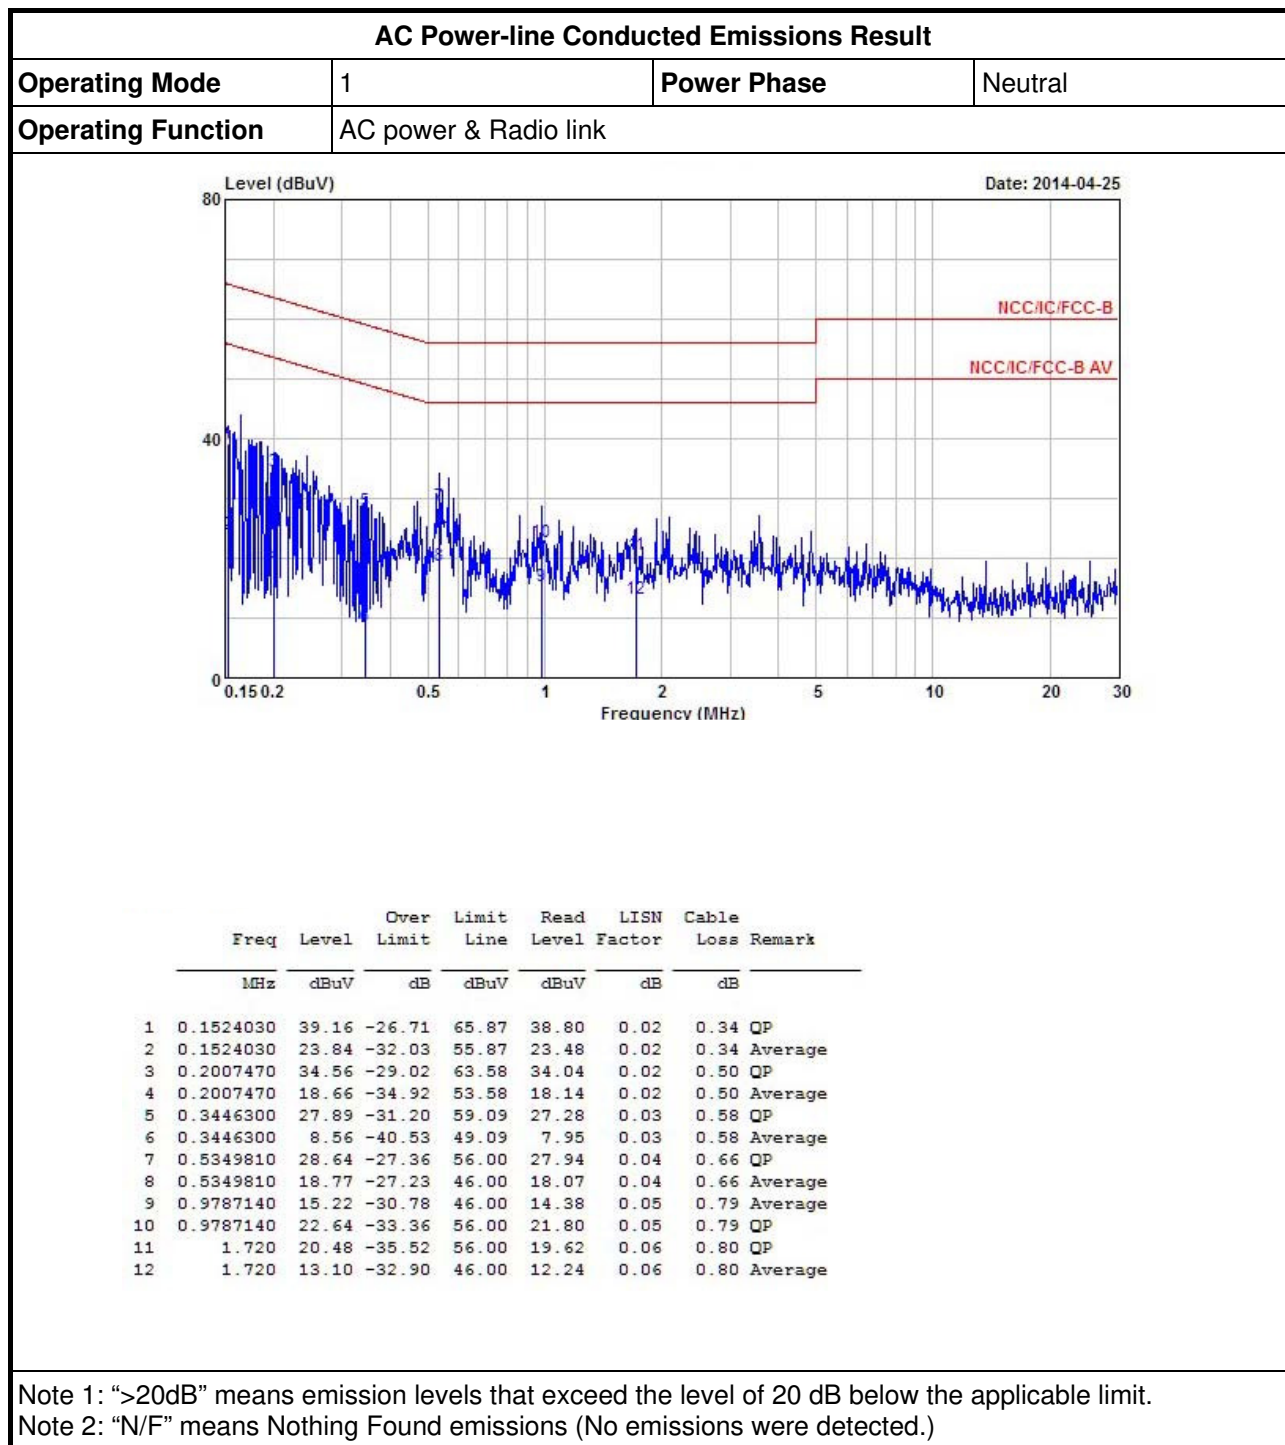

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC power & Radio link		

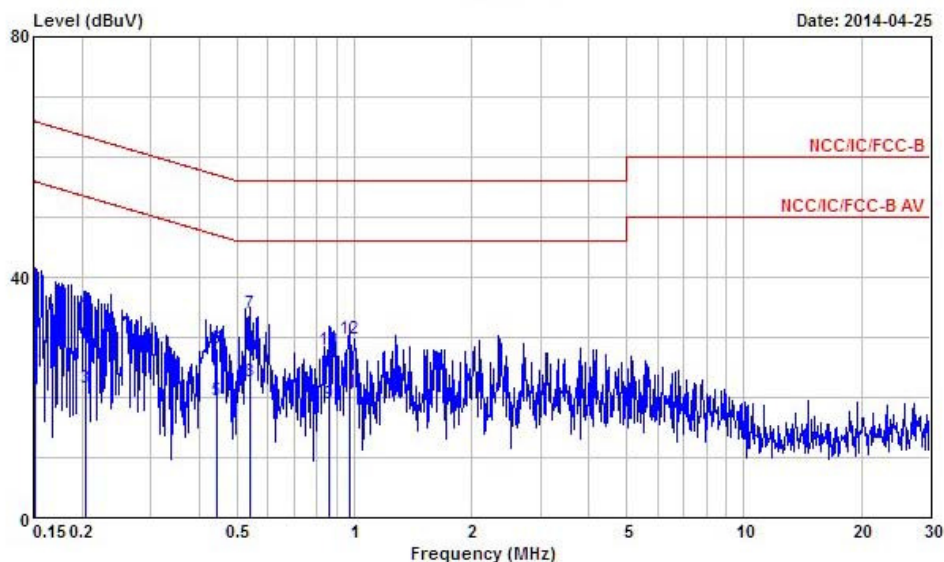

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1515980	38.71	-27.20	65.91	38.34	0.03	0.34	QP
2	0.1515980	24.36	-31.55	55.91	23.99	0.03	0.34	Average
3	0.2050460	21.50	-31.90	53.40	20.97	0.03	0.50	Average
4	0.2050460	34.51	-28.89	63.40	33.98	0.03	0.50	QP
5	0.4420810	19.35	-27.67	47.02	18.70	0.03	0.62	Average
6	0.4420810	28.15	-28.87	57.02	27.50	0.03	0.62	QP
7	0.5406800	33.85	-22.15	56.00	33.14	0.04	0.67	QP
8	0.5406800	22.71	-23.29	46.00	22.00	0.04	0.67	Average
9	0.8618490	18.95	-27.05	46.00	18.13	0.05	0.77	Average
10	0.8618490	27.97	-28.03	56.00	27.15	0.05	0.77	QP
11	0.9683980	20.68	-25.32	46.00	19.83	0.06	0.79	Average
12	0.9683980	29.63	-26.37	56.00	28.78	0.06	0.79	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
☒	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
☐	Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain 1.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below:
☐	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
☐	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.


3.2.4 Test Setup

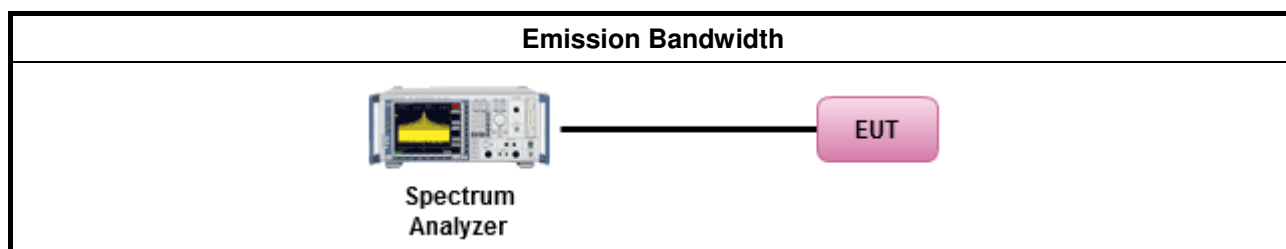

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result				
Condition			Emission Bandwidth (MHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth	6dB Bandwidth
11a	1	5745	22.95	16.36
11a	1	5785	24.34	16.48
11a	1	5825	24.54	16.41
HT20	1	5745	22.56	17.20
HT20	1	5785	23.85	17.62
HT20	1	5825	24.00	17.61
HT40	1	5755	36.34	34.52
HT40	1	5795	63.48	36.44
VHT20	1	5745	21.49	17.49
VHT20	1	5785	23.02	17.61
VHT20	1	5825	22.90	16.69
VHT40	1	5755	36.74	34.64
VHT40	1	5795	58.29	35.12
VHT80	1	5775	75.72	74.96
Limit			N/A	≥500 kHz
Result			Complied	

Note 1: N_{TX} = Number of Transmit Chains

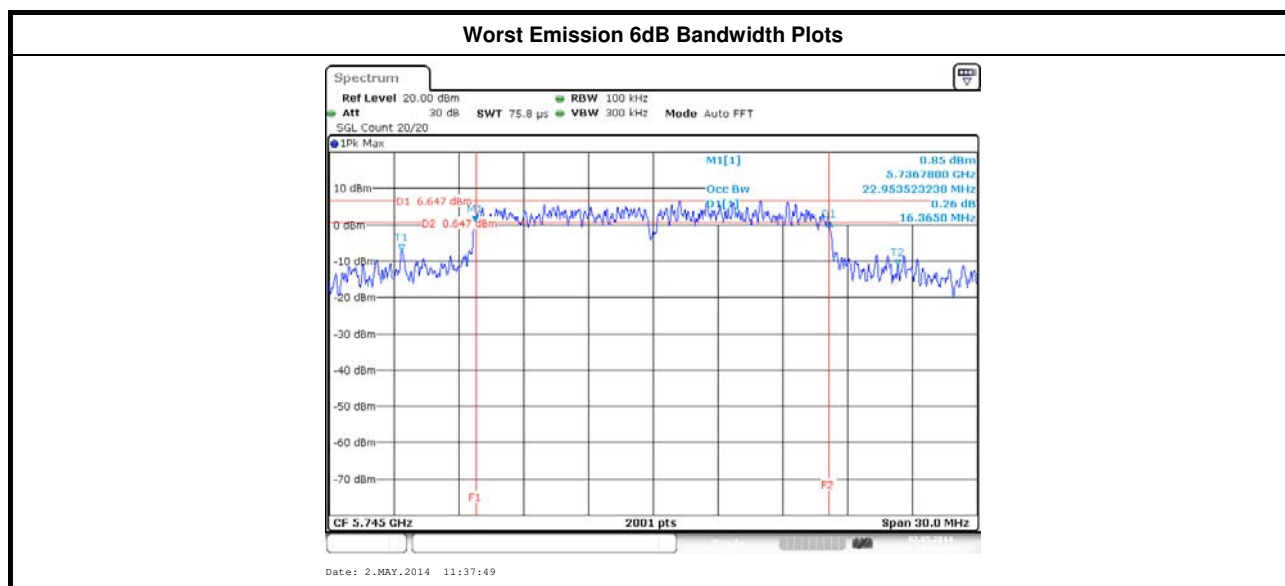

3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
☒	5725-5850 MHz Band:
☒	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
☒	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
☐	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30$ dBm
e.i.r.p. Power Limit:	
☒	5725-5850 MHz Band
☒	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
☐	Point-to-point systems (P2P): N/A
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☒	Maximum Peak Conducted Output Power
☐	Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
☒	Refer as FCC KDB 558074, clause 9.1.2 Option 2 (integrated band power method).
☐	Refer as FCC KDB 558074, clause 9.1.3 Option 2 (peak power meter for VBW ≥ DTS BW)
☒	Maximum Conducted Output Power
	[duty cycle ≥ 98% or external video / power trigger]
☒	Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
☐	Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF power meter and average over on/off periods with duty factor or gated trigger
☐	Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM (using an RF average power meter).
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain 1.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☐	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

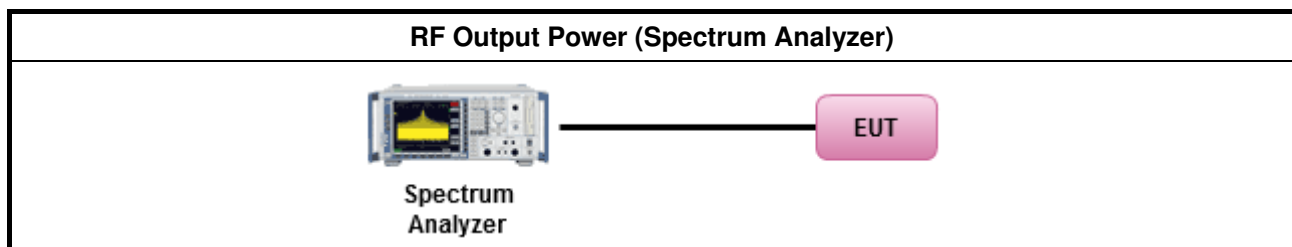


3.3.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result							
Condition			RF Output Power (dBm)				
Modulation Mode	N _{TX}	Freq. (MHz)	Port 1 (dBm)	Power Limit	Ant. gain (dBi)	EIRP Power	EIRP Limit
11a	1	5745	26.71	30.00	4.44	31.15	36.00
11a	1	5785	26.85	30.00	4.44	31.29	36.00
11a	1	5825	26.73	30.00	4.44	31.17	36.00
HT20	1	5745	26.27	30.00	4.44	30.71	36.00
HT20	1	5785	26.90	30.00	4.44	31.34	36.00
HT20	1	5825	26.70	30.00	4.44	31.14	36.00
HT40	1	5755	23.74	30.00	4.44	28.18	36.00
HT40	1	5795	26.79	30.00	4.44	31.23	36.00
VHT20	1	5745	25.67	30.00	4.44	30.11	36.00
VHT20	1	5785	26.24	30.00	4.44	30.68	36.00
VHT20	1	5825	26.01	30.00	4.44	30.45	36.00
VHT40	1	5755	24.19	30.00	4.44	28.63	36.00
VHT40	1	5795	26.20	30.00	4.44	30.64	36.00
VHT80	1	5775	23.03	30.00	4.44	27.47	36.00
Result							

3.3.6 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power Result							
Condition			RF Output Power (dBm)				
Modulation Mode	N _{TX}	Freq. (MHz)	Port 1 (dBm)	Power Limit	Ant. gain (dBi)	EIRP Power	EIRP Limit
11a	1	5745	21.71	30.00	4.44	26.15	36.00
11a	1	5785	21.89	30.00	4.44	26.33	36.00
11a	1	5825	21.74	30.00	4.44	26.18	36.00
HT20	1	5745	21.30	30.00	4.44	25.74	36.00
HT20	1	5785	21.81	30.00	4.44	26.25	36.00
HT20	1	5825	21.71	30.00	4.44	26.15	36.00
HT40	1	5755	18.74	30.00	4.44	23.18	36.00
HT40	1	5795	21.68	30.00	4.44	26.12	36.00
VHT20	1	5745	20.59	30.00	4.44	25.03	36.00
VHT20	1	5785	21.21	30.00	4.44	25.65	36.00
VHT20	1	5825	21.06	30.00	4.44	25.50	36.00
VHT40	1	5755	19.17	30.00	4.44	23.61	36.00
VHT40	1	5795	21.13	30.00	4.44	25.57	36.00
VHT80	1	5775	17.79	30.00	4.44	22.23	36.00
Result							

5725-5850MHz - Worst RF Output Power Plots

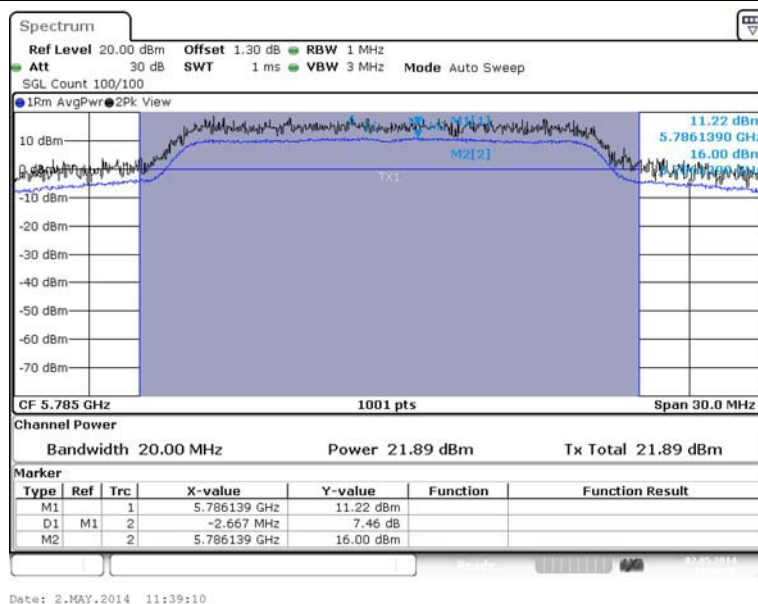

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
☒	Power Spectral Density (PSD) $\leq$ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method	
☒	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒	Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz;detector=peak).. [duty cycle $\geq$ 98% or external video / power trigger]
☒	Refer as FCC KDB 558074, clause 10.3 Method AVGPS-1 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 10.4 Method AVGPS-1 Alt. (slow sweep speed) duty cycle < 98% and average over on/off periods with duty factor
☐	Refer as FCC KDB 558074, clause 10.5 Method AVGPS-2 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 10.6 Method AVGPS-2 Alt. (slow sweep speed)
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain1.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☐	The EUT supports multiple transmit chains using options given below:
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

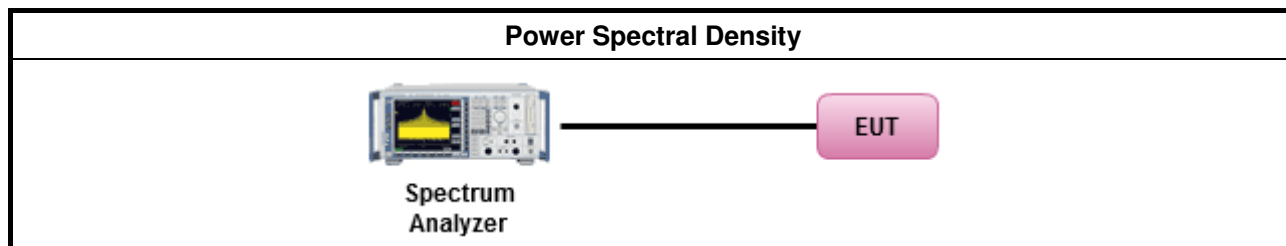


3.4.5 Test Result of Power Spectral Density

Power Spectral Density Result				
Condition			Power Spectral Density	
Modulation Mode	N _{TX}	Freq. (MHz)	Power Spectral Density (dBm/100kHz)	Power Limit (dBm/3kHz)
11a	1	5745	-5.80	8.00
11a	1	5785	-8.65	8.00
11a	1	5825	-9.29	8.00
HT20	1	5745	-9.42	8.00
HT20	1	5785	-8.18	8.00
HT20	1	5825	-7.10	8.00
HT40	1	5755	-15.41	8.00
HT40	1	5795	-10.62	8.00
VHT20	1	5745	-7.19	8.00
VHT20	1	5785	-6.63	8.00
VHT20	1	5825	-4.10	8.00
VHT40	1	5755	-9.13	8.00
VHT40	1	5795	-10.54	8.00
VHT80	1	5775	-15.94	8.00
Result			Complied	

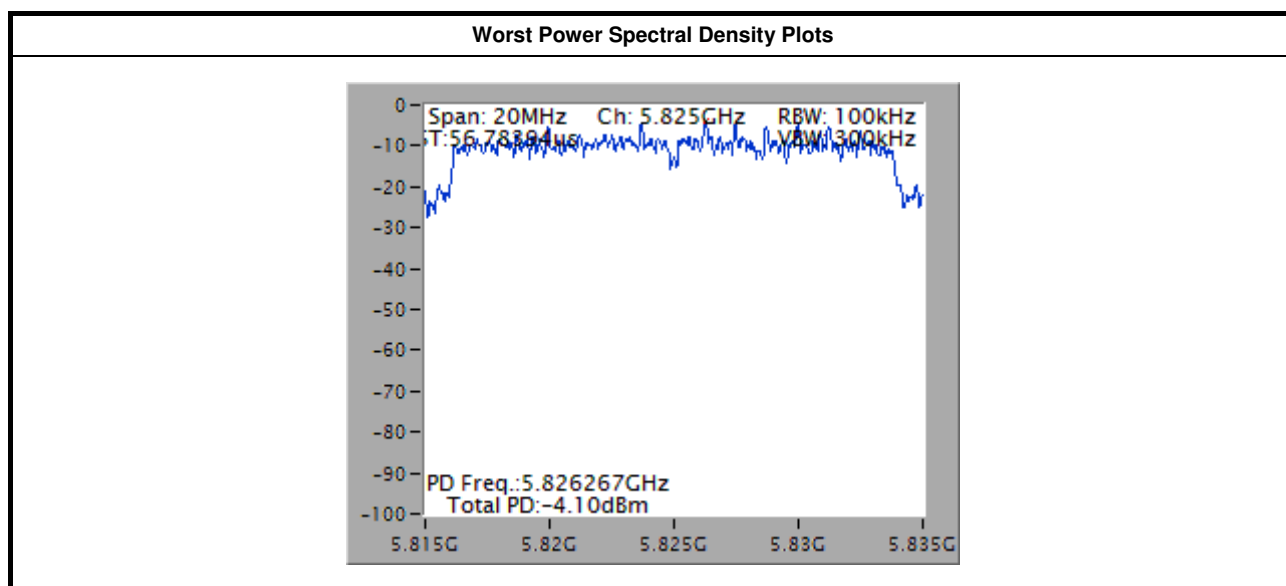

3.5 Transmitter Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

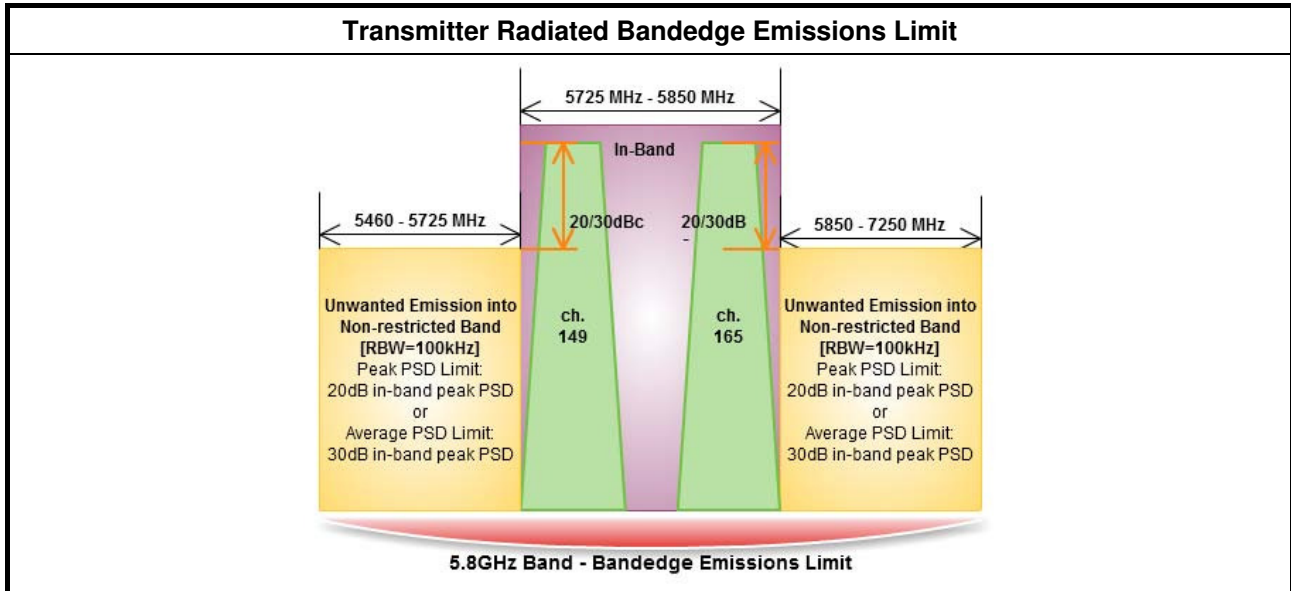


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
☐	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq$ 98%)
☐	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
☒	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq$ 1/T).
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☐	Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
☒	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
☒	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7 and ANSI C63.10, clause 6.6. Test distance is 3m.
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). Measurements in the bandedge are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.

3.5.4 Test Setup

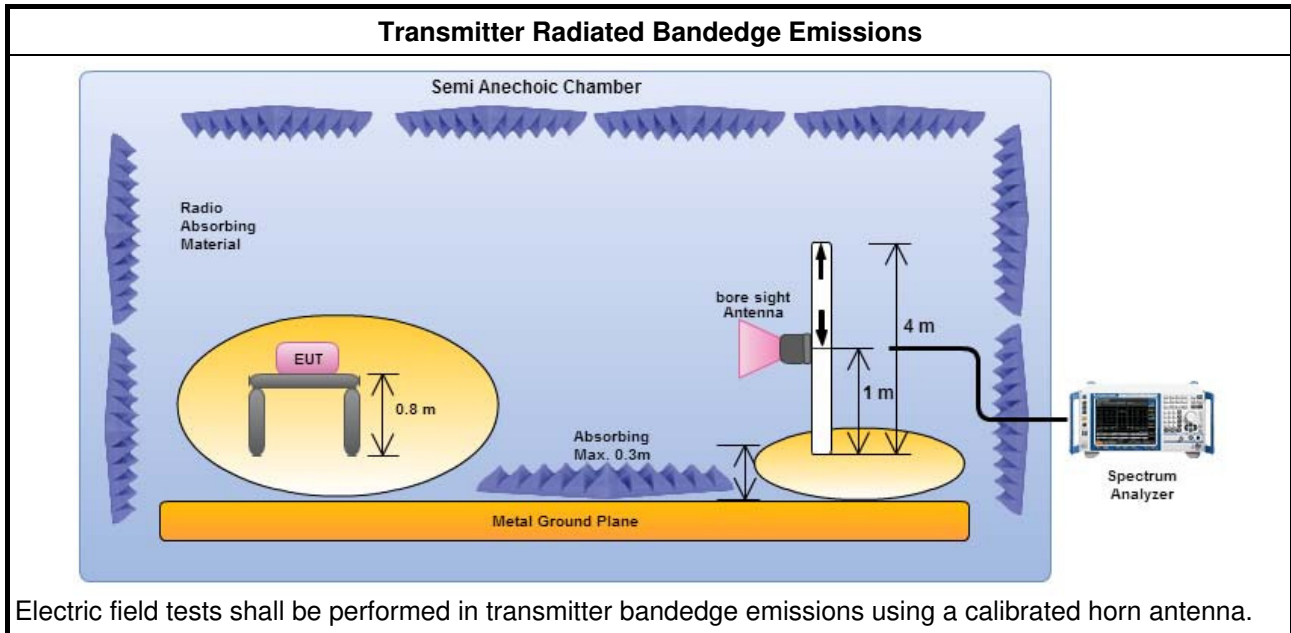

3.5.5 Transmitter Radiated Bandedge Emissions

5725-5850MHz Transmitter Radiated Bandedge Emissions								
Modulation	N _{TX}	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
11a	1	5745	106.34	5725.00	80.04	26.30	20	V
11a	1	5825	104.33	5851.03	76.23	28.10	20	V
HT20	1	5745	106.07	5725.00	81.27	24.80	20	V
HT20	1	5825	104.93	5851.25	78.79	26.14	20	V
HT40	1	5755	100.27	5725.00	74.30	25.97	20	V
HT40	1	5795	103.72	5852.60	77.28	26.44	20	V
VHT20	1	5745	105.56	5725.00	79.21	26.35	20	V
VHT20	1	5825	101.02	5852.51	75.34	25.68	20	V
VHT40	1	5755	101.38	5725.00	75.86	25.52	20	V
VHT40	1	5795	102.84	5852.60	71.55	31.29	20	V
VHT80	1	5775	95.77	5851.98	66.77	29.00	20	V
Note 1: Measurement worst emissions of receive antenna polarization								

3.6 Transmitter Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
☐	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
☐	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
☒	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$).
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
☒	Refer as FCC KDB 558074, clause 12.2.3 measurement procedure Quasi-Peak limit.
☒	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. For 1 GHz to 5 GHz, test distance is 3m; For 5 GHz to 40 GHz, test distance is 1m.
☒	The any unwanted emissions level shall not exceed the fundamental emission level.
☒	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.6.4 Test Setup

Transmitter Radiated Unwanted Emissions Below 1GHz

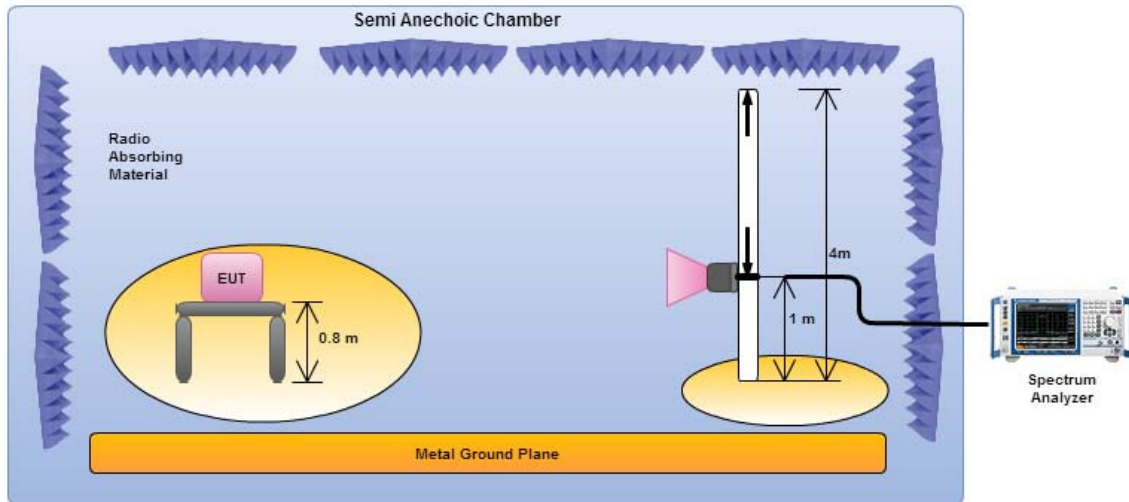

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.


Transmitter Radiated Unwanted Emissions Above 1GHz

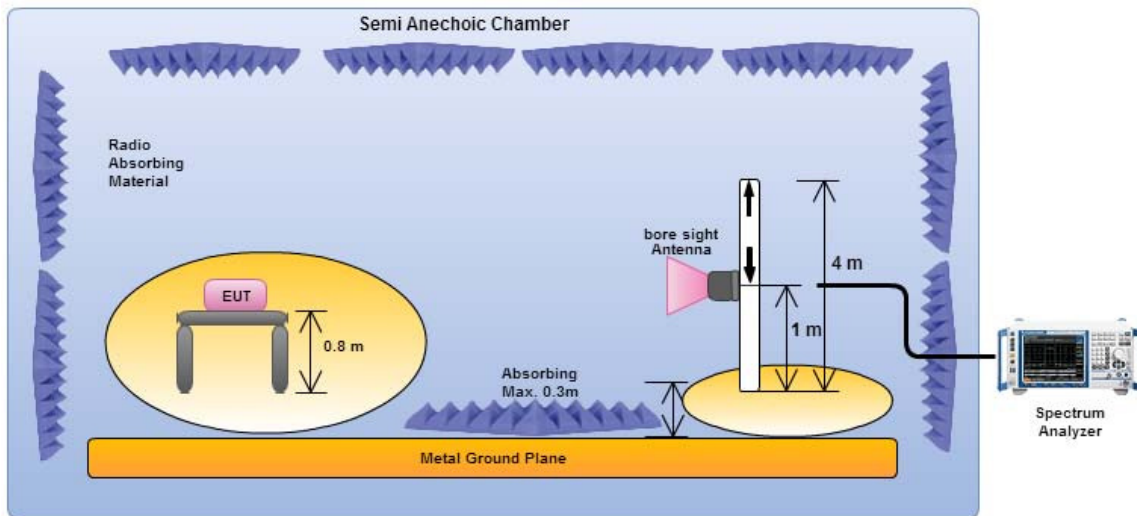

The frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.


3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

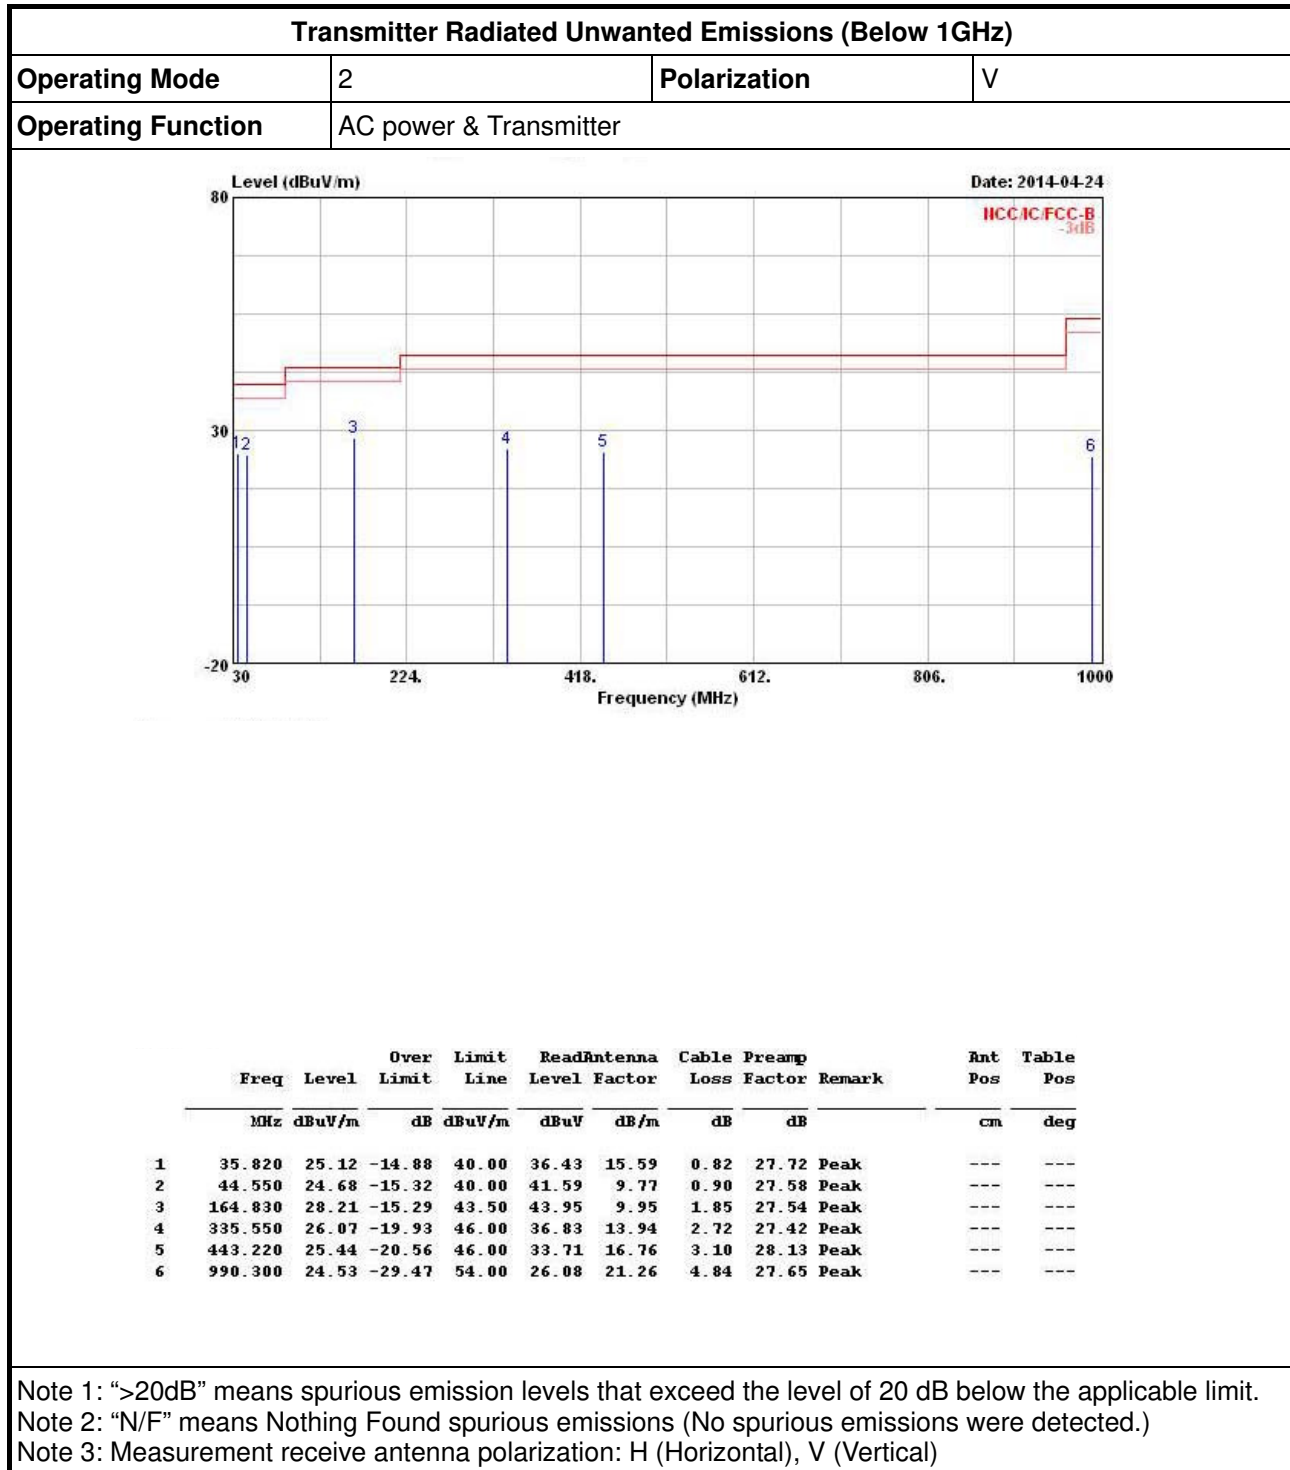3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)


Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	2	Polarization	H
Operating Function	AC power & Transmitter		

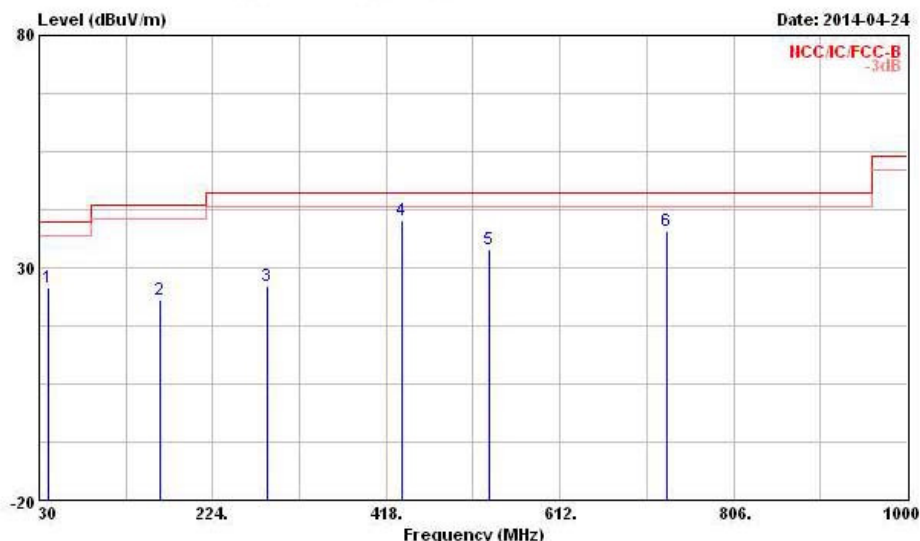


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	40.670	25.77	-14.23	40.00	40.12	12.43	0.86	27.64	Peak	---	---
2	164.830	23.25	-20.25	43.50	38.99	9.95	1.85	27.54	Peak	---	---
3	285.110	26.01	-19.99	46.00	37.74	13.00	2.46	27.19	Peak	---	---
4	435.460	40.16	-5.84	46.00	48.47	16.71	3.07	28.02	Peak	---	---
5	532.460	34.08	-11.92	46.00	41.23	17.88	3.43	28.46	Peak	---	---
6	731.310	38.00	-8.00	46.00	42.57	19.56	4.10	28.23	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

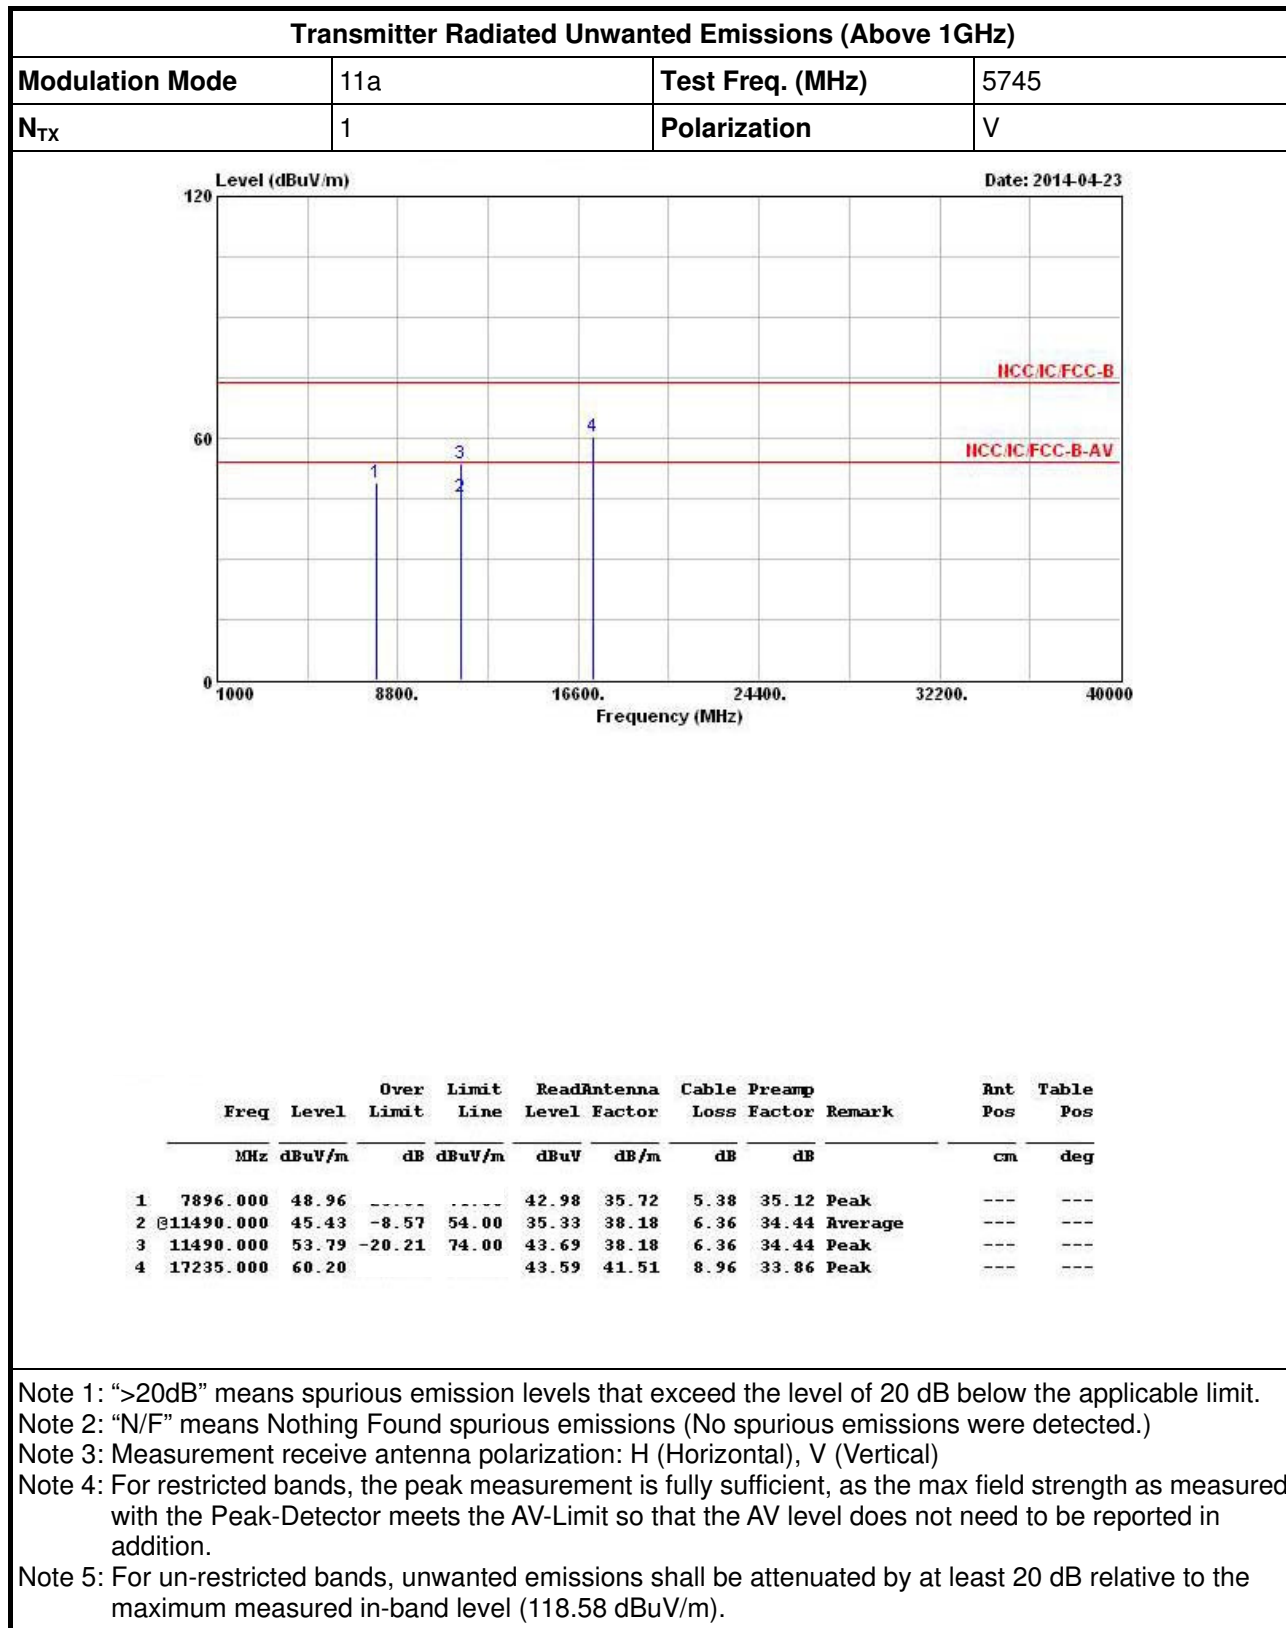3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	H

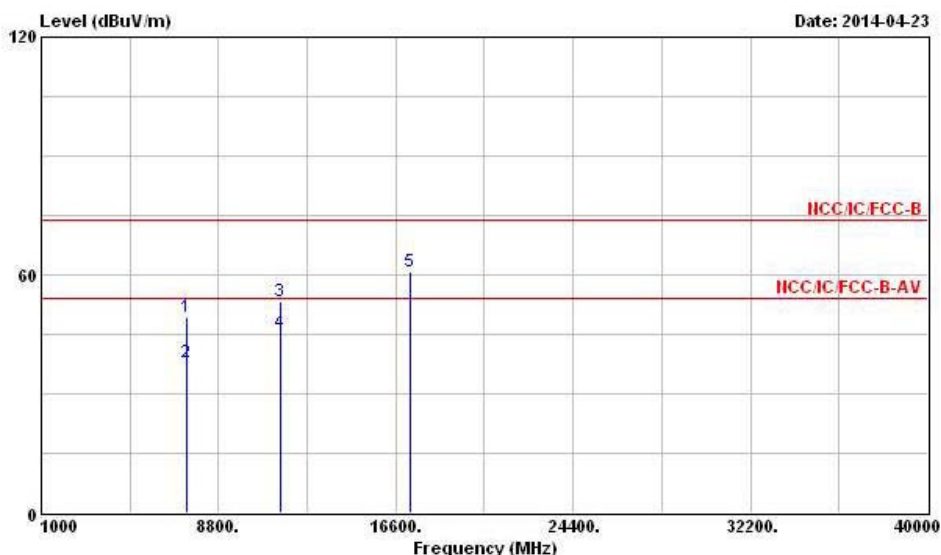

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7428.000	49.27	-24.73	74.00	42.81	35.83	5.61	34.98	Peak	---	---
2	7428.000	37.81	-16.19	54.00	31.35	35.83	5.61	34.98	Average	---	---
3	11490.000	53.45	-20.55	74.00	43.35	38.18	6.36	34.44	Peak	---	---
4	@11490.000	45.39	-8.61	54.00	35.29	38.18	6.36	34.44	Average	---	---
5	17235.000	60.82			44.21	41.51	8.96	33.86	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (118.58 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	V

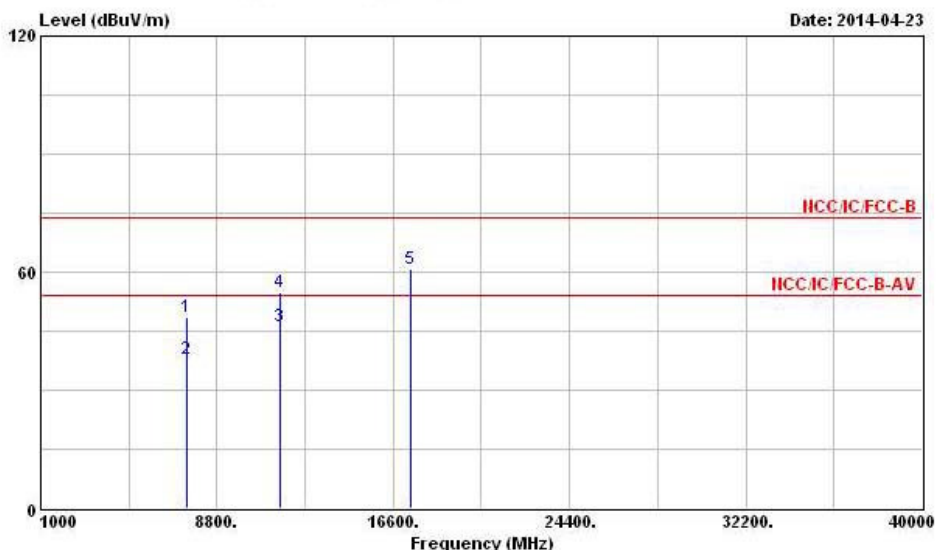

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7464.000	48.58	-25.42	74.00	42.09	35.81	5.66	34.98	Peak	---	---
2	7464.000	37.73	-16.27	54.00	31.24	35.81	5.66	34.98	Average	---	---
3	11570.000	46.23	-7.77	54.00	36.02	38.30	6.44	34.53	Average	---	---
4	11570.000	54.86	-19.14	74.00	44.65	38.30	6.44	34.53	Peak	---	---
5	17355.000	60.87			44.32	41.42	8.94	33.81	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (119.11 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	H

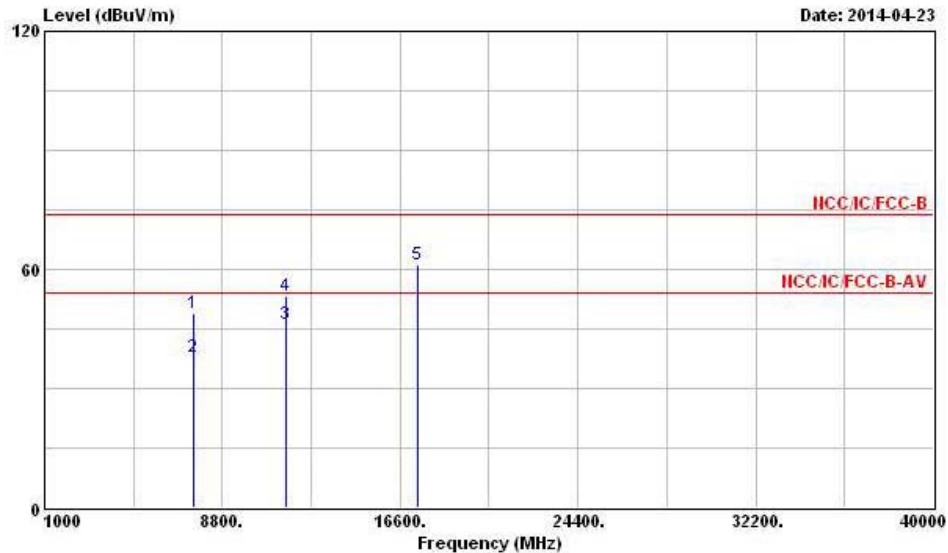

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7560.000	48.83	-25.17	74.00	42.37	35.79	5.68	35.01	Peak	---	---
2	7560.000	37.82	-16.18	54.00	31.36	35.79	5.68	35.01	Average	---	---
3	@11570.000	46.17	-7.83	54.00	35.96	38.30	6.44	34.53	Average	---	---
4	11570.000	53.18	-20.82	74.00	42.97	38.30	6.44	34.53	Peak	---	---
5	17355.000	61.28			44.73	41.42	8.94	33.81	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (119.11 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	V

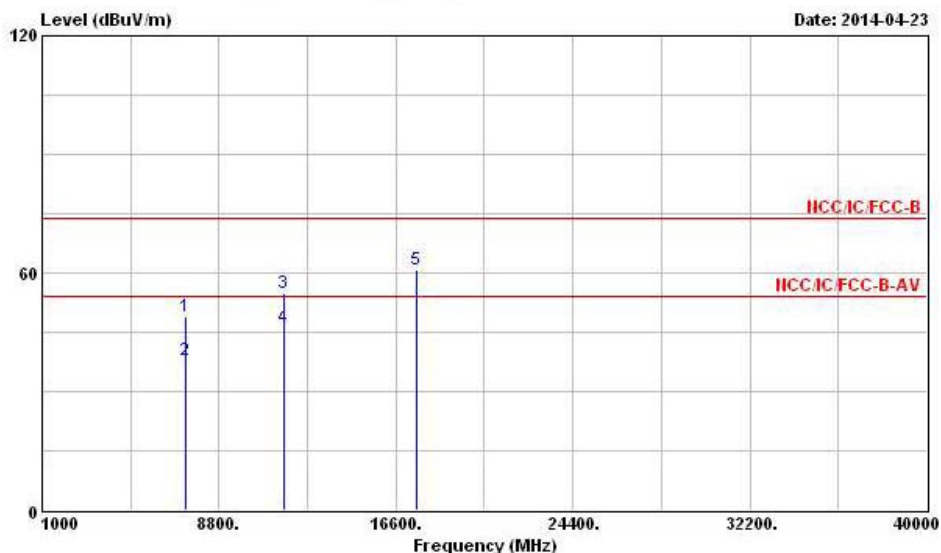

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7320.000	48.80	-25.20	74.00	42.42	35.87	5.47	34.96	Peak	---	---
2	7320.000	37.72	-16.28	54.00	31.34	35.87	5.47	34.96	Average	---	---
3	11650.000	54.93	-19.07	74.00	44.60	38.39	6.52	34.58	Peak	---	---
4	11650.000	46.10	-7.90	54.00	35.77	38.39	6.52	34.58	Average	---	---
5	17475.000	60.87			44.37	41.33	8.92	33.75	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (119.02 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N _{TX}	1	Polarization	H

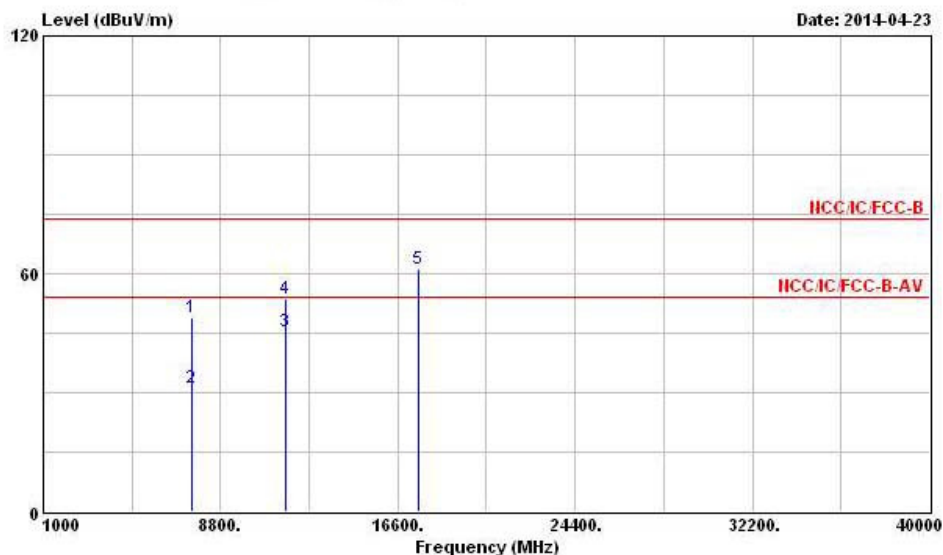

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7524.000	48.99	-25.01	74.00	42.49	35.79	5.71	35.00	Peak	---	---
2	7524.000	31.35	-22.65	54.00	24.85	35.79	5.71	35.00	Average	---	---
3	11650.000	45.45	-8.55	54.00	35.12	38.39	6.52	34.58	Average	---	---
4	11650.000	53.78	-20.22	74.00	43.45	38.39	6.52	34.58	Peak	---	---
5	17475.000	61.08			44.58	41.33	8.92	33.75	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (119.02 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	V

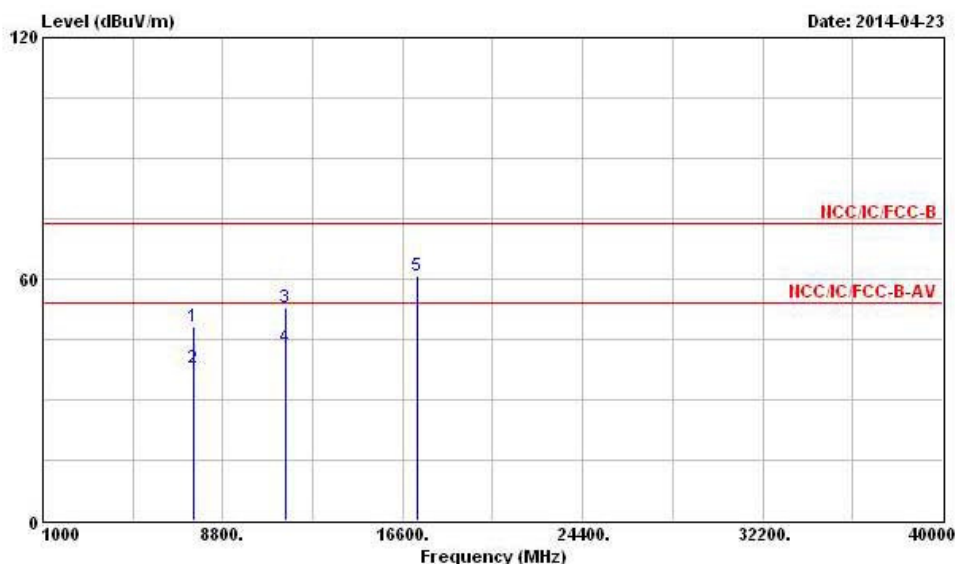

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7512.000	48.33	-25.67	74.00	41.81	35.80	5.71	34.99	Peak	---	---
2	7512.000	37.86	-16.14	54.00	31.34	35.80	5.71	34.99	Average	---	---
3	11490.000	52.97	-21.03	74.00	42.87	38.18	6.36	34.44	Peak	---	---
4	@11490.000	42.98	-11.02	54.00	32.88	38.18	6.36	34.44	Average	---	---
5	17235.000	60.94			44.33	41.51	8.96	33.86	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (119.16 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	H

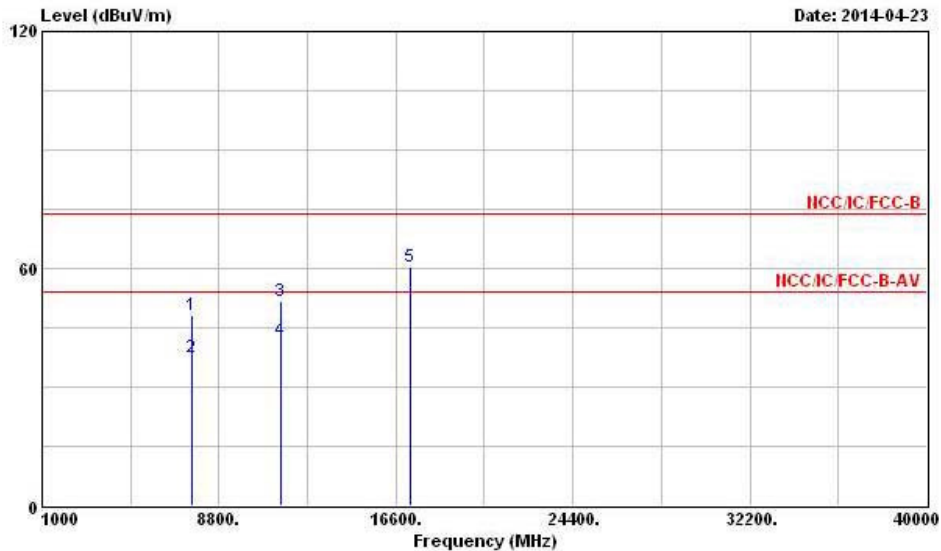

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7620.000	48.04	-25.96	74.00	41.68	35.78	5.61	35.03	Peak	---
2	7620.000	37.68	-16.32	54.00	31.32	35.78	5.61	35.03	Average	---
3	11490.000	51.88	-22.12	74.00	41.78	38.18	6.36	34.44	Peak	---
4	11490.000	41.72	-12.28	54.00	31.62	38.18	6.36	34.44	Average	---
5	17235.000	60.53			43.92	41.51	8.96	33.86	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (119.16 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	V

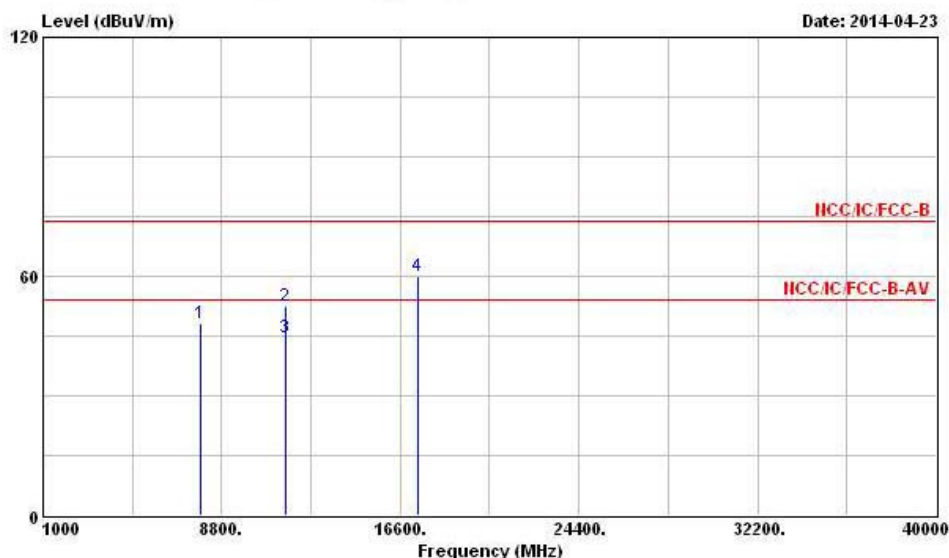

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7896.000	48.31			42.33	35.72	5.38	35.12	Peak	---	---
2	11570.000	52.42	-21.58	74.00	42.21	38.30	6.44	34.53	Peak	---	---
3	11570.000	44.56	-9.44	54.00	34.35	38.30	6.44	34.53	Average	---	---
4	17355.000	60.02			43.47	41.42	8.94	33.81	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (117.44 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	H

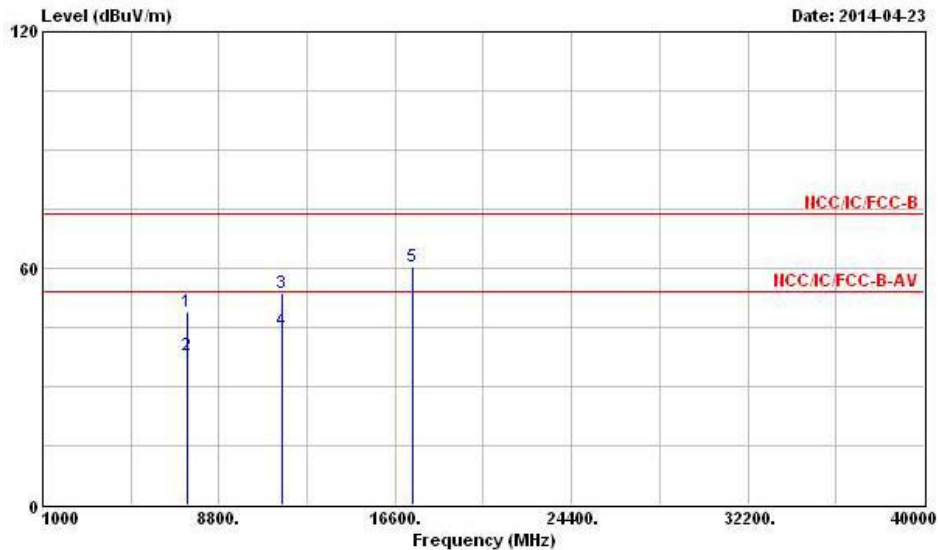

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7416.000	48.85	-25.15	74.00	42.39	35.83	5.61	34.98	Peak	---	---
2	7416.000	37.77	-16.23	54.00	31.31	35.83	5.61	34.98	Average	---	---
3	11570.000	53.86	-20.14	74.00	43.65	38.30	6.44	34.53	Peak	---	---
4	11570.000	44.32	-9.68	54.00	34.11	38.30	6.44	34.53	Average	---	---
5	17355.000	60.52			43.97	41.42	8.94	33.81	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (117.44 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	V

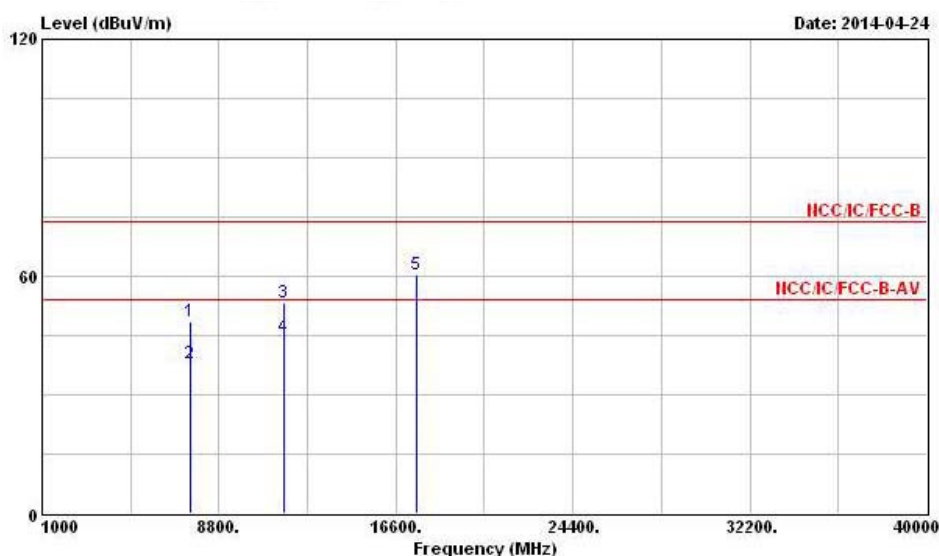

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7524.000	48.45	-25.55	74.00	41.95	35.79	5.71	35.00	Peak	---	---
2	7524.000	37.71	-16.29	54.00	31.21	35.79	5.71	35.00	Average	---	---
3	11650.000	53.22	-20.78	74.00	42.89	38.39	6.52	34.58	Peak	---	---
4	11650.000	44.41	-9.59	54.00	34.08	38.39	6.52	34.58	Average	---	---
5	17475.000	60.58			44.08	41.33	8.92	33.75	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (115.88 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	H

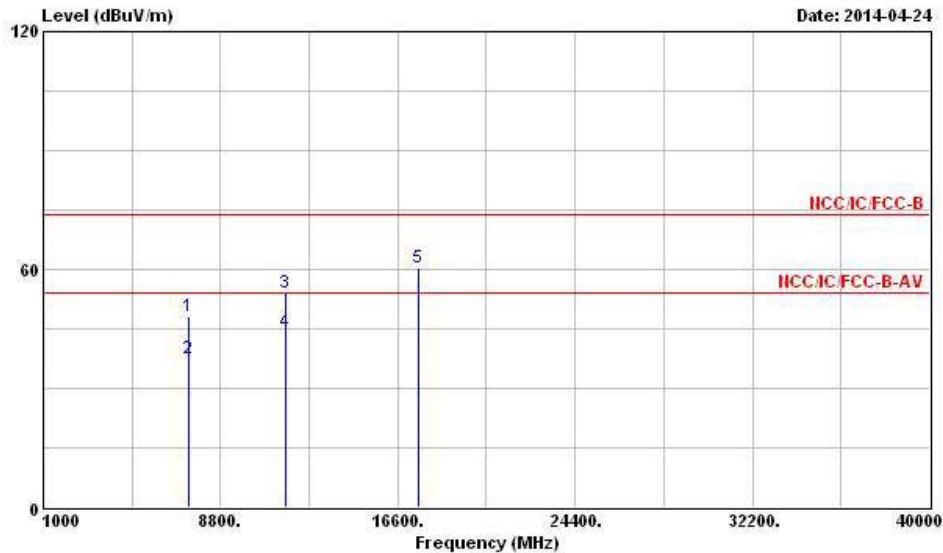

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7368.000	48.05	-25.95	74.00	41.65	35.85	5.52	34.97	Peak	---
2	7368.000	37.69	-16.31	54.00	31.29	35.85	5.52	34.97	Average	---
3	11650.000	54.09	-19.91	74.00	43.76	38.39	6.52	34.58	Peak	---
4	11650.000	44.30	-9.70	54.00	33.97	38.39	6.52	34.58	Average	---
5	17475.000	60.48			43.98	41.33	8.92	33.75	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (115.88 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5755
N_{TX}	1	Polarization	V

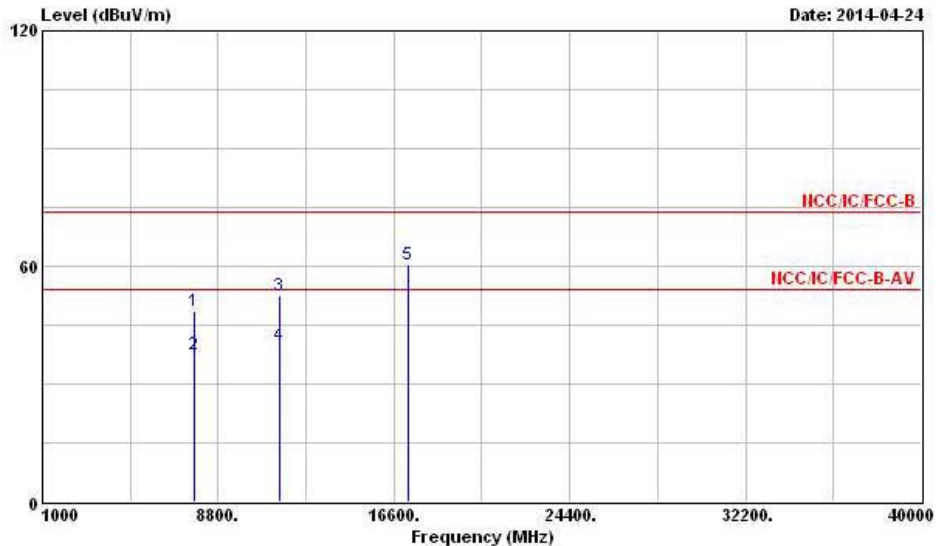

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7716.000	48.57	-25.43	74.00	42.33	35.76	5.54	35.06	Peak	---	---
2	7716.000	37.60	-16.40	54.00	31.36	35.76	5.54	35.06	Average	---	---
3	11510.000	52.60	-21.40	74.00	42.52	38.20	6.36	34.48	Peak	---	---
4	11510.000	39.94	-14.06	54.00	29.86	38.20	6.36	34.48	Average	---	---
5	17265.000	60.36			43.76	41.49	8.95	33.84	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (115.75 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5755
N_{TX}	1	Polarization	H

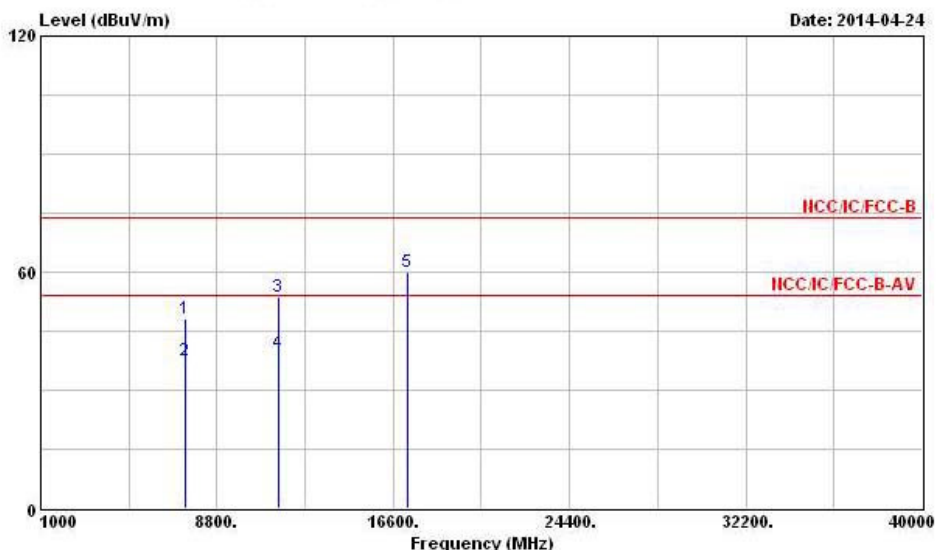

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7380.000	48.16	-25.84	74.00	41.71	35.85	5.57	34.97	Peak	---	---
2	7380.000	37.67	-16.33	54.00	31.22	35.85	5.57	34.97	Average	---	---
3	11510.000	53.66	-20.34	74.00	43.58	38.20	6.36	34.48	Peak	---	---
4	11510.000	39.41	-14.59	54.00	29.33	38.20	6.36	34.48	Average	---	---
5	17265.000	60.19			43.59	41.49	8.95	33.84	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (115.75 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5795
N_{TX}	1	Polarization	V

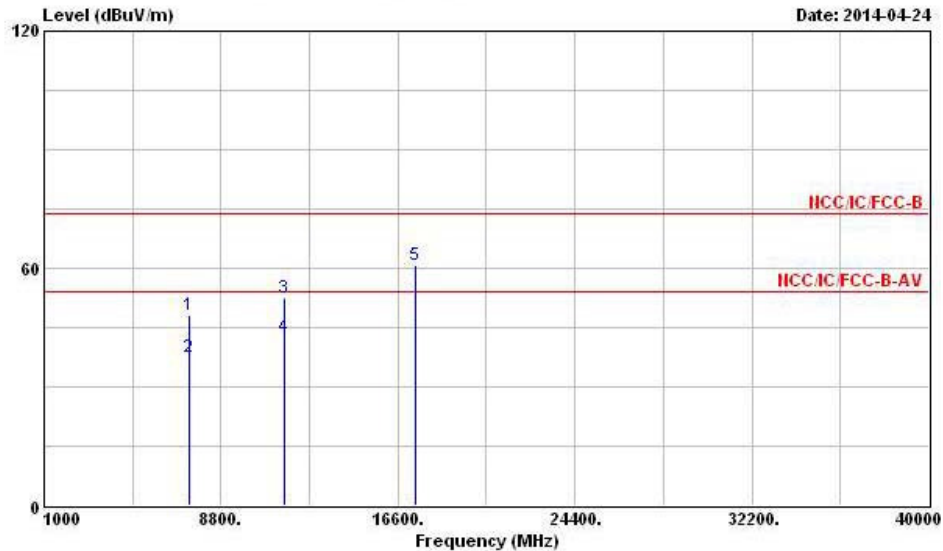

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7416.000	48.13	-25.87	74.00	41.67	35.83	5.61	34.98	Peak	---	---
2	7416.000	37.68	-16.32	54.00	31.22	35.83	5.61	34.98	Average	---	---
3	11590.000	52.58	-21.42	74.00	42.31	38.32	6.48	34.53	Peak	---	---
4	@11590.000	42.78	-11.22	54.00	32.51	38.32	6.48	34.53	Average	---	---
5	17385.000	60.82			44.29	41.39	8.93	33.79	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (114.93 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5795
N_{TX}	1	Polarization	H

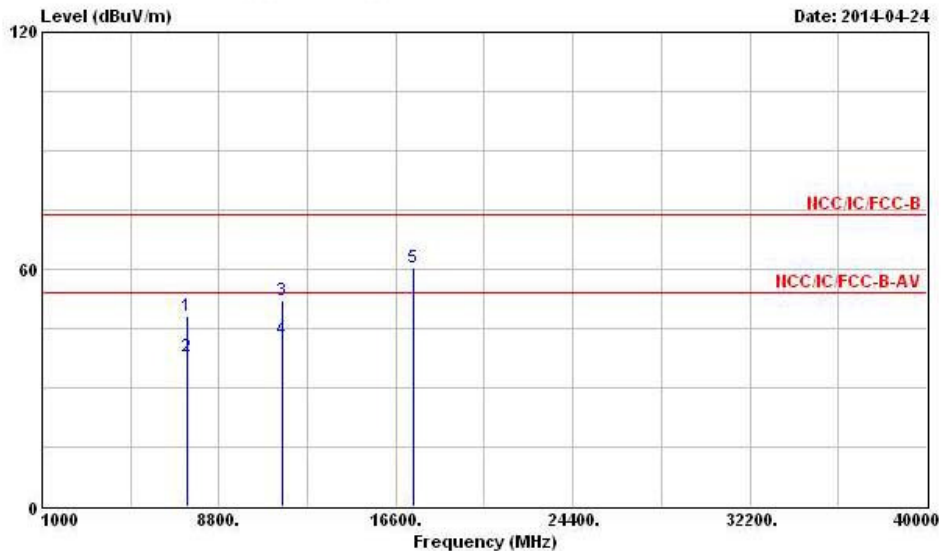

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7380.000	47.97	-26.03	74.00	41.52	35.85	5.57	34.97	Peak	---	---
2	7380.000	37.82	-16.18	54.00	31.37	35.85	5.57	34.97	Average	---	---
3	11590.000	52.28	-21.72	74.00	42.01	38.32	6.48	34.53	Peak	---	---
4	11590.000	42.28	-11.72	54.00	32.01	38.32	6.48	34.53	Average	---	---
5	17385.000	60.34			43.81	41.39	8.93	33.79	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (114.93 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	V

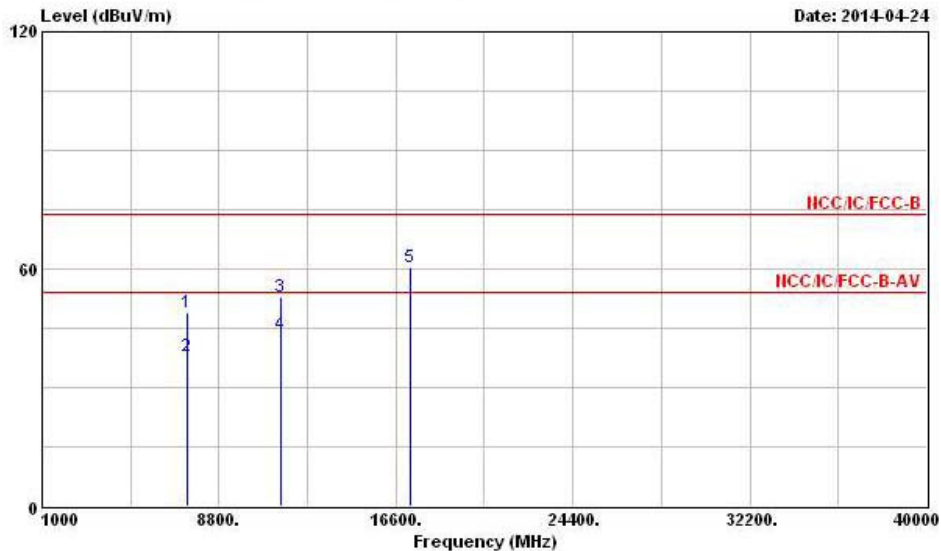

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7416.000	48.78	-25.22	74.00	42.32	35.83	5.61	34.98	Peak	---	---
2	7416.000	37.81	-16.19	54.00	31.35	35.83	5.61	34.98	Average	---	---
3	11490.000	52.75	-21.25	74.00	42.65	38.18	6.36	34.44	Peak	---	---
4	11490.000	43.31	-10.69	54.00	33.21	38.18	6.36	34.44	Average	---	---
5	17235.000	60.45			43.84	41.51	8.96	33.86	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (118.99 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
N_{TX}	1	Polarization	H

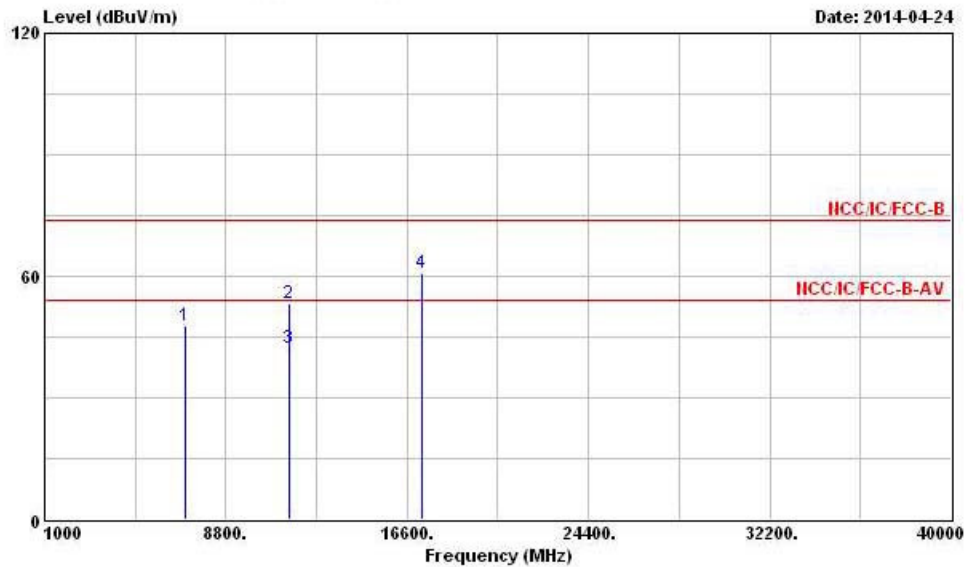

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Rnt Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7044.000	47.87			41.65	35.98	5.14	34.90	Peak	---	---
2	11490.000	53.20	-20.80	74.00	43.10	38.18	6.36	34.44	Peak	---	---
3	11490.000	42.10	-11.90	54.00	32.00	38.18	6.36	34.44	Average	---	---
4	17235.000	60.71			44.10	41.51	8.96	33.86	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (118.99 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	V

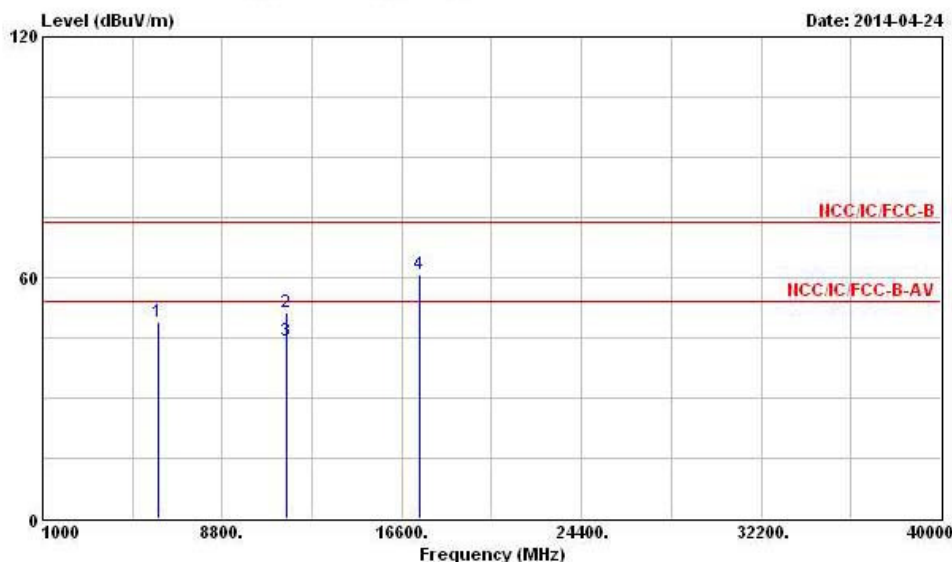

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6036.000	48.80			42.87	35.41	5.21	34.69	Peak	---
2	11570.000	51.48	-22.52	74.00	41.27	38.30	6.44	34.53	Peak	---
3	@11570.000	44.09	-9.91	54.00	33.88	38.30	6.44	34.53	Average	---
4	17355.000	60.69			44.14	41.42	8.94	33.81	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (115.79 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
N_{TX}	1	Polarization	H

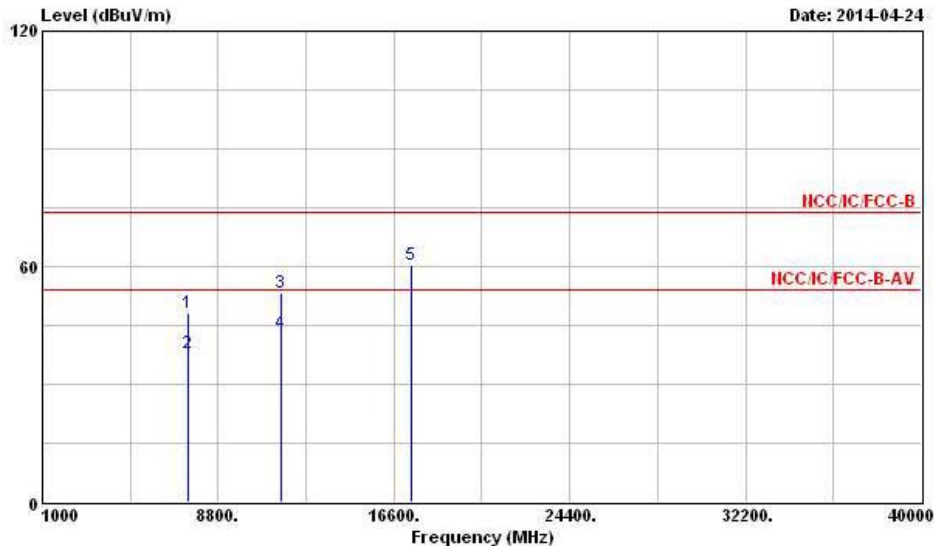

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			Rnt	Table
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Remark		Pos	Pos
					dBuV	dB/m	dB	dB		cm	deg
1	7476.000	48.07	-25.93	74.00	41.59	35.81	5.66	34.99	Peak	---	---
2	7476.000	37.82	-16.18	54.00	31.34	35.81	5.66	34.99	Average	---	---
3	11570.000	53.33	-20.67	74.00	43.12	38.30	6.44	34.53	Peak	---	---
4	@11570.000	43.22	-10.78	54.00	33.01	38.30	6.44	34.53	Average	---	---
5	17355.000	60.20			43.65	41.42	8.94	33.81	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (115.79 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N_{TX}	1	Polarization	V

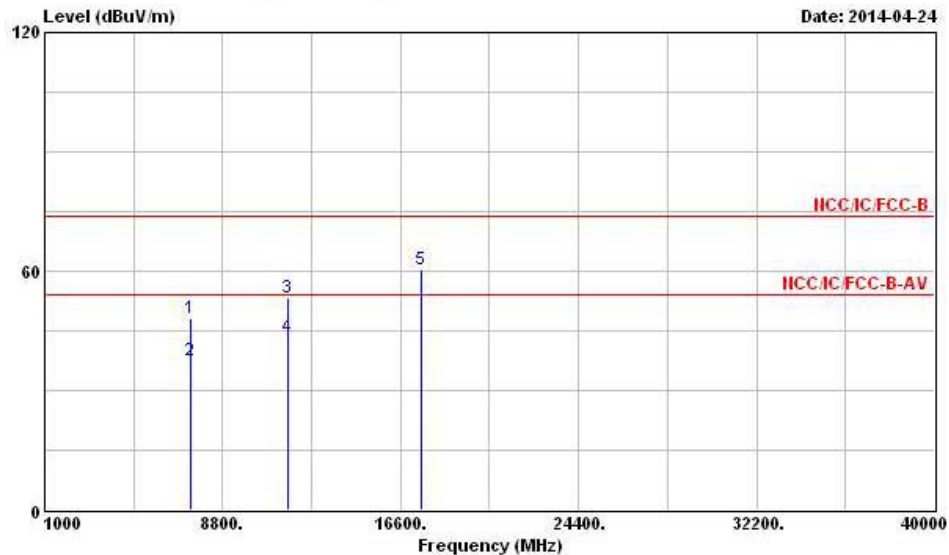

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7368.000	48.12	-25.88	74.00	41.72	35.85	5.52	34.97	Peak	---	---
2	7368.000	37.52	-16.48	54.00	31.12	35.85	5.52	34.97	Average	---	---
3	11650.000	53.37	-20.63	74.00	43.04	38.39	6.52	34.58	Peak	---	---
4	11650.000	43.35	-10.65	54.00	33.02	38.39	6.52	34.58	Average	---	---
5	17475.000	60.32			43.82	41.33	8.92	33.75	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (118.26 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N _{TX}	1	Polarization	H

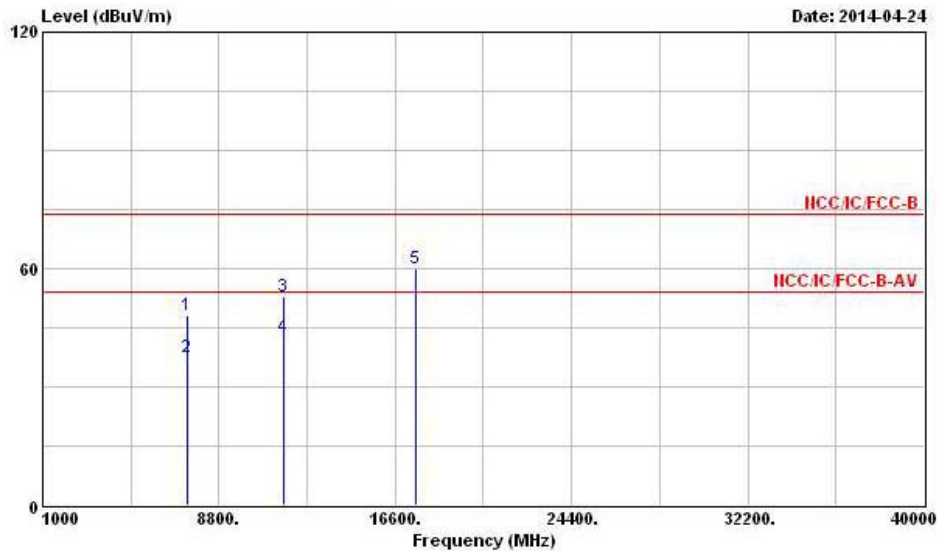

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7428.000	48.08	-25.92	74.00	41.62	35.83	5.61	34.98	Peak	---	---
2	7428.000	37.66	-16.34	54.00	31.20	35.83	5.61	34.98	Average	---	---
3	11650.000	52.73	-21.27	74.00	42.40	38.39	6.52	34.58	Peak	---	---
4	@11650.000	42.70	-11.30	54.00	32.37	38.39	6.52	34.58	Average	---	---
5	17475.000	59.99			43.49	41.33	8.92	33.75	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (118.26 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
N_{TX}	1	Polarization	V

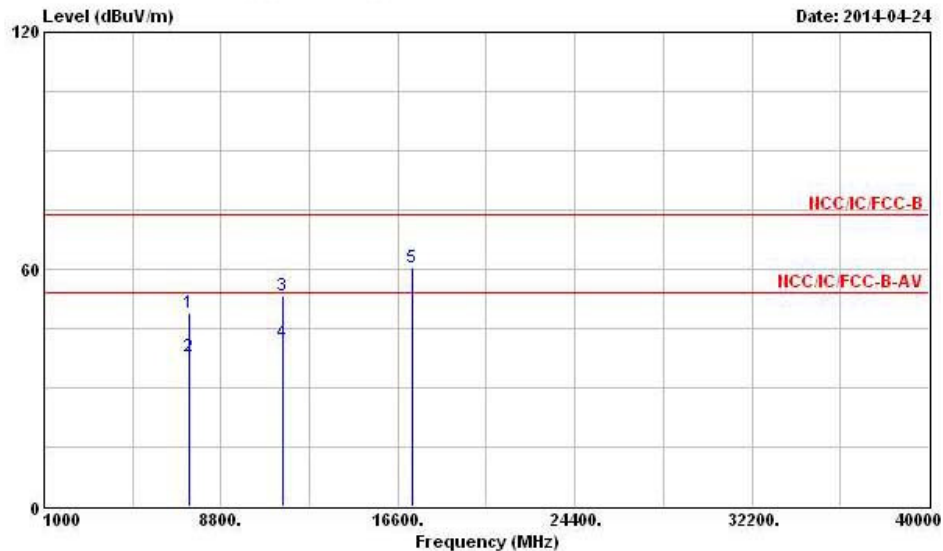

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7380.000	48.94	-25.06	74.00	42.49	35.85	5.57	34.97	Peak	---	---
2	7380.000	37.79	-16.21	54.00	31.34	35.85	5.57	34.97	Average	---	---
3	11510.000	53.16	-20.84	74.00	43.08	38.20	6.36	34.48	Peak	---	---
4	11510.000	41.28	-12.72	54.00	31.20	38.20	6.36	34.48	Average	---	---
5	17265.000	60.28			43.68	41.49	8.95	33.84	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (117.09 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
N_{TX}	1	Polarization	H

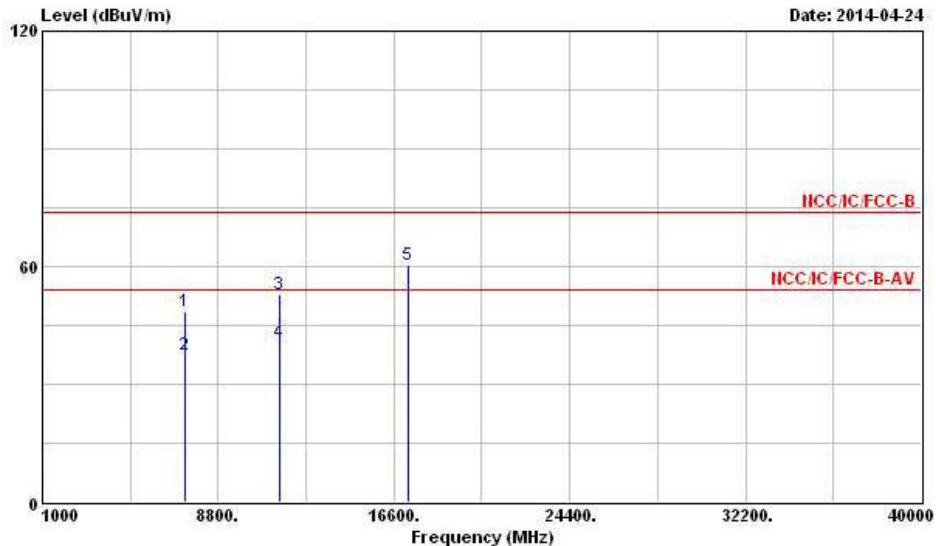

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp				
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7320.000	48.64	-25.36	74.00	42.26	35.87	5.47	34.96	Peak	---	---
2	7320.000	37.68	-16.32	54.00	31.30	35.87	5.47	34.96	Average	---	---
3	11510.000	52.95	-21.05	74.00	42.87	38.20	6.36	34.48	Peak	---	---
4	11510.000	40.64	-13.36	54.00	30.56	38.20	6.36	34.48	Average	---	---
5	17265.000	60.57			43.97	41.49	8.95	33.84	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (117.09 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
N_{TX}	1	Polarization	V

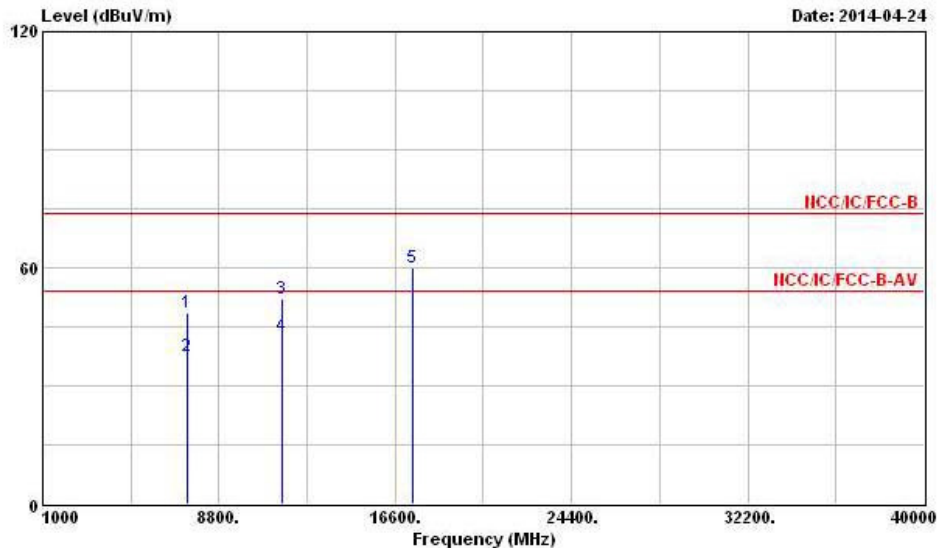

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			Rnt	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7380.000	48.42	-25.58	74.00	41.97	35.85	5.57	34.97	Peak	---	---
2	7380.000	37.63	-16.37	54.00	31.18	35.85	5.57	34.97	Average	---	---
3	11590.000	52.23	-21.77	74.00	41.96	38.32	6.48	34.53	Peak	---	---
4	11590.000	42.47	-11.53	54.00	32.20	38.32	6.48	34.53	Average	---	---
5	17385.000	60.02			43.49	41.39	8.93	33.79	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (116.46 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
N_{TX}	1	Polarization	H

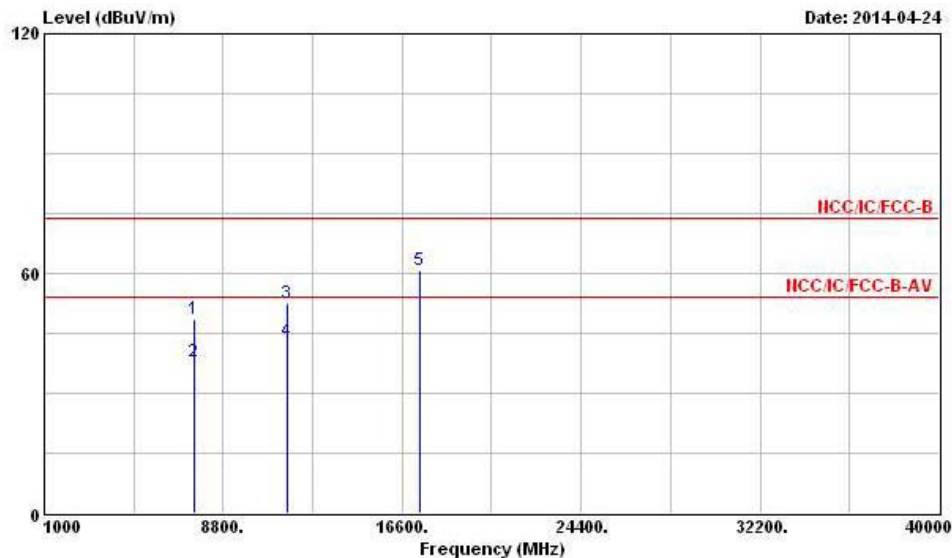

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7512.000	48.55	-25.45	74.00	42.03	35.80	5.71	34.99	Peak	---	---
2	7512.000	37.85	-16.15	54.00	31.33	35.80	5.71	34.99	Average	---	---
3	11590.000	52.50	-21.50	74.00	42.23	38.32	6.48	34.53	Peak	---	---
4	11590.000	43.04	-10.96	54.00	32.77	38.32	6.48	34.53	Average	---	---
5	17385.000	60.69			44.16	41.39	8.93	33.79	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (116.46 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N _{TX}	1	Polarization	V

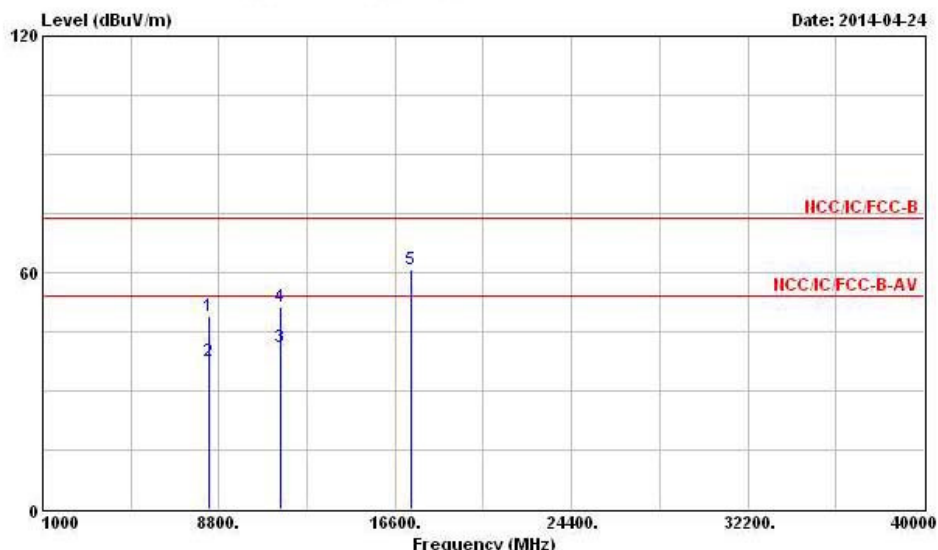

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8340.000	49.05	-24.95	74.00	42.90	35.84	5.42	35.11	Peak	---
2	8340.000	37.36	-16.64	54.00	31.21	35.84	5.42	35.11	Average	---
3	11550.000	41.20	-12.80	54.00	31.00	38.27	6.44	34.51	Average	---
4	11550.000	51.33	-22.67	74.00	41.13	38.27	6.44	34.51	Peak	---
5	17325.000	60.83			44.26	41.45	8.94	33.82	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (115.66 dBuV/m).

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N _{TX}	1	Polarization	H

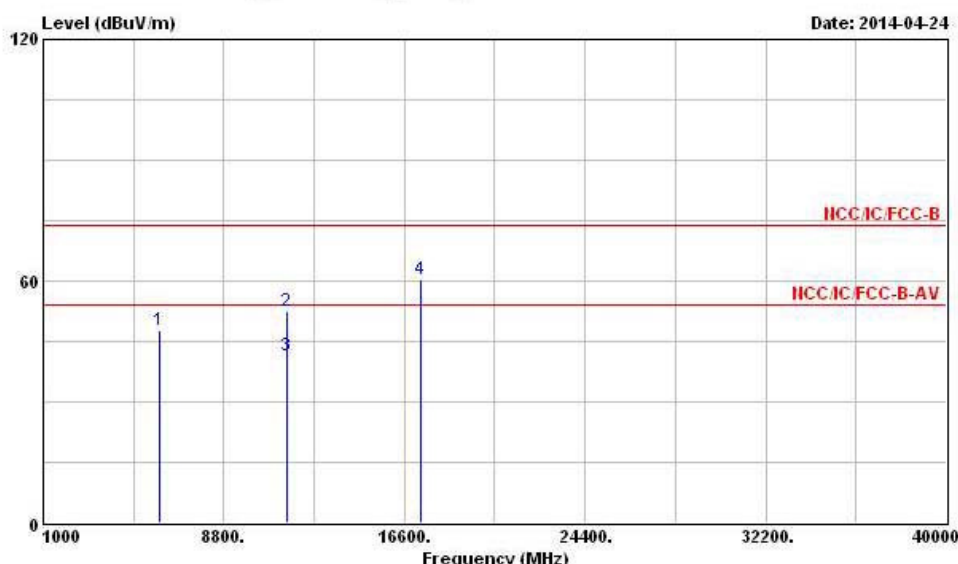

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6036.000	47.93			42.00	35.41	5.21	34.69	Peak	---
2	11550.000	52.51	-21.49	74.00	42.31	38.27	6.44	34.51	Peak	---
3	11550.000	41.29	-12.71	54.00	31.09	38.27	6.44	34.51	Average	---
4	17325.000	60.45			43.88	41.45	8.94	33.82	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (115.66 dBuV/m).

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2014	AC Conduction
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2014	AC Conduction
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Oct. 30, 2013	AC Conduction
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	AC Conduction

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 25, 2014	RF Conducted
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	RF Conducted
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100℃	Nov. 20, 2013	RF Conducted
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 27, 2013	RF Conducted
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	30MHz ~ 26.5GHz	Dec. 02, 2013	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Oct. 03, 2013	Radiated Emission
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2013	Radiated Emission
Amplifier	Agilent	8447D	2944A11149	100kHz ~ 1.3GHz	Jul. 18, 2013	Radiated Emission
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 28, 2013	Radiated Emission
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 25, 2013	Radiated Emission
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiated Emission
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 09, 2013	Radiated Emission
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2014	Radiated Emission
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 10, 2013	Radiated Emission
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiated Emission
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiated Emission
Software	Audix	E3	4.03260c	Radiate	NCR	Radiated Emission

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz ~ 40GHz	Apr. 19, 2013	Radiated Emission
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012	Radiated Emission

Note: Calibration Interval of instruments listed above is two year.