

## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.247

**Report Reference No.**.....: **MWR151101103**


**FCC ID**.....: **RQQHLT-L50SCM**

Compiled by  
( position+printed name+signature)..: File administrators Martin Ao

Supervised by  
( position+printed name+signature)..: Test Engineer Yuchao Wang

Approved by  
( position+printed name+signature)..: Manager Dixon Hao

Date of issue.....: Nov. 01, 2015





**Representative Laboratory Name** ..: **Maxwell International Co., Ltd.**

Address .....: Room 509, Hongfa center building, Baoan District, Shenzhen, Guangdong, China

**Testing Laboratory Name** .....: **Shenzhen CTL Testing Technology Co., Ltd.**

Address .....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

**Applicant's name**.....: **HYUNDAI CORPORATION**

Address .....: 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

**Test specification** .....

Standard .....: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Maxwell International Co., Ltd.

**Maxwell International Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Maxwell International Co., Ltd. as copyright owner and source of the material. Maxwell International Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....: Mobile Phone

Trade Mark .....: HYUNDAI

**Manufacturer**.....: **Skycom Telecommunications Co., Limited**

Model/Type reference.....: L505

Listed Models .....: N/A

Modulation Type .....: GFSK,8DPSK, $\pi$ /4DQPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Rating .....: DC 3.80V

Hardware version .....: WW818-MB-V0.5

Software version .....: HYUNDAI\_L505\_V4.0.3

Result.....: **PASS**

**TEST REPORT**

|                                       |               |
|---------------------------------------|---------------|
| <b>Test Report No. :</b> MWR151101103 | Nov. 01, 2015 |
|                                       | Date of issue |

Equipment under Test : Mobile Phone

Model /Type : L505

Listed Models : N/A

**Applicant** : **HYUNDAI CORPORATION**

Address : 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

**Manufacturer** : **Skycom Telecommunications Co., Limited**

Address : Rm604, East Block, Shengtang Bldg., No.1, Tairan 9 Rd.,  
Chegongmiao, Futian District, Shenzhen, China

|                     |             |
|---------------------|-------------|
| <b>Test Result:</b> | <b>PASS</b> |
|---------------------|-------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|                 |   |                  |
|-----------------|---|------------------|
| <b><u>1</u></b> | <b><u>TEST STANDARDS .....</u></b>                  | <b><u>4</u></b>  |
| <b><u>2</u></b> | <b><u>SUMMARY .....</u></b>                         | <b><u>5</u></b>  |
| 2.1             | General Remarks                                     | 5                |
| 2.2             | Product Description                                 | 5                |
| 2.3             | Equipment Under Test                                | 6                |
| 2.4             | Short description of the Equipment under Test (EUT) | 6                |
| 2.5             | EUT operation mode                                  | 6                |
| 2.6             | Internal Identification of AE used during the test  | 7                |
| 2.7             | Related Submittal(s) / Grant (s)                    | 7                |
| 2.8             | Modifications                                       | 7                |
| <b><u>3</u></b> | <b><u>TEST ENVIRONMENT .....</u></b>                | <b><u>8</u></b>  |
| 3.1             | Address of the test laboratory                      | 8                |
| 3.2             | Test Facility                                       | 8                |
| 3.3             | Environmental conditions                            | 8                |
| 3.4             | Test Conditions                                     | 8                |
| 3.5             | Summary of measurement results                      | 9                |
| 3.6             | Equipments Used during the Test                     | 10               |
| <b><u>4</u></b> | <b><u>TEST CONDITIONS AND RESULTS .....</u></b>     | <b><u>11</u></b> |
| 4.1             | AC Power Conducted Emission                         | 11               |
| 4.2             | Radiated Emission                                   | 14               |
| 4.3             | Maximum Peak Output Power                           | 20               |
| 4.4             | 20dB Bandwidth                                      | 21               |
| 4.5             | Band Edge   | 25               |
| 4.6             | Frequency Separation                                | 33               |
| 4.7             | Number of hopping frequency                         | 35               |
| 4.8             | Time of Occupancy (Dwell Time)                      | 37               |
| 4.9             | Spurious RF Conducted Emission                      | 41               |
| 4.10            | Pseudorandom Frequency Hopping Sequence             | 65               |
| 4.11            | Antenna Requirement                                 | 66               |
| <b><u>5</u></b> | <b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>    | <b><u>67</u></b> |
| <b><u>6</u></b> | <b><u>EXTERNAL PHOTOS OF THE EUT .....</u></b>      | <b><u>67</u></b> |
| <b><u>7</u></b> | <b><u>INTERNAL PHOTOS OF THE EUT .....</u></b>      | <b><u>67</u></b> |

# **1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2009](#): American National Standard for Testing Unlicensed Wireless Devices

## 2 SUMMARY

### 2.1 General Remarks

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Oct. 10, 2015 |
|                                |   |               |
| Testing commenced on           | : | Oct. 11, 2015 |
|                                |   |               |
| Testing concluded on           | : | Nov. 01, 2015 |

### 2.2 Product Description

The **HYUNDAI CORPORATION**'s Model: L505 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

|  |   |
|--|---|
| Name of EUT                            | Mobile Phone  |
| Model Number                           | L505  |
| Modulation Type                        | GMSK for GSM/GPRS, 8-PSK for EDGE, QPSK for UMTS, QPSK, 16QAM for LTE   |
| Antenna Type                           | Internal  |
| UMTS Operation Frequency Band          | Device supported UMTS FDD Band II/IV/V  |
| WLAN FCC Operation frequency           | IEEE 802.11b:2412-2462MHz<br>IEEE 802.11g:2412-2462MHz<br>IEEE 802.11n HT20:2412-2462MHz<br>IEEE 802.11n HT40:2422-2452MHz  |
| BT FCC Operation frequency             | 2402MHz-2480MHz   |
| HSDPA Release Version                  | Release 10  |
| HSUPA Release Version                  | Release 6   |
| DC-HSUPA Release Version               | Not Supported   |
| WCDMA Release Version                  | R99   |
| LTE Release Version                    | R8  |
| LTE Operation Frequency Band           | Device supported FDD band 2, FDD band 4, FDD band 7, FDD band 17  |
| WLAN FCC Modulation Type               | IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)<br>IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK)<br>IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) |
| BT Modulation Type                     | GFSK,8DPSK, $\pi$ /4DQPSK(BT 3.0+EDR)   |
| Hardware version                       | WW818-MB-V0.5   |
| Software version                       | HYUNDAI_L505_V4.0.3   |
| Android version                        | Android 4.4.2   |
| GPS function                           | Supported   |
| WLAN                                   | Supported 802.11b/802.11g/802.11n   |
| Bluetooth                              | Supported BT 4.0/BT 3.0+EDR   |
| GSM/EDGE/GPRS                          | Supported GSM/GPRS/EDGE   |
| GSM/EDGE/GPRS Power Class              | GSM850:Power Class 4/ PCS1900:Power Class 1   |
| GSM/EDGE/GPRS Operation Frequency      | GSM850 :824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz   |
| GSM/EDGE/GPRS Operation Frequency Band | GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900  |
| GSM Release Version                    | R99   |
| GPRS/EDGE Multislot Class              | GPRS/EDGE: Multi-slot Class 12  |
| Extreme temp. Tolerance                | -30°C to +50°C  |
| Extreme vol. Limits                    | 3.40VDC to 4.20VDC (nominal: 3.80VDC)   |
| GPRS operation mode                    | Class B   |

## 2.3 Equipment Under Test

### Power supply system utilised

|                      |   |                                  |                                  |                       |             |
|----------------------|---|----------------------------------|----------------------------------|-----------------------|-------------|
| Power supply voltage | : | <input type="radio"/>            | 120V / 60 Hz                     | <input type="radio"/> | 115V / 60Hz |
|                      |   | <input type="radio"/>            | 12 V DC                          | <input type="radio"/> | 24 V DC     |
|                      |   | <input checked="" type="radio"/> | Other (specified in blank below) |                       |             |

DC 3.80V

## 2.4 Short description of the Equipment under Test (EUT)

### 2.4.1 General Description

L505 is subscriber equipment in the WCDMA/GSM /LTE system. The HSPA/UMTS frequency band is Band II, Band IV and Band V, LTE frequency band is band 2, band 4, band 7,band 17; The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II and Band V and GSM850 and PCS1900 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS ,LTE and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

## 2.5 EUT operation mode

The EUT has been tested under typical operating condition. There are EDR (Enhanced Data Rate) and BDR (Basic Data Rate) mode.The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. There are 79 channels of EUT, and the test carried out at the lowest channel, middle channel and highest channel .

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 00      | 2402           | 40      | 2442           |
| 01      | 2403           | 41      | 2443           |
| 02      | 2404           | 42      | 2444           |
| 03      | 2405           | 43      | 2445           |
| 04      | 2406           | 44      | 2446           |
| 05      | 2407           | 45      | 2447           |
| 06      | 2408           | 46      | 2448           |
| 07      | 2409           | 47      | 2449           |
| 08      | 2410           | 48      | 2450           |
| 09      | 2411           | 49      | 2451           |
| 10      | 2412           | 50      | 2452           |
| 11      | 2413           | 51      | 2453           |
| 12      | 2414           | 52      | 2454           |
| 13      | 2415           | 53      | 2455           |
| 14      | 2416           | 54      | 2456           |
| 15      | 2417           | 55      | 2457           |
| 16      | 2418           | 56      | 2458           |
| 17      | 2419           | 57      | 2459           |
| 18      | 2420           | 58      | 2460           |
| 19      | 2421           | 59      | 2461           |
| 20      | 2422           | 60      | 2462           |
| 21      | 2423           | 61      | 2463           |
| 22      | 2424           | 62      | 2464           |
| 23      | 2425           | 63      | 2465           |
| 24      | 2426           | 64      | 2466           |

|    |      |    |      |
|----|------|----|------|
| 25 | 2427 | 65 | 2467 |
| 26 | 2428 | 66 | 2468 |
| 27 | 2429 | 67 | 2469 |
| 28 | 2430 | 68 | 2470 |
| 29 | 2431 | 69 | 2471 |
| 30 | 2432 | 70 | 2472 |
| 31 | 2433 | 71 | 2473 |
| 32 | 2434 | 72 | 2474 |
| 33 | 2435 | 73 | 2475 |
| 34 | 2436 | 74 | 2476 |
| 35 | 2437 | 75 | 2477 |
| 36 | 2438 | 76 | 2478 |
| 37 | 2439 | 77 | 2479 |
| 38 | 2440 | 78 | 2480 |
| 39 | 2441 |    |      |

## 2.6 Internal Identification of AE used during the test

| AE ID* | Description |
|--------|-------------|
| AE1    | Charger     |

AE1

Model: TPA-5950100UU

INPUT: 100-240V~ 50/60Hz 0.2A

OUTPUT: DC 5.0V 1.0A

\*AE ID: is used to identify the test sample in the lab internally.

## 2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: RQQHLT-L50SCM** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.8 Modifications

No modifications were implemented to meet testing criteria.

### 3 TEST ENVIRONMENT

#### 3.1 Address of the test laboratory

**Shenzhen CTL Testing Technology Co., Ltd.**

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

The test facility is recognized, certified, or accredited by the following organizations:

##### IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

##### FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

#### 3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                       |                     |
|-----------------------|---------------------|
| Temperature:          | <u>15-35 ° C</u>    |
| Humidity:             | <u>30-60 %</u>      |
| Atmospheric pressure: | <u>950-1050mbar</u> |

#### 3.4 Test Conditions

| Test Case                              | Test Conditions  |   |
|--|------------------|---|
|  | Configuration    | Description   |
| 20dB Emission Bandwidth (EBW)          | Meas. Method     | ANSI C63.10:2009  |
|  | Test Environment | NTNV  |
|  | EUT Conf.        | TM1_DH5_Ch00,TM1_DH5_Ch39,TM1_DH5_Ch78, TM3_3DH5_Ch00,TM3_3DH5_Ch39,TM3_3DH5_Ch78,  |
| Carrier Frequency Separation           | Meas. Method     | ANSI C63.10:2009  |
|  | Test Environment | NTNV  |
|  | EUT Conf.        | TM1_DH5_Hop, TM3_3DH5_Hop,  |
| Number of Hopping Channel              | Meas. Method     | ANSI C63.10:2009  |
|  | Test Environment | NTNV  |
|  | EUT Conf.        | TM1_DH5_Hop ,TM3_3DH5_Hop,  |
| Time of Occupancy (Dwell Time)         | Meas. Method     | ANSI C63.10:2009  |
|  | Test Environment | NTNV  |
|  | EUT Conf.        | TM1_DH5_Ch39 ,TM3_3DH5_Ch39.  |
| Maximum Peak Conducted Output Power    | Meas. Method     | ANSI C63.10:2009  |
|  | Test Environment | NTNV  |
|  | EUT Conf.        | TM1_DH3_Ch00,TM1_DH3_Ch39,TM1_DH3_Ch78,TM2_2DH3_Ch00,TM2_2DH3_Ch39,TM2_2DH3_Ch78,TM3_3DH3_Ch00,TM3_3DH3_Ch39,TM3_3DH3_Ch78, |
| Bandedge spurious emission (Conducted) | Meas. Method     | ANSI C63.10:2009  |
|  | Test Environment | NTNV  |
|  | EUT Conf.        | TM1_DH3_Ch00,TM1_DH3_Ch78, TM3_3DH3_Ch00,TM3_3DH3_Ch78,   |



|  |                  |   |
|--|------------------|---|
| Conducted RF Spurious Emission             | Meas. Method     | ANSI C63.10:2009  |
|  | Test Environment | NTNV  |
|  | EUT Conf.        | TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, TM3_3DH5_Ch39, TM3_3DH5_Ch78.   |
| Radiated Emissions in the Restricted Bands | Meas. Method     | ANSI C63.10:2009<br>30 MHz to 1 GHz:<br>Pre: RBW=100kHz; VBW=300kHz; Det. = Peak.<br>Final: RBW=120kHz; Det. = CISPR Quasi-Peak.<br>1 GHz to 26.5GHz:<br>Average: RBW=1 MHz; VBW= 10Hz; Det. = Peak;<br>Sweep-time= Auto; Trace = Single.<br>Peak: RBW=1 MHz; VBW= 3 MHz; Det. = Peak; Sweep-time= Auto;<br>Trace≥ MaxHold * 100. |
|  |                  |   |
|  | Test Environment | NTNV  |
|  | EUT Conf.        | 30 MHz-1GHz TM1_DH5_Ch00 (Worst Conf.).<br>1-18 GHz: TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, (Worst Conf.).   |

| Test Case                         | Test Conditions    |                              |
|-----------------------------------|--------------------|------------------------------|
|                                   | Configuration      | Description                  |
| AC Power Line Conducted Emissions | Measurement Method | AC mains conducted.          |
|                                   | Test Environment   | NTNV                         |
|                                   | EUT Configuration  | TM1_DH5_Ch39. (Worst Conf.). |

## Note:

1. For Radiated Emissions, By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.
2. For  $\pi/4$  QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worse case 8-DPSK and GFSK.

### 3.5 Summary of measurement results

| Test Specification clause | Test case  | Test Mode                      | Test Channel  | Recorded In Report             |   | Pass  | Fail                     | NA                                  | NP                       | Remark                   |
|---------------------------|--|--------------------------------|---|--------------------------------|---|---|--------------------------|-------------------------------------|--------------------------|--------------------------|
| §15.247(b)(4)             | Antenna gain                                       | GFSK                           | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK                           | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/>   | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | complies                 |
| §15.247(e)                | Power spectral density                             | -/-                            | -/-   | -/-                            | -/-   | <input type="checkbox"/>  | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | Not applicable for FHSS! |
| §15.247(a)(1)             | Carrier Frequency separation                       | GFSK<br>8DPSK                  | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>8DPSK                  | <input checked="" type="checkbox"/> Middle  | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/>  | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | complies                 |
| §15.247(a)(1)             | Number of Hopping channels                         | GFSK<br>8DPSK                  | <input checked="" type="checkbox"/> Full  | GFSK<br>8DPSK                  | <input checked="" type="checkbox"/> Full  | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/>  | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | complies                 |
| §15.247(a)(1)             | Time of Occupancy (dwell time)                     | GFSK<br>8DPSK                  | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>8DPSK                  | <input checked="" type="checkbox"/> Middle  | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/>  | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | complies                 |
| §15.247(a)(1)             | Spectrum bandwidth of a FHSS system 20dB bandwidth | GFSK<br>8DPSK                  | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>8DPSK                  | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/>  | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | complies                 |
| §15.247(b)(1)             | Maximum output power                               | GFSK<br>$\pi/4$ DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>$\pi/4$ DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/><br><input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | complies                 |
| §15.247(d)                | Band edge compliance conducted                     | GFSK<br>8DPSK                  | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest   | GFSK<br>8DPSK                  | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest   | <input checked="" type="checkbox"/><br><input checked="" type="checkbox"/>  | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | complies                 |
| §15.205                   | Band edge compliance                               | GFSK<br>8DPSK                  | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest   | GFSK                           | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest   | <input checked="" type="checkbox"/>   | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | complies                 |

|                       |   |            |   |            |   |                                     |                          |                          |                          |          |
|-----------------------|---|------------|---|------------|---|-------------------------------------|--------------------------|--------------------------|--------------------------|----------|
|                       | radiated                                |            |   |            |   |                                     |                          |                          |                          |          |
| §15.247(d)            | TX spurious emissions conducted         | GFSK 8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK 8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(d)            | TX spurious emissions radiated          | GFSK 8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK       | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.109               | RX spurious emissions radiated          | -/-        | -/-   | -/-        | -/-   | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.209(a)            | TX spurious Emissions radiated < 30 MHz | GFSK       | -/-   | GFSK       | -/-   | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.107(a)<br>§15.207 | Conducted Emissions < 30 MHz            | GFSK       | -/-   | GFSK       | -/-   | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |

## Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. We tested all test mode and recorded worst case in report


### 3.6 Equipments Used during the Test

| Test Equipment             | Manufacturer         | Model No.             | Serial No.   | Calibration Date | Calibration Due Date |
|----------------------------|----------------------|-----------------------|--------------|------------------|----------------------|
| LISN                       | R&S                  | ENV216                | 3560.6550.12 | 2015/06/02       | 2016/06/01           |
| LISN                       | R&S                  | ESH2-Z5               | 860014/010   | 2015/06/02       | 2016/06/01           |
| Bilog Antenna              | Sunol Sciences Corp. | JB1                   | A061713      | 2015/06/02       | 2016/06/01           |
| EMI Test Receiver          | R&S                  | ESCI                  | 103710       | 2015/06/02       | 2016/06/01           |
| Spectrum Analyzer          | Agilent              | N9030A                | MY49430428   | 2015/05/21       | 2016/05/20           |
| Controller                 | EM Electronics       | Controller EM 1000    | N/A          | 2015/05/21       | 2016/05/20           |
| Horn Antenna               | Sunol Sciences Corp. | DRH-118               | A062013      | 2015/05/19       | 2016/05/18           |
| Active Loop Antenna        | SCHWARZBECK          | FMZB1519              | 1519-037     | 2015/05/19       | 2016/05/18           |
| Amplifier                  | Agilent              | 8349B                 | 3008A02306   | 2015/05/19       | 2016/05/18           |
| Amplifier                  | Agilent              | 8447D                 | 2944A10176   | 2015/05/19       | 2016/05/18           |
| Temperature/Humidity Meter | Gangxing             | CTH-608               | 02           | 2015/05/20       | 2016/05/19           |
| High-Pass Filter           | K&L                  | 9SH10-2700/X12750-O/O | N/A          | 2015/05/20       | 2016/05/19           |
| High-Pass Filter           | K&L                  | 41H10-1375/U12750-O/O | N/A          | 2015/05/20       | 2016/05/19           |
| Coaxial Cables             | HUBER+SUHNER         | SUCOFLEX 104PEA-10M   | 10m          | 2015/06/02       | 2016/06/01           |
| Coaxial Cables             | HUBER+SUHNER         | SUCOFLEX 104PEA-3M    | 3m           | 2015/06/02       | 2016/06/01           |
| Coaxial Cables             | HUBER+SUHNER         | SUCOFLEX 104PEA-3M    | 3m           | 2015/06/02       | 2016/06/01           |
| RF Cable                   | Megalon              | RF-A303               | N/A          | 2015/06/02       | 2016/06/01           |
| Power Sensor               | R&S                  | NRP-Z4                | 823.3618.03  | 2015.06.02       | 2016.06.01           |
| Power Meter                | R&S                  | NRVS                  | 1020.1809.02 | 2015.06.02       | 2016.06.01           |

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

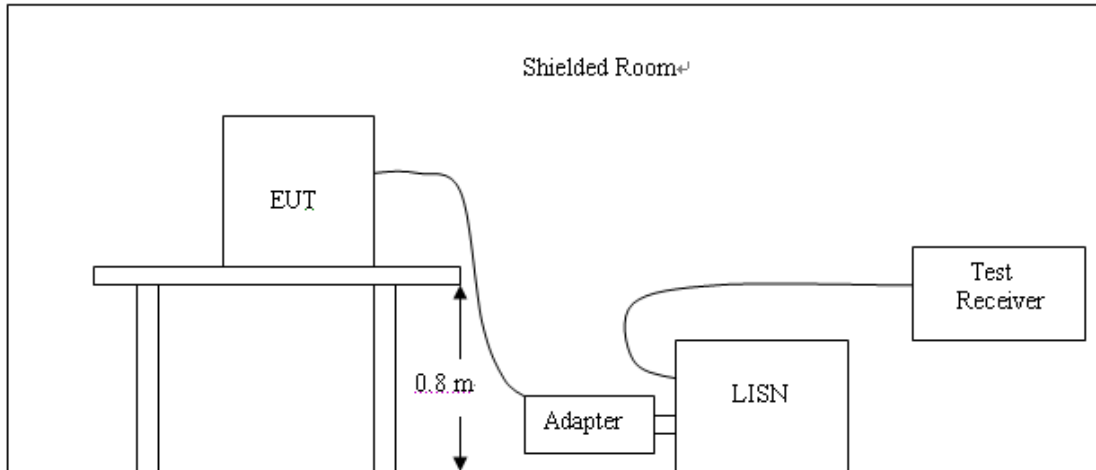

#### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency (MHz) | Maximum RF Line Voltage (dBμV) |      |         |        |
|-----------------|--------------------------------|------|---------|--------|
|                 | CLASS A                        |      | CLASS B |        |
|                 | Q.P.                           | Ave. | Q.P.    | Ave.   |
| 0.15 - 0.50     | 79                             | 66   | 66-56*  | 56-46* |
| 0.50 - 5.00     | 73                             | 60   | 56      | 46     |
| 5.00 - 30.0     | 73                             | 60   | 60      | 50     |

\* Decreasing linearly with the logarithm of the frequency


#### TEST RESULTS

*Note:* We tested Conducted Emission of GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 0.15 KHz to 30MHz (DH1, DH3 and DH5) and all channels (low, middle and high), recorded the worst case data at GFSK DH5 middle channel.

N

**SCAN TABLE: "Voltage (9K-30M)FIN"**

Short Description: 150K-30M Voltage

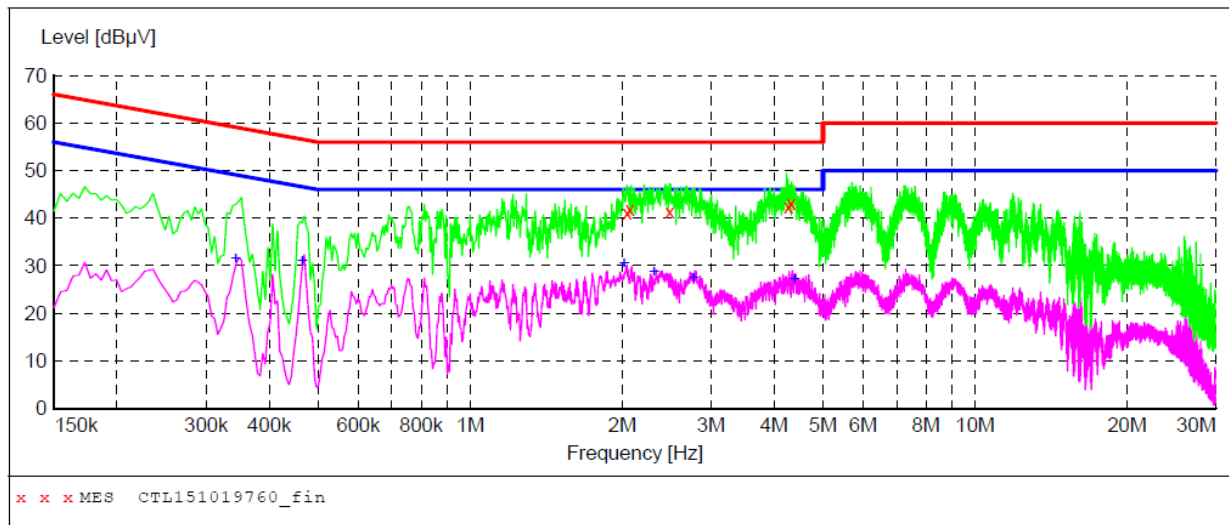**MEASUREMENT RESULT: "CTL151019760\_fin"**

10/19/2015 7:56PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 2.044501         | 41.00         | 10.4         | 56            | 15.0         | QP       | N    | GND |
| 2.071501         | 42.00         | 10.4         | 56            | 14.0         | QP       | N    | GND |
| 2.485501         | 41.30         | 10.4         | 56            | 14.7         | QP       | N    | GND |
| 4.267501         | 42.40         | 10.4         | 56            | 13.6         | QP       | N    | GND |
| 4.321501         | 43.10         | 10.4         | 56            | 12.9         | QP       | N    | GND |

**MEASUREMENT RESULT: "CTL151019760\_fin2"**


10/19/2015 7:56PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.343501         | 31.30         | 10.2         | 49            | 17.8         | AV       | N    | GND |
| 0.465001         | 31.00         | 10.2         | 47            | 15.6         | AV       | N    | GND |
| 2.017501         | 30.40         | 10.4         | 46            | 15.6         | AV       | N    | GND |
| 2.314501         | 28.50         | 10.4         | 46            | 17.5         | AV       | N    | GND |
| 2.769001         | 27.30         | 10.4         | 46            | 18.7         | AV       | N    | GND |
| 4.384501         | 27.20         | 10.4         | 46            | 18.8         | AV       | N    | GND |

L

**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

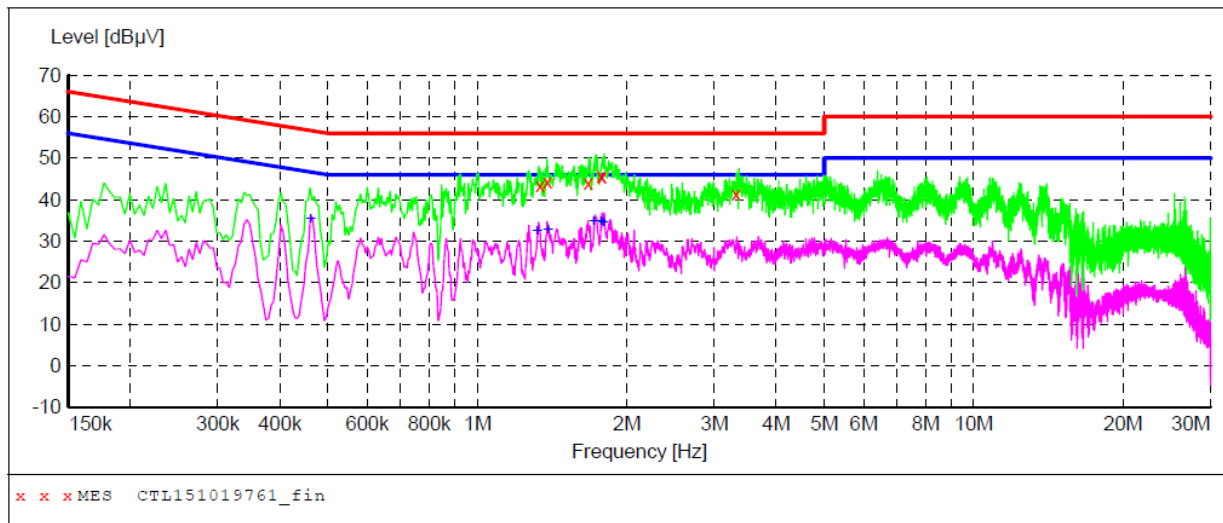**MEASUREMENT RESULT: "CTL151019761\_fin"**

10/19/2015 8:00PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 1.338001         | 43.50         | 10.3         | 56            | 12.5         | QP       | L1   | GND |
| 1.383001         | 44.20         | 10.3         | 56            | 11.8         | QP       | L1   | GND |
| 1.671001         | 43.90         | 10.3         | 56            | 12.1         | QP       | L1   | GND |
| 1.774501         | 45.80         | 10.3         | 56            | 10.2         | QP       | L1   | GND |
| 1.783501         | 45.30         | 10.3         | 56            | 10.7         | QP       | L1   | GND |
| 3.318001         | 41.40         | 10.4         | 56            | 14.6         | QP       | L1   | GND |




**MEASUREMENT RESULT: "CTL151019761\_fin2"**

10/19/2015 8:00PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.460501         | 35.30         | 10.2         | 47            | 11.4         | AV       | L1   | GND |
| 1.320001         | 32.40         | 10.3         | 46            | 13.6         | AV       | L1   | GND |
| 1.387501         | 32.50         | 10.3         | 46            | 13.5         | AV       | L1   | GND |
| 1.716001         | 34.70         | 10.3         | 46            | 11.3         | AV       | L1   | GND |
| 1.774501         | 34.70         | 10.3         | 46            | 11.3         | AV       | L1   | GND |
| 1.792501         | 34.30         | 10.3         | 46            | 11.7         | AV       | L1   | GND |

## 4.2 Radiated Emission

### TEST CONFIGURATION

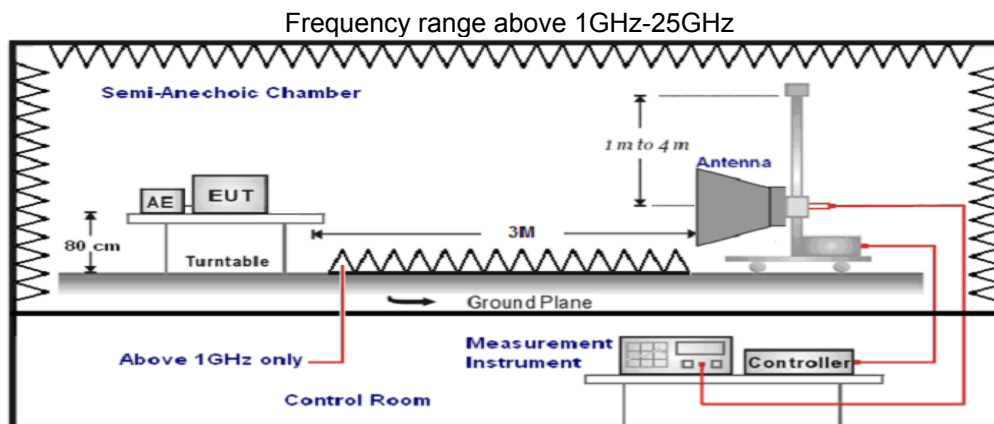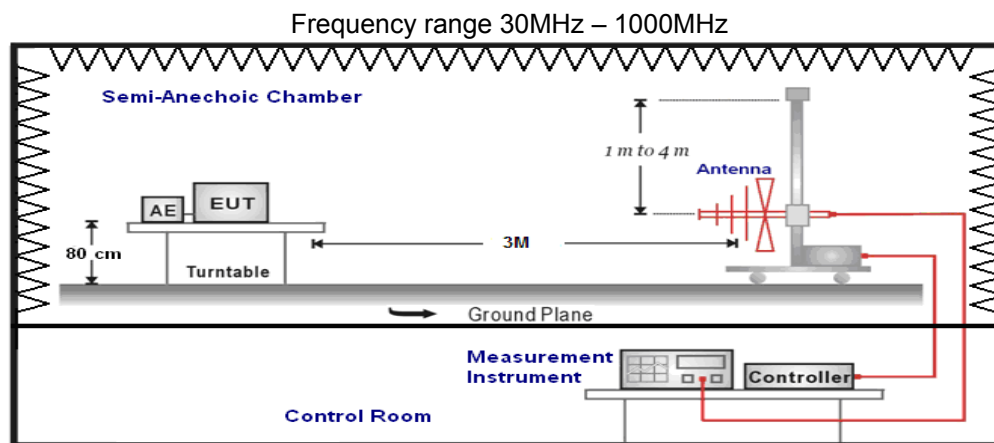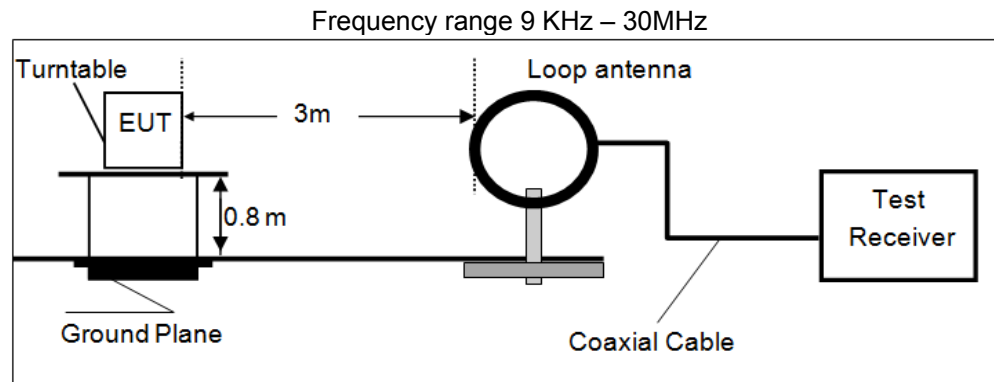

### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768 KHz and maximum operation frequency was 2480MHz. so radiated emission test frequency band from 9 KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type          | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz           | Active Loop Antenna        | 3             |
| 30MHz-1GHz           | Ultra-Broadband Antenna    | 3             |
| 1GHz-18GHz           | Double Ridged Horn Antenna | 3             |
| 18GHz-25GHz          | Horn Antenna               | 1             |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting                    | Detector           |
|----------------------|---|--------------------|
| 9KHz-150KHz          | RBW=200Hz/VBW=3KHz, Sweep time=Auto               | QP                 |
| 150KHz-30MHz         | RBW=9KHz/VBW=100KHz, Sweep time=Auto              | QP                 |
| 30MHz-1GHz           | RBW=120KHz/VBW=1000KHz, Sweep time=Auto           | QP                 |
| 1GHz-40GHz           | Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto    | Peak (Receiver)    |
|                      | Average Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto | Average (Receiver) |

### **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |  |
|---------------------------|--|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |  |

For example

| Frequency (MHz) | FS (dB $\mu$ V/m) | RA (dB $\mu$ V/m) | AF (dB) | CL (dB) | AG (dB) | Transd (dB) |
|-----------------|-------------------|-------------------|---------|---------|---------|-------------|
| 300.00          | 40                | 58.1              | 12.2    | 1.6     | 31.90   | -18.1       |

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

### **RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

| Frequency (MHz) | Distance (Meters) | Radiated (dB $\mu$ V/m)          | Radiated ( $\mu$ V/m) |
|-----------------|-------------------|----------------------------------|-----------------------|
| 0.009-0.49      | 300               | $20\log(2400/F(\text{KHz}))+80$  | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 30                | $20\log(24000/F(\text{KHz}))+40$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 30                | $20\log(30)+40$                  | 30                    |
| 30-88           | 3                 | 40.0                             | 100                   |
| 88-216          | 3                 | 43.5                             | 150                   |
| 216-960         | 3                 | 46.0                             | 200                   |
| Above 960       | 3                 | 54.0                             | 500                   |


### **TEST RESULTS**

Remark:

1. The radiated measurement are performed the each channel (low/mid/high) at all Packet type (DH1, DH3 and DH5) also for difference modulation type (GFSK, 8DPSK), recorded worst case at GFSK\_DH5\_Low channel (Channel 00) for below 1GHz and GFSK\_DH5\_Low channel (Channel 00), GFSK\_DH5\_Middle channel (Channel 39), GFSK\_DH5\_High channel (Channel 78).
2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.
3. HORN ANTENNA for the radiation emission test above 1G.
4. We tested both battery powered and powered by adapter charging mode at three orientate ones, recorded worst case at powered by adapter charging mode.
5. "---" means not recorded as emission levels lower than limit.
6. Margin= Limit - Level


**For 9KHz to 30MHz**

| Frequency (MHz) | Corrected Reading (dB $\mu$ V/m)@3m | FCC Limit (dB $\mu$ V/m) @3m | Margin (dB) | Detector | Result |
|-----------------|-------------------------------------|------------------------------|-------------|----------|--------|
| 12.65           | 47.55                               | 69.54                        | 21.99       | QP       | PASS   |
| 20.45           | 42.69                               | 69.54                        | 26.85       | QP       | PASS   |

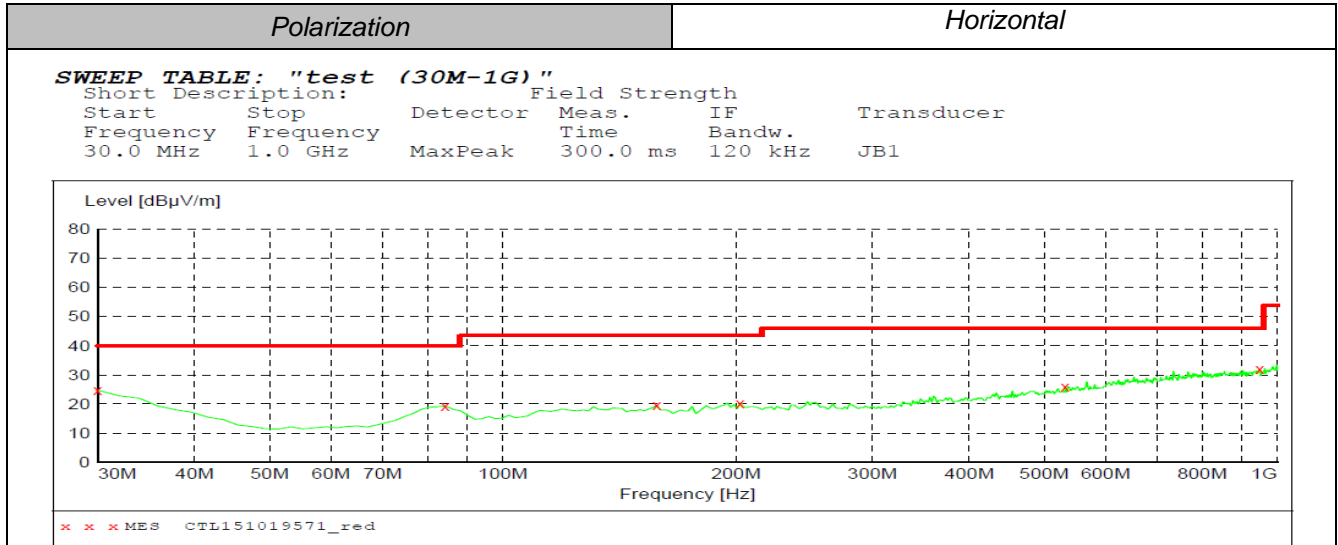**For 30MHz to 1000MHz****MEASUREMENT RESULT: "CTL151019571\_red"**

10/19/2015 9:06PM

| Frequency MHz | Level dB $\mu$ V/m | Transd dB | Limit dB $\mu$ V/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|---------------|--------------------|-----------|--------------------|-----------|------|-----------|-------------|--------------|
| 30.000000     | 24.70              | 20.8      | 40.0               | 15.3      | ---  | 0.0       | 0.00        | HORIZONTAL   |
| 84.320000     | 19.40              | 8.8       | 40.0               | 20.6      | ---  | 0.0       | 0.00        | HORIZONTAL   |
| 158.040000    | 19.60              | 13.7      | 43.5               | 23.9      | ---  | 0.0       | 0.00        | HORIZONTAL   |
| 202.660000    | 20.30              | 14.1      | 43.5               | 23.2      | ---  | 0.0       | 0.00        | HORIZONTAL   |
| 532.460000    | 26.00              | 20.5      | 46.0               | 20.0      | ---  | 0.0       | 0.00        | HORIZONTAL   |
| 949.560000    | 31.90              | 26.5      | 46.0               | 14.1      | ---  | 0.0       | 0.00        | HORIZONTAL   |

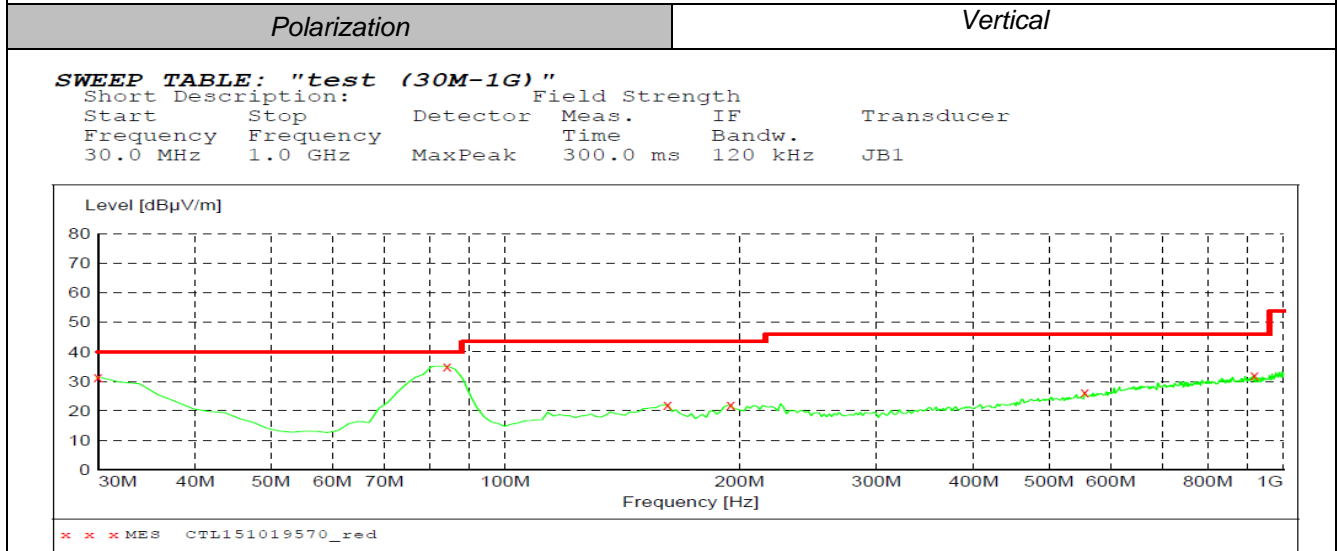**MEASUREMENT RESULT: "CTL151019570\_red"**

10/19/2015 9:04PM

| Frequency MHz | Level dB $\mu$ V/m | Transd dB | Limit dB $\mu$ V/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|---------------|--------------------|-----------|--------------------|-----------|------|-----------|-------------|--------------|
| 30.000000     | 31.50              | 20.8      | 40.0               | 8.5       | ---  | 0.0       | 0.00        | VERTICAL     |
| 84.320000     | 35.10              | 8.8       | 40.0               | 4.9       | ---  | 0.0       | 0.00        | VERTICAL     |
| 161.920000    | 22.10              | 13.6      | 43.5               | 21.4      | ---  | 0.0       | 0.00        | VERTICAL     |
| 194.900000    | 22.00              | 13.2      | 43.5               | 21.5      | ---  | 0.0       | 0.00        | VERTICAL     |
| 555.740000    | 26.20              | 21.1      | 46.0               | 19.8      | ---  | 0.0       | 0.00        | VERTICAL     |
| 918.520000    | 32.10              | 26.2      | 46.0               | 13.9      | ---  | 0.0       | 0.00        | VERTICAL     |



**For 1GHz to 25GHz**

Note: We tested GFSK Mode and 8DPSK, recorded the worst case at the GFSK (DH5) Mode.

| Frequency(MHz): |                 |                         |    | 2402           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 4804.00         | 55.59                   | PK | 74             | 18.41       | 51.08            | 33.49                 | 6.91              | 35.89              | 4.51                     |
| 1               | 4804.00         | 42.12                   | AV | 54             | 11.88       | 37.61            | 33.49                 | 6.91              | 35.89              | 4.51                     |
| 2               | 5175.25         | 43.59                   | PK | 74             | 30.41       | 36.27            | 34.49                 | 7.13              | 34.29              | 7.32                     |
| 2               | 5175.25         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 3               | 7206.00         | 46.87                   | PK | 74             | 27.13       | 35.76            | 36.95                 | 9.18              | 35.03              | 11.11                    |
| 3               | 7206.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

| Frequency(MHz): |                 |                         |    | 2402           |             | Polarity:        |                       |                   | VERTICAL           |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 4804.00         | 55.47                   | PK | 74             | 18.53       | 50.96            | 33.49                 | 6.91              | 35.89              | 4.51                     |
| 1               | 4804.00         | 42.87                   | AV | 54             | 11.13       | 38.36            | 33.49                 | 6.91              | 35.89              | 4.51                     |
| 2               | 5325.50         | 44.89                   | PK | 74             | 29.11       | 37.36            | 34.67                 | 7.22              | 34.35              | 7.53                     |
| 2               | 5325.50         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 3               | 7206.00         | 45.78                   | PK | 74             | 28.22       | 34.67            | 36.95                 | 9.18              | 35.03              | 11.11                    |
| 3               | 7206.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

| Frequency(MHz): |                 |                         |    | 2441           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 3158.75         | 40.22                   | PK | 74             | 33.78       | 39.03            | 31.14                 | 5.43              | 35.38              | 1.19                     |
| 1               | 3158.75         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 2               | 4882.00         | 55.66                   | PK | 74             | 18.34       | 49.30            | 33.60                 | 6.95              | 34.19              | 6.36                     |
| 2               | 4882.00         | 43.41                   | AV | 54             | 10.59       | 37.05            | 33.60                 | 6.95              | 34.19              | 6.36                     |
| 3               | 5233.60         | 42.69                   | PK | 74             | 31.31       | 35.05            | 34.57                 | 7.16              | 34.10              | 7.64                     |
| 3               | 5233.60         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 4               | 7323.00         | 46.32                   | PK | 74             | 27.68       | 34.62            | 37.46                 | 9.23              | 35.00              | 11.70                    |
| 4               | 7323.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

| Frequency(MHz): |                 |                         |    | 2441           |             | Polarity:        |                       |                   | VERTICAL           |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 3157.75         | 40.44                   | PK | 74             | 33.56       | 39.25            | 31.13                 | 5.43              | 35.38              | 1.19                     |
| 1               | 3157.75         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 2               | 4882.00         | 56.48                   | PK | 74             | 17.52       | 50.12            | 33.60                 | 6.95              | 34.19              | 6.36                     |
| 2               | 4882.00         | 44.75                   | AV | 54             | 9.25        | 38.39            | 33.60                 | 6.95              | 34.19              | 6.36                     |
| 3               | 5125.50         | 43.69                   | PK | 74             | 30.31       | 36.36            | 34.38                 | 7.10              | 34.16              | 7.33                     |
| 3               | 5125.50         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 4               | 7323.00         | 47.78                   | PK | 74             | 26.22       | 36.08            | 37.46                 | 9.23              | 35.00              | 11.70                    |
| 4               | 7323.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

| Frequency(MHz): |                 |                         |    | 2480           |             | Polarity:        |                       |                   | HORIZONTAL         |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 4960.00         | 55.55                   | PK | 74             | 18.45       | 50.63            | 33.84                 | 7.00              | 35.92              | 4.92                     |
| 1               | 4960.00         | 43.47                   | AV | 54             | 10.53       | 38.55            | 33.84                 | 7.00              | 35.92              | 4.92                     |
| 2               | 5349.85         | 43.96                   | PK | 74             | 30.04       | 36.40            | 34.69                 | 7.23              | 34.36              | 7.56                     |
| 2               | 5349.85         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 3               | 7440.00         | 46.51                   | PK | 74             | 27.49       | 34.56            | 37.64                 | 9.28              | 34.97              | 11.95                    |
| 3               | 7440.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.


| Frequency(MHz): |                 |                         |    | 2480           |             | Polarity:        |                       |                   | VERTICAL           |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 4960.00         | 55.66                   | PK | 74             | 18.34       | 50.74            | 33.84                 | 7.00              | 35.92              | 4.92                     |
| 1               | 4960.00         | 42.98                   | AV | 54             | 11.02       | 38.06            | 33.84                 | 7.00              | 35.92              | 4.92                     |
| 2               | 5100.50         | 43.65                   | PK | 74             | 30.35       | 36.49            | 34.33                 | 7.09              | 34.27              | 7.16                     |
| 2               | 5100.50         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 3               | 7440.00         | 45.41                   | PK | 74             | 28.59       | 33.46            | 37.64                 | 9.28              | 34.97              | 11.95                    |
| 3               | 7440.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

### 4.3 Maximum Peak Output Power

#### TEST CONFIGURATION



#### TEST PROCEDURE

According to ANSI C63.10:2009 Maximum peak conducted output power: Connect antenna port into power meter and reading Peak values.

#### LIMIT

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

#### TEST RESULTS

Remark: We test maximum peak output power at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5

##### 4.3.1 GFSK Test Mode

###### A. Test Verdict

| Channel | Frequency (MHz) | Measured Output Peak Power (dBm) | Limits (dBm) | Verdict |
|---------|-----------------|----------------------------------|--------------|---------|
| 00      | 2402            | 2.745                            | 30           | PASS    |
| 39      | 2441            | 2.801                            | 30           | PASS    |
| 78      | 2480            | 3.155                            | 30           | PASS    |

Note:

1.The test results including the cable lose.

##### 4.3.2 $\pi/4$ DQPSK Test Mode

###### A. Test Verdict

| Channel | Frequency (MHz) | Measured Output Peak Power (dBm) | Limits (dBm) | Verdict |
|---------|-----------------|----------------------------------|--------------|---------|
| 00      | 2402            | 2.250                            | 30           | PASS    |
| 39      | 2441            | 2.093                            | 30           | PASS    |
| 78      | 2480            | 2.198                            | 30           | PASS    |

Note:

1.The test results including the cable lose.

##### 4.3.3 8DPSK Test Mode

###### A. Test Verdict


| Channel | Frequency (MHz) | Measured Output Peak Power (dBm) | Limits (dBm) | Verdict |
|---------|-----------------|----------------------------------|--------------|---------|
| 00      | 2402            | 1.439                            | 30           | PASS    |
| 39      | 2441            | 1.067                            | 30           | PASS    |
| 78      | 2480            | 2.040                            | 30           | PASS    |

Note:

1.The test results including the cable lose.

## 4.4 20dB Bandwidth

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### LIMIT

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

### TEST RESULTS

#### 4.4.1 GFSK Test Mode

##### A. Test Verdict

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | Refer to Plot | Limits (MHz) | Verdict |
|---------|-----------------|----------------------|---------------|--------------|---------|
| 00      | 2402            | 0.8211               | Plot 4.4.1 A  | /            | PASS    |
| 39      | 2441            | 0.8223               | Plot 4.4.1 B  | /            | PASS    |
| 78      | 2480            | 0.8281               | Plot 4.4.1 C  | /            | PASS    |

Note: 1.The test results including the cable lose.

##### B. Test Plots



(Plot 4.4.1 A: Channel 00: 2402MHz @ GFSK)



(Plot 4.4.1 B: Channel 39: 2441MHz @ GFSK)



(Plot 4.4.1 C: Channel 78: 2480MHz @ GFSK)


#### 4.4.2 8DPSKTest Mode

##### A. Test Verdict

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | Refer to Plot | Limits (MHz) | Verdict |
|---------|-----------------|----------------------|---------------|--------------|---------|
| 00      | 2402            | 1.122                | Plot 4.4.2 A  | /            | PASS    |
| 39      | 2441            | 1.107                | Plot 4.4.2 B  | /            | PASS    |
| 78      | 2480            | 1.131                | Plot 4.4.2 C  | /            | PASS    |

Note: 1.The test results including the cable lose.

##### B. Test Plots

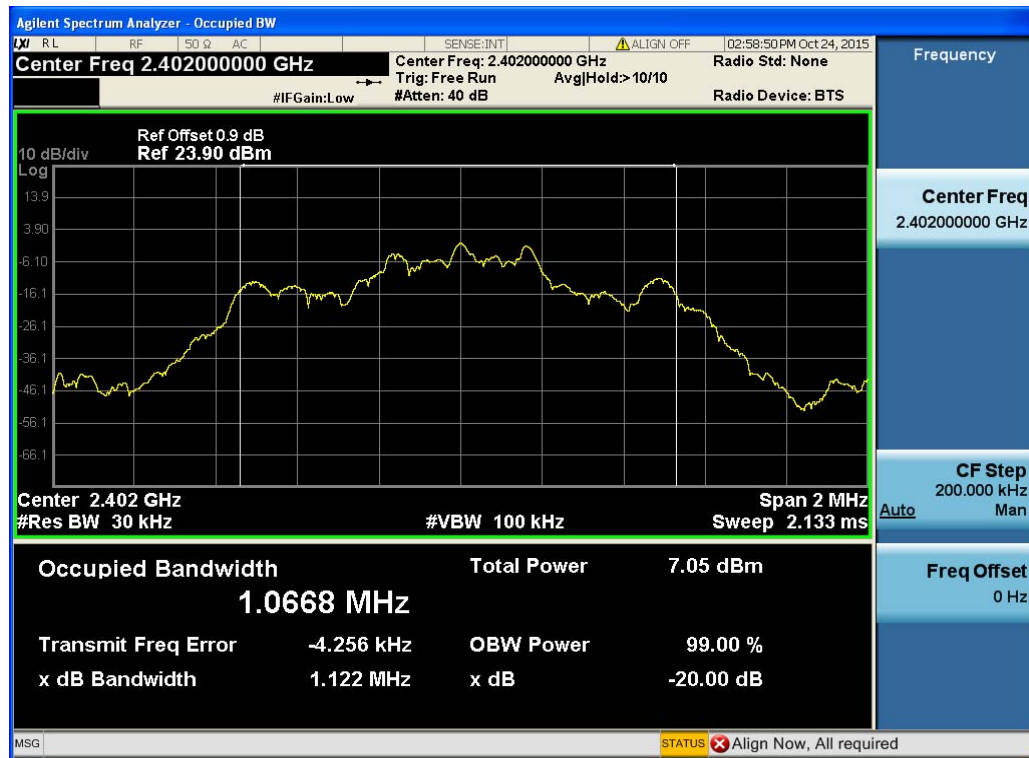

(Plot 4.4.2 A: Channel 00: 2402MHz @ 8DPSK)



(Plot 4.4.2 B: Channel 39: 2441MHz @ 8DPSK)



(Plot 4.4.2 C: Channel 78: 2480MHz @ 8DPSK)



## 4.5 Band Edge

### Applicable Standard


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST PROCEDURE


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### TEST CONFIGURATION

#### *For Radiated*

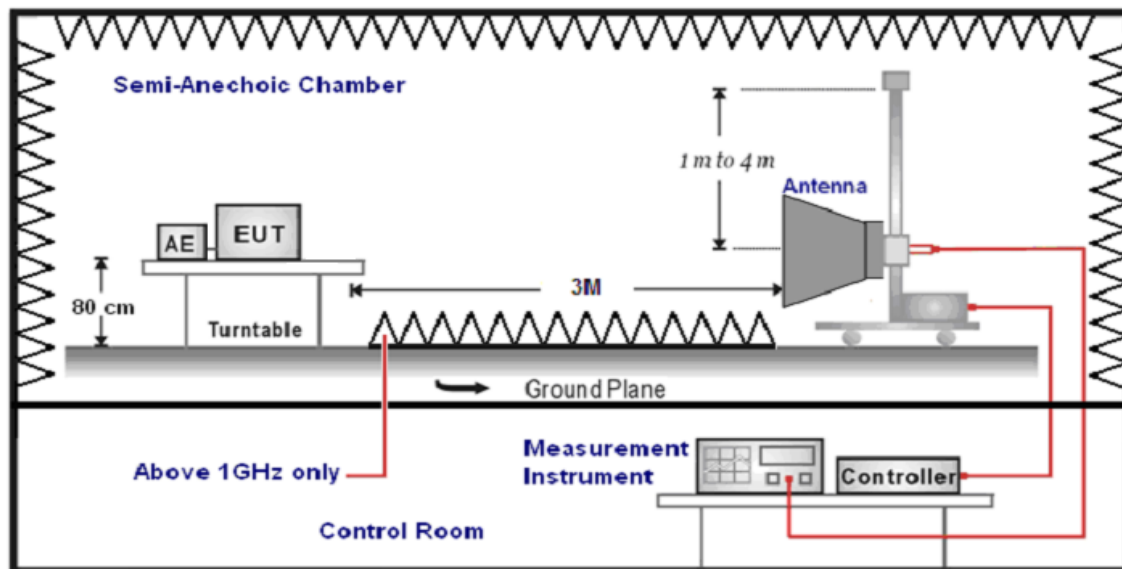

#### *For Conducted*



### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.

3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting                       | Detector              |
|----------------------|--|-----------------------|
| 1GHz-40GHz           | Peak Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto    | Peak<br>(Receiver)    |
| 1GHz-40GHz           | Average Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto | Average<br>(Receiver) |

### **LIMIT**

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

### **TEST RESULTS**


Remark:

1. We test Band Edge at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5.
2. “---” means not recorded as emission levels lower than limit.


#### **4.5.1 For Radiated Bandedge Measurement**

Remark: we tested radiated bandedge at both hopping and no-hopping modes, recorded worst case at no-hopping mode

## 4.5.1.1 GFSK Test Mode

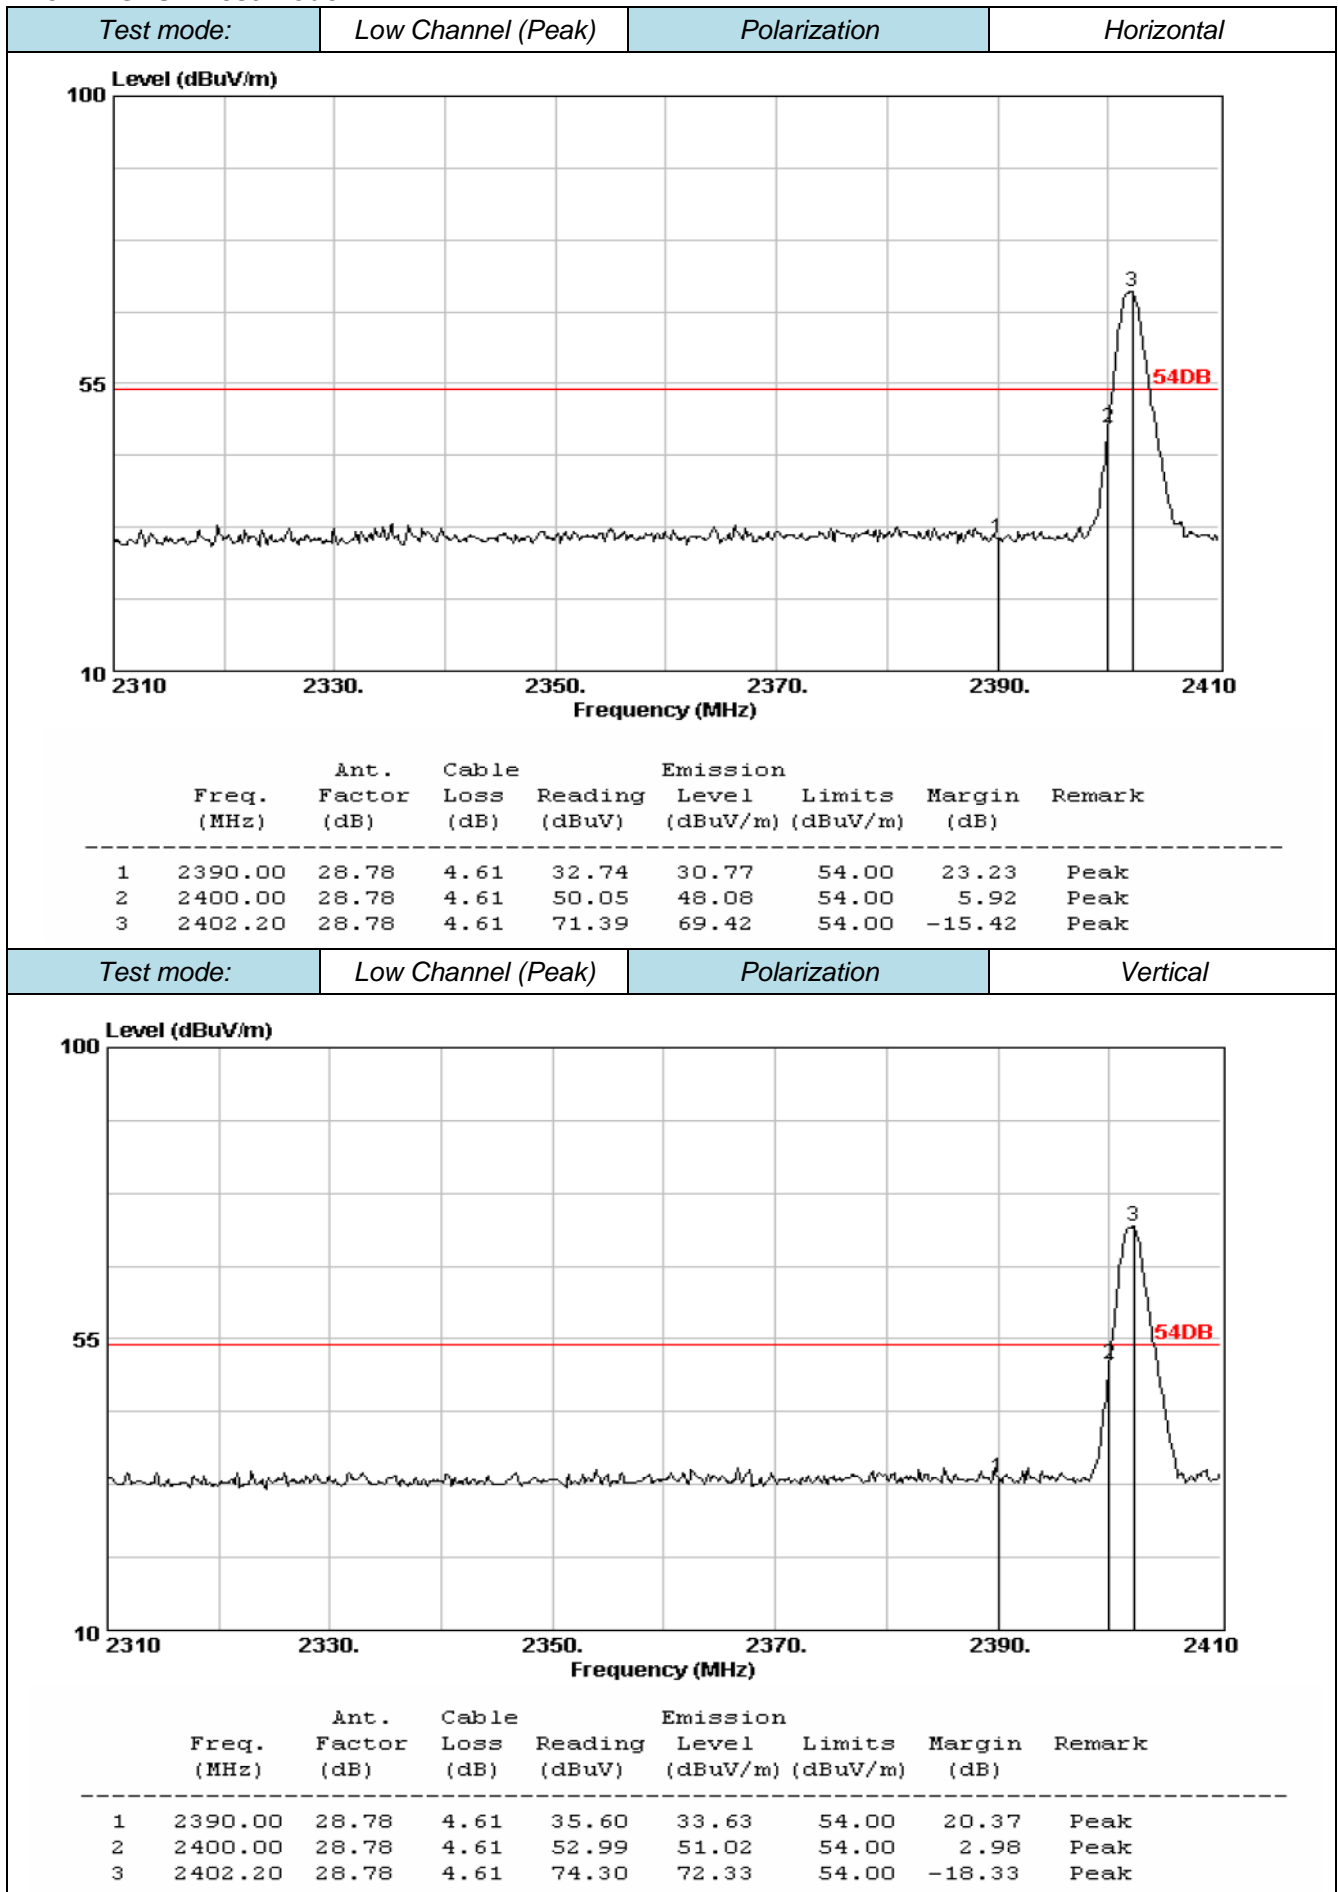


Remark: For the peak measured value complies with the average limit, the average measurement not performed

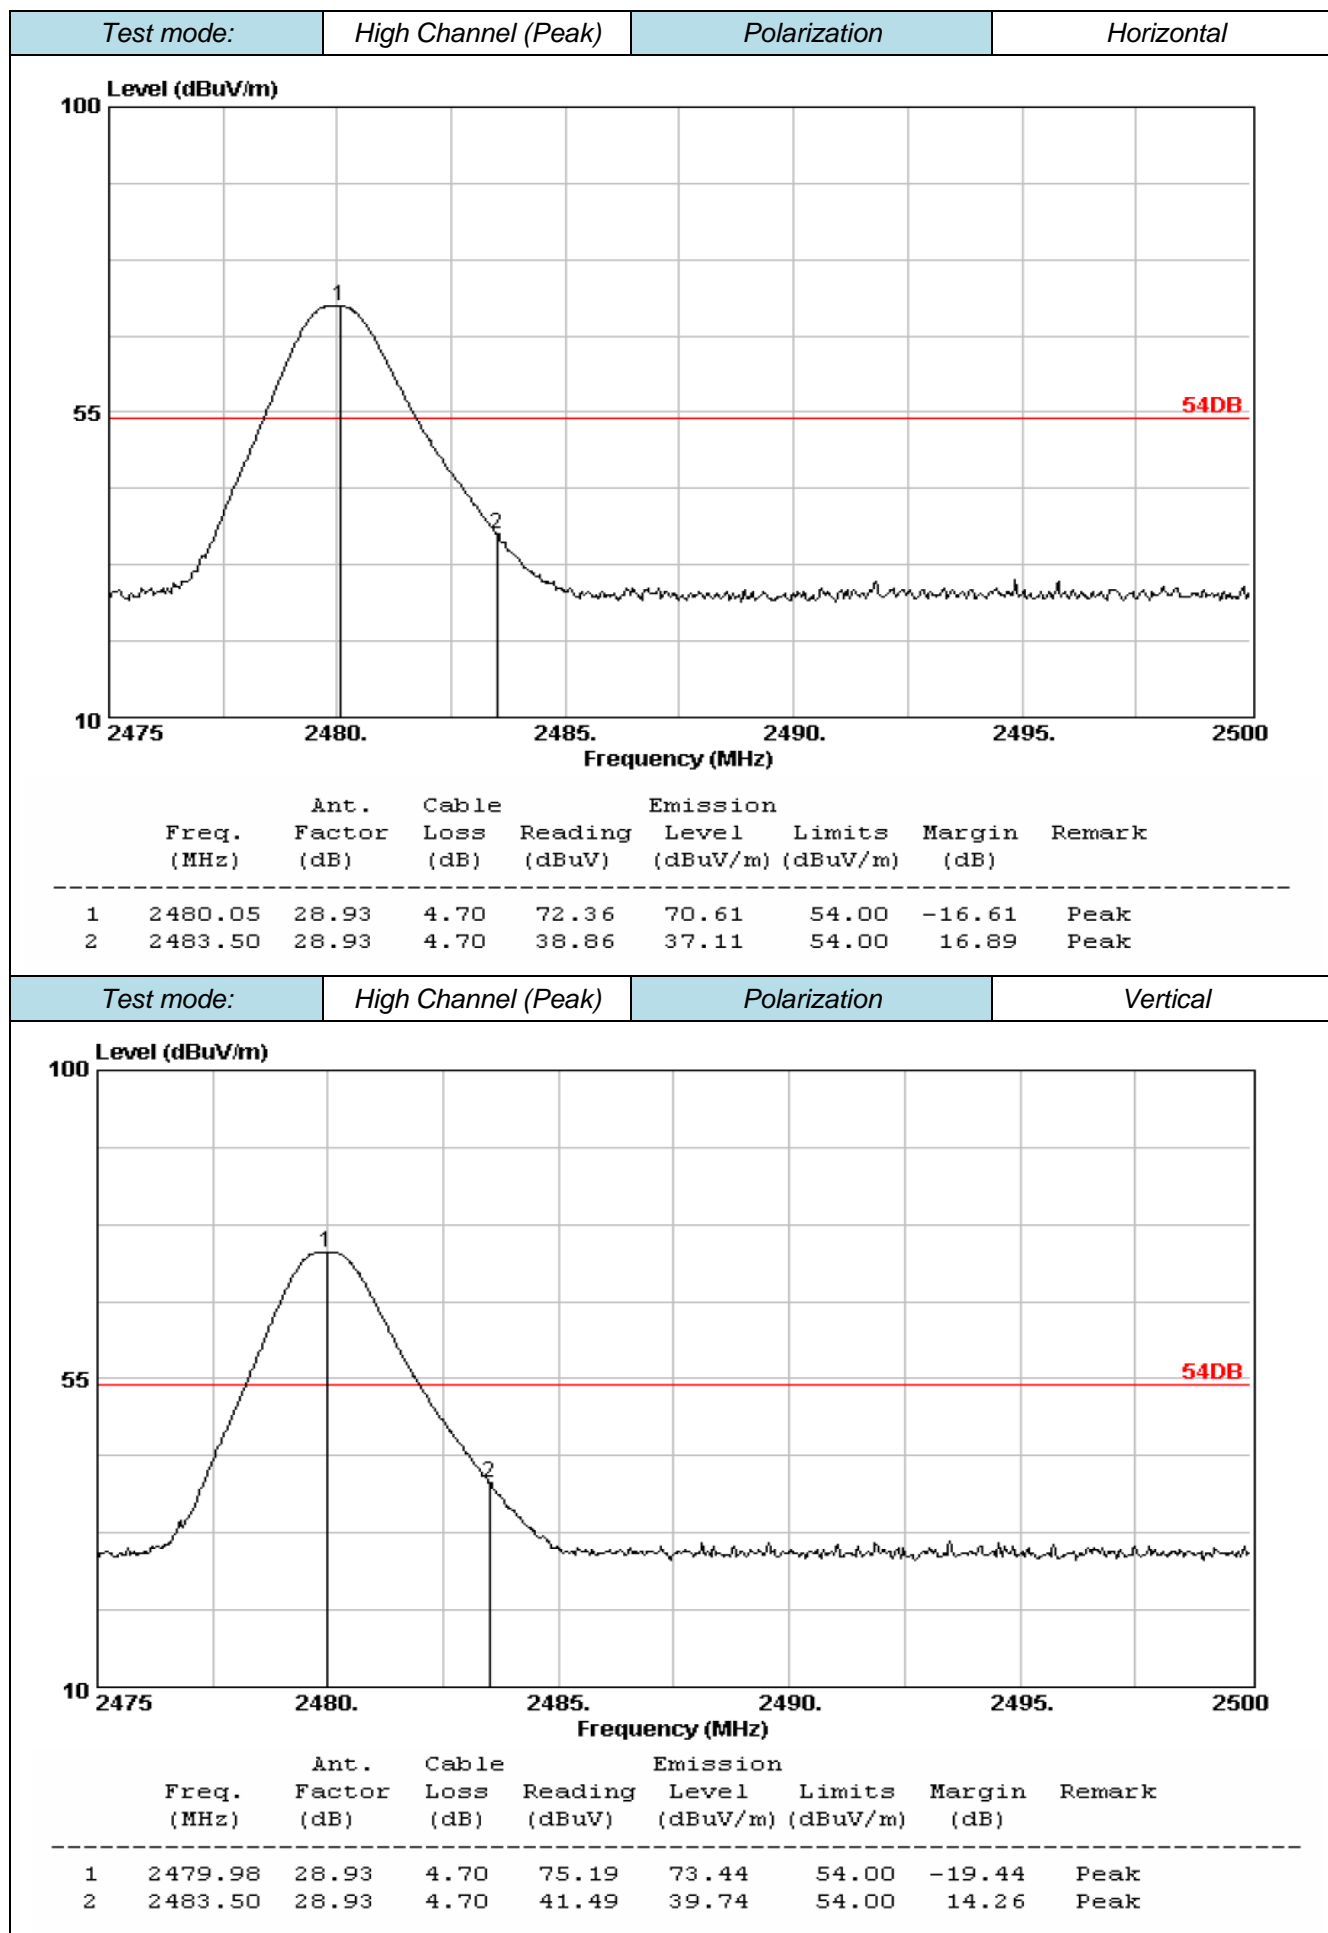


Remark: For the peak measured value complies with the average limit, the average measurement not performed

## 4.5.1.2 8DPSKTest Mode

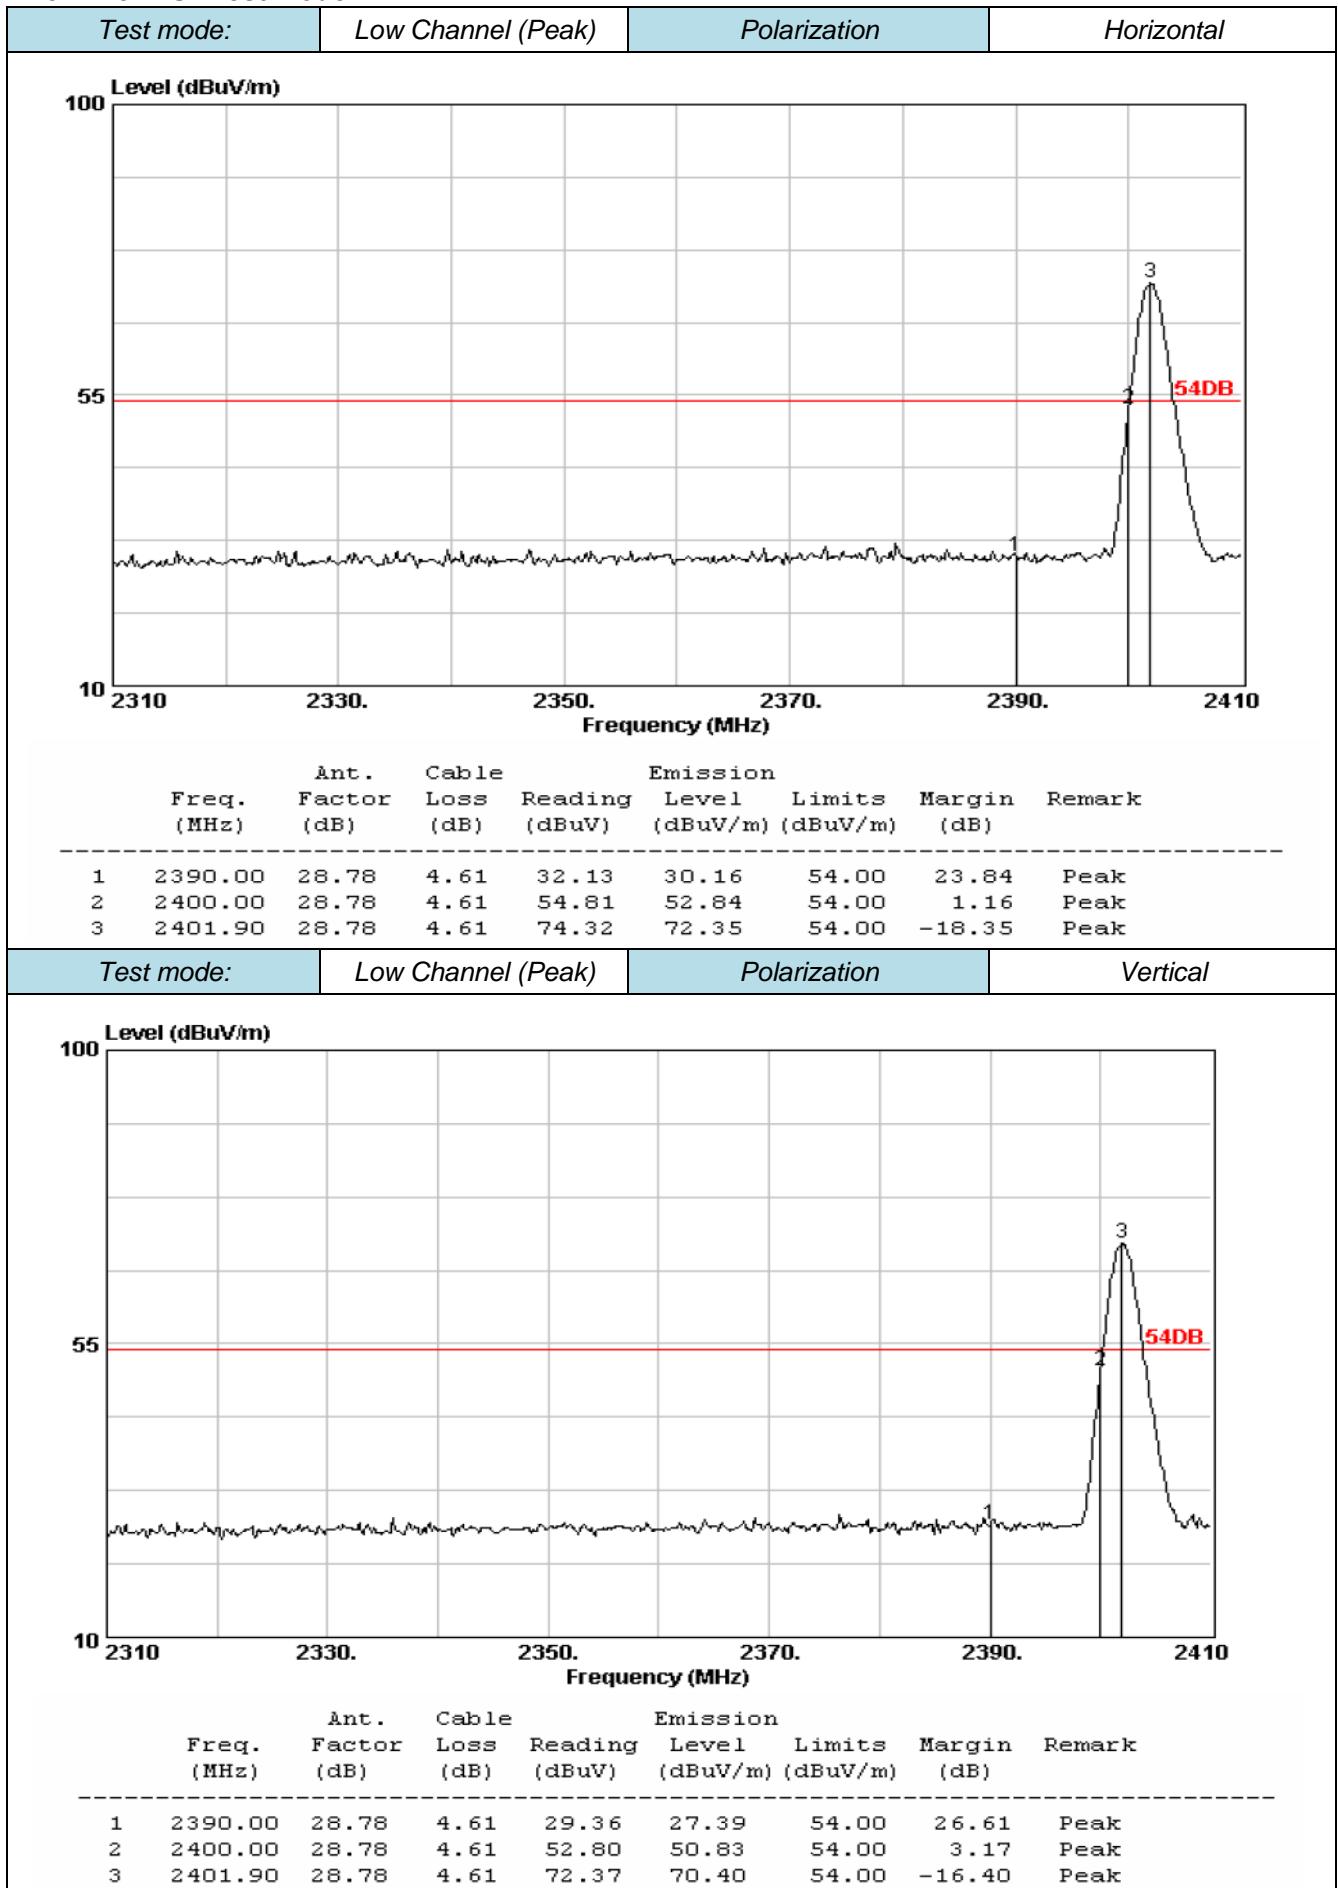

Remark: For the peak measured value complies with the average limit, the average measurement not performed

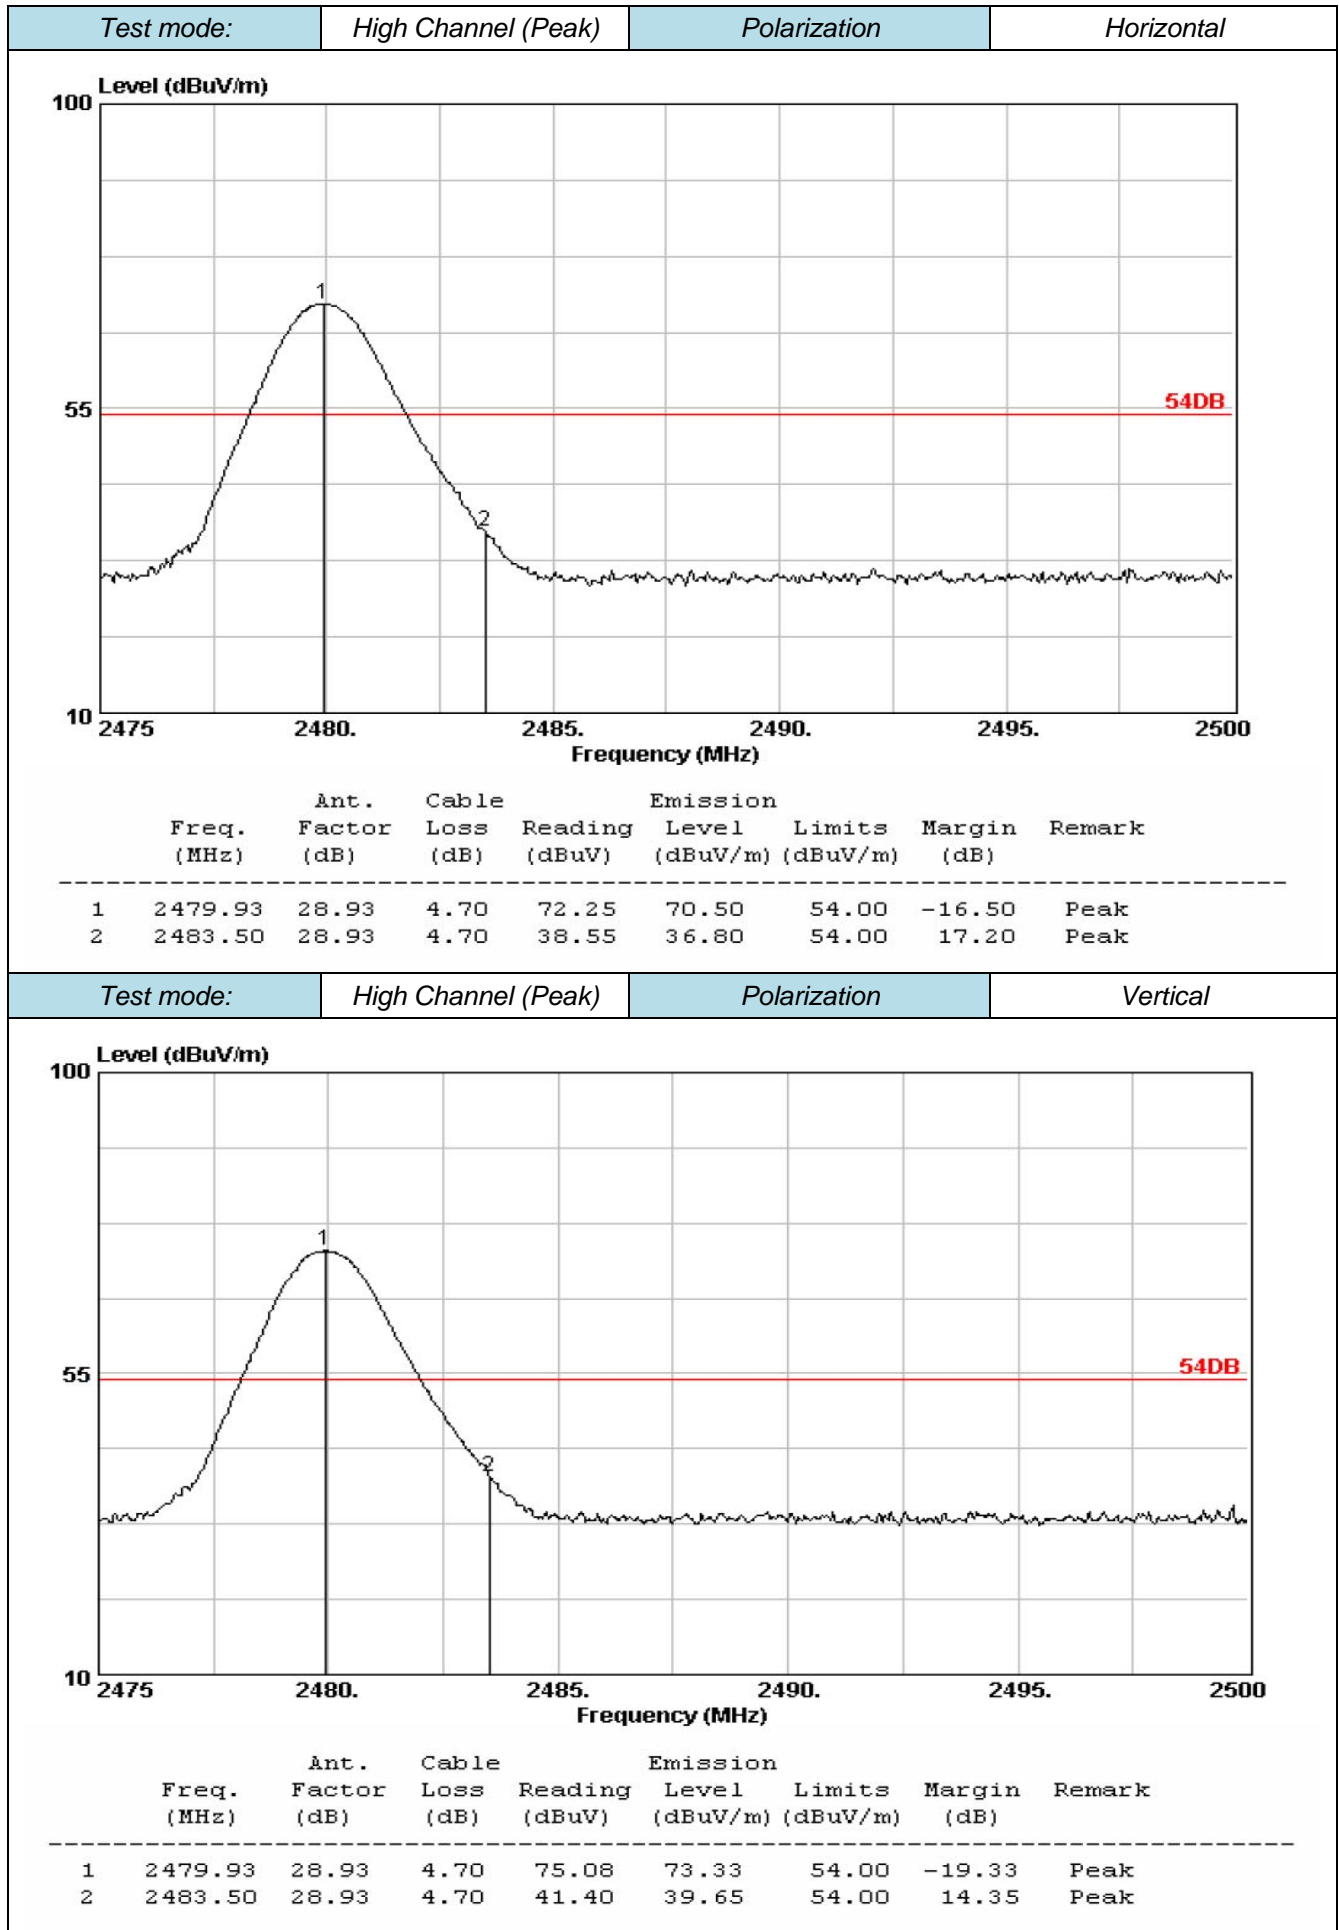


Remark: For the peak measured value complies with the average limit, the average measurement not performed

## 4.5.2 For Conducted Bandedge Measurement


### 4.5.2.1 GFSK Test Mode

We tested hopping mode and non-hopping mode, and recorded the worst case at the hopping mode.

#### A. Test Plots

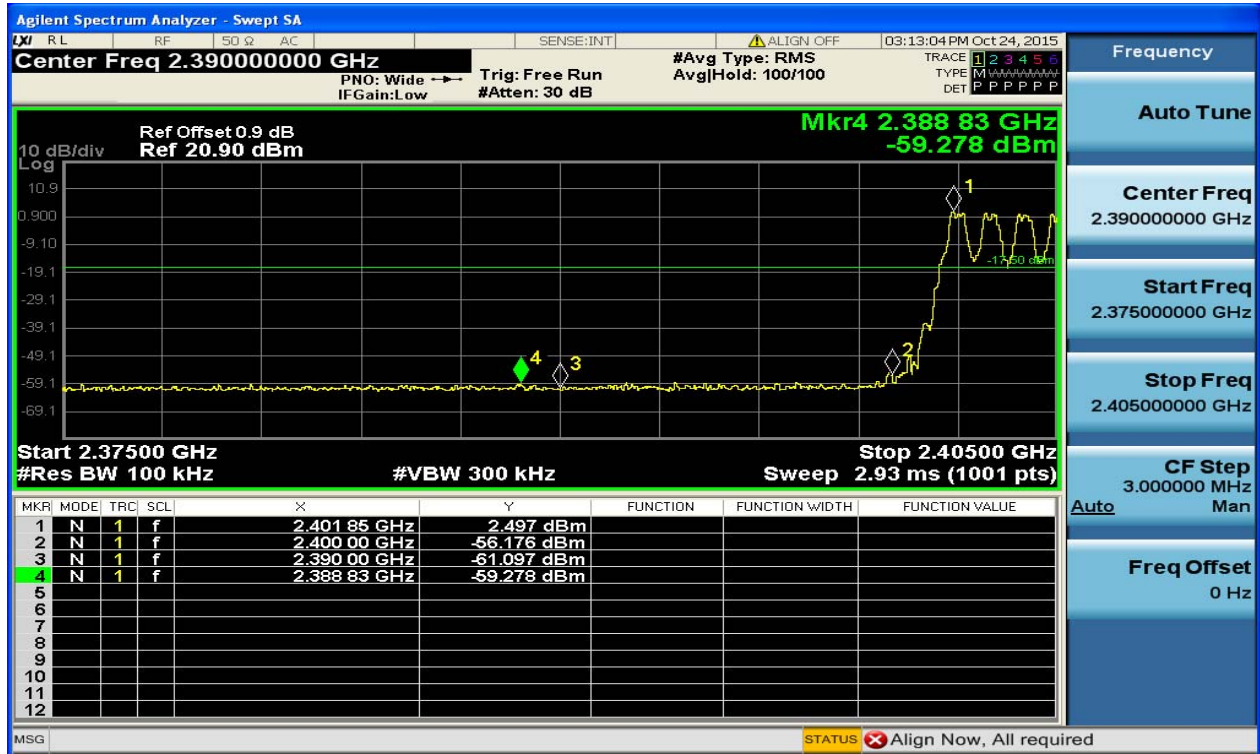

(Plot 4.5.2.1 A: Hopping Mode @ GFSK)

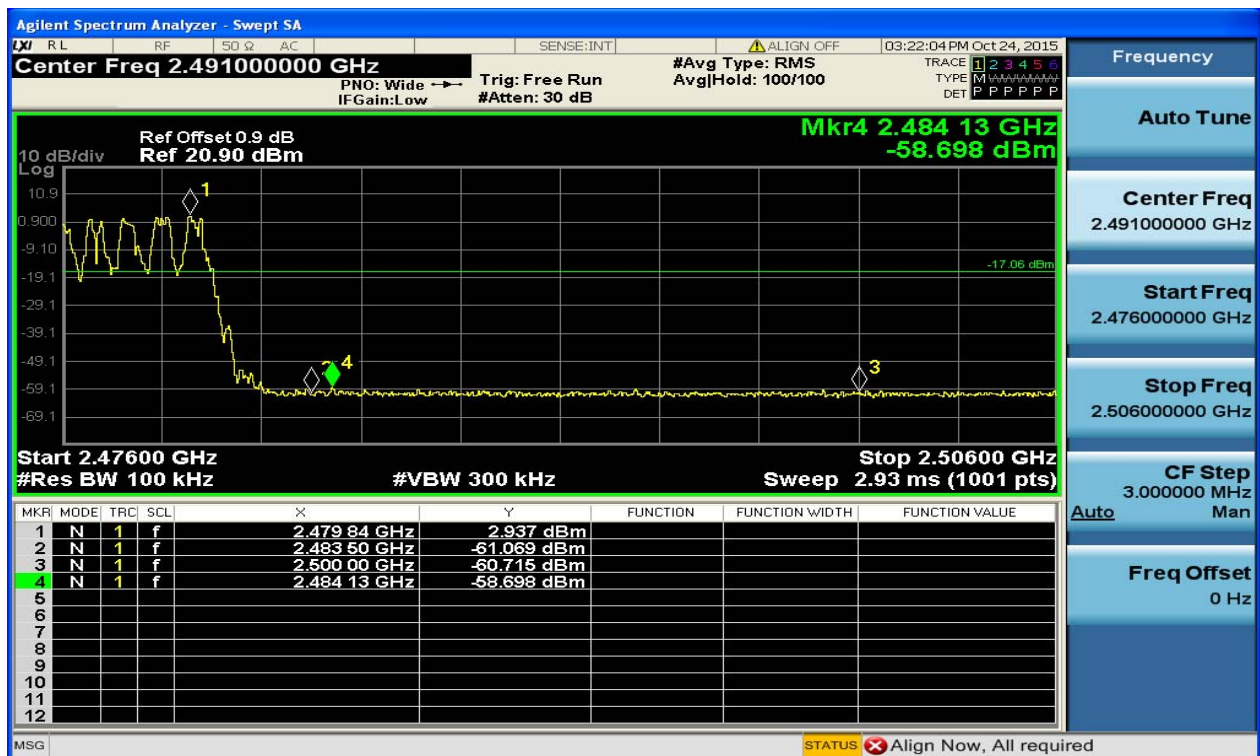

(Plot 4.5.2.1 B: Hopping Mode @ GFSK)




#### 4.5.2.2 8DPSK Test Mode

We tested hopping mode and non-hopping mode, and recorded the worst case at the hopping mode.

##### A. Test Plots



(Plot 4.5.2.2 A: Hopping Mode @ 8DPSK)

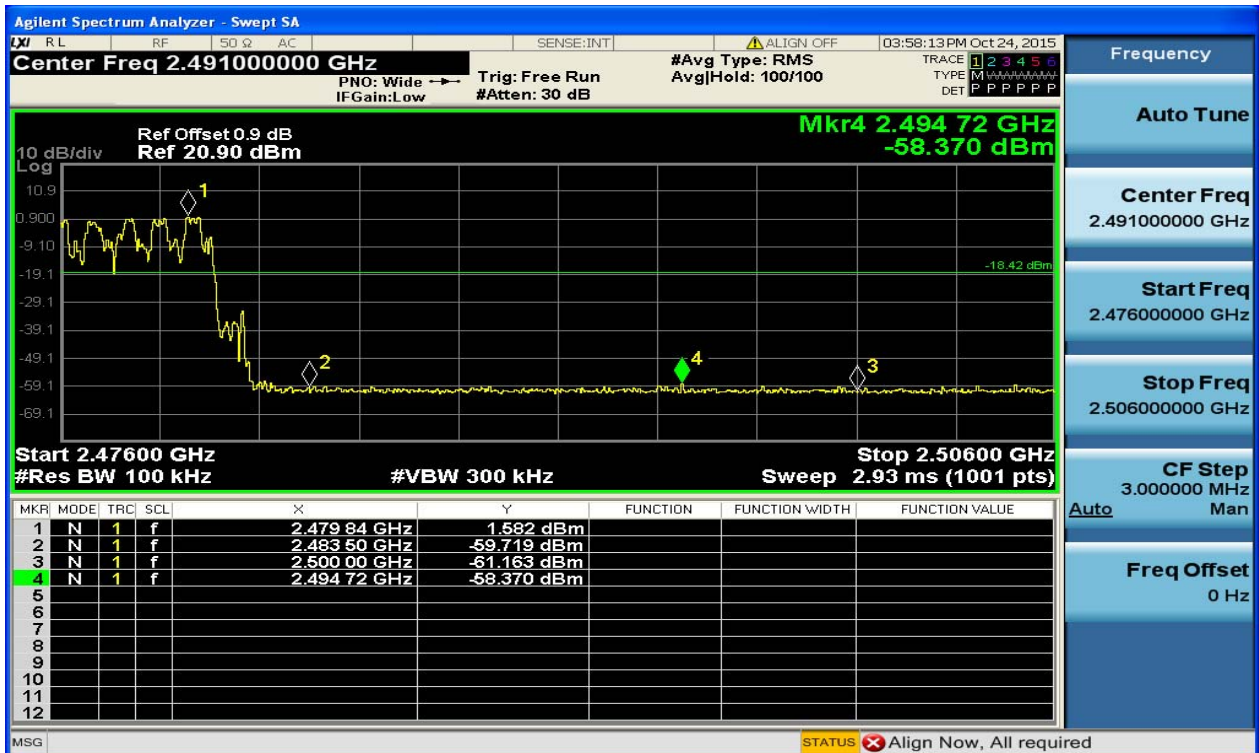


(Plot 4.5.2.2 B: Hopping Mode @ 8DPSK)



## 4.6 Frequency Separation

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz.

### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $2/3 \times 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

### TEST RESULTS

Remark: 1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5) and all test channels, recorded worst case at DH5 and middle channel.

#### 4.6.1 GFSK Test Mode

##### A. Test Verdict

| Channel | Frequency (MHz) | Channel Separation (MHz) | Refer to Plot | Limits (MHz) | Verdict |
|---------|-----------------|--------------------------|---------------|--------------|---------|
| 38      | 2440            | 1.000                    | Plot 4.6.1 A  | 0.8702       | PASS    |
| 39      | 2441            |                          |               |              |         |

##### B. Test Plots




(Plot 4.6.1 A: Channel 39: 2441MHz @ GFSK)

## 4.6.2 8DPSK Test Mode

### A. Test Verdict

| Channel | Frequency (MHz) | Channel Separation (MHz) | Refer to Plot | Limits (MHz) | Verdict |
|---------|-----------------|--------------------------|---------------|--------------|---------|
| 38      | 2440            | 0.982                    | Plot 4.6.2 A  | 0.84936      | PASS    |
| 39      | 2441            |                          |               |              |         |


### B. Test Plots

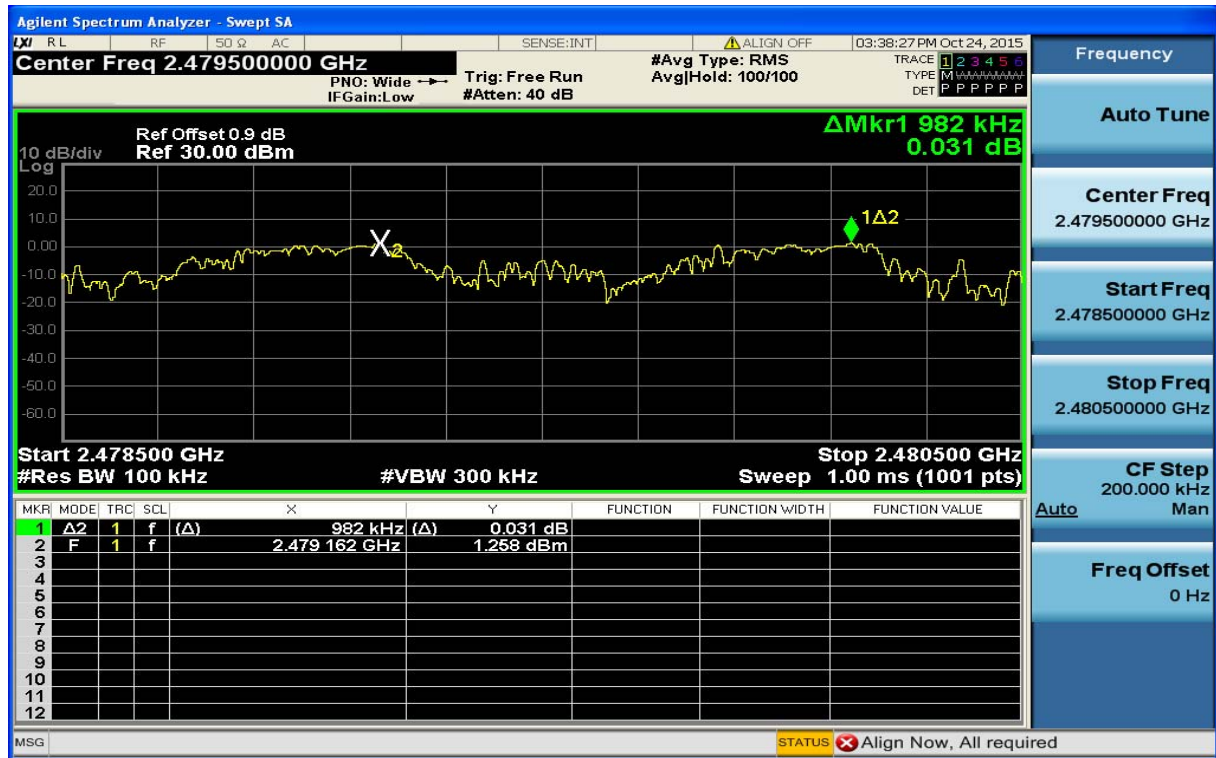

(Plot 4.6.2 A: Channel 39: 2441MHz @ 8DPSK)

## 4.7 Number of hopping frequency

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=100 KHz and VBW=300 KHz.

### LIMIT

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### TEST RESULTS


Remark: 1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5.

#### 4.7.1 GFSK Test Mode

##### A. Test Verdict

| Hopping Channel Frequency Range (MHz) | Number of Hopping Channel | Refer to Plot | Limit | Verdict |
|---------------------------------------|---------------------------|---------------|-------|---------|
| 2400-2483.5                           | 79                        | Plot 4.7.1 A1 | ≥15   | PASS    |

##### B. Test Plots

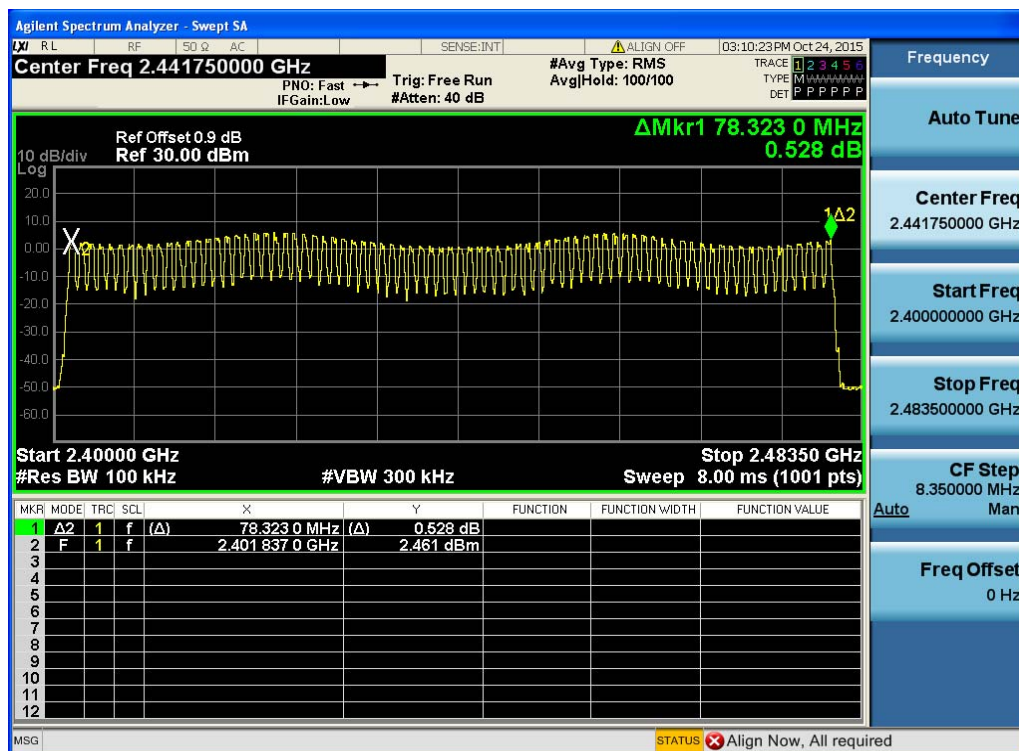


(Plot 4.7.1 A1: @ GFSK)

## 4.7.2 8DPSK Test Mode

### A. Test Verdict

| Hopping Channel Frequency Range (MHz) | Number of Hopping Channel | Refer to Plot | Limit | Verdict |
|---------------------------------------|---------------------------|---------------|-------|---------|
| 2400-2483.5                           | 79                        | Plot 4.7.2 A1 | ≥15   | PASS    |


### B. Test Plots

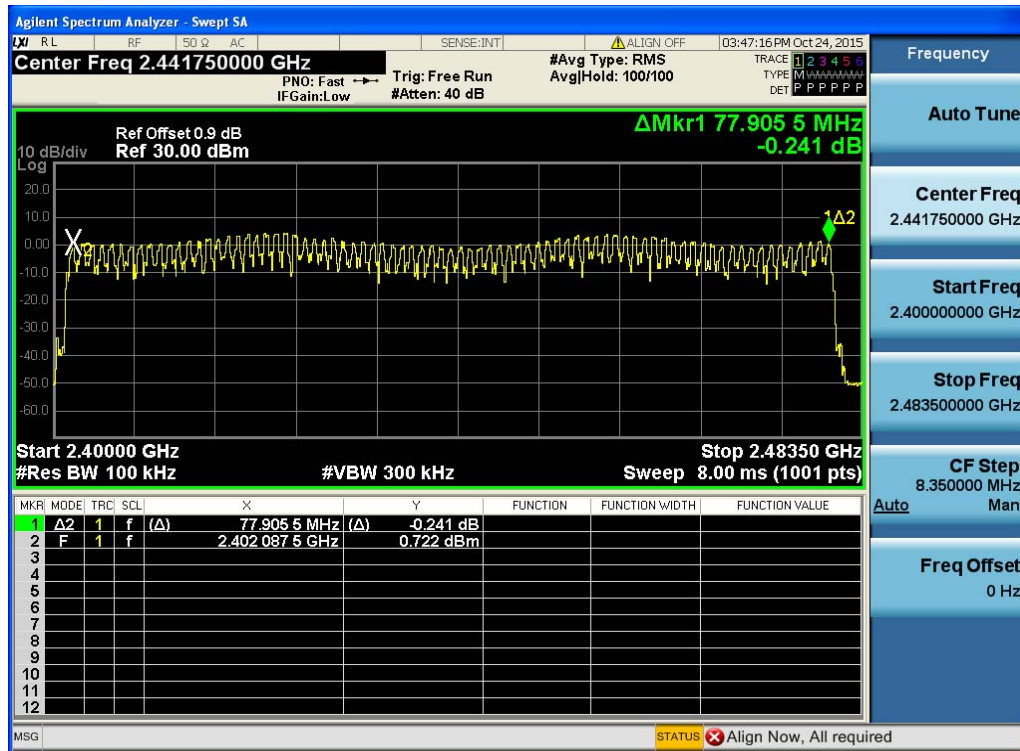

(Plot 4.7.2 A1: @ 8DPSK)

## 4.8 Time of Occupancy (Dwell Time)

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=3MHz, Span=0Hz.

### LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST RESULTS

The Dwell Time=Burst Width\*Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4[s] \times \text{hopping number} = 0.4[s] \times 79[\text{ch}] = 31.6[s \times \text{ch}]$ ;

The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.

The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch\*hop/s] for all channels. So the final hopping rate for all channels is  $1600/6 = 266.67 [\text{ch} \times \text{hop/s}]$

The hops per second on one channel:  $266.67 [\text{ch} \times \text{hops/s}] / 79 [\text{ch}] = 3.38 [\text{hop/s}]$ ;

The total hops for all channels within the dwell time calculation duration:  $3.38 [\text{hop/s}] \times 31.6[s \times \text{ch}] = 106.67 [\text{hop} \times \text{ch}]$ ;

The dwell time for all channels hopping:  $106.67 [\text{hop} \times \text{ch}] \times \text{Burst Width} [\text{ms/hop/ch}]$ .

Remark: 1. We test Frequency Separation at all test channels, recorded worst case at middle channel.

A. Test Verdict


#### 4.8.1 GFSK Test Mode

| Mode | Frequency (MHz)   | Pulse Width (ms) | Dwell Time (S) | Limit (S) | Refer to Plot | Verdict |
|------|---|------------------|----------------|-----------|---------------|---------|
| DH1  | 2441  | 0.370            | 0.118          | 0.4       | Plot 4.8.1 A  | PASS    |
|      | <b>Note:</b> Dwell time=Pulse time (ms) $\times (1600 \div 2 \div 79) \times 31.6$ Second |                  |                |           |               |         |
| DH3  | 2441  | 1.626            | 0.260          | 0.4       | Plot 4.8.1 B  | PASS    |
|      | <b>Note:</b> Dwell time=Pulse time (ms) $\times (1600 \div 4 \div 79) \times 31.6$ Second |                  |                |           |               |         |
| DH5  | 2441  | 2.873            | 0.307          | 0.4       | Plot 4.8.1 C  | PASS    |
|      | <b>Note:</b> Dwell time=Pulse Time (ms) $\times (1600 \div 6 \div 79) \times 31.6$ Second |                  |                |           |               |         |


#### 4.8.2 8DPSK Test Mode

| Mode | Frequency (MHz)   | Pulse Width (ms) | Dwell Time (S) | Limit (S) | Refer to Plot | Verdict |
|------|---|------------------|----------------|-----------|---------------|---------|
| DH1  | 2441  | 0.378            | 0.121          | 0.4       | Plot 4.8.2 A  | PASS    |
|      | <b>Note:</b> Dwell time=Pulse time (ms) $\times (1600 \div 2 \div 79) \times 31.6$ Second |                  |                |           |               |         |
| DH3  | 2441  | 1.628            | 0.260          | 0.4       | Plot 4.8.2 B  | PASS    |
|      | <b>Note:</b> Dwell time=Pulse time (ms) $\times (1600 \div 4 \div 79) \times 31.6$ Second |                  |                |           |               |         |
| DH5  | 2441  | 2.878            | 0.307          | 0.4       | Plot 4.8.2 C  | PASS    |
|      | <b>Note:</b> Dwell time=Pulse Time (ms) $\times (1600 \div 6 \div 79) \times 31.6$ Second |                  |                |           |               |         |

B. Test Plots

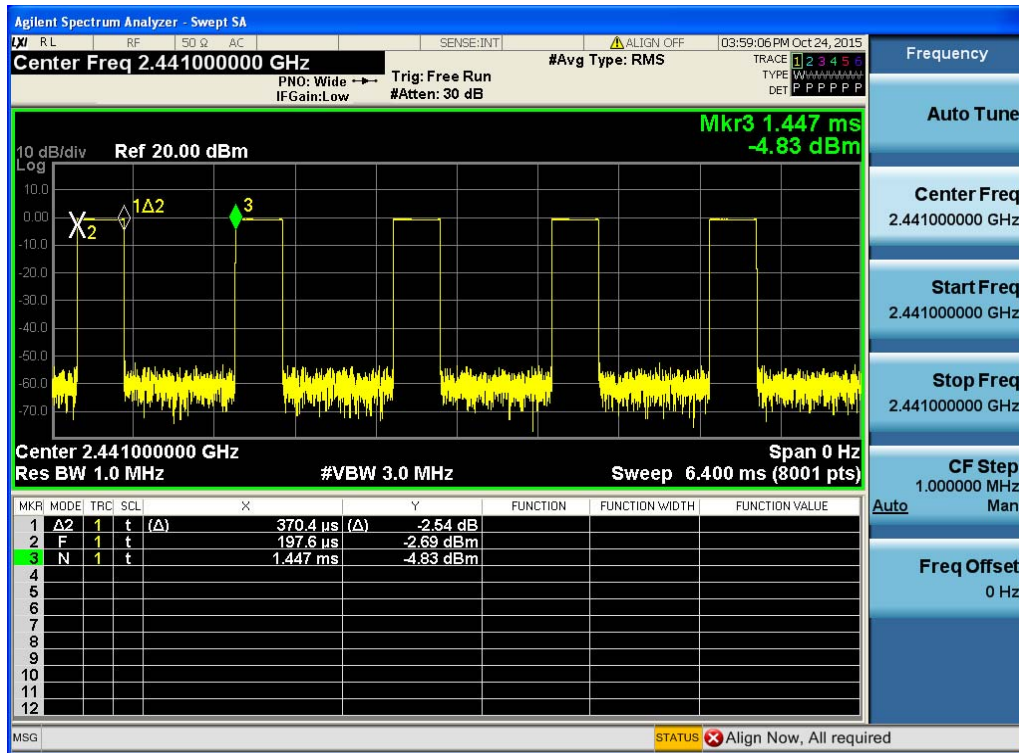


(Plot 4.8.1.A: Channel 39: 2441MHz @ GFSK @ DH1)

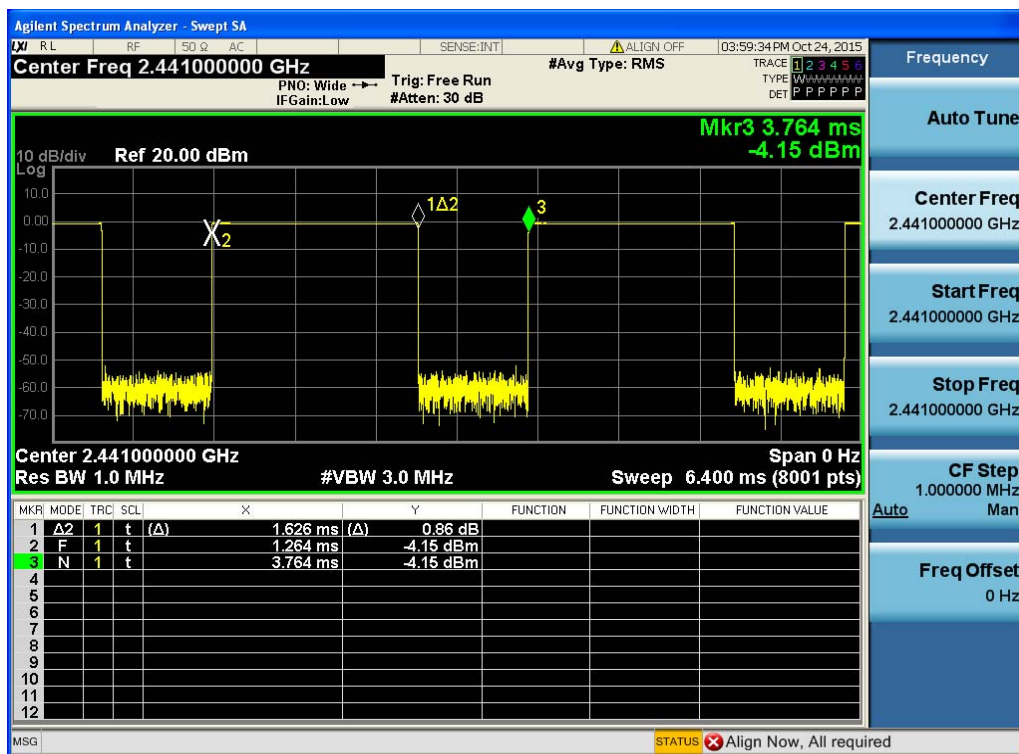


(Plot 4.8.1.B: Channel 39: 2441MHz @ GFSK @ DH3)




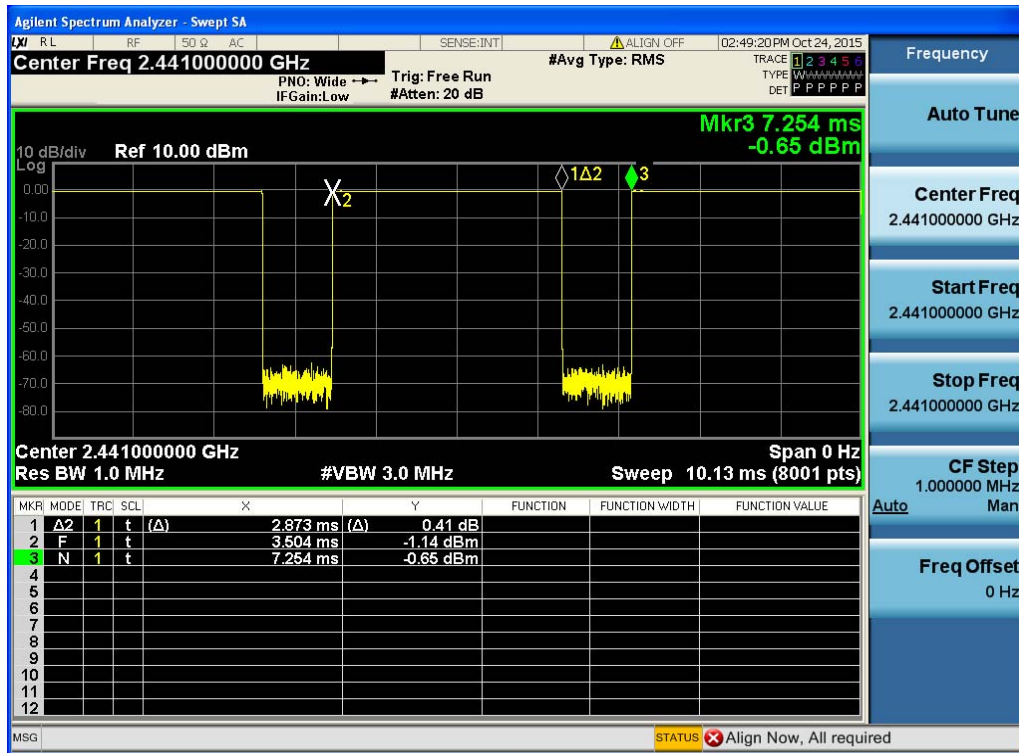


(Plot 4.8.1.C: Channel 39: 2441MHz @ GFSK @ DH5)

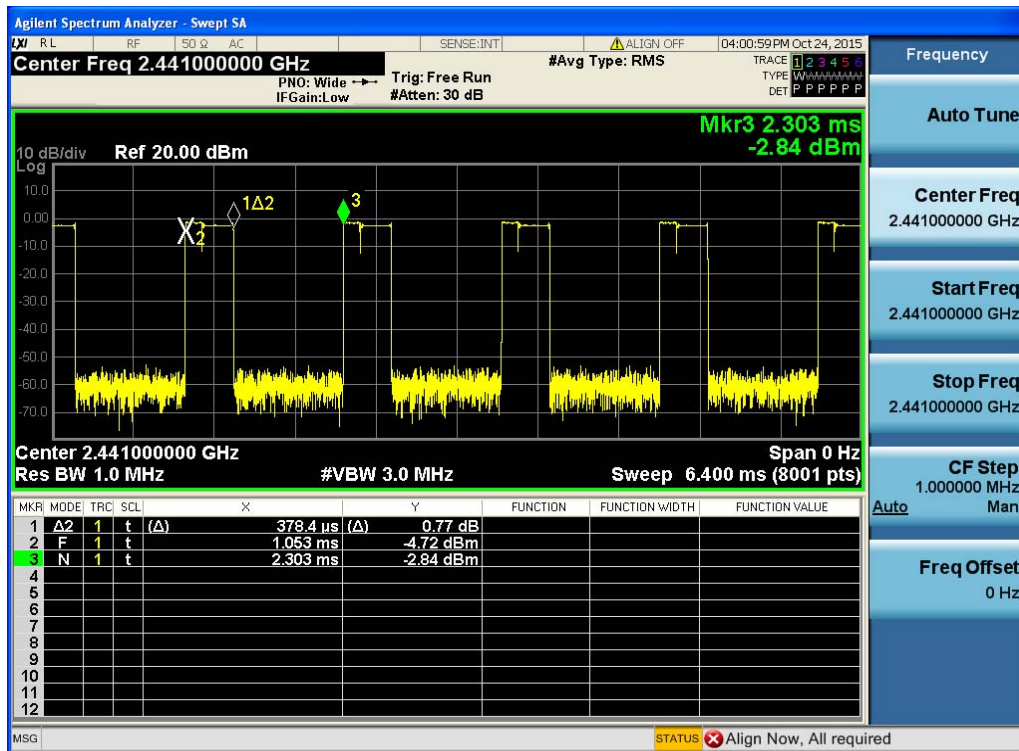

(Plot 4.8.2.A: Channel 39: 2441MHz @ 8DPSK @ DH1)

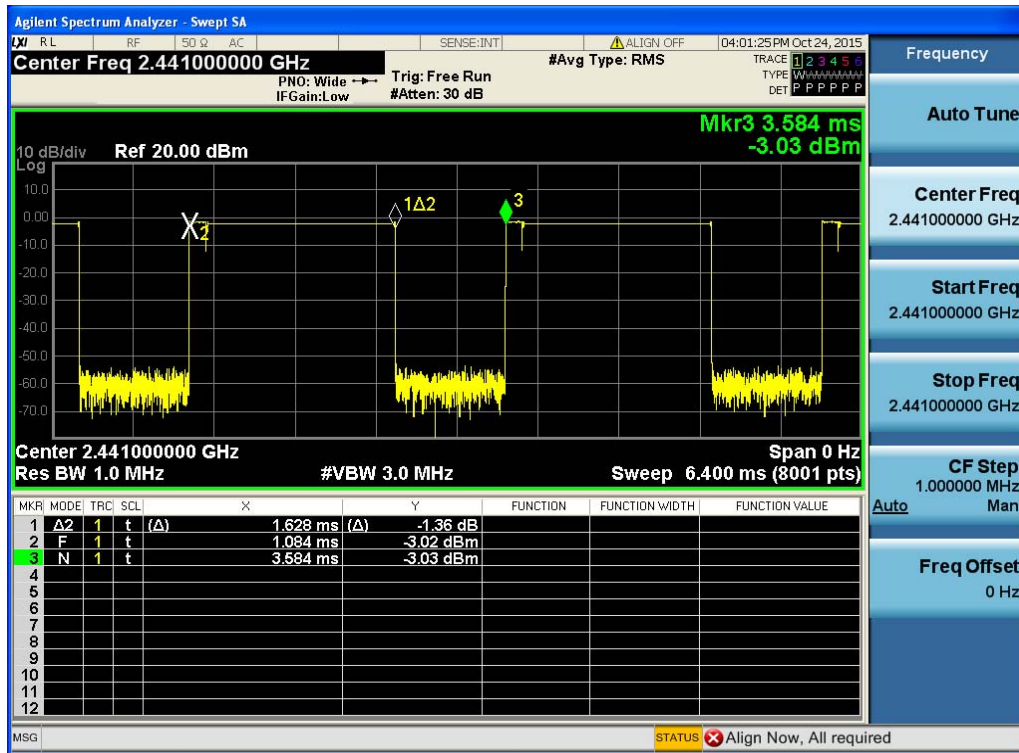

(Plot 4.8.2.B: Channel 39: 2441MHz @ 8DPSK @ DH3)

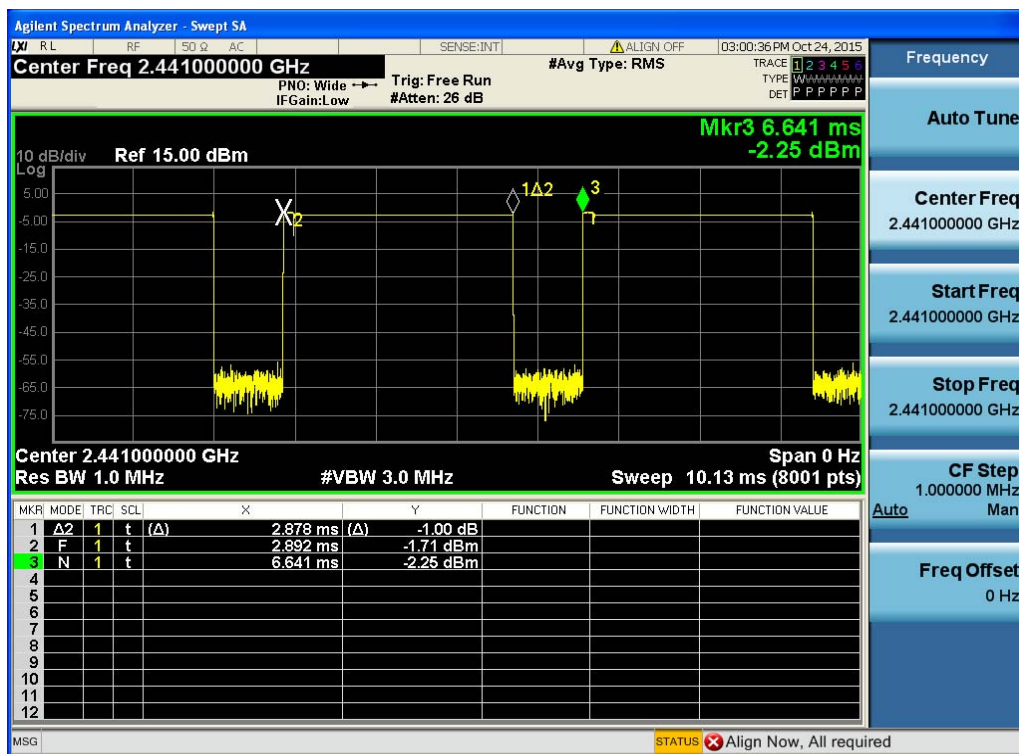

(Plot 4.8.2.C: Channel 39: 2441MHz @ 8DPSK @ DH5)