

FCC PART 15E TEST REPORT FOR CERTIFICATION
On Behalf of

TCL Entertainment Solutions Limited

3.1.2 Channel Dolby Atmos Sound Bar with Wireless Subwoofer

Model Number: TS8132

Additional Model: TDS8132, FS8132, OS8132, Alto8e, TS8132K,

TDS8132K, ***8132

FCC ID: 2ARUDTS8132

Prepared for:	TCL Entertainment Solutions Limited
	7/F, building 22E, 22 science park east avenue, Hong Kong science park,
	SHATIN, N.T., Hong Kong 999077 China
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2101018
Date of Test:	Dec. 17, 2020~Jan. 08, 2021
Date of Report:	Jan. 12, 2021

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
1.2. The antenna information for EUT	7
2. SUMMARY OF TEST	8
2.1. Summary of test result.....	8
2.2. Test Facilities	9
2.3. Measurement uncertainty for EST Technology Co., Ltd.	10
2.4. Assistant equipment used for test.....	10
2.5. Block Diagram	10
2.6. Test Mode.....	11
2.7. Channel List	13
2.8. Power Setting of Test Software.....	14
2.9. Duty Cycle of Test Signal	15
2.10. Test Equipment List	19
3. 6dB BANDWIDTH & 26dB BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	21
3.1. Limit	21
3.2. Test Setup.....	21
3.3. Spectrum Analyzer Setting.....	21
3.4. Test Procedure.....	22
3.5. Test Result.....	23
3.6. Test Result.....	25
4. MAXIMUM CONDUCTED OUTPUT POWER	67
4.1. Limit	67
4.2. Test Setup.....	67
4.3. Test Procedure.....	67
4.4. Test Result.....	68
5. PEAK POWER SPECTRAL DENSITY	70
5.1. Limit	70
5.2. Test Setup.....	70
5.3. Spectrum Analyzer Setting.....	70
5.4. Test Procedure.....	70
5.5. Test Result.....	71
6. UNWANTED EMISSIONS AND BAND EDGE	97
6.1. Limit	97
6.2. Test Setup.....	98
6.3. Spectrum Analyzer Setting.....	99
6.4. Test Procedure.....	100
6.5. Test Result.....	101
7. FREQUENCY STABILITY	166
7.1. Limit	166
7.2. Test Setup.....	166
7.3. Spectrum Analyzer Setting.....	166
7.4. Test Procedure.....	167

- 7.5. Test Result..... 168
- 8. AC POWER LINE CONDUCTED EMISSIONS172
 - 8.1. Limit..... 172
 - 8.2. Test Setup..... 172
 - 8.3. Spectrum Analyzer Setting..... 172
 - 8.4. Test Procedure..... 172
 - 8.5. Test Result..... 173
- 9. ANTENNA REQUIREMENTS.....177
 - 9.1. Limit..... 177
 - 9.2. Test Result..... 177
- 10. TEST SETUP PHOTO.....178
- 11. EUT PHOTO.....180

EST Technology Co., Ltd.

Applicant:	TCL Entertainment Solutions Limited		
Address:	7/F, building 22E, 22 science park east avenue, Hong Kong science park, SHATIN, N.T., Hong Kong 999077 China		
Manufacturer:	TCL Entertainment Solutions Limited		
Address:	7/F, building 22E, 22 science park east avenue, Hong Kong science park, SHATIN, N.T., Hong Kong 999077 China		
Factory:	TCL Technoly Electronics (Huizhou) Co., Ltd. ZhongKai The Third Factory		
Address:	A building, No.88, North Of Luen Fat Road, Tongqiao Industrial Base, Zhongkai High-tech Development Zone, Huizhou City, Guangdong Province, P.R. China		
E.U.T:	3.1.2 Channel Dolby Atmos Sound Bar with Wireless Subwoofer		
Model Number:	TS8132		
Additional Model:	TDS8132, FS8132, OS8132, Alto8e, TS8132K, TDS8132K, ***8132 ("*" can be any alphanumeric character including blank for marketing differences) Note: They are identical except model name.		
Power Supply:	AC 100-240V, 50/60Hz		
Trade Name:	TCL	Serial No.:	-----
Date of Receipt:	Dec. 17, 2020	Date of Test:	Dec. 17, 2020~Jan. 08, 2021
Test Specification:	FCC Part 15 Subpart E 15.407 ANSI C63.10:2013 FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart E requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Prepared by:	<i>Ring Yang</i> Ring Yang / Assistant <i>Seven Wang</i> Seven Wang / Engineer Date: Jan 10, 2021 Approved by: <i>Iceman Hu</i>  Iceman Hu / Manager		
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

FCC ID	:	2ARUDTS8132
Product Name	:	3.1.2 Channel Dolby Atmos Sound Bar with Wireless Subwoofer
Model Number	:	TS8132
Software Version	:	V008
Hardware Version	:	40-TS8132-MAC4G
Operation frequency	:	U-NII-1: 5150 MHz~5250 MHz U-NII-2A: 5250 MHz~5350 MHz U-NII-2C: 5470 MHz~5725 MHz U-NII-3: 5725 MHz~5850 MHz
Number of channel	:	U-NII-1: IEEE 802.11a / n HT20 / ac VHT20: 4 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel. U-NII-2A: IEEE 802.11a / n HT20 / ac VHT20: 4 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel. U-NII-2C: IEEE 802.11a / n HT20 / ac VHT20: 11 Channels; IEEE 802.11n HT40 / ac VHT40: 5 Channels; IEEE 802.11ac VHT80: 2 Channel. U-NII-3: IEEE 802.11a / n HT20 / ac VHT20: 5 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel.
Modulation	:	OFDM(QPSK, BPSK, 16-QAM, 64-QAM,256-QAM)
Transmit Data Rate	:	IEEE 802.11a: 54, 48, 36, 24, 18, 12, 9, 6Mbps; IEEE 802.11n: up to 300Mbps; IEEE 802.11ac: up to 866Mbps;
Channels Spacing	:	IEEE 802.11a: 20MHz; IEEE 802.11n HT20: 20MHz; IEEE 802.11n HT40: 40MHz; IEEE 802.11ac VHT20: 20MHz; IEEE 802.11ac VHT40: 40MHz; IEEE 802.11ac VHT80: 80MHz;

Transmit Power	:	U-NII-1 IEEE 802.11a: 11.86dBm IEEE 802.11n HT20: 12.57dBm IEEE 802.11n HT40: 12.61dBm IEEE 802.11ac VHT20: 12.54dBm IEEE 802.11ac VHT40: 12.56dBm IEEE 802.11ac VHT80: 12.34dBm U-NII-2A IEEE 802.11a: 11.80dBm IEEE 802.11n HT20: 12.68dBm IEEE 802.11n HT40: 12.72dBm IEEE 802.11ac VHT20: 12.70dBm IEEE 802.11ac VHT40: 12.84dBm IEEE 802.11ac VHT80: 12.48dBm U-NII-2C IEEE 802.11a: 11.82dBm IEEE 802.11n HT20: 12.53dBm IEEE 802.11n HT40: 12.56dBm IEEE 802.11ac VHT20: 13.29dBm IEEE 802.11ac VHT40: 12.57dBm IEEE 802.11ac VHT80: 12.35dBm U-NII-3 IEEE 802.11a: 7.31dBm IEEE 802.11n HT20: 9.10dBm IEEE 802.11n HT40: 8.87dBm IEEE 802.11ac VHT20: 9.10dBm IEEE 802.11ac VHT40: 10.47dBm IEEE 802.11ac VHT80: 8.68dBm
----------------	---	---

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. The antenna information for EUT

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	3.95
2	N/A	N/A	Internal	N/A	3.76

Remark:

- (1) The EUT can work as CDD mode in IEEE 802.11n and IEEE 802.11ac, and can operate with one spatial stream.

According to KDB 662911 F 2) f) (ii):

$$\text{Directional gain} = 10 \times \log[(10^{3.95/20} + 10^{3.76/20})^2 / 2] = 6.87 \text{ dBi} > 6 \text{ dBi}$$

So, the output power limit and power spectral density should be reduced.

For output Power:

U-NII-1 Limit is 24dBm - (6.87dBi - 6dBi) = 23.13dBm

U-NII-2A & U-NII-2C Limit is 24dBm - (6.87dBi - 6dBi) = 23.13dBm

U-NII-3 Limit is 30dBm - (6.87dBi - 6dBi) = 29.13dBm

For power spectral density:

U-NII-1 Limit is 11dBm/MHz - (6.87dBi - 6dBi) = 10.13dBm/MHz

U-NII-2A & U-NII-2C Limit is 11dBm/MHz - (6.87dBi - 6dBi) = 10.13dBm/MHz

U-NII-3 Limit is 30dBm/500KHz - (6.87dBi - 6dBi) = 29.13dBm/500KHz

- (2) After pre-test all antenna configurations, the worst case configuration as list below.

TX Mode \ ANT No.	SISO Configuration	MIMO Configuration
IEEE 802.11a	ANT 1 and Ant 2	/
IEEE 802.11n HT20	/	ANT1+ANT2
IEEE 802.11n HT40	/	ANT1+ANT2
IEEE 802.11ac VHT20	/	ANT1+ANT2
IEEE 802.11ac VHT40	/	ANT1+ANT2
IEEE 802.11ac VHT80	/	ANT1+ANT2

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth & 26dB Bandwidth & 99% Occupied Bandwidth	15.407(a) 15.407(e)	PASS
4	Maximum Conducted Output Power	15.407(a)	PASS
5	Peak Power Spectral Density	15.407(a)	PASS
6	Unwanted Emissions and Band Edge	15.205 15.209 15.407(b)	PASS
7	Frequency Stability	15.407(g)	PASS
8	AC Power Line Conducted Emissions	15.207 15.407(b)(6)	PASS
9	Antenna Requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab

: Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2022

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2022

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2022

Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty for EST Technology Co., Ltd.

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86
Uncertainty for spurious emissions test (18GHz to 40GHz)	4.67
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB
Temperature	$\pm 0.6^{\circ}\text{C}$
Humidity	$\pm 4.0\%$
Volatage DC	$\pm 1.0\%$
Volatage (AC, <10KHz)	$\pm 1.5\%$

Note:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.6m	AC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground.



AC 120V/60Hz&
AC 240V/60Hz

(EUT: 3.1.2 Channel Dolby Atmos Sound Bar with Wireless Subwoofer)

2.6. Test Mode

Pre-scan has been combined all possible modulations and data rates to determine the worst case test mode, the worst case test mode was selected for the final test as listed below.

Test Item	Test Mode	Channel	Modulation	Data rate
6dB Bandwidth	IEEE 802.11a	149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	155	OFDM	MCS0
26dB Bandwidth	IEEE 802.11a	36/40/48/52/60/64/100/116/140	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/118/134	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/118/134	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122	OFDM	MCS0
99% Occupied Bandwidth	IEEE 802.11a	36/40/48/52/60/64/100/116/140/ 149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/ 149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/118/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/ 149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/118/134/151/ 159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122/155	OFDM	MCS0
Maximum Conducted Output Power	IEEE 802.11a	36/40/48/52/60/64/100/116/140/ 149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/ 149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/118/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/ 149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/118/134/151/ 159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122/155	OFDM	MCS0

Peak Power Spectral Density	IEEE 802.11a	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/118/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/118/134/151/ 159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122/155	OFDM	MCS0
Unwanted Emissions and Band Edge(Above 1GHz)	IEEE 802.11a	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/118/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/118/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122/155	OFDM	MCS0
Unwanted Emissions Below 1GHz	IEEE 802.11a	100	OFDM	6Mbps
Frequency Stability	Unmodulation	36/64/100/149	N/A	N/A
AC Power Line Conducted Emissions	IEEE 802.11a	100	OFDM	6Mbps

Note:

1. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Channel List

Band	Mode	Channel	Frequency (MHz)
U-NII-1	IEEE 802.11a & n HT20 & ac VHT20	36	5180
		40	5200
		48	5240
	IEEE 802.11n HT40 & ac VHT40	38	5190
		46	5230
	IEEE 802.11ac VHT80	42	5210
U-NII-2A	IEEE 802.11a & n HT20 & ac VHT20	52	5260
		60	5300
		64	5320
	IEEE 802.11n HT40 & ac VHT40	54	5270
		62	5310
	IEEE 802.11ac VHT80	58	5290
U-NII-2C	IEEE 802.11a & n HT20 & ac VHT20	100	5500
		116	5580
		140	5700
	IEEE 802.11n HT40 & ac VHT40	102	5510
		118	5590
		134	5670
	IEEE 802.11ac VHT80	106	5530
		122	5610
U-NII-3	IEEE 802.11a & n HT20 & ac VHT20	149	5745
		157	5785
		165	5825
	IEEE 802.11n HT40 & ac VHT40	151	5755
		159	5795
	IEEE 802.11ac VHT80	155	5775

2.8. Power Setting of Test Software

Software Name	CMD		
U-NII-1			
Frequency(MHz)	5180	5200	5240
IEEE 802.11a Setting	14	14	14
IEEE 802.11n HT20 Setting	13	13	13
IEEE 802.11ac VHT20 Setting	13	13	
Frequency(MHz)	5190	5230	
IEEE 802.11n HT40 Setting	13	13	
IEEE 802.11ac VHT40 Setting	13	13	
Frequency(MHz)	5210		
IEEE 802.11ac VHT80 Setting	13		
U-NII-2A			
Frequency(MHz)	5260	5300	5320
IEEE 802.11a Setting	14	14	14
IEEE 802.11n HT20 Setting	13	13	13
IEEE 802.11ac VHT20 Setting	13	13	13
Frequency(MHz)	5270	5310	
IEEE 802.11n HT40 Setting	13	13	
IEEE 802.11ac VHT40 Setting	13	13	
Frequency(MHz)	5290		
IEEE 802.11ac VHT80 Setting	13		
U-NII-2C			
Frequency(MHz)	5500	5580	5700
IEEE 802.11a Setting	14	14	14
IEEE 802.11n HT20 Setting	13	13	13
IEEE 802.11ac VHT20 Setting	13	13	13
Frequency(MHz)	5510	5590	5670
IEEE 802.11n HT40 Setting	13	13	13
IEEE 802.11ac VHT40 Setting	13	13	
Frequency(MHz)	5530	5610	
IEEE 802.11ac VHT80 Setting	13	13	
U-NII-3			
Frequency(MHz)	5745	5785	5825
IEEE 802.11a Setting	14	14	14
IEEE 802.11n HT20 Setting	13	13	13
IEEE 802.11ac VHT20 Setting	13	13	13
Frequency(MHz)	5755	5795	
IEEE 802.11n HT40 Setting	13	13	
IEEE 802.11ac VHT40 Setting	13	13	
Frequency(MHz)	5775		
IEEE 802.11ac VHT80 Setting	13		


2.9. Duty Cycle of Test Signal

Temperature	22.3℃	Relative Humidity		40%	Test Voltage		AC 120V/60Hz
Mode	Frequency (MHz)	On time (ms)	Total Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T (Hz)	VBW Setting (dB)
IEEE 802.11a	5180	1.41739	1.45217	97.60	0.11	1952	706
IEEE 802.11n HT20	5180	1.32174	1.35652	97.44	0.11	1952	757
IEEE 802.11ac VHT20	5180	1.33043	1.36522	97.45	0.11	1952	752
IEEE 802.11n HT40	5190	0.66957	0.70435	95.06	0.22	1952	1493
IEEE 802.11ac VHT40	5190	0.66957	0.70435	95.06	0.22	1952	1493
IEEE 802.11ac VHT80	5210	1.15652	1.19130	97.08	0.13	1952	865


Note:

1. Duty Cycle=On Time/Total Time×100%.
2. Duty Factor= $10 \times \log(1/\text{Duty Cycle})$.
3. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
4. If duty cycle ≥ 98 %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor.
5. The on-time time is transmission duration(T).
6. The VBW Setting is use for RMS measurement in unwanted emissions and band edge(Above 1GHz) test.


IEEE 802.11a 5180MHz

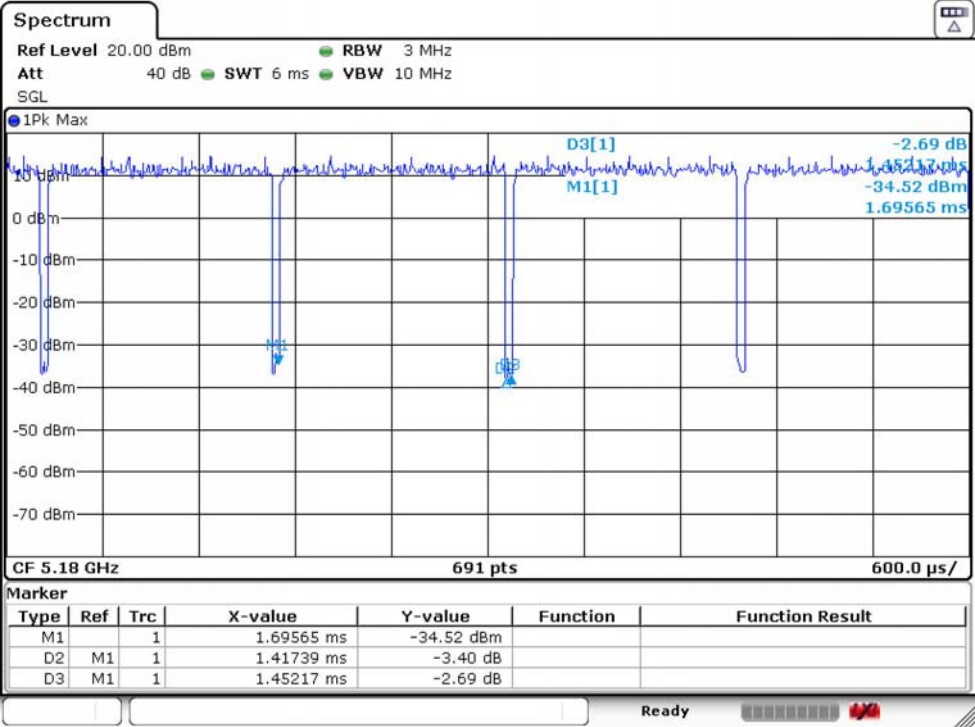


IEEE 802.11n HT20 5180MHz

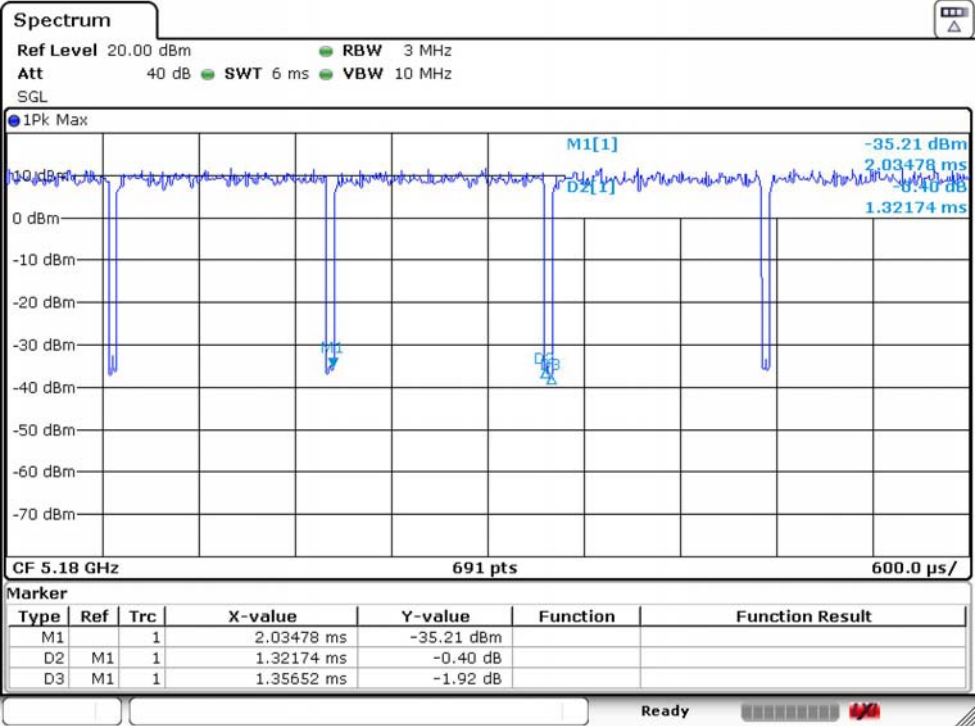


IEEE 802.11n HT40 5190MHz

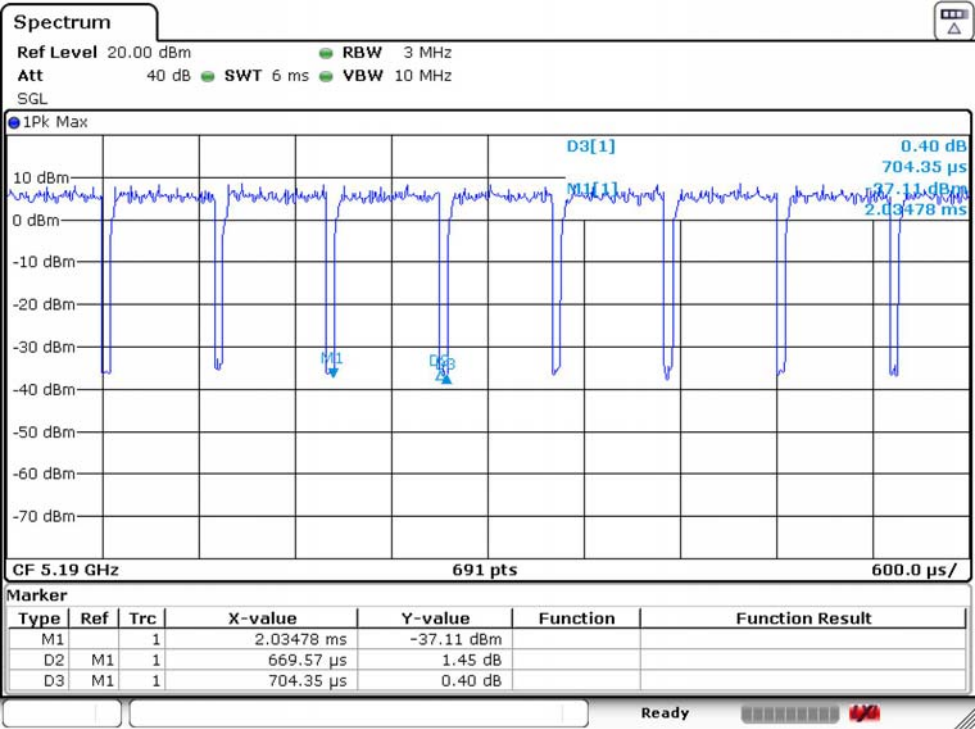


IEEE 802.11ac VHT20 5180MHz

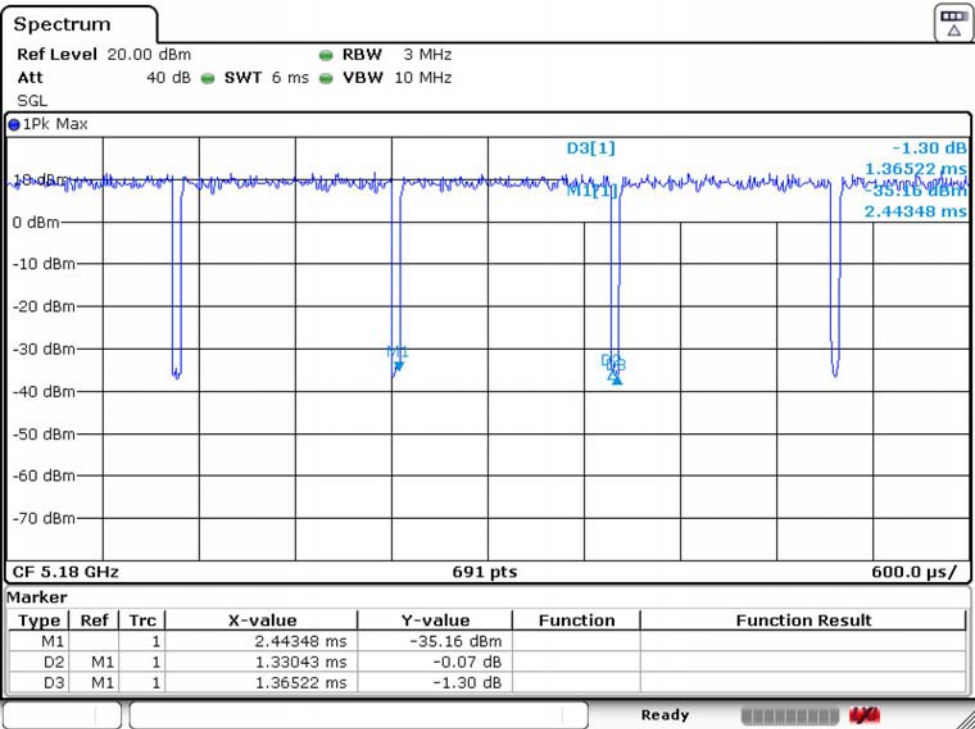

IEEE 802.11ac VHT40 5190MHz

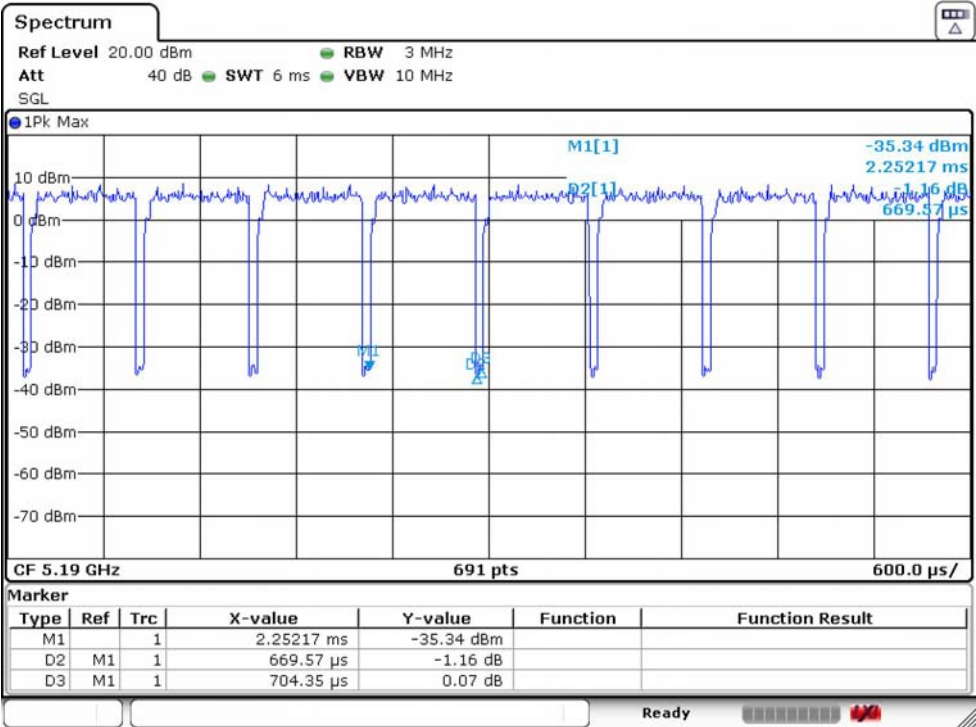

IEEE 802.11ac VHT80 5210MHz

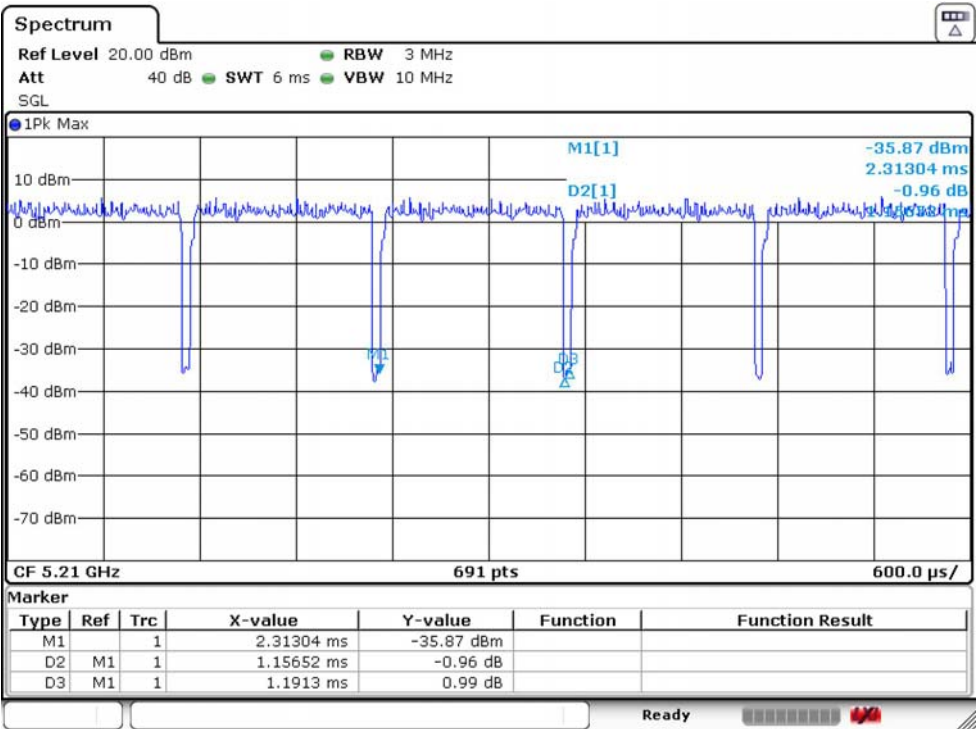

2.10. Test Equipment List

For AC power conducted emissions test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,20	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,20	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emissions test(9KHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,20	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test(30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,20	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emissions test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	EST-E031	LISAI	June 13,20	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 13,20	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A


For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
TS 8997	Rohde & Schwarz	/	/	/	/	/
Open Switch and Control Unit	Rohde & Schwarz	OSP-B157WB	EST-E036	LISAI	June 13,20	1 Year
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV	EST-E037	LISAI	June 13,20	1 Year
Signal Generator	Rohde & Schwarz	SMB100A	EST-E038	LISAI	June 13,20	1 Year
Vector Signal Generator	Rohde & Schwarz	SMBV100A	EST-E039	LISAI	June 13,20	1 Year
Test Software	Rohde & Schwarz	WMS32	V10.50.00	N/A	N/A	N/A
Temperature controller	Terchy	MHQ	EST-E101	LISAI	June 13,20	1 Year

3. 6dB BANDWIDTH & 26dB BANDWIDTH & 99% OCCUPIED BANDWIDTH

3.1. Limit

Band	Frequency (MHz)	Test Item	Limit
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth $\geq$ 500KHz

3.2. Test Setup

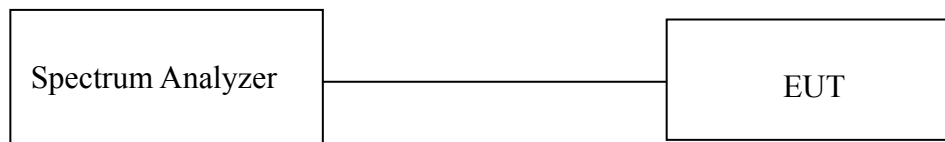

3.3. Spectrum Analyzer Setting

6dB Bandwidth	
Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

26dB Bandwidth	
Spectrum Parameters	Setting
RBW	approximately 1% of the emission bandwidth
VBW	>RBW
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth	
Spectrum Parameters	Setting
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Span	between 1.5 times and 5.0 times the OBW
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

3.4. Test Procedure

For 26dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 6dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 99% Occupied Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the 99% power bandwidth function to measure bandwidth.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

3.5. Test Result

Temperature	22.3℃	Relative Humidity			40%	Test Voltage		AC 120V/60Hz
26dB Bandwidth&99% Occupied Bandwidth								
Band	Test Mode	Fre (MHz)	26dB Bandwidth (MHz)		99% Occupied Bandwidth (MHz)		Calcul ate Power Limit (W)	Calculate Power Limit (dBm)
			Ant 1	Ant 2	Ant 1	Ant 2		
U-NII-1	IEEE 802.11a	5180	20.32	20.15	16.73	16.56		
		5200	20.38	20.03	16.79	16.56		
		5240	20.26	20.03	16.79	16.50		
	IEEE 802.11n HT20	5180	20.49	20.20	17.71	17.54		
		5200	20.49	20.43	17.66	17.60		
		5240	20.32	20.38	17.71	17.54		
	IEEE 802.11ac VHT20	5180	20.61	20.15	17.71	17.54		
		5200	20.55	20.20	17.71	17.60		
		5240	20.61	20.26	17.71	17.60		
	IEEE 802.11n HT40	5190	40.72	40.38	36.30	36.56		
		5230	40.72	40.12	36.30	36.56		
	IEEE 802.11ac VHT40	5190	40.90	40.20	36.30	36.56		
		5230	40.90	40.38	36.30	36.56		
	IEEE 802.11ac VHT80	5210	81.97	80.75	75.54	75.20		
U-NII-2A	IEEE 802.11a	5260	20.32	20.09	16.79	16.50	0.2500	0.2500
		5300	20.26	20.09	16.90	16.56	0.2500	0.2500
		5320	20.20	20.03	16.79	16.50	0.2500	0.2500
	IEEE 802.11n HT20	5260	20.55	20.38	17.66	17.54	0.2500	0.2500
		5300	20.49	20.38	17.71	17.54	0.2500	0.2500
		5320	20.43	20.32	17.66	17.60	0.2500	0.2500
	IEEE 802.11ac VHT20	5260	20.55	19.97	17.71	17.60	0.2500	0.2500
		5300	20.55	20.26	17.66	17.54	0.2500	0.2500
		5320	20.55	20.20	17.77	17.54	0.2500	0.2500
	IEEE 802.11n HT40	5270	40.98	40.12	36.30	36.56	0.2500	0.2500
		5310	40.72	40.12	36.30	36.47	0.2500	0.2500
	IEEE 802.11ac VHT40	5270	40.81	40.20	36.38	36.56	0.2500	0.2500
		5310	40.90	40.20	36.30	36.56	0.2500	0.2500
	IEEE 802.11ac VHT80	5290	81.97	80.75	75.54	75.20	0.2500	0.2500

Temperature	22.3℃	Relative Humidity		40%	Test Voltage		AC 120V/60Hz	
26dB Bandwidth&99% Occupied Bandwidth								
Band	Test Mode	Fre (MHz)	26dB Bandwidth (MHz)		99% Occupied Bandwidth (MHz)		Calcul ate Power Limit (W)	Calculate Power Limit (dBm)
			Ant 1	Ant 2	Ant 1	Ant 2		
U-NII-2C	IEEE 802.11a	5500	20.09	20.20	16.67	16.61	0.2500	23.98
		5580	20.15	19.97	16.79	16.56	0.2500	23.98
		5700	20.32	20.43	16.79	16.67	0.2500	23.98
	IEEE 802.11n HT20	5500	20.61	20.32	17.66	17.54	0.2500	23.98
		5580	20.55	20.43	17.71	17.60	0.2500	23.98
		5700	20.43	20.32	17.66	17.54	0.2500	23.98
	IEEE 802.11ac VHT20	5500	20.49	20.15	17.66	17.60	0.2500	23.98
		5580	20.43	20.20	17.71	17.60	0.2500	23.98
		5700	20.38	20.15	17.66	17.66	0.2500	23.98
	IEEE 802.11n HT40	5510	40.81	40.12	36.21	36.47	0.2500	23.98
		5670	40.90	40.20	36.21	36.56	0.2500	23.98
	IEEE 802.11ac VHT40	5510	40.81	40.20	36.38	36.47	0.2500	23.98
		5670	40.72	40.29	36.30	36.56	0.2500	23.98
	IEEE 802.11ac VHT80	5530	81.79	80.93	75.54	75.37	0.2500	23.98
		5610	81.79	80.75	75.54	75.37	0.2500	23.98

Temperature	22.3℃	Relative Humidity			40%	Test Voltage	AC 120V/60Hz	
6dB Bandwidth&99% Occupied Bandwidth								
BAND	Test Mode	Fre (MHz)	6dB Bandwidth (MHz)		99% Occupied Bandwidth (MHz)		6dB BW Min Limit (MHz)	Result
			Ant 1	Ant 2	Ant 1	Ant 2		
U-NII-3	IEEE 802.11a	5745	15.11	15.11	16.79	16.56	0.5	PASS
		5785	15.11	15.11	16.79	16.61	0.5	PASS
		5825	15.11	15.11	16.79	16.56	0.5	PASS
	IEEE 802.11n HT20	5745	15.11	15.10	17.71	17.60	0.5	PASS
		5785	15.12	15.71	17.71	17.60	0.5	PASS
		5825	15.12	15.71	17.71	17.60	0.5	PASS
	IEEE 802.11ac VHT20	5745	15.12	15.11	17.71	17.54	0.5	PASS
		5785	15.12	16.27	17.71	17.60	0.5	PASS
		5825	15.11	15.71	17.71	17.54	0.5	PASS
	IEEE 802.11n HT40	5755	35.09	35.09	36.30	36.56	0.5	PASS
		5795	35.10	35.09	36.30	36.64	0.5	PASS
	IEEE 802.11ac VHT40	5755	35.10	35.09	36.30	36.56	0.5	PASS
		5795	35.09	35.08	36.30	36.56	0.5	PASS
	IEEE 802.11ac VHT80	5775	73.86	75.09	75.54	75.20	0.5	PASS


Note :

For Band U-NII-2A and U-NII-2C, the maximum conducted output power limit is 250mw or $11+10 \times \log B$, which is lesser, where B is the 26dB Bandwidth in MHz. So in this section, the maximum conducted output power limit can calculate with 26dB Bandwidth.

3.6. Test Result

U-NII-1 IEEE 802.11a 5180MHz_Ant 1

26dB Bandwidth

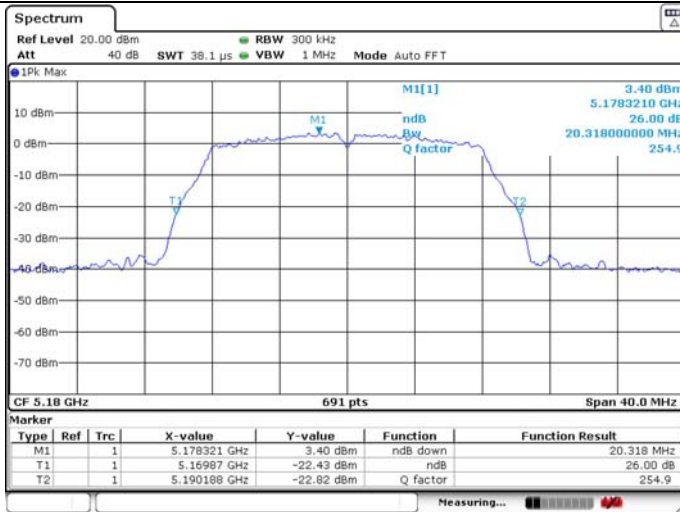


99% Occupied Bandwidth



U-NII-1 IEEE 802.11a 5200MHz_Ant 1

26dB Bandwidth

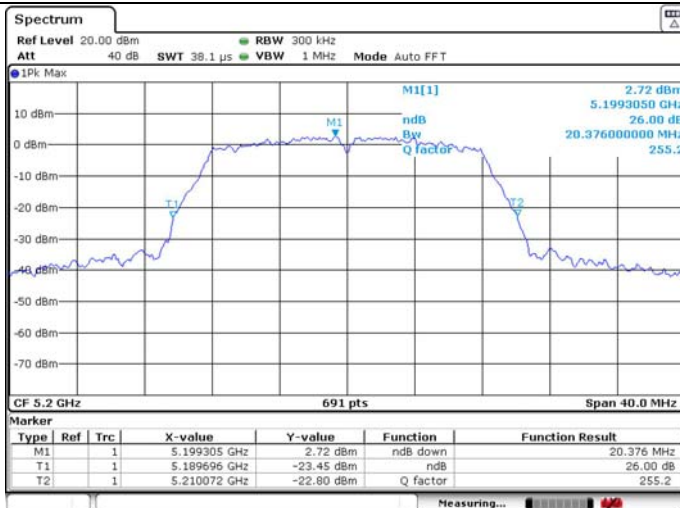


99% Occupied Bandwidth



U-NII-1 IEEE 802.11a 5240MHz_Ant 1

26dB Bandwidth

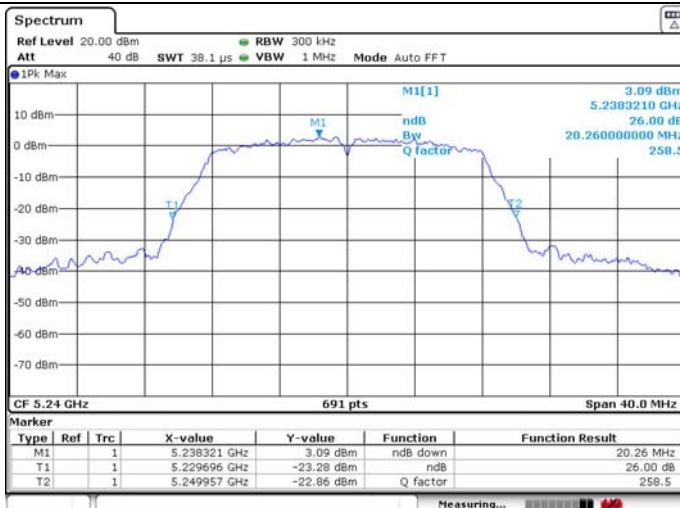


99% Occupied Bandwidth



U-NII-1 IEEE 802.11a 5180MHz_Ant 2

26dB Bandwidth

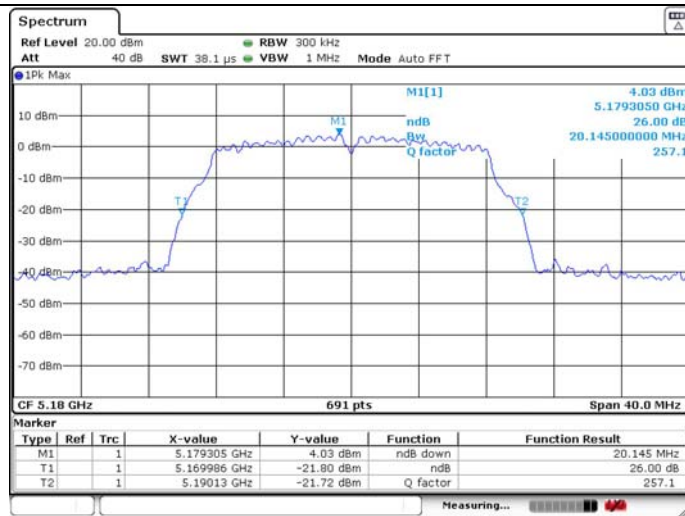


99% Occupied Bandwidth




U-NII-1 IEEE 802.11a 5200MHz_Ant 2

26dB Bandwidth

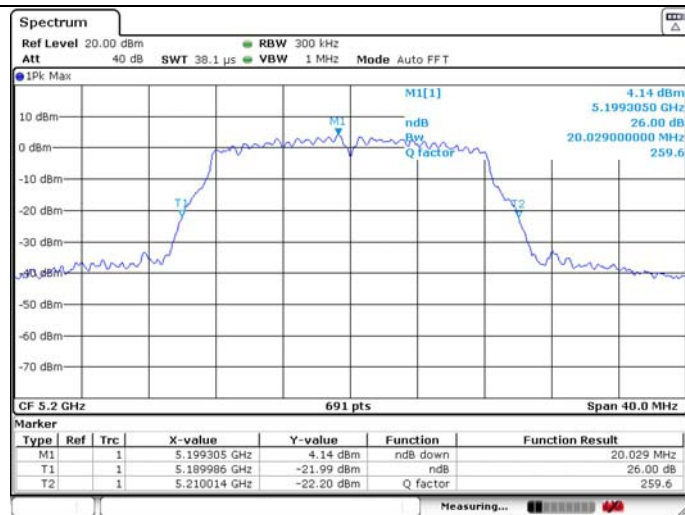


99% Occupied Bandwidth

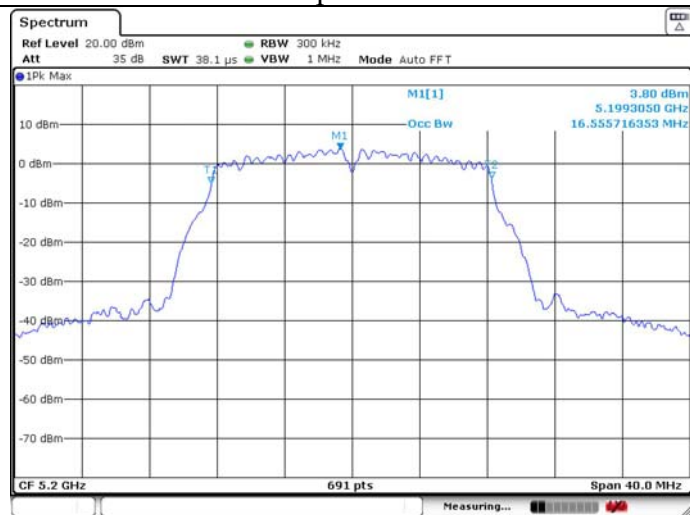


U-NII-1 IEEE 802.11a 5240MHz_Ant 2

26dB Bandwidth

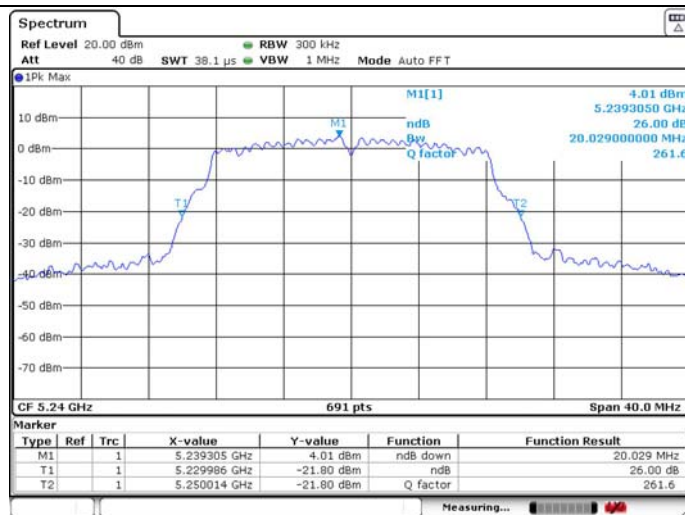


99% Occupied Bandwidth

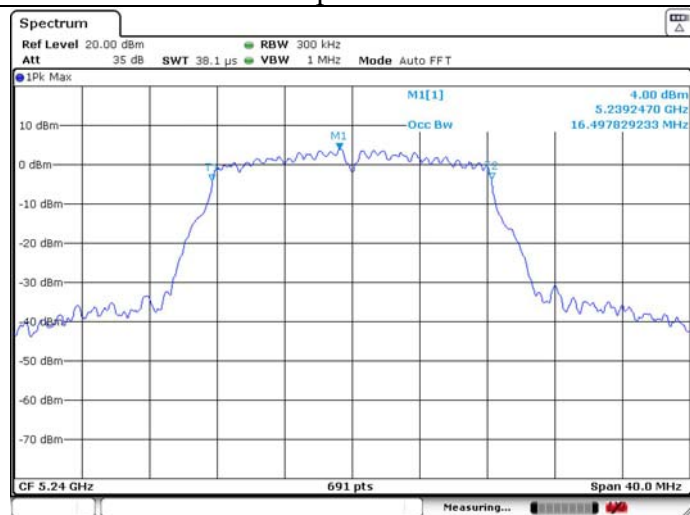


U-NII-1 IEEE 802.11n HT20 5180MHz_Ant 1

26dB Bandwidth

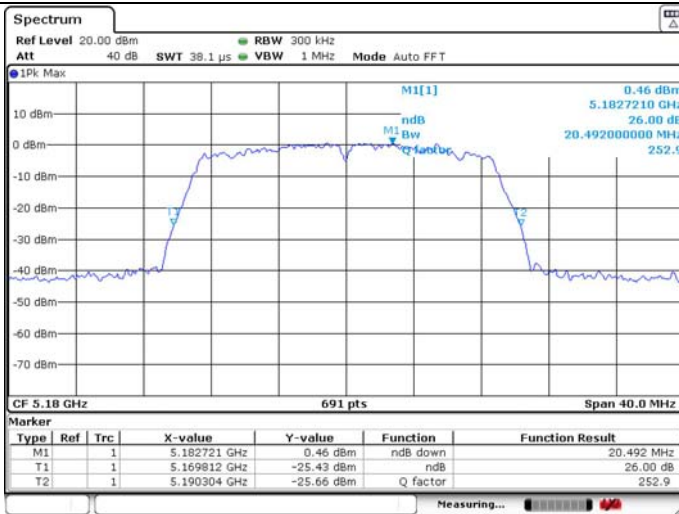


99% Occupied Bandwidth

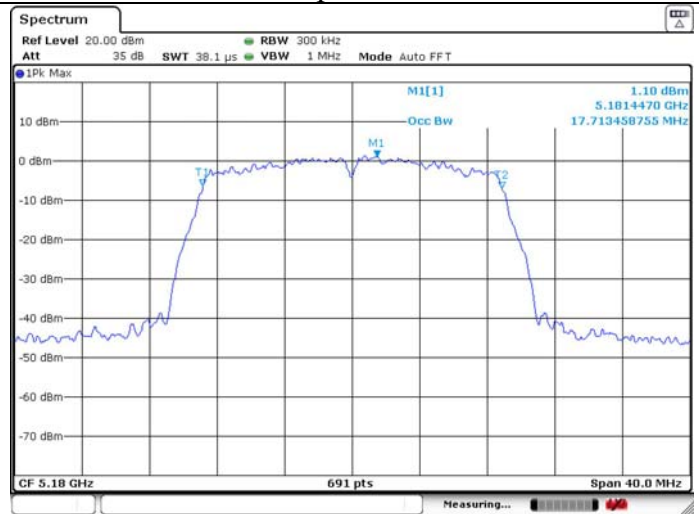


U-NII-1 IEEE 802.11n HT20 5180MHz_Ant 2

26dB Bandwidth

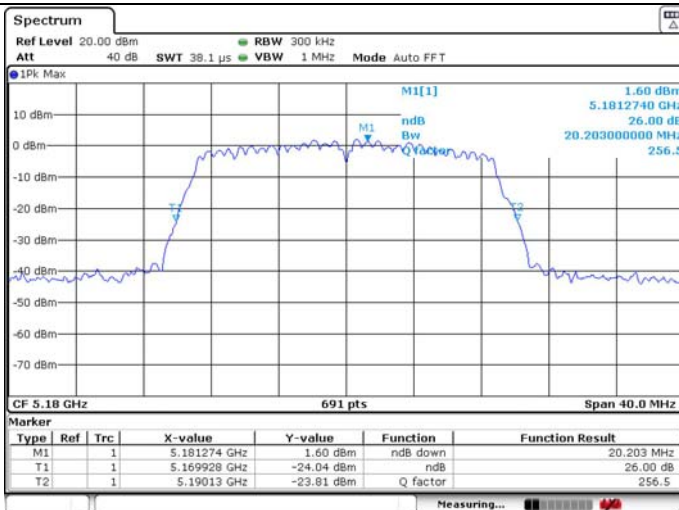


99% Occupied Bandwidth

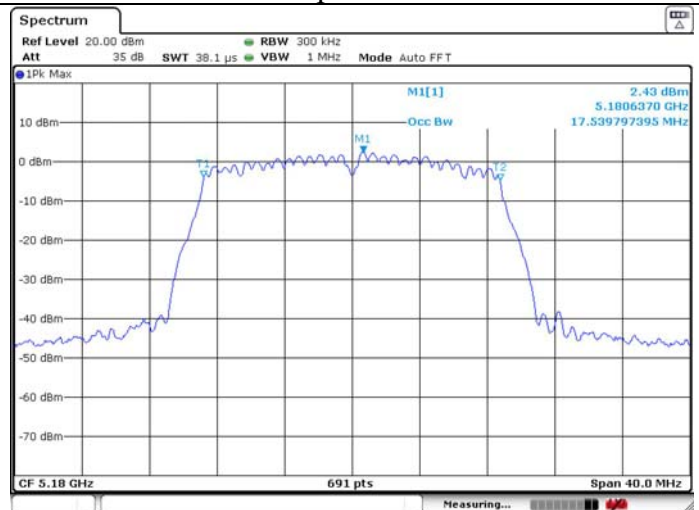





U-NII-1 IEEE 802.11n HT20 5200MHz_Ant 1

26dB Bandwidth

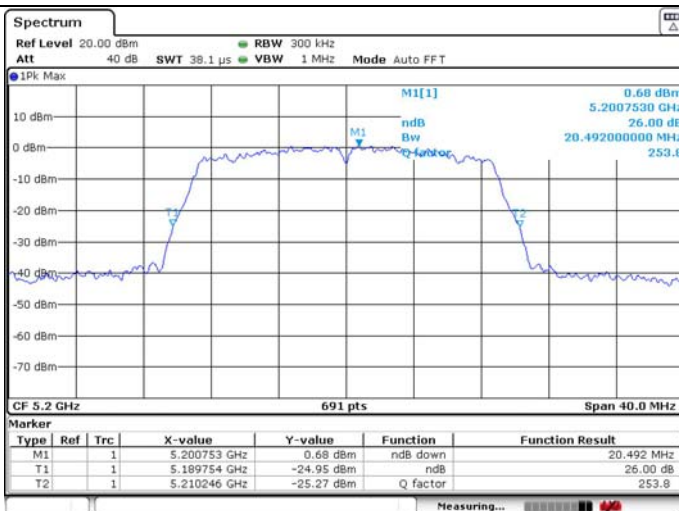


99% Occupied Bandwidth

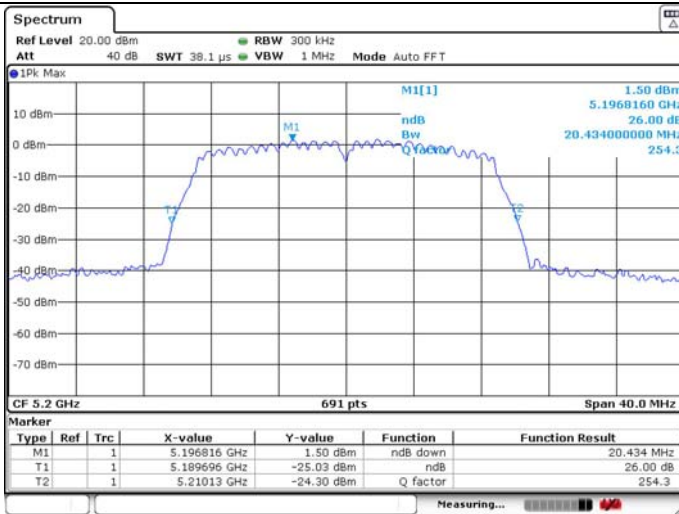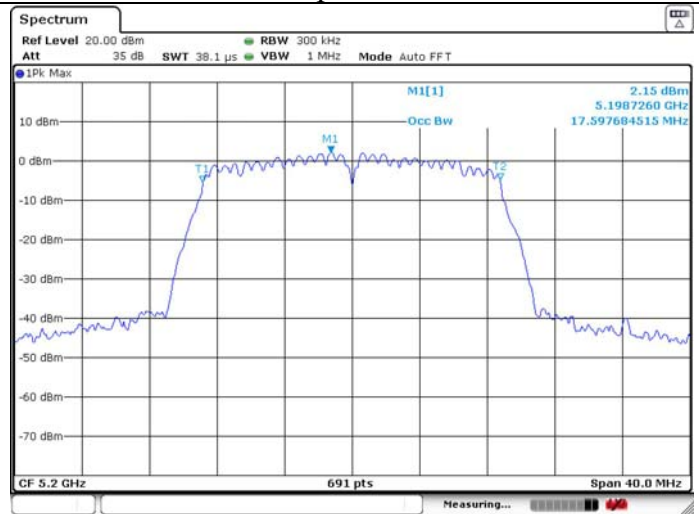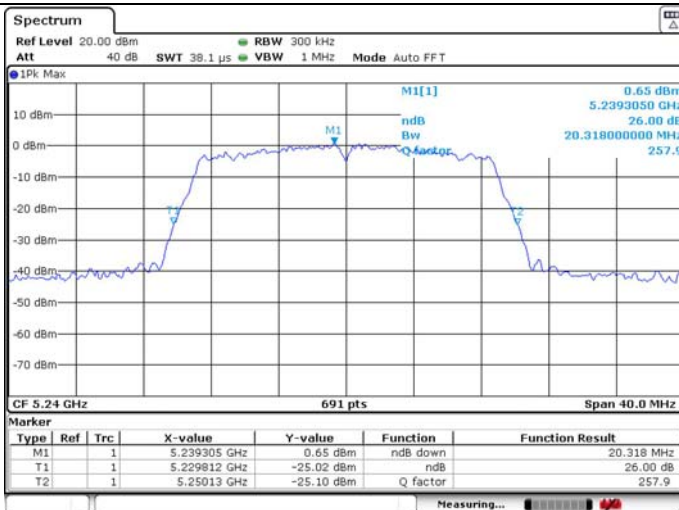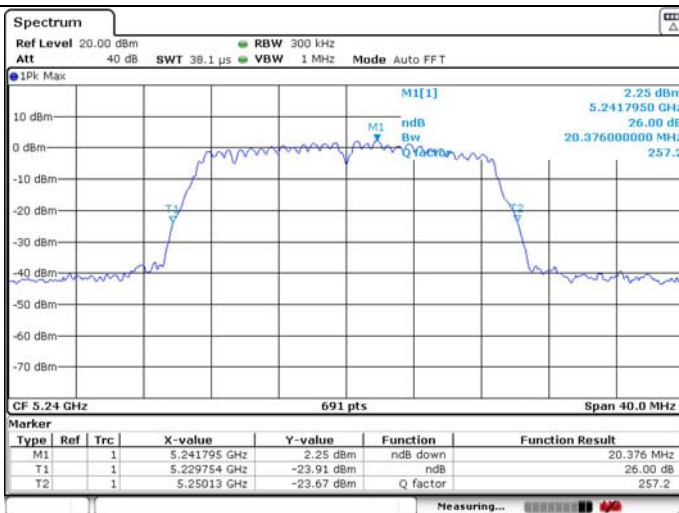


U-NII-1 IEEE 802.11n HT20 5200MHz_Ant 2**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT20 5240MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT20 5240MHz_Ant 2****26dB Bandwidth****99% Occupied Bandwidth**

U-NII-1 IEEE 802.11ac VHT20 5180MHz_Ant 1

26dB Bandwidth

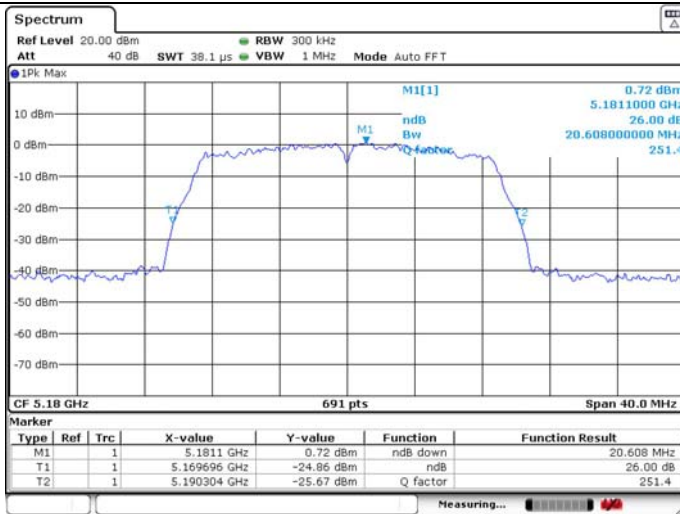


99% Occupied Bandwidth

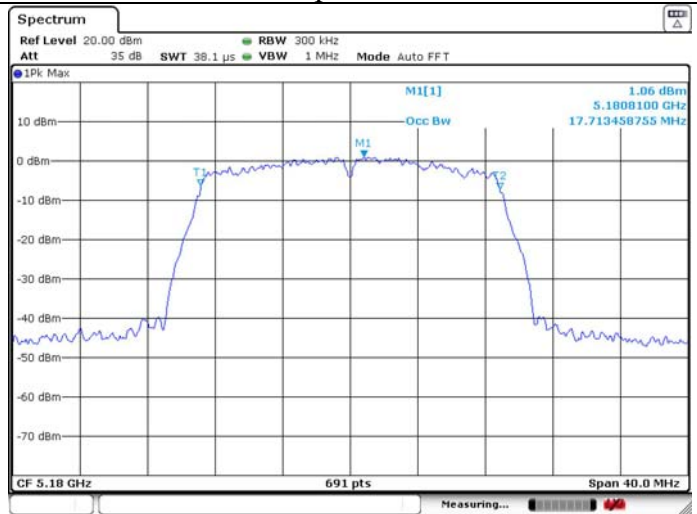


U-NII-1 IEEE 802.11ac VHT20 5180MHz_Ant 2

26dB Bandwidth

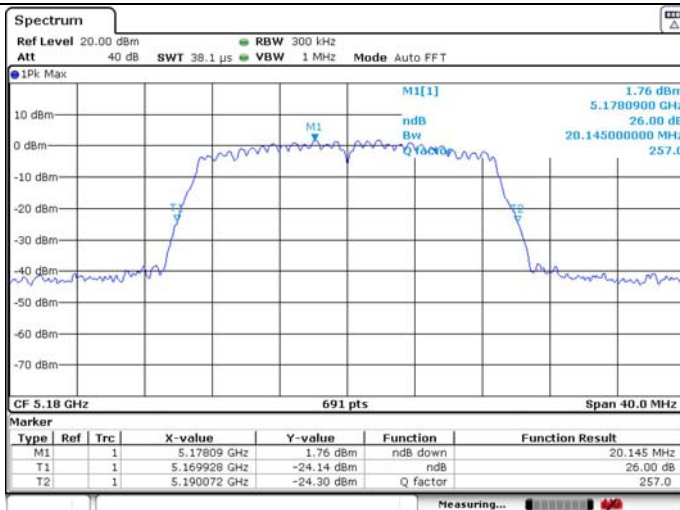


99% Occupied Bandwidth

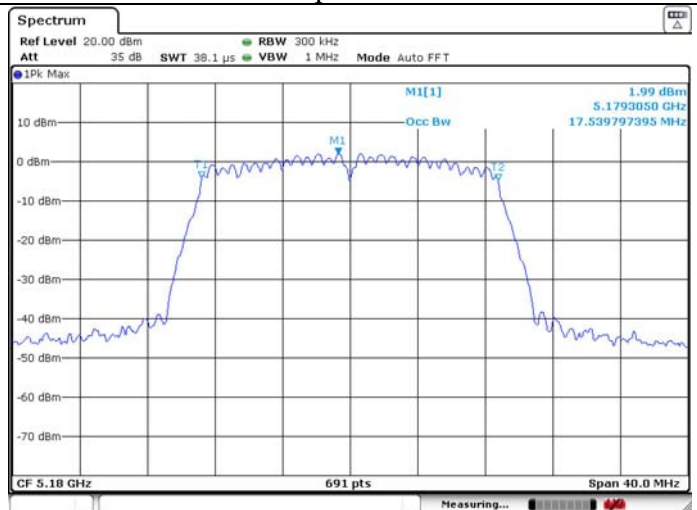


U-NII-1 IEEE 802.11ac VHT20 5200MHz_Ant 1

26dB Bandwidth

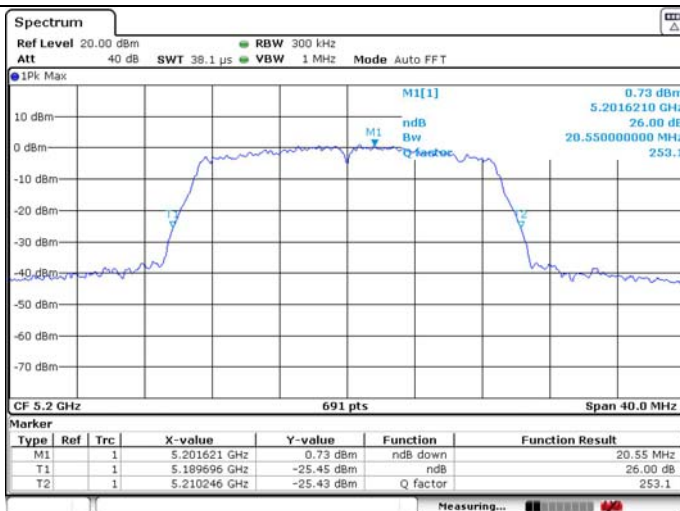


99% Occupied Bandwidth

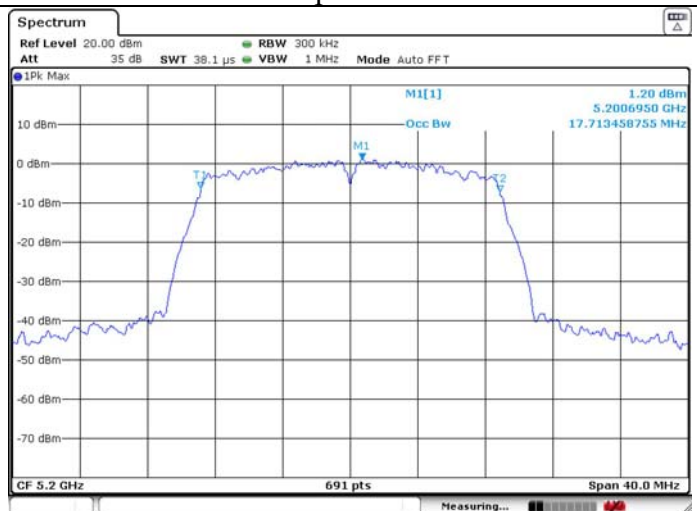


U-NII-1 IEEE 802.11ac VHT20 5200MHz_Ant 2

26dB Bandwidth

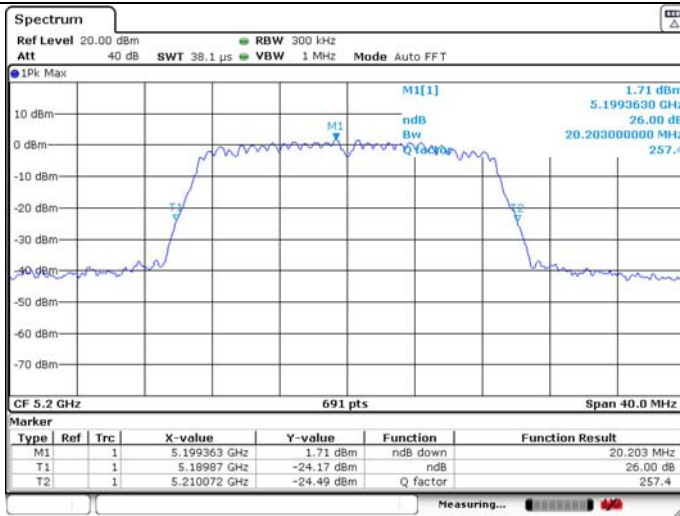


99% Occupied Bandwidth

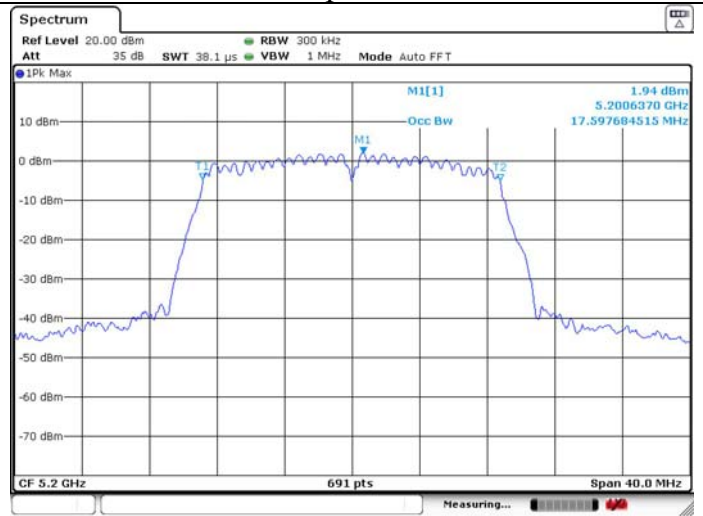

U-NII-1 IEEE 802.11ac VHT20 5240MHz_Ant 1

26dB Bandwidth

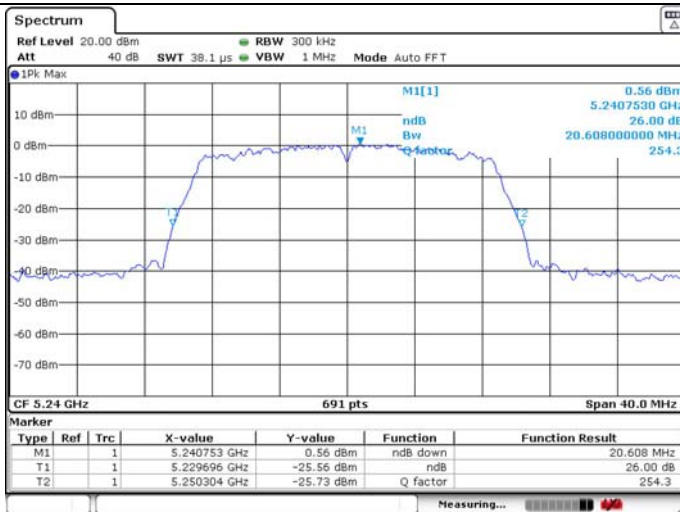


99% Occupied Bandwidth




U-NII-1 IEEE 802.11ac VHT20 5240MHz_Ant 2

26dB Bandwidth

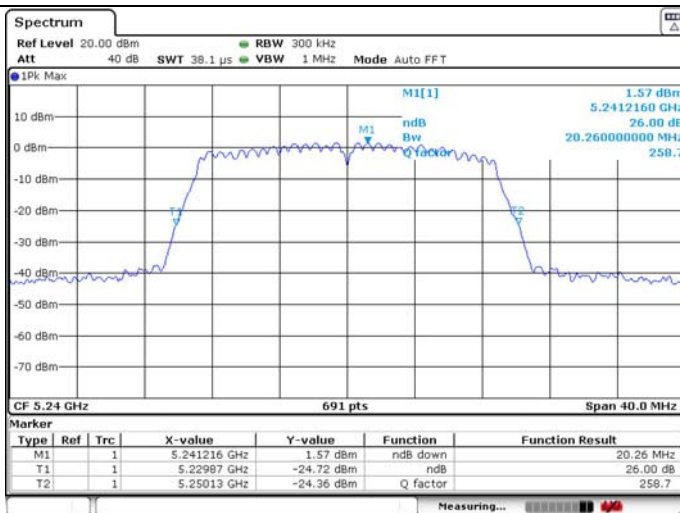


99% Occupied Bandwidth

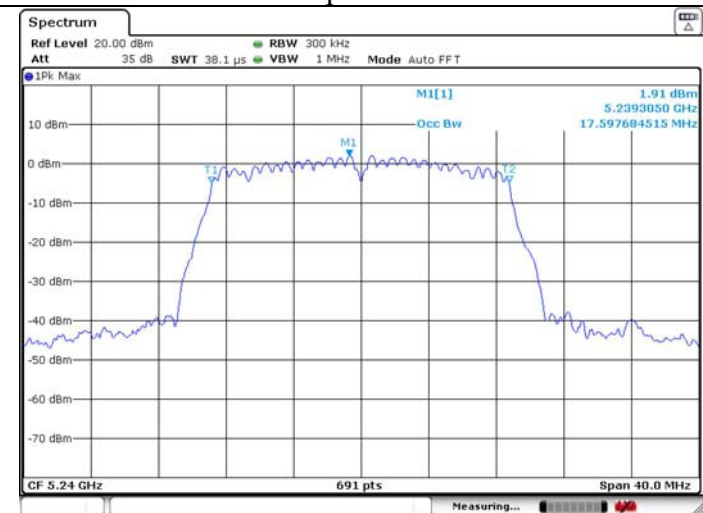


U-NII-1 IEEE 802.11n HT40 5190MHz_Ant 1

26dB Bandwidth

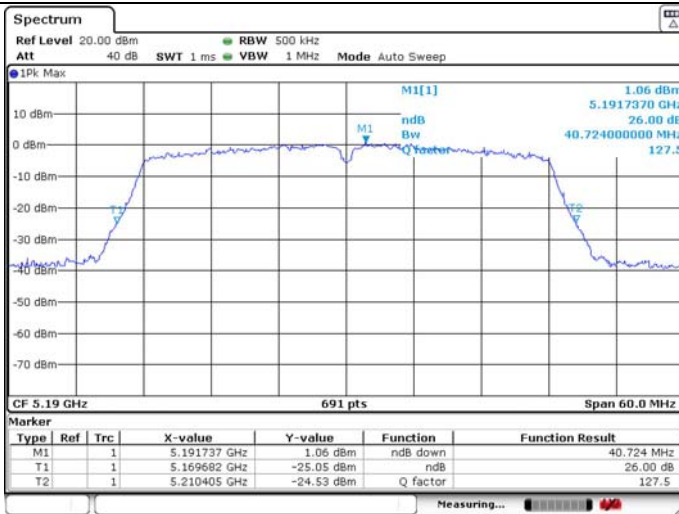


99% Occupied Bandwidth

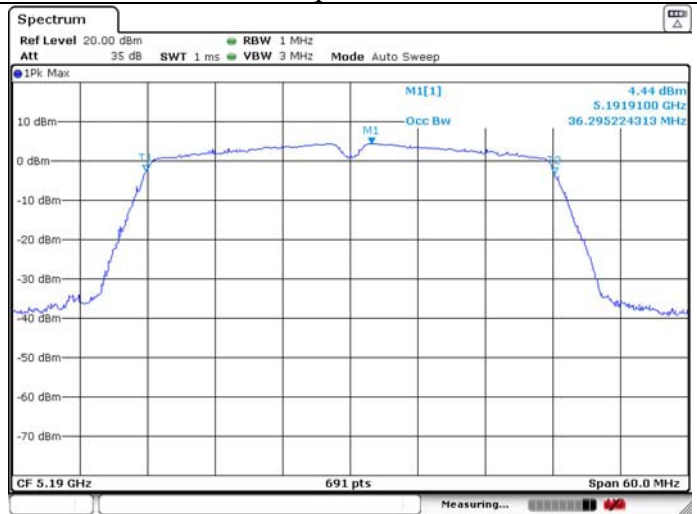

U-NII-1 IEEE 802.11n HT40 5190MHz_Ant 2

26dB Bandwidth

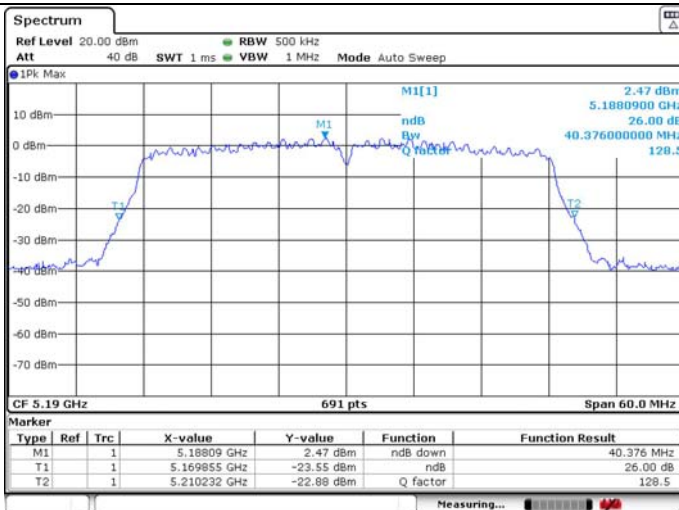


99% Occupied Bandwidth







U-NII-1 IEEE 802.11n HT40 5230MHz_Ant 1

26dB Bandwidth

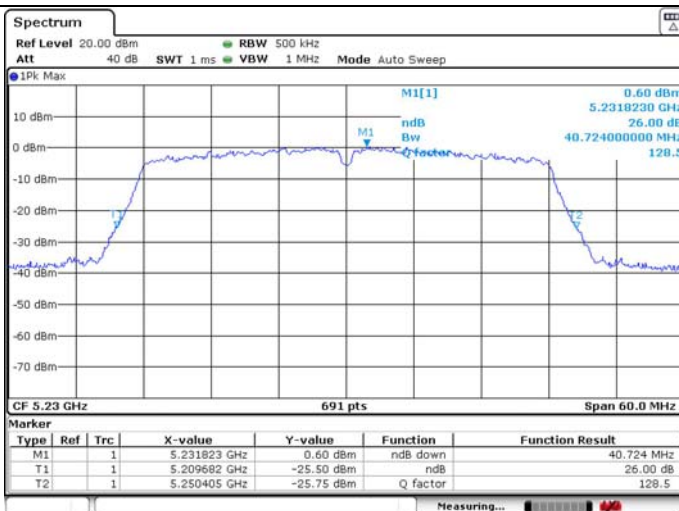


99% Occupied Bandwidth

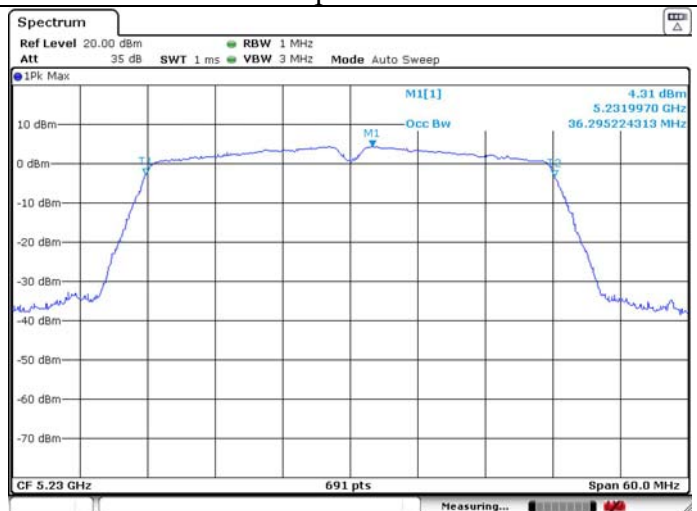

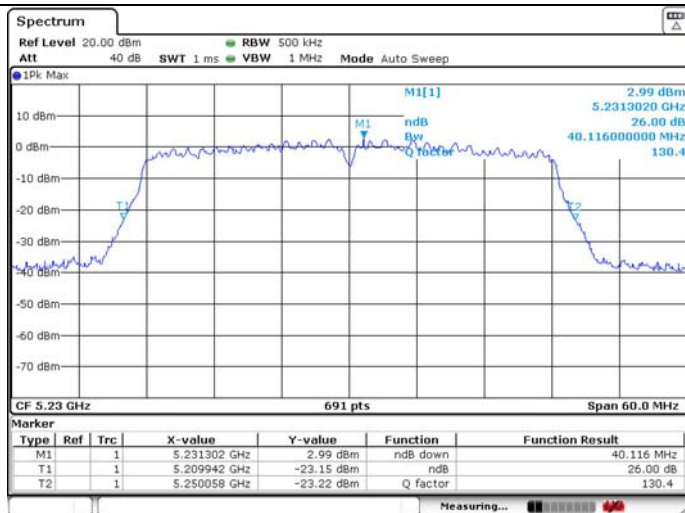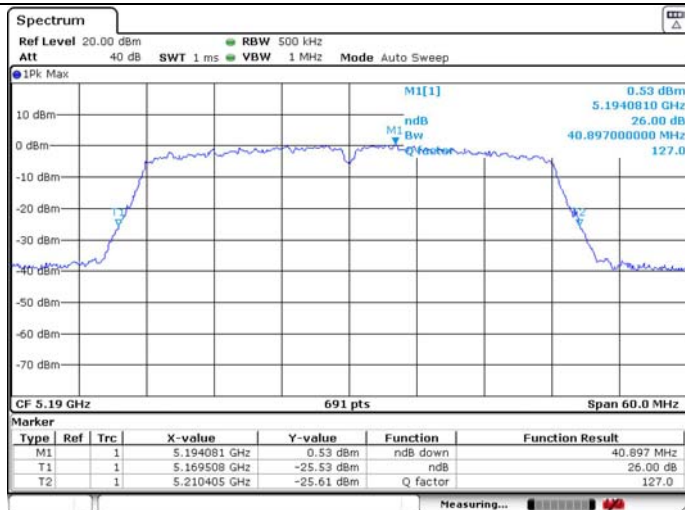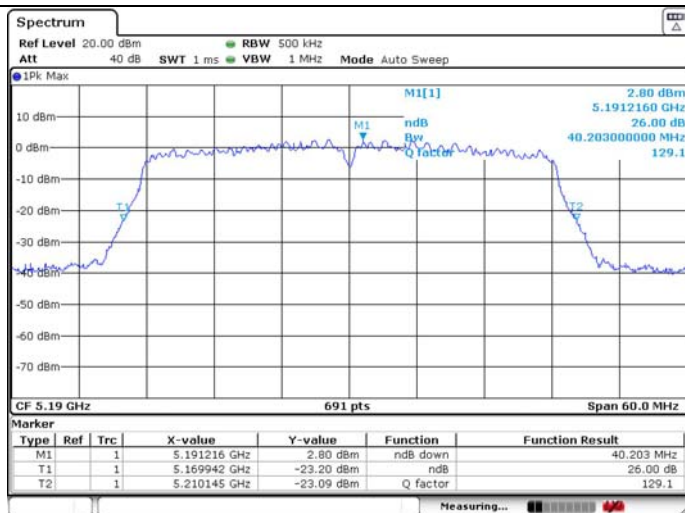
U-NII-1 IEEE 802.11n HT40 5230MHz_Ant 2**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT40 5190MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT40 5190MHz_Ant 2****26dB Bandwidth****99% Occupied Bandwidth**

U-NII-1 IEEE 802.11ac VHT40 5230MHz_Ant 1

26dB Bandwidth

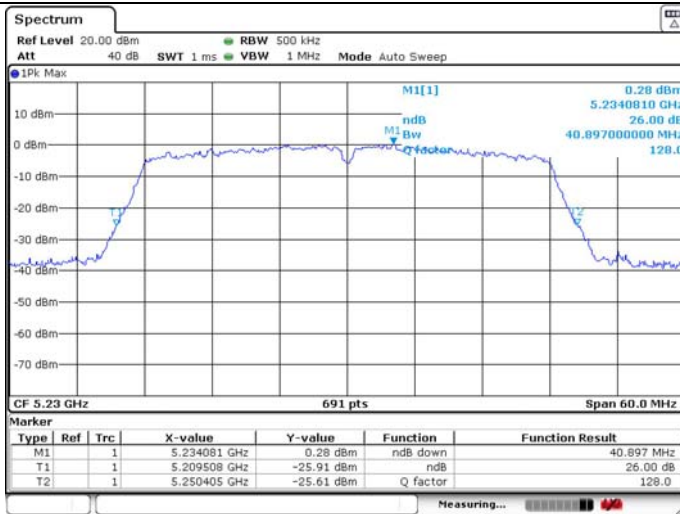


99% Occupied Bandwidth

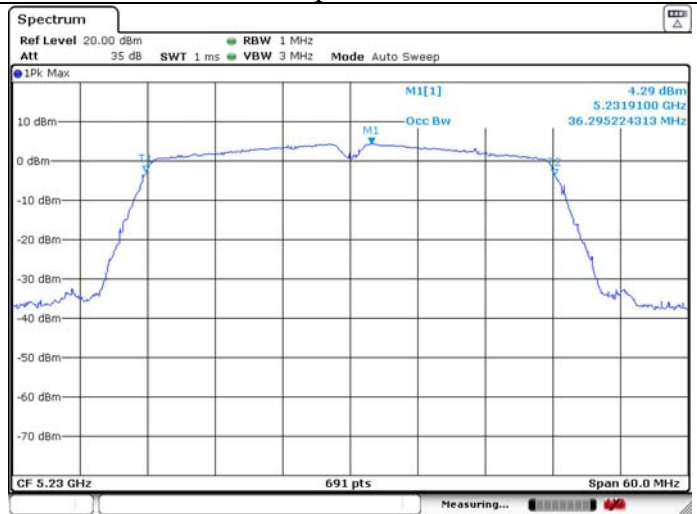


U-NII-1 IEEE 802.11ac VHT40 5230MHz_Ant 2

26dB Bandwidth

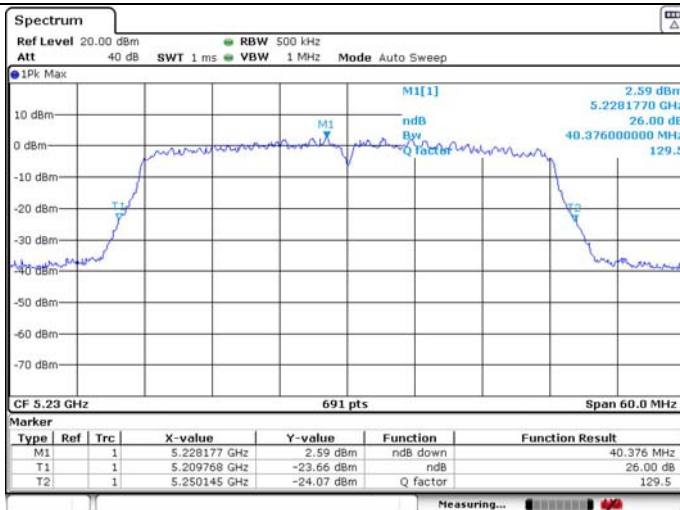


99% Occupied Bandwidth

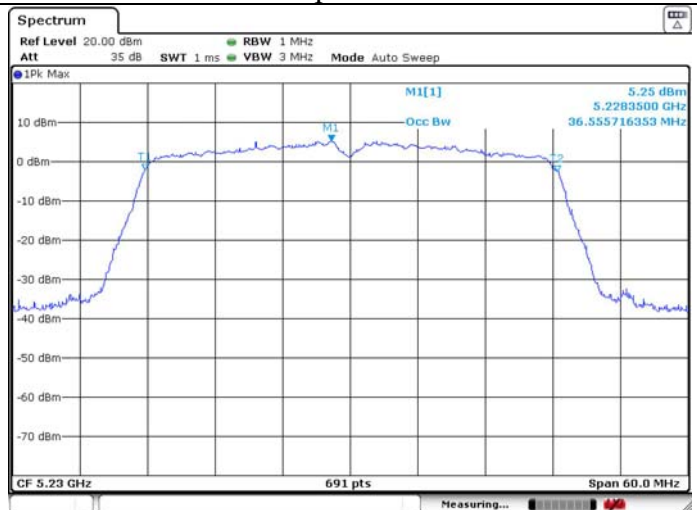


U-NII-1 IEEE 802.11ac VHT80 5210MHz_Ant 1

26dB Bandwidth

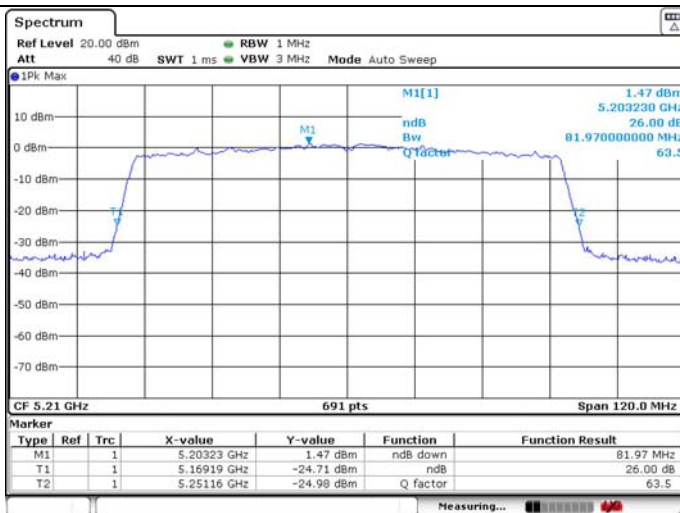


99% Occupied Bandwidth



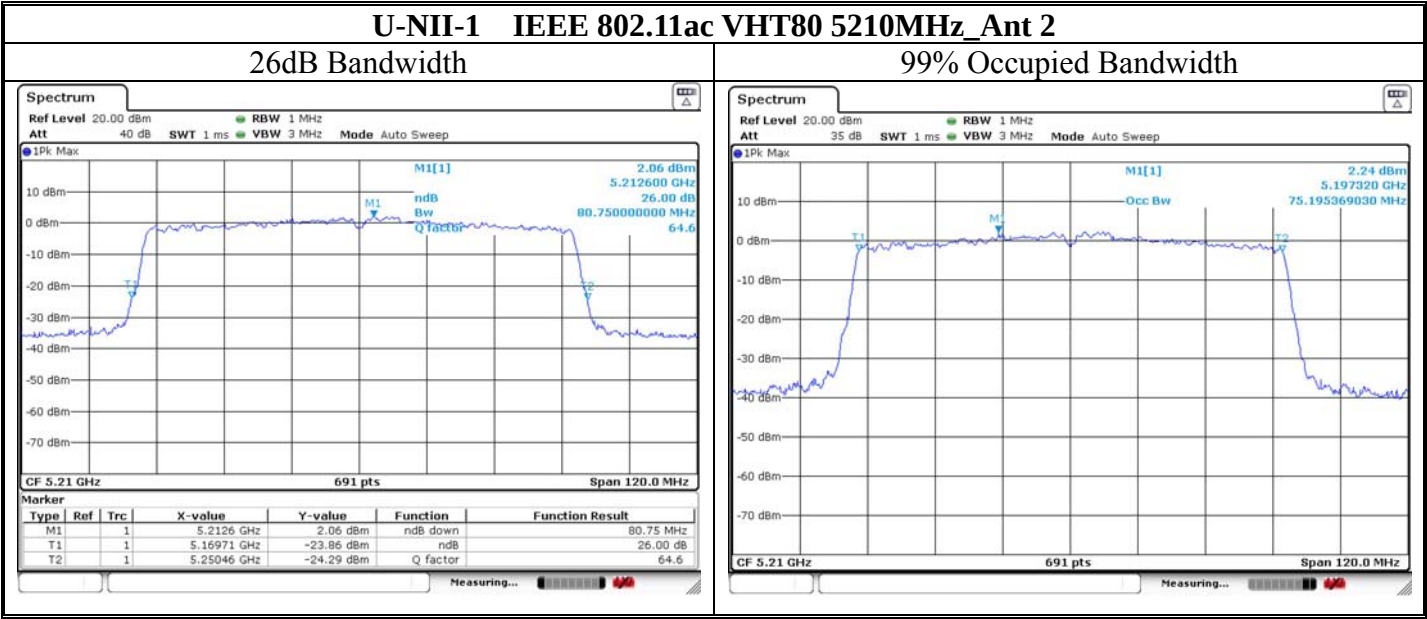


U-NII-2A IEEE 802.11a 5260MHz_Ant 1

26dB Bandwidth

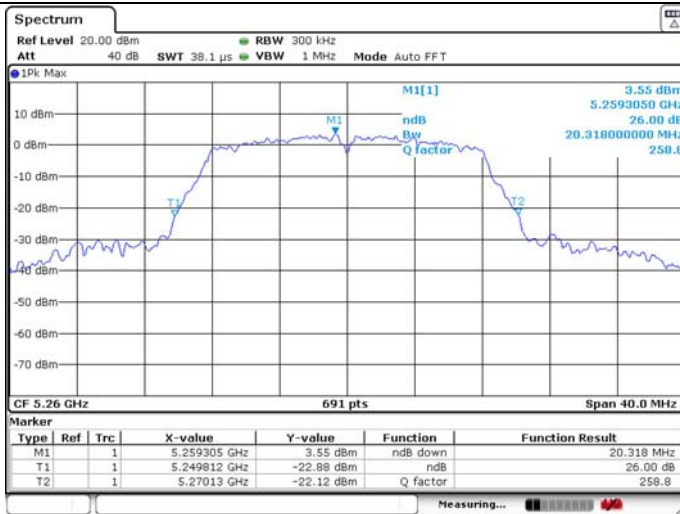


99% Occupied Bandwidth

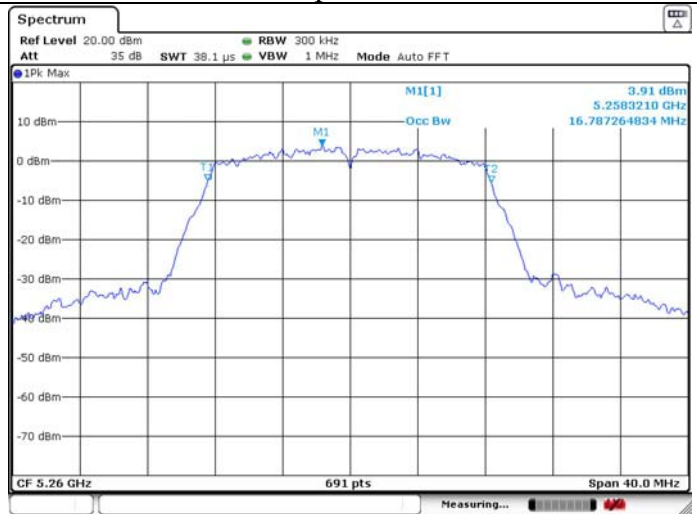


U-NII-2A IEEE 802.11a 5300MHz_Ant 1

26dB Bandwidth

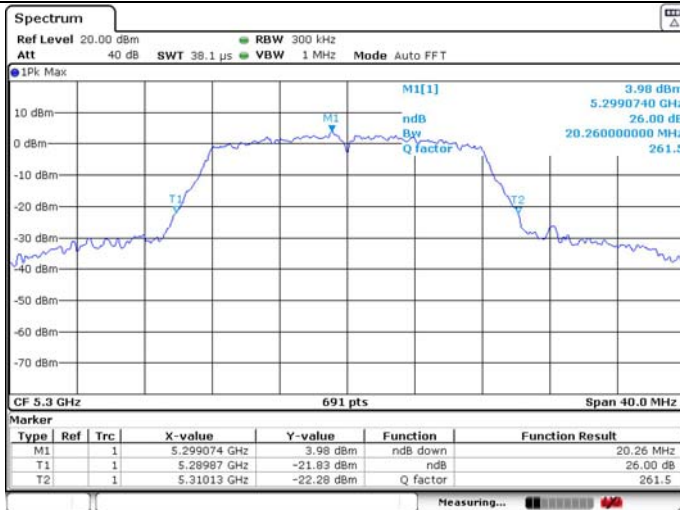


99% Occupied Bandwidth

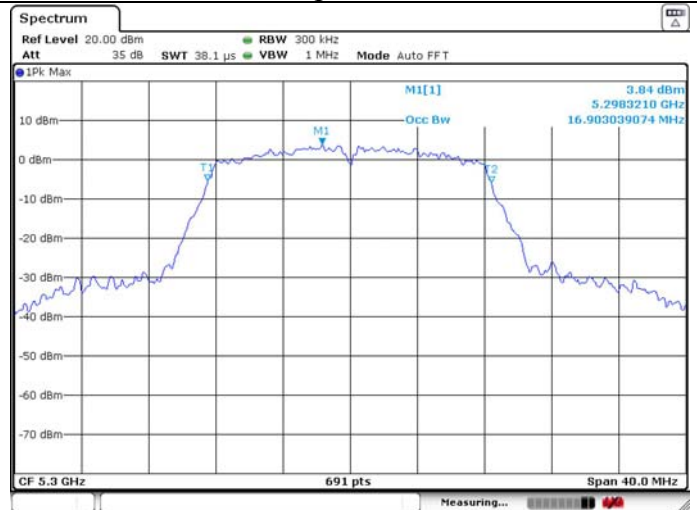


U-NII-2A IEEE 802.11a 5320MHz_Ant 1

26dB Bandwidth

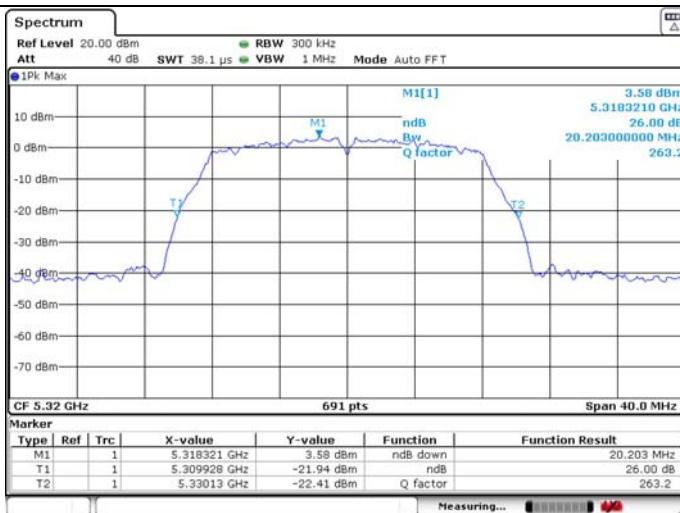


99% Occupied Bandwidth

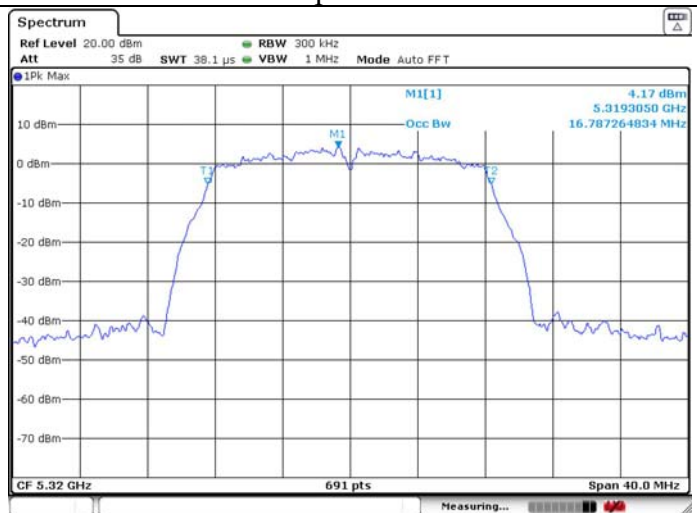


U-NII-2A IEEE 802.11a 5260MHz_Ant 2

26dB Bandwidth

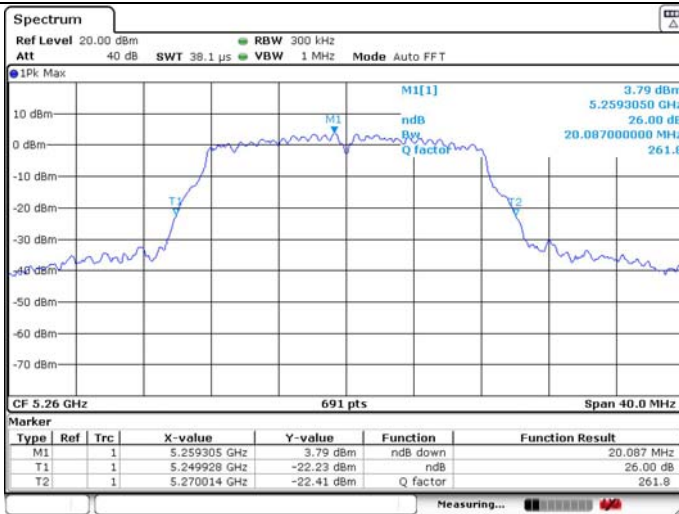


99% Occupied Bandwidth

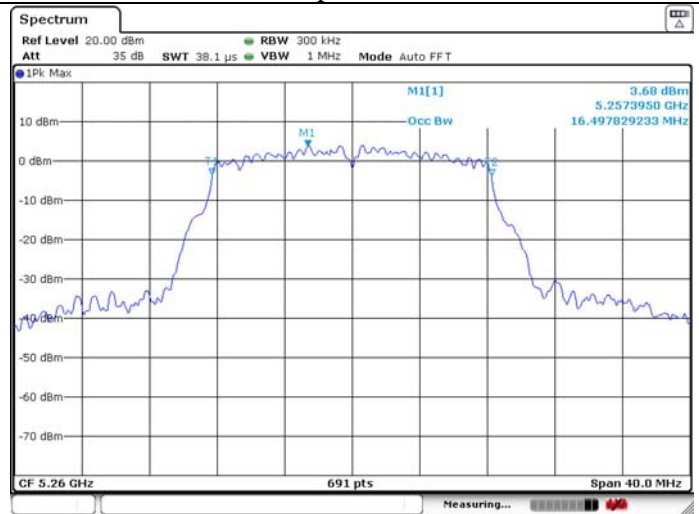

U-NII-2A IEEE 802.11a 5300MHz_Ant 2

26dB Bandwidth

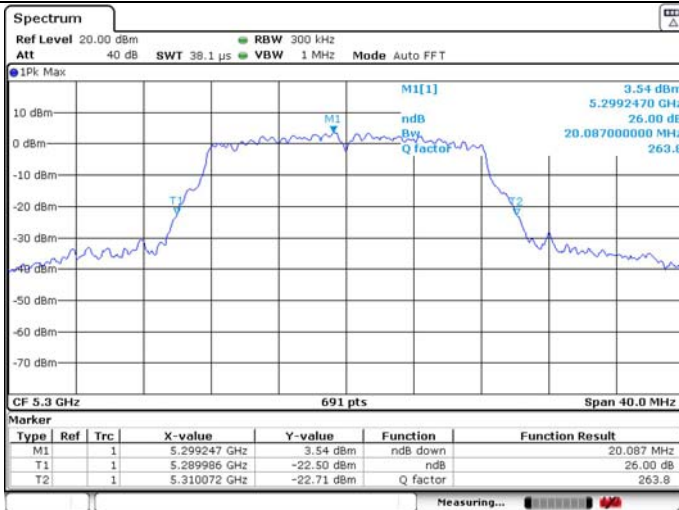


99% Occupied Bandwidth



U-NII-2A IEEE 802.11a 5320MHz_Ant 2

26dB Bandwidth

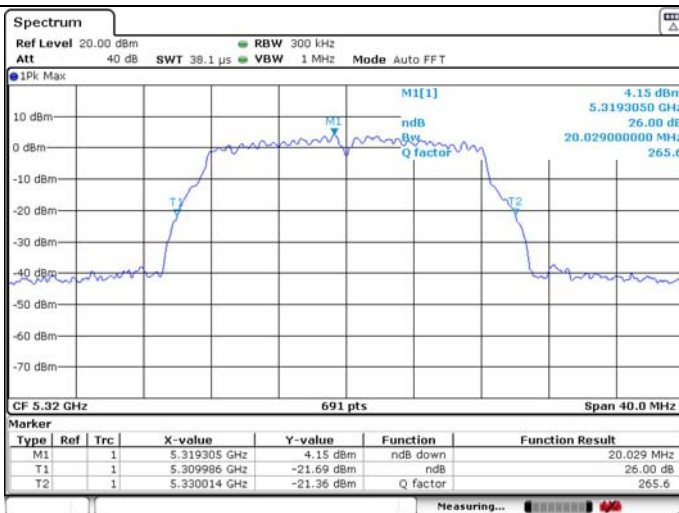


99% Occupied Bandwidth




U-NII-2A 802.11n HT20 5260MHz_Ant 1

26dB Bandwidth

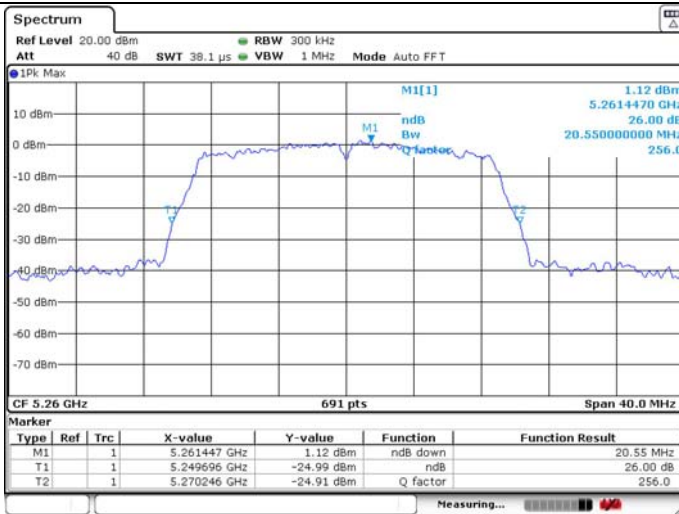


99% Occupied Bandwidth

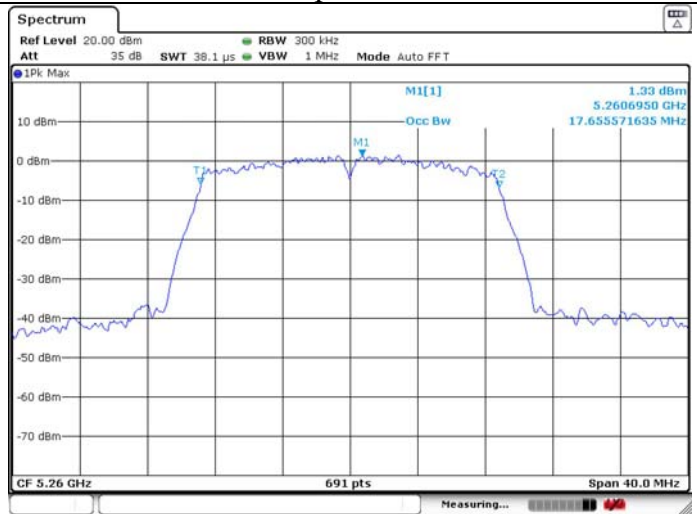


U-NII-2A 802.11n HT20 5260MHz_Ant 2

26dB Bandwidth

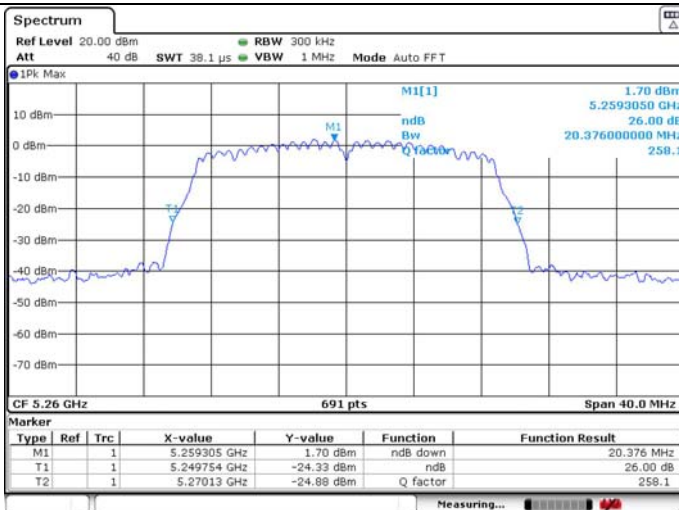


99% Occupied Bandwidth

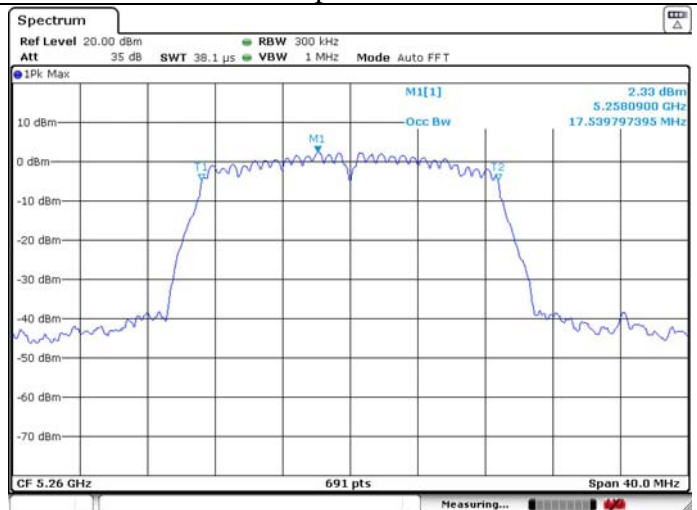







U-NII-2A 802.11n HT20 5300MHz_Ant 1

26dB Bandwidth

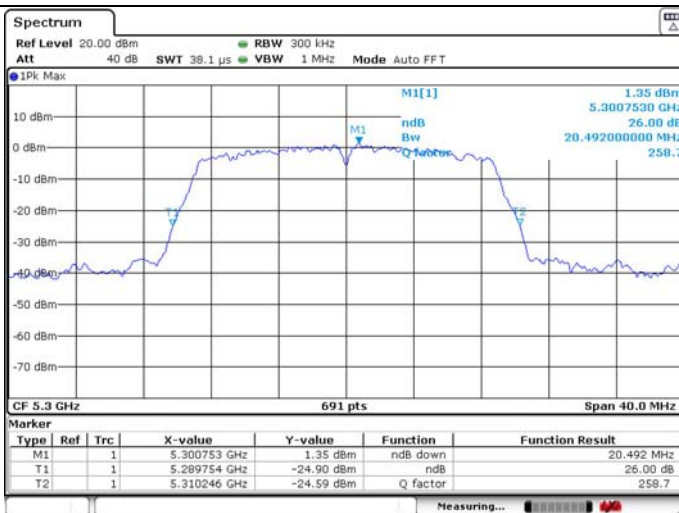


99% Occupied Bandwidth

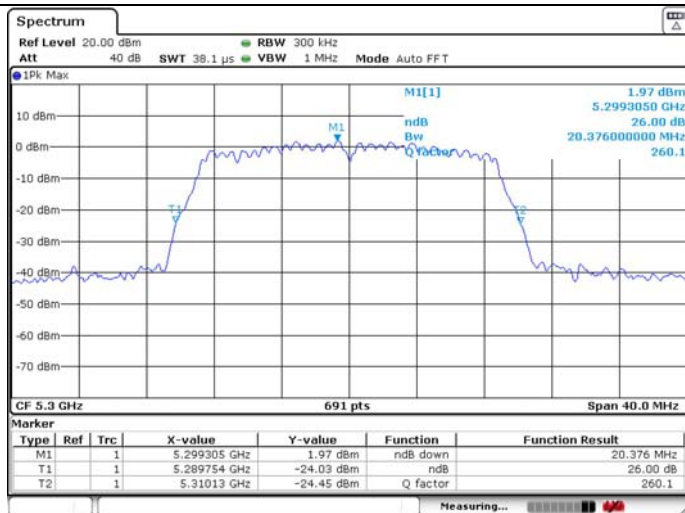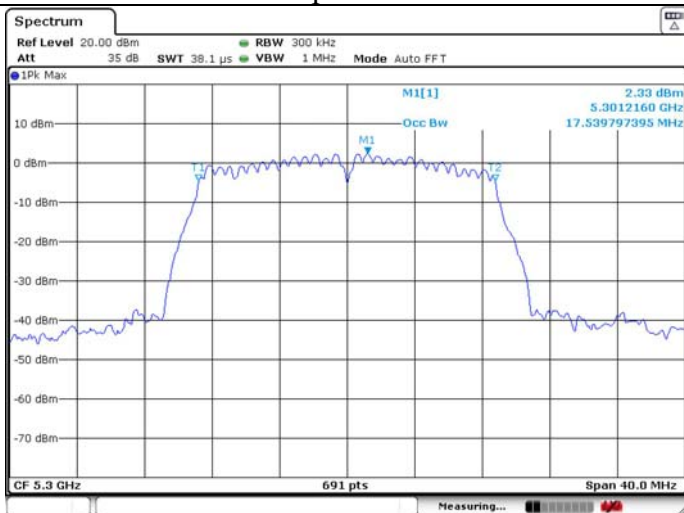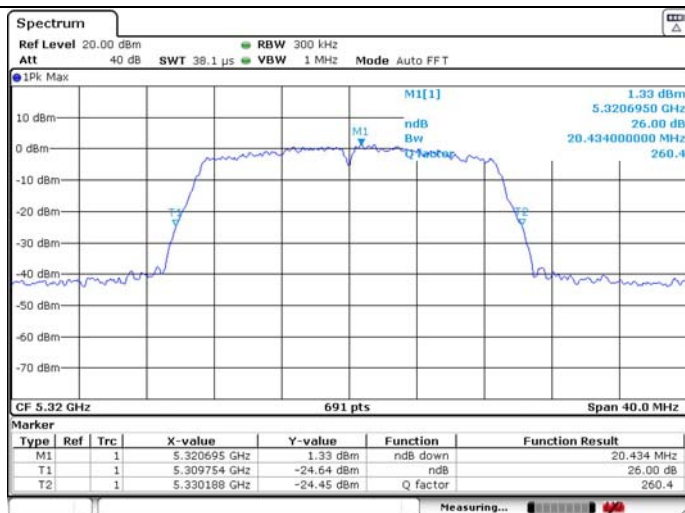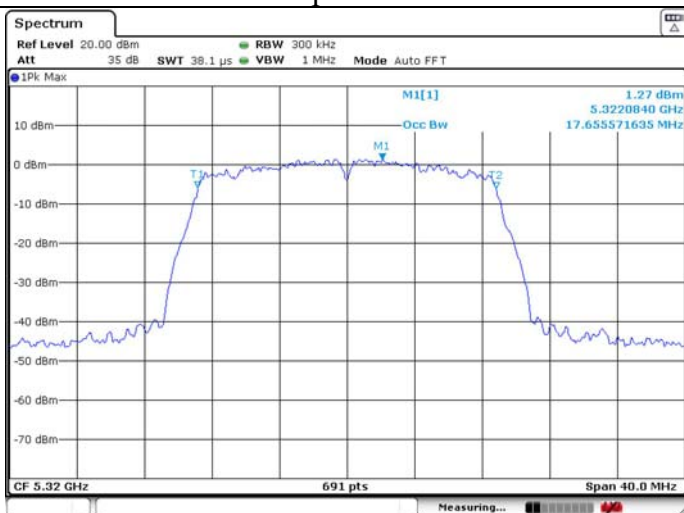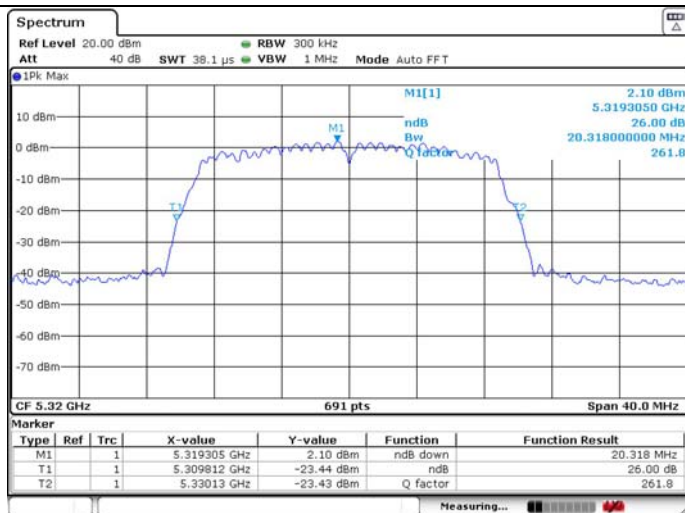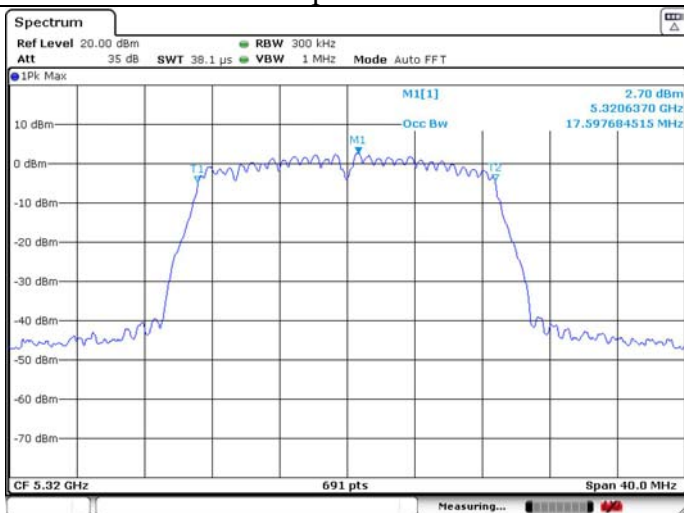


U-NII-2A IEEE 802.11n HT20 5300MHz_Ant 2**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11n HT20 5320MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11n HT20 5320MHz_Ant 2****26dB Bandwidth****99% Occupied Bandwidth**

U-NII-2A IEEE 802.11ac VHT20 5260MHz_Ant 1

26dB Bandwidth

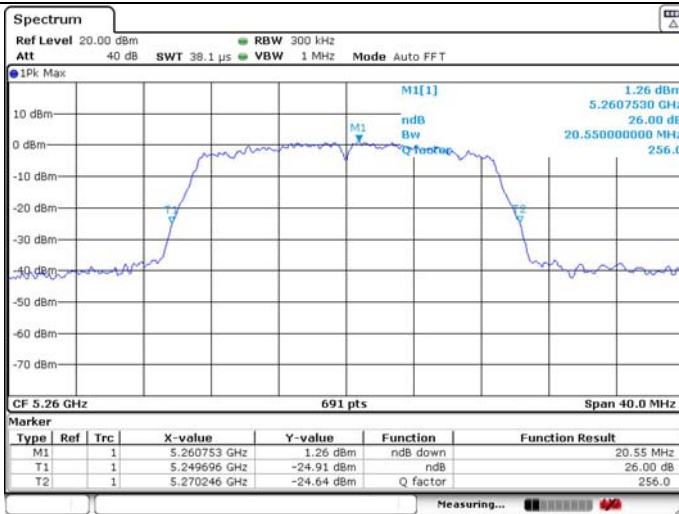


99% Occupied Bandwidth

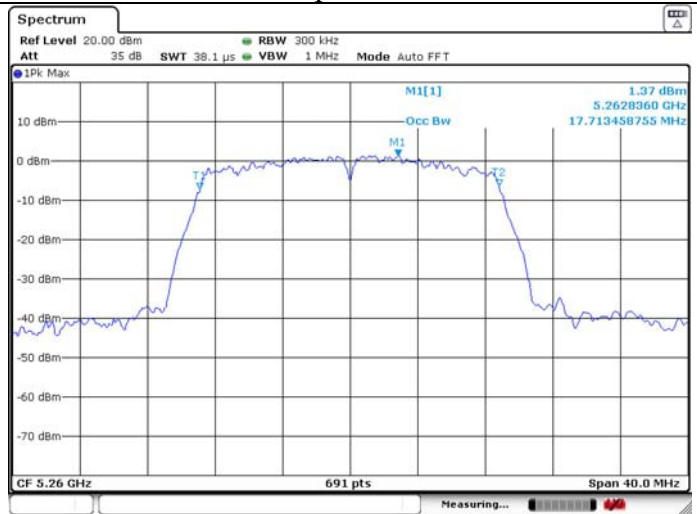


U-NII-2A IEEE 802.11ac VHT20 5260MHz_Ant 2

26dB Bandwidth

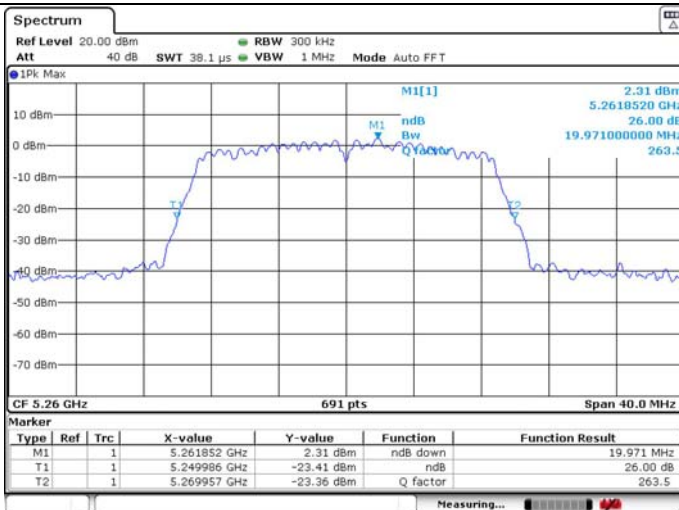


99% Occupied Bandwidth

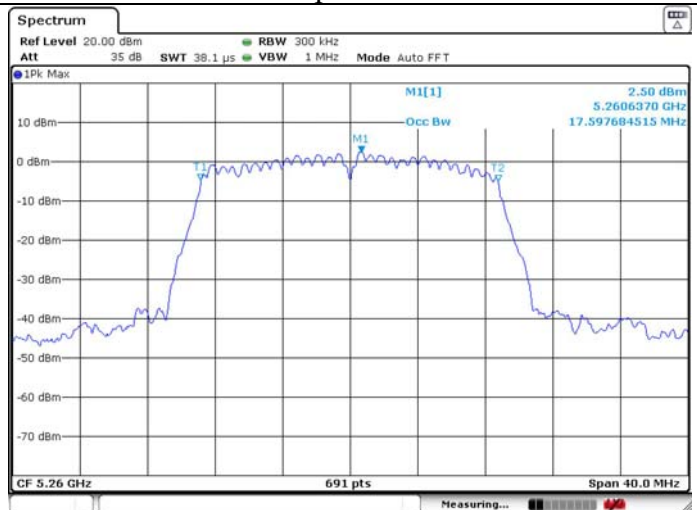


U-NII-2A IEEE 802.11ac VHT20 5300MHz_Ant 1

26dB Bandwidth

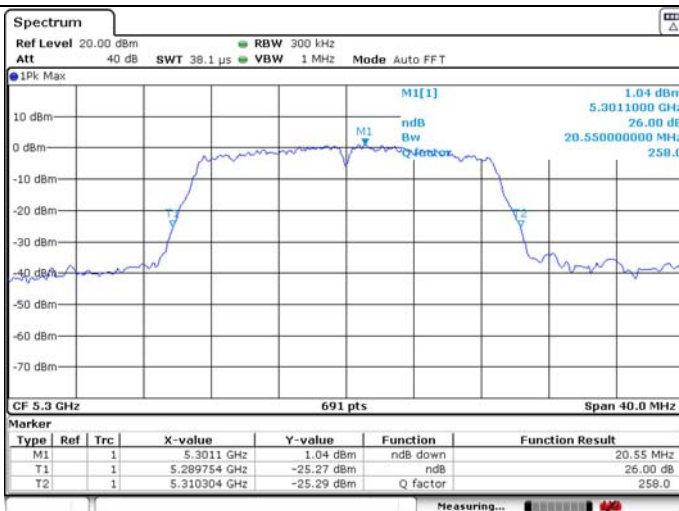


99% Occupied Bandwidth

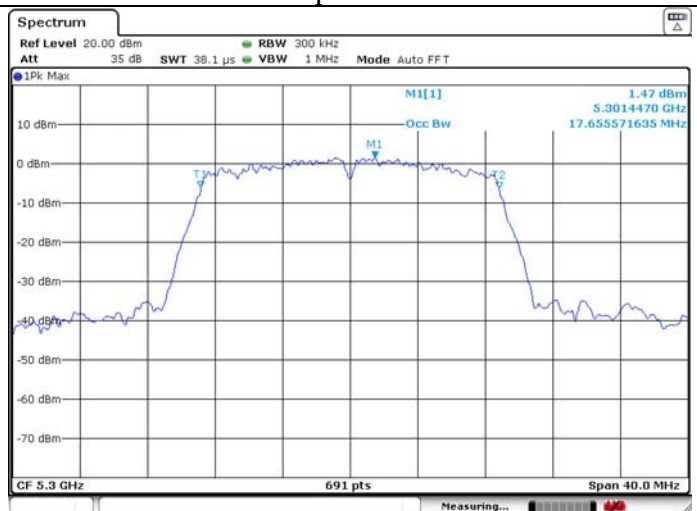


U-NII-2A IEEE 802.11ac VHT20 5300MHz_Ant 2

26dB Bandwidth

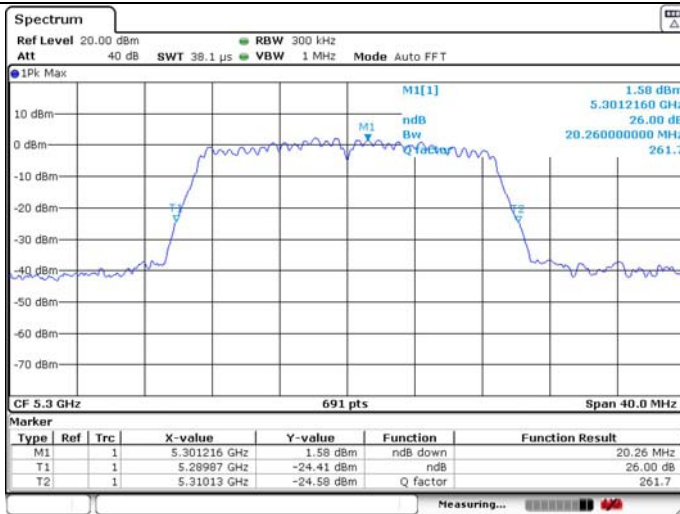


99% Occupied Bandwidth

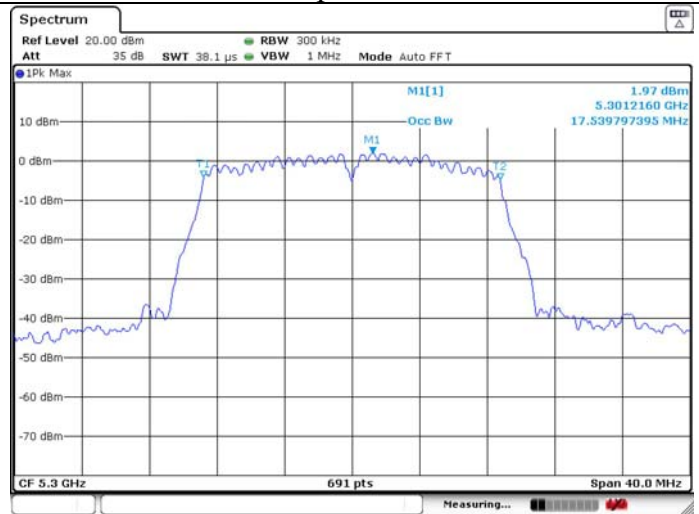


U-NII-2A IEEE 802.11ac VHT20 5320MHz_Ant 1

26dB Bandwidth

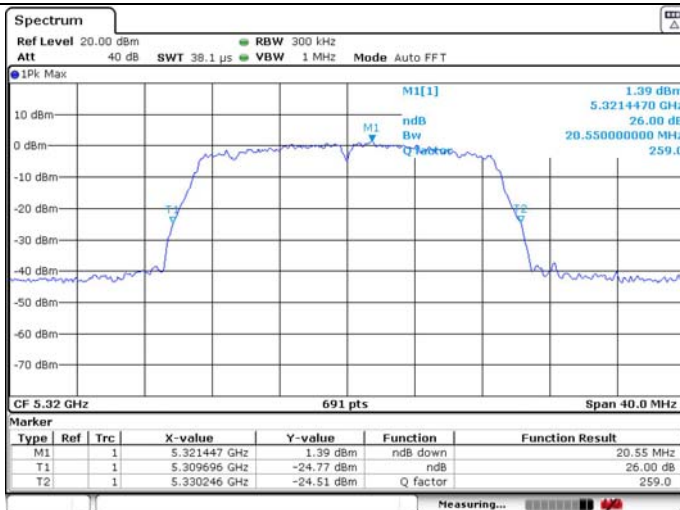


99% Occupied Bandwidth

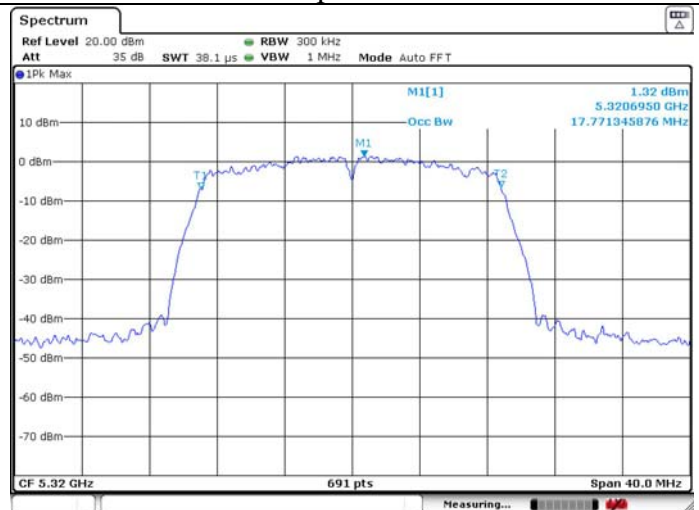


U-NII-2A IEEE 802.11ac VHT20 5320MHz_Ant 2

26dB Bandwidth

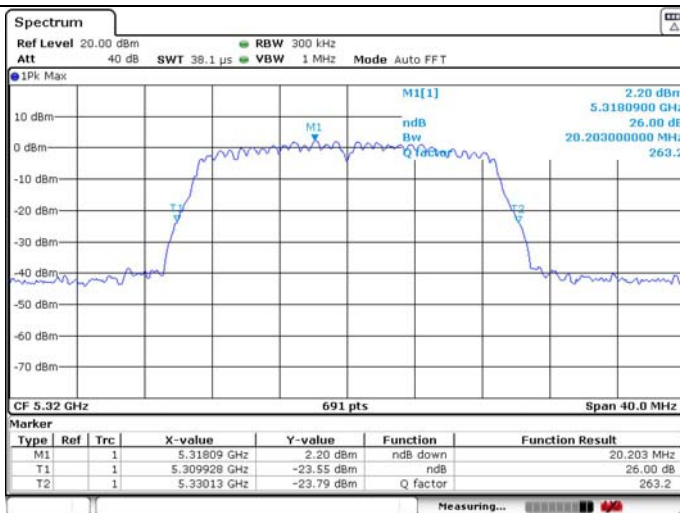


99% Occupied Bandwidth

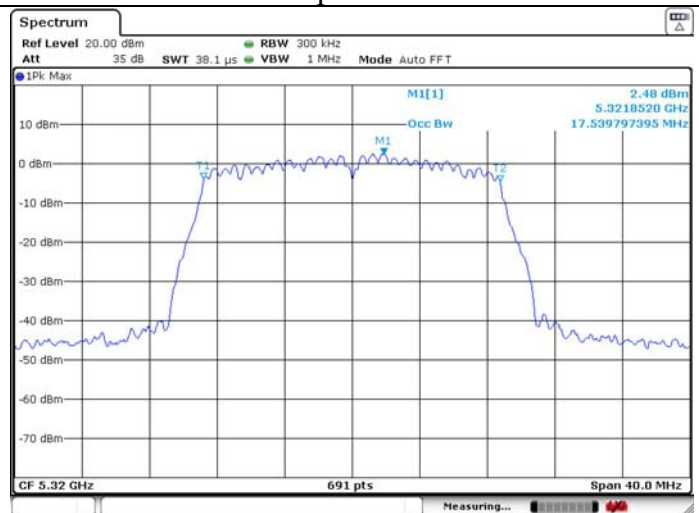


U-NII-2A IEEE 802.11n HT40 5270MHz_Ant 1

26dB Bandwidth

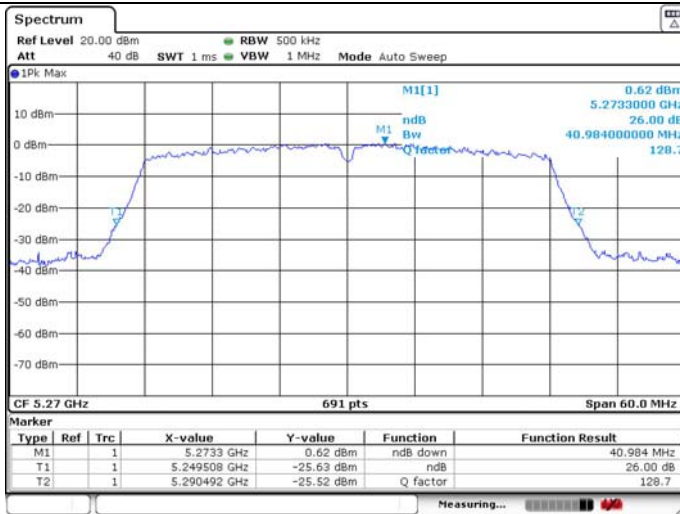


99% Occupied Bandwidth

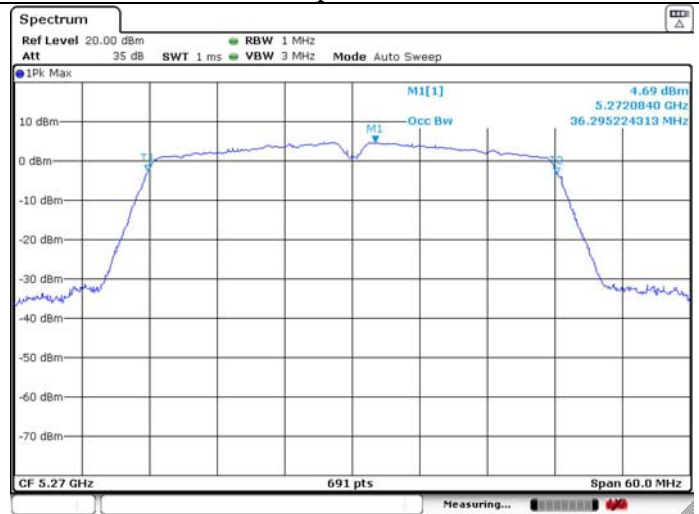

U-NII-2A IEEE 802.11n HT40 5270MHz_Ant 2

26dB Bandwidth

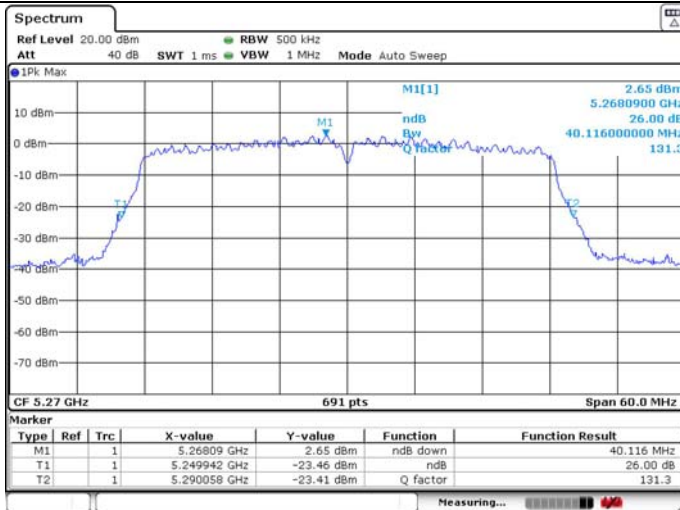


99% Occupied Bandwidth







U-NII-2A IEEE 802.11n HT40 5310MHz_Ant 1

26dB Bandwidth

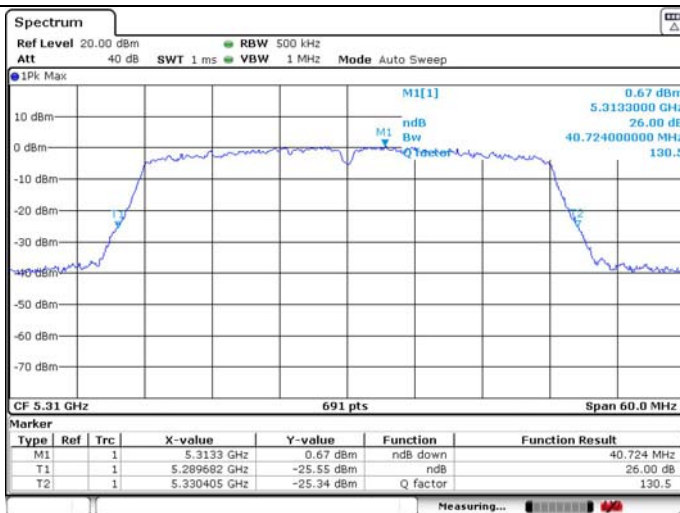


99% Occupied Bandwidth

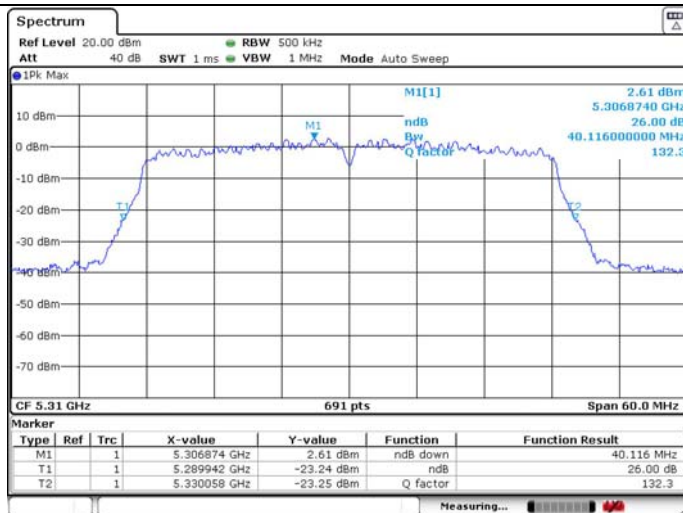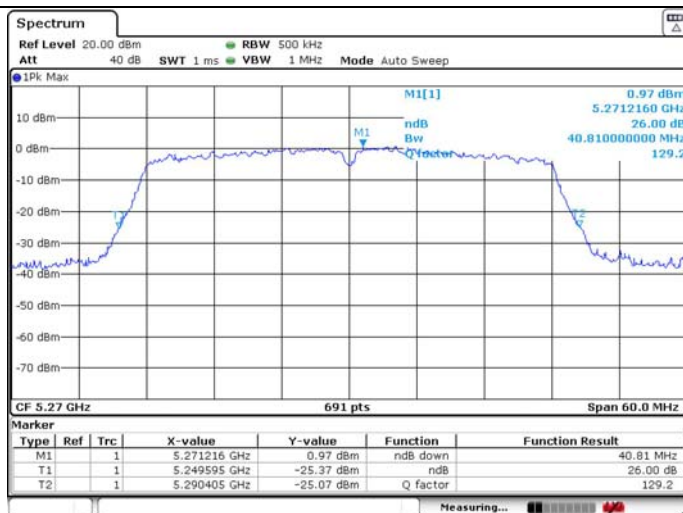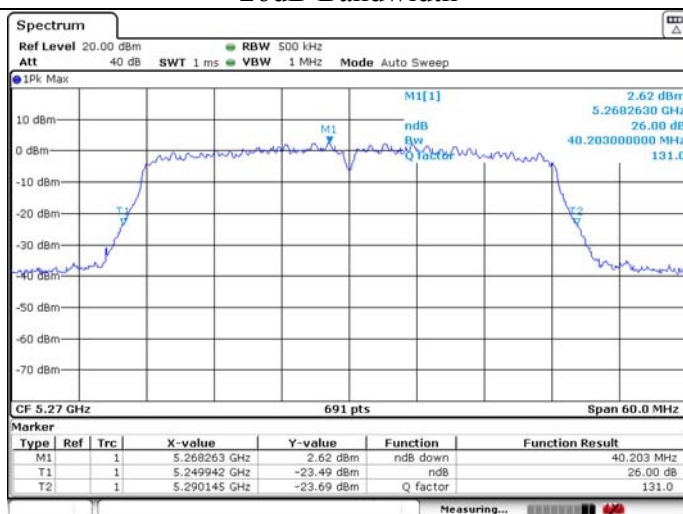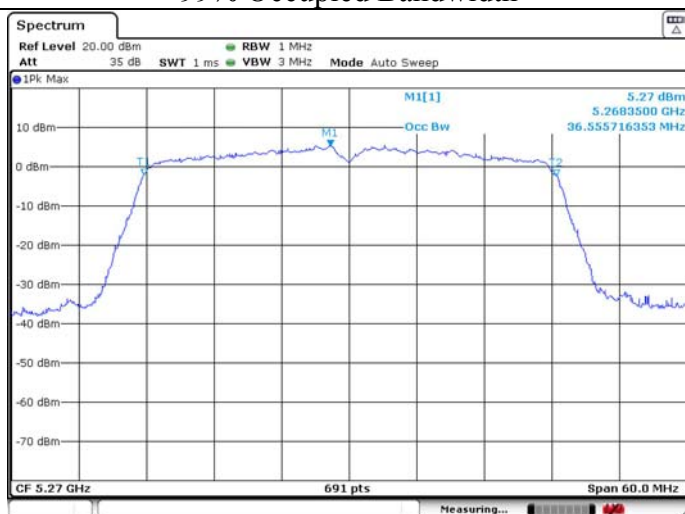

U-NII-2A IEEE 802.11n HT40 5310MHz_Ant 2**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11ac VHT40 5270MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11ac VHT40 5270MHz_Ant 2****26dB Bandwidth****99% Occupied Bandwidth**

U-NII-2A IEEE 802.11ac VHT40 5310MHz_Ant 1

26dB Bandwidth

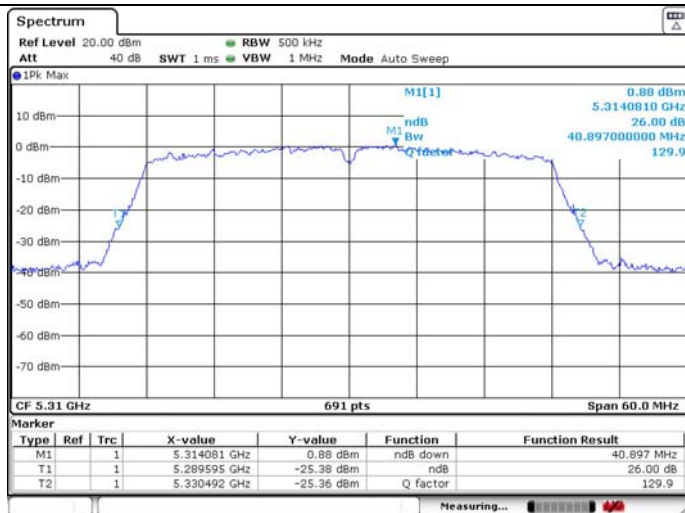


99% Occupied Bandwidth



U-NII-2A IEEE 802.11ac VHT40 5310MHz_Ant 2

26dB Bandwidth

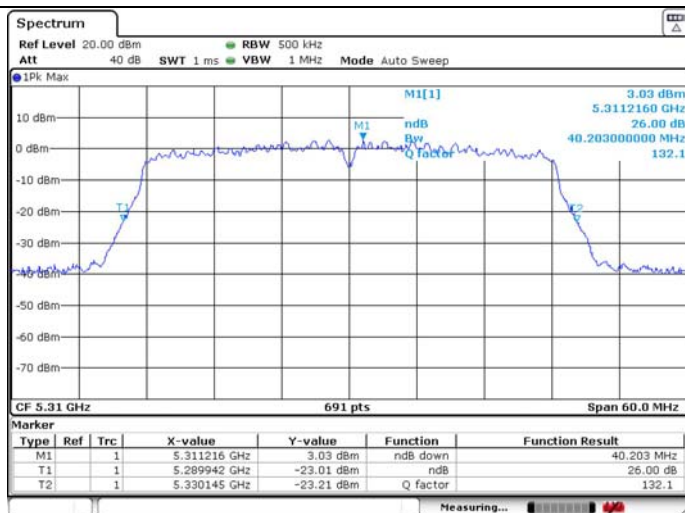


99% Occupied Bandwidth





U-NII-2A IEEE 802.11ac VHT80 5290MHz_Ant 1

26dB Bandwidth

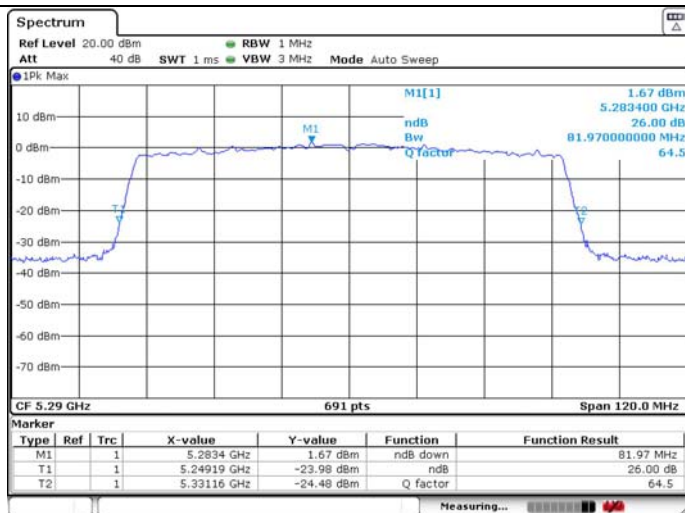


99% Occupied Bandwidth

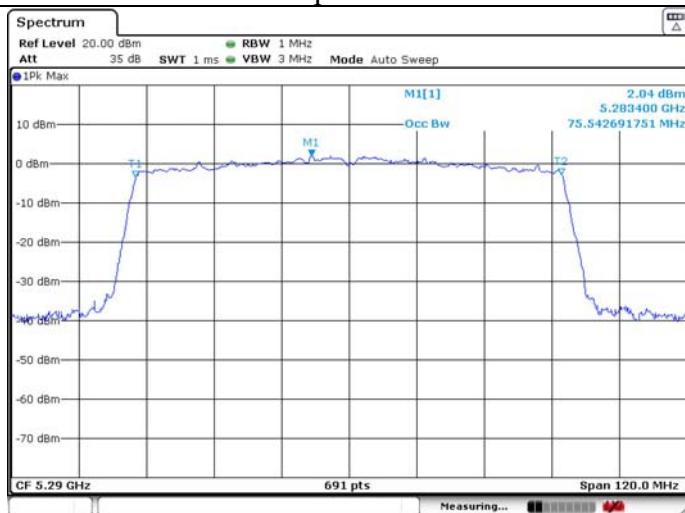

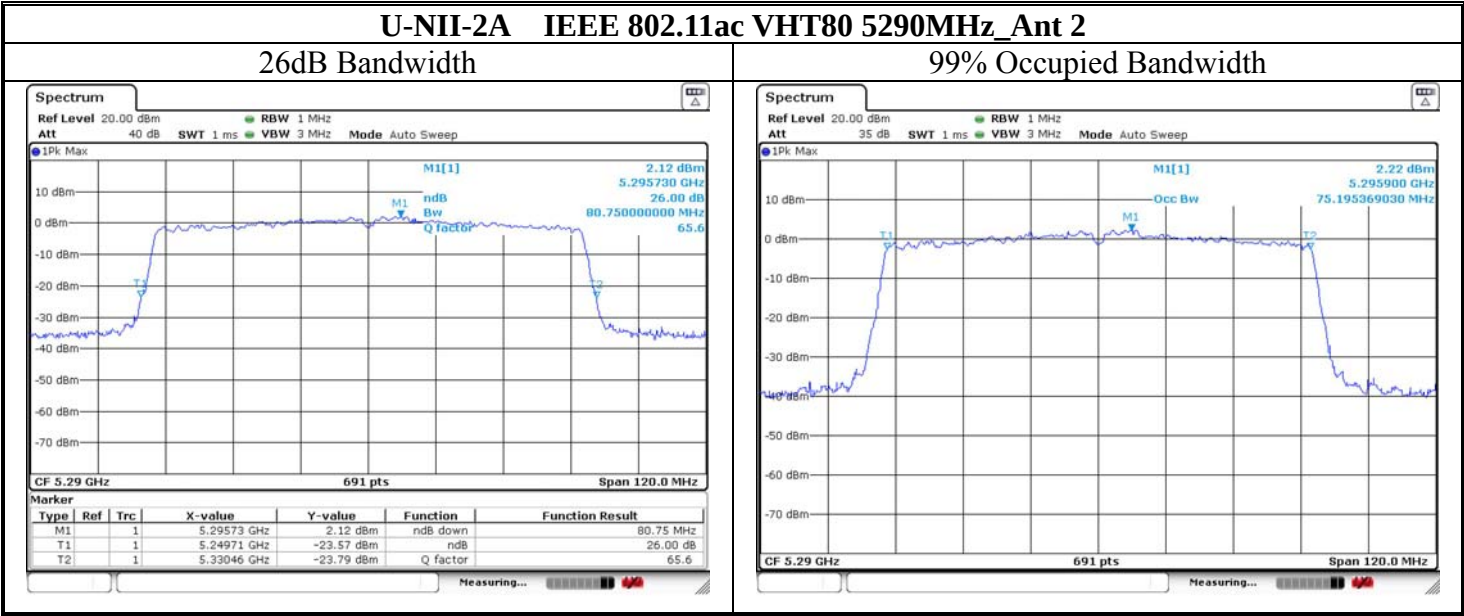

U-NII-2C IEEE 802.11a 5500MHz_Ant 1

26dB Bandwidth

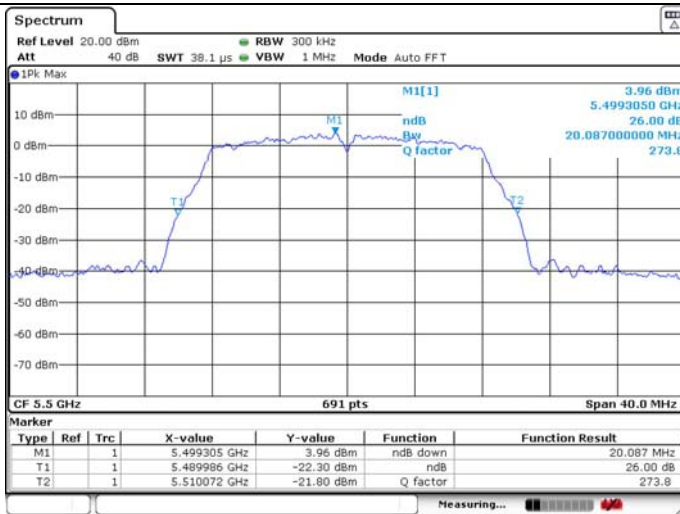


99% Occupied Bandwidth




U-NII-2C IEEE 802.11a 5580MHz_Ant 1

26dB Bandwidth

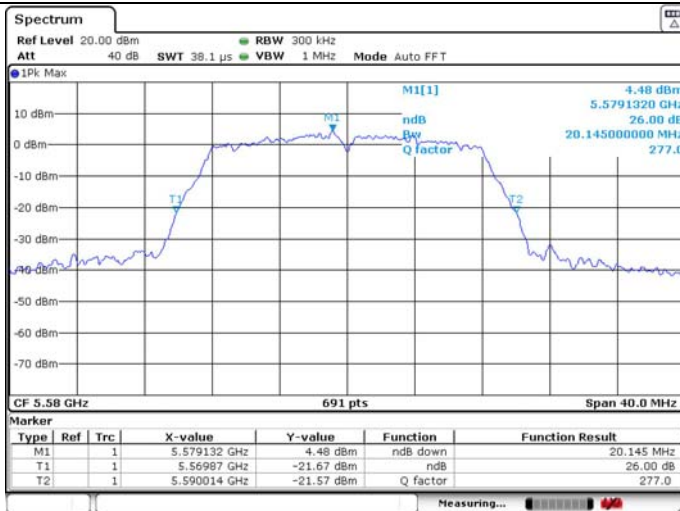


99% Occupied Bandwidth

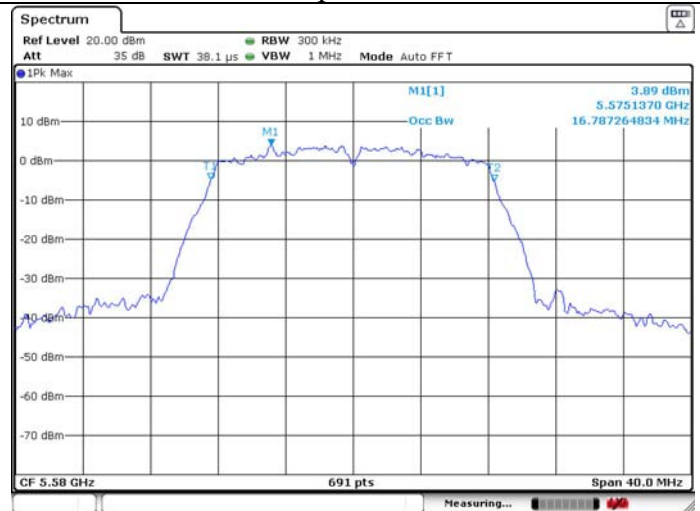

U-NII-2C IEEE 802.11a 5700MHz_Ant 1

26dB Bandwidth

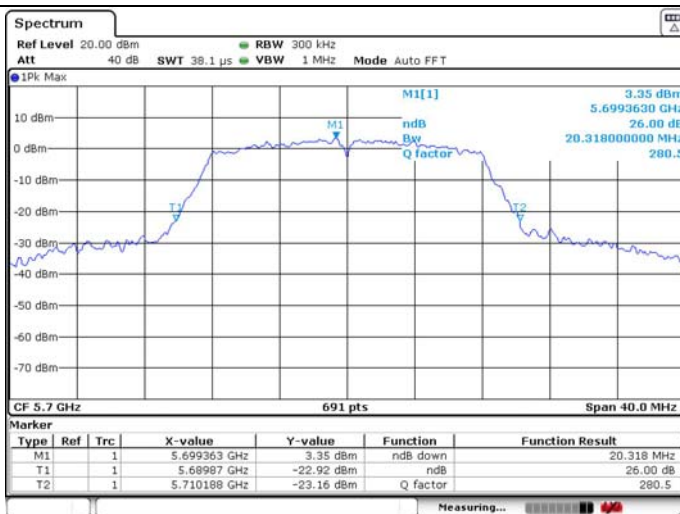

99% Occupied Bandwidth

