

Planar Inverted F-shaped Antenna Specification

MANUFACTURE Shenzhen Qinyida Electronics Co., LTD
Manufacturer address : Room 1001, Shencai Building, No. 92, Fuyong
: Avenue, Fuyong Street, Baoan District,
Shenzhen

PRODUCT NAME : MV_BP10xx PIFA Antenna

DATE : 2019-10-30


1. Antenna describe

Antenna plate: Planar Inverted F-shaped Antenna

Frequency range: 2.4GHz-2.48GHz

ITEM Name	Planar Inverted F-shaped Antenna Specification
Model Name	PIFA Antenna
Polarization	Horizontal and Vertical
Azimuth Beam Patten	Omni-directional
Impedance	50 Ohm
Antenna Lengh	14.4mm
Gain(Max)	2.81dBi

2. Antenna Photo& Lengh (mm)

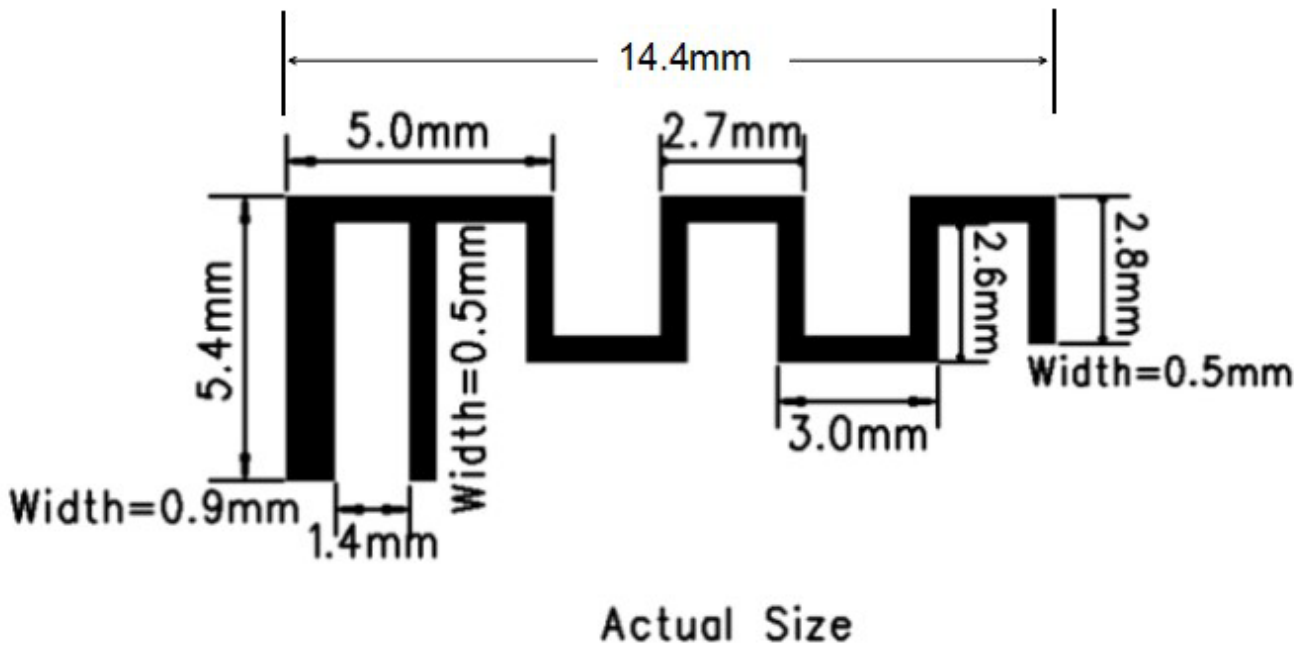

3. Gain


Frequency	Gain (dBi)
2400MHz	2.81
2410MHz	2.74
2420MHz	2.70
2430MHz	2.73
2440MHz	1.01
2450MHz	1.26
2460MHz	1.50
2470MHz	1.49
2480MHz	1.42
2490MHz	0.36
2500MHz	0.33

4. Return Loss/VSWR/Input Impedance

Frequency	Return Loss (dB)	VSWR	Input Impedance(Ω)
2400MHz	-7.23	2.53	25.37
2400MHz	-6.47	2.80	17.99
2450MHz	-6.22	2.90	17.18
2480MHz	-5.18	3.44	15.55
2500MHz	-4.56	3.89	15.48

Annex A Photographs


1. Test Setup

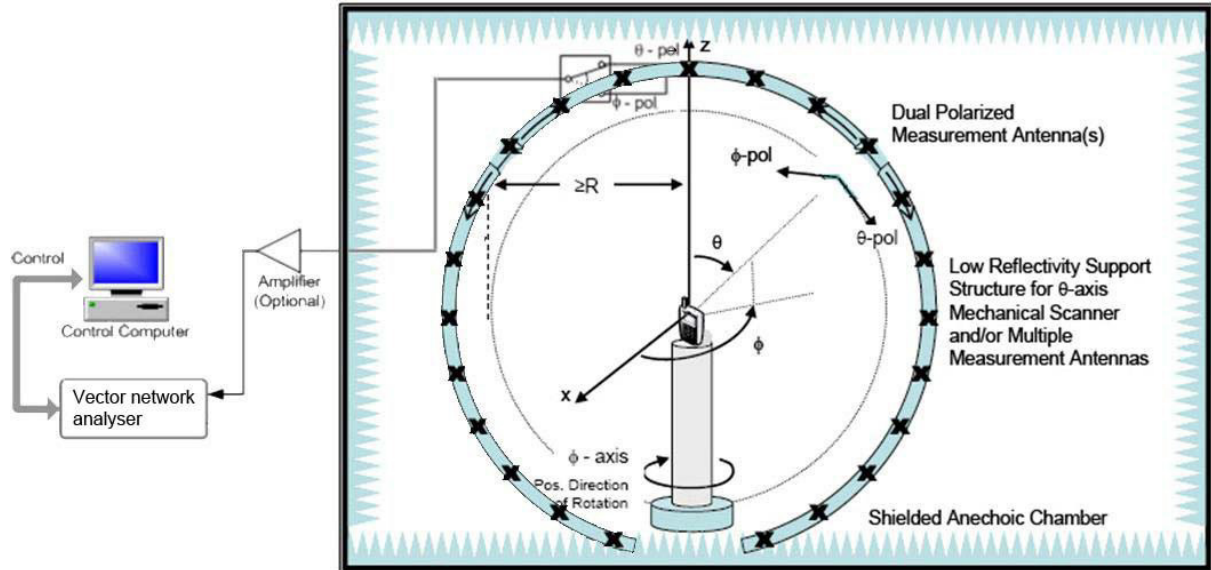


Annex B Figures

1. 2D Radiation Pattern


$\Phi=0^\circ$

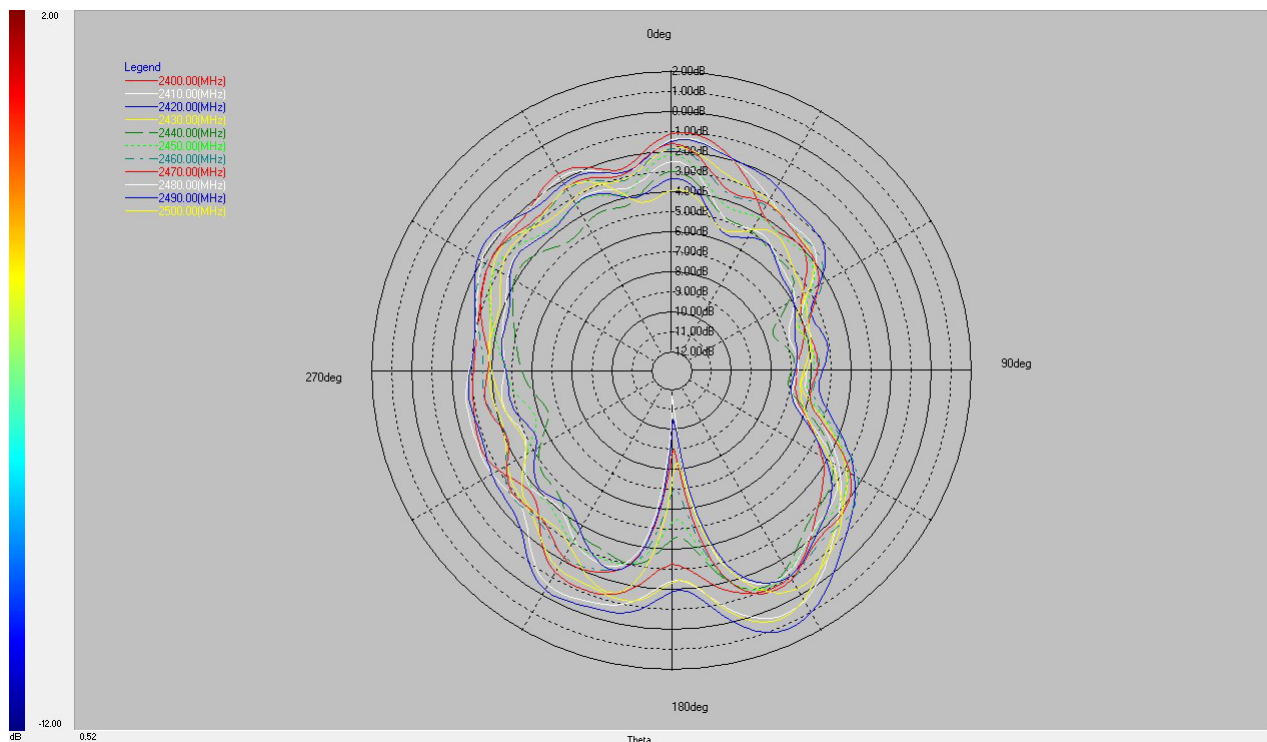


Phi=90°

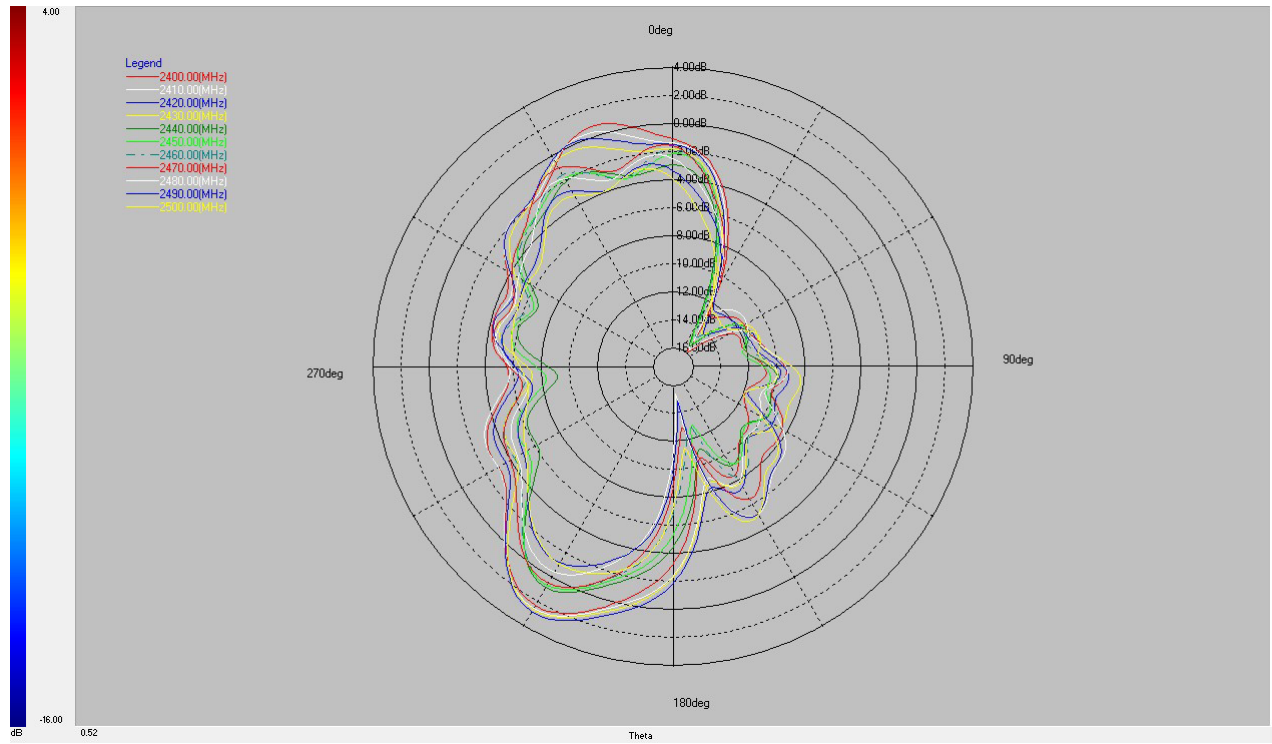


Theta=90°

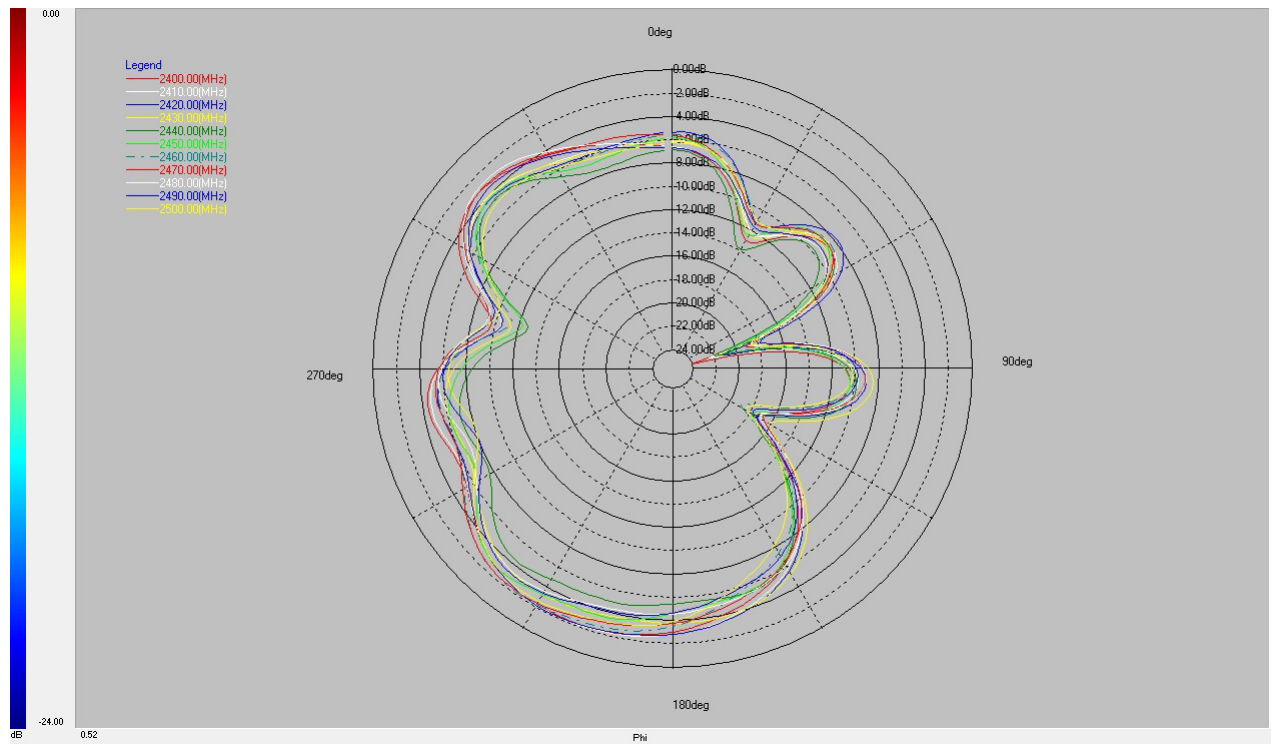


2. 3D Radiation Pattern

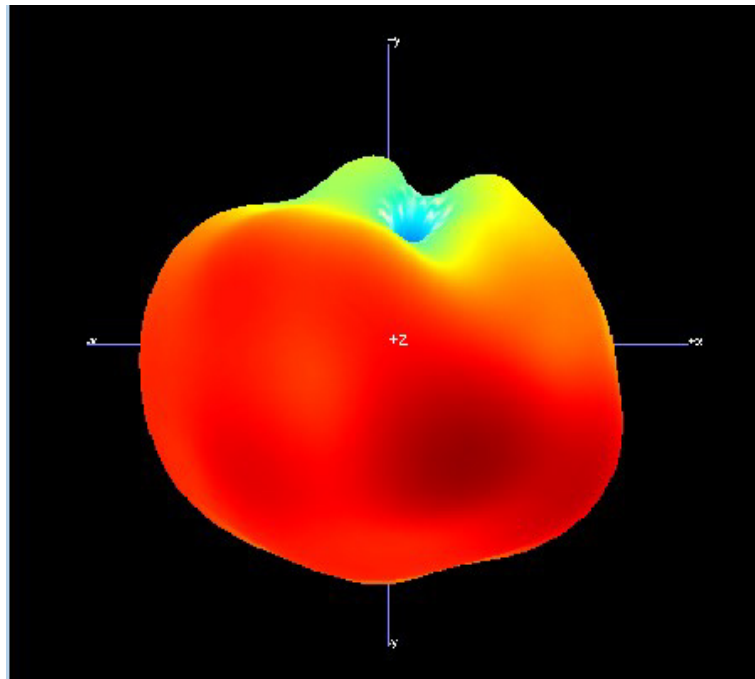

2400MHz

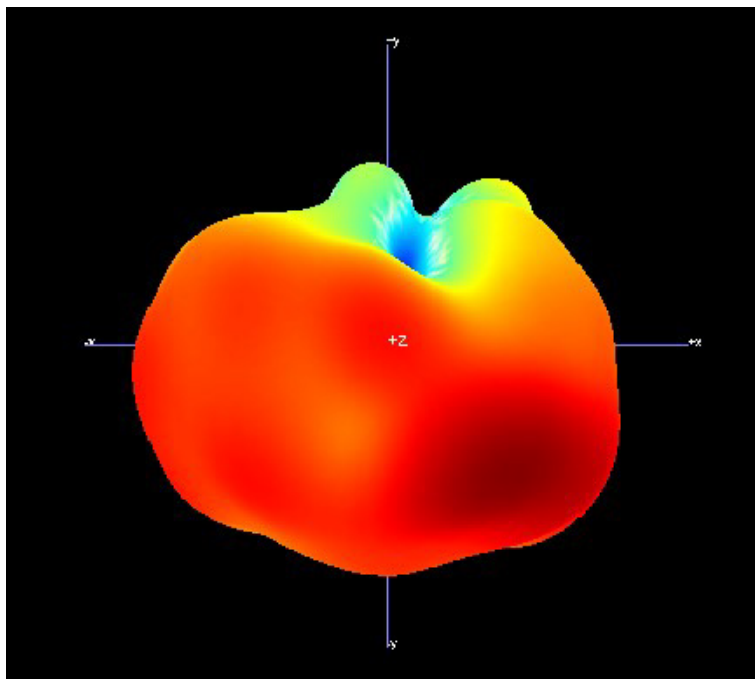


2450MHz

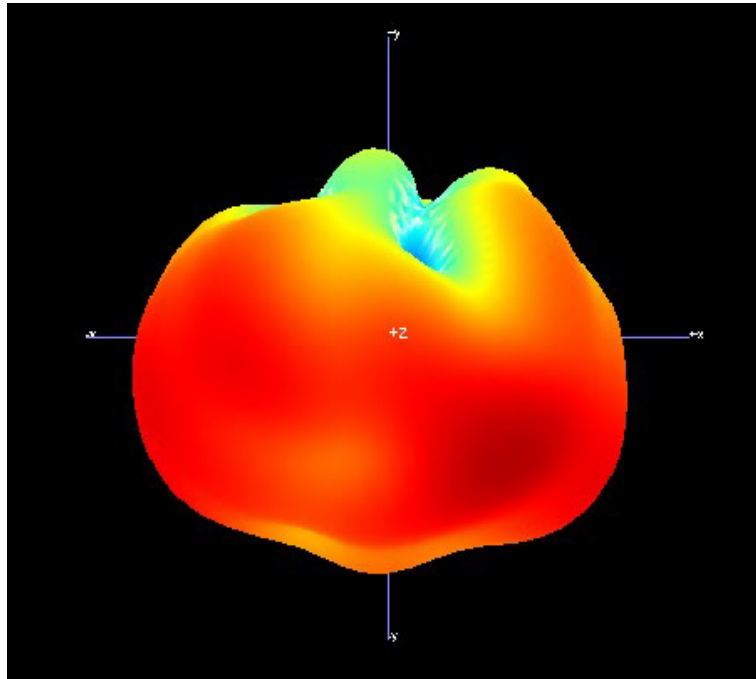


2500MH

3. Return Loss

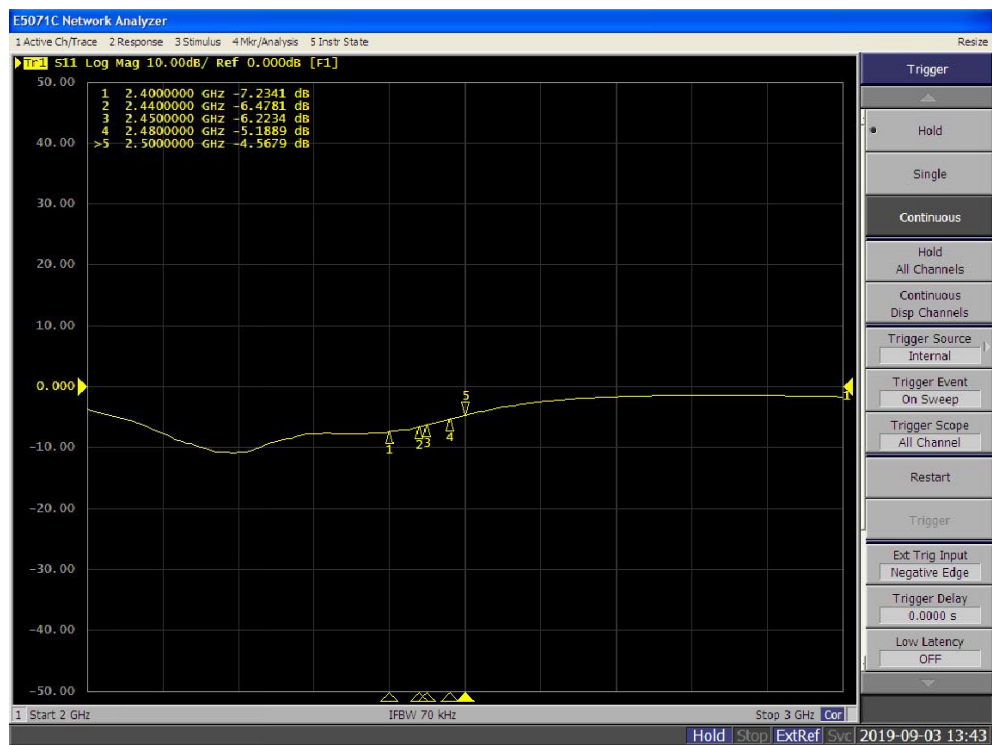

4. VSWR

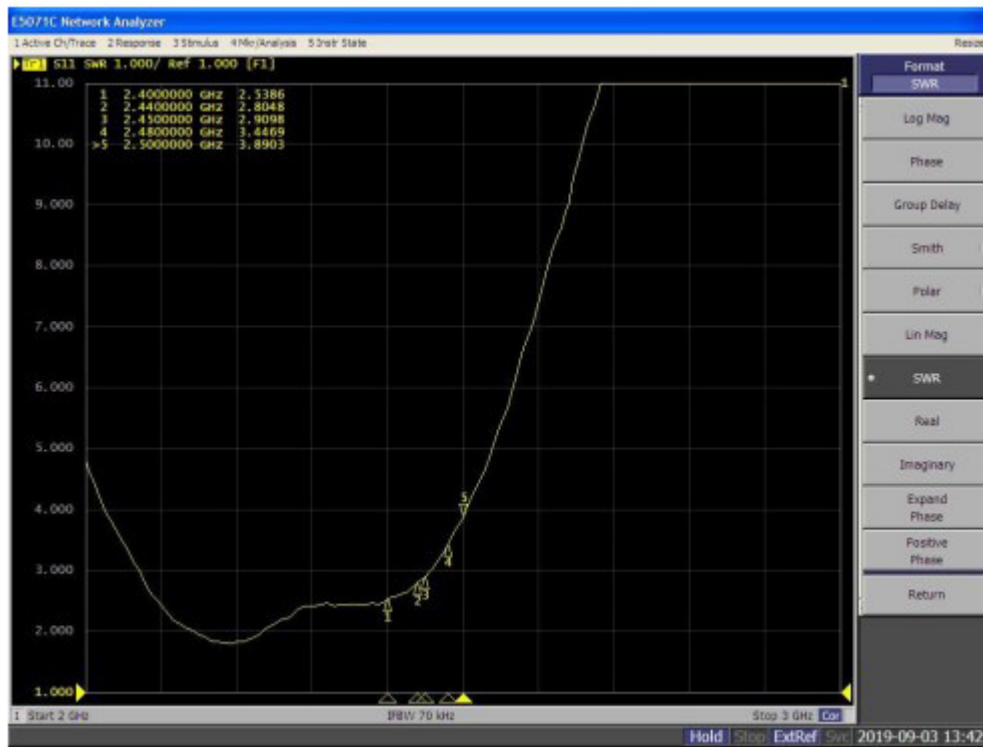

END