

**CFR 47 FCC PART 15 SUBPART C(DTS)**

**TEST REPORT**

*For*

**SkyView Pro Table Lamp**

**MODEL NUMBER: BH-SKY2-P00-CBK001-1**

**REPORT NUMBER: E01A23060334F01001**

**ISSUE DATE: August 25, 2023**

**FCC ID:2BAZK-SKY2**

*Prepared for*

**BIOLOGICAL INNOVATION AND OPTIMIZATION SYSTEMS LLC**

**274 E EAU GALLIE BLVD STE 116 INDN HBR BCH Florida United states**

*Prepared by*

**Dong Guan Anci Electronic Technology Co., Ltd.**

**No.2, Songlin East Road, Zeng Tian Village, Xin An District, Chang An  
Town Dongguan Guangdong 523883 China**

**This report shall not be reproduced, except in full, without the written approval of  
Dong Guan Anci Electronic Technology Co., Ltd.**

Revision History

| Rev. | Issue Date      | Revisions     | Revised By |
|------|-----------------|---------------|------------|
| V0   | August 25, 2023 | Initial Issue | Luke       |

| Summary of Test Results                   |                                               |                                    |        |
|-------------------------------------------|-----------------------------------------------|------------------------------------|--------|
| Test Item                                 | Clause                                        | Limit/Requirement                  | Result |
| Antenna Requirement                       | N/A                                           | FCC Part 15.203/15.247 (c)         | Pass   |
| AC Power Line Conducted Emission          | ANSI C63.10-2013, Clause 6.2                  | FCC Part 15.207                    | Pass   |
| Conducted Output Power                    | ANSI C63.10-2013, Clause 11.9.1.3             | FCC Part 15.247 (b)(3)             | Pass   |
| 6dB Bandwidth and 99% Occupied Bandwidth  | ANSI C63.10-2013, Clause 11.8.1               | FCC Part 15.247 (a)(2)             | Pass   |
| Power Spectral Density                    | ANSI C63.10-2013, Clause 11.10.2              | FCC Part 15.247 (e)                | Pass   |
| Conducted Band edge and spurious emission | ANSI C63.10-2013, Clause 11.11                | FCC Part 15.247(d)                 | Pass   |
| Radiated Band edge and Spurious Emission  | ANSI C63.10-2013, Clause 11.11 & Clause 11.12 | FCC Part 15.205/15.209             | Pass   |
| Duty Cycle                                | ANSI C63.10-2013, Clause 11.6                 | None; for reporting purposes only. | Pass   |

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C(DTS)> when <Accuracy Method> decision rule is applied.

## CONTENTS

|                                                              |           |
|--------------------------------------------------------------|-----------|
| <b>ATTESTATION OF TEST RESULTS.....</b>                      | <b>4</b>  |
| <b>TEST METHODOLOGY.....</b>                                 | <b>5</b>  |
| <b>FACILITIES AND ACCREDITATION.....</b>                     | <b>5</b>  |
| <b>CALIBRATION AND UNCERTAINTY .....</b>                     | <b>6</b>  |
| 1.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>           | <i>6</i>  |
| 1.2. <i>MEASUREMENT UNCERTAINTY.....</i>                     | <i>6</i>  |
| <b>EQUIPMENT UNDER TEST .....</b>                            | <b>7</b>  |
| 1.3. <i>DESCRIPTION OF EUT .....</i>                         | <i>7</i>  |
| 1.4. <i>CHANNEL LIST .....</i>                               | <i>8</i>  |
| 1.5. <i>MAXIMUM AVERAGE EIRP .....</i>                       | <i>8</i>  |
| 1.6. <i>TEST CHANNEL CONFIGURATION.....</i>                  | <i>8</i>  |
| 1.7. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>      | <i>8</i>  |
| 1.8. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>          | <i>9</i>  |
| 1.9. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>               | <i>9</i>  |
| 1.10. <i>SETUP DIAGRAM .....</i>                             | <i>10</i> |
| <b>MEASURING EQUIPMENT AND SOFTWARE USED.....</b>            | <b>11</b> |
| <b>ANTENNA PORT TEST RESULTS .....</b>                       | <b>12</b> |
| 1.11. <i>Conducted Output Power.....</i>                     | <i>12</i> |
| 1.12. <i>6dB Bandwidth.....</i>                              | <i>13</i> |
| 1.13. <i>Power Spectral Density.....</i>                     | <i>14</i> |
| 1.14. <i>Conducted Band edge and spurious emission .....</i> | <i>15</i> |
| 1.15. <i>Duty Cycle .....</i>                                | <i>17</i> |
| <b>RADIATED TEST RESULTS .....</b>                           | <b>18</b> |
| <b>ANTENNA REQUIREMENT .....</b>                             | <b>28</b> |
| <b>AC POWER LINE CONDUCTED EMISSION .....</b>                | <b>29</b> |
| <b>TEST DATA.....</b>                                        | <b>32</b> |
| <b>APPENDIX: PHOTOGRAPHS OF THE EUT .....</b>                | <b>84</b> |

## ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: BIOLOGICAL INNOVATION AND OPTIMIZATION SYSTEMS  
LLC  
Address: 274 E EAU GALLIE BLVD STE 116 INDN HBR BCH Florida  
United states

### Manufacturer Information

Company Name: Meko Lighting Company Limited  
Address: No.2, Songlin East Road, Zeng Tian Village, Xin An District,  
Chang An Town Dongguan Guangdong 523883 China

### EUT Information

EUT Name: SkyView Pro Table Lamp  
Model: BH-SKY2-P00-CBK001-1  
Brand: BIOS  
Sample Received Date: July 25, 2023  
Sample Status: Normal  
Sample ID: A23060334 003  
Date of Tested: July 26, 2023 to August 01, 2023  
Hardware version: V1.0  
Software version: V1.0

| APPLICABLE STANDARDS              |              |
|-----------------------------------|--------------|
| STANDARD                          | TEST RESULTS |
| CFR 47 FCC PART 15 SUBPART C(DTS) | Pass         |

Date of Test : July 26, 2023 to August 01, 2023

Prepared by : Luke Li  
Luke Li/Editor

Reviewer & Authorized  
Signer : Tiger Xu  
Tiger Xu/ Supervisor



## TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C(DTS).

## FACILITIES AND ACCREDITATION

Site Description

EMC Lab.

: Accredited by A2LA, 2018.03.15  
The Certificate Number is 4422.01.  
CAB identifier: CN0079  
ISED Company number: 22768

Name of Firm

Site Location

: Dong Guan Anci Electronic Technology Co., Ltd.  
: 1-2 Floor, Building A, No.11, Headquarters 2 Road,  
Songshan, Lake Hi-tech Industrial Development  
Zone, Dongguan City, Guangdong Pr., China.

## CALIBRATION AND UNCERTAINTY

### 1.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 1.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Test Items                                                                                                                                       | k    | Uncertainty                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------------------------------------------------------------------------------------------------------|
| DTS Bandwidth                                                                                                                                    | 1.96 | ±9.2 PPM                                                                                                    |
| 20dB Emission Bandwidth                                                                                                                          | 1.96 | ±9.2 PPM                                                                                                    |
| Carrier Frequency Separation                                                                                                                     | 1.96 | ±9.2 PPM                                                                                                    |
| Number of Hopping Channel                                                                                                                        | 1.96 | ±9.2 PPM                                                                                                    |
| Time of Occupancy                                                                                                                                | 1.96 | ±0.57%                                                                                                      |
| Maximum Conducted Output Power                                                                                                                   | 1.96 | ± 0.73 dB                                                                                                   |
| Max Peak Conducted Output Power                                                                                                                  | 1.96 | ±1.5 dB                                                                                                     |
| Maximum Power Spectral Density Level                                                                                                             | 1.96 | ±1.9 dB                                                                                                     |
| Conducted Band edge                                                                                                                              | 1.96 | ±9.2 PPM                                                                                                    |
| Conducted spurious emission                                                                                                                      | 1.96 | 9 kHz-30 MHz: ± 0.95 dB<br>30 MHz-1 GHz: ± 1.5 dB<br>1GHz-12.75GHz: ± 1.8 dB<br>12.75 GHz-26.5 GHz: ± 2.1dB |
| Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96. |      |                                                                                                             |

| Test Item                                                                                                                                     | Measurement Frequency Range | K | U(dB) |
|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|---|-------|
| Conducted emissions from the AC mains power ports (AMN)                                                                                       | 150 kHz ~ 30 MHz            | 2 | 3.37  |
| Radiated emissions                                                                                                                            | 30 MHz ~ 1 GHz              | 2 | 3.79  |
| Radiated emissions                                                                                                                            | 1 GHz ~ 18 GHz              | 2 | 5.62  |
| Radiated emissions                                                                                                                            | 18 GHz ~ 40 GHz             | 2 | 5.54  |
| Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |                             |   |       |

## EQUIPMENT UNDER TEST

### 1.3. DESCRIPTION OF EUT

|                   |                        |
|-------------------|------------------------|
| EUT Name          | SkyView Pro Table Lamp |
| Model             | BH-SKY2-P00-CBK001-1   |
| Ratings           | AC 120-240V            |
| Test Power Supply | 120Vac                 |

|                     |                                                                                                                |
|---------------------|----------------------------------------------------------------------------------------------------------------|
| Frequency Band:     | 2400 MHz to 2483.5 MHz                                                                                         |
| Frequency Range:    | 2412 MHz to 2462 MHz                                                                                           |
| Support Standards:  | 802.11 b/g/n                                                                                                   |
| Type of Modulation: | IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK)<br>IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK)                      |
| Data Rate:          | IEEE 802.11b: Up to 11 Mbps<br>IEEE 802.11g: Up to 54 Mbps<br>IEEE 802.11n: Up to MCS7                         |
| Number of Channels: | IEEE 802.11b/g/n-HT20: 11<br>IEEE 802.11n-HT40: 7                                                              |
| Maximum Peak Power: | IEEE 802.11b: 13.47dBm<br>IEEE 802.11g: 12.52dBm<br>IEEE 802.11n-HT20: 12.5 dBm<br>IEEE 802.11n-HT40: 10.7 dBm |
| Antenna Type:       | PCB Antenna                                                                                                    |
| Antenna Gain:       | 2.2dBi                                                                                                         |

## 1.4. CHANNEL LIST

| Channel List for 802.11b/g/n (20 MHz) |                 |         |                 |         |                 |         |                 |
|---------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                               | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 1                                     | 2412            | 4       | 2427            | 7       | 2442            | 10      | 2457            |
| 2                                     | 2417            | 5       | 2432            | 8       | 2447            | 11      | 2462            |
| 3                                     | 2422            | 6       | 2437            | 9       | 2452            | /       | /               |

| Channel List for 802.11n (40 MHz) |                 |         |                 |         |                 |         |                 |
|-----------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                           | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 3                                 | 2422            | 5       | 2432            | 7       | 2442            | 9       | 2452            |
| 4                                 | 2427            | 6       | 2437            | 8       | 2447            | /       | /               |

## 1.5. MAXIMUM AVERAGE EIRP

| IEEE Std. 802.11 | Frequency (MHz) | Channel Number | Maximum Conducted AVG Output Power (dBm) | Maximum AVG EIRP (dBm) |
|------------------|-----------------|----------------|------------------------------------------|------------------------|
| b                | 2412 ~ 2462     | 1-11[11]       | 13.47                                    | 15.67                  |
| g                | 2412 ~ 2462     | 1-11[11]       | 12.52                                    | 14.72                  |
| n HT20           | 2412 ~ 2462     | 1-11[11]       | 12.5                                     | 14.7                   |
| n HT40           | 2422 ~ 2452     | 3-9[7]         | 10.7                                     | 12.9                   |

## 1.6. TEST CHANNEL CONFIGURATION

| IEEE Std. 802.11 | Test Channel Number                                       | Frequency                    |
|------------------|-----------------------------------------------------------|------------------------------|
| b                | CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel) | 2412 MHz, 2437 MHz, 2462 MHz |
| g                | CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel) | 2412 MHz, 2437 MHz, 2462 MHz |
| n HT20           | CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel) | 2412 MHz, 2437 MHz, 2462 MHz |
| n HT40           | CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)  | 2422 MHz, 2437 MHz, 2452 MHz |

## 1.7. THE WORSE CASE POWER SETTING PARAMETER

| The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band |                         |                         |      |       |            |      |      |
|--------------------------------------------------------------------|-------------------------|-------------------------|------|-------|------------|------|------|
| Test Software                                                      |                         | Beken Wi-Fi Tool V1.6.0 |      |       |            |      |      |
| Modulation Mode                                                    | Transmit Antenna Number | Test Channel            |      |       |            |      |      |
|                                                                    |                         | NCB: 20MHz              |      |       | NCB: 40MHz |      |      |
|                                                                    |                         | CH 1                    | CH 6 | CH 11 | CH 3       | CH 6 | CH 9 |
| 802.11b                                                            | 1                       | 30                      | 30   | 30    | /          |      |      |
| 802.11g                                                            | 1                       | 15                      | 15   | 15    |            |      |      |
| 802.11n HT20                                                       | 1                       | 15                      | 15   | 15    |            |      |      |
| 802.11n HT40                                                       | 1                       | /                       |      |       | 15         | 15   | 15   |

## WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps  
 802.11g mode: 6 Mbps  
 802.11n HT20 mode: MCS0  
 802.11n HT40 mode: MCS0

### 1.8. DESCRIPTION OF AVAILABLE ANTENNAS

| Antenna | Frequency (MHz) | Antenna Type | MAX Antenna Gain (dBi) |
|---------|-----------------|--------------|------------------------|
| 1       | 2412-2462       | PCB Antenna  | 2.2dBi                 |

| Test Mode         | Transmit and Receive Mode                    | Description                                              |
|-------------------|----------------------------------------------|----------------------------------------------------------|
| IEEE 802.11b      | <input checked="" type="checkbox"/> 1TX, 1RX | Antenna 1 can be used as transmitting/receiving antenna. |
| IEEE 802.11g      | <input checked="" type="checkbox"/> 1TX, 1RX | Antenna 1 can be used as transmitting/receiving antenna. |
| IEEE 802.11n HT20 | <input checked="" type="checkbox"/> 1TX, 1RX | Antenna 1 can be used as transmitting/receiving antenna. |
| IEEE 802.11n HT40 | <input checked="" type="checkbox"/> 1TX, 1RX | Antenna 1 can be used as transmitting/receiving antenna. |

### 1.9. SUPPORT UNITS FOR SYSTEM TEST

The EUT has been tested as an independent unit


| Item | Equipment              | Trademark | Model No.            | FCC ID     | Note       |
|------|------------------------|-----------|----------------------|------------|------------|
| 1.   | SkyView Pro Table Lamp | BIOS      | BH-SKY2-P00-CBK001-1 | 2BAZK-SKY2 | <b>EUT</b> |
|      |                        |           |                      |            |            |

**Note:**


- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

## 1.10. SETUP DIAGRAM


**AC conducted emission :**



**Radiated Emission:**



**RF conducted:**



## MEASURING EQUIPMENT AND SOFTWARE USED

| Test Equipment of Conducted RF |                 |               |               |            |            |
|--------------------------------|-----------------|---------------|---------------|------------|------------|
| Equipment                      | Manufacturer    | Model No.     | Serial No.    | Last Cal.  | Due Date   |
| Spectrum Analyzer              | Rohde & Schwarz | FSV40         | US40240623    | 2022-10-29 | 2023-10-28 |
| RF Test Software               | MWRF-test       | MTS 8310      | N/A           | N/A        | N/A        |
| Radio Frequency control box    | MWRF-test       | MW200-RFCB    | MW220111 ANCI | 2023-05-10 | 2024-05-09 |
| Radio Frequency control box    | MWRF-test       | MW200-RFCB 2# | /             | 2023-05-10 | 2024-05-09 |

| Test Equipment of Radiated emissions below 1GHz |                |                  |               |            |            |
|-------------------------------------------------|----------------|------------------|---------------|------------|------------|
| Equipment                                       | Manufacturer   | Model No.        | Serial No.    | Last Cal.  | Due Date   |
| EMI Test Receiver                               | ROHDE&SCH WARZ | ESCI             | 100302        | 2023-05-10 | 2024-05-09 |
| Bilog Antenna                                   | Schwarzbeck    | VULB9163         | VULB9163-1290 | 2022-12-12 | 2023-12-11 |
| RF Cable                                        | ZKJC           | ZT06S-NJ-NJ-11M  | 19060398      | 2023-05-10 | 2024-05-09 |
| RF Cable                                        | ZKJC           | ZT06S-NJ-NJ-0.5M | 19060400      | 2023-05-10 | 2024-05-09 |
| RF Cable                                        | ZKJC           | ZT06S-NJ-NJ-2.5M | 19060404      | 2023-05-10 | 2024-05-09 |
| EMI Test Receiver                               | ROHDE&SCH WARZ | ESPI7            | 100502        | 2022-10-08 | 2023-10-07 |
| 3m Semi-anechoic Chamber                        | Keysight       | 9m*6m*6m         | N/A           | 2021-11-13 | 2024-11-12 |

| Test Equipment of Radiated emissions above 1GHz |                 |                         |                |            |            |
|-------------------------------------------------|-----------------|-------------------------|----------------|------------|------------|
| Equipment                                       | Manufacturer    | Model No.               | Serial No.     | Last Cal.  | Due Date   |
| Low noise Amplifiers                            | A-INFO          | LA1018N4009             | J1013130524001 | 2023-05-10 | 2024-05-09 |
| Horn antenna                                    | A-INFO          | LB-10180-SF             | J2031090612123 | 2023-05-10 | 2024-05-09 |
| RF Cable                                        | ZKJC            | ZT26-NJ-NJ-11M          | 19060401       | 2023-05-10 | 2024-05-09 |
| RF Cable                                        | ZKJC            | ZT26-NJ-NJ-2.5M         | 19060402       | 2023-05-10 | 2024-05-09 |
| RF Cable                                        | ZKJC            | ZT26-NJ-NJ-0.5M         | 19060403       | 2023-05-10 | 2024-05-09 |
| Spectrum Analyzer                               | Rohde & Schwarz | FSV40                   | US40240623     | 2022-10-29 | 2023-10-28 |
| 3m Semi-anechoic Chamber                        | Keysight        | 9m*6m*6m                | N/A            | 2021-11-13 | 2024-11-12 |
| Test Software                                   | Farad           | EZ-EMC (Ver.FA-03A2 RE) | N/A            | N/A        | N/A        |

| Test Equipment of Conducted emissions |               |                       |            |            |            |
|---------------------------------------|---------------|-----------------------|------------|------------|------------|
| Equipment                             | Manufacturer  | Model No.             | Serial No. | Last Cal.  | Due Date   |
| EMI Test Receiver                     | ROHDE&SCHWARZ | ESCI                  | 101358     | 2023-05-10 | 2024-05-09 |
| 1# Shielded Room                      | chengyu       | 8m*4m*3.3m            | N/A        | 2022-11-22 | 2025-11-21 |
| LISN                                  | ROHDE&SCHWARZ | ENV216                | 101413     | 2022-10-08 | 2023-10-07 |
| Test Software                         | Farad         | EZ-EMC (Ver.ANCI-3A1) | N/A        | N/A        | N/A        |
| RF Cable                              | N/A           | ZT06S-NJ-NJ-2.5M      | 19044022   | 2023-05-10 | 2024-05-09 |

## ANTENNA PORT TEST RESULTS

### 1.11. CONDUCTED OUTPUT POWER

#### LIMITS

| CFR 47 FCC Part15 (15.247) Subpart C |                           |                  |                       |
|--------------------------------------|---------------------------|------------------|-----------------------|
| Section                              | Test Item                 | Limit            | Frequency Range (MHz) |
| CFR 47 FCC 15.247(b)(3)              | Peak Conduct Output Power | 1 watt or 30 dBm | 2400-2483.5           |

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

#### TEST ENVIRONMENT

|                     |        |                   |     |
|---------------------|--------|-------------------|-----|
| Temperature         | 23.1℃  | Relative Humidity | 50% |
| Atmosphere Pressure | 101kPa |                   |     |

#### TEST RESULTS

Please refer to section "Test Data"

## 1.12. 6DB BANDWIDTH

### LIMITS

| CFR 47 FCC Part15 (15.247) Subpart C |                |                |                       |
|--------------------------------------|----------------|----------------|-----------------------|
| Section                              | Test Item      | Limit          | Frequency Range (MHz) |
| CFR 47 FCC 15.247(a)(2)              | 6 dB Bandwidth | $\geq 500$ kHz | 2400-2483.5           |

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

|                  |                                                                                       |
|------------------|---------------------------------------------------------------------------------------|
| Center Frequency | The center frequency of the channel under test                                        |
| Frequency Span   | For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission |
| Detector         | Peak                                                                                  |
| RBW              | 100 kHz                                                                               |
| VBW              | $\geq 3 \times$ RBW                                                                   |
| Trace            | Max hold                                                                              |
| Sweep            | Auto couple                                                                           |

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### TEST ENVIRONMENT

|                     |        |                   |     |
|---------------------|--------|-------------------|-----|
| Temperature         | 24°C   | Relative Humidity | 52% |
| Atmosphere Pressure | 101kPa |                   |     |

### TEST RESULTS

Please refer to section "Test Data"

### 1.13. POWER SPECTRAL DENSITY

#### LIMITS

| CFR 47 FCC Part15 (15.247) Subpart C |                        |                         |                       |
|--------------------------------------|------------------------|-------------------------|-----------------------|
| Section                              | Test Item              | Limit                   | Frequency Range (MHz) |
| CFR 47 FCC §15.247 (e)               | Power Spectral Density | 8 dBm in any 3 kHz band | 2400-2483.5           |

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.

Connect the EUT to the spectrum analyser and use the following settings:

|                  |                                                      |
|------------------|------------------------------------------------------|
| Center Frequency | The center frequency of the channel under test       |
| Detector         | PEAK                                                 |
| RBW              | $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ |
| VBW              | $\geq 3 \times \text{RBW}$                           |
| Span             | $1.5 \times \text{DTS bandwidth}$                    |
| Trace            | Max hold                                             |
| Sweep time       | Auto couple                                          |

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST ENVIRONMENT

|                     |        |                   |     |
|---------------------|--------|-------------------|-----|
| Temperature         | 24°C   | Relative Humidity | 52% |
| Atmosphere Pressure | 101kPa |                   |     |

#### TEST RESULTS

Please refer to section "Test Data"

## 1.14. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

| CFR 47 FCC Part15 (15.247) Subpart C |                                           |                                                                                                                         |
|--------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Section                              | Test Item                                 | Limit                                                                                                                   |
| CFR 47 FCC §15.247 (d)               | Conducted Bandedge and Spurious Emissions | at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power |

### LIMITS

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

|                  |                                                |
|------------------|------------------------------------------------|
| Center Frequency | The center frequency of the channel under test |
| Detector         | Peak                                           |
| RBW              | 100 kHz                                        |
| VBW              | $\geq 3 \times \text{RBW}$                     |
| Span             | 1.5 x DTS bandwidth                            |
| Trace            | Max hold                                       |
| Sweep time       | Auto couple.                                   |

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

|                    |                                                                               |
|--------------------|-------------------------------------------------------------------------------|
| Span               | Set the center frequency and span to encompass frequency range to be measured |
| Detector           | Peak                                                                          |
| RBW                | 100 kHz                                                                       |
| VBW                | $\geq 3 \times \text{RBW}$                                                    |
| measurement points | $\geq \text{span}/\text{RBW}$                                                 |
| Trace              | Max hold                                                                      |
| Sweep time         | Auto couple.                                                                  |

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

**TEST ENVIRONMENT**

|                     |        |                   |       |
|---------------------|--------|-------------------|-------|
| Temperature         | 23.5°C | Relative Humidity | 52.6% |
| Atmosphere Pressure | 101kPa |                   |       |

**TEST RESULTS**

Please refer to section "Test Data"

## **1.15. DUTY CYCLE**

### **LIMITS**

None; for reporting purposes only.

### **TEST PROCEDURE**

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

### **TEST ENVIRONMENT**

|                     |        |                   |     |
|---------------------|--------|-------------------|-----|
| Temperature         | 24°C   | Relative Humidity | 52% |
| Atmosphere Pressure | 101kPa |                   |     |

### **TEST RESULTS**

Please refer to section "Test Data"

## RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

| Emissions radiated outside of the specified frequency bands above 30 MHz |                                       |                                         |         |
|--------------------------------------------------------------------------|---------------------------------------|-----------------------------------------|---------|
| Frequency Range<br>(MHz)                                                 | Field Strength Limit<br>(uV/m) at 3 m | Field Strength Limit<br>(dBuV/m) at 3 m |         |
|                                                                          |                                       | Quasi-Peak                              |         |
| 30 - 88                                                                  | 100                                   | 40                                      |         |
| 88 - 216                                                                 | 150                                   | 43.5                                    |         |
| 216 - 960                                                                | 200                                   | 46                                      |         |
| Above 960                                                                | 500                                   | 54                                      |         |
| Above 1000                                                               | 500                                   | Peak                                    | Average |
|                                                                          |                                       | 74                                      | 54      |

| FCC Emissions radiated outside of the specified frequency bands below 30 MHz |                                   |                               |
|------------------------------------------------------------------------------|-----------------------------------|-------------------------------|
| Frequency (MHz)                                                              | Field strength (microvolts/meter) | Measurement distance (meters) |
| 0.009-0.490                                                                  | 2400/F(kHz)                       | 300                           |
| 0.490-1.705                                                                  | 24000/F(kHz)                      | 30                            |
| 1.705-30.0                                                                   | 30                                | 30                            |

FCC Restricted bands of operation refer to FCC §15.205 (a):

| MHz               | MHz                 | MHz           | GHz              |
|-------------------|---------------------|---------------|------------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15         |
| 0.495-0.505       | 16.69475-16.69525   | 608-614       | 5.35-5.46        |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75        |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5        |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2          |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5          |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7        |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4       |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5       |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2       |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4        |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12      |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0        |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8        |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5       |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | ( <sup>2</sup> ) |
| 13.36-13.41       |                     |               |                  |

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## **TEST PROCEDURE**

Below 30 MHz

The setting of the spectrum analyser

|       |                                                                  |
|-------|------------------------------------------------------------------|
| RBW   | 200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz) |
| VBW   | 200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz) |
| Sweep | Auto                                                             |

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyser

|          |         |
|----------|---------|
| RBW      | 120 kHz |
| VBW      | 300 kHz |
| Sweep    | Auto    |
| Detector | Peak/QP |

|       |          |
|-------|----------|
| Trace | Max hold |
|-------|----------|

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1G

The setting of the spectrum analyser

|          |                                |
|----------|--------------------------------|
| RBW      | 1 MHz                          |
| VBW      | PEAK: 3 MHz<br>AVG: see note 6 |
| Sweep    | Auto                           |
| Detector | Peak                           |
| Trace    | Max hold                       |

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

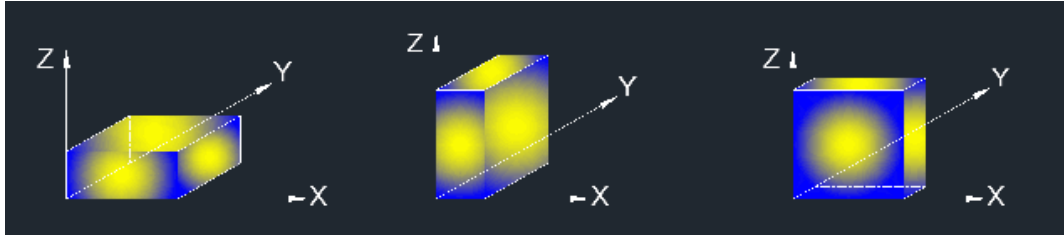

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


#### **TEST ENVIRONMENT**

|                     |        |                   |     |
|---------------------|--------|-------------------|-----|
| Temperature         | 23°C   | Relative Humidity | 51% |
| Atmosphere Pressure | 101kPa |                   |     |

#### **TEST RESULTS**


**Radiated Spurious Emission :**

The worst data of the mode (802.11n(HT40) 2437MHz) are recorded in the following pages.

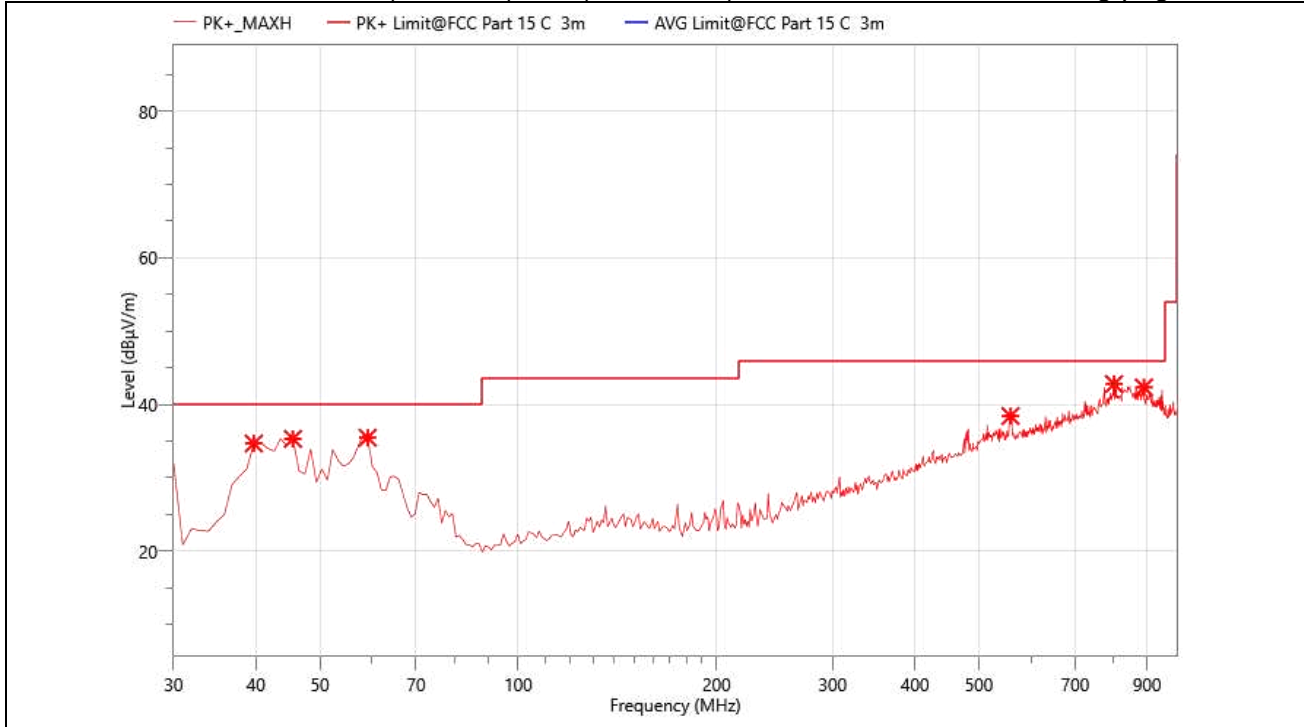

|               |                                       |                          |                               |
|---------------|---------------------------------------|--------------------------|-------------------------------|
| <b>Site:</b>  | <b>ChamberA-2</b>                     | <b>Antenna::Vertical</b> | <b>Temperature(C):23.9(C)</b> |
| <b>Limit:</b> | <b>FCC Part 15 C 3m Radiation(QP)</b> |                          | <b>Humidity(%):50.8%</b>      |
| <b>EUT:</b>   | <b>SkyView Pro Table Lamp</b>         | <b>Test Time:</b>        | <b>2023-08-01</b>             |
| <b>M/N.:</b>  | <b>BH-SKY2-P00-CBK001-1</b>           | <b>Power Rating:</b>     | <b>AC 120V 60Hz</b>           |
| <b>Mode:</b>  | <b>TX2437</b>                         | <b>Test Engineer:</b>    | <b>Rock</b>                   |
| <b>Note:</b>  |                                       |                          |                               |

| No. | Freq. (MHz) | Reading (dBμV) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Pol. | Corr. (dB) |
|-----|-------------|----------------|----------------|----------------|-------------|------|------|------------|
| 1   | 39.700      | 39.44          | 34.67          | 40.00          | 5.33        | PK+  | V    | -4.77      |
| 2   | 45.520      | 39.50          | 35.30          | 40.00          | 4.70        | PK+  | V    | -4.2       |
| 3   | 59.100      | 39.00          | 35.46          | 40.00          | 4.54        | PK+  | V    | -3.54      |
| 4   | 558.650     | 31.57          | 38.42          | 46.00          | 7.58        | PK+  | V    | 6.85       |
| 5   | 802.120     | 29.94          | 42.78          | 46.00          | 3.22        | PK+  | V    | 12.84      |
| 6   | 890.390     | 29.53          | 42.32          | 46.00          | 3.68        | PK+  | V    | 12.79      |

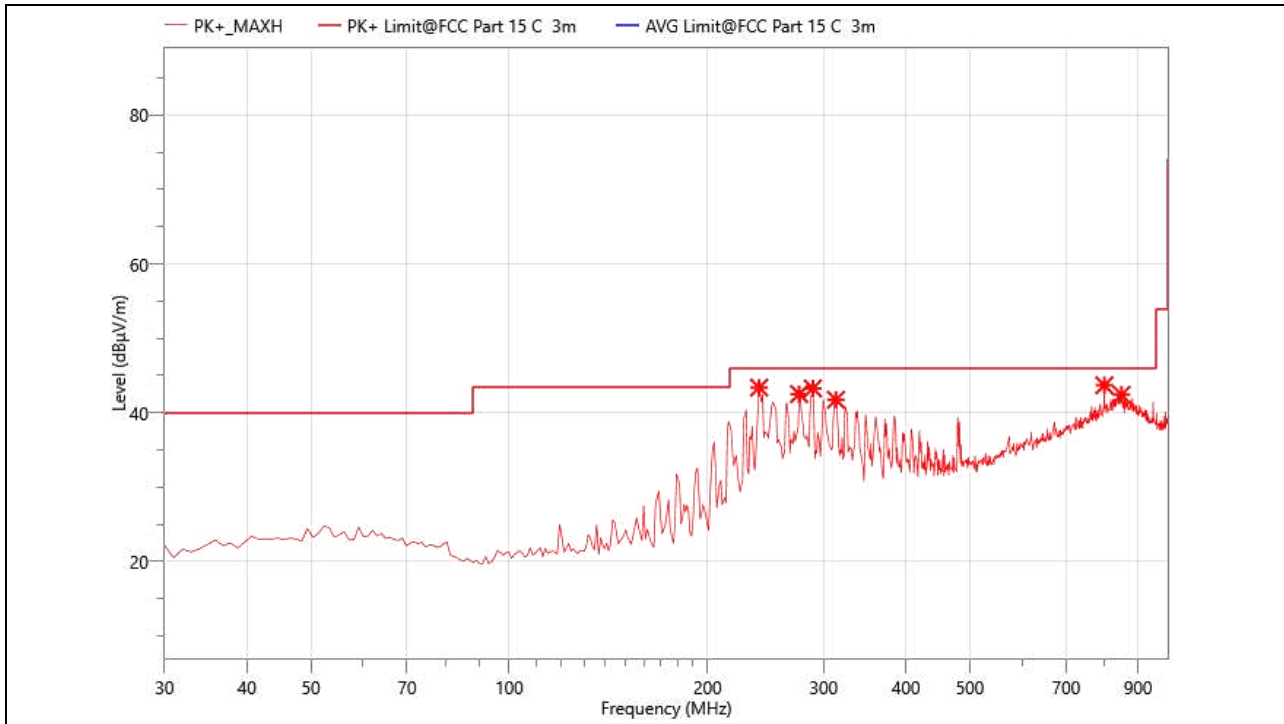

|               |                                     |                            |                               |
|---------------|-------------------------------------|----------------------------|-------------------------------|
| <b>Site:</b>  | <b>ChamberA-2</b>                   | <b>Antenna::Horizontal</b> | <b>Temperature(C):23.9(C)</b> |
| <b>Limit:</b> | <b>FCC Part 15 3m Radiation(QP)</b> |                            | <b>Humidity(%):50.8%</b>      |
| <b>EUT:</b>   | <b>SkyView Pro Table Lamp</b>       | <b>Test Time:</b>          | <b>2023-08-01</b>             |
| <b>M/N.:</b>  | <b>BH-SKY2-P00-CBK001-1</b>         | <b>Power Rating:</b>       | <b>AC 120V 60Hz</b>           |
| <b>Mode:</b>  | <b>TX2437</b>                       | <b>Test Engineer:</b>      | <b>Rock</b>                   |
| <b>Note:</b>  |                                     |                            |                               |

| No. | Freq. (MHz) | Reading (dBμV) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Pol. | Corr. (dB) |
|-----|-------------|----------------|----------------|----------------|-------------|------|------|------------|
| 1   | 239.520     | 47.21          | 43.39          | 46.00          | 2.61        | PK+  | H    | -3.82      |
| 2   | 275.410     | 44.11          | 42.52          | 46.00          | 3.48        | PK+  | H    | -1.59      |
| 3   | 288.990     | 44.32          | 43.29          | 46.00          | 2.71        | PK+  | H    | -1.03      |
| 4   | 313.240     | 42.19          | 41.76          | 46.00          | 4.24        | PK+  | H    | -0.43      |
| 5   | 800.180     | 30.84          | 43.71          | 46.00          | 2.29        | PK+  | H    | 12.87      |
| 6   | 849.650     | 28.50          | 42.43          | 46.00          | 3.57        | PK+  | H    | 13.93      |

**Above 1000MHz~10<sup>th</sup> Harmonics:**

All the modulation modes were tested the data of the worst mode (TX 802.11n(HT40)) are recorded in the following pages and the others modulation methods do not exceed the limits. The frequency range from 1GHz to 25GHz is investigated.

Operation Mode: 802.11b Lowest  
Test Voltage: AC 120V 60Hz

Test Date : 2023-08-01  
Test by: Rock

| Freq.<br>(MHz) | Ant. Pol.<br>H/V | Emission Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|----------------|------------------|------------------------|-------|------------------|----|----------|--------|
|                |                  | PK                     | AV    | PK               | AV | PK       | AV     |
| 2360           | V                | 64.25                  | 44.37 | 74               | 54 | -9.75    | -9.63  |
| 2596           | V                | 59.83                  | 43.92 | 74               | 54 | -14.17   | -10.08 |
| 9237           | V                | 58.13                  | 40.39 | 74               | 54 | -15.87   | -13.61 |
| 13256          | V                | 56.23                  | 37.35 | 74               | 54 | -17.77   | -16.65 |
| 15897          | V                | 55.32                  | 36.17 | 74               | 54 | -18.68   | -17.83 |
| 17326          | V                | 55.69                  | 39.58 | 74               | 54 | -18.31   | -14.42 |
| 2360           | H                | 64.09                  | 45.21 | 74               | 54 | -9.91    | -8.79  |
| 2596           | H                | 60.28                  | 41.28 | 74               | 54 | -13.72   | -12.72 |
| 9237           | H                | 57.63                  | 38.44 | 74               | 54 | -16.37   | -15.56 |
| 13256          | H                | 56.82                  | 37.16 | 74               | 54 | -17.18   | -16.84 |
| 15897          | H                | 55.32                  | 36.48 | 74               | 54 | -18.68   | -17.52 |
| 17326          | H                | 56.32                  | 38.69 | 74               | 54 | -17.68   | -15.31 |

Operation Mode: 802.11b Middle  
Test Voltage: AC 120V 60Hz

Test Date : 2023-08-01  
Test by: Rock

| Freq.<br>(MHz) | Ant. Pol.<br>H/V | Emission Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|----------------|------------------|------------------------|-------|------------------|----|----------|--------|
|                |                  | PK                     | AV    | PK               | AV | PK       | AV     |
| 4236           | V                | 64.2                   | 45.16 | 74               | 54 | -9.8     | -8.84  |
| 5265           | V                | 60.25                  | 41.25 | 74               | 54 | -13.75   | -12.75 |
| 9823           | V                | 58.36                  | 39.65 | 74               | 54 | -15.64   | -14.35 |
| 13263          | V                | 56.14                  | 37.45 | 74               | 54 | -17.86   | -16.55 |
| 16622          | V                | 55.62                  | 36.85 | 74               | 54 | -18.38   | -17.15 |
| 17350          | V                | 56.23                  | 37.55 | 74               | 54 | -17.77   | -16.45 |
| 4236           | H                | 63.14                  | 64.32 | 74               | 54 | -10.86   | 10.32  |
| 5265           | H                | 61.23                  | 42.58 | 74               | 54 | -12.77   | -11.42 |
| 9823           | H                | 59.65                  | 41.32 | 74               | 54 | -14.35   | -12.68 |
| 13263          | H                | 58.47                  | 40.02 | 74               | 54 | -15.53   | -13.98 |
| 16622          | H                | 56.2                   | 37.26 | 74               | 54 | -17.8    | -16.74 |
| 17350          | H                | 56.27                  | 38.47 | 74               | 54 | -17.73   | -15.53 |

Operation Mode: 802.11b Highest

Test Date : 2023-08-01

Test Voltage: AC 120V 60Hz

Test by: Rock

| Freq.<br>(MHz) | Ant. Pol.<br>H/V | Emission Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|----------------|------------------|------------------------|-------|------------------|----|----------|--------|
|                |                  | PK                     | AV    | PK               | AV | PK       | AV     |
| 3507           | V                | 62.81                  | 42.67 | 74               | 54 | -11.19   | -11.33 |
| 4692           | V                | 59.63                  | 40.2  | 74               | 54 | -14.37   | -13.8  |
| 7963           | V                | 58.47                  | 40.25 | 74               | 54 | -15.53   | -13.75 |
| 11206          | V                | 59.3                   | 40.55 | 74               | 54 | -14.7    | -13.45 |
| 13265          | V                | 56.25                  | 37.16 | 74               | 54 | -17.75   | -16.84 |
| 16873          | V                | 56.39                  | 37.45 | 74               | 54 | -17.61   | -16.55 |
| 3507           | H                | 63.52                  | 43.69 | 74               | 54 | -10.48   | -10.31 |
| 4692           | H                | 60.23                  | 41.36 | 74               | 54 | -13.77   | -12.64 |
| 7963           | H                | 59.36                  | 40.21 | 74               | 54 | -14.64   | -13.79 |
| 11206          | H                | 58.32                  | 39.14 | 74               | 54 | -15.68   | -14.86 |
| 13265          | H                | 56.74                  | 37.26 | 74               | 54 | -17.26   | -16.74 |
| 16873          | H                | 56.36                  | 37.15 | 74               | 54 | -17.64   | -16.85 |

**No others harmonics emissions are higher than 20 dB below the limits of 47 CFR Part 15.247.**


**Note:** (1) All Readings are Peak Value and AV.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown “ – ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


**Band edge:****802.11b 2412MHz**

Horizontal

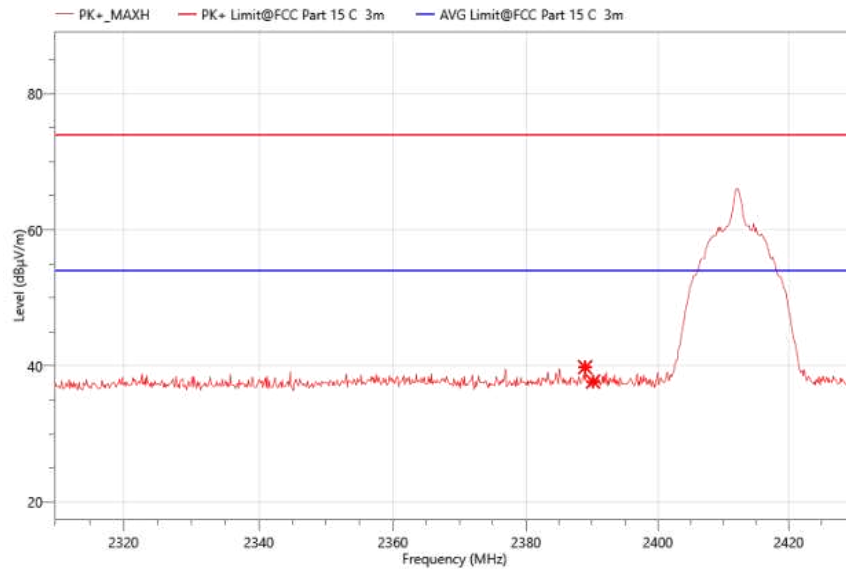

| No. | Freq. (MHz) | Reading (dBμV) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Pol. | Corr. (dB) |
|-----|-------------|----------------|----------------|----------------|-------------|------|------|------------|
| 1   | 2388.960    | 60.54          | 39.81          | 74.00          | 34.19       | PK+  | H    | -20.73     |
| 2   | 2390.160    | 58.43          | 37.70          | 74.00          | 36.30       | PK+  | H    | -20.73     |


Vertical

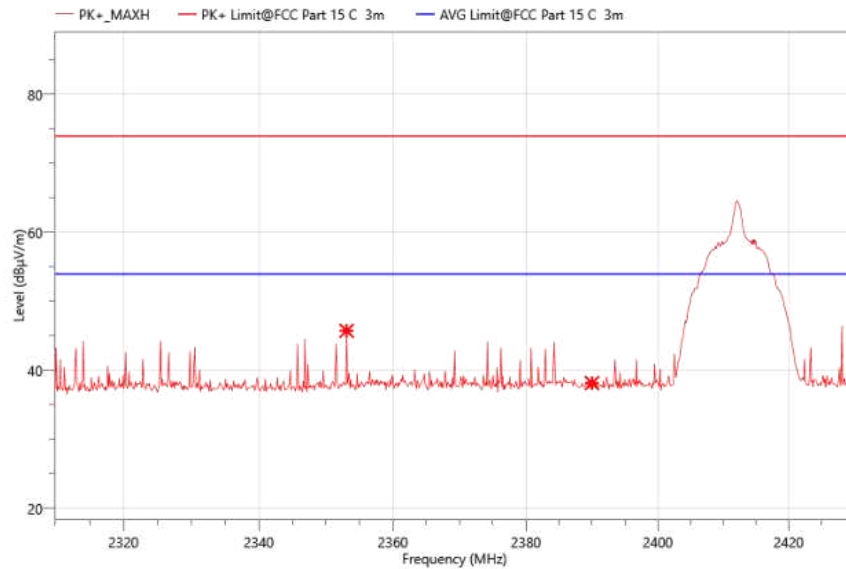

| No. | Freq. (MHz) | Reading (dBμV) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Pol. | Corr. (dB) |
|-----|-------------|----------------|----------------|----------------|-------------|------|------|------------|
| 1   | 2353.080    | 66.52          | 45.76          | 74.00          | 28.24       | PK+  | V    | -20.76     |
| 2   | 2390.000    | 58.91          | 38.18          | 74.00          | 35.82       | PK+  | V    | -20.73     |


**802.11b 2462MHz**

Horizontal

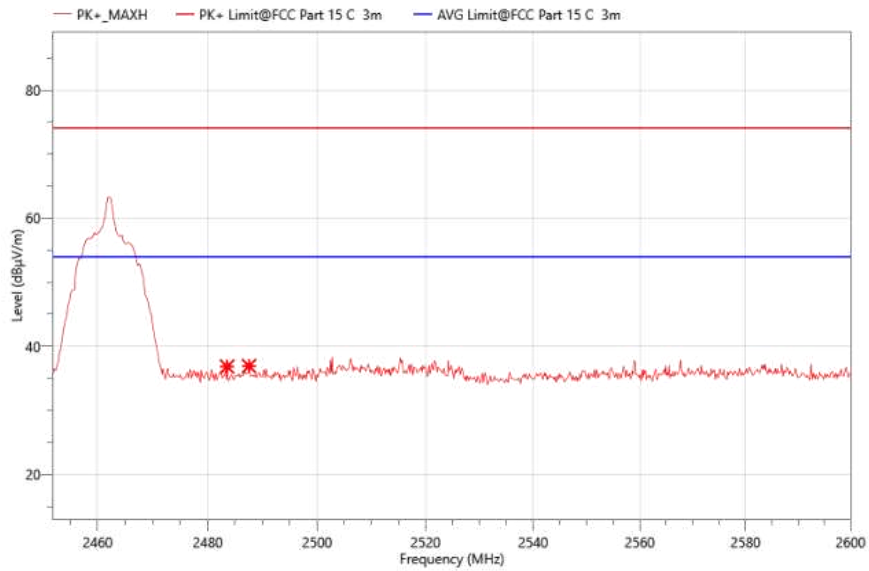

| No. | Freq. (MHz) | Reading (dBμV) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Pol. | Corr. (dB) |
|-----|-------------|----------------|----------------|----------------|-------------|------|------|------------|
| 1   | 2483.524    | 57.13          | 36.83          | 74.00          | 37.17       | PK+  | H    | -20.3      |
| 2   | 2487.520    | 57.19          | 36.91          | 74.00          | 37.09       | PK+  | H    | -20.28     |

Vertical

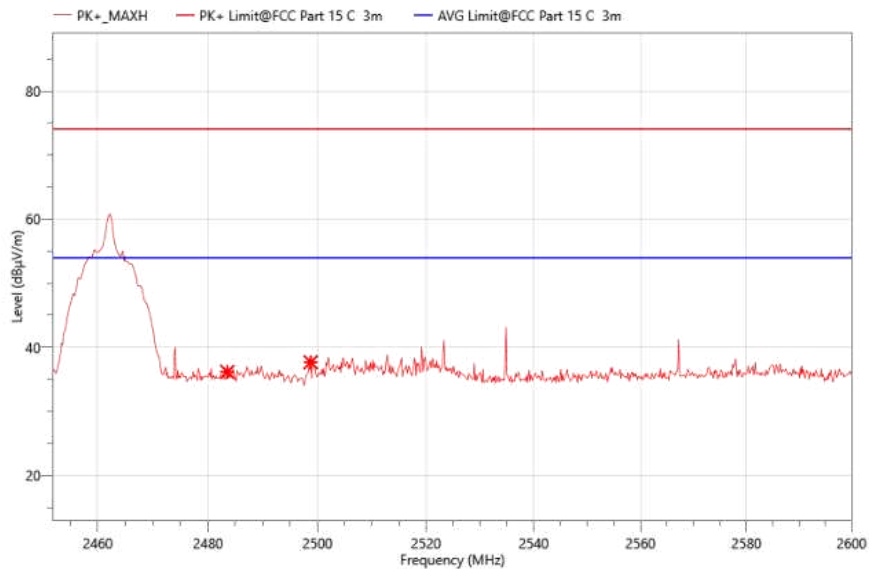

| No. | Freq. (MHz) | Reading (dBμV) | Meas. (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Det. | Pol. | Corr. (dB) |
|-----|-------------|----------------|----------------|----------------|-------------|------|------|------------|
| 1   | 2483.524    | 56.45          | 36.15          | 74.00          | 37.85       | PK+  | V    | -20.3      |
| 2   | 2498.768    | 57.92          | 37.66          | 74.00          | 36.34       | PK+  | V    | -20.26     |

## **ANTENNA REQUIREMENT**

### **REQUIREMENT**

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### **DESCRIPTION**

Pass

## AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

| FREQUENCY (MHz) | Quasi-peak | Average   |
|-----------------|------------|-----------|
| 0.15 -0.5       | 66 - 56 *  | 56 - 46 * |
| 0.50 -5.0       | 56.00      | 46.00     |
| 5.0 -30.0       | 60.00      | 50.00     |


### TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.


### TEST ENVIRONMENT

|                     |        |                   |       |
|---------------------|--------|-------------------|-------|
| Temperature         | 23.5°C | Relative Humidity | 52.6% |
| Atmosphere Pressure | 101kPa |                   |       |

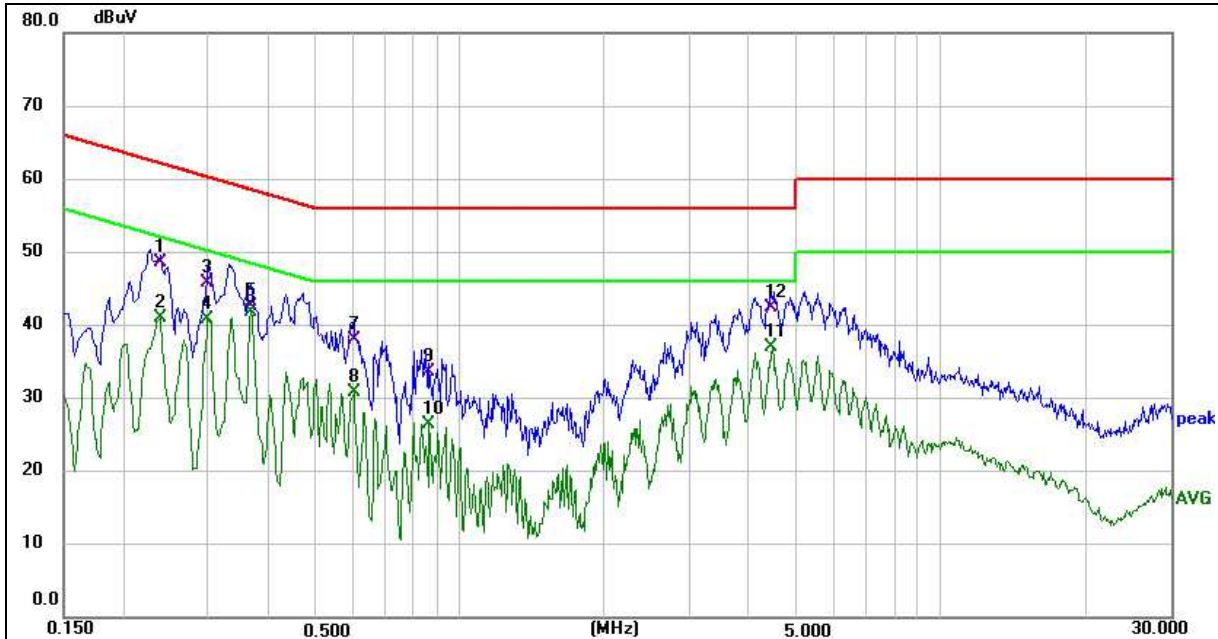**TEST RESULTS**

|               |                              |                       |                                |
|---------------|------------------------------|-----------------------|--------------------------------|
| <b>Site:</b>  |                              | <b>Phase:</b> L1      | <b>Temperature(C):</b> 24.5(C) |
| <b>Limit:</b> | FCC Part 15 C Conduction(QP) |                       | <b>Humidity(%):</b> 51.2%      |
| <b>EUT:</b>   | SkyView Pro Table Lamp       | <b>Test Time:</b>     | 2023-07-26                     |
| <b>M/N.:</b>  | BH-SKY2-P00-CBK001-1         | <b>Power Rating:</b>  | AC 120V 60Hz                   |
| <b>Mode:</b>  | 2.4G WIFI mode               | <b>Test Engineer:</b> | Rock                           |
| <b>Note:</b>  |                              |                       |                                |

| No. | Frequency (MHz) | Reading Level(dBuV) | Factor (dB) | Measure-ment(dBuV) | Limit (dBuV) | Margin (dB) | Detector | Comment |
|-----|-----------------|---------------------|-------------|--------------------|--------------|-------------|----------|---------|
| 1   | 0.2380          | 38.57               | 10.03       | 48.60              | 62.17        | -13.57      | QP       |         |
| 2   | 0.2380          | 30.87               | 10.03       | 40.90              | 52.17        | -11.27      | AVG      |         |
| 3   | 0.2980          | 35.54               | 10.16       | 45.70              | 60.30        | -14.60      | QP       |         |
| 4   | 0.2980          | 30.55               | 10.16       | 40.71              | 50.30        | -9.59       | AVG      |         |
| 5   | 0.3660          | 32.29               | 10.31       | 42.60              | 58.59        | -15.99      | QP       |         |
| 6 * | 0.3660          | 31.40               | 10.31       | 41.71              | 48.59        | -6.88       | AVG      |         |
| 7   | 0.6020          | 27.33               | 10.77       | 38.10              | 56.00        | -17.90      | QP       |         |
| 8   | 0.6020          | 19.96               | 10.77       | 30.73              | 46.00        | -15.27      | AVG      |         |
| 9   | 0.8660          | 24.00               | 9.60        | 33.60              | 56.00        | -22.40      | QP       |         |
| 10  | 0.8660          | 16.77               | 9.60        | 26.37              | 46.00        | -19.63      | AVG      |         |
| 11  | 4.4699          | 27.29               | 9.69        | 36.98              | 46.00        | -9.02       | AVG      |         |
| 1   | 0.2380          | 38.57               | 10.03       | 48.60              | 62.17        | -13.57      | QP       |         |

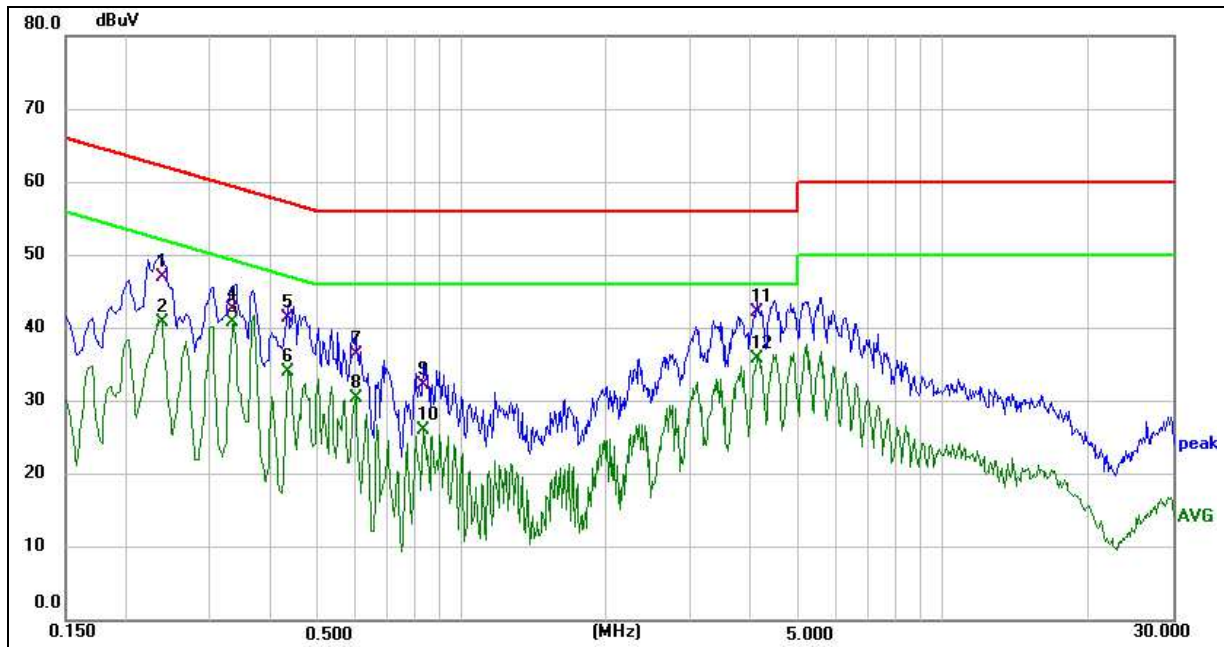

|                                            |                       |                                |
|--------------------------------------------|-----------------------|--------------------------------|
| <b>Site:</b>                               | <b>Phase:</b> N       | <b>Temperature(C):</b> 24.5(C) |
| <b>Limit:</b> FCC Part 15 C Conduction(QP) |                       | <b>Humidity(%):</b> 51.2%      |
| <b>EUT:</b> SkyView Pro Table Lamp         | <b>Test Time:</b>     | <b>2023-07-26</b>              |
| <b>M/N.:</b> BH-SKY2-P00-CBK001-1          | <b>Power Rating:</b>  | <b>AC 120V 60Hz</b>            |
| <b>Mode:</b> 2.4G WIFI mode                | <b>Test Engineer:</b> | <b>Rock</b>                    |
| <b>Note:</b>                               |                       |                                |

| No. | Frequency (MHz) | Reading Level(dBuV) | Factor (dB) | Measure-ment(dBuV) | Limit (dBuV) | Margin (dB) | Detector | Comment |
|-----|-----------------|---------------------|-------------|--------------------|--------------|-------------|----------|---------|
| 1   | 0.2380          | 36.86               | 10.04       | 46.90              | 62.17        | -15.27      | QP       |         |
| 2   | 0.2380          | 30.72               | 10.04       | 40.76              | 52.17        | -11.41      | AVG      |         |
| 3 * | 0.3339          | 30.53               | 10.22       | 40.75              | 49.35        | -8.60       | AVG      |         |
| 4   | 0.3339          | 32.28               | 10.22       | 42.50              | 59.35        | -16.85      | QP       |         |
| 5   | 0.4340          | 30.87               | 10.43       | 41.30              | 57.18        | -15.88      | QP       |         |
| 6   | 0.4340          | 23.54               | 10.43       | 33.97              | 47.18        | -13.21      | AVG      |         |
| 7   | 0.6020          | 25.73               | 10.77       | 36.50              | 56.00        | -19.50      | QP       |         |
| 8   | 0.6020          | 19.63               | 10.77       | 30.40              | 46.00        | -15.60      | AVG      |         |
| 9   | 0.8340          | 22.71               | 9.59        | 32.30              | 56.00        | -23.70      | QP       |         |
| 10  | 0.8340          | 16.49               | 9.59        | 26.08              | 46.00        | -19.92      | AVG      |         |
| 11  | 4.1060          | 32.42               | 9.68        | 42.10              | 56.00        | -13.90      | QP       |         |
| 12  | 4.1060          | 26.06               | 9.68        | 35.74              | 46.00        | -10.26      | AVG      |         |

Note: 1. Result = Reading + Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).


4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.


Note: All the modes have been tested, only the worst data was recorded in the report.


## TEST DATA


### Maximum Conducted Output Power


| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | 13.47                 | 0                | 15.67             | 30          | Pass    |
| NVNT      | b    | 2437            | Ant1    | 12.9                  | 0                | 15.1              | 30          | Pass    |
| NVNT      | b    | 2462            | Ant1    | 12.68                 | 0                | 14.88             | 30          | Pass    |
| NVNT      | g    | 2412            | Ant1    | 12.52                 | 0                | 14.72             | 30          | Pass    |
| NVNT      | g    | 2437            | Ant1    | 12.21                 | 0                | 14.41             | 30          | Pass    |
| NVNT      | g    | 2462            | Ant1    | 11.86                 | 0                | 14.06             | 30          | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 12.5                  | 0                | 14.7              | 30          | Pass    |
| NVNT      | n20  | 2437            | Ant1    | 12.03                 | 0                | 14.23             | 30          | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 11.93                 | 0                | 14.13             | 30          | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 10.7                  | 0                | 12.9              | 30          | Pass    |
| NVNT      | n40  | 2437            | Ant1    | 10.52                 | 0                | 12.72             | 30          | Pass    |
| NVNT      | n40  | 2452            | Ant1    | 10.57                 | 0                | 12.77             | 30          | Pass    |

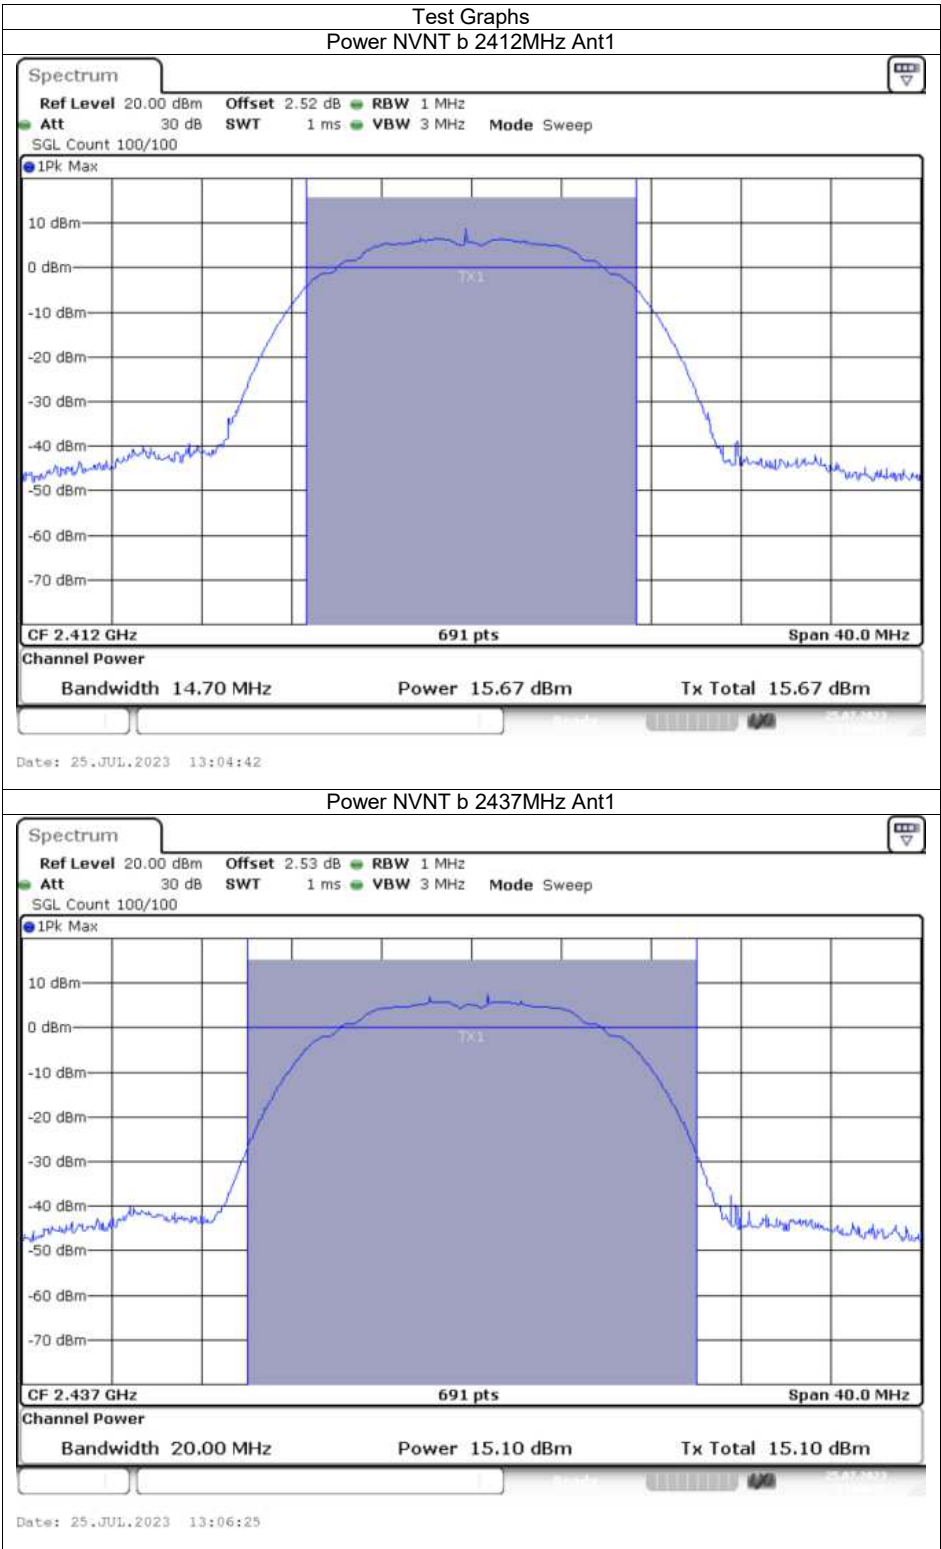


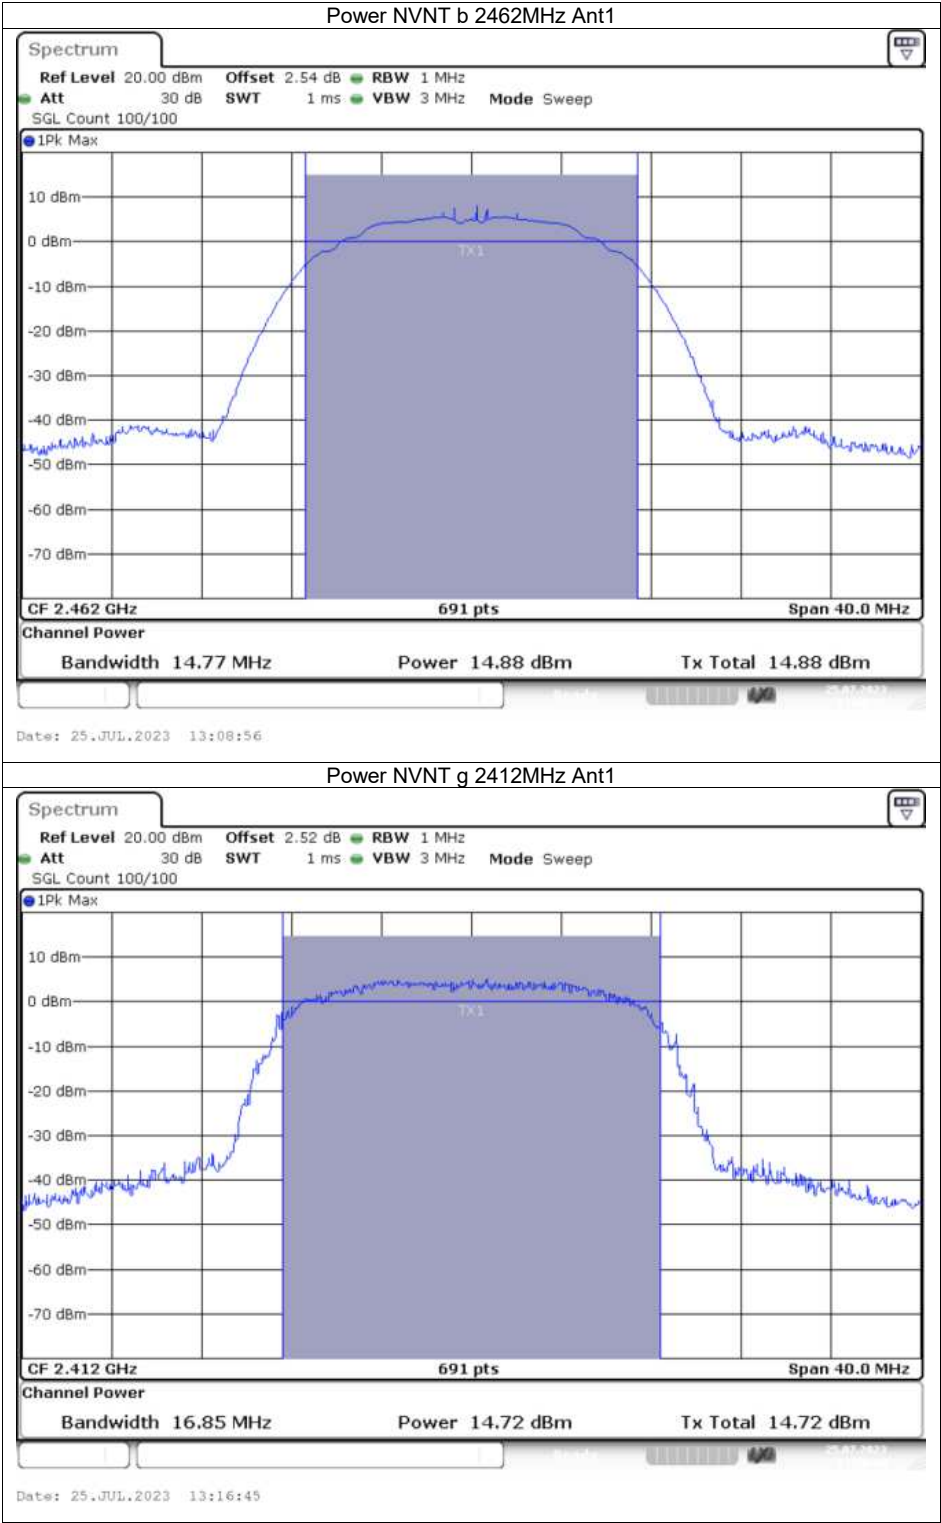

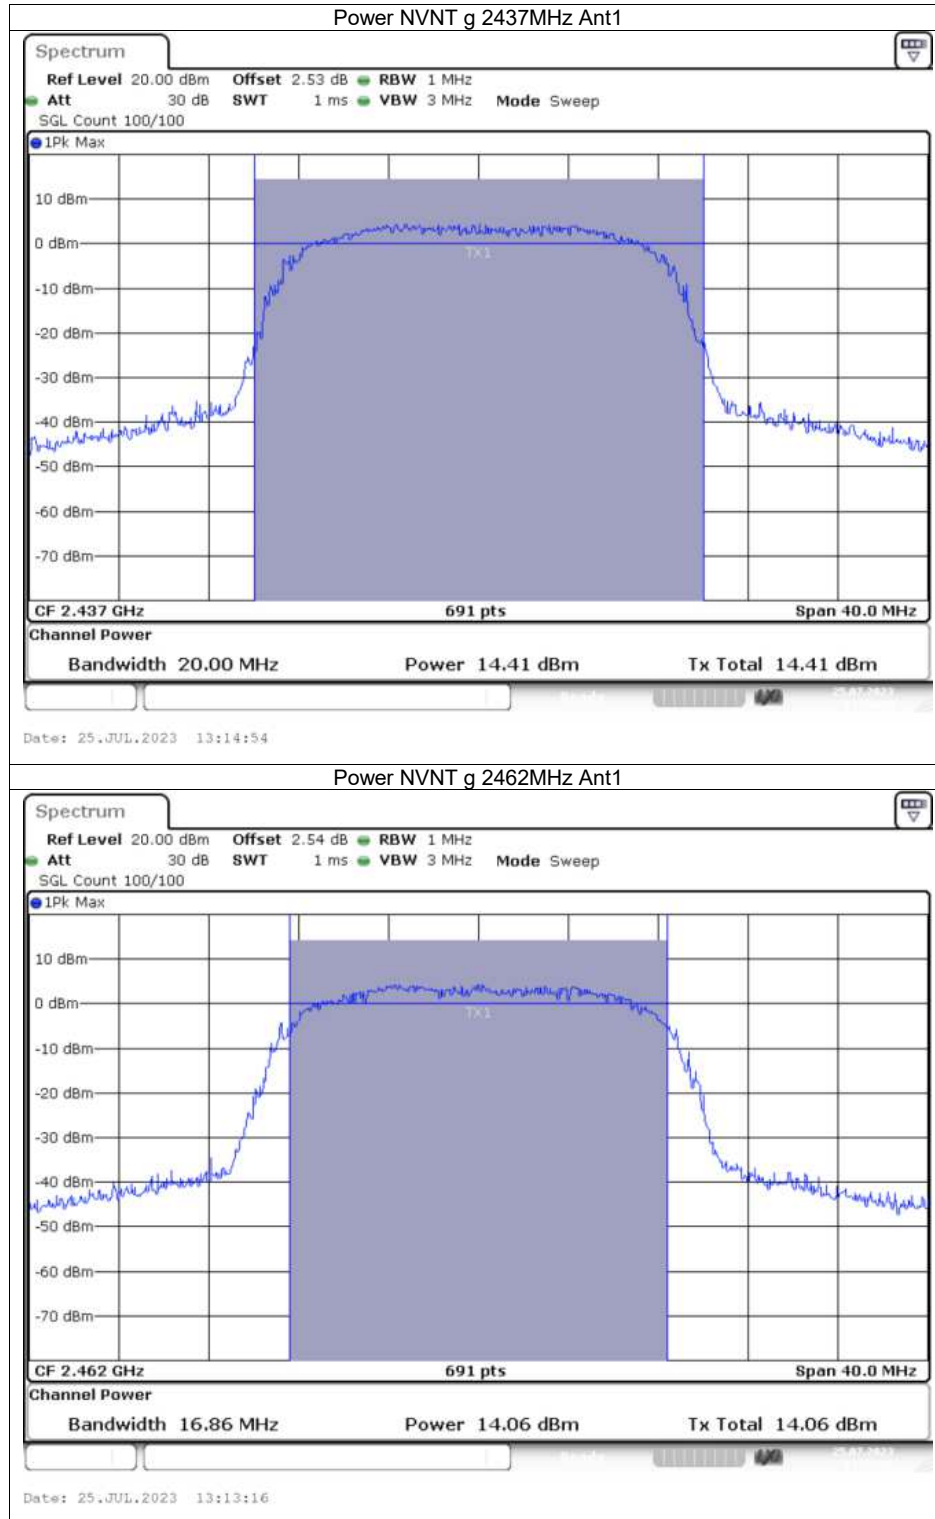

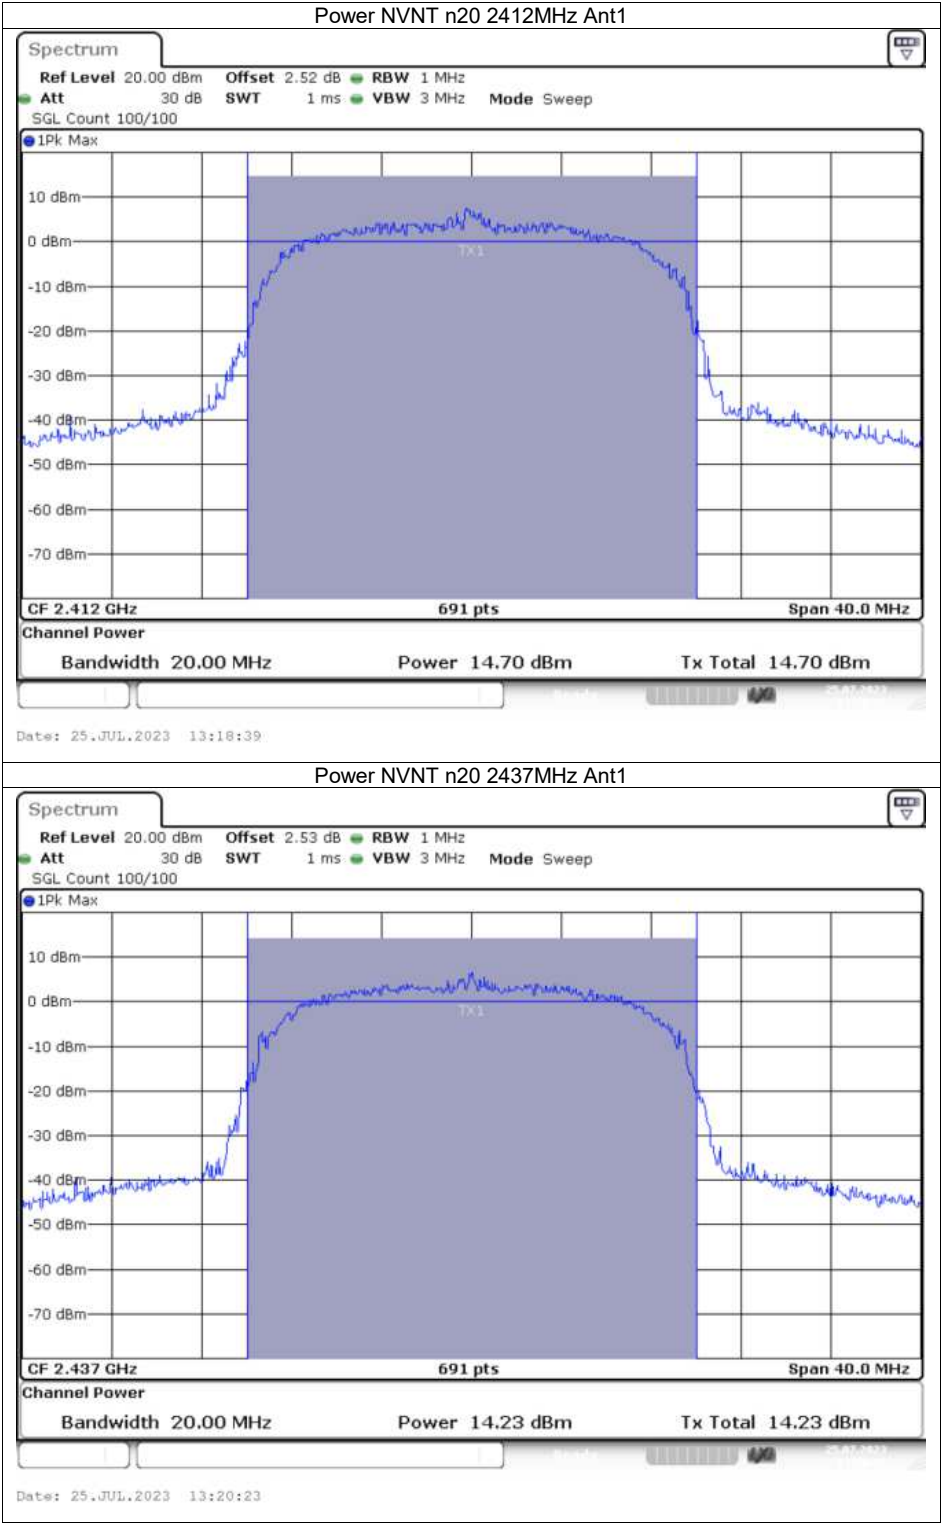


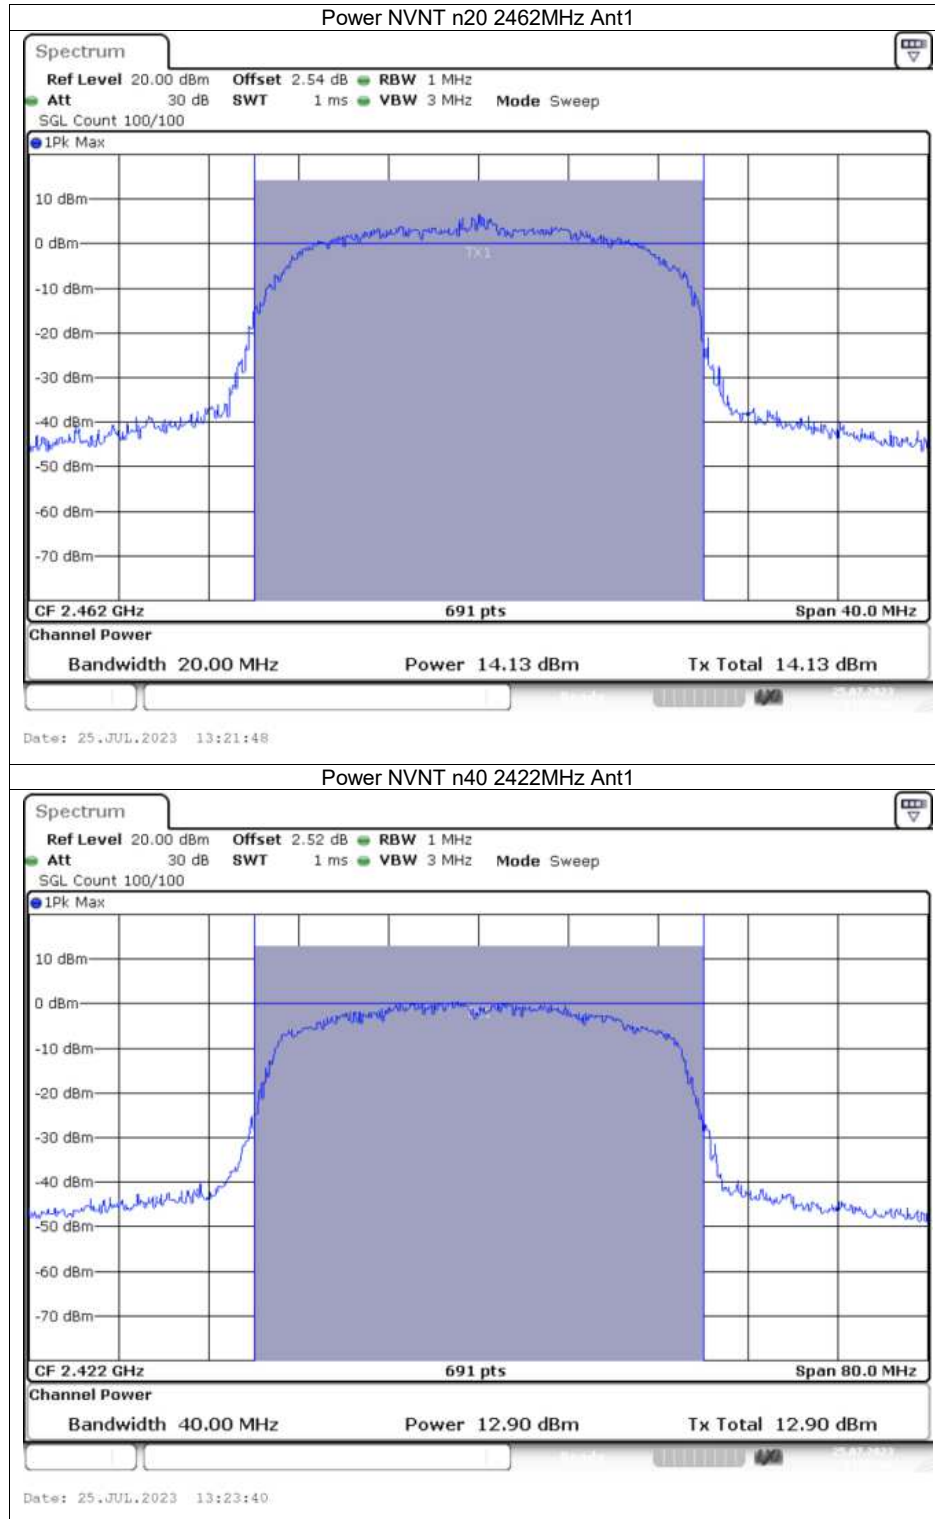


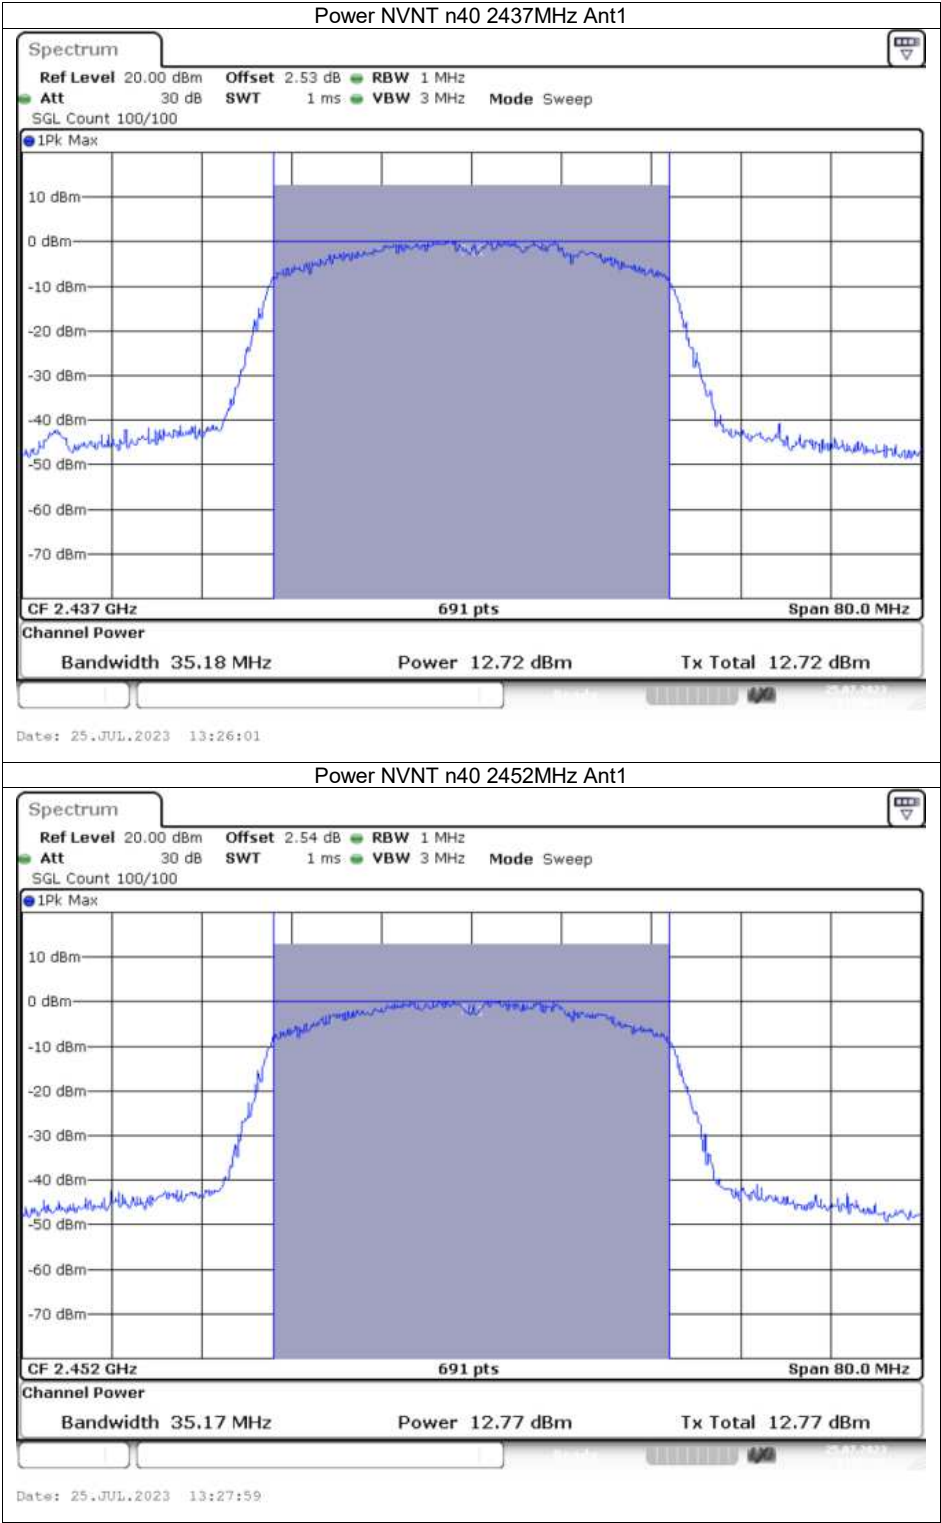



**-6dB Bandwidth**


| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | b    | 2412            | Ant1    | 11.067                | 0.5                         | Pass    |
| NVNT      | b    | 2437            | Ant1    | 10.119                | 0.5                         | Pass    |
| NVNT      | b    | 2462            | Ant1    | 12.042                | 0.5                         | Pass    |
| NVNT      | g    | 2412            | Ant1    | 13.794                | 0.5                         | Pass    |
| NVNT      | g    | 2437            | Ant1    | 13.752                | 0.5                         | Pass    |
| NVNT      | g    | 2462            | Ant1    | 13.746                | 0.5                         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 11.274                | 0.5                         | Pass    |
| NVNT      | n20  | 2437            | Ant1    | 11.283                | 0.5                         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 11.28                 | 0.5                         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 31.302                | 0.5                         | Pass    |
| NVNT      | n40  | 2437            | Ant1    | 31.308                | 0.5                         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | 31.26                 | 0.5                         | Pass    |

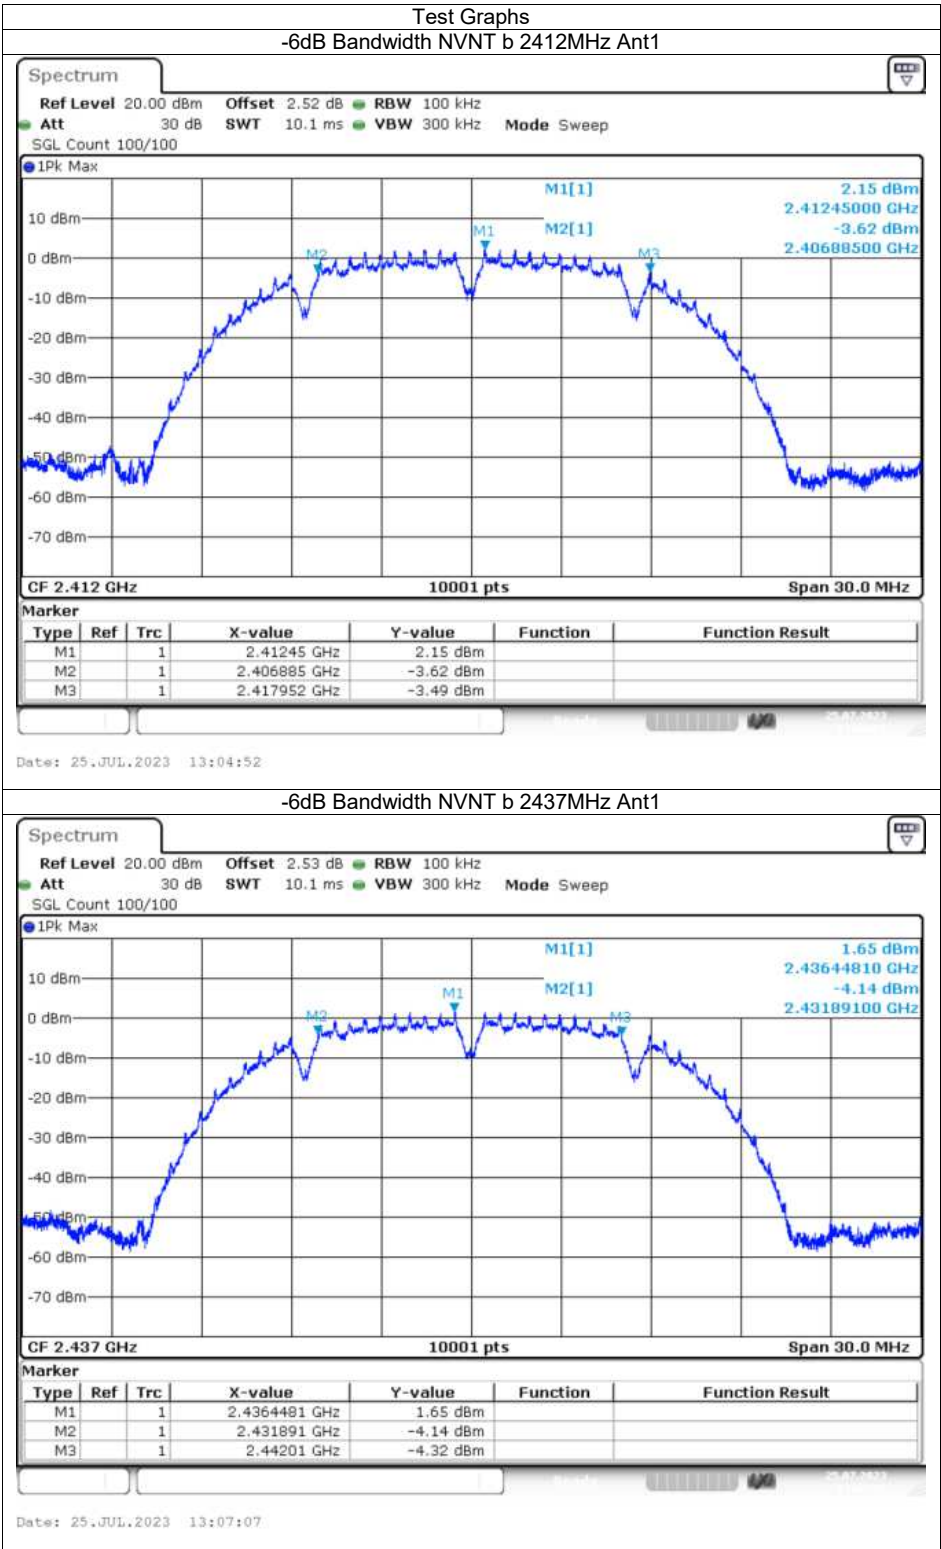


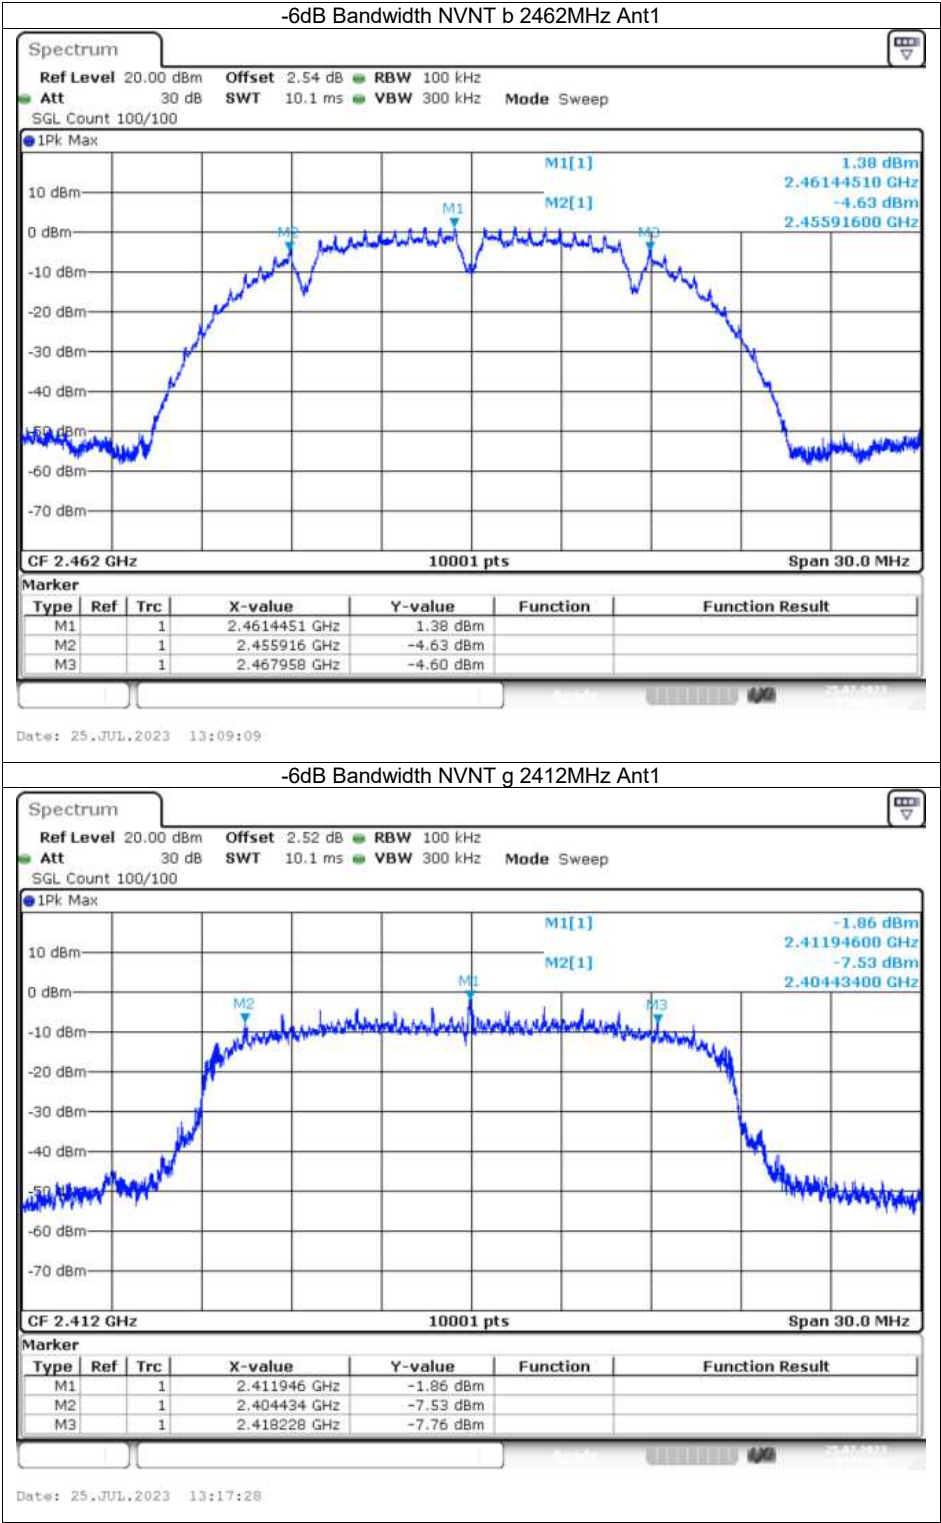

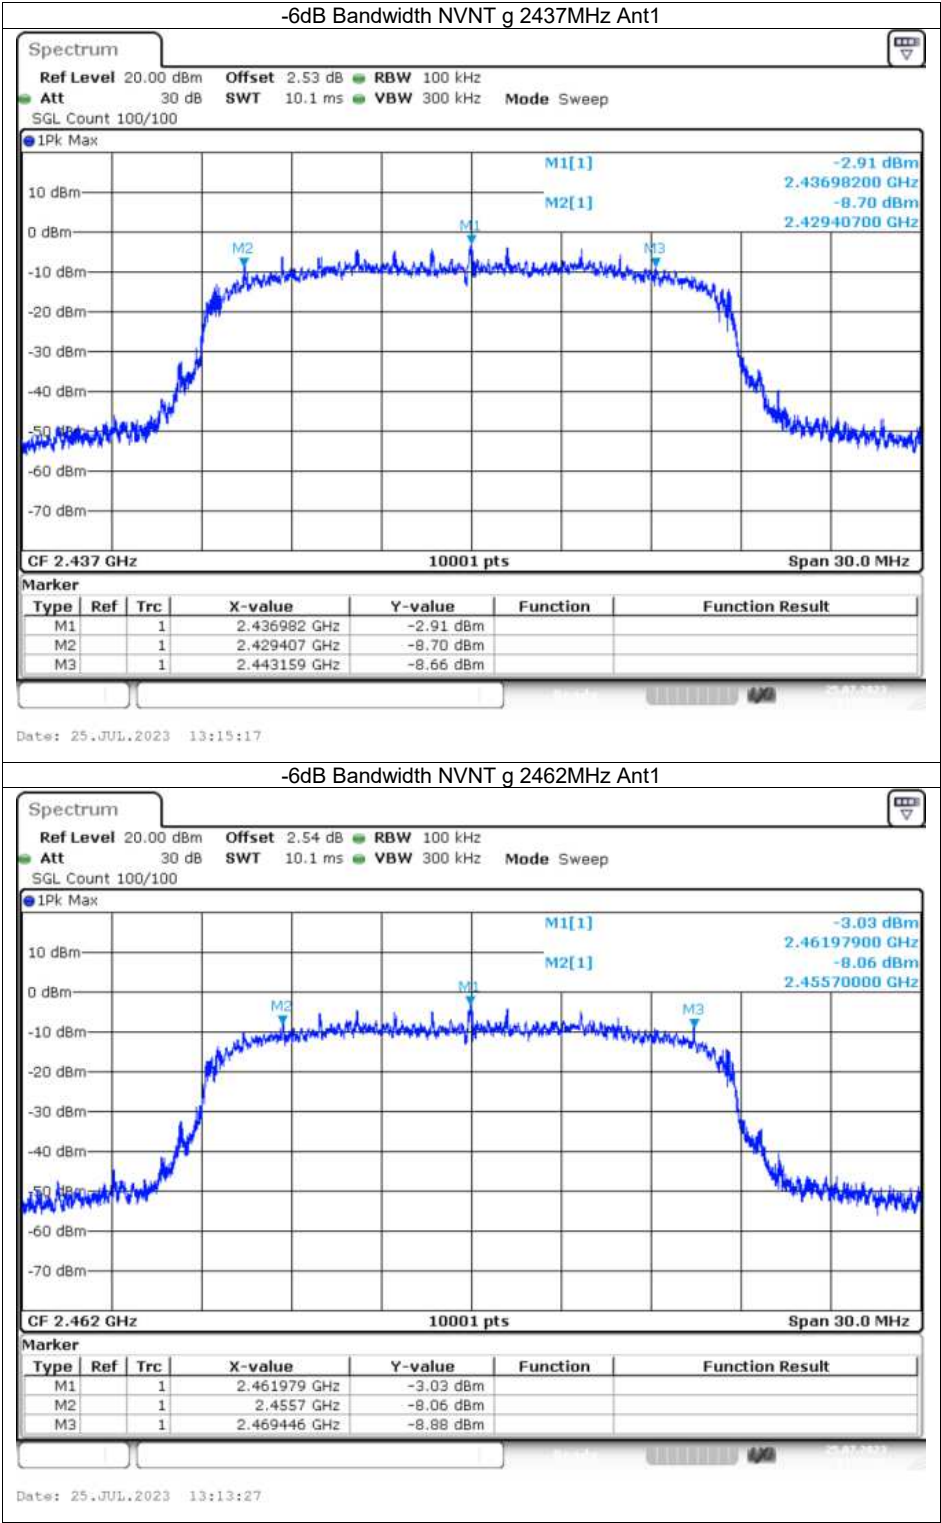

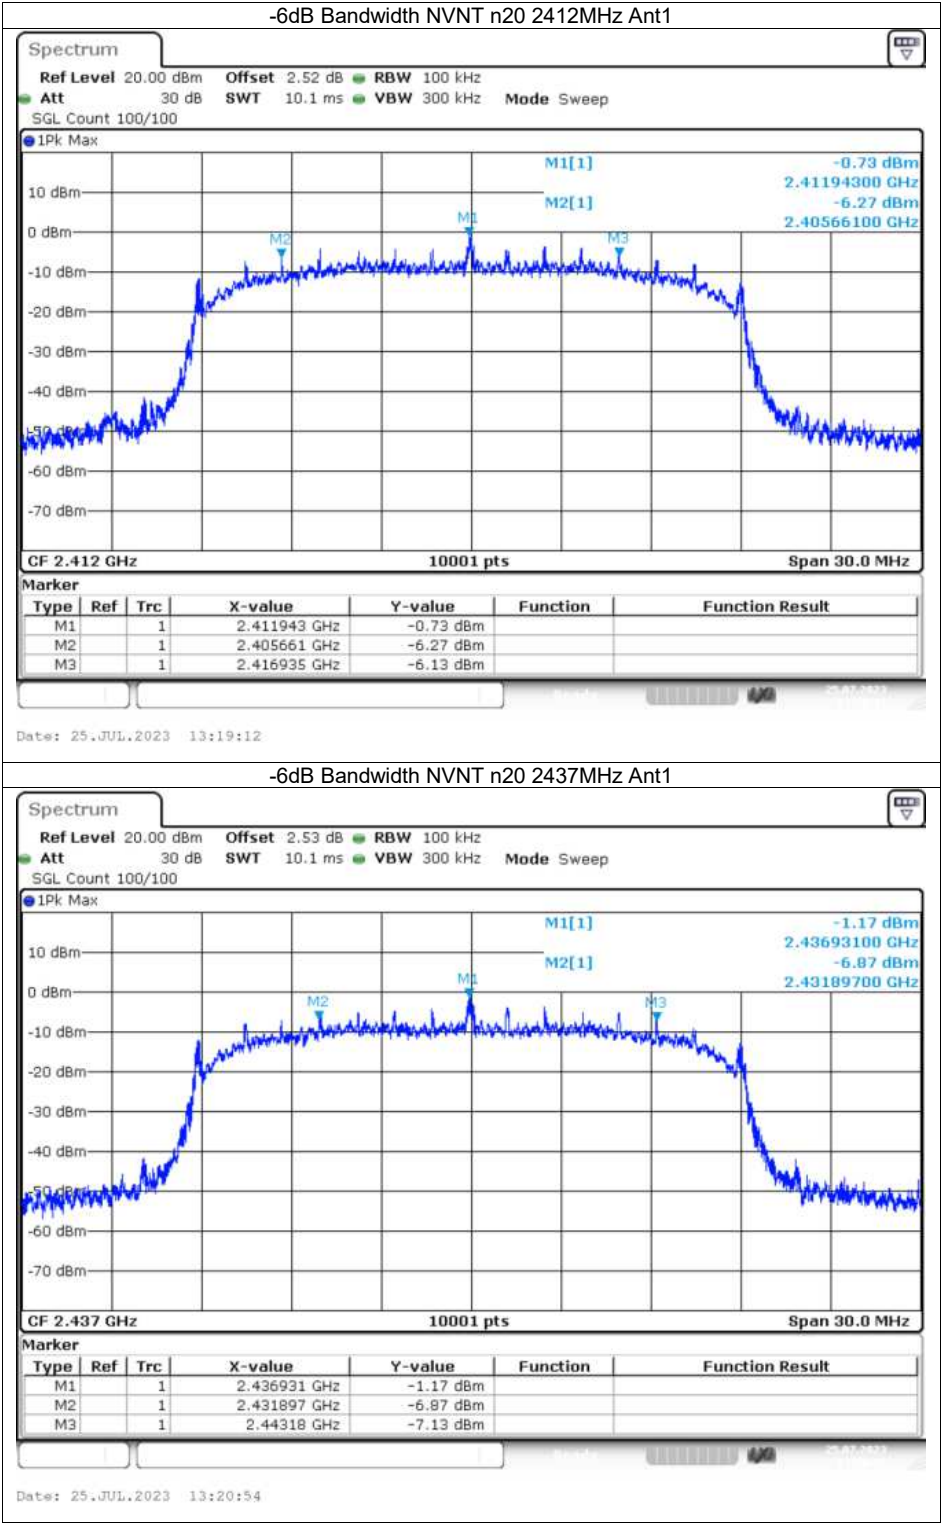


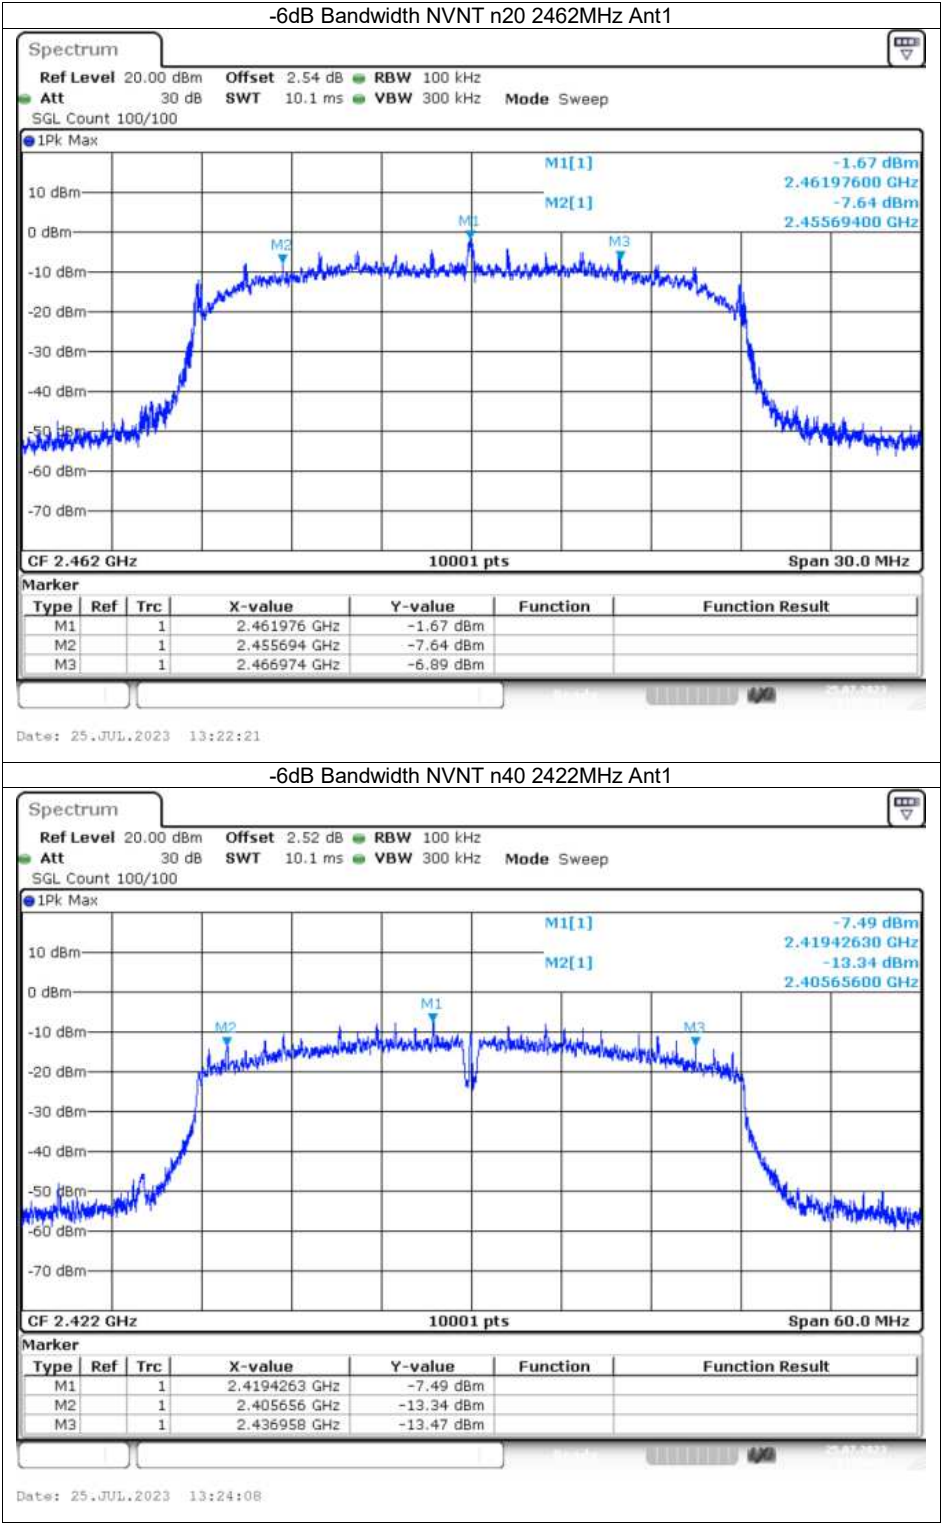


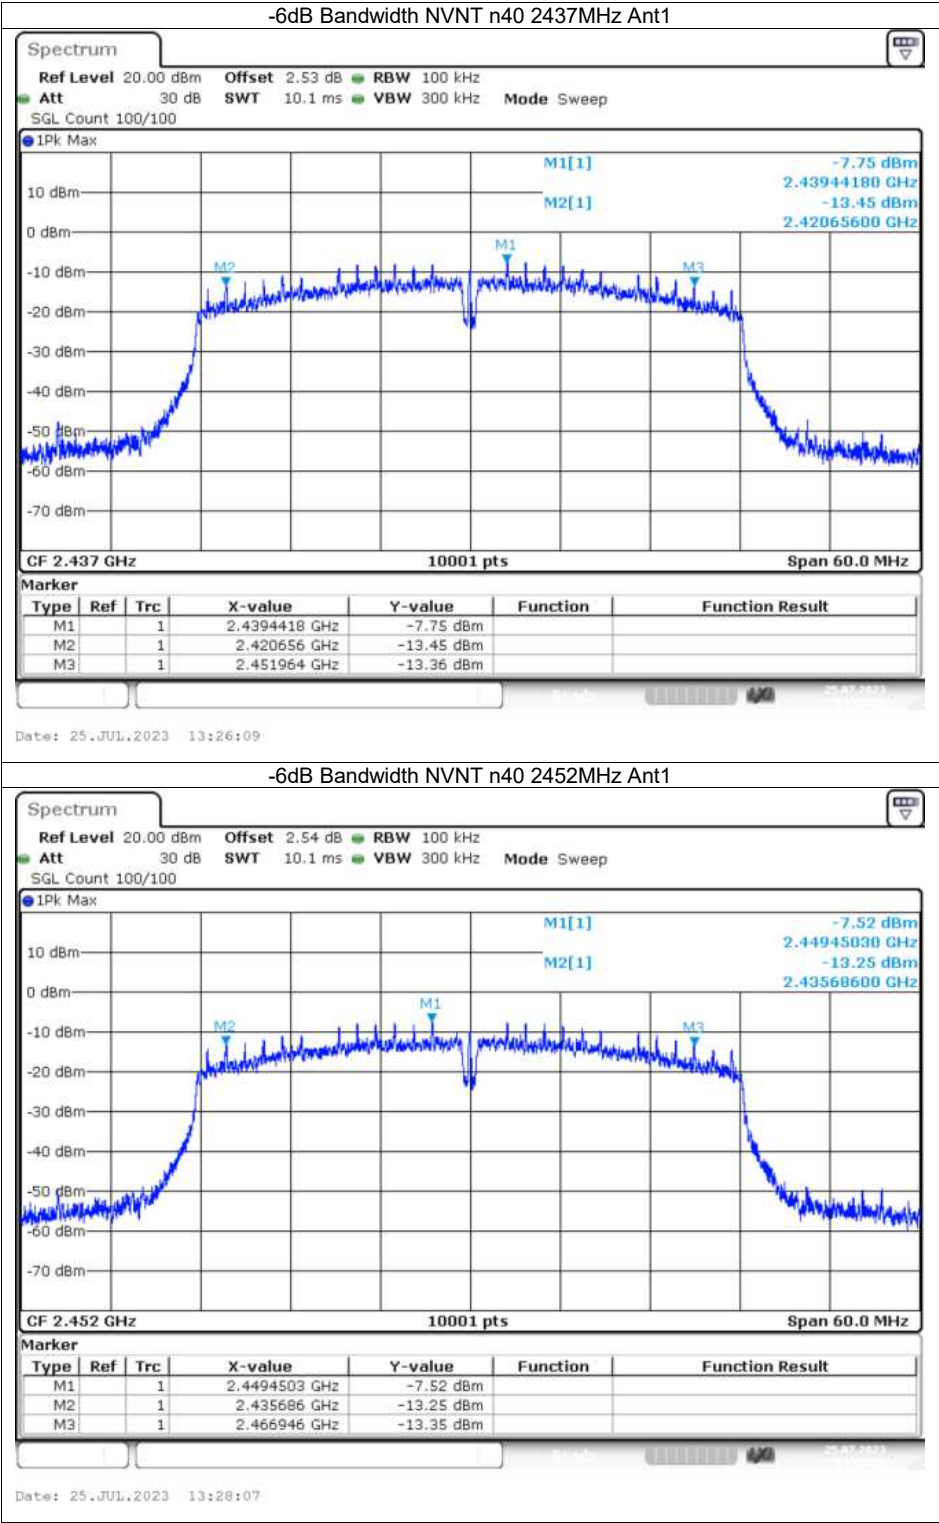



## Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/3kHz) | Duty Factor (dB) | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|------|-----------------|---------|--------------------------|------------------|----------------------|------------------|---------|
| NVNT      | b    | 2412            | Ant1    | -12.05                   | 0                | -12.05               | 8                | Pass    |
| NVNT      | b    | 2437            | Ant1    | -13.01                   | 0                | -13.01               | 8                | Pass    |
| NVNT      | b    | 2462            | Ant1    | -12.87                   | 0                | -12.87               | 8                | Pass    |
| NVNT      | g    | 2412            | Ant1    | -10.54                   | 0                | -10.54               | 8                | Pass    |
| NVNT      | g    | 2437            | Ant1    | -11.05                   | 0                | -11.05               | 8                | Pass    |
| NVNT      | g    | 2462            | Ant1    | -11.34                   | 0                | -11.34               | 8                | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -10.02                   | 0                | -10.02               | 8                | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -10.38                   | 0                | -10.38               | 8                | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -10.63                   | 0                | -10.63               | 8                | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -11.39                   | 0                | -11.39               | 8                | Pass    |
| NVNT      | n40  | 2437            | Ant1    | -11.08                   | 0                | -11.08               | 8                | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -11.03                   | 0                | -11.03               | 8                | Pass    |

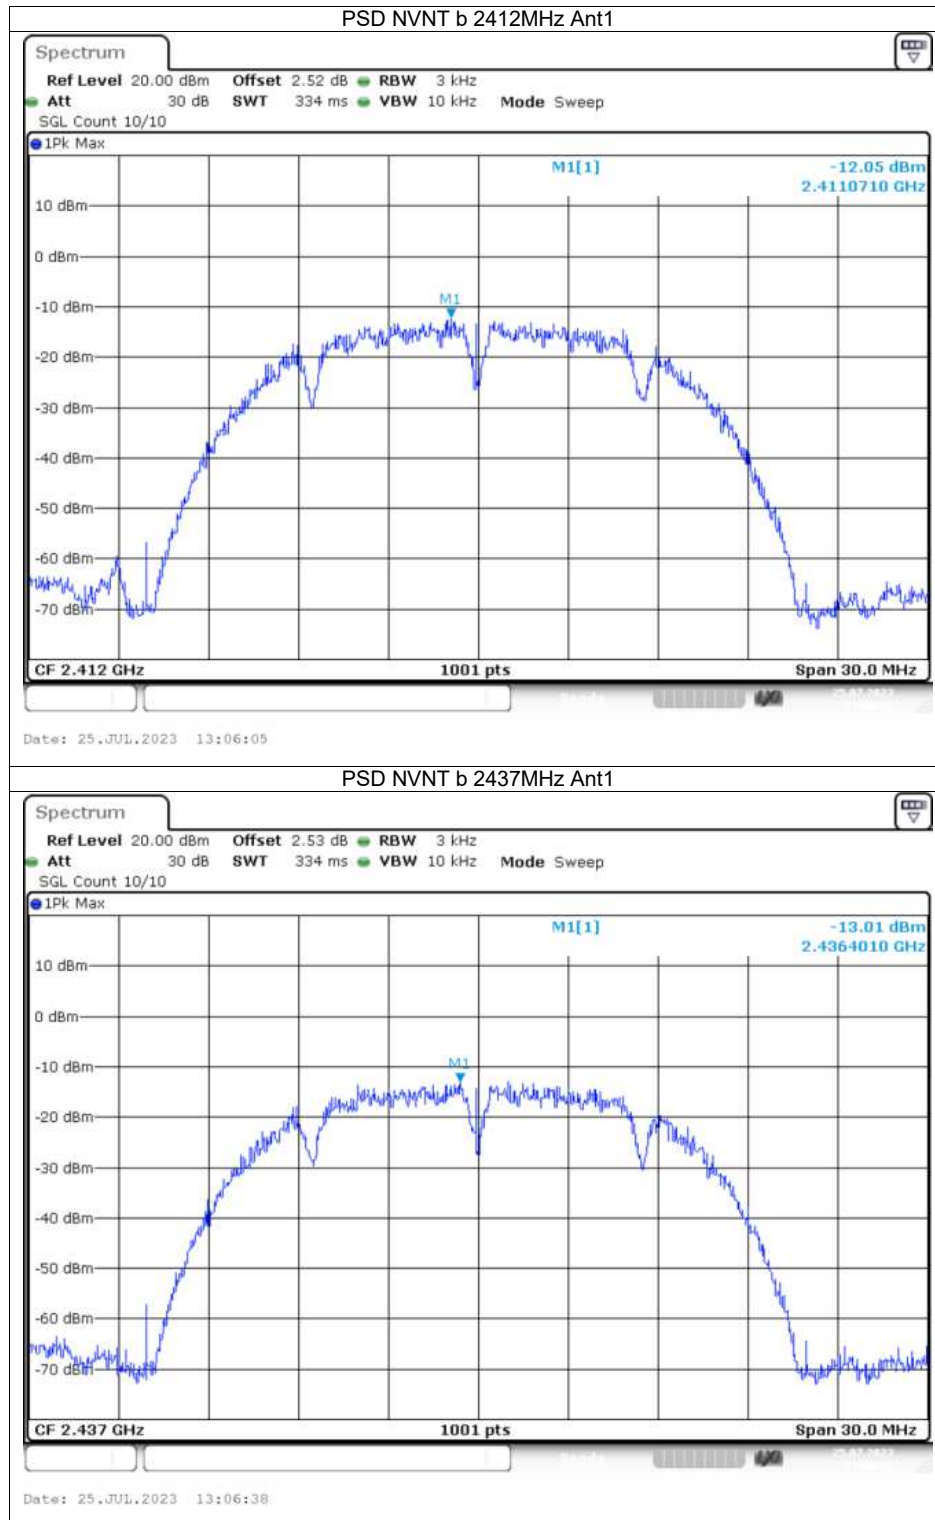


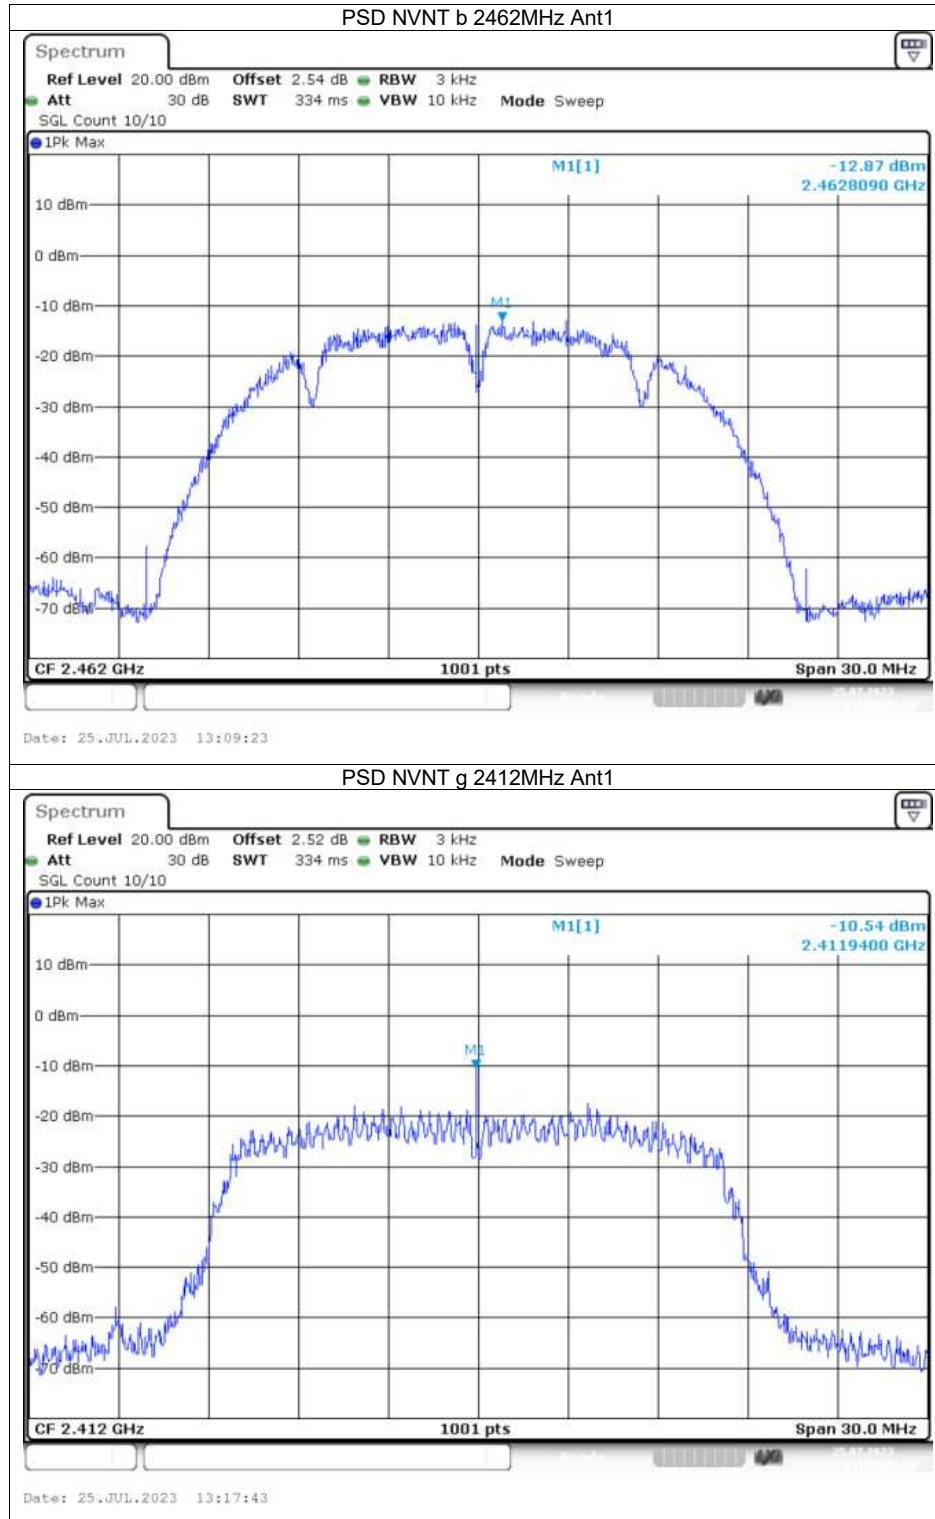

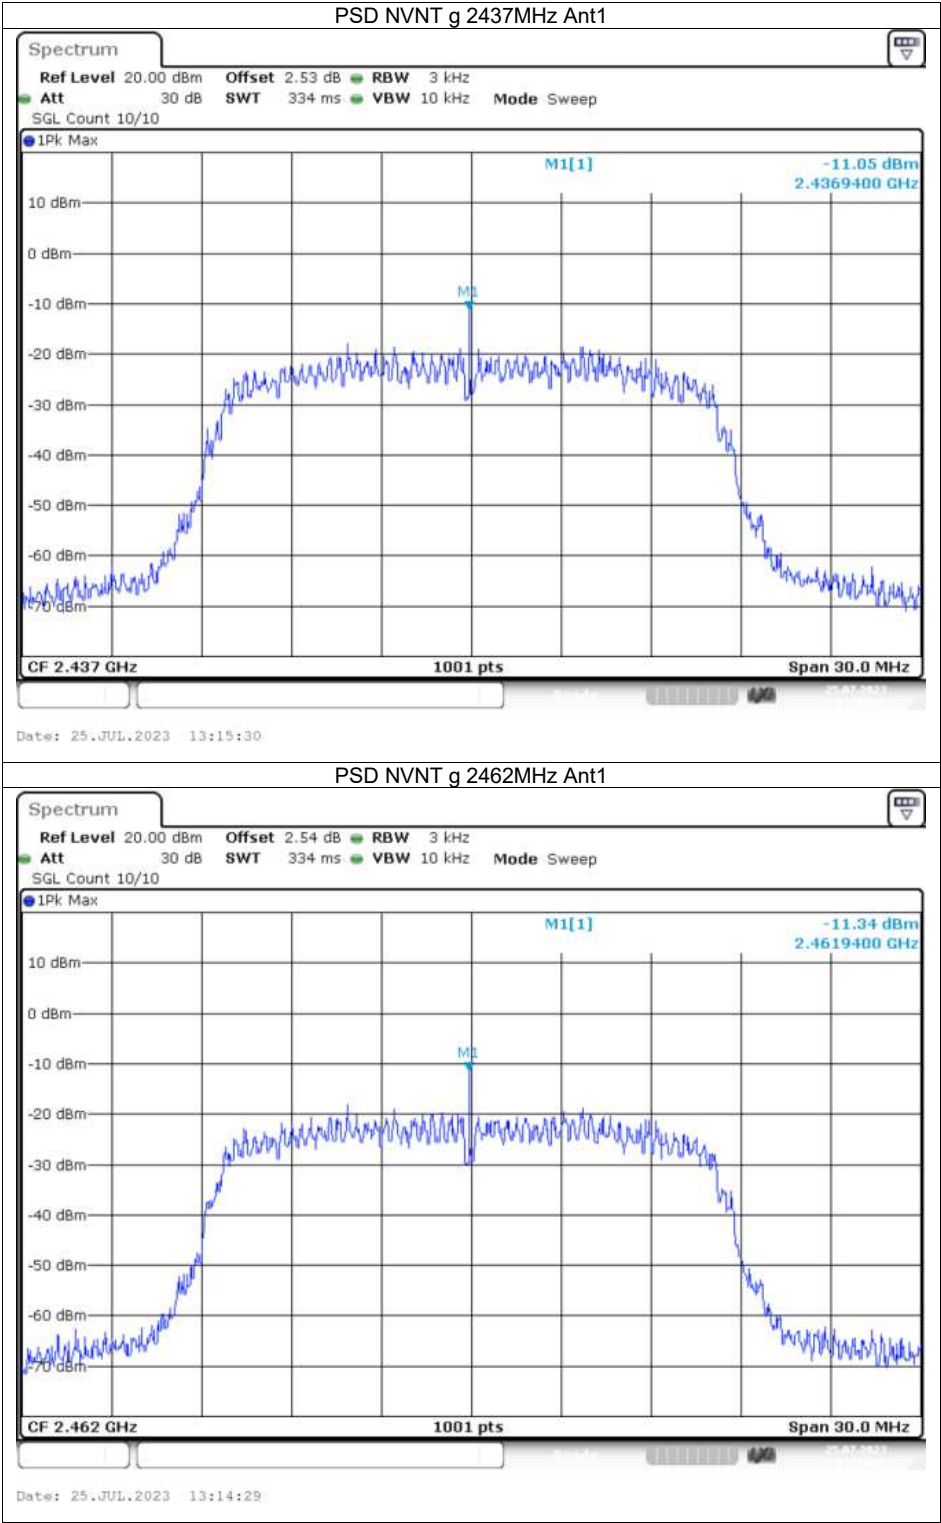

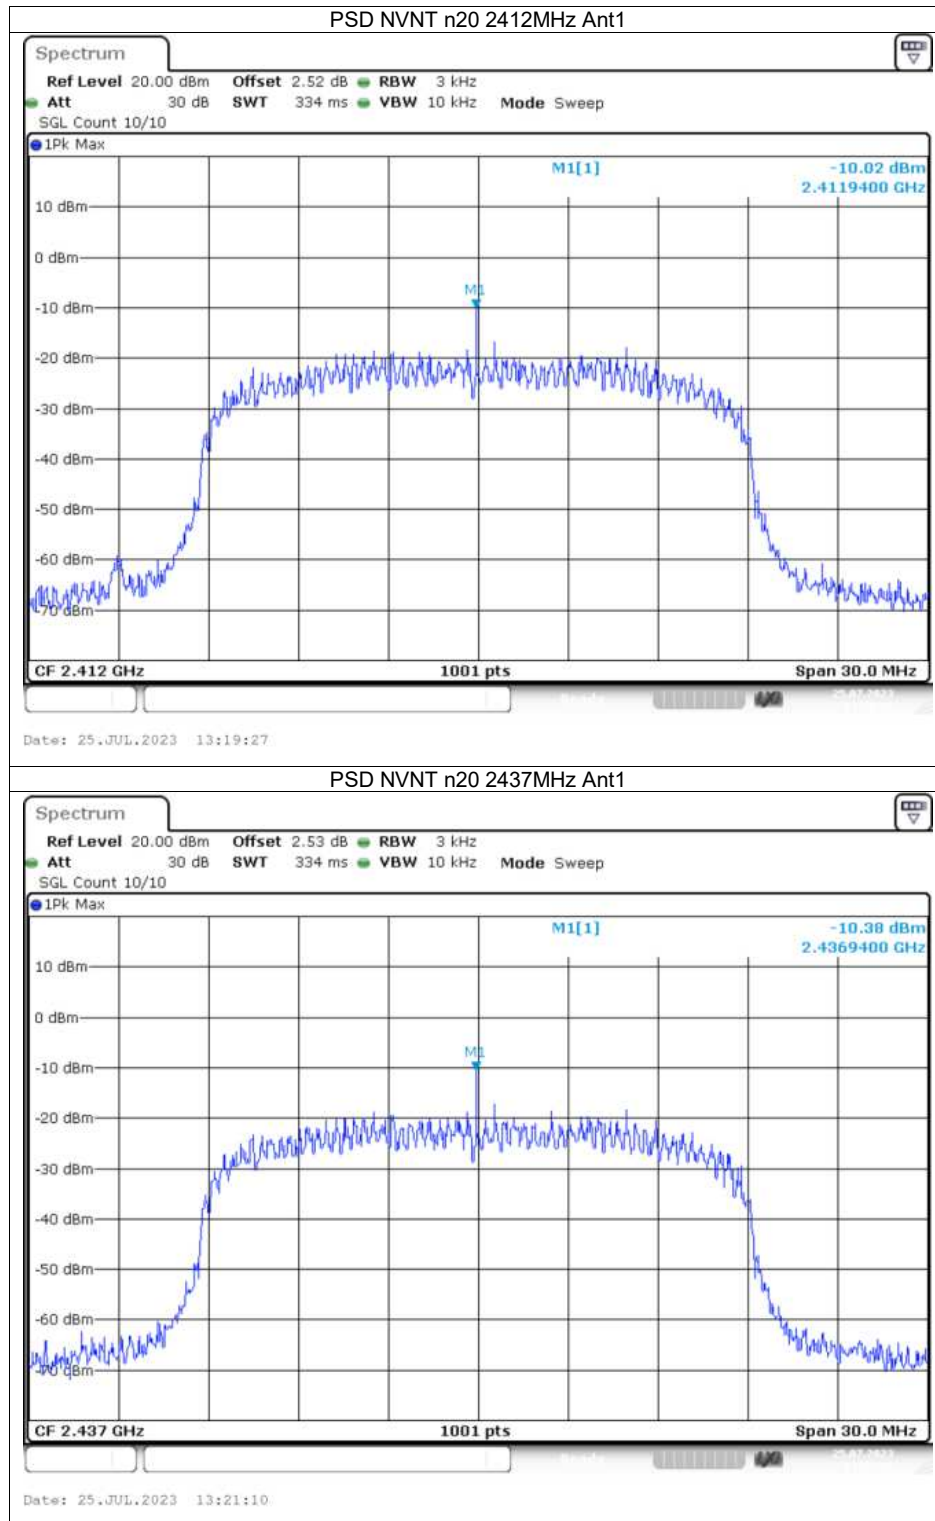


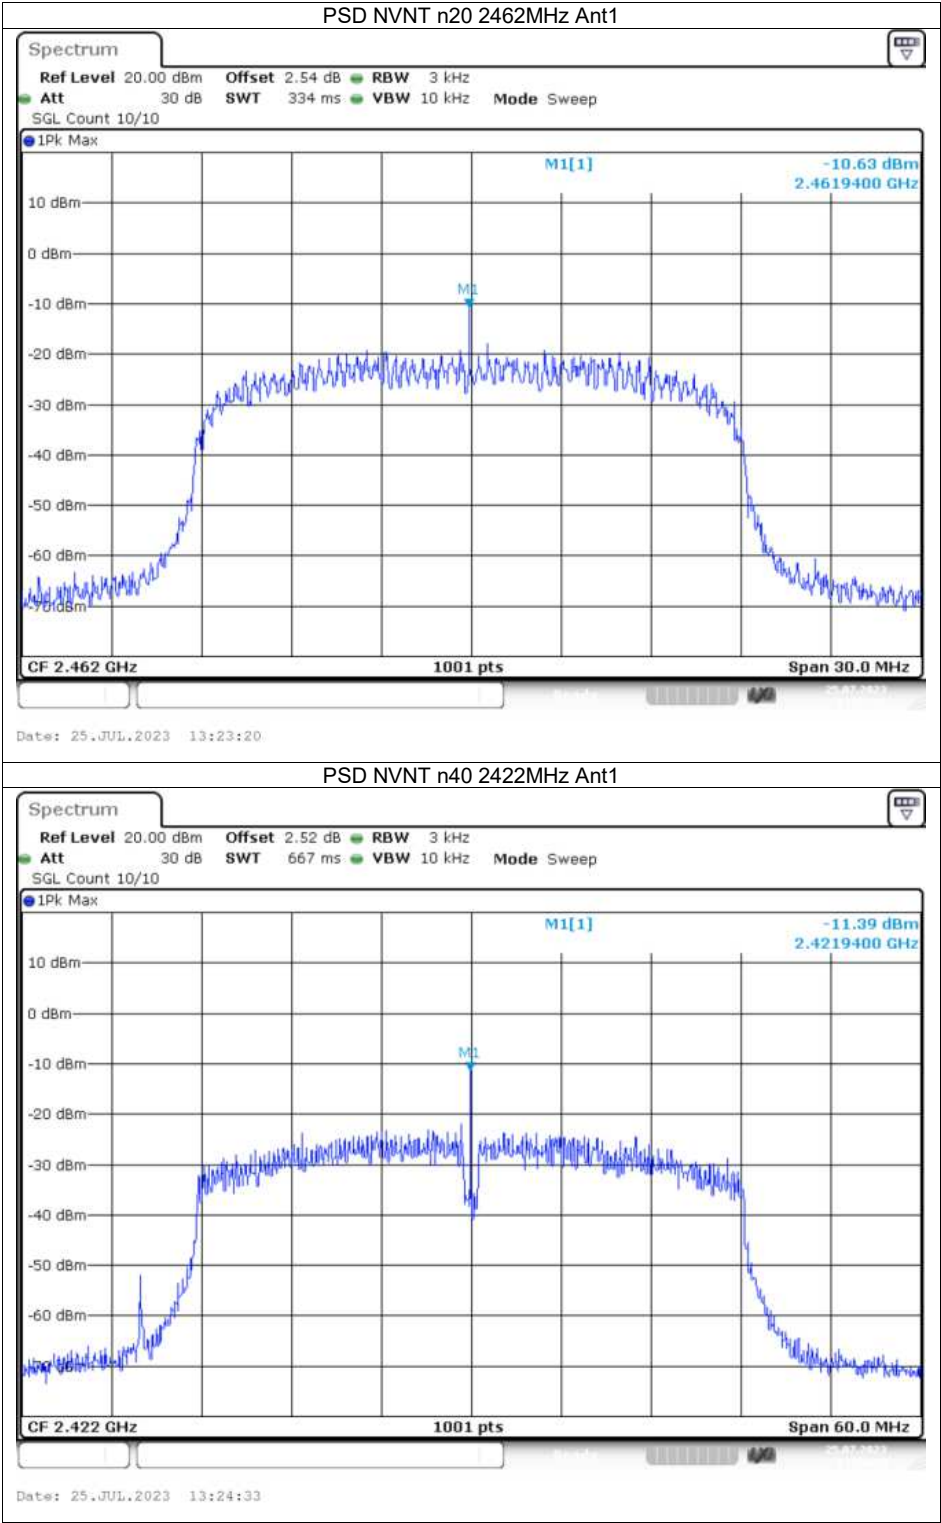


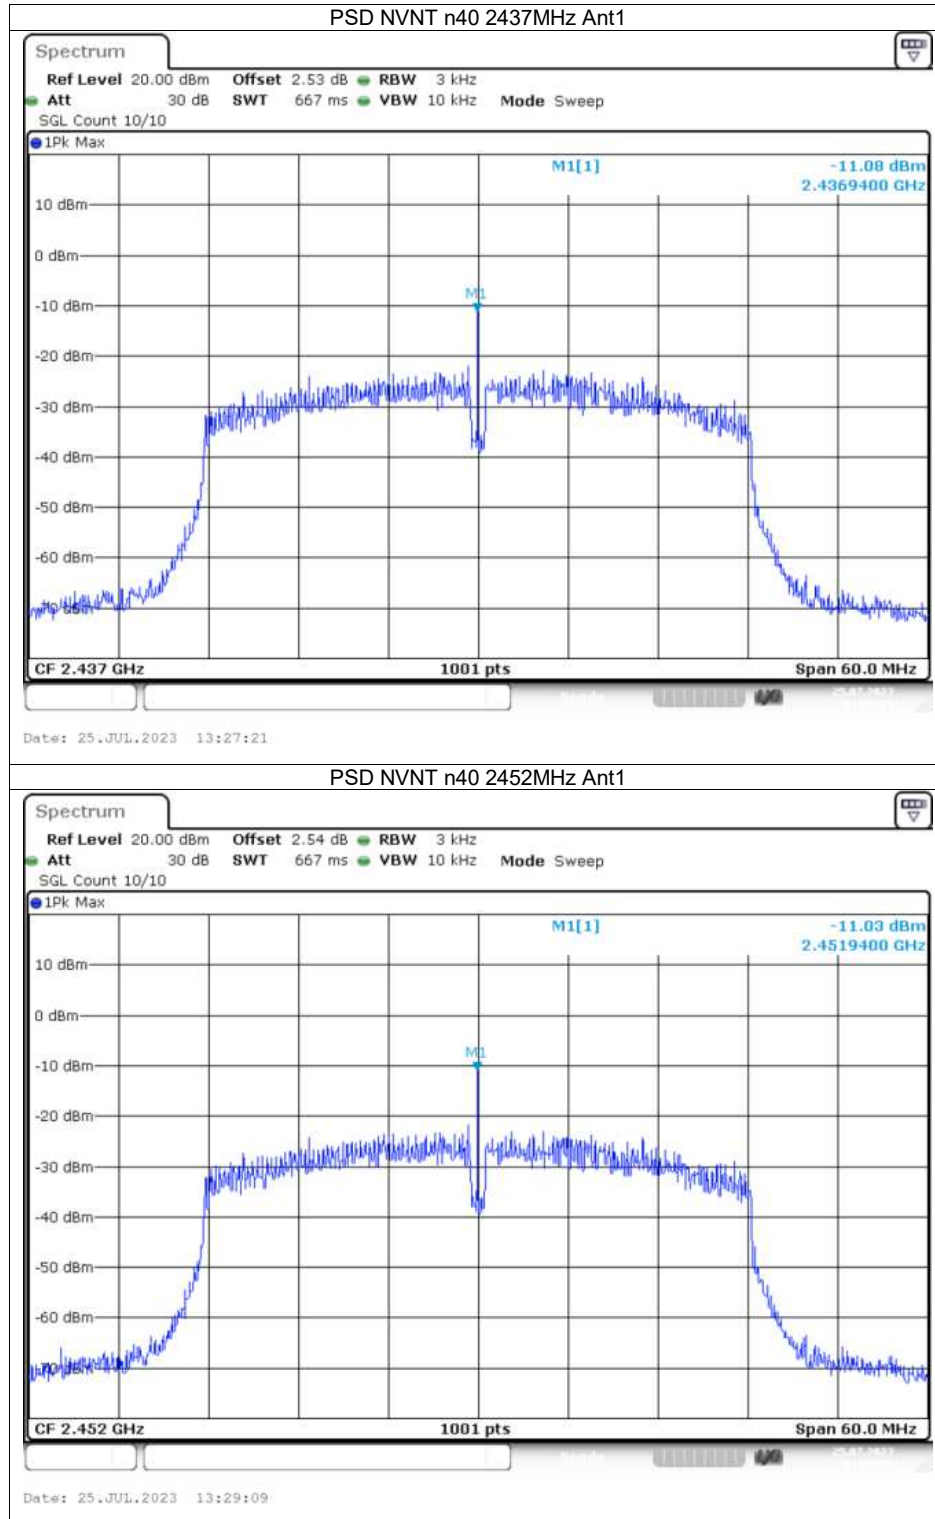



## Band Edge


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -49.12          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -56.85          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -42.17          | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -50.27          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -44.64          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -53.93          | -20         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -37.55          | -20         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -46.01          | -20         | Pass    |

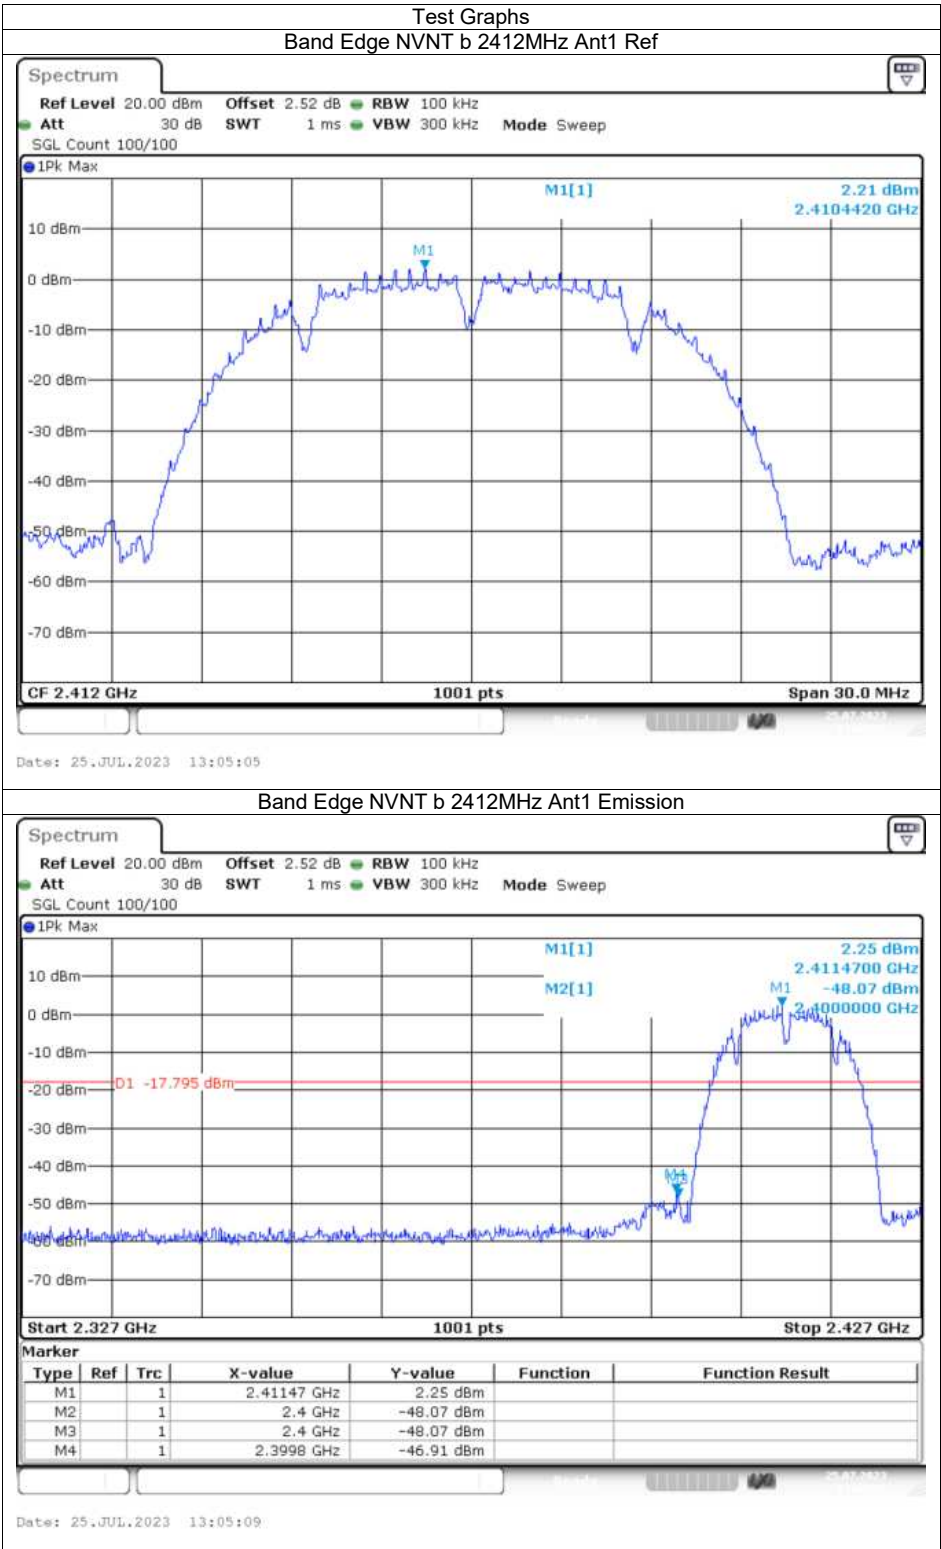


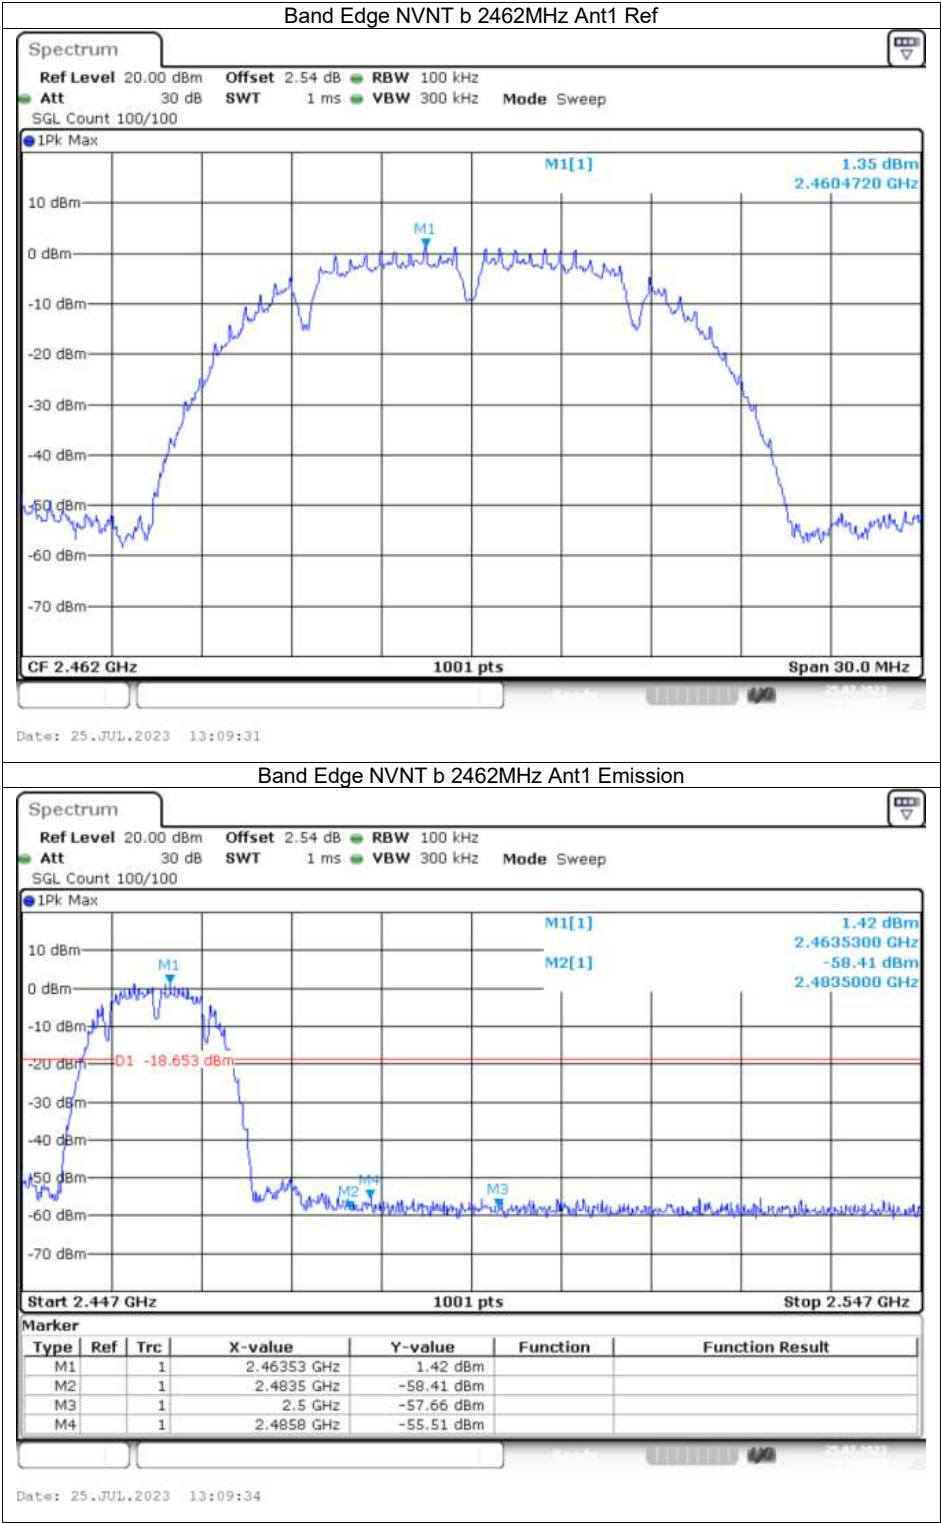


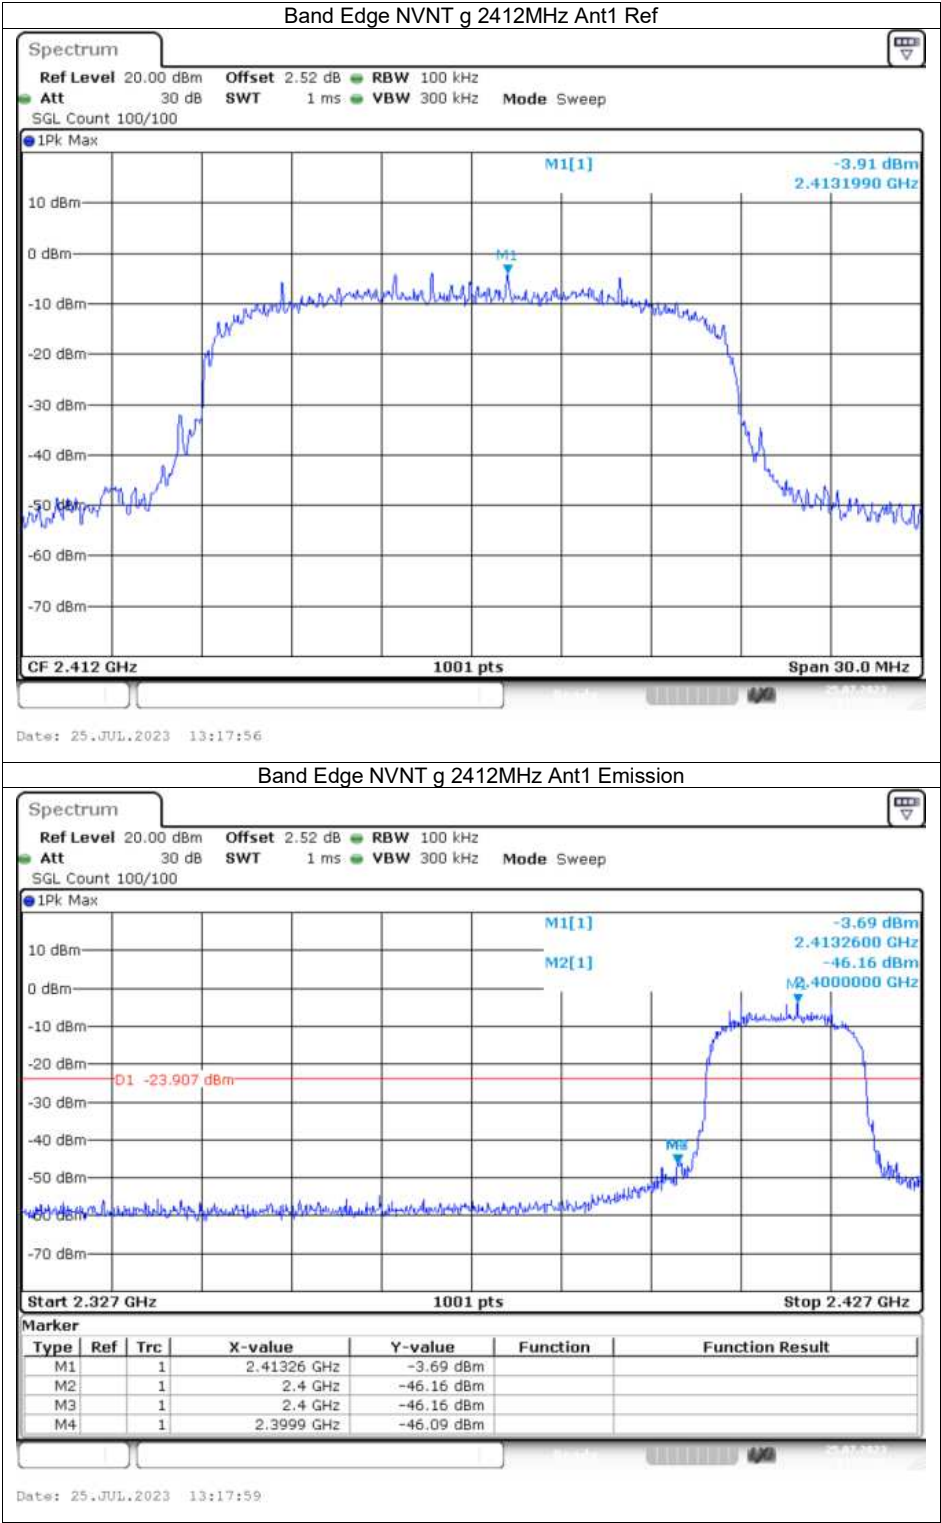


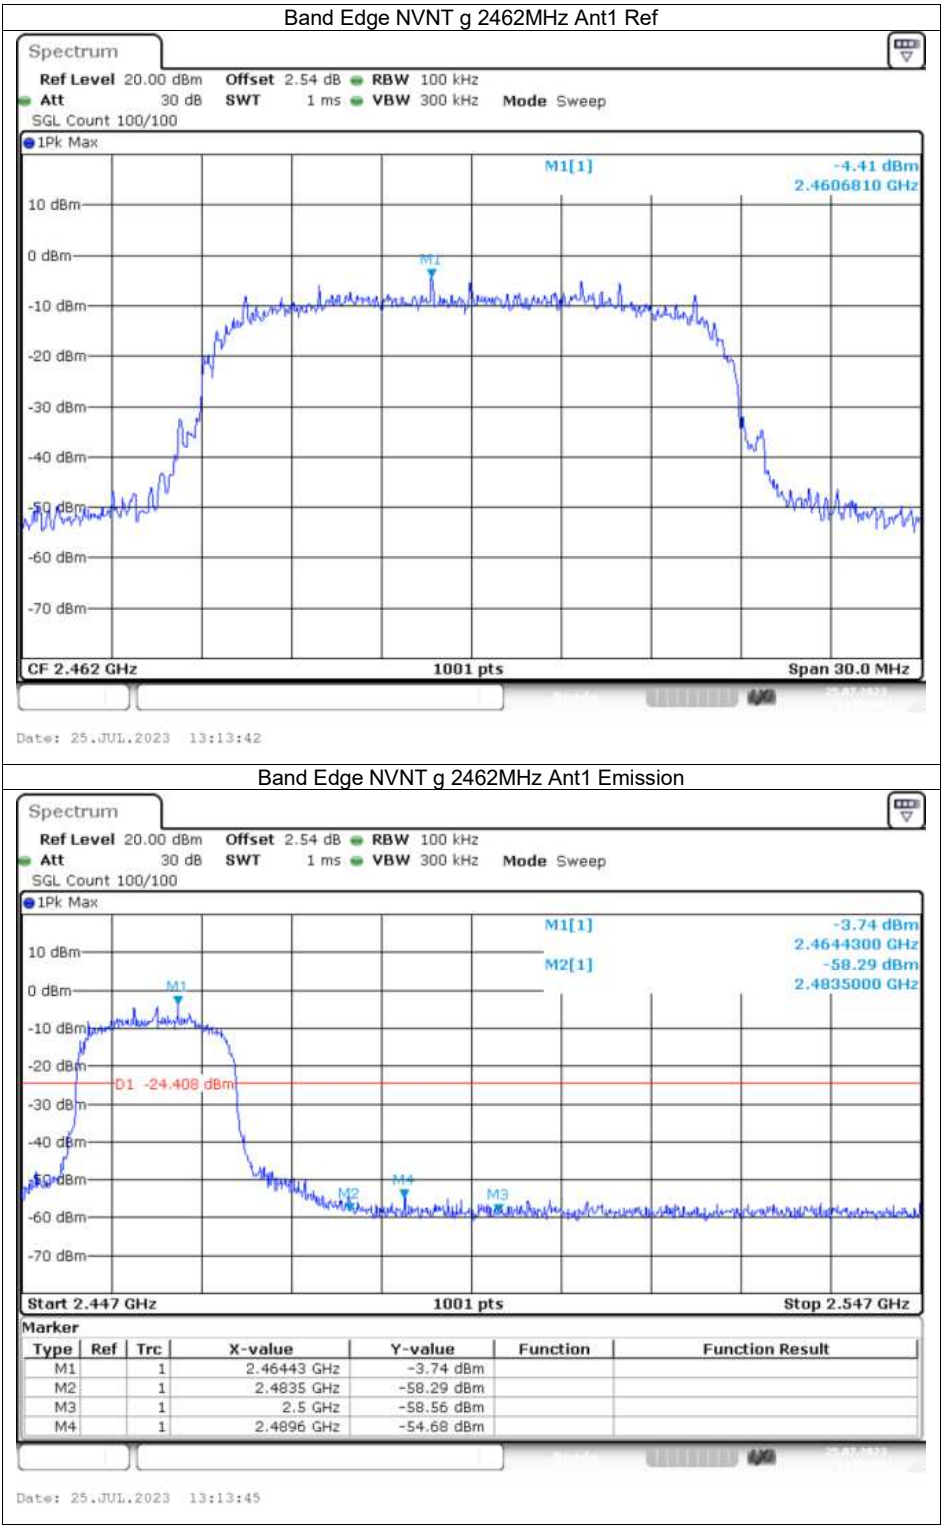

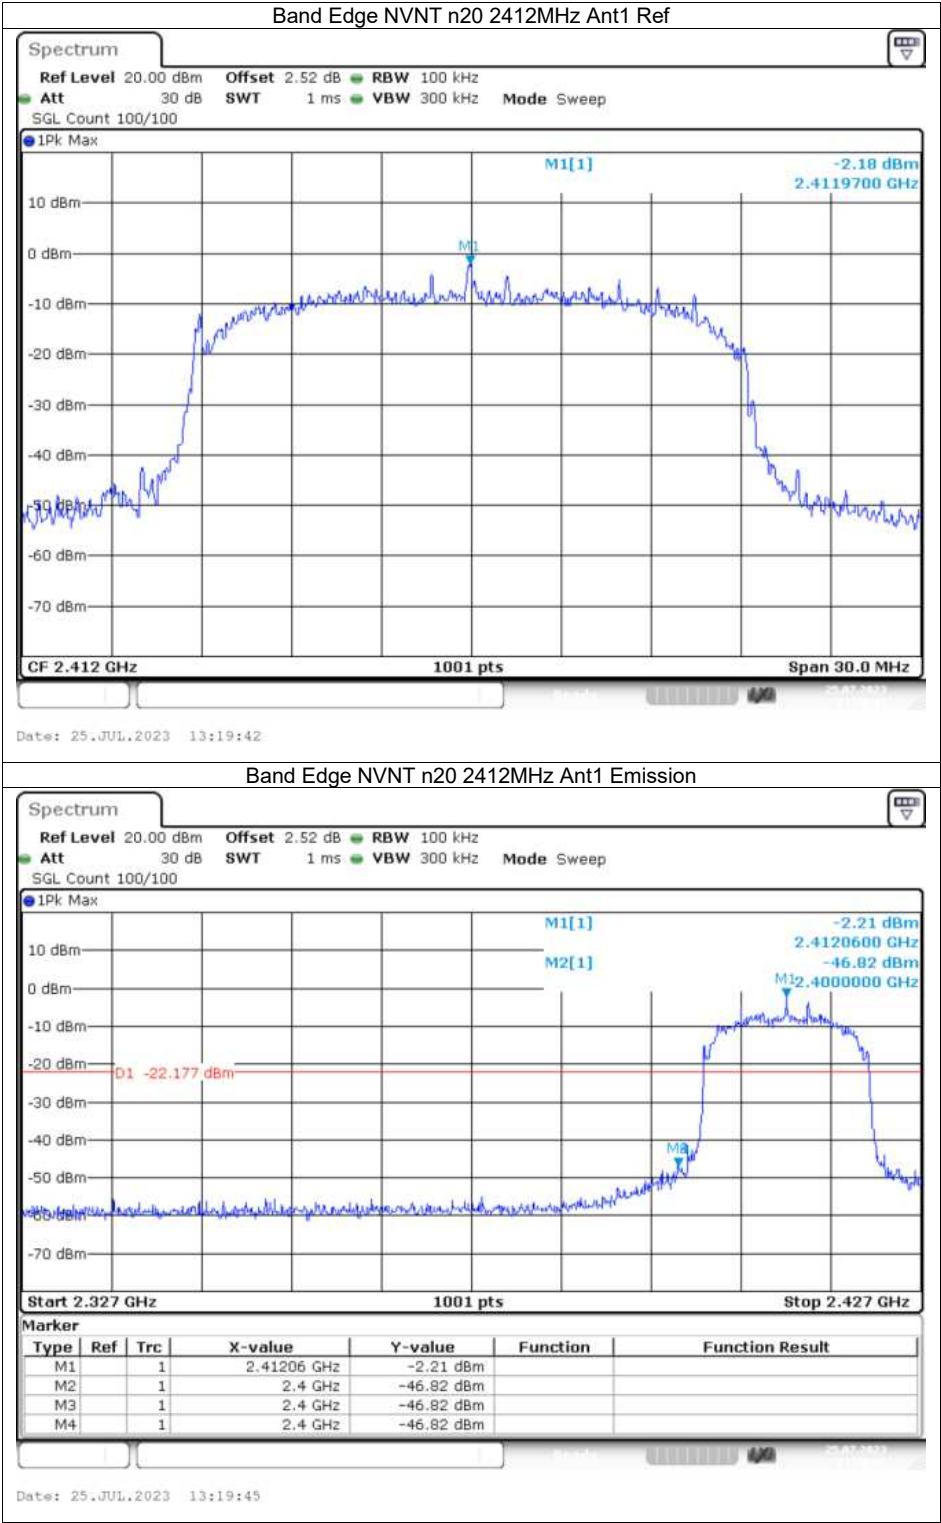

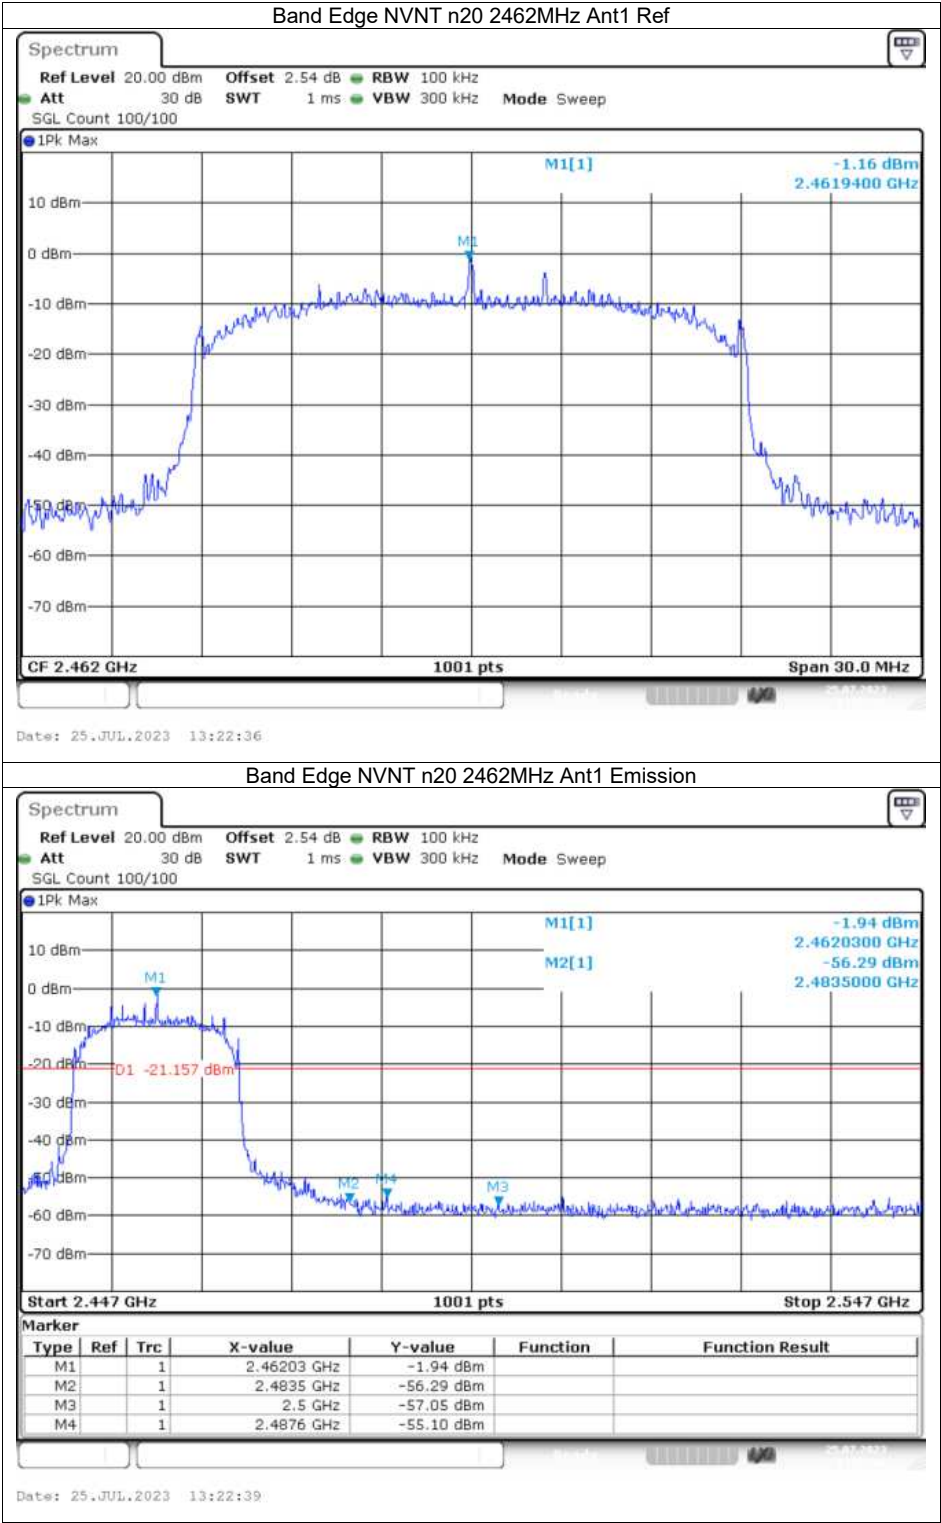


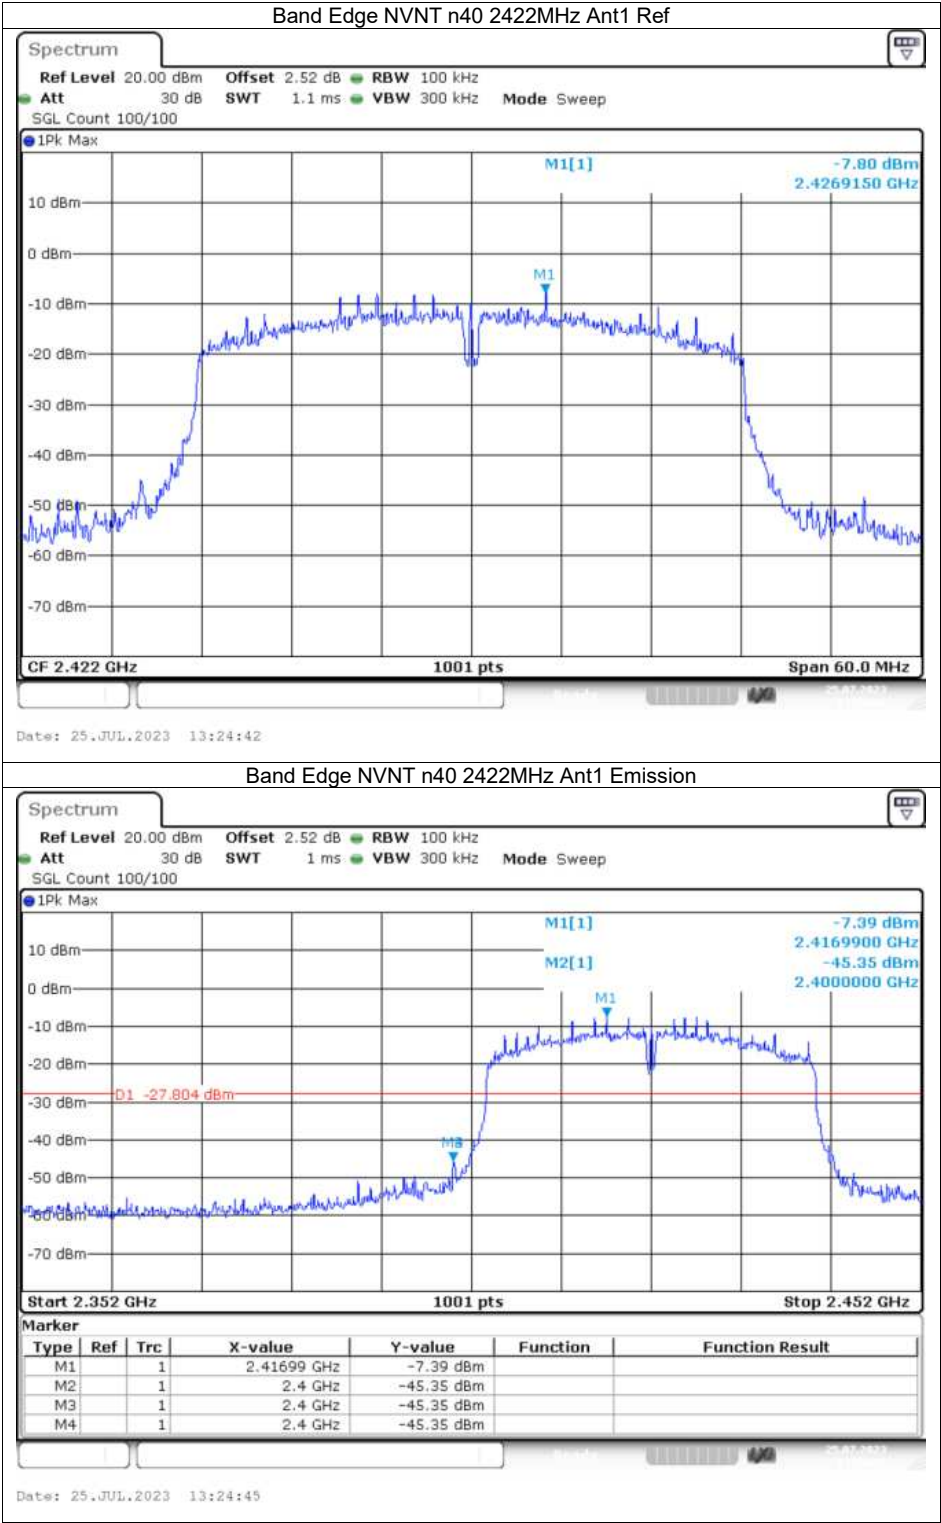


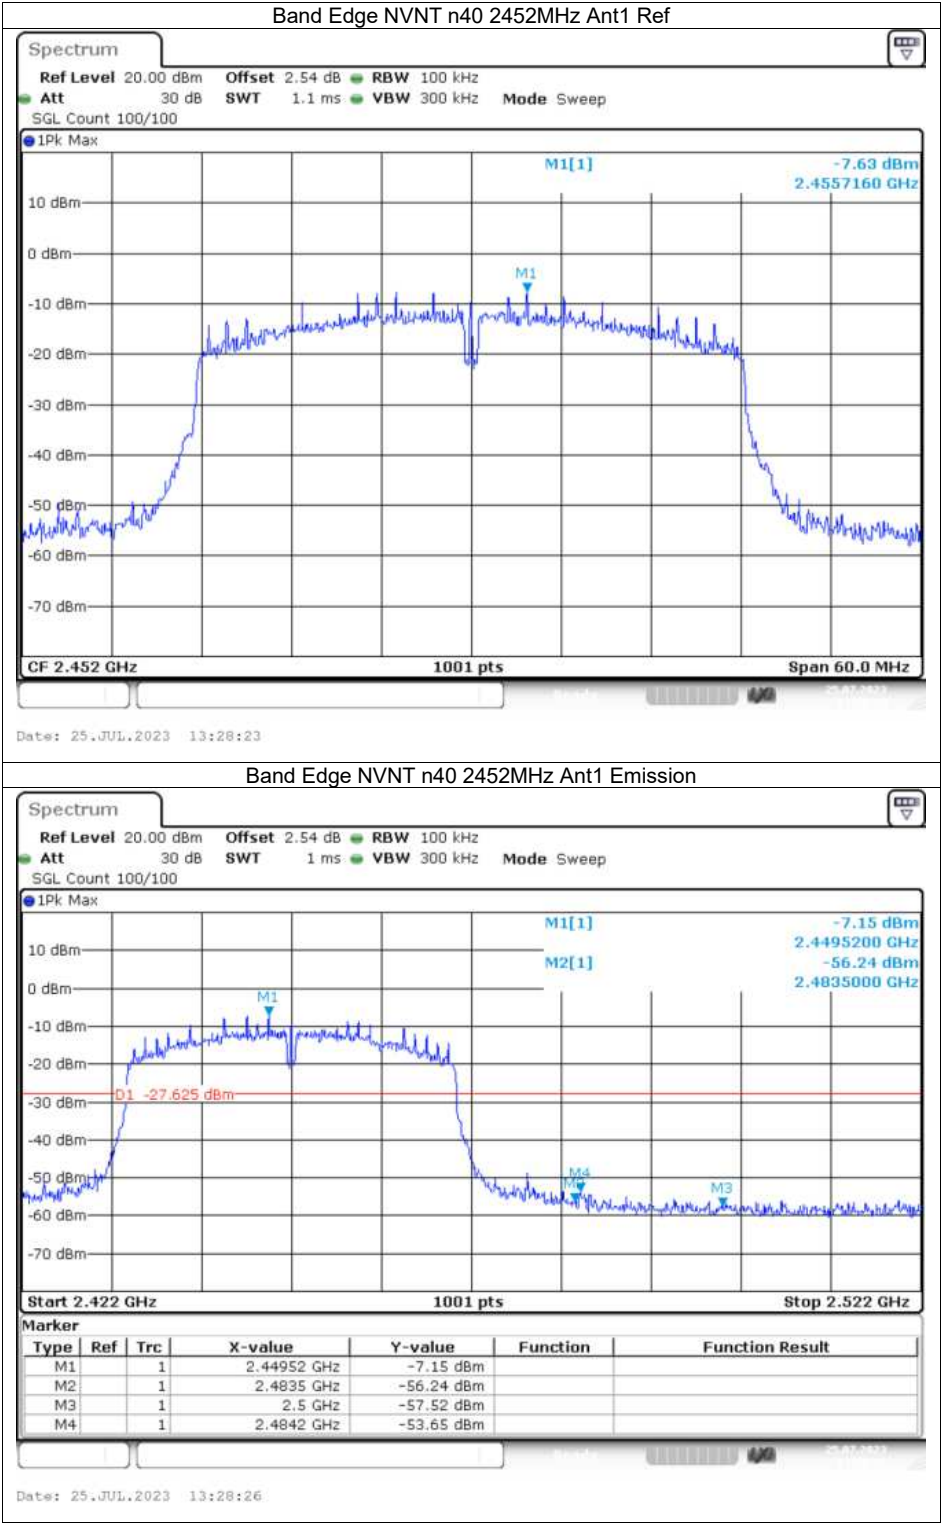



## Conducted RF Spurious Emission


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -51.95          | -20         | Pass    |
| NVNT      | b    | 2437            | Ant1    | -50.66          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -51.04          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -45.74          | -20         | Pass    |
| NVNT      | g    | 2437            | Ant1    | -46.35          | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -44.92          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -48.31          | -20         | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -48.22          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -47.69          | -20         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -42.44          | -20         | Pass    |
| NVNT      | n40  | 2437            | Ant1    | -42.37          | -20         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -42.07          | -20         | Pass    |

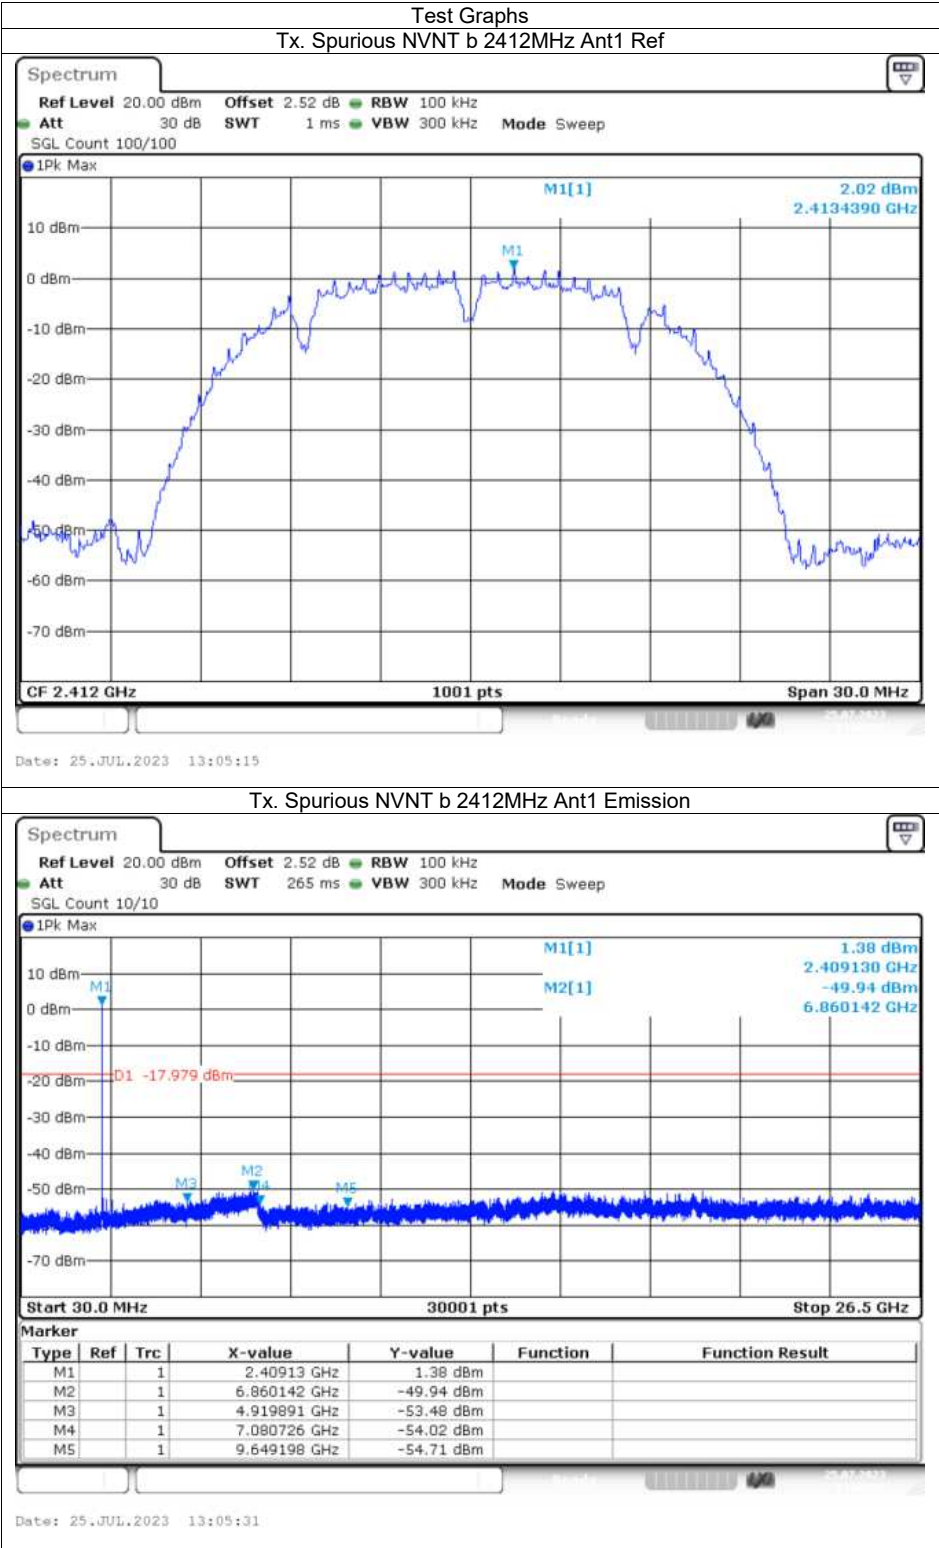


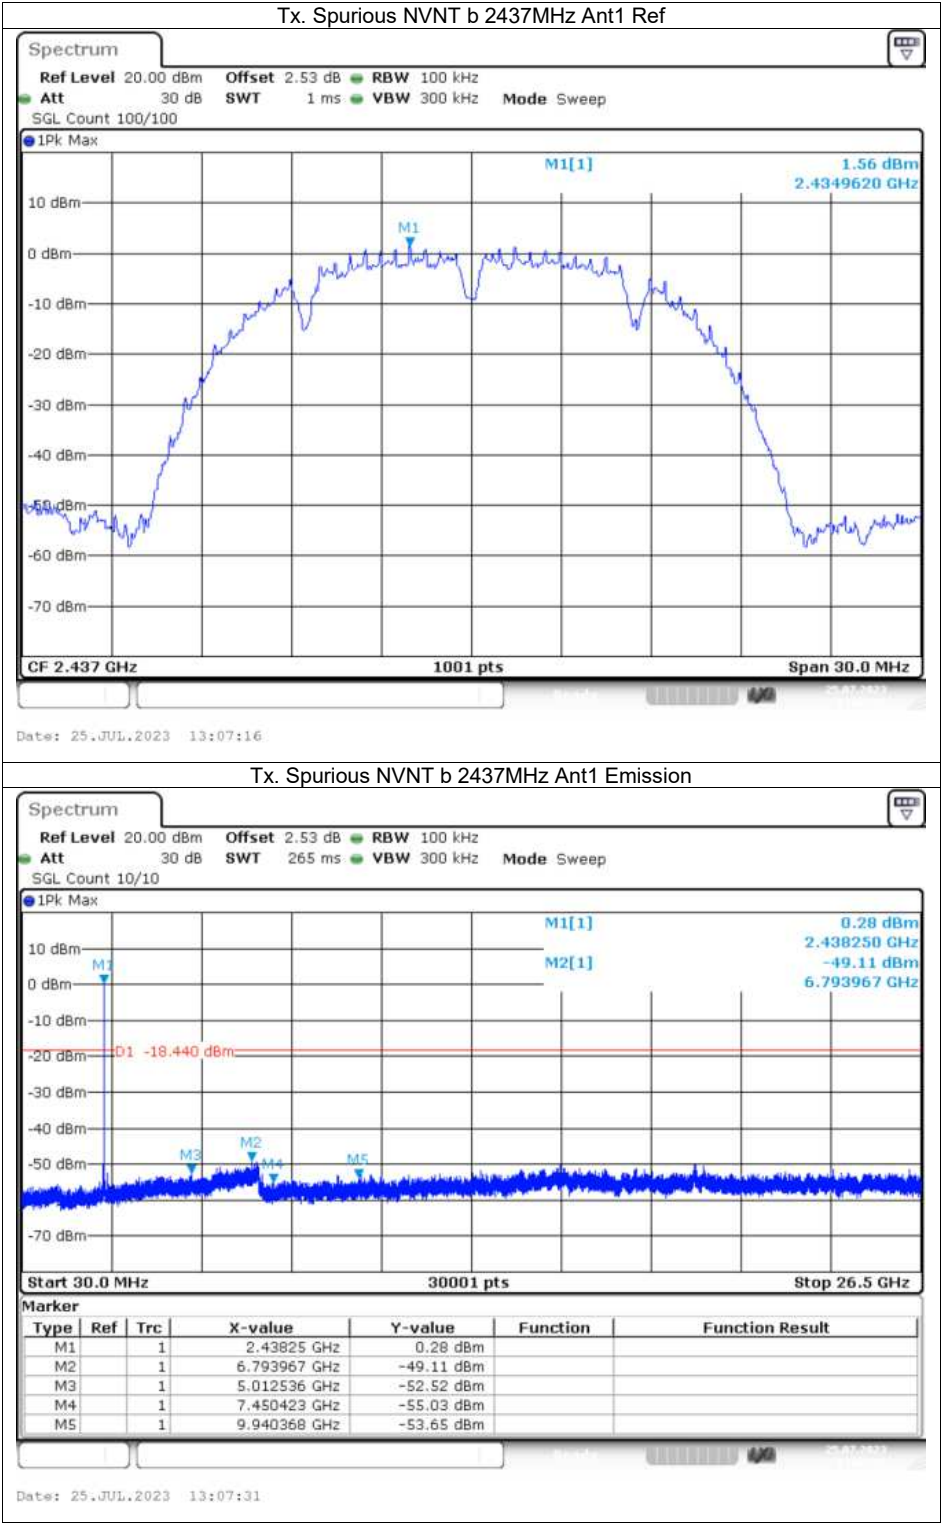


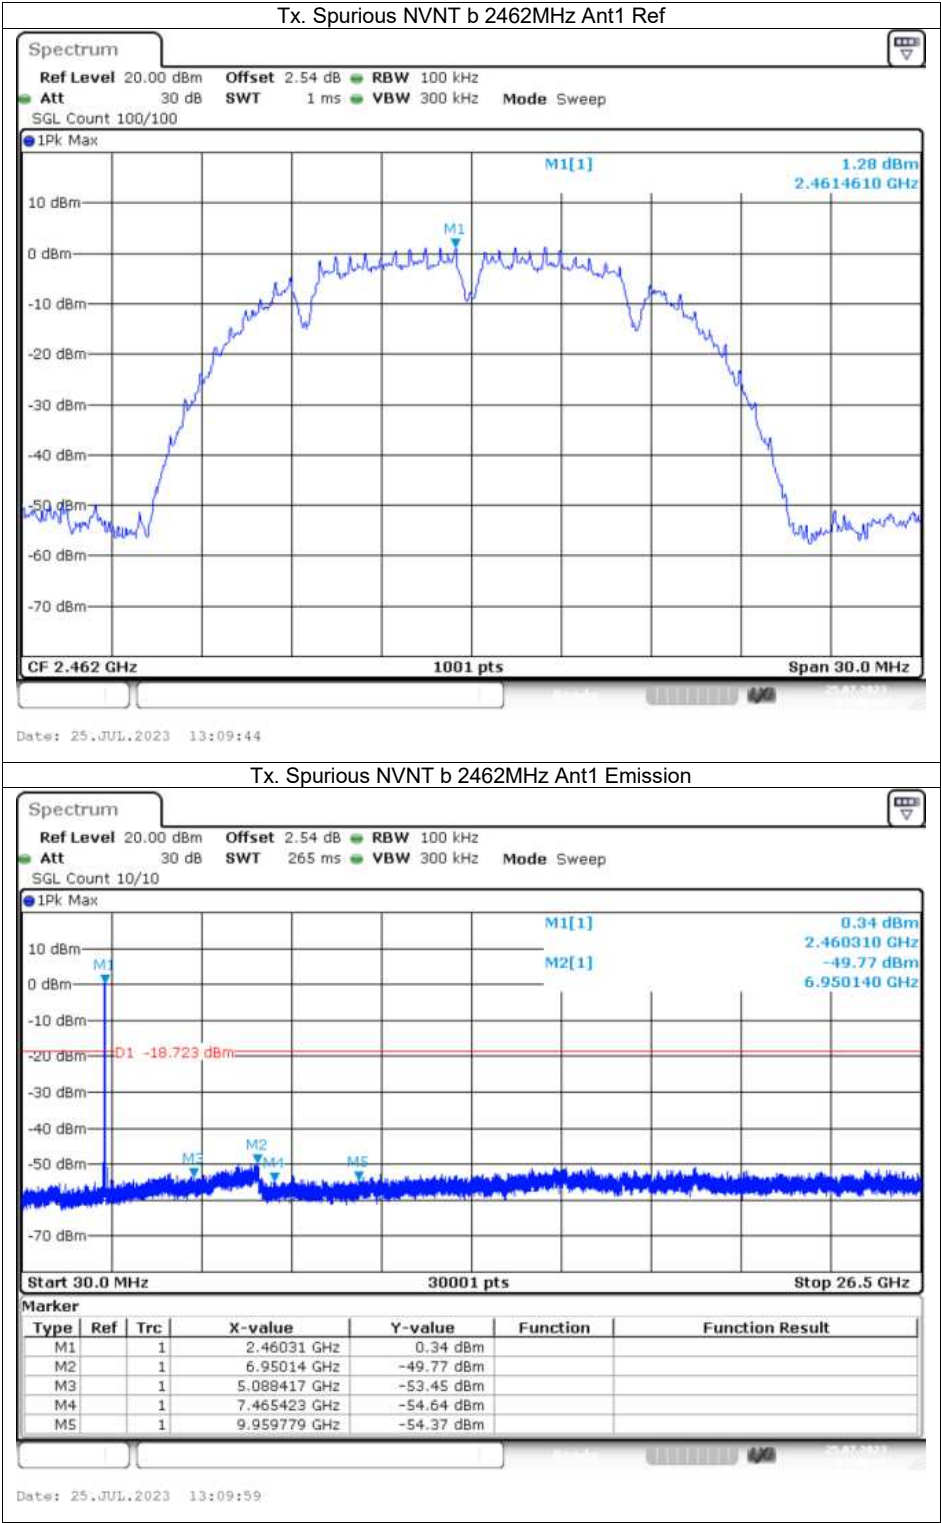


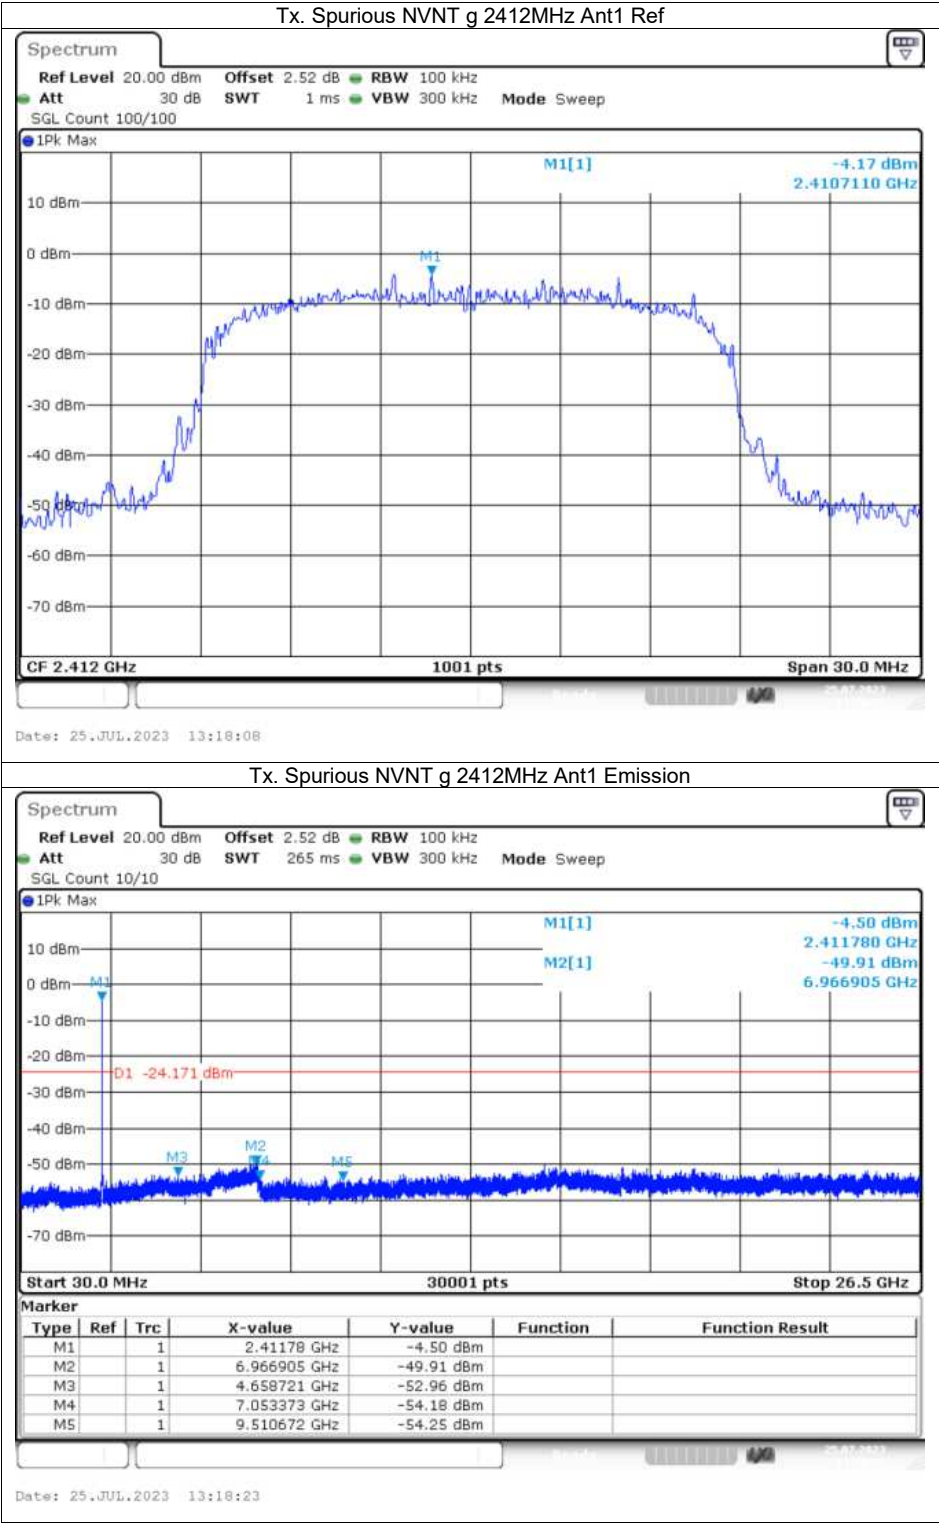


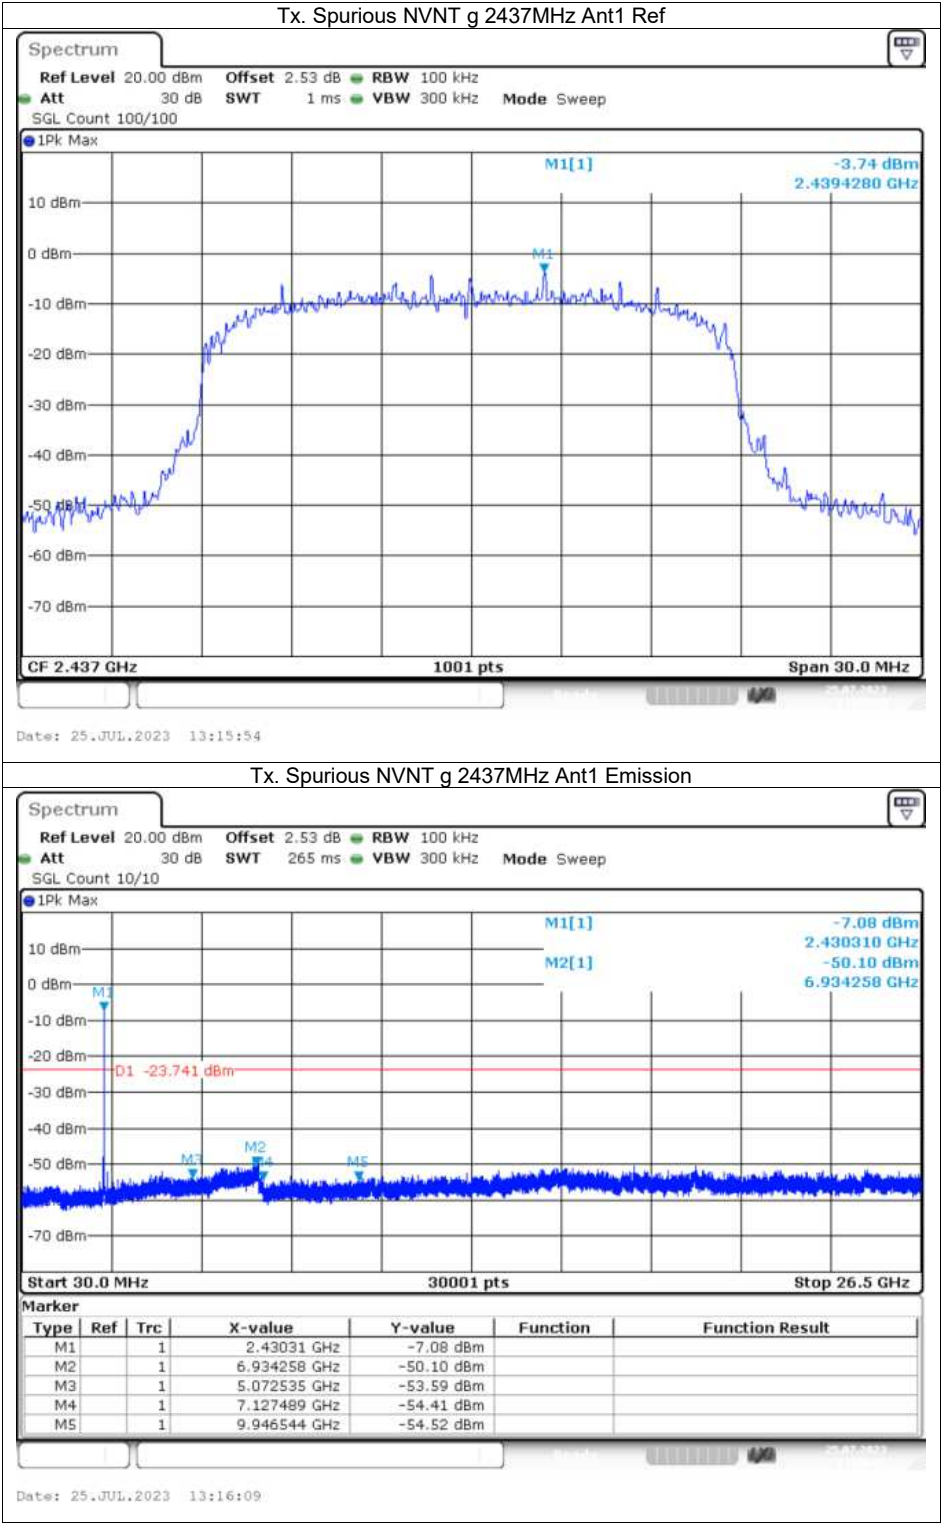


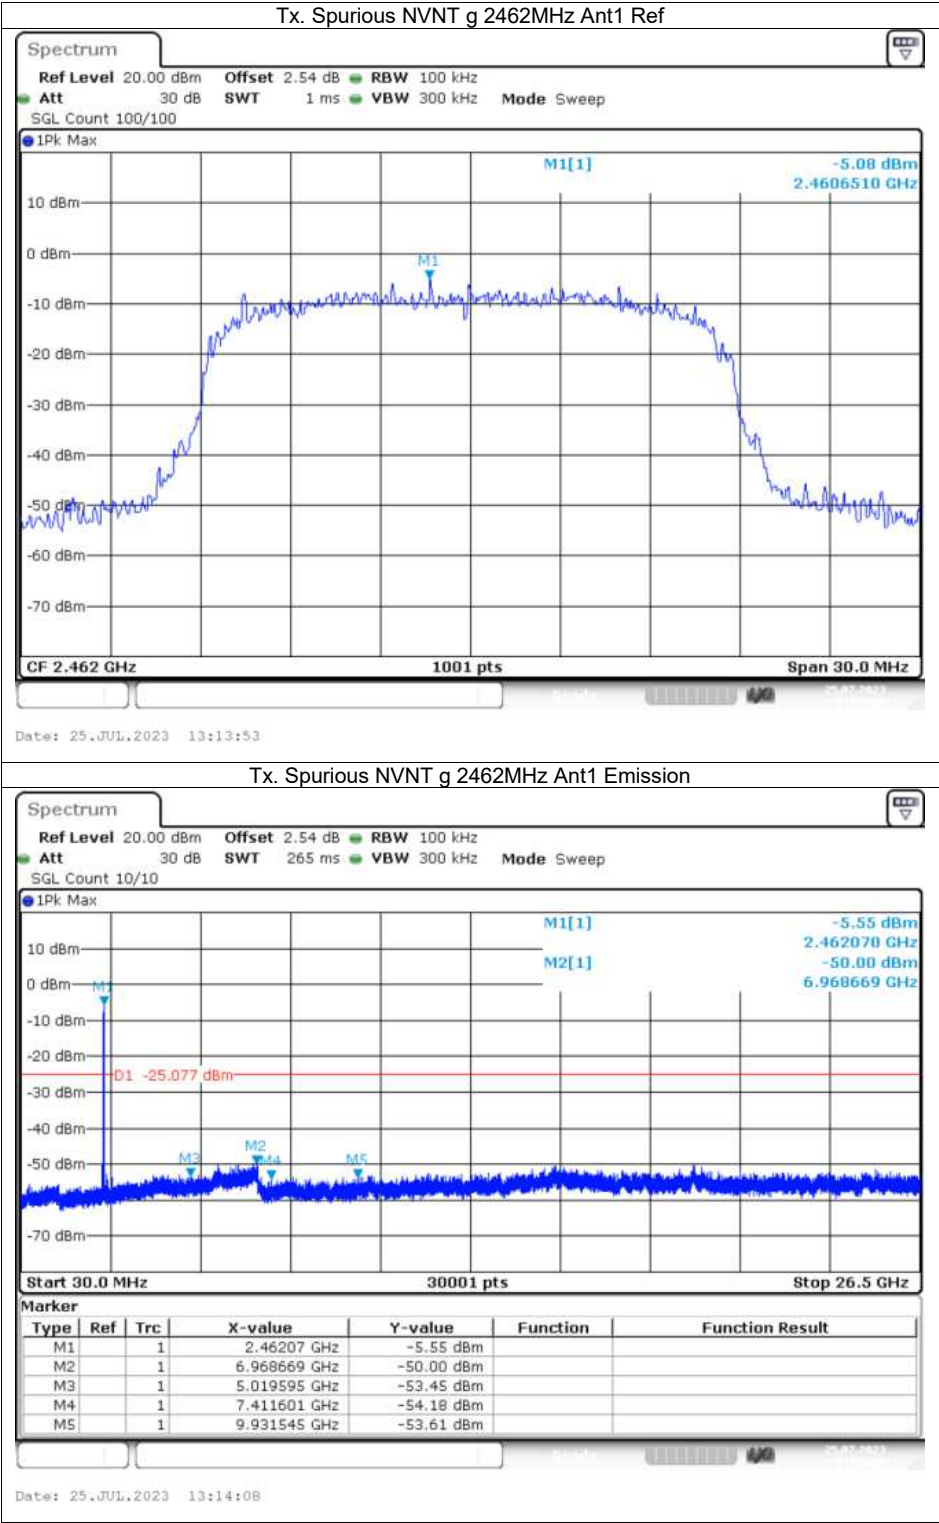


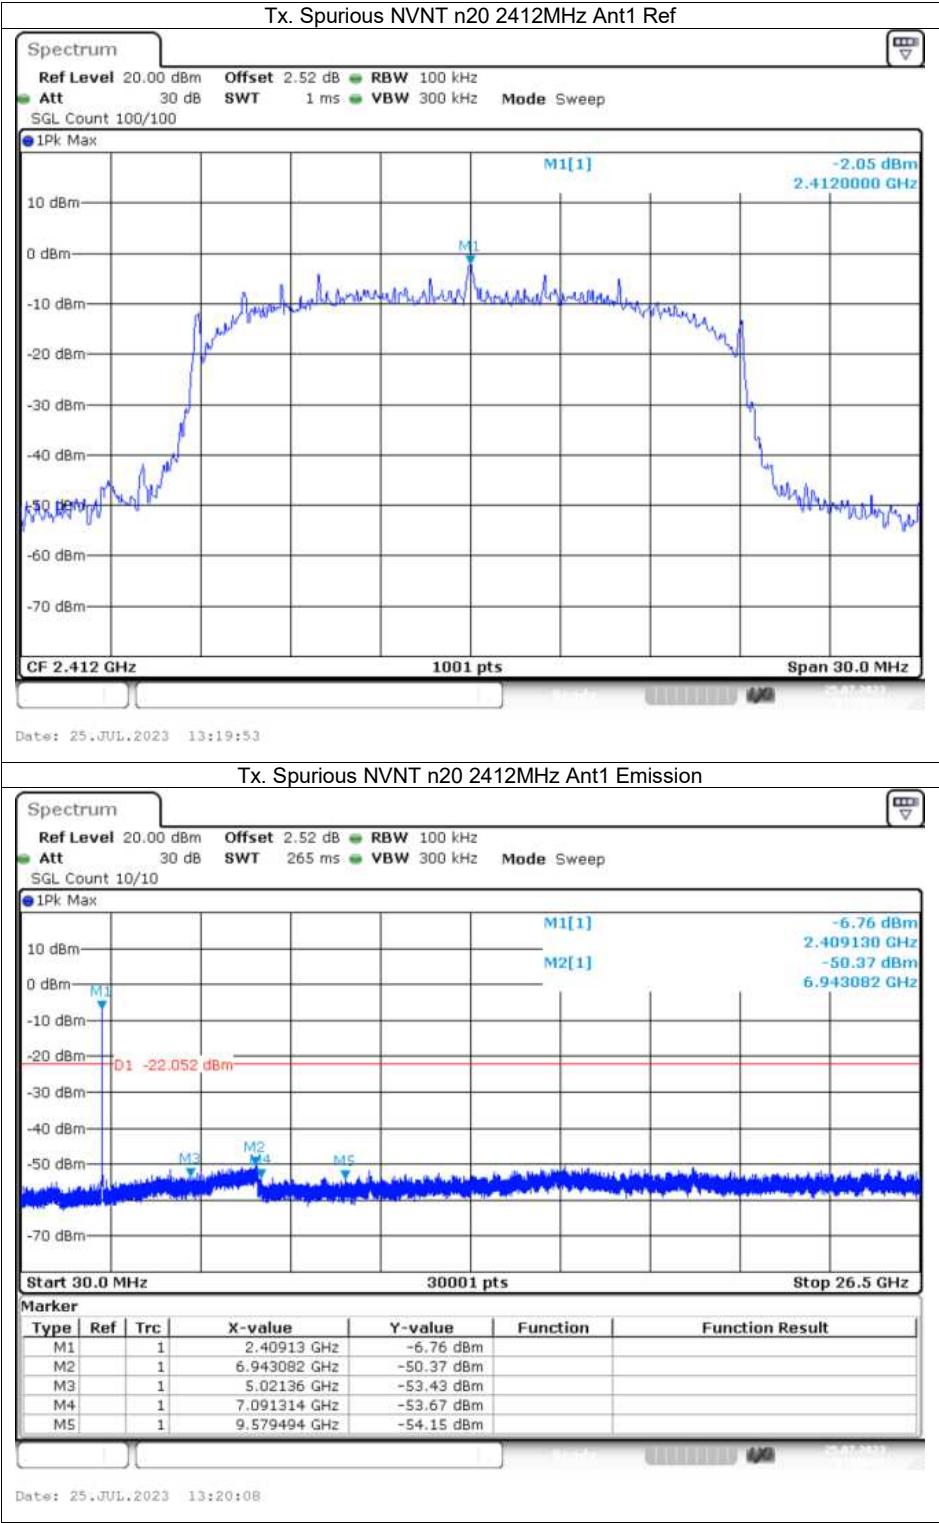


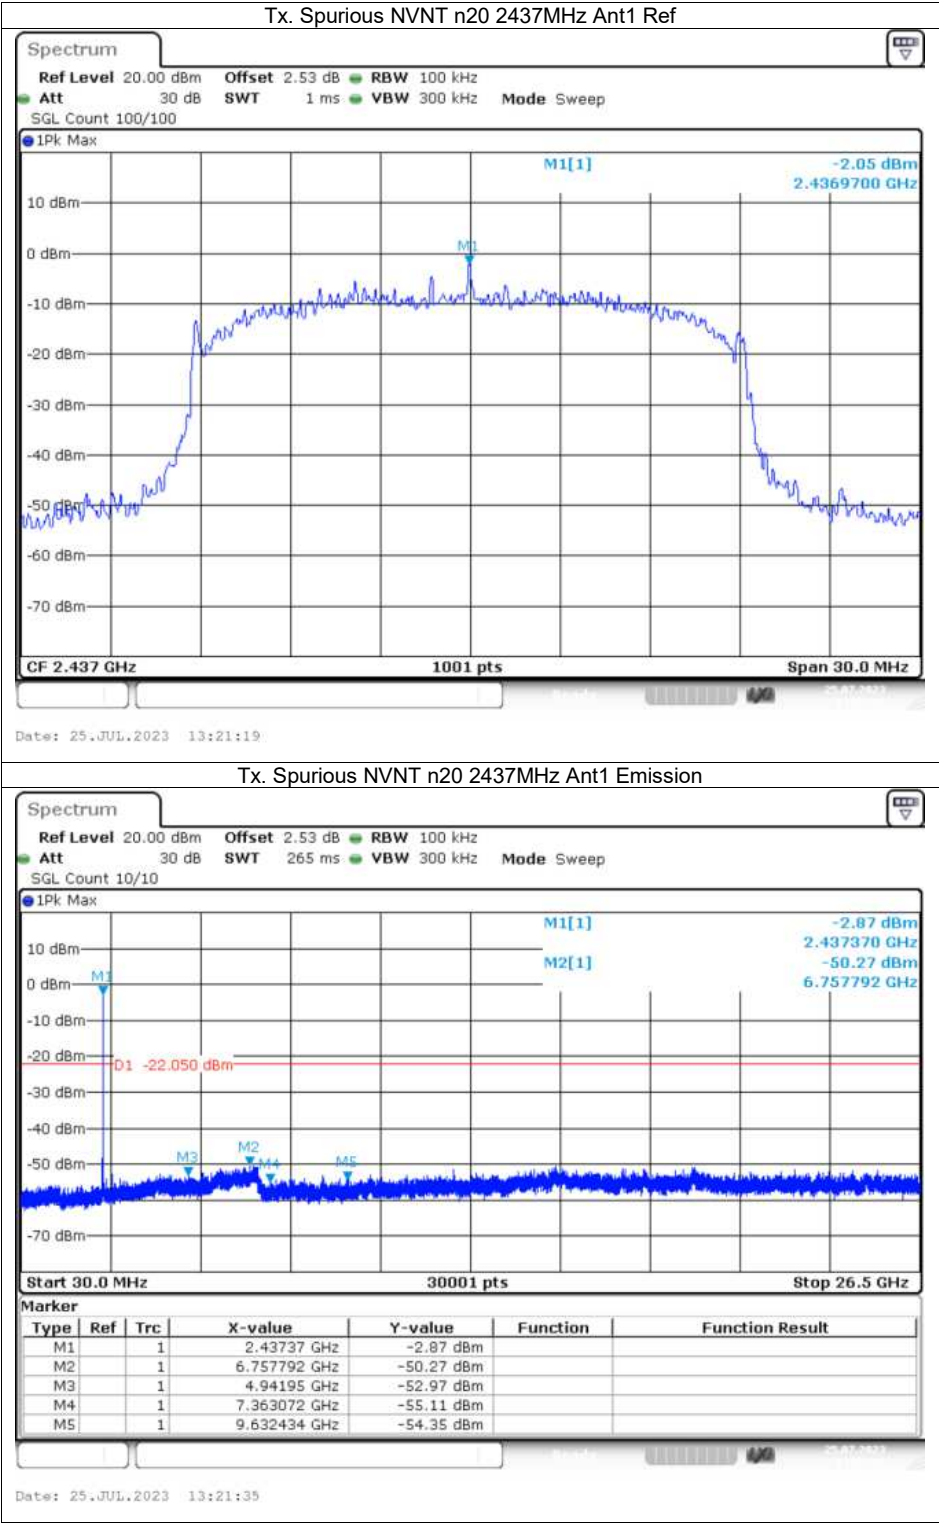

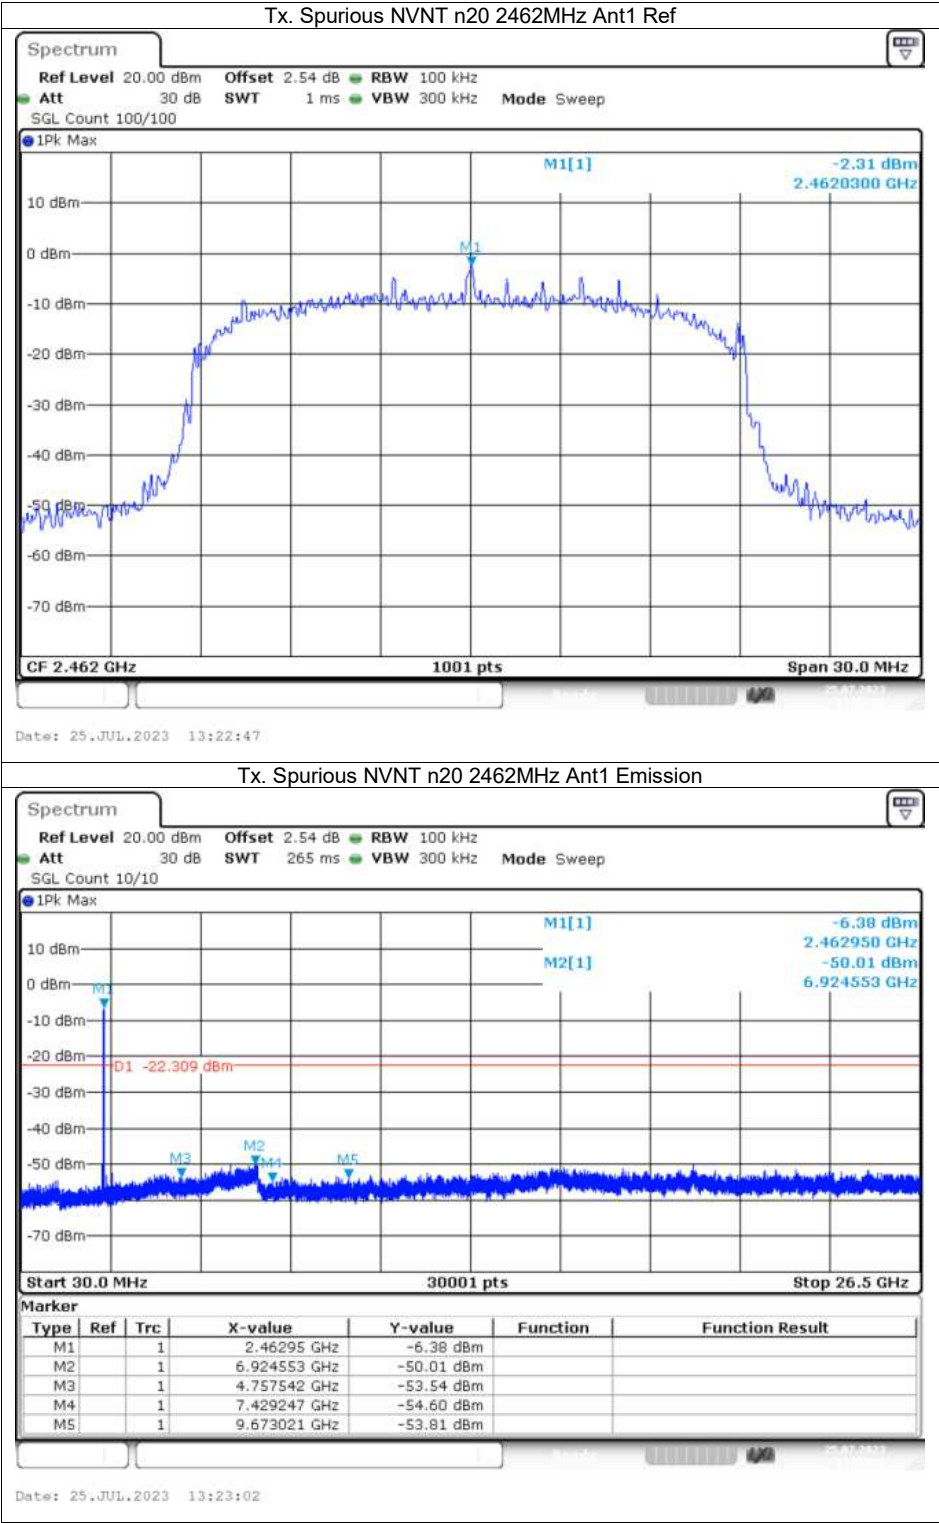

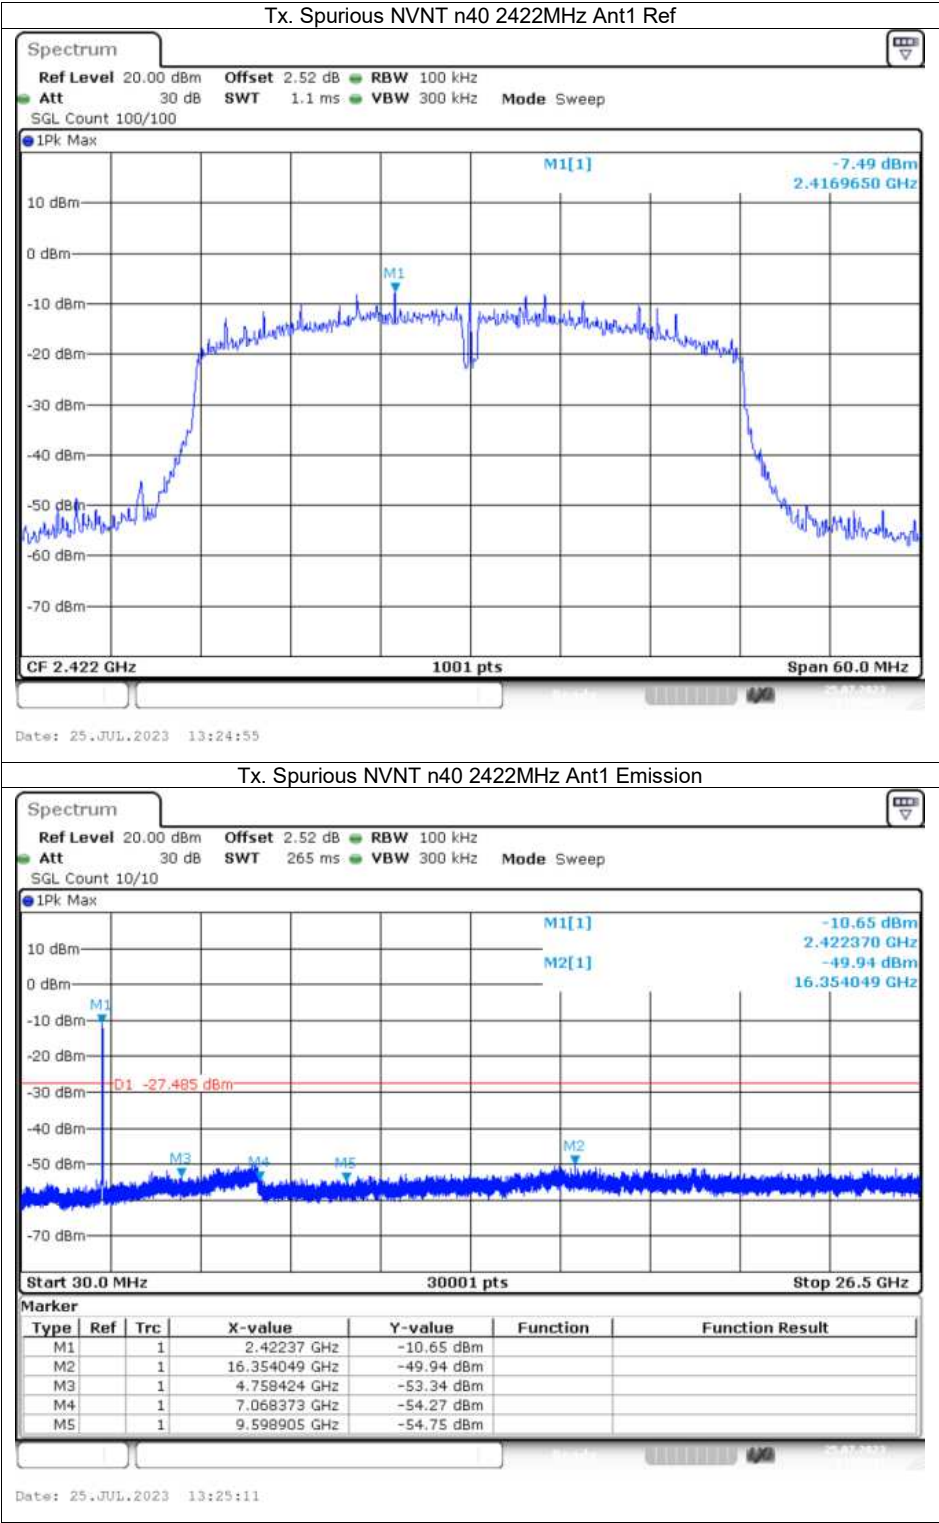


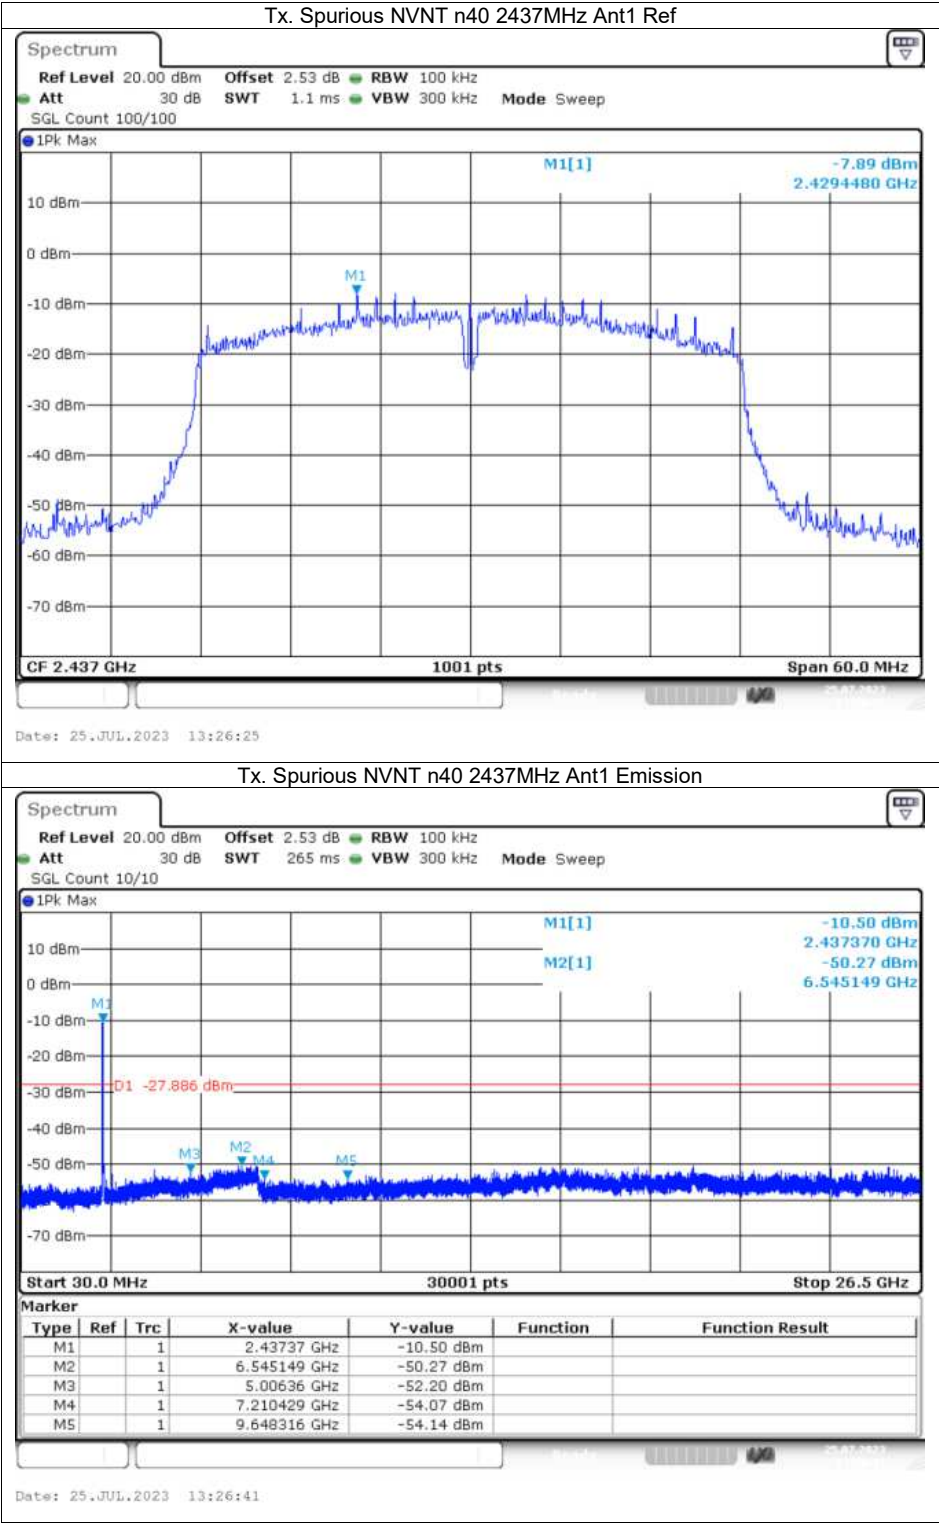


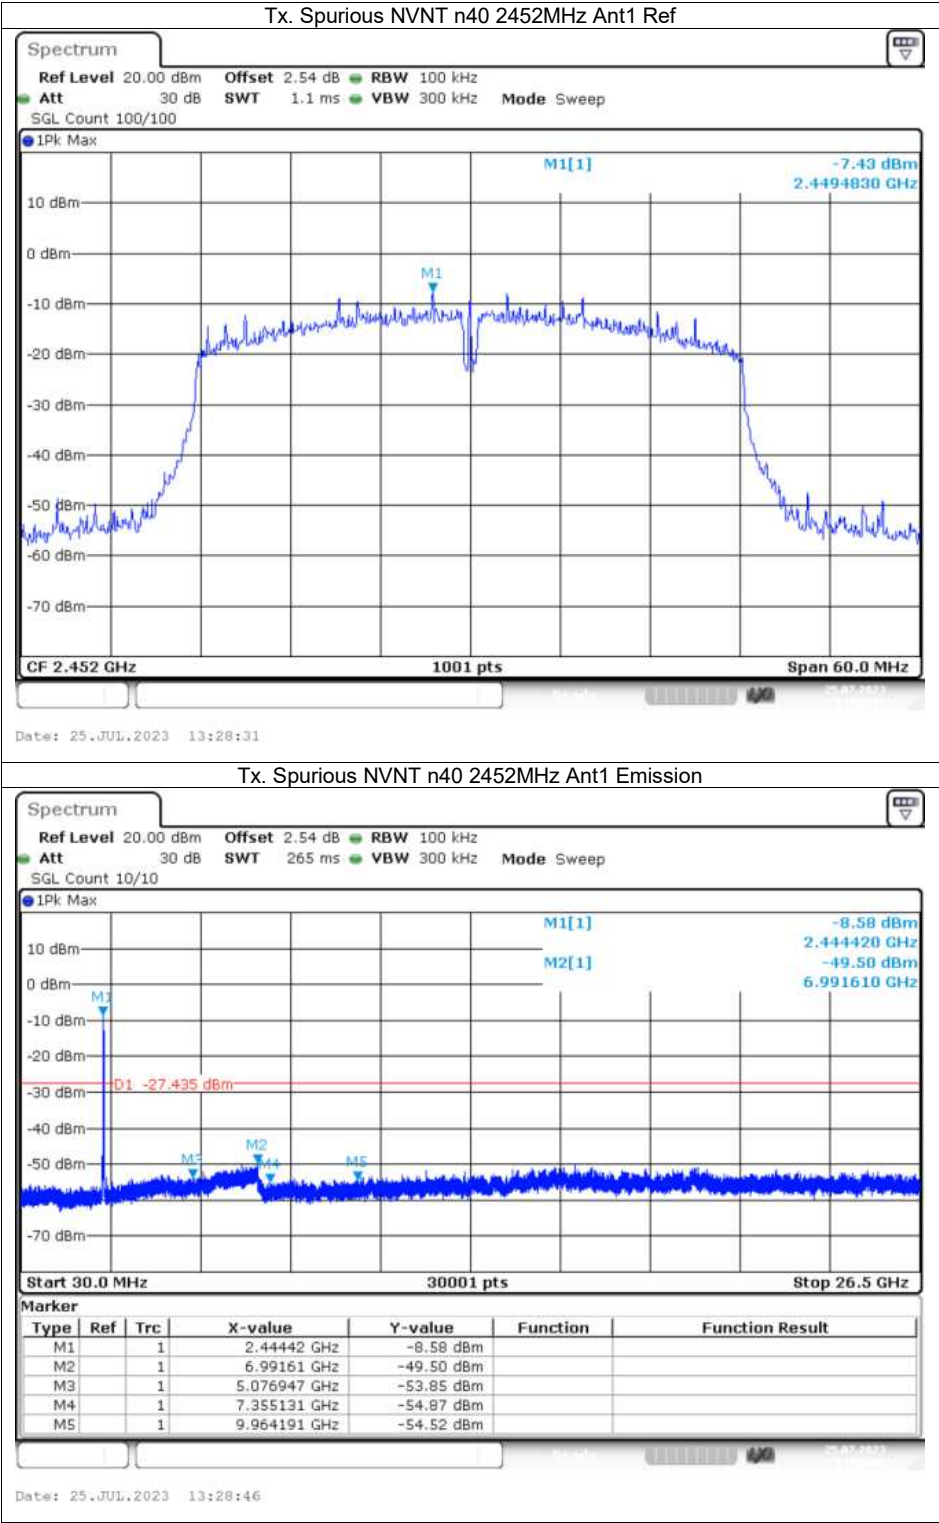



## Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | b    | 2412            | Ant1    | 98.99          | 0                      | 0.12      |
| NVNT      | b    | 2437            | Ant1    | 98.99          | 0                      | 0.12      |
| NVNT      | b    | 2462            | Ant1    | 98.99          | 0                      | 0.12      |
| NVNT      | g    | 2412            | Ant1    | 98.87          | 0                      | 0.72      |
| NVNT      | g    | 2437            | Ant1    | 98.87          | 0                      | 0.72      |
| NVNT      | g    | 2462            | Ant1    | 98.87          | 0                      | 0.72      |
| NVNT      | n20  | 2412            | Ant1    | 98.94          | 0                      | 0.77      |
| NVNT      | n20  | 2437            | Ant1    | 98.94          | 0                      | 0.77      |
| NVNT      | n20  | 2462            | Ant1    | 98.94          | 0                      | 0.77      |
| NVNT      | n40  | 2422            | Ant1    | 99.09          | 0                      | 1.53      |
| NVNT      | n40  | 2437            | Ant1    | 98.78          | 0                      | 1.54      |
| NVNT      | n40  | 2452            | Ant1    | 99.09          | 0                      | 1.53      |

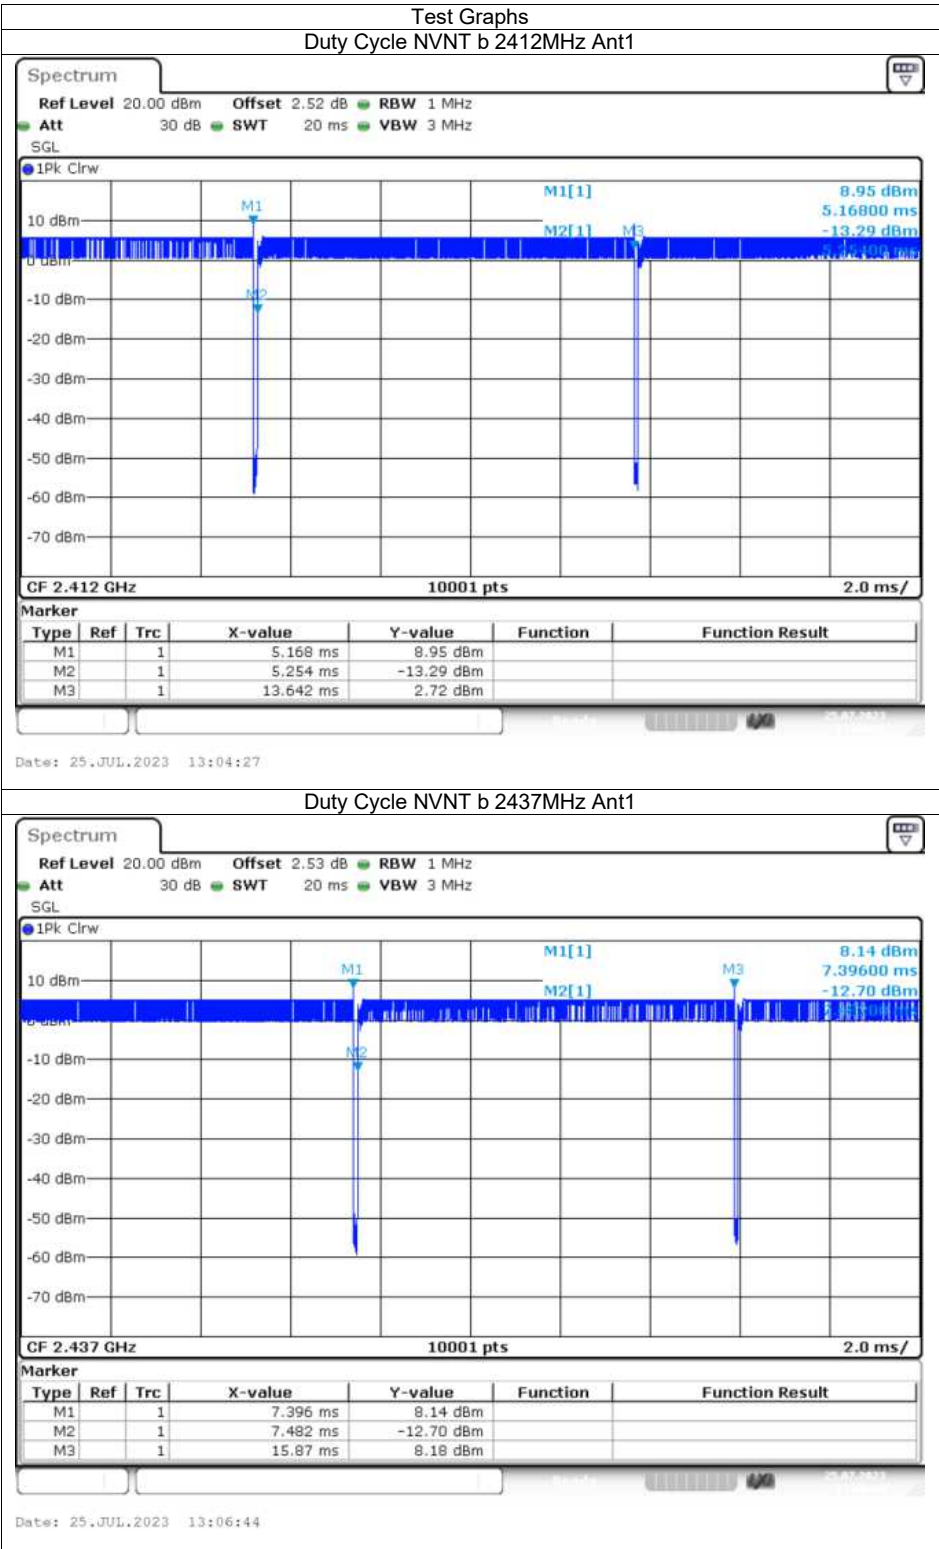


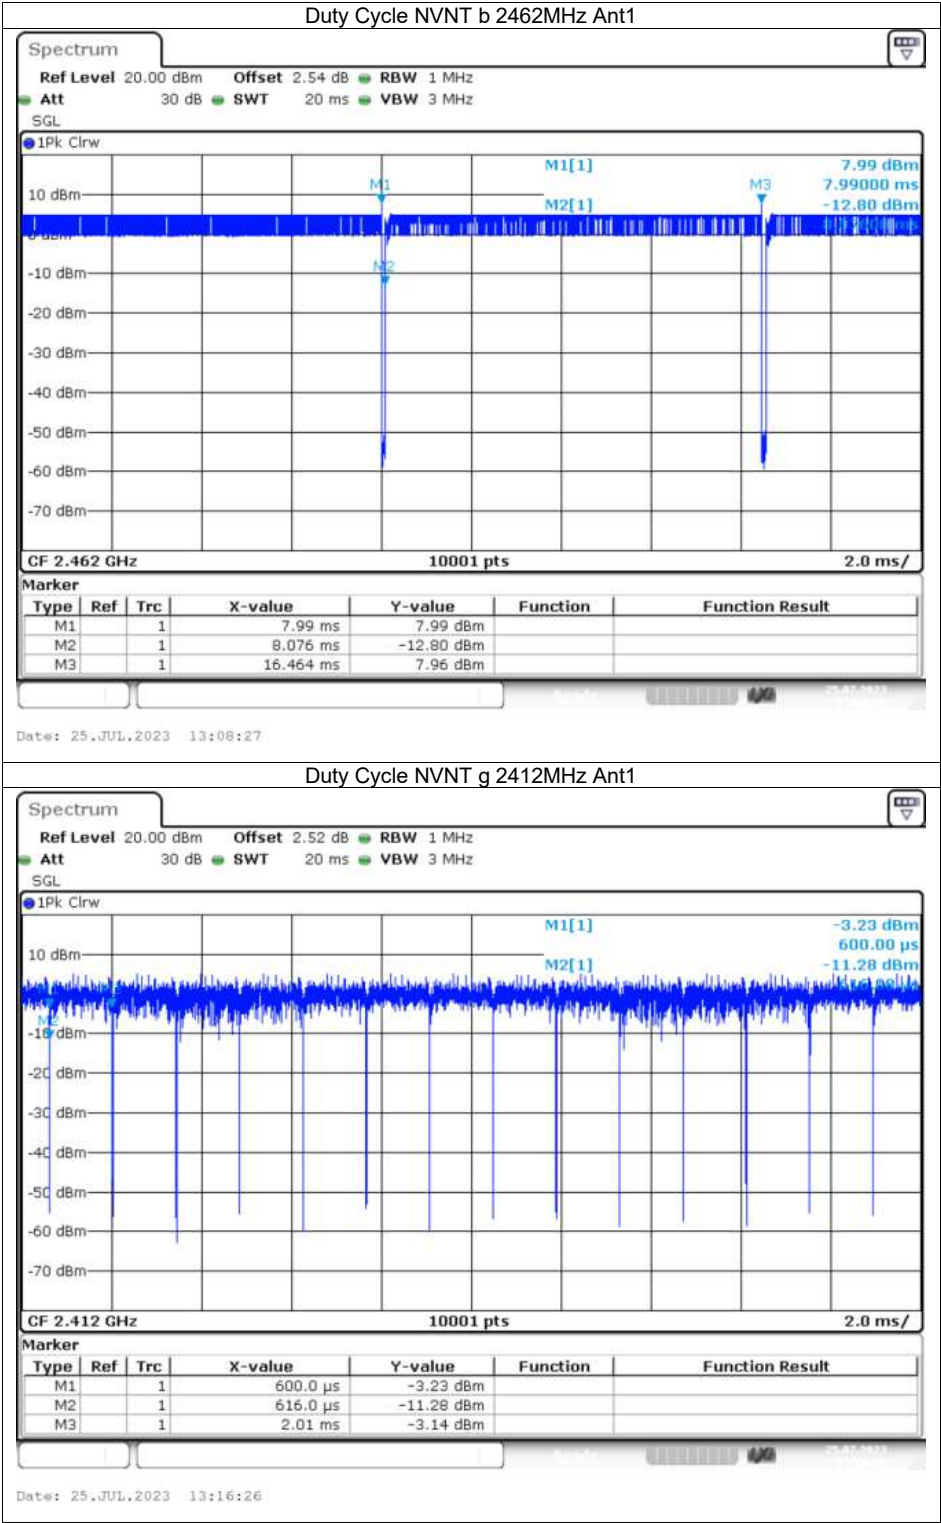

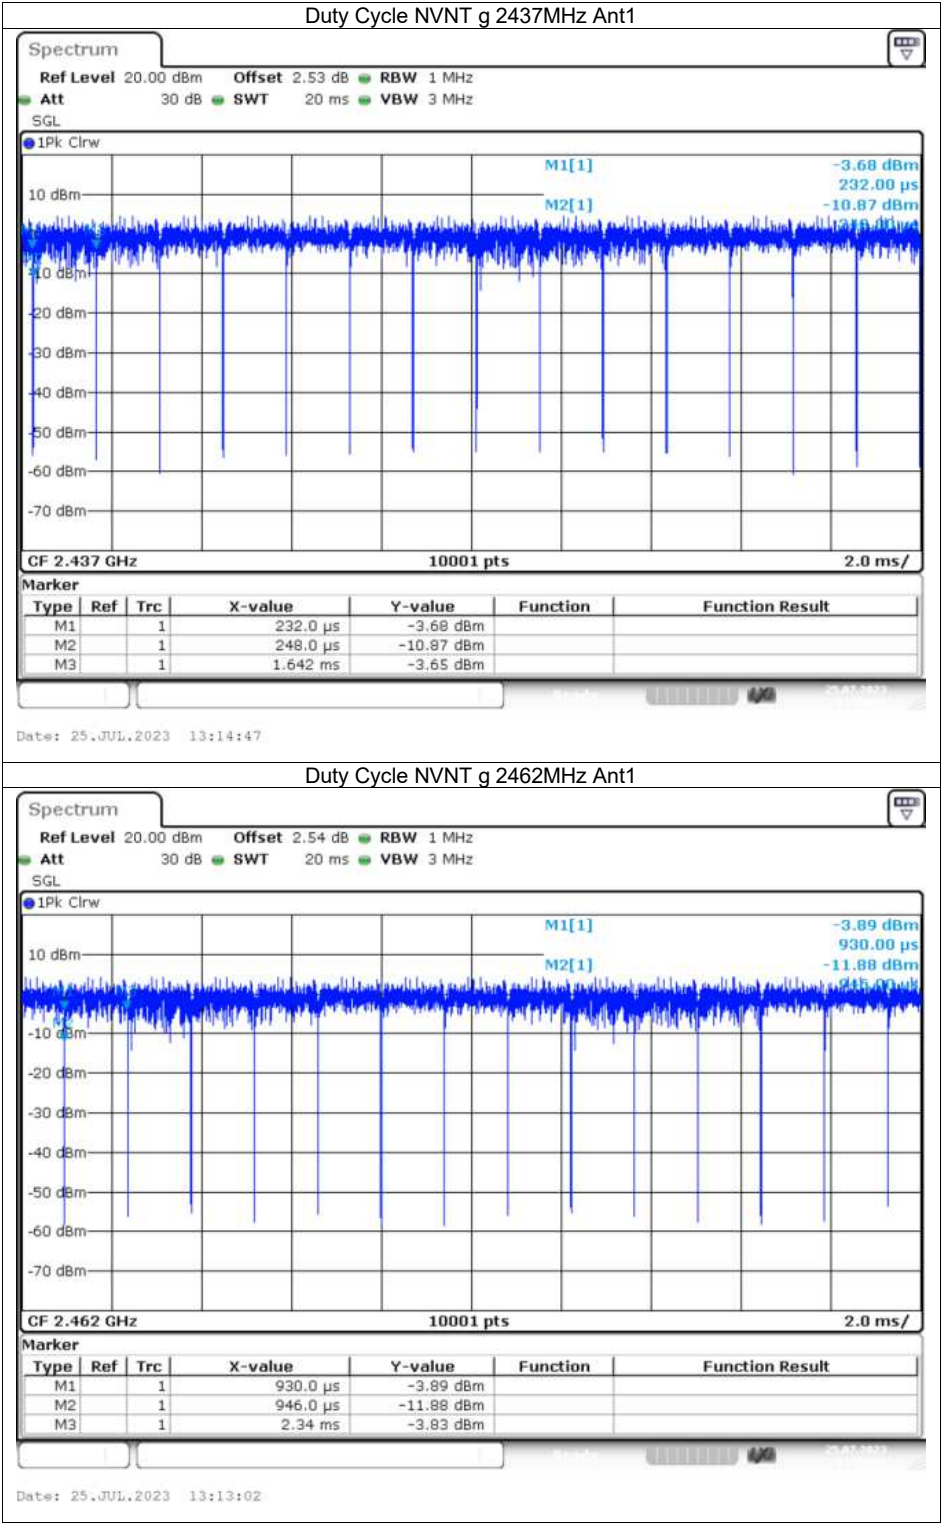

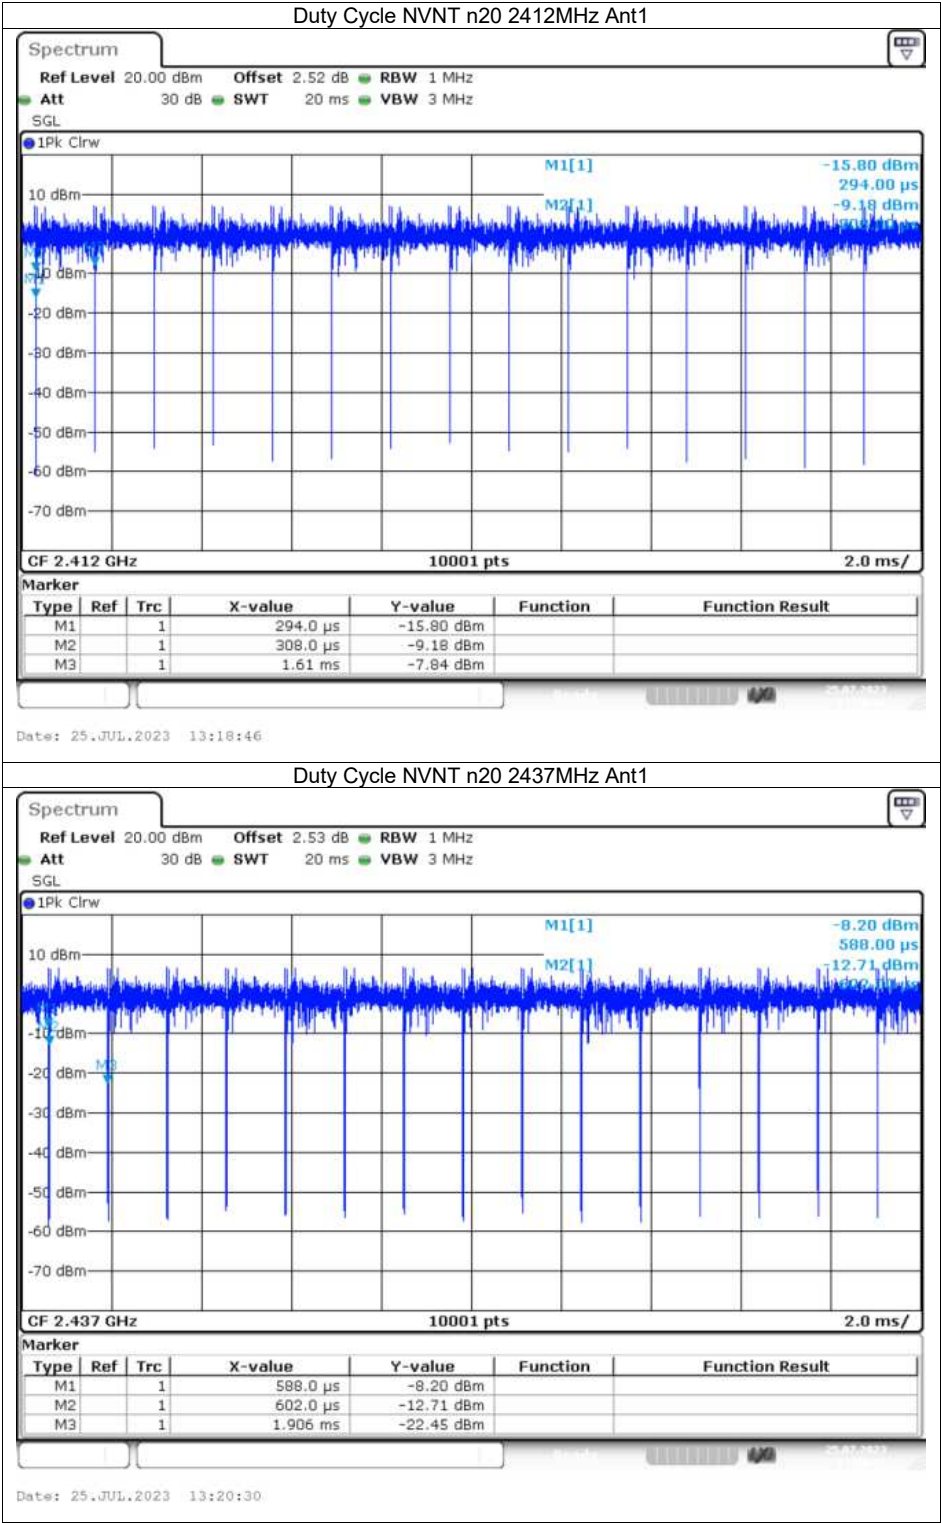

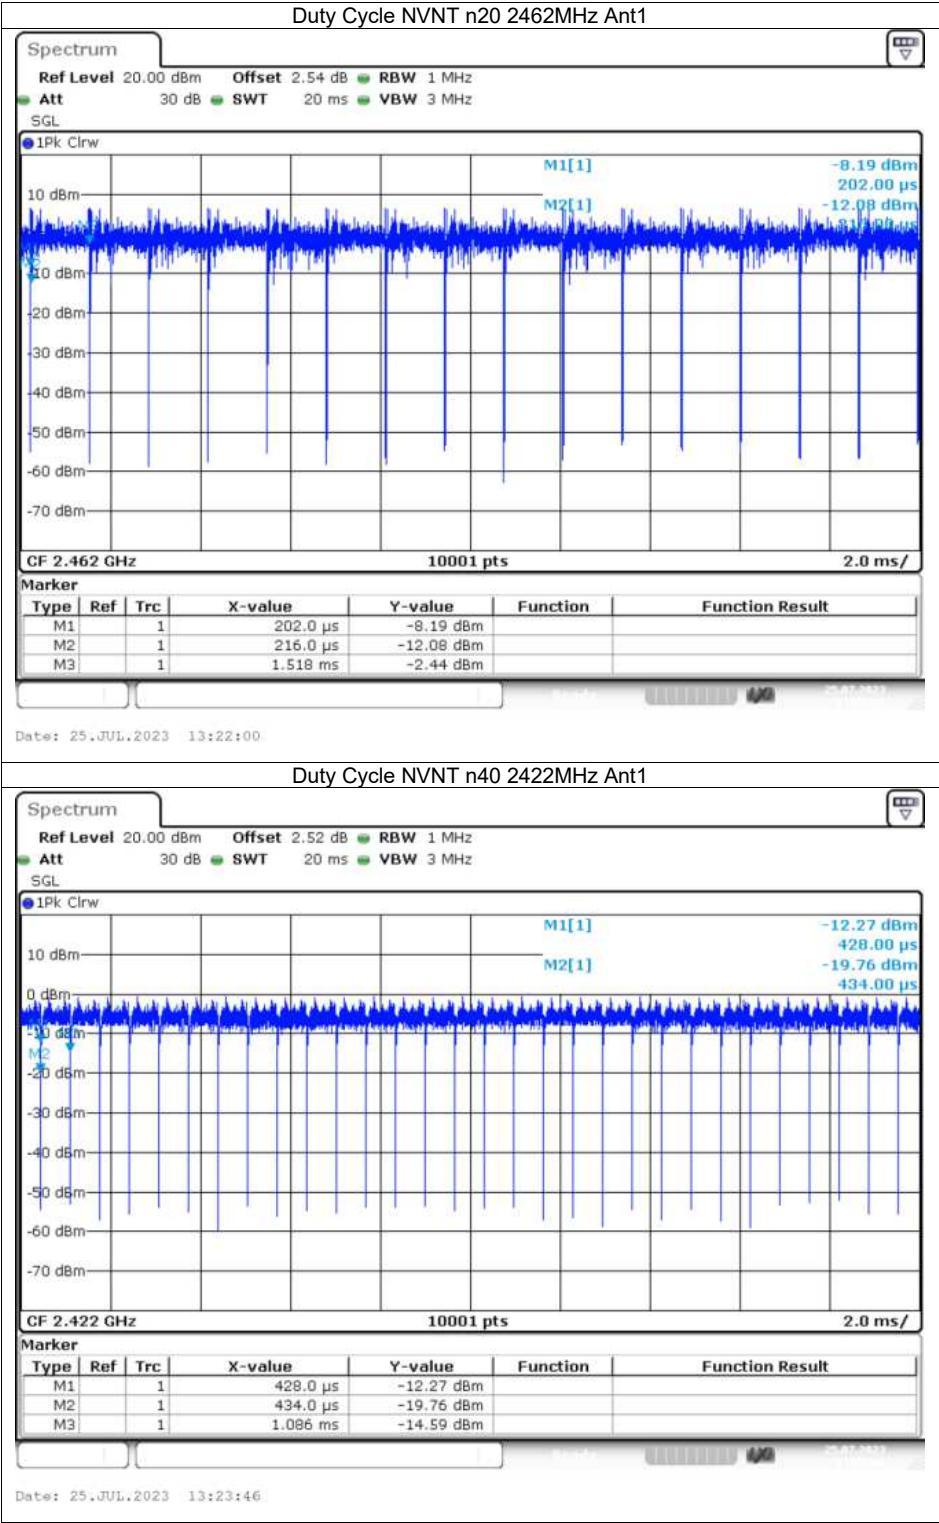

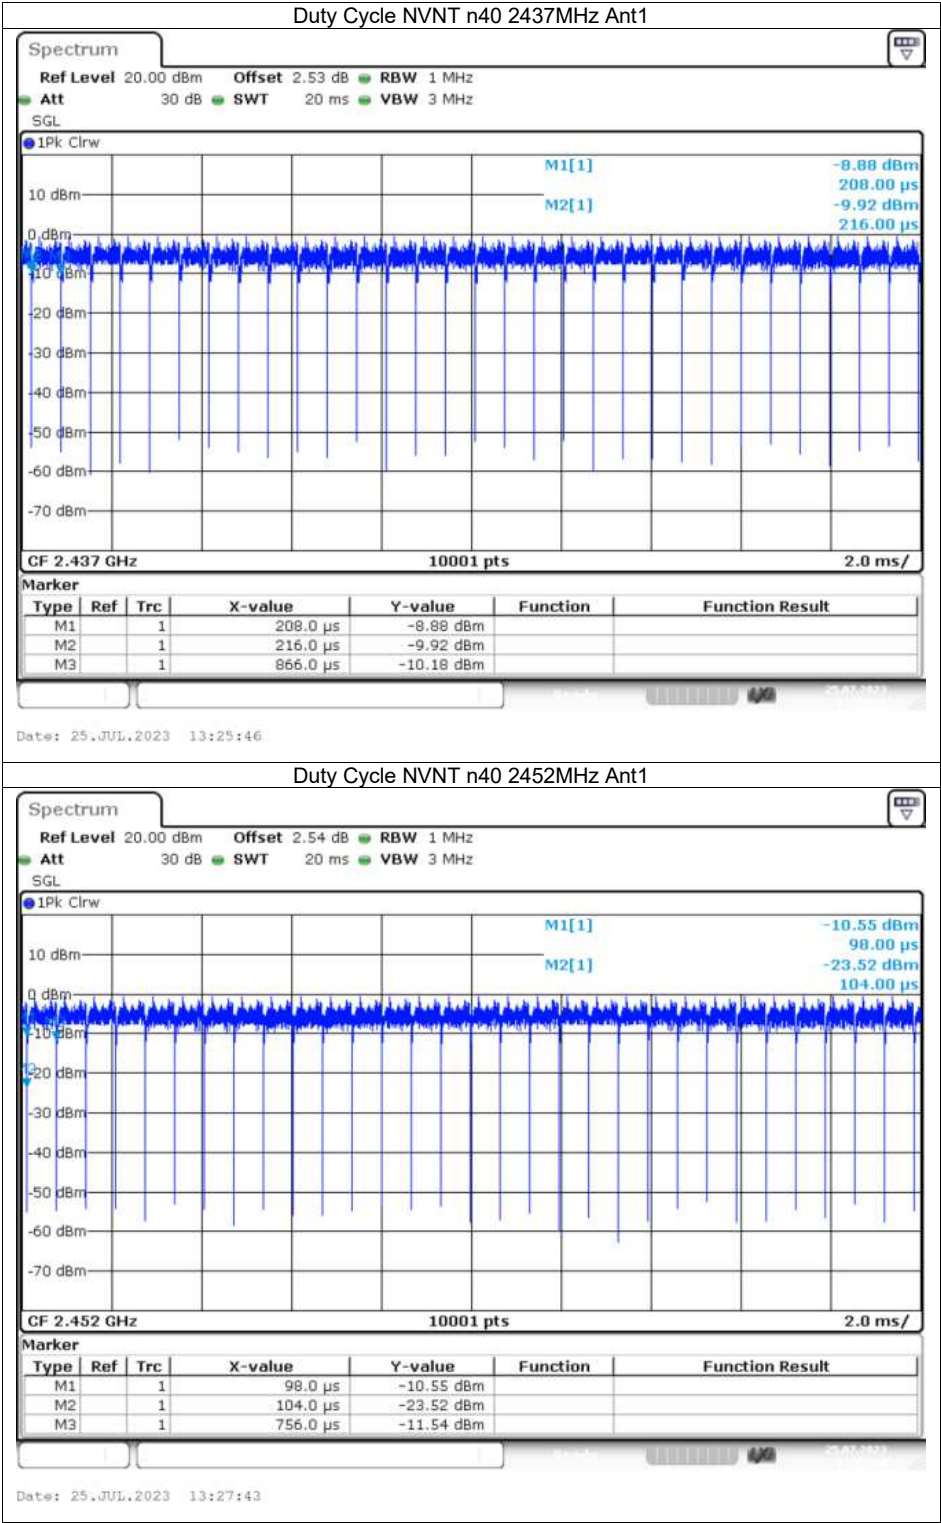

## APPENDIX: PHOTOGRAPHS OF TEST CONFIGURATION

Radiated emissions below 1GHz



Radiated emissions above 1GHz



**Conducted emissions**



## APPENDIX: PHOTOGRAPHS OF THE EUT

### External photos













**Internal photos**








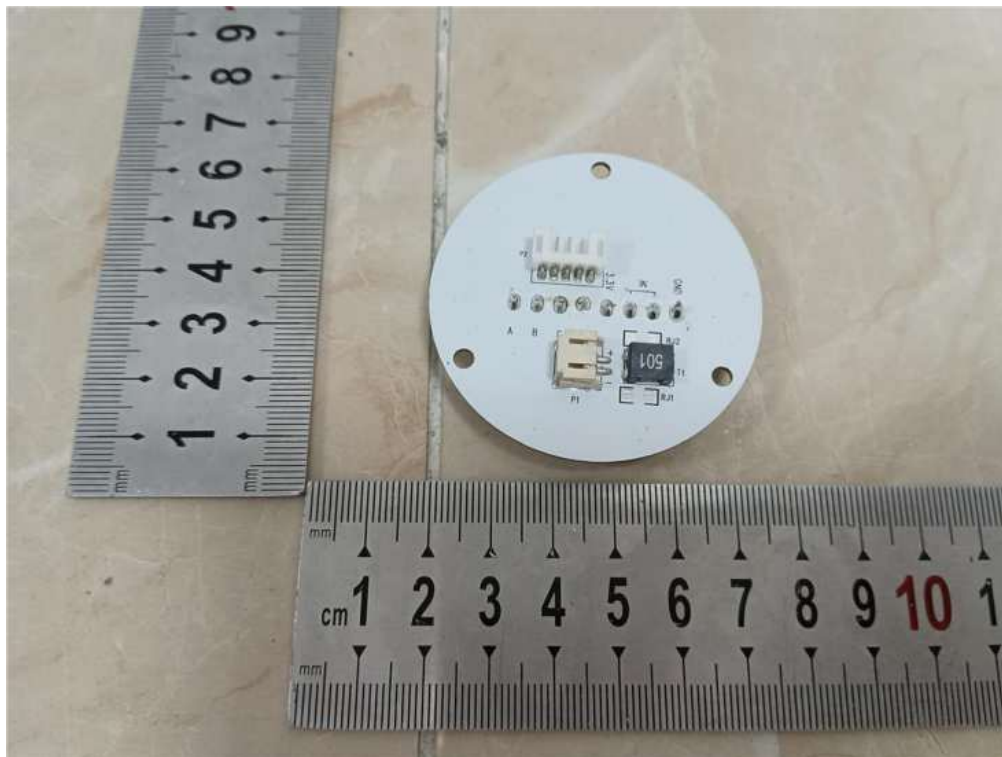
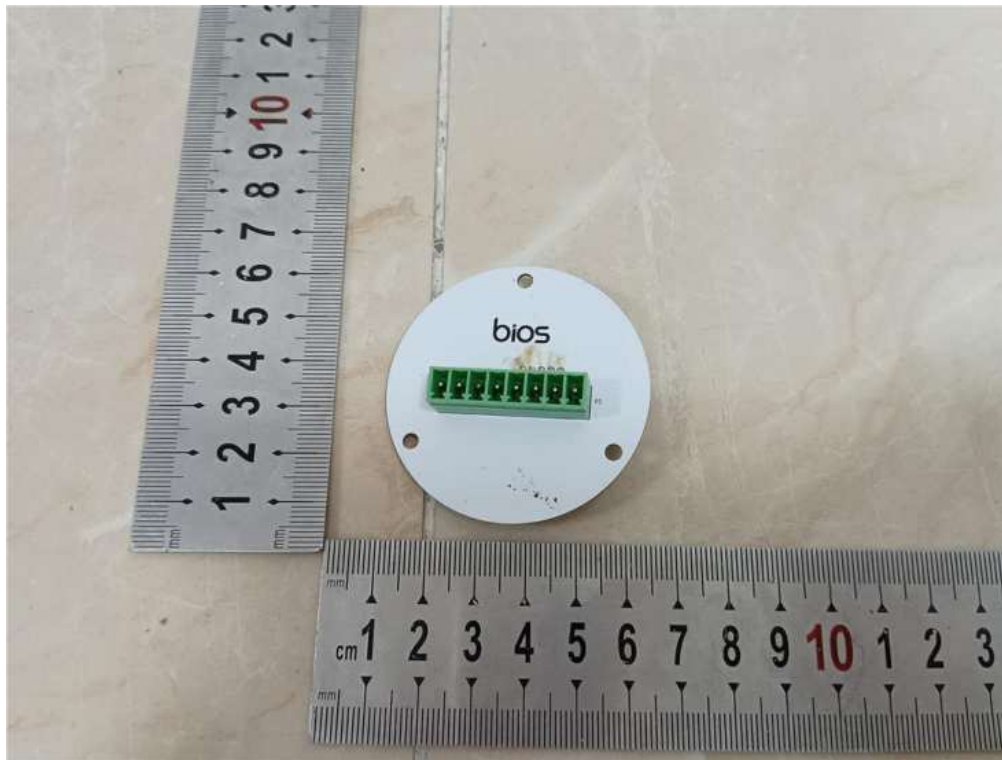


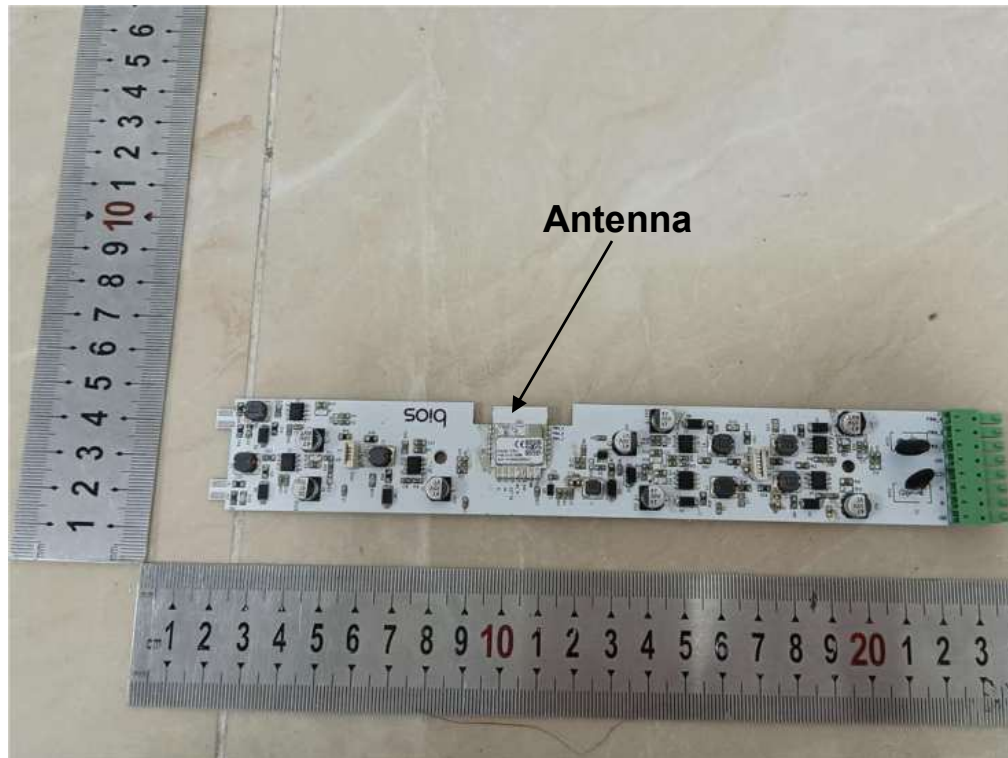

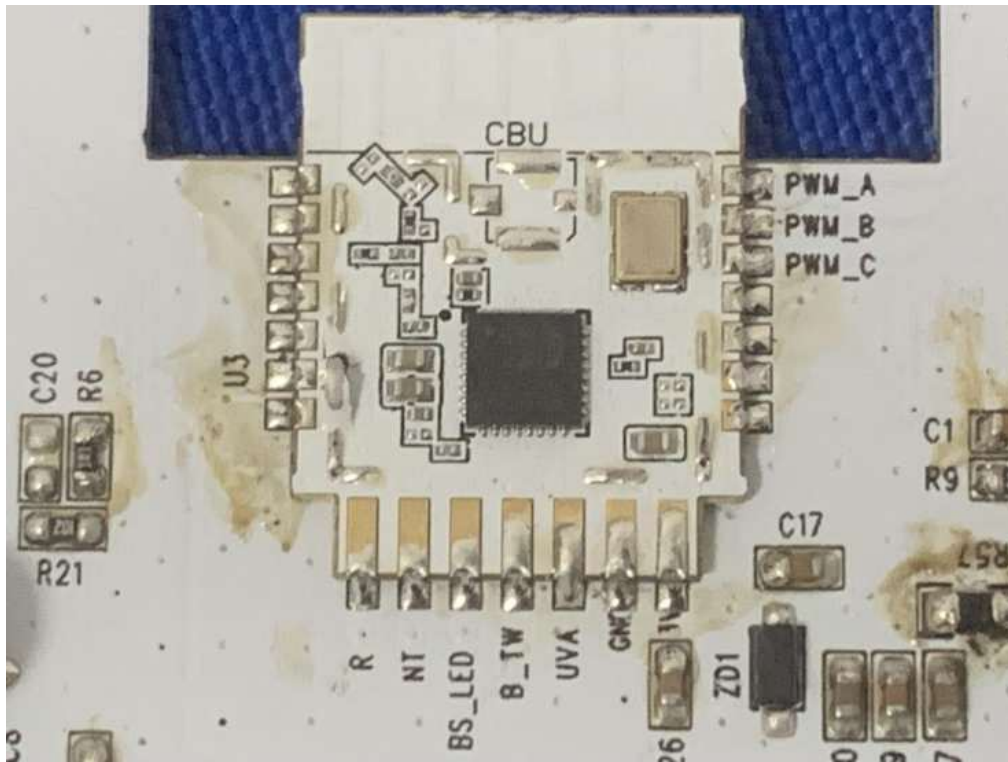

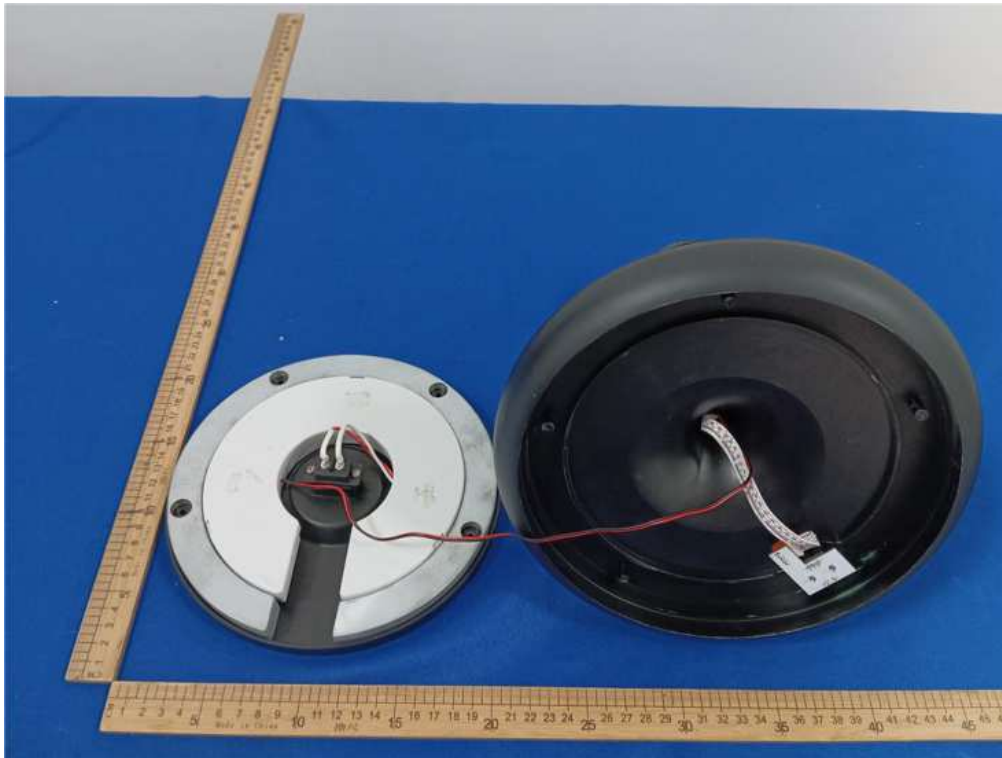

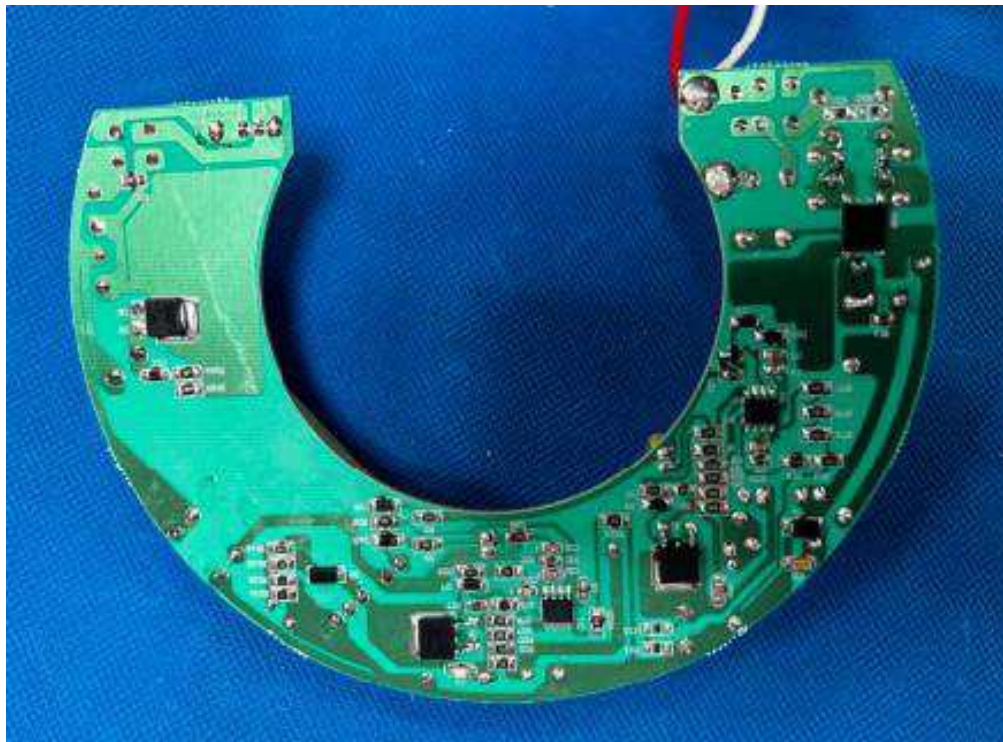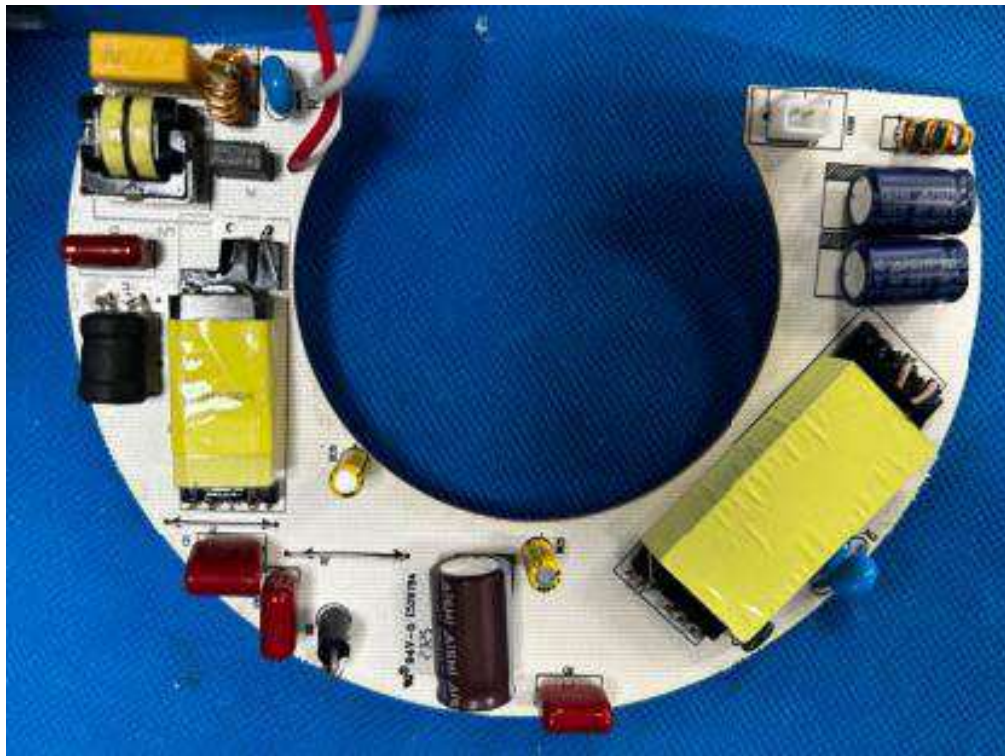

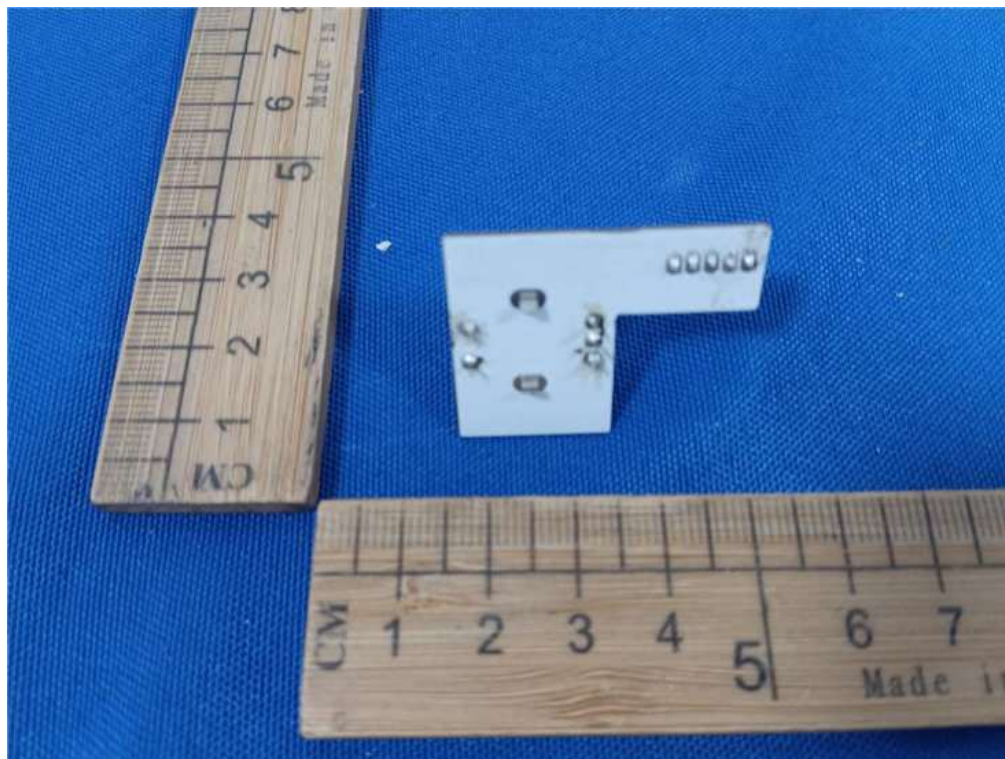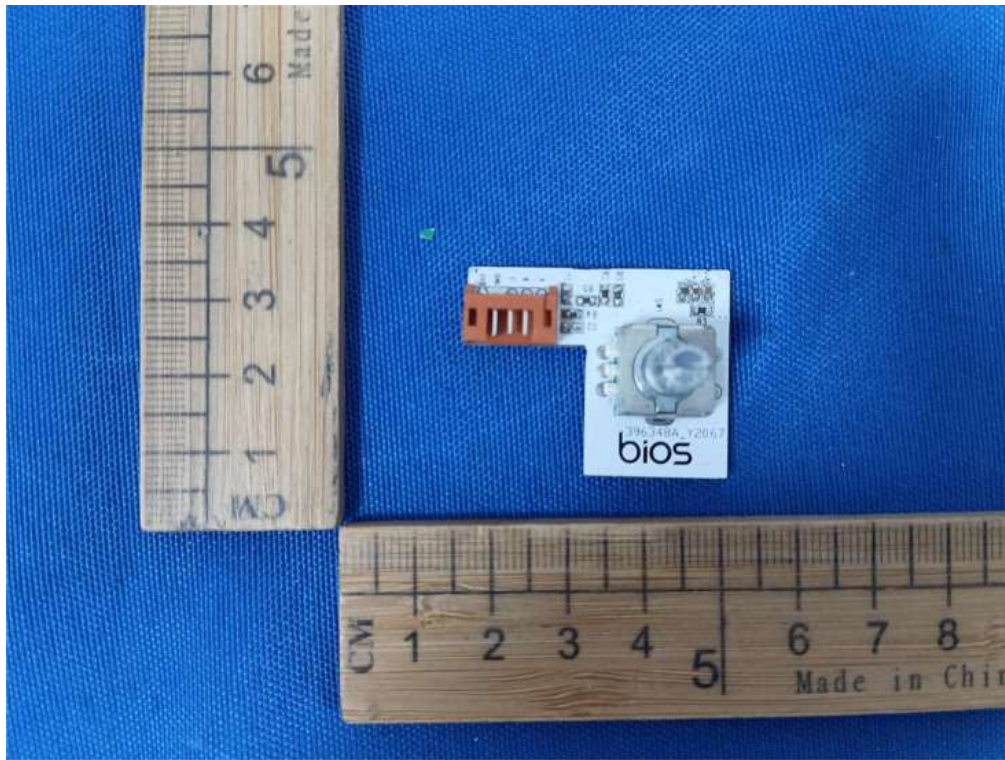

--- End of Report ---