

#01_GSM850_GPRS (4 Tx slots)_Bottom Face_0cm_Ch128

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: MSL_850_141128 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 52.71$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3296; ConvF(6.23, 6.23, 6.23); Calibrated: 2014/4/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2013/12/17
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1127
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch128/Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.45 W/kg


Configuration/Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 40.927 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.641 W/kg

Maximum value of SAR (measured) = 1.52 W/kg

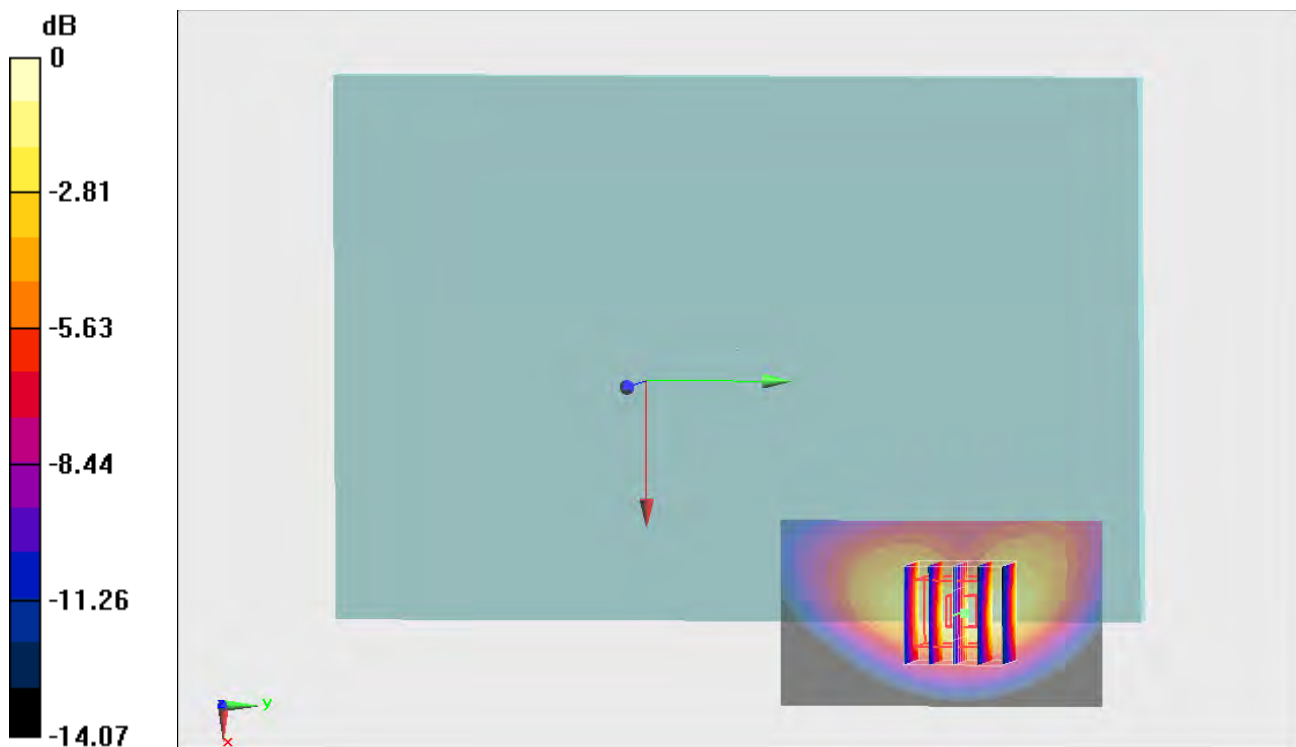

#02_GSM1900_GPRS (4 Tx slots)_Curved surface of Edge1_0cm_Ch810

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: MSL_1900_141126 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 52.78$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3296; ConvF(4.91, 4.91, 4.91); Calibrated: 2014/4/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2013/12/17
- Phantom: ELI_Left; Type: QDOVA002AA; Serial: TP:1131
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch810/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.48 W/kg


Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.140 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.566 W/kg

Maximum value of SAR (measured) = 1.52 W/kg

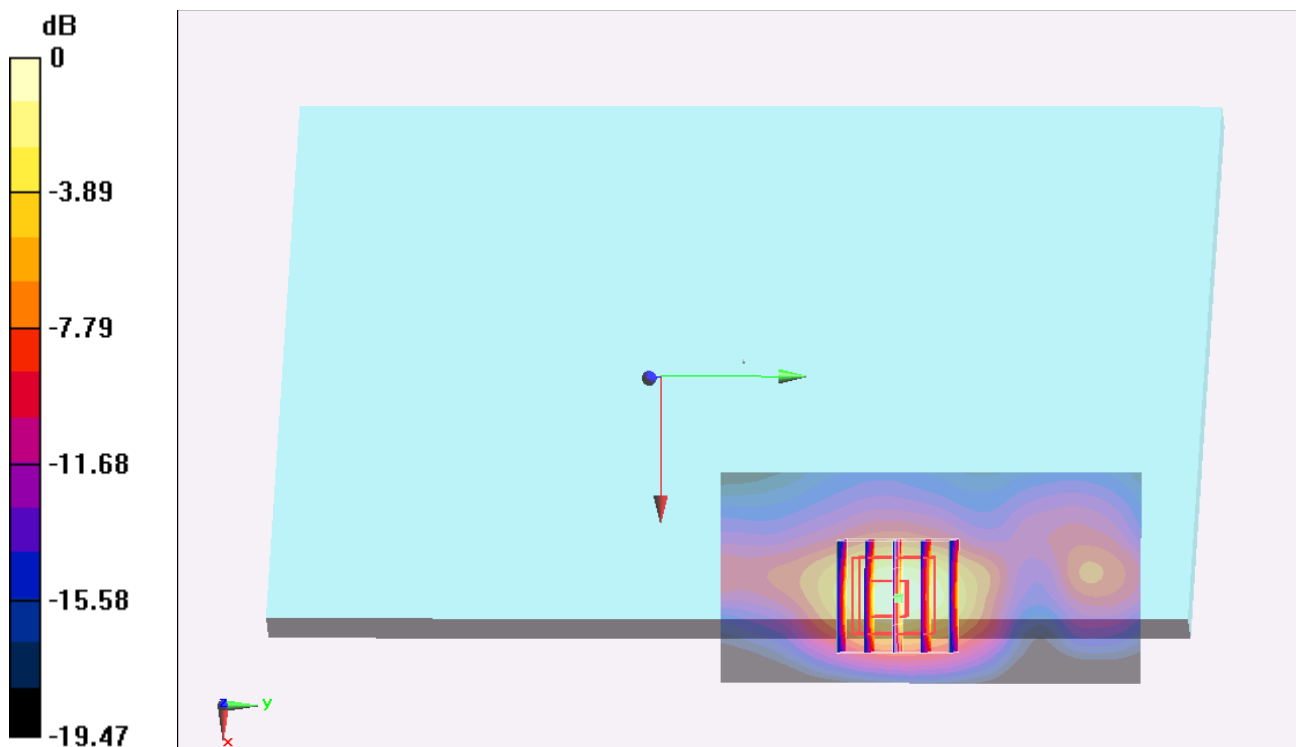

#03_WCDMA V_RMC 12.2Kbps_Bottom Face_0cm_Ch4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_141128 Medium parameters used : $f = 826.4$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 52.691$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3296; ConvF(6.23, 6.23, 6.23); Calibrated: 2014/4/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2013/12/17
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1127
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch4132/Area Scan (41x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.58 W/kg


Configuration/Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 42.062 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.663 W/kg

Maximum value of SAR (measured) = 1.57 W/kg

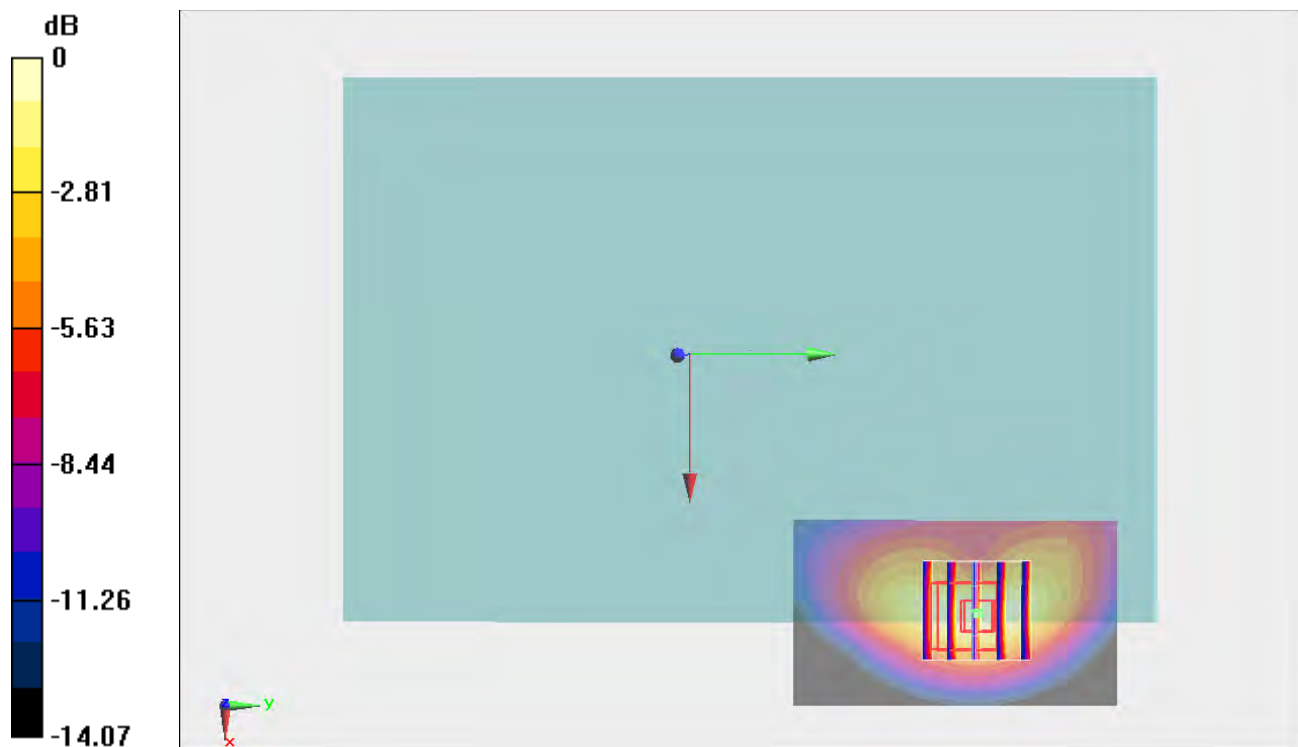

0 dB = 1.57 W/kg = 1.96 dBW/kg

#04_WCDMA IV_RMC 12.2Kbps_Bottom Face_0cm_Ch1513

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: MSL_1750_141127 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 51.209$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3296; ConvF(5.29, 5.29, 5.29); Calibrated: 2014/4/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2013/12/17
- Phantom: ELI_Left; Type: QDOVA002AA; Serial: TP:1131
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch1513/Area Scan (41x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.45 W/kg


Configuration/Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.810 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.607 W/kg

Maximum value of SAR (measured) = 1.64 W/kg

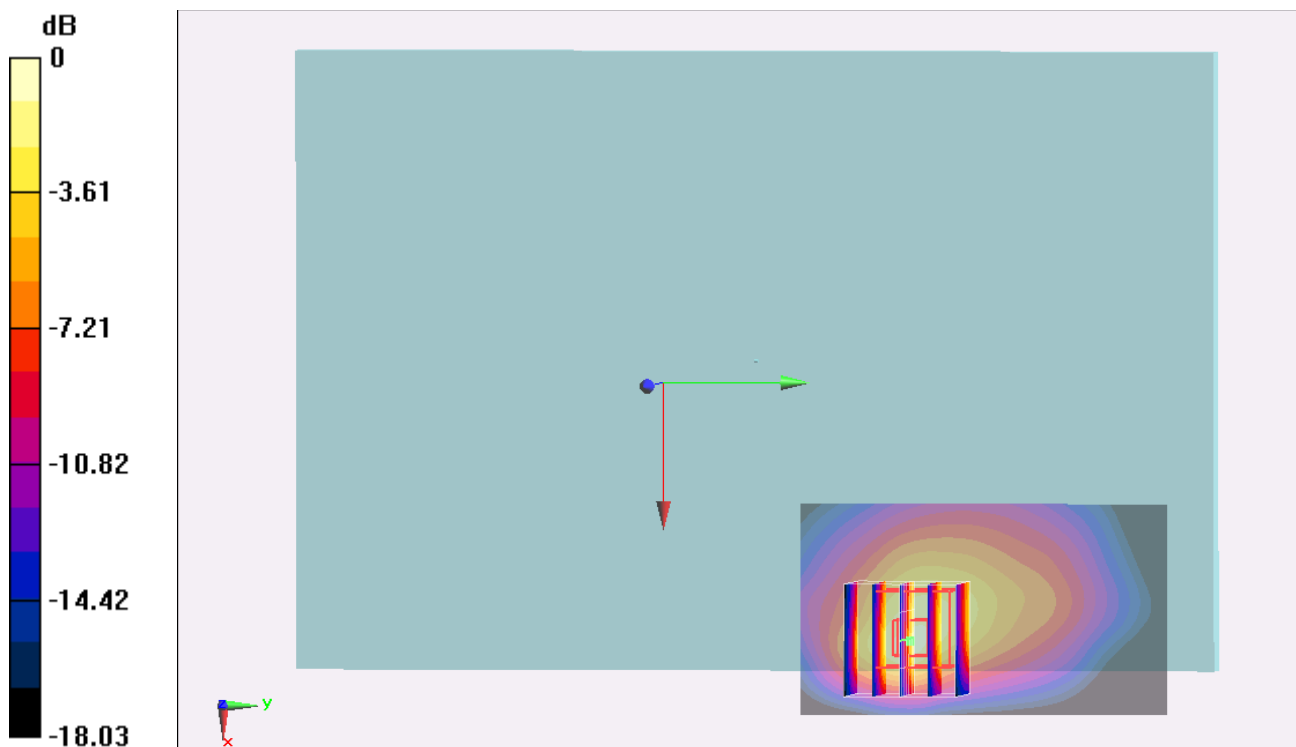

0 dB = 1.64 W/kg = 2.15 dBW/kg

#05_WCDMA II_RMC 12.2Kbps_Edge 1_0cm_Ch9400

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_141126 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 52.886$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3296; ConvF(4.91, 4.91, 4.91); Calibrated: 2014/4/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2013/12/17
- Phantom: ELI_Left; Type: QDOVA002AA; Serial: TP:1131
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch9400/Area Scan (41x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.66 W/kg


Configuration/Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 34.447 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 1.3 W/kg; SAR(10 g) = 0.645 W/kg

Maximum value of SAR (measured) = 1.67 W/kg

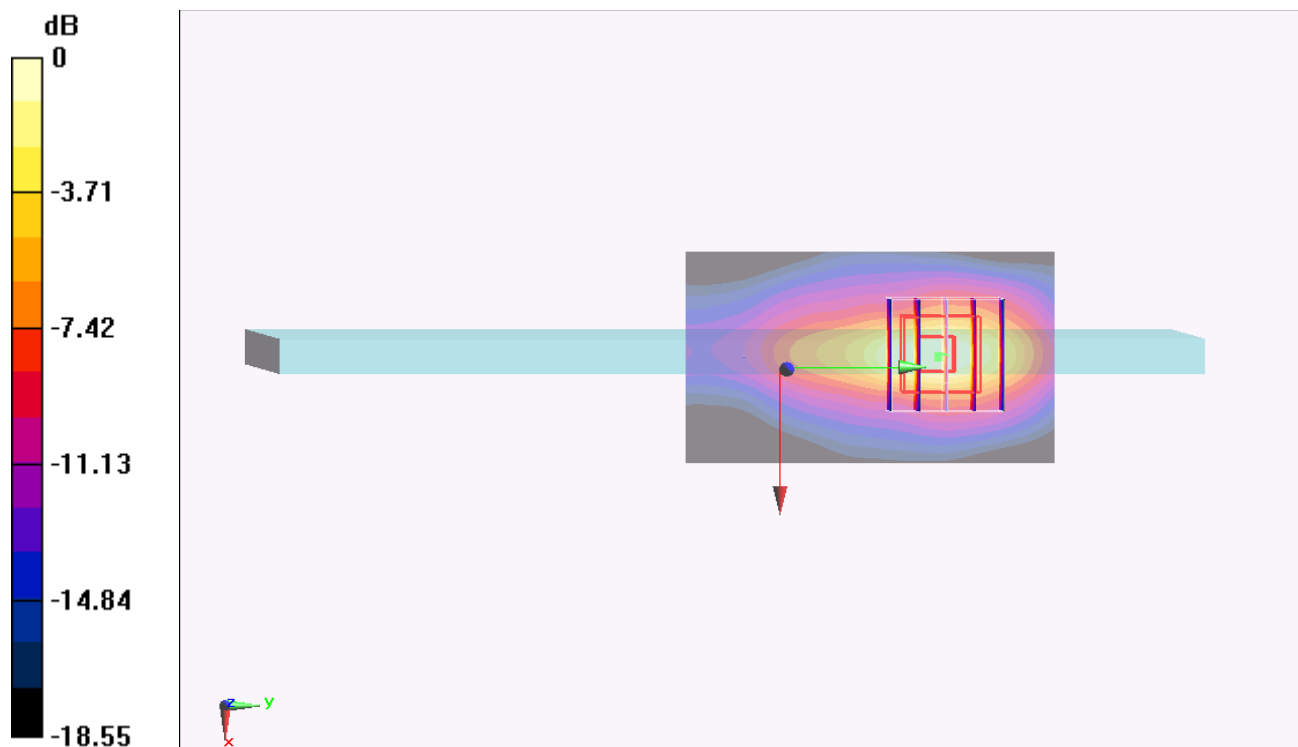

#06_LTE Band 17_10M_QPSK_1RB_0Offset_Bottom Face_0cm_Ch23790

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: MSL_750_141128 Medium parameters used: $f = 710$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 54.844$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3296; ConvF(6.46, 6.46, 6.46); Calibrated: 2014/4/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2013/12/17
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1127
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch23790/Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.979 W/kg


Configuration/Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.801 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.881 W/kg; SAR(10 g) = 0.481 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

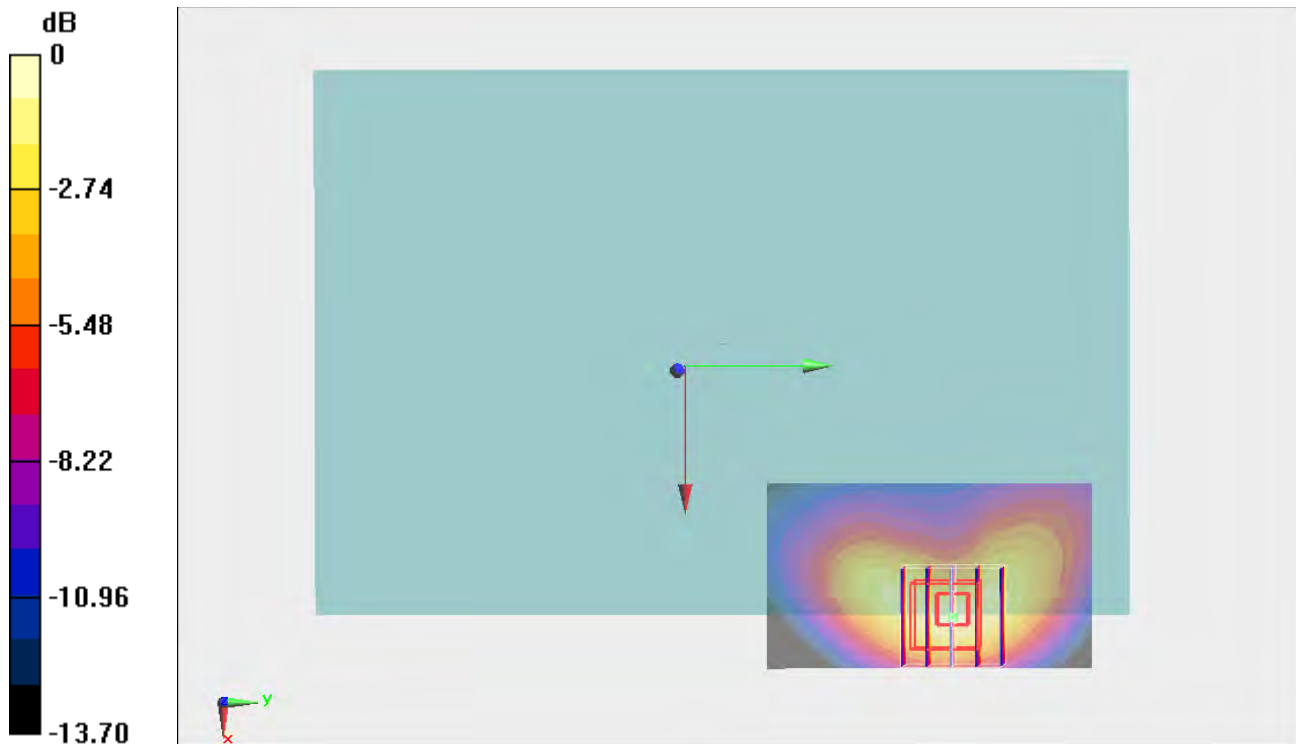

0 dB = 1.07 W/kg = 0.29 dBW/kg

#07_LTE Band 13_10M_QPSK_1RB_0Offset_Bottom Face_0cm_Ch23230

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: MSL_750_141128 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.987 \text{ S/m}$; $\epsilon_r = 53.229$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5°C ; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3296; ConvF(6.46, 6.46, 6.46); Calibrated: 2014/4/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2013/12/17
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1127
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch23230/Area Scan (41x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.33 W/kg


Configuration/Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 32.645 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.24 W/kg

SAR(1 g) = 1.22 W/kg ; SAR(10 g) = 0.671 W/kg

Maximum value of SAR (measured) = 1.55 W/kg

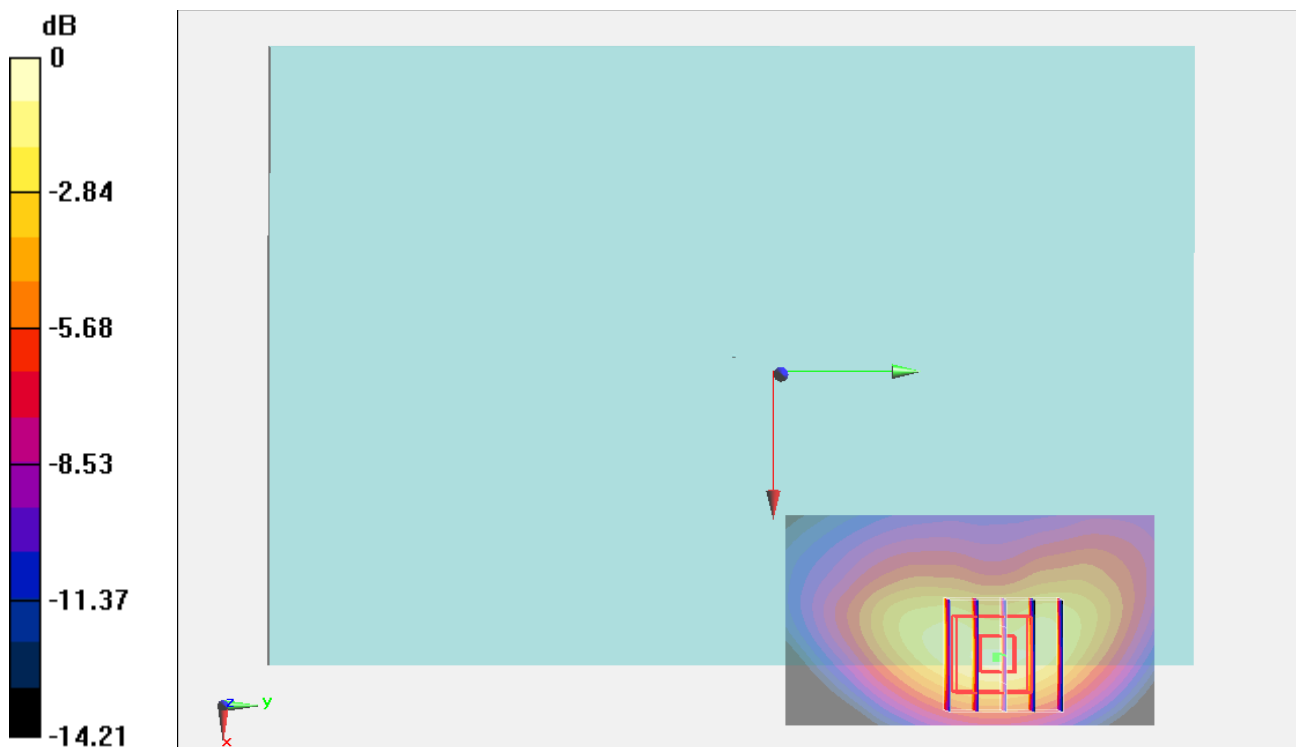

0 dB = 1.55 W/kg = 1.90 dBW/kg

#08_LTE Band 5_10M_QPSK_1RB_0Offset_Bottom Face_0cm_Ch20450

Communication System: LTE; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: MSL_850_141128 Medium parameters used: $f = 829$ MHz; $\sigma = 0.947$ S/m; $\epsilon_r = 52.664$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3296; ConvF(6.23, 6.23, 6.23); Calibrated: 2014/4/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2013/12/17
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1127
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch20450/Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.59 W/kg


Configuration/Ch20450/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 42.331 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.695 W/kg

Maximum value of SAR (measured) = 1.63 W/kg

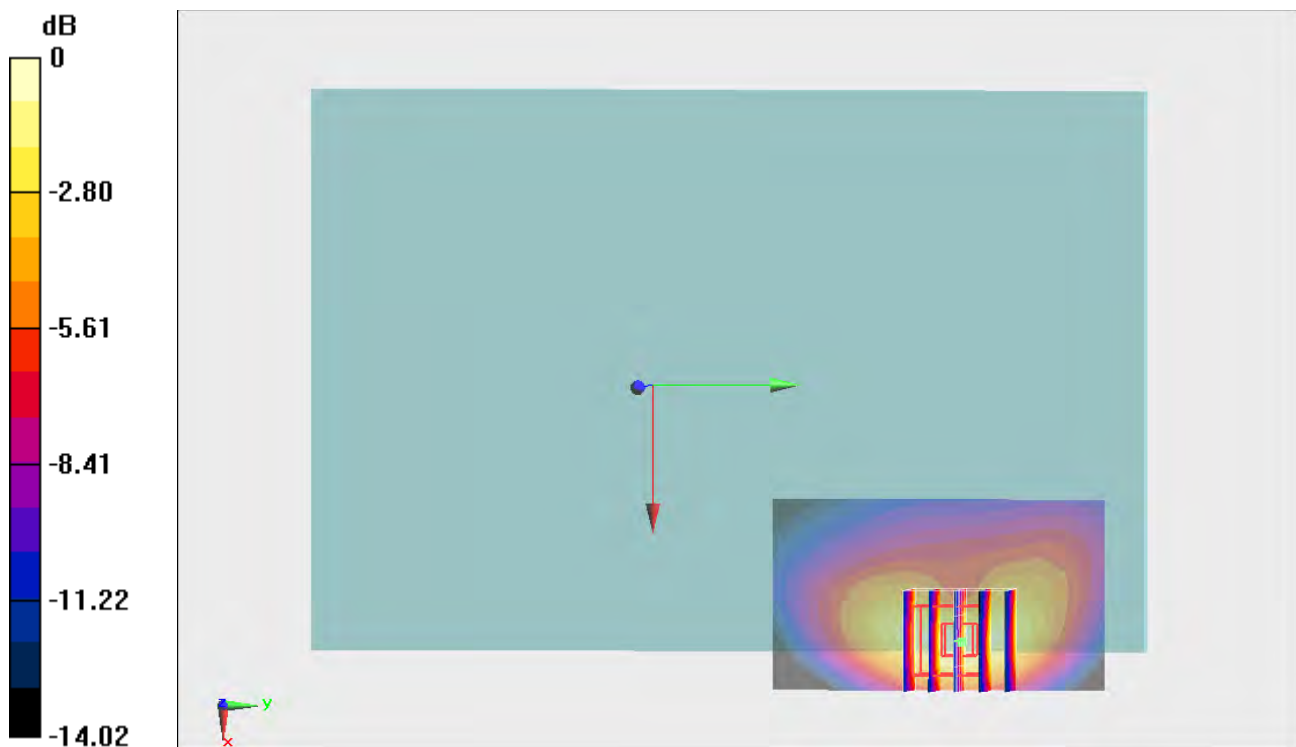

0 dB = 1.63 W/kg = 2.12 dBW/kg

#09_LTE Band 4_20M_QPSK_1RB_0Offset_Bottom Face_0cm_Ch20175

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL_1750_141127 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.486$ S/m; $\epsilon_r = 51.225$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3296; ConvF(5.29, 5.29, 5.29); Calibrated: 2014/4/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2013/12/17
- Phantom: ELI_Left; Type: QDOVA002AA; Serial: TP:1131
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch20175/Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.47 W/kg


Configuration/Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.191 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.618 W/kg

Maximum value of SAR (measured) = 1.66 W/kg

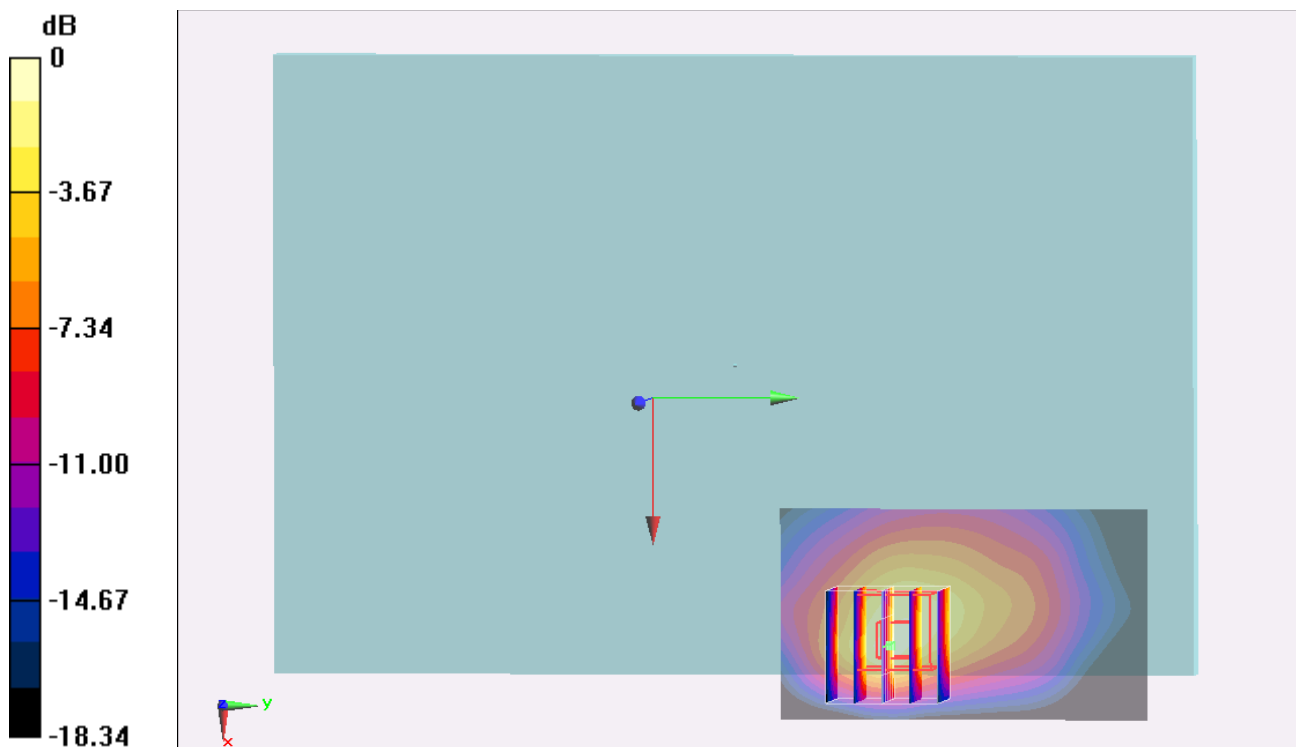

0 dB = 1.66 W/kg = 2.20 dBW/kg

#10_LTE Band 2_20M_QPSK_1RB_0Offset_Curved surface of Edge1_0cm_Ch19100

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_141126 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 52.813$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3296; ConvF(4.91, 4.91, 4.91); Calibrated: 2014/4/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2013/12/17
- Phantom: ELI_Left; Type: QDOVA002AA; Serial: TP:1131
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch19100/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.78 W/kg


Configuration/Ch19100/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.304 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.40 W/kg

SAR(1 g) = 1.32 W/kg; SAR(10 g) = 0.635 W/kg

Maximum value of SAR (measured) = 1.75 W/kg

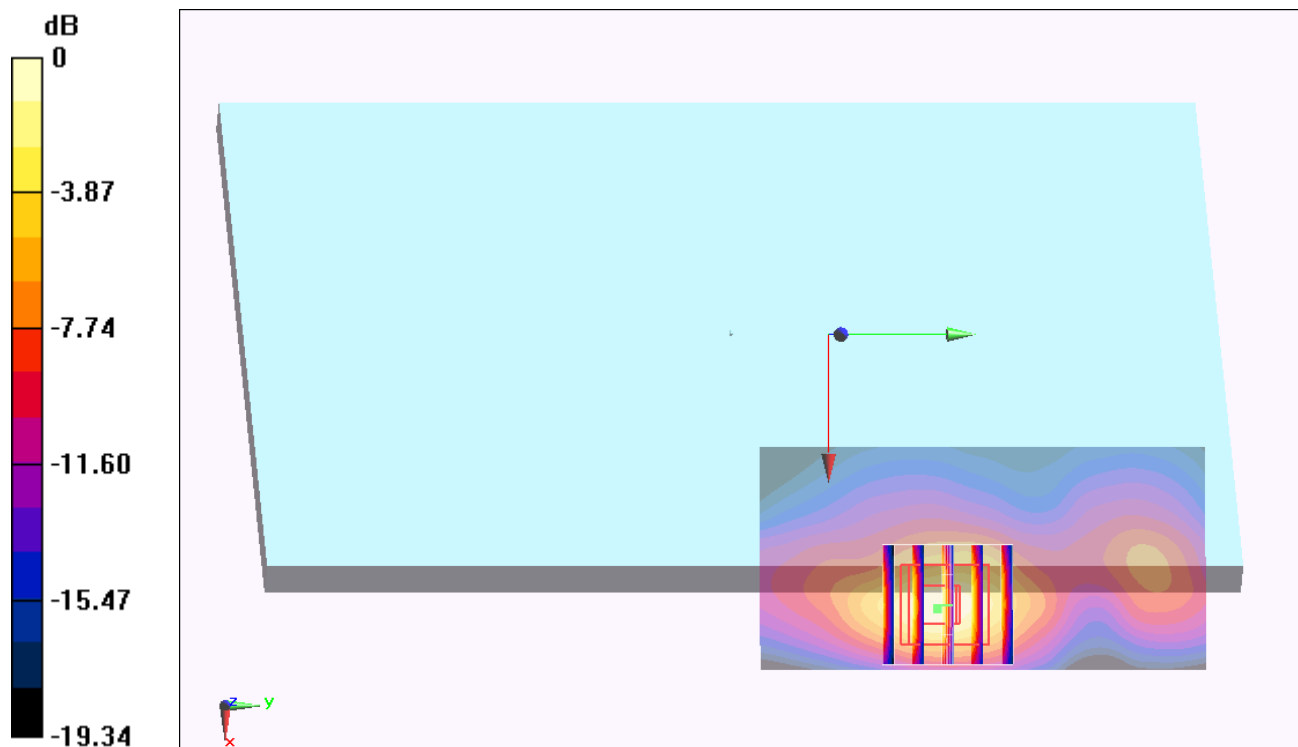

0 dB = 1.75 W/kg = 2.43 dBW/kg

#11_LTE Band 7_20M_QPSK_1RB_0Offset_Bottom Face_1cm_Ch21350

Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: MSL_2600_141201 Medium parameters used: $f = 2560$ MHz; $\sigma = 2.139$ S/m; $\epsilon_r = 50.998$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3296; ConvF(4.25, 4.25, 4.25); Calibrated: 2014/4/30;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2013/12/17
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1127
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch21350/Area Scan (51x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.60 W/kg


Configuration/Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.942 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.602 W/kg

Maximum value of SAR (measured) = 1.51 W/kg

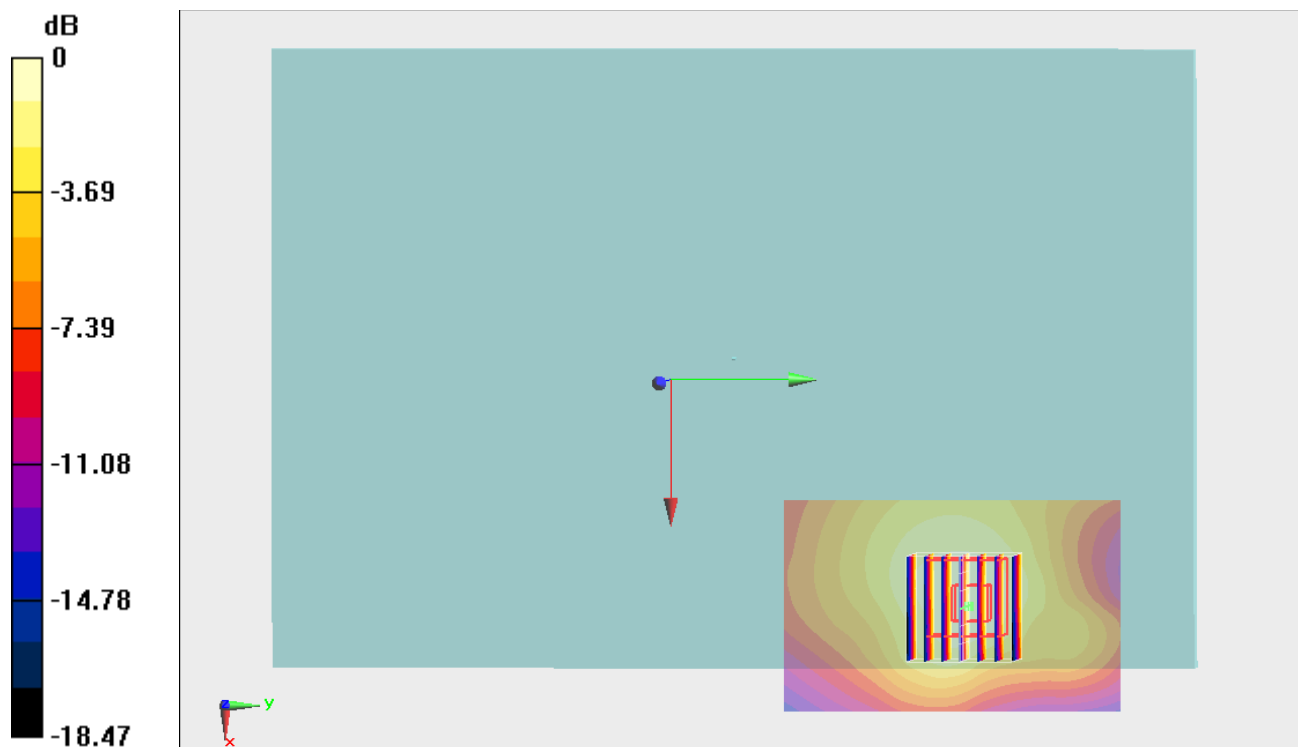

0 dB = 1.51 W/kg = 1.79 dBW/kg

#12_WLAN2.4GHz_802.11b 1Mbps_Bottom Face_0cm_Ch1;Ant Main

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1.008

Medium: MSL_2450_150108 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.984$ S/m; $\epsilon_r = 55.182$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(7.32, 7.32, 7.32); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Ch1/Area Scan (51x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.11 W/kg


Configuration/Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.44 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

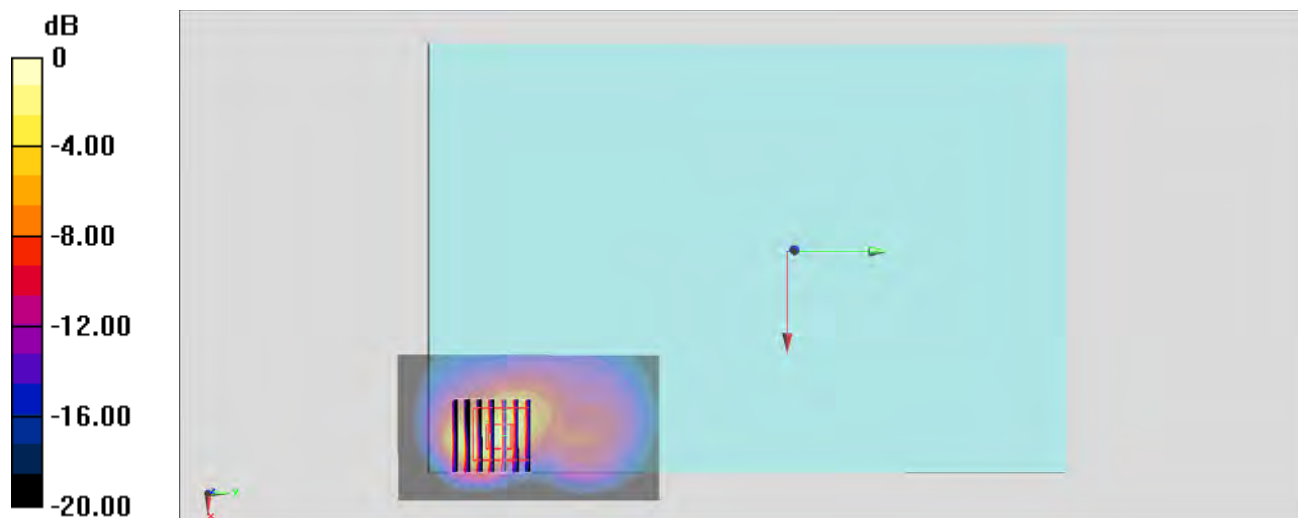

#13_WLAN5GHz_802.11a 6Mbps_Curved surface of Edge 4_0cm_Ch48;Ant Aux

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1.046

Medium: MSL_5G_150108 Medium parameters used: $f = 5240$ MHz; $\sigma = 5.246$ S/m; $\epsilon_r = 49.015$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(4.61, 4.61, 4.61); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Ch48/Area Scan (101x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.705 W/kg


Configuration/Ch48/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 21.47 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 4.65 W/kg

SAR(1 g) = 0.968 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 2.64 W/kg

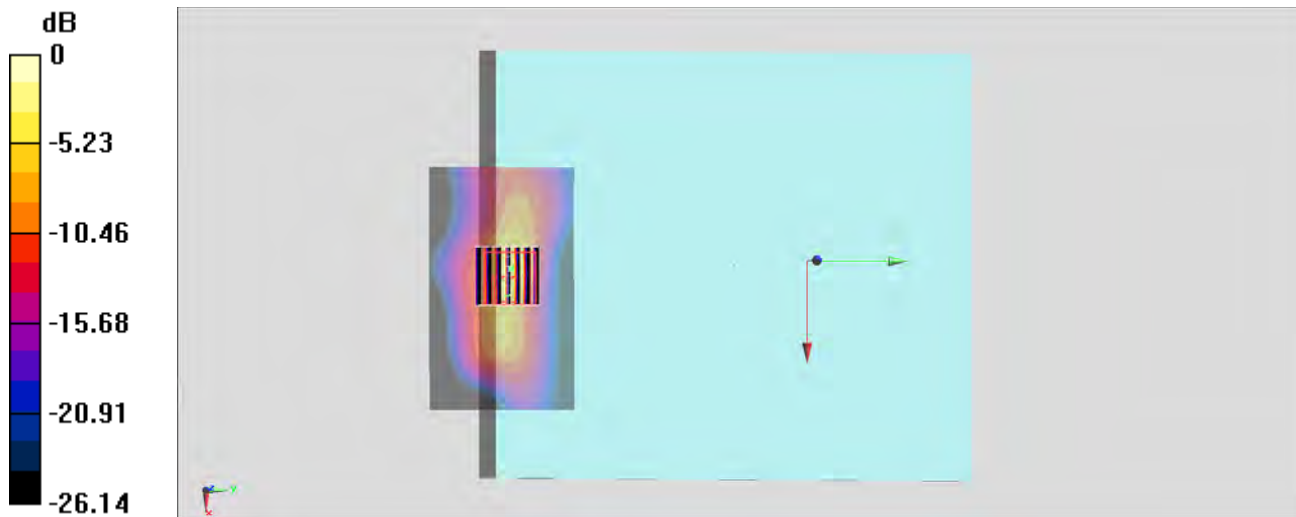

#14_WLAN5GHz_802.11a 6Mbps_Curved surface of Edge 4_0cm_Ch52;Ant Aux

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1.046

Medium: MSL_5G_150108 Medium parameters used : $f = 5260$ MHz; $\sigma = 5.283$ S/m; $\epsilon_r = 48.968$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(4.44, 4.44, 4.44); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Ch52/Area Scan (101x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.40 W/kg


Configuration/Ch52/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 23.41 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 4.84 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 2.79 W/kg

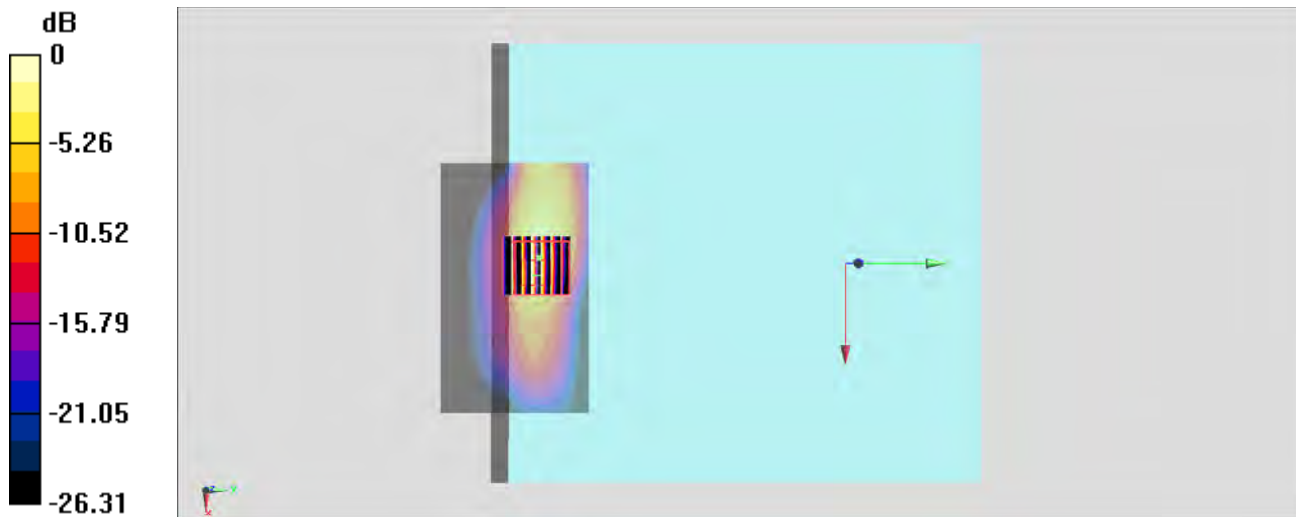

0 dB = 2.79 W/kg = 4.46 dBW/kg

#15_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch112;Ant Aux

Communication System: 802.11a; Frequency: 5560 MHz; Duty Cycle: 1:1.046

Medium: MSL_5G_150108 Medium parameters used: $f = 5560$ MHz; $\sigma = 5.644$ S/m; $\epsilon_r = 48.528$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(4.11, 4.11, 4.11); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Ch112/Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.06 W/kg


Configuration/Ch112/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 20.02 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 6.93 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 3.70 W/kg

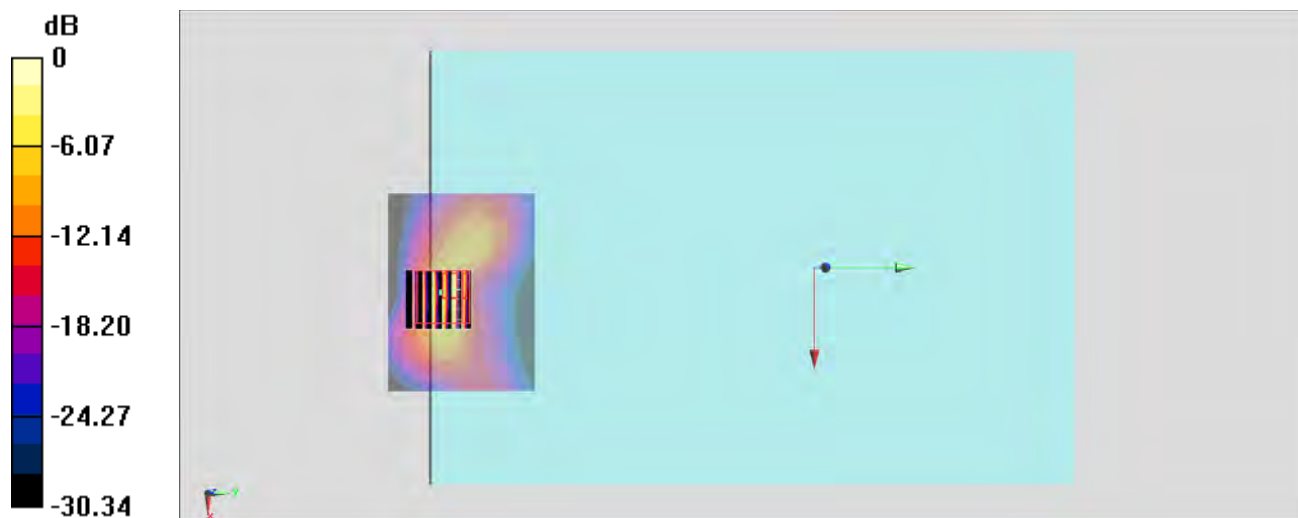

0 dB = 3.70 W/kg = 5.68 dBW/kg

#16_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch149;Ant Aux

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.046

Medium: MSL_5G_150108 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.931$ S/m; $\epsilon_r = 48.34$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(4.26, 4.26, 4.26); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Ch149/Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.57 W/kg

Configuration/Ch149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 22.59 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 5.32 W/kg

SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 2.89 W/kg

