

# **RF EXPOSURE EVALUATION REPORT**

APPLICANT :		Shenzhen Grandsun	Electro	nic Co.	, Ltd.
-------------	--	-------------------	---------	---------	--------

PRODUCT NAME : active wireless earphones

- MODEL NAME : air
- **BRAND NAME** : Blackbox

FCC ID	:	2AN4C-1267
--------	---	------------

- STANDARD(S) : 47CFR 2.1093 KDB 447498
- **ISSUE DATE** : 2018-02-01

Tested by:

Gan Yueming Gan Yueming (Test engineer)

Approved by:

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 E-mail: service@morlab.cn Http://www.morlab.cn





### DIRECTORY

1.	Technical Information	• 3
1.1	Applicant and Manufacturer Information	• 3
1.2	Equipment Under Test (EUT) Description	• 3
1.3	Photographs of the EUT	• 4
1.4	Applied Reference Documents	• 5
2.	Device Category and RF Exposure Limit	• 6
3.	Measurement of RF Output Power	• 7
4.	RF Exposure Evaluation	• 8
An	nex A General Information	• 9

Change History				
Issue Date Reason for change		Reason for change		
1.0	2018-02-01	First edition		





# **1.** Technical Information

Note: Provide by manufacturer.

### **1.1 Applicant and Manufacturer Information**

Applicant:	Shenzhen Grandsun Electronic Co., Ltd.		
Applicant Address:	Pingdi Gaoqiao Industry Zone, Longgang District, Shenzhen,		
Applicant Address.	China		
Manufacturer:	Shenzhen Grandsun Electronic Co., Ltd.		
Monufacturer Address.	Pingdi Gaoqiao Industry Zone, Longgang District, Shenzhen,		
Manufacturer Address:	China		

### **1.2 Equipment Under Test (EUT) Description**


EUT Type:	active wireless earphones	
Hardware Version:	V0P3	
Software Version:	V04	
Frequency Bands:	Bluetooth 4.0(BR+EDR): 2402MHz-2480MHz	
Modulation Mode:	Bluetooth : GFSK,π/4-DQPSK, 8-DPSK	
Antenna Type:	Chip Antenna	
Antenna Gain:	1dBi	






### 1.3 Photographs of the EUT

#### 1. EUT front view

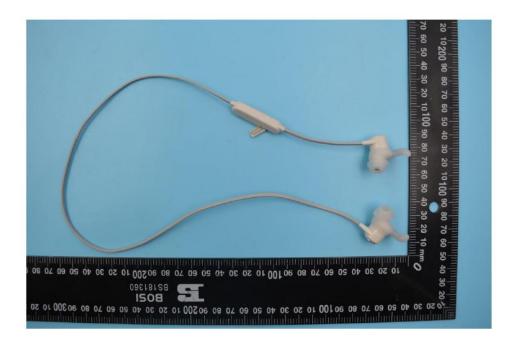

2. EUT rear view

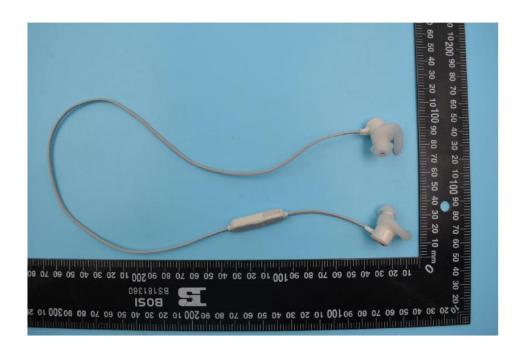



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China 
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



#### 1.3.1 Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version	
1#	V0P3	V04	

### **1.4 Applied Reference Documents**

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radio frequency Radiation Exposure Evaluation: portable
		devices
2	KDB 447498 D01v06	General RF Exposure Guidance





### 2. Device Category and RF Exposure Limit

Per user manual, this device is a 3-Axis Stabilizing Gimbal for Action Camera. Based on 47CFR 2.1093, this device belongs to portable device category with General Population/Uncontrolled exposure.

#### Portable Devices:

#### 47CFR 2.1093(b)

For purposes of this section, a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user.

#### **GENERAL POPULATION / UNCONTROLLED EXPOSURE**

#### 47CFR 2.1093(d) (2)

Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.





# **3. Measurement of RF Output Power**

#### 1. Bluetooth output power

Mode Channel	Frequency Average power (dBm)			Bm)	
woue	Mode Channel	(MHz)	1Mbps	2Mbps	3Mbps
	CH 00	2402	1.21	0.77	1.32
BR / EDR	CH 39	2441	4.67	4.37	4.78
	CH 78	2480	4.77	4.41	4.56
Tune-up Limit			5	5	5

Note: According to KDB 447498, maximum source-based time-average power will be used for calculating MPE.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



# **4. RF Exposure Evaluation**

The device only incorporates a Bluetooth transmitter, so standalone SAR evaluation is required for Bluetooth and simultaneous SAR is not required.

Standalone transmission SAR evaluation

According to KDB 447498 section 4.3.1, the 1-g SAR test exclusion thresholds at test separation Distances  $\leq$  50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[ $\sqrt{f(GHz)}$ ] ≤ 3.0

The maximum tune-up limit power is 3.16mW @ 2.441GHz

When 3-Axis Stabilizing Gimbal for Action Camera is used on the hand/head, so use **5mm** as the most conservative minimum test separation distance,

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[ $\sqrt{f(GHz)}$ ] =0.99  $\leq$  3.0

So SAR evaluation is not required for this device.

Note: Declaration of the tune-up limit is 5.0dBm.





## **Annex A General Information**

#### 1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang
	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

#### 2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.	
	Morlab Laboratory	
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongCha	
	Road, Block 67, BaoAn District, ShenZhen, GuangDong	
	Province, P. R. China	

\_\_\_ END OF REPORT



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn

Page**9** 0f **9**