



**FCC CFR47 CERTIFICATION
CLASS II PERMISSIVE CHANGE
TEST REPORT**

FOR

BROADCOM 802.11ag WIRELESS LAN PCI-E MINI CARD

MODEL NUMBER: BCM94311MCAG

FCC ID: QDS-BRCM1019

REPORT NUMBER: 06U10199-3

ISSUE DATE: APRIL 14, 2006

Prepared for
**BOARDCOM CORP.
190 MATHILDA PLACE
SUNNYVALE, CA 94086, USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	04/14/06	Initial Issue	Thu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST.....	6
5.1. DESCRIPTION OF EUT	6
5.2. CLASS II PERMISSIVE CHANGE DESCRIPTION	6
5.3. MAXIMUM OUTPUT POWER	6
5.4. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.5. SOFTWARE AND FIRMWARE	6
5.6. WORST-CASE CONFIGURASSSION AND MODE	7
5.7. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMIT AND TEST RESULTS	11
7.1. RADIATED EMISSIONS.....	11
7.1.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	11
7.1.2. TRANSMITTER ABOVE 1 GHZ FOR 5150 TO 5350 MHz BAND	14
7.1.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz	31
7.2. POWERLINE CONDUCTED EMISSIONS	33
8. SETUP PHOTOS	37

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Broadcom Corp.
190 Mathilda Place
Sunnyvale, CA 94086, USA

EUT DESCRIPTION: Broadcom 802.11ag Wireless LAN PCI-E Mini Card

MODEL: BCM94311MCAG

SERIAL NUMBER: 407

DATE OF ORIGINAL TESTS: March 31 to April 06, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART E	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Note: The 802.11ag UNII Band is applicable to this report; another 2.4 GHz and 5.2 GHz UNII bands of operation are in separate report.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g transceiver module, operating in the UNII 5150 -5350 MHz, and manufactured by Broadcom Corp.

5.2. CLASS II PERMISSIVE CHANGE DESCRIPTION

The EUT was originally tested and reported under CCS project no. 05U3487 and granted by TCB, with a PIFA antenna which has a peak gain of 3.24dBi at 2.4 GHz band and 5.7dBi at 5 GHz band.

The major change filed under this application is to add a PCB antenna of 1.66dBi maximum gain at 2.4 GHz band and 2.36dBi at 5 GHz band, the PCB antenna is manufactured by Amphenol, P/N EAX20. Therefore only Radiated emission and Power Line Conducted emission tests were conducted under this project, with verification performed on the original output power.

5.3. MAXIMUM OUTPUT POWER

The transmitter has the same maximum peak conducted output power as original.

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PCB antenna with a maximum gain of 2.36dBi for 5 GHz band.

5.5. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was BCM94311, version. 3.100.53.0

The test utility software used during testing was wl_tools.

5.6. WORST-CASE CONFIGURASSSION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output powers were at 5300 MHz for 11a.

The worst-case data rate for this channel is determined to be 6 Mb/s for 11a mode based on previous experience with WLAN product design architectures.

Thus all emissions tests were made in the 802.11a mode, 5300 MHz, 6 Mb/s.

WORSRT-CASE POWER AND BIT RATE SETTING

The following power in the packet (dBm) was tuned during test at the worst case data rates detailed.

802.11a - 5.2 GHz UNII BAND					
CHANNEL	36	40	52	60	64
(MHz)	5180	5200	5260	5300	5320
Band Edge					
(dBm)	14.5	14.5	X	17	16.5
Emission					
(dBm)	17	x	17	x	17*
Bit Rate					
(Mbps)	54 Mbps for Peak reading & 6 Mbps for Average reading				
*NOTE:	For the rest of the RF Conducted and Radiated Emission tests, channel 13 is to 17dBm for worst case power to cover all high channels_Channel 60 (17dBm and Channel 64 (16.5dBm)				

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	HP	Pavilion dv4030us	CNE52005T6	DoC
AC Adapter	HP	PPP0009S	CT 57BC30AU4RO0L0	DoC
Extended Card	ADEXELEC	PEX1-MINI	01/01/1900	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC Power	1	AC power	Unshielded	1.5 m	N/A
2	DC Power	1	DC Power	Unshielded	1.5 m	N/A

TEST SETUP

The EUT is installed in a host laptop computer via a card bus-to-mini PCI adapter / extension board during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

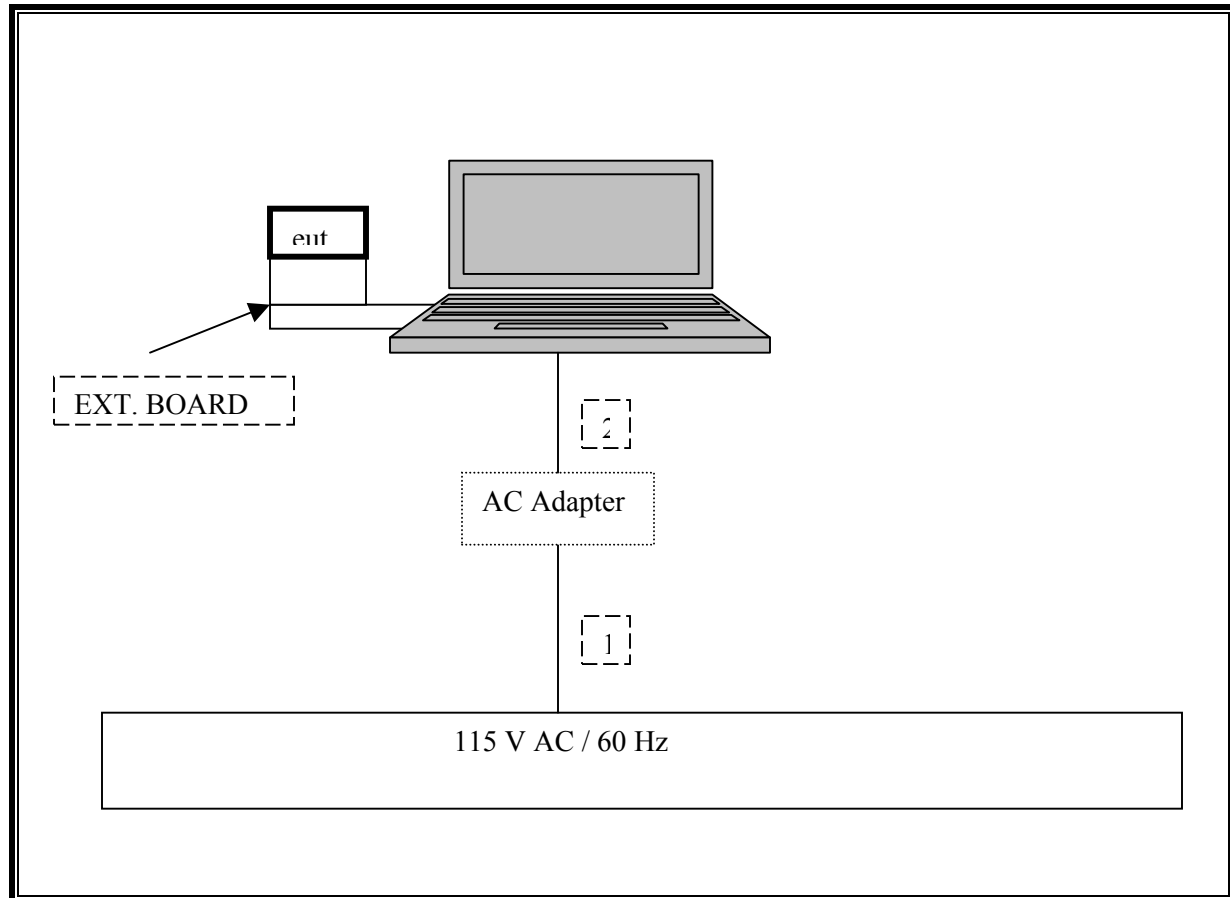

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	US42510266	10/19/2006
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	4/22/2006
Antenna, Horn 18 ~ 26 GHz	ARA	SWH-28	1007	6/2/2006
Antenna, Horn 26 ~ 40 GHz	ARA	MWH-2640/B	1029	12/3/2006
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00561	10/3/2007
PreAmplifier 26-40 GHz	MITEQ	NSP4000-SP2	924343	6/1/2006
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2006
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BN	8379443	8/30/2006
EMI Test Receiver	R & S	ESHS 20	827129/006	6/3/2006
AC Power Source, 10 kVA	ACS	AFC-10K-AFC-2	J1568	CNR
EMI Receiver, 9 kHz ~ 2.9 GHz	Agilent / HP	8542E	3942A00286	2/4/2007
RF Filter Section	Agilent / HP	85420E	3705A00256	2/4/2007
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A121003	3/3/2007
Peak Power Meter	Agilent / HP	E4416A	GB41291160	12/2/2007
7.6 GHz High Pass Filter	Micro Tronics	HPM13350	1	N/A
5.15 - 5.35 Reject Filter	Micro Tronics	BRC13192	2	N/A

7. LIMIT AND TEST RESULTS

7.1. RADIATED EMISSIONS

7.1.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

7.1.2. TRANSMITTER ABOVE 1 GHZ FOR 5150 TO 5350 MHz BAND


CH 36, 5180 MHz – POWER = 14.5dBm


RESTRICTED BANDEGE (802.11a MODE, LOW CHANNEL, HORIZONTAL)

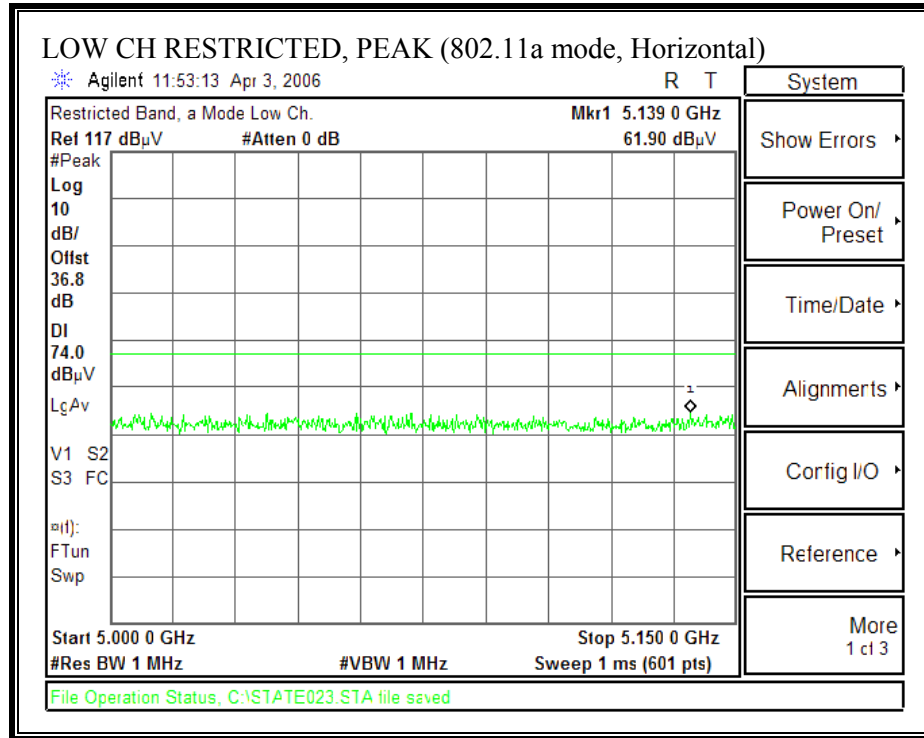

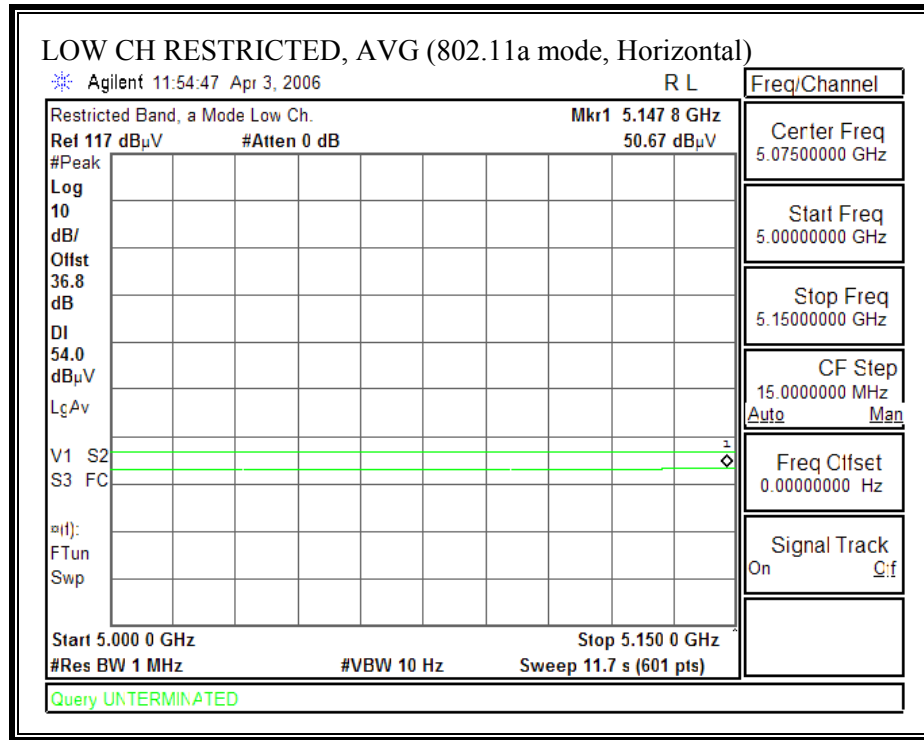


RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, VERTICAL)

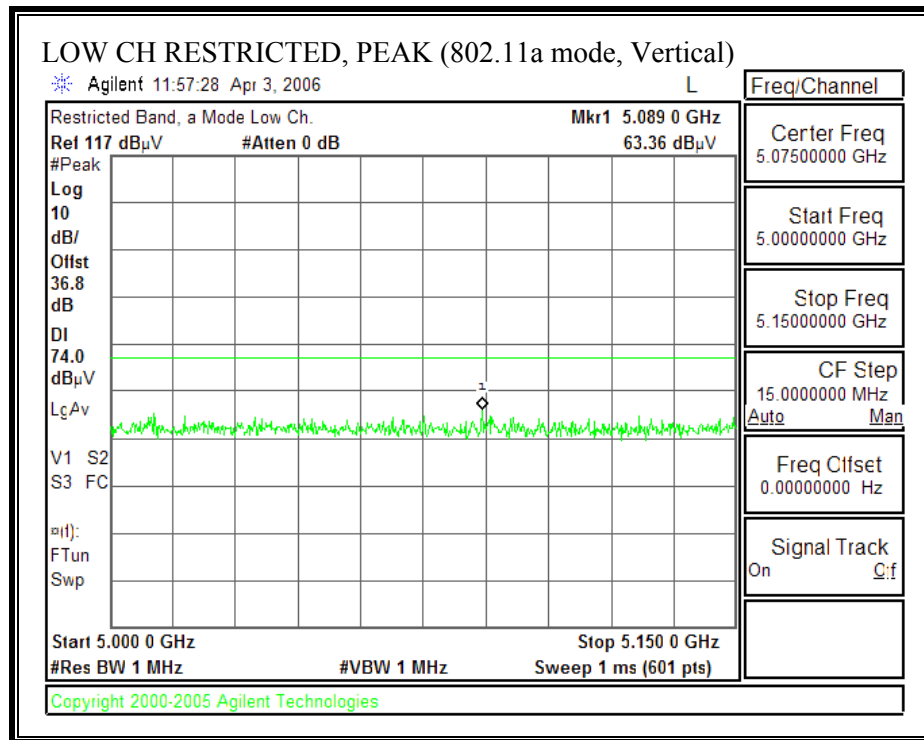


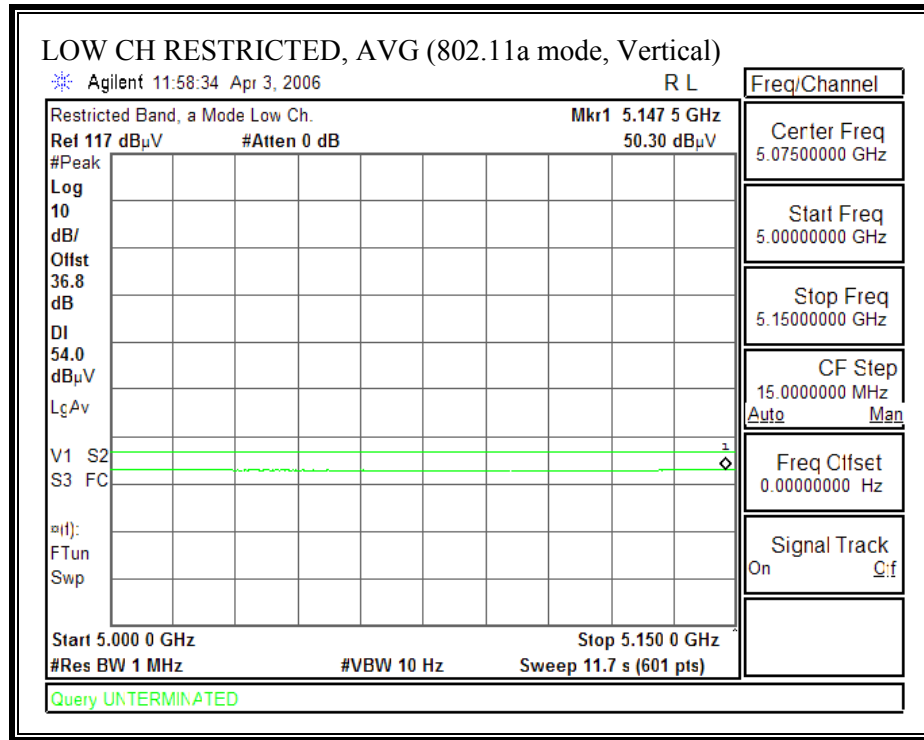


CH 40, 5200 MHz – POWER = 14.5dBm


RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, HORIZONTAL)

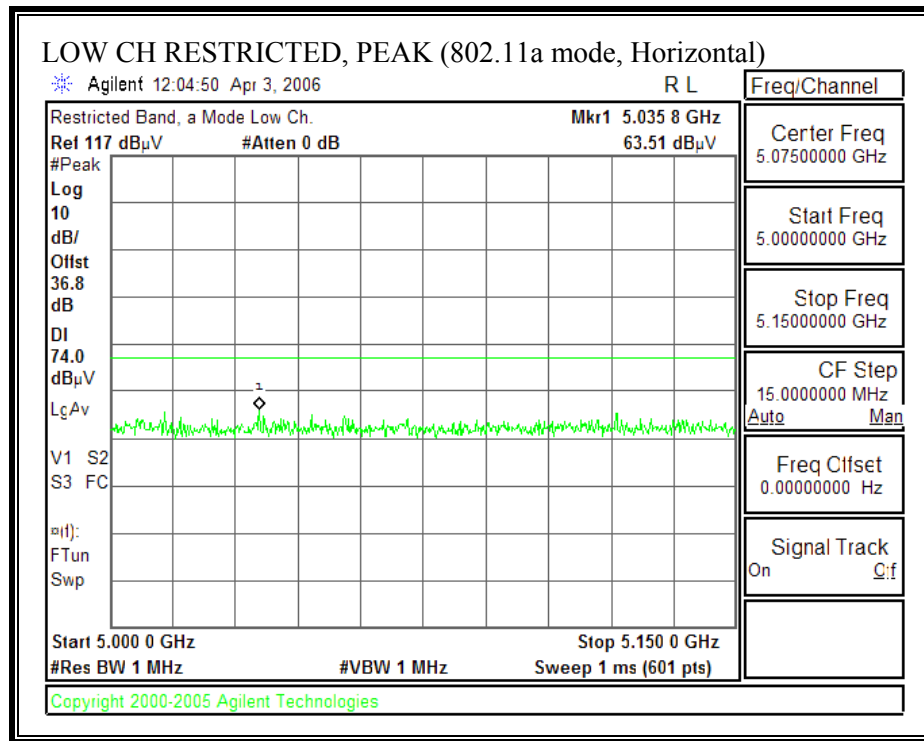

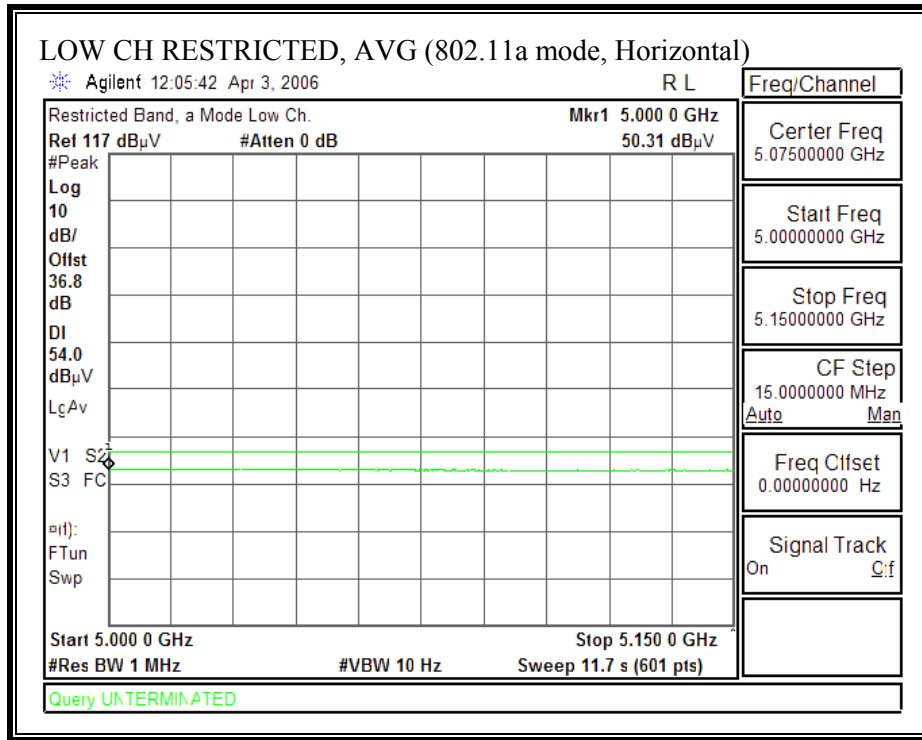


RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, VERTICAL)

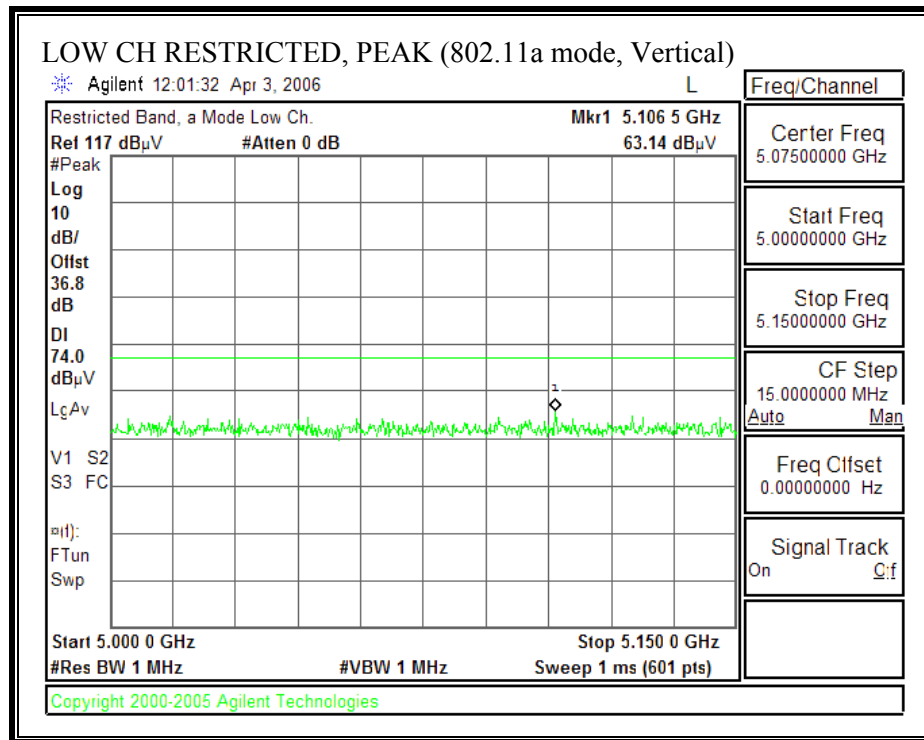


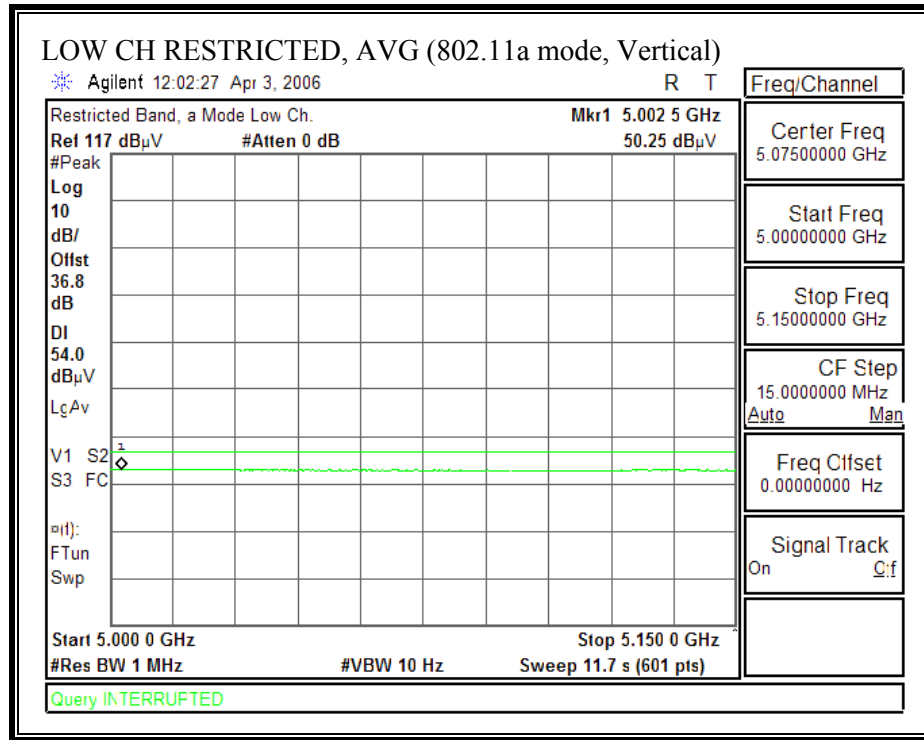


CH 60, 5300 MHz – POWER = 17dBm


RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, HORIZONTAL)

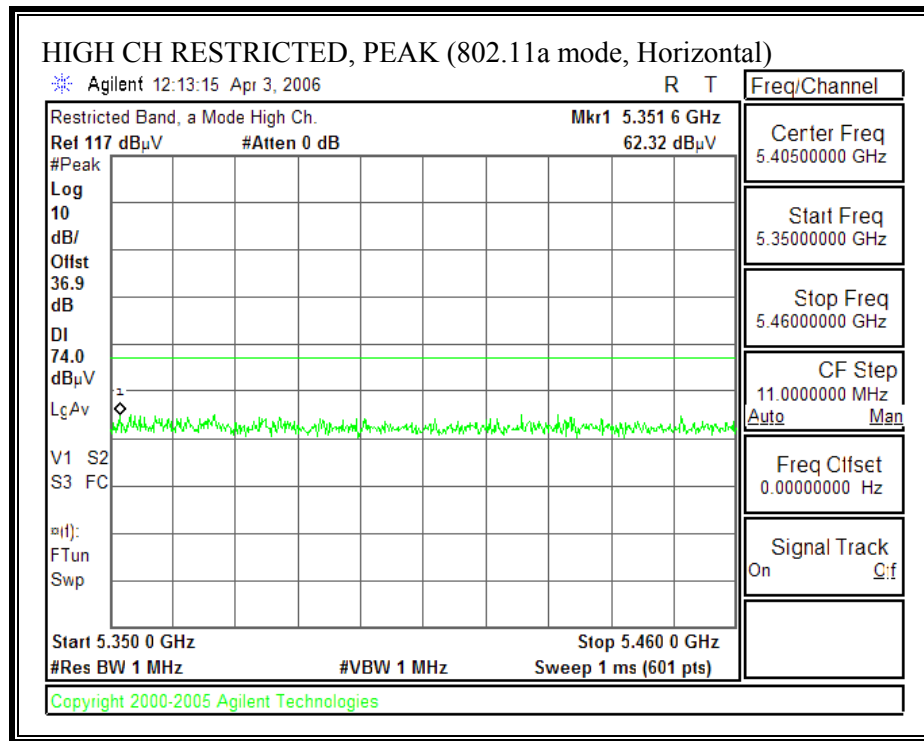

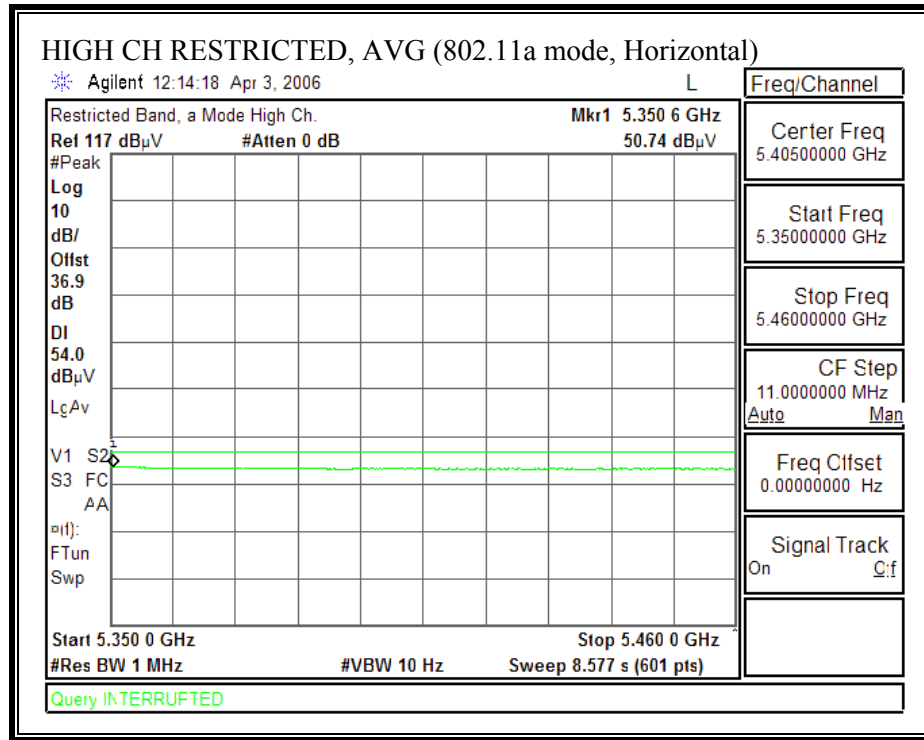


RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, VERTICAL)

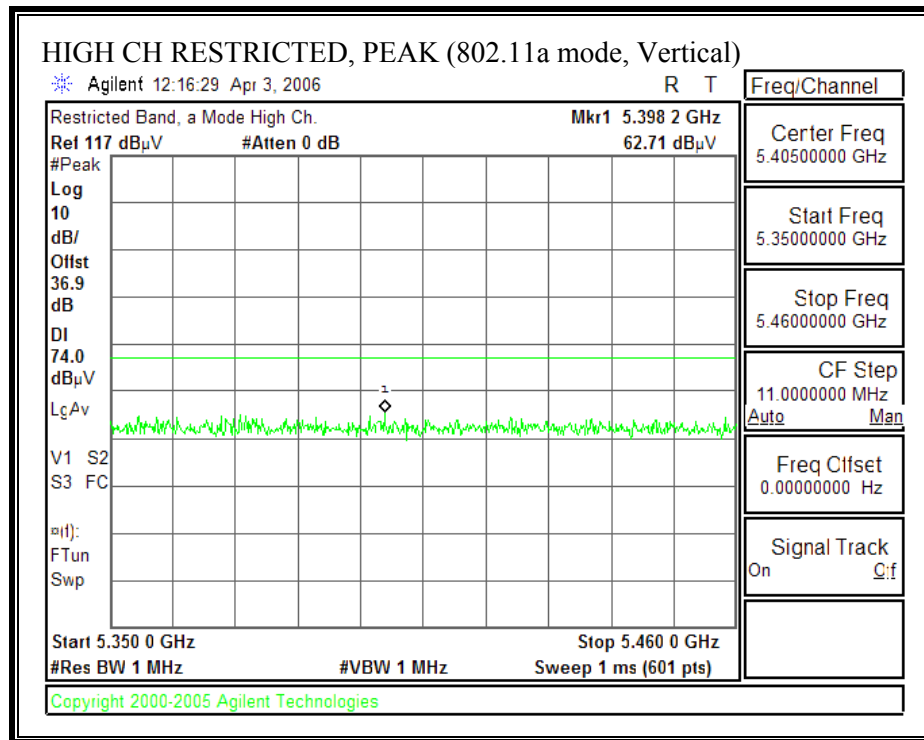


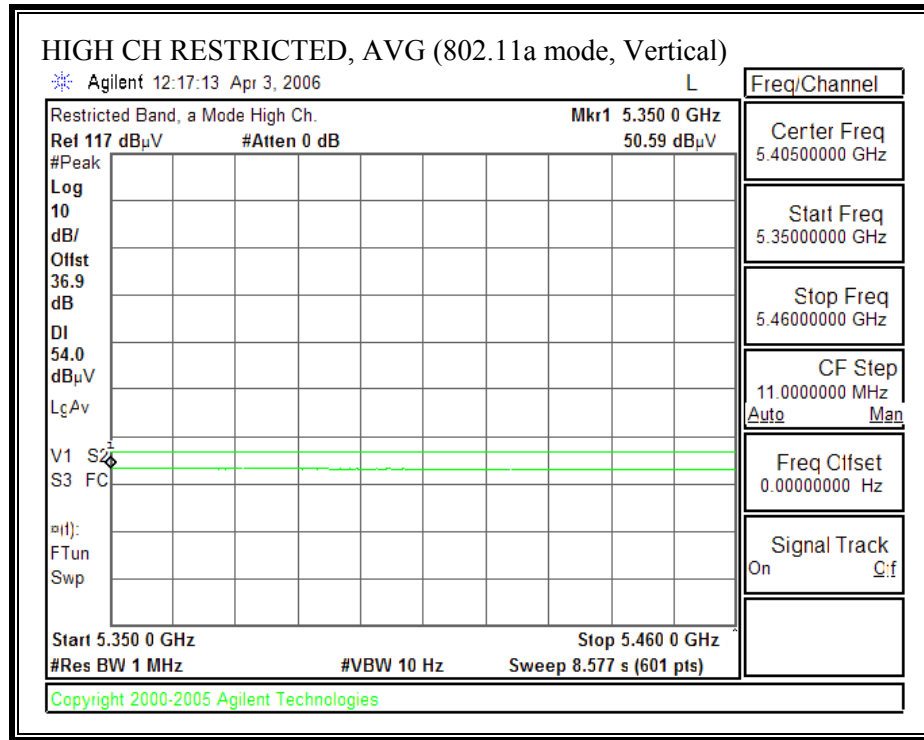


CH 64, 5320 MHz – POWER = 16.5dBm


RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, HORIZONTAL)

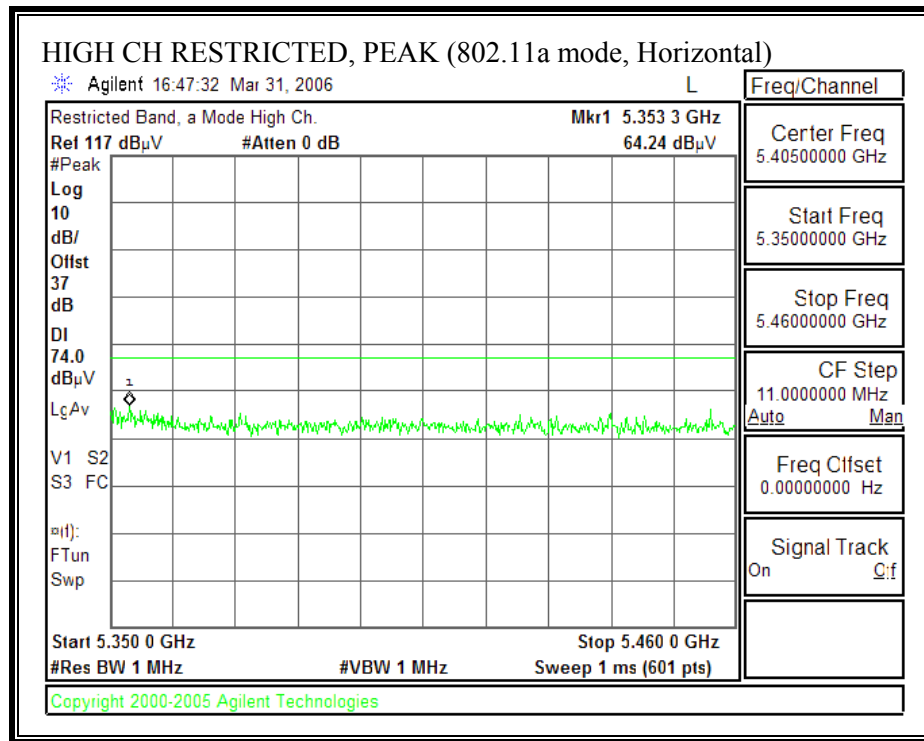

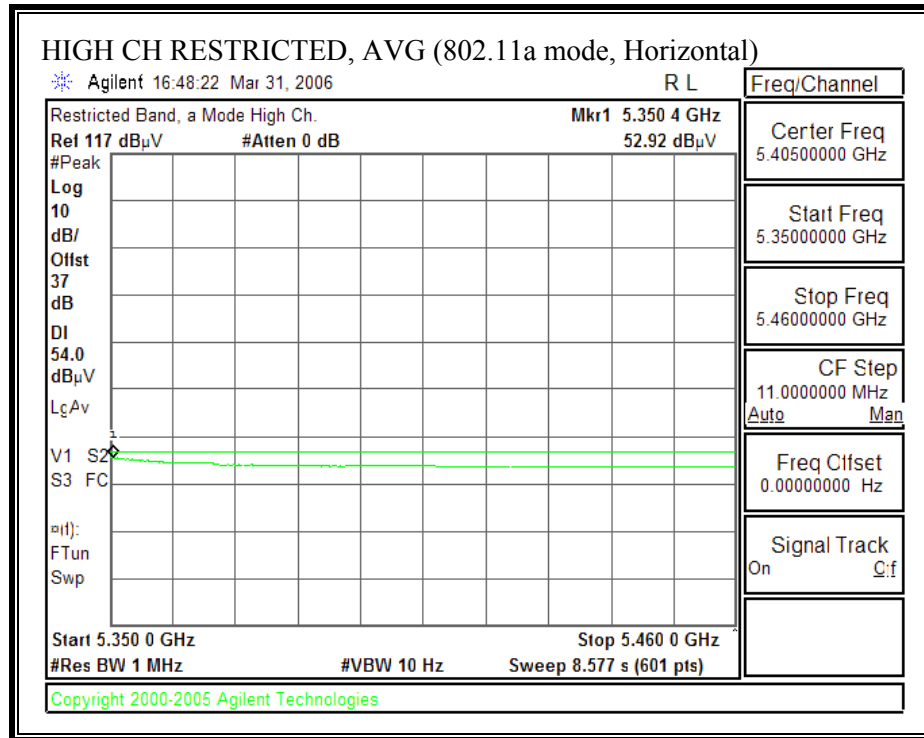

RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, VERTICAL)

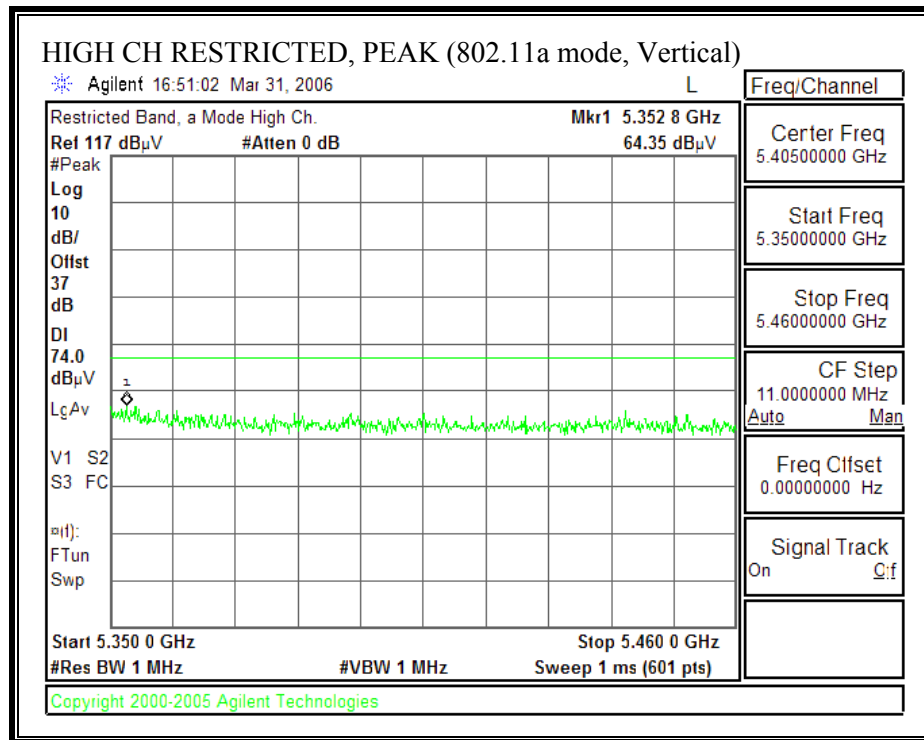

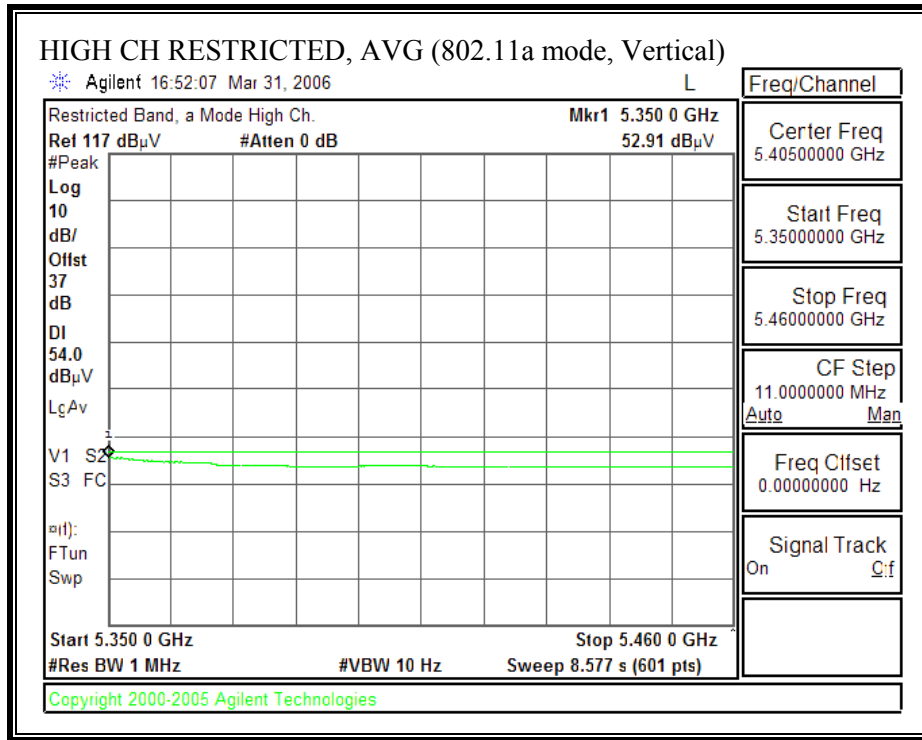

HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

CHANNEL 36, 52, & 64, BITE RATE: 54Mbps for Peak & 6Mbps for Average

03/31/06 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: VIEN TRAN Project #: 06U10199 Company: BROADCOM EUT Descrip.: 802.11ag Mini PCI Express Card EUT M/N: BCM94311MCAG Test Target: FCC 15.407 _UNII Mode Oper: 11a_5150-5350 MHz_CH 36_5180 MHz, CH 52_5260 MHz, CH 64_5320 MHz															
Test Equipment:															
Horn 1-18GHz T60; S/N: 2238 @3m		Pre-amplifier 1-26GHz T145 Agilent 3008A0056		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit FCC 15.209							
Hi Frequency Cables															
2 foot cable		3 foot cable Vien 187215002		12 foot cable Vien 197209005		HPF HPF_7.6GHz		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz					
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
CH 36, 5180 MHz, Average = 17dBm															
10.630	3.0	50.7	38.8	38.2	4.8	-34.3	0.0	0.8	60.1	48.2	74	54	-13.9	-5.8	H
15.540	3.0	44.4	32.8	39.0	5.8	-32.3	0.0	0.7	57.6	46.0	74	54	-16.4	-8.0	H, NOISE FLOOR
10.630	3.0	45.2	33.3	38.2	4.8	-34.3	0.0	0.8	54.6	42.7	74	54	-19.4	-11.3	V
15.540	3.0	44.0	32.3	39.0	5.8	-32.3	0.0	0.7	57.2	45.5	74	54	-16.8	-8.5	V, NOISE FLOOR
CH 52, 5260 MHz, Average = 17dBm															
10.520	3.0	48.5	37.3	38.2	4.7	-34.4	0.0	0.8	57.8	46.6	74	54	-16.2	-7.4	H
15.780	3.0	44.7	32.7	38.8	5.8	-32.2	0.0	0.7	57.8	45.8	74	54	-16.2	-8.2	H, NOISE FLOOR
10.520	3.0	44.7	33.5	38.2	4.7	-34.4	0.0	0.8	54.0	42.8	74	54	-20.0	-11.2	V
15.780	3.0	43.3	32.3	38.8	5.8	-32.2	0.0	0.7	56.4	45.4	74	54	-17.6	-8.6	V, NOISE FLOOR
CH 64, 5320 MHz, Average = 17dBm															
10.640	3.0	47.3	36.2	38.2	4.8	-34.2	0.0	0.8	56.8	45.7	74	54	-17.2	-8.3	H
15.960	3.0	44.0	32.0	38.7	5.9	-32.2	0.0	0.7	57.1	45.1	74	54	-16.9	-8.9	H, NOISE FLOOR
10.640	3.0	44.7	32.7	38.2	4.8	-34.2	0.0	0.8	54.2	42.2	74	54	-19.8	-11.8	V
15.960	3.0	44.3	32.4	38.7	5.9	-32.2	0.0	0.7	57.4	45.5	74	54	-16.6	-8.5	V, NOISE FLOOR
NO OTHER EMISSIONS WERE DETECTED ABOVE SYSTEM NOISE FLOOR															

7.1.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 18 File#: 30-1000.emi Date: 04-04-2006 Time: 11:09:31
Audix ATC

Condition: FCC CLASS-B HORIZONTAL

Test Operator : Vien Tran

Project # : 06U10199

Company : Broadcom

EUT : 802.11ag WLAN PCI-E Mini Card

Model No : BCM94311MCAG

S/N :

Configuration : EUT on extended card & laptop

Mode of operation: Tx 11a Worst Case

Target of Test : FCC class B_DGT

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	31.940	8.71	19.94	28.65	40.00	-11.35	Peak
2	163.860	23.04	13.66	36.70	43.50	-6.80	Peak
3	306.450	26.72	15.82	42.55	46.00	-3.45	Peak
4	436.430	24.49	18.89	43.38	46.00	-2.62	Peak
5	638.190	17.41	22.15	39.56	46.00	-6.44	Peak
6	870.990	16.32	25.57	41.89	46.00	-4.11	QP
7	870.990	18.73	25.57	44.30	46.00	-1.70	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 20 File#: 30-1000.emi Date: 04-04-2006 Time: 11:16:20
Audix ATC

Condition: FCC CLASS-B VERTICAL

Test Operator : Vien Tran
Project # : 06U10199
Company : Broadcom
EUT : 802.11ag WLAN PCI-E Mini Card
Model No : BCM94311MCAG
S/N :
Configuration : EUT on extended card & laptop
Mode of operation: Tx 11a Worst Case
Target of Test : FCC class B_DGT

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	33.880	13.81	19.05	32.86	40.00	-7.14	Peak
2	204.600	21.89	13.91	35.80	43.50	-7.70	Peak
3	321.000	21.18	16.19	37.37	46.00	-8.63	Peak
4	438.370	21.81	18.93	40.75	46.00	-5.25	Peak
5	832.190	15.65	24.95	40.60	46.00	-5.40	Peak
6	943.740	14.35	26.43	40.78	46.00	-5.22	Peak

7.2. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:

6 WORST EMISSIONS FOR UNII 5.2 GHz

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	FCC_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.18	39.52	--	--	0.00	64.49	54.49	-24.97	-14.97	L1
0.26	37.46	--	--	0.00	61.43	51.43	-23.97	-13.97	L1
0.36	31.50	--	--	0.00	58.73	48.73	-27.23	-17.23	L1
0.18	39.30	--	--	0.00	64.49	54.49	-25.19	-15.19	L2
0.26	38.50	--	--	0.00	61.43	51.43	-22.93	-12.93	L2
0.36	32.40	--	--	0.00	58.73	48.73	-26.33	-16.33	L2
6 Worst Data									

LINE 1 AND RESULTS

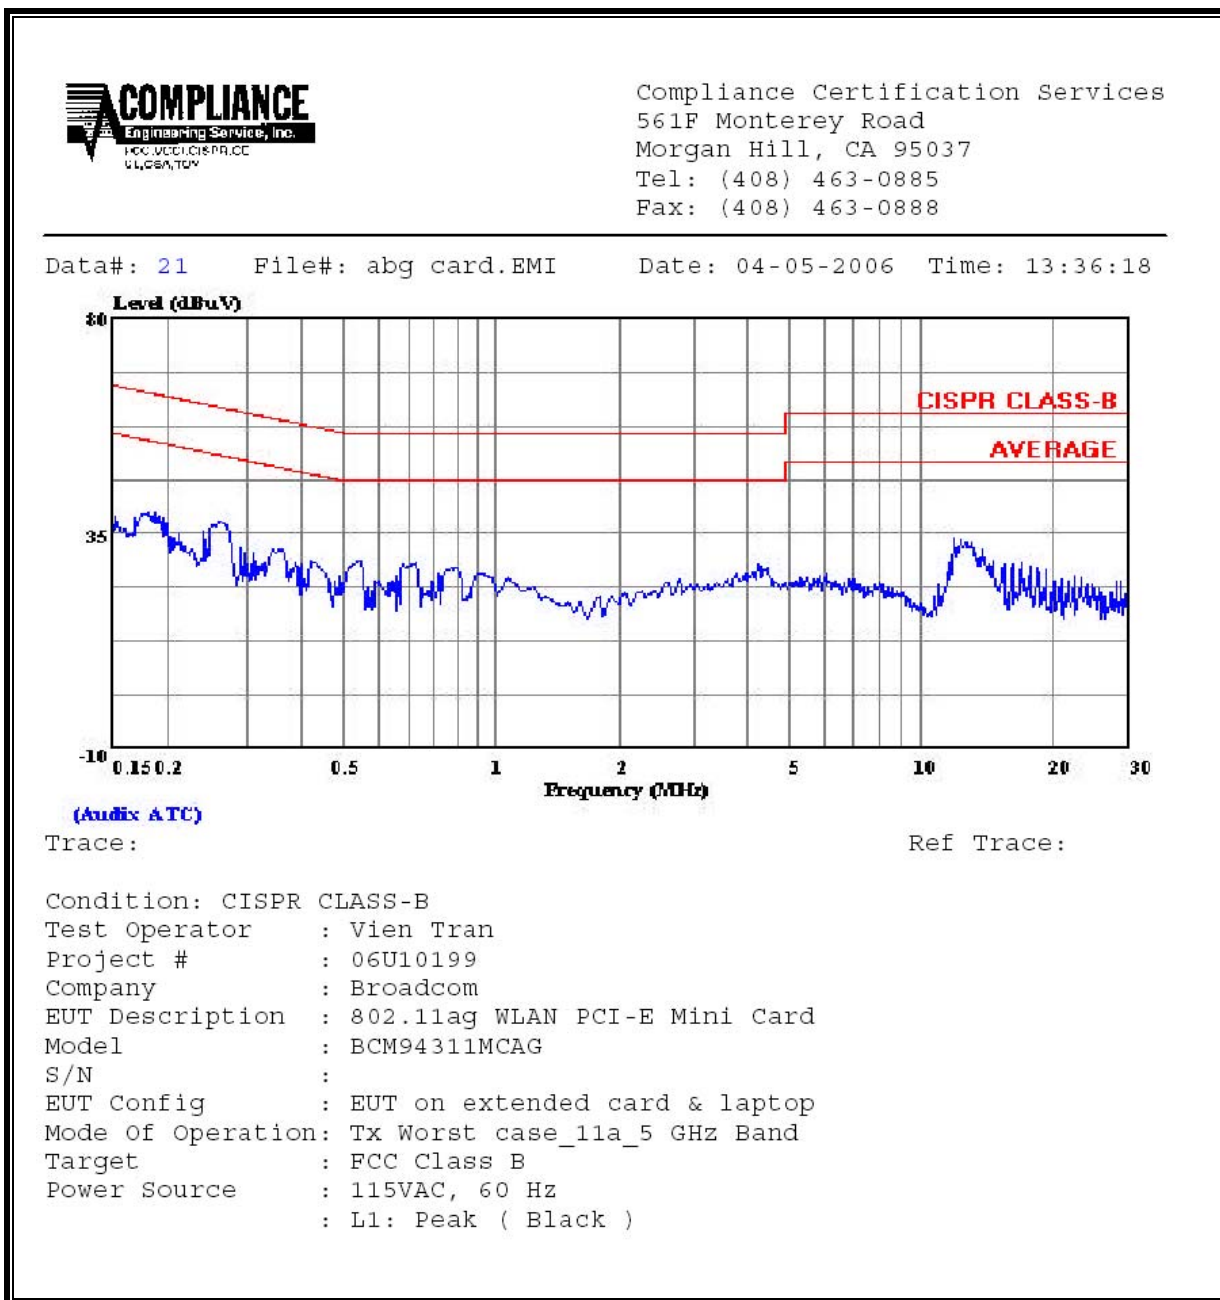


LINE 2 AND RESULTS



Compliance Certification Services
561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0885
Fax: (408) 463-0888

Data#: 28 File#: abg card.EMI Date: 04-05-2006 Time: 13:57:16

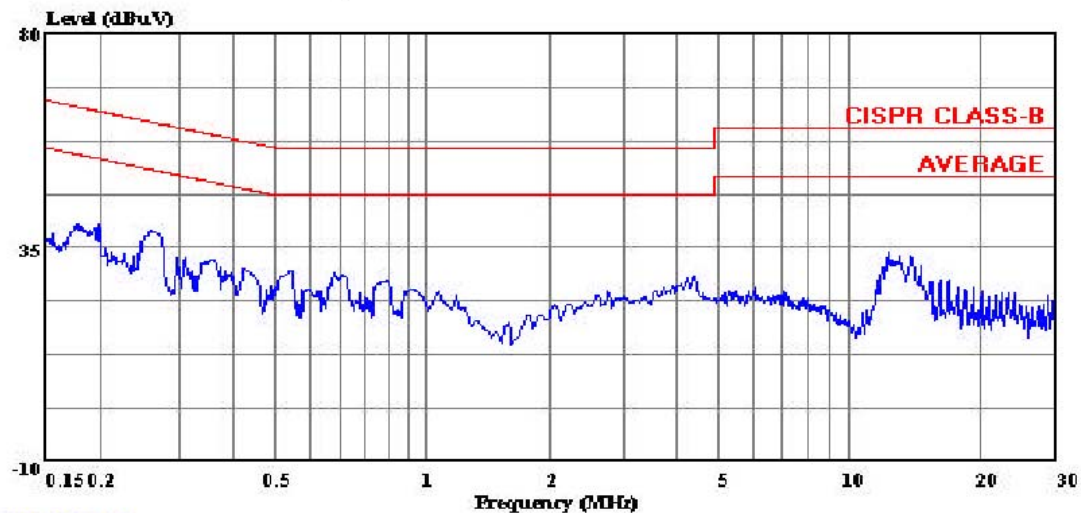

(Auxiliary ATC)


Trace:

Ref Trace:

Condition: CISPR CLASS-B
Test Operator : Vien Tran
Project # : 06U10199
Company : Broadcom
EUT Description : 802.11ag WLAN PCI-E Mini Card
Model : BCM94311MCAG
S/N :
EUT Config : EUT on extended card & laptop
Mode Of Operation: Tx Worst case_11a_5 GHz Band
Target : FCC Class B
Power Source : 115VAC, 60 Hz
: L2: Peak (Black)

8. SETUP PHOTOS

RF CONDUCTED SETUP

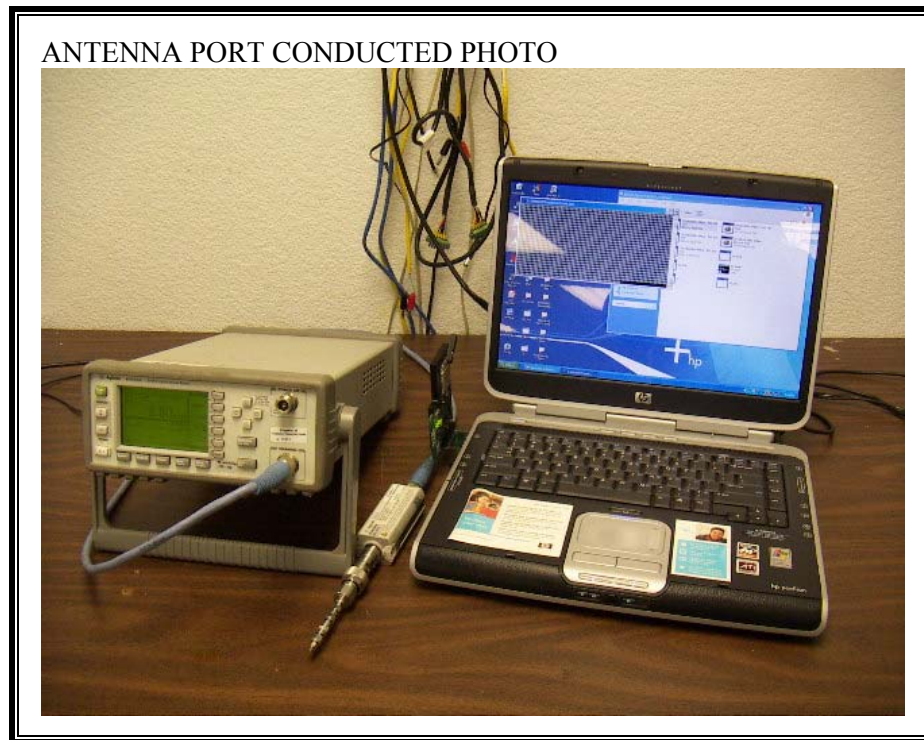

RADIATED RF MEASUREMENT SETUP

RADIATED FRONT PHOTO




RADIATED BACK PHOTO



RADIATED SIDE PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

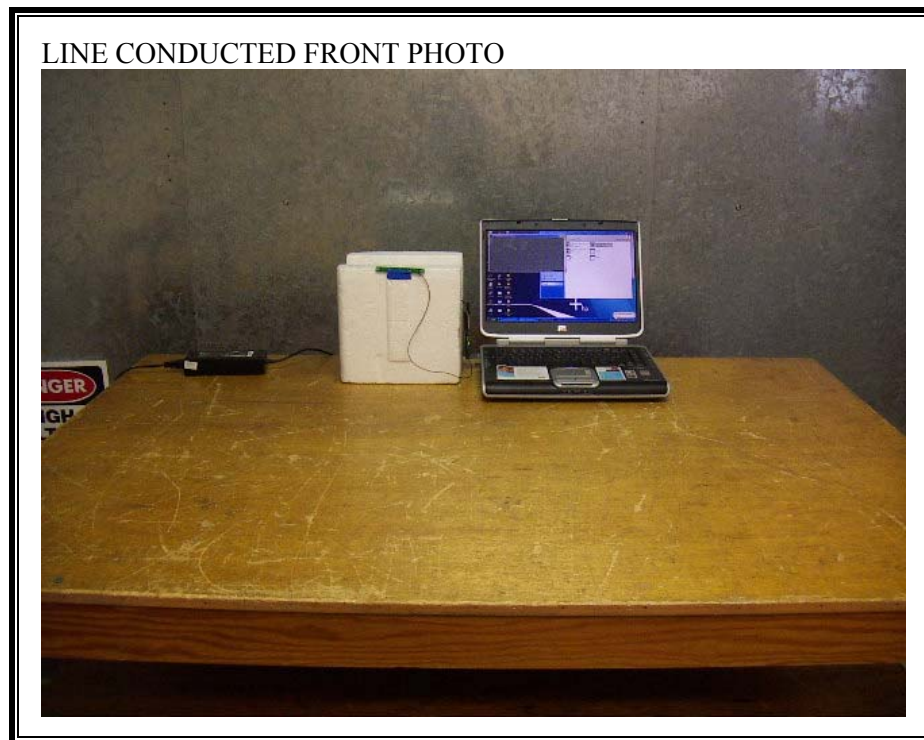

LINE CONDUCTED BACK PHOTO



END OF REPORT