


Type and shape of antenna					
IFA Antenna					
Directional characteristics					
Omni-directional					
Deflection Characteristics of Antenna					
Linear					
Type of connection with transmitter					
antenna shrapnel					
Manufacturer					
Zhejiang Haitong communications electronic Limited by Share Ltd.					
Shenzhen Welchon Communication Technology Co.					
Measuring Organization					
Zhejiang Haitong communications electronic Limited by Share Ltd.					
Shenzhen Welchon Communication Technology Co.					

L

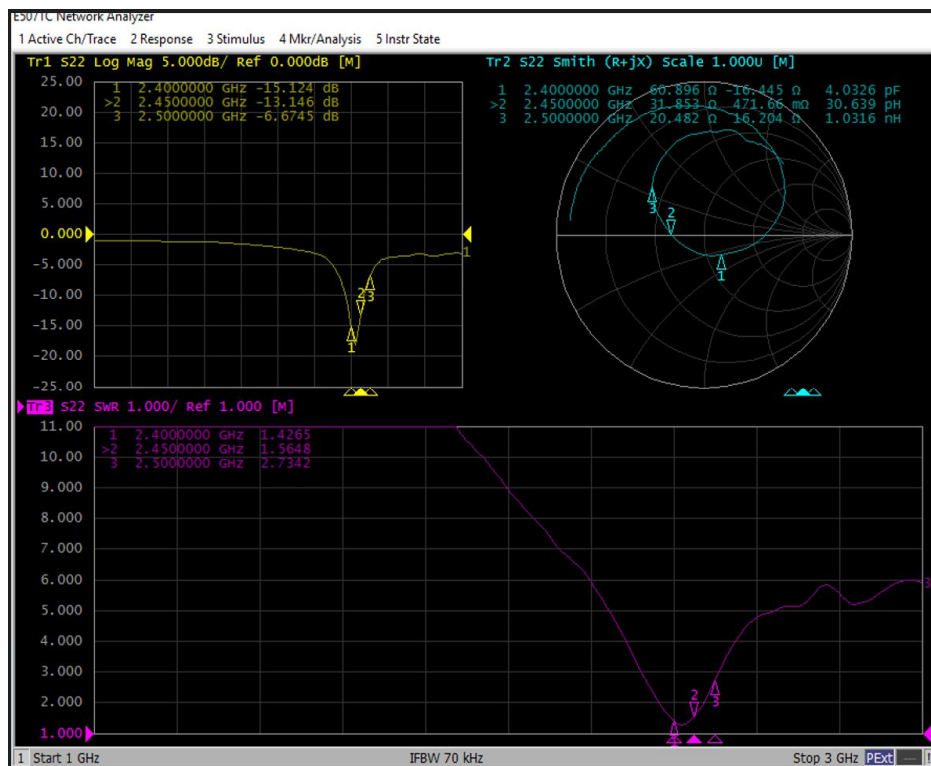


FS





Frequency Efficiency (Efficiency (Gain (dBi)

2300	-11.93	6.41	-6.11
2310	-11.73	6.71	-6.19
2320	-11.51	7.07	-6.38
2330	-11.09	7.79	-6.43
2340	-11.26	7.47	-6.41
2350	-11.07	7.82	-5.92


2360	-10.8	8.31	-5.6
2370	-10.56	8.79	-5.24
2380	-10.46	8.99	-4.81
2390	-10.37	9.19	-4.46
2400	-10.15	9.67	-4.2
2410	-10.32	9.3	-4.51
2420	-9.97	10.06	-4.44
2430	-9.89	10.26	-4.45
2440	-9.7	10.73	-4.28
2450	-9.72	10.67	-4.38
2460	-9.78	10.52	-4.57
2470	-10	10	-4.92
2480	-9.85	10.36	-5.02
2490	-10.11	9.76	-5.39
2500	-10	10.01	-5.37
2510	-9.8	10.47	-5.17
2520	-10.1	9.77	-5.47
2530	-10.13	9.71	-5.54
2540	-10.08	9.81	-5.57
2550	-9.9	10.23	-5.38
2560	-10.13	9.71	-5.56
2570	-10.23	9.49	-5.5
2580	-10.41	9.1	-5.57
2590	-10.66	8.59	-5.73
2600	-11.12	7.72	-6.17

2D/3D图

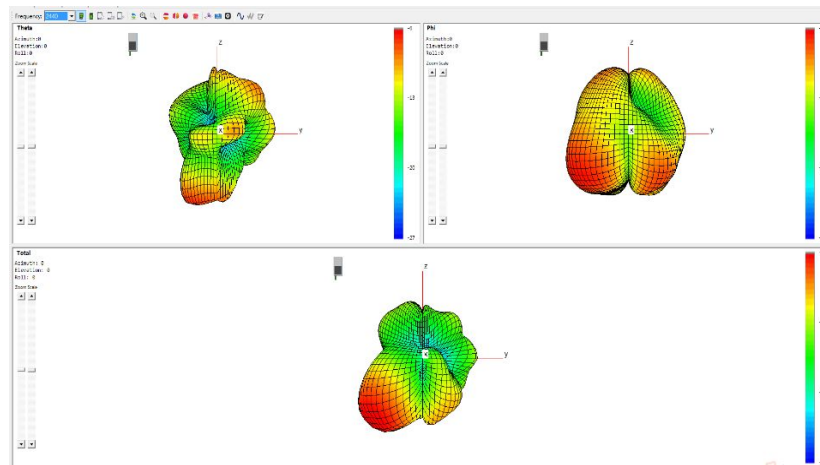

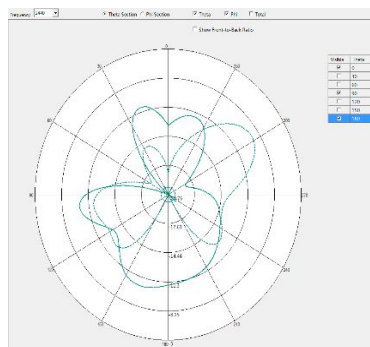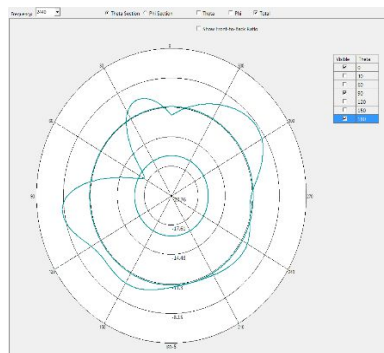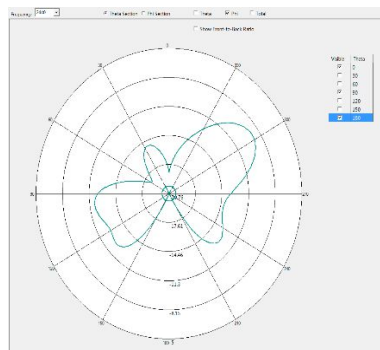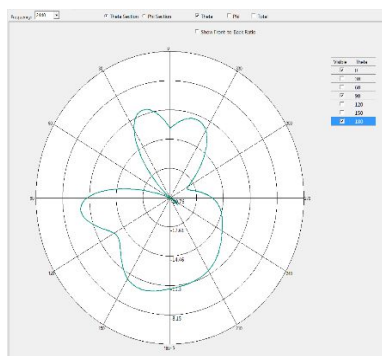

R

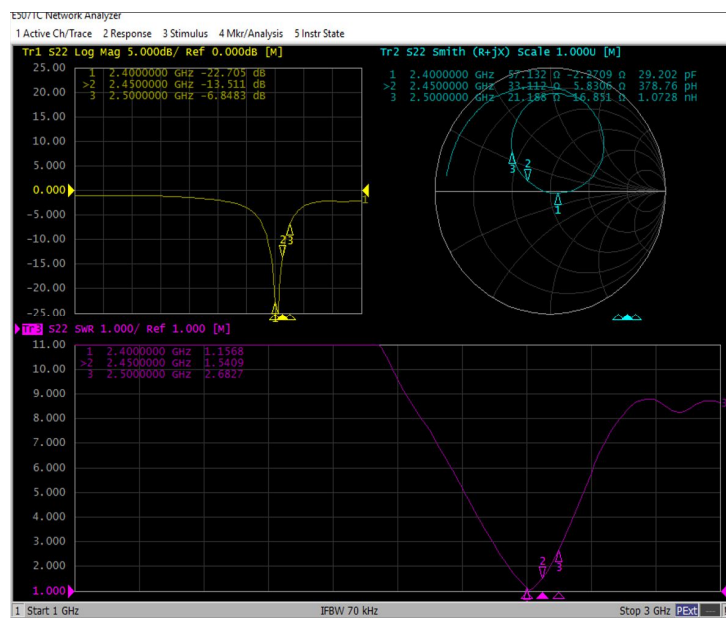

FS

Frequency Efficiency (Efficiency (Gain (dBi)

2300	-10.58	8.75	-3.5
2310	-10.25	9.45	-3.2
2320	-9.9	10.24	-3.01
2330	-9.41	11.46	-2.72
2340	-9.49	11.26	-2.99
2350	-9.24	11.91	-3.12
2360	-8.98	12.65	-3.15
2370	-8.78	13.23	-3.26
2380	-8.75	13.35	-3.62
2390	-8.75	13.34	-3.82
2400	-8.64	13.67	-3.58
2410	-8.93	12.8	-3.93
2420	-8.7	13.48	-3.89
2430	-8.72	13.43	-3.93
2440	-8.61	13.78	-3.79
2450	-8.73	13.38	-3.93
2460	-8.96	12.7	-4.25
2470	-9.38	11.53	-4.57
2480	-9.45	11.34	-4.49
2490	-9.97	10.07	-4.8
2500	-10.14	9.69	-4.75
2510	-10.16	9.63	-4.62
2520	-10.71	8.49	-5.15
2530	-10.94	8.05	-5.56
2540	-11.07	7.81	-5.81
2550	-11.07	7.82	-6.07
2560	-11.44	7.18	-6.83
2570	-11.67	6.81	-7.48
2580	-12.04	6.25	-8.34
2590	-12.53	5.59	-8.83
2600	-13.24	4.74	-9.62

2D/3D

