

## TEST REPORT

**Product** : WIFI+BT Module  
**Trade mark** : GSD  
**Model/Type reference** : WCT3TM2311  
**Serial Number** : N/A  
**Report Number** : EED32L00127302  
**FCC ID** : 2AC23-WCT3T  
**Date of Issue** : Aug. 16, 2019  
**Test Standards** : 47 CFR Part 15Subpart C  
**Test result** : PASS

Prepared for:

**Hui Zhou Gaoshengda Technology Co., LTD**  
**NO.75 Zhongkai Development Area Huizhou, Guangdong, China**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Tested By:

Jay Zheng

Compiled by:

Alex Wu

Jay Zheng

Alex Wu

Reviewed by:

Ware Xin

Approved by:

Kevin Yang

Ware Xin

Kevin Yang

Date:

Aug. 16, 2019

Check No.: 3096342577



## 2 Version

Version No.	Date	Description
00	2019-08-16	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
<b>Band-edge for RF Conducted Emissions</b>	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>Radiated Spurious Emissions</b>	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Restricted bands around fundamental frequency (Radiated Emission)</b>	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.


## 4 Content

<b>1 COVER PAGE</b>	<b>1</b>
<b>2 VERSION</b>	<b>2</b>
<b>3 TEST SUMMARY</b>	<b>3</b>
<b>4 CONTENT</b>	<b>4</b>
<b>5 TEST REQUIREMENT</b>	<b>5</b>
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
<b>6 GENERAL INFORMATION</b>	<b>7</b>
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	8
6.5 TEST LOCATION	8
6.6 DEVIATION FROM STANDARDS	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, $k=2$ )	9
<b>7 EQUIPMENT LIST</b>	<b>10</b>
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>	<b>14</b>
EUT Duty Cycle	15
Appendix A): 6dB Occupied Bandwidth	16
Appendix B): Conducted Peak Output Power	20
Appendix C): Band-edge for RF Conducted Emissions	23
Appendix D): RF Conducted Spurious Emissions	26
Appendix E): Power Spectral Density	31
Appendix F): Antenna Requirement	34
Appendix G): AC Power Line Conducted Emission	35
Appendix H): Restricted bands around fundamental frequency (Radiated)	38
Appendix I) Radiated Spurious Emissions	47
<b>PHOTOGRAPHS OF TEST SETUP</b>	<b>52</b>
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	<b>54</b>

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

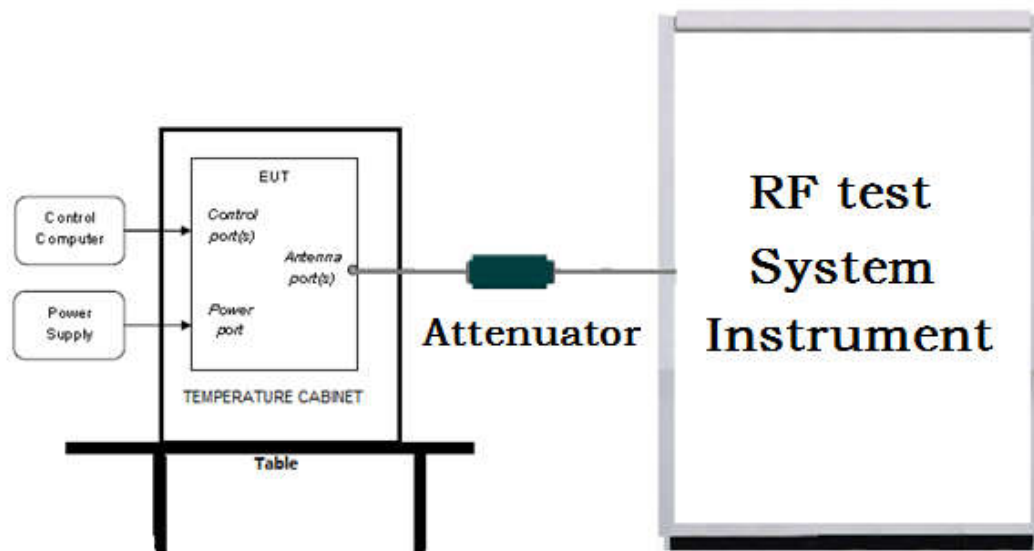

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

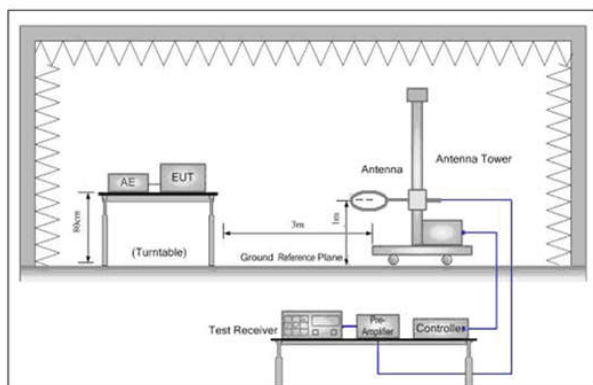


Figure 1. Below 30MHz

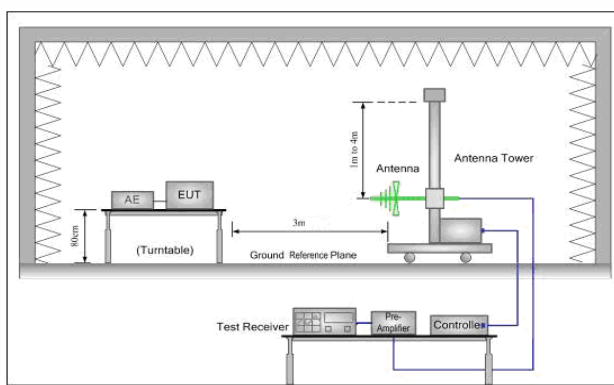


Figure 2. 30MHz to 1GHz


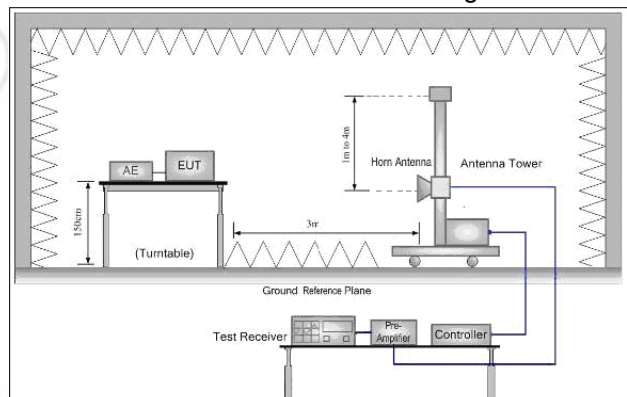


Figure 3. Above 1GHz



### 5.1.3 For Conducted Emissions test setup

#### Conducted Emissions setup

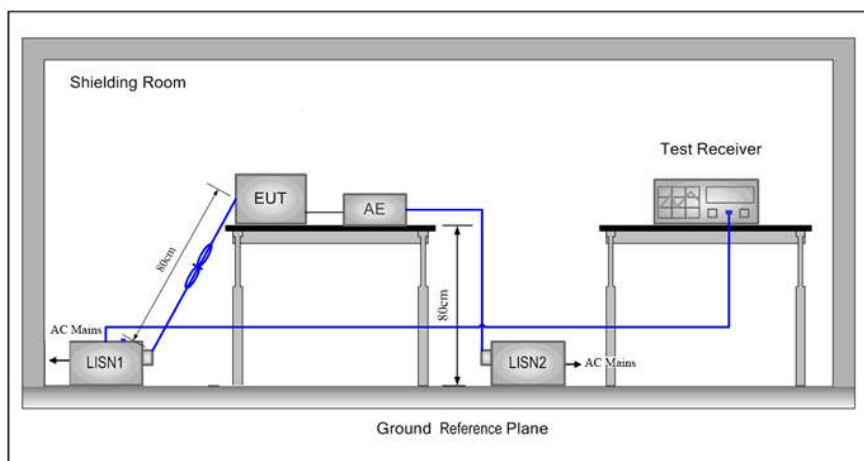

## 5.2 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	58 % RH
Atmospheric Pressure:	1010mbar

## 5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK	2402MHz ~2480 MHz	Channel 1	Channel 20	Channel 40
		2402MHz	2440MHz	2480MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

## 6 General Information

### 6.1 Client Information

Applicant:	Hui Zhou Gaoshengda Technology Co., LTD
Address of Applicant:	NO.75 Zhongkai Development Area Huizhou, Guangdong, China
Manufacturer:	Hui Zhou Gaoshengda Technology Co., LTD
Address of Manufacturer:	NO.75 Zhongkai Development Area Huizhou, Guangdong, China
Factory:	Hui Zhou Gaoshengda Technology Co., LTD
Address of Factory:	NO.75 Zhongkai Development Area Huizhou, Guangdong, China

### 6.2 General Description of EUT

Product Name:	WIFI+BT Module
Model No.(EUT):	WCT3TM2311
Trade mark:	GSD
EUT Supports Radios application:	BT 4.2 Dual mode, 2402-2480MHz
Power Supply:	DC 5V
Sample Received Date:	May. 23, 2019
Sample tested Date:	May. 23, 2019 to Aug. 15, 2019

### 6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	BT 4.2
Modulation Technique:	GFSK
Number of Channel:	40
Test Power Grade:	7
Test Software of EUT:	MT7662 & V1.0.3.14
Antenna Type and Gain:	Type:PIFA Antenna Gain:4.2 dBi
Test Voltage:	DC 5V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

## 6.4 Description of Support Units

The EUT has been tested independently

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

## 6.6 Deviation from Standards

None.

## 6.7 Abnormalities from Standard Conditions

None.

## 6.8 Other Information Requested by the Customer

None.



## 6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-28-2020
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-28-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-28-2020
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
DC Power	Keysight	E3642A	MY54426035	03-01-2019	02-28-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-28-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-2	15860006	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-1	15860004	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-4	158060007	03-01-2019	02-28-2020
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-01-2019	02-28-2020
Temperature/Humidity Indicator	biaozhi	HM10	1804186	10-12-2018	10-11-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-22-2020
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	12-21-2018	12-20-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-24-2020
Microwave Preamplifier	Agilent	8449B	3008A02425	08-21-2018	08-20-2019
Microwave Preamplifier	Tonscend	EMC051845 SE	980380	01-16-2019	01-15-2020
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-25-2018	04-23-2021
Horn Antenna	ETS-LINDGREN	3117	00057410	06-05-2018	06-03-2021
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	374	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041.6041	07-26-2019	07-24-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Spectrum Analyzer	R&S	FSP40	100416	04-28-2019	04-26-2020
Receiver	R&S	ESCI	100435	05-20-2019	05-18-2020
Receiver	R&S	ESCI7	100938-003	11-23-2018	11-22-2019
Multi device Controller	maturo	NCD/070/10711112	---	01-09-2019	01-08-2020
Signal Generator	Agilent	E4438C	MY45095744	03-01-2019	02-28-2020
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-28-2020
Temperature/Humidity Indicator	Shanghai qixiang	HM10	1804298	10-12-2018	10-11-2019
Communication test set	Agilent	E5515C	GB47050534	03-01-2019	02-28-2020
Cable line	Fulai(7M)	SF106	5219/6A	01-09-2019	01-08-2020
Cable line	Fulai(6M)	SF106	5220/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5216/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5217/6A	01-09-2019	01-08-2020
Communication test set	R&S	CMW500	104466	01-18-2019	01-17-2020
High-pass filter	Sinoscite	FL3CX03WG18NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA09CL12-0395-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA08CL12-0393-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA04CL12-0396-002	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA03CL12-0394-001	---	01-09-2019	01-08-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-17-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-25-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-25-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-075	04-25-2018	04-23-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-23-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-23-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-23-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-829	04-25-2018	04-23-2021
Communication Antenna	Schwarzbeck	CLSA 0110L	1014	02-14-2019	02-13-2020
Biconical antenna	Schwarzbeck	VUBA 9117	9117-381	04-25-2018	04-23-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-08-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	05-20-2020
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-06-2020
Preamplifier	Agilent	8449B	3008A02425	08-21-2018	08-20-2019
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	05-01-2019	04-30-2020
Signal Generator	KEYSIGHT	E8257D	MY53401106	03-01-2019	02-28-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-15-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-08-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2019	01-08-2020

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-18-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-12-2020
Communication test set	Agilent	E5515C	GB47050 534	03-01-2019	02-28-2020
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
LISN	R&S	ENV216	100098	05-08-2019	05-06-2020
LISN	schwarzbeck	NNLK8121	8121-529	05-08-2019	05-06-2020
Voltage Probe	R&S	ESH2-Z3 0299.7810.5 6	100042	06-13-2017	06-11-2020
Current Probe	R&S	EZ-17 816.2063.03	100106	05-20-2019	05-18-2020
ISN	TESEQ	ISN T800	30297	01-16-2019	01-15-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-18-2020



## 8 Radio Technical Requirements Specification

### Reference documents for testing:


No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

## EUT Duty Cycle

Duty Cycle			
Configuration	TX ON(ms)	TX ALL(ms)	Duty Cycle(%)
BLE	0.393	0.625	62.88%

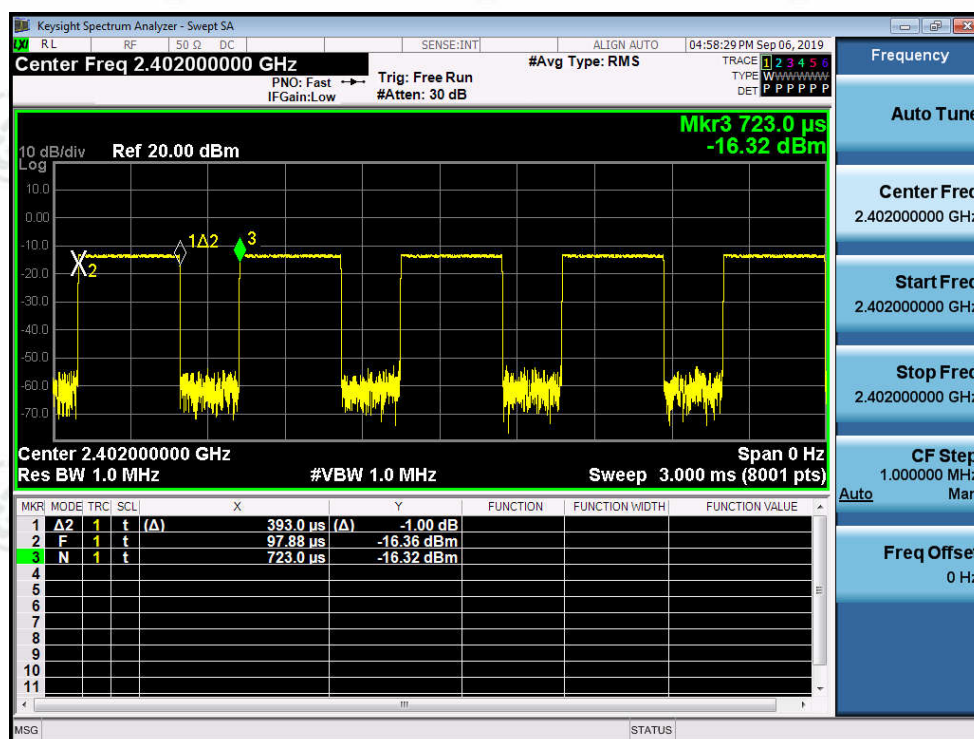

## Appendix A): 6dB Occupied Bandwidth

### Test Limit

According to §15.247(a)(2) and RSS-247 section 5.2(a)

### 6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


**Occupied Bandwidth(99%) :** For reporting purposes only.

### Test Procedure

Test method Refer as KDB 558074 D01 v04, section 8.1 and ANSI 63.10:2013 clause 6.9.2 & 6.9.3.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 100kHz, VBW = 300kHz and Detector = Peak, to measurement 6 dB Bandwidth and 99% Bandwidth.
4. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

### Test Setup

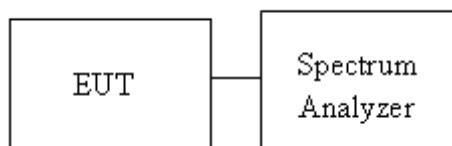

### Test Result

Mode	Channel	6dB Bandwidth [MHz]	99% OBW[MHz]	Verdict
BLE	LCH	0.7223	1.0332	PASS
BLE	MCH	0.7256	1.0347	PASS
BLE	HCH	0.7220	1.0339	PASS

## Test Graphs





## 6DB Bandwidth

Graphs	
LCH	 <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.6 dB Ref 15.00 dBm</p> <p>Center 2.402 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth <b>1.0530 MHz</b></p> <p>Total Power 11.8 dBm</p> <p>Transmit Freq Error -2.921 kHz</p> <p>x dB Bandwidth 722.3 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
MCH	 <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.440000000 GHz</p> <p>Ref Offset 19.77 dB Ref 15.00 dBm</p> <p>Center 2.44 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth <b>1.0575 MHz</b></p> <p>Total Power 7.69 dBm</p> <p>Transmit Freq Error -5.089 kHz</p> <p>x dB Bandwidth 725.6 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
HCH	 <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.77 dB Ref 15.00 dBm</p> <p>Center 2.48 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth <b>1.0618 MHz</b></p> <p>Total Power 5.45 dBm</p> <p>Transmit Freq Error -4.163 kHz</p> <p>x dB Bandwidth 722.0 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>

## Appendix B): Conducted Peak Output Power

### Test Limit

According to §15.247(b) and RSS-247 section 5.4(d)

### Peak output power:

For systems using digital modulation in the 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi. If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi: 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi [ Limit = 30 – (DG – 6) ] <input type="checkbox"/> Point-to-point operation
-------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

### Test Procedure


Test method Refer as KDB 558074 D01 v04, section 9.1.2.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

### Test Result

Mode	Channel	Conduct Peak Power[dBm]	Verdict
BLE	LCH	0.02	PASS
BLE	MCH	-0.583	PASS
BLE	HCH	-1.22	PASS

## Test Graphs

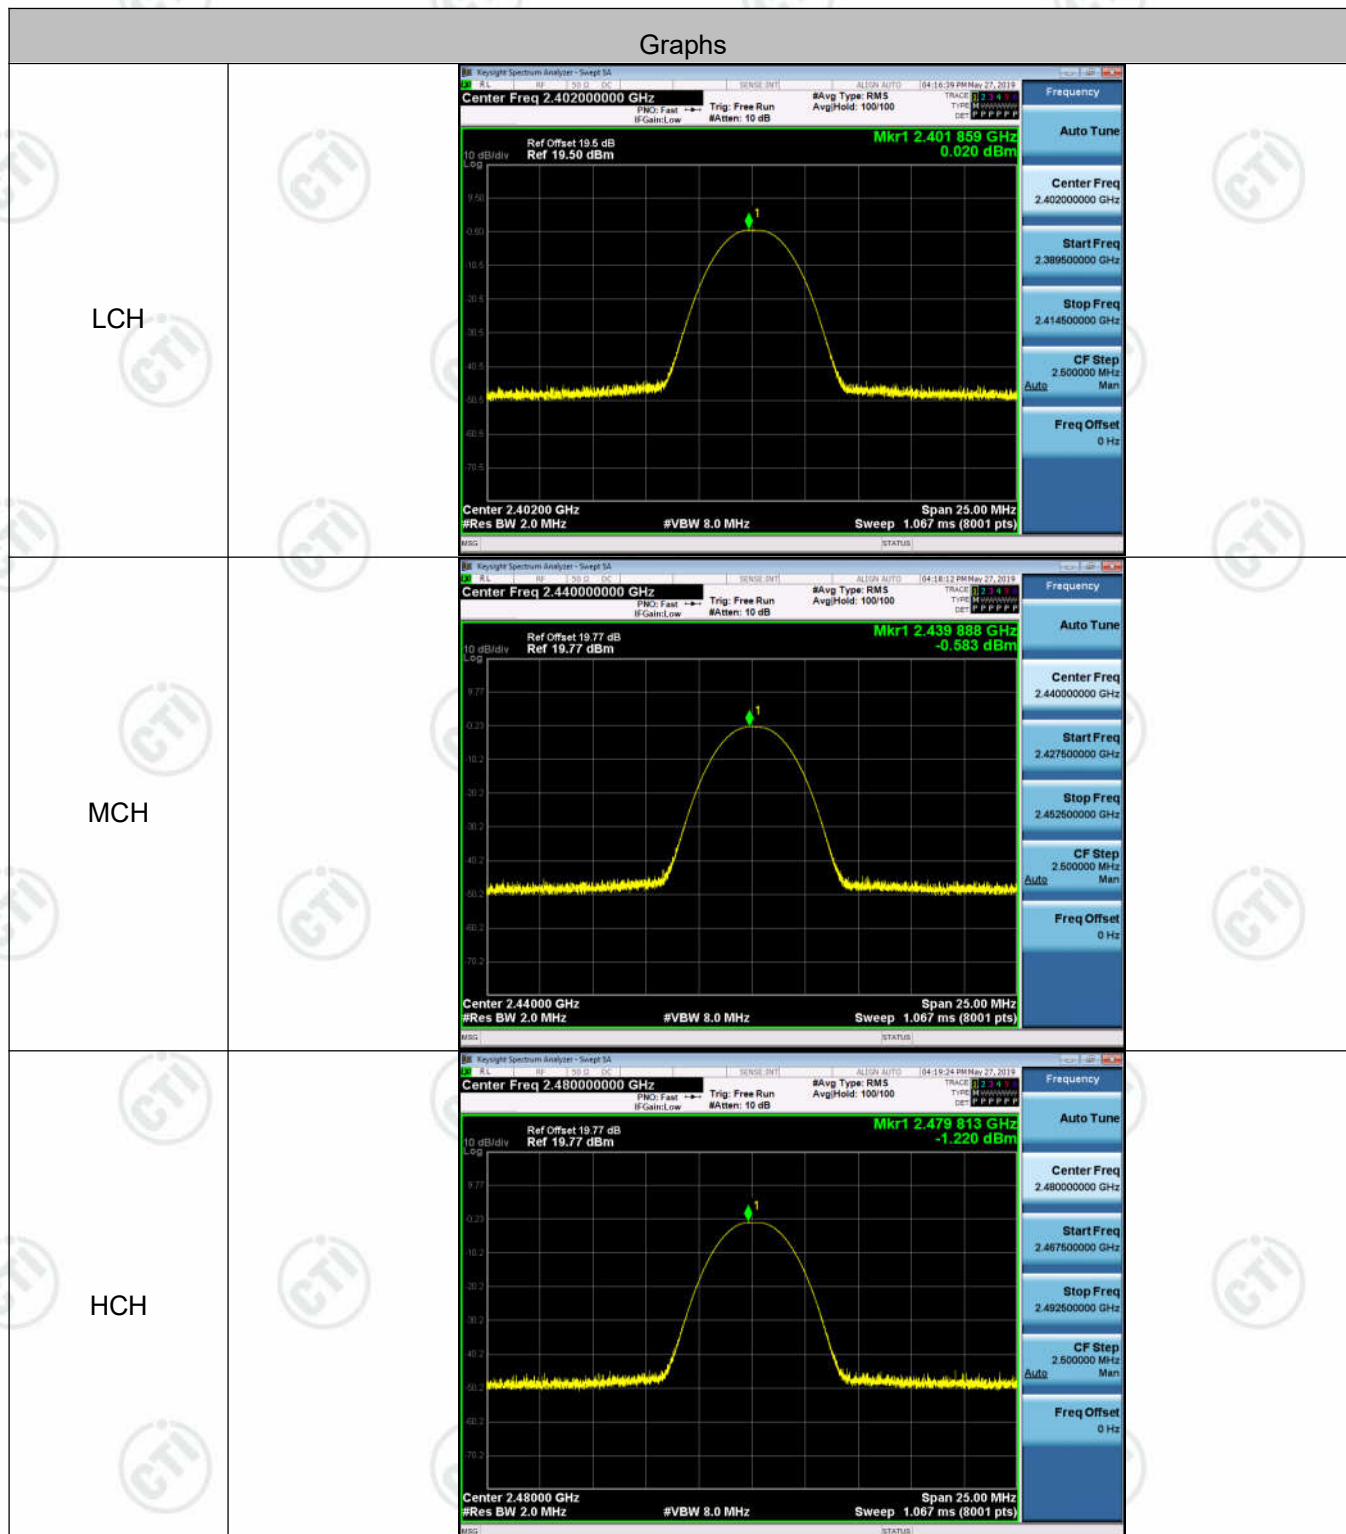

## Appendix C): Band-edge for RF Conducted Emissions

### Test Limit

According to §15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### Test Setup





**Result Table**

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	-0.883	-59.377	-20.88	PASS
BLE	HCH	-2.043	-58.922	-22.04	PASS

## Graphs



## Appendix D): RF Conducted Spurious Emissions

### Test Limit

According to §15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the authorized frequency band,

Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


### Test Setup




**Result Table**


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
BLE	LCH	-1.156	<Limit	PASS
BLE	MCH	-1.796	<Limit	PASS
BLE	HCH	-2.301	<Limit	PASS

## Test Graphs

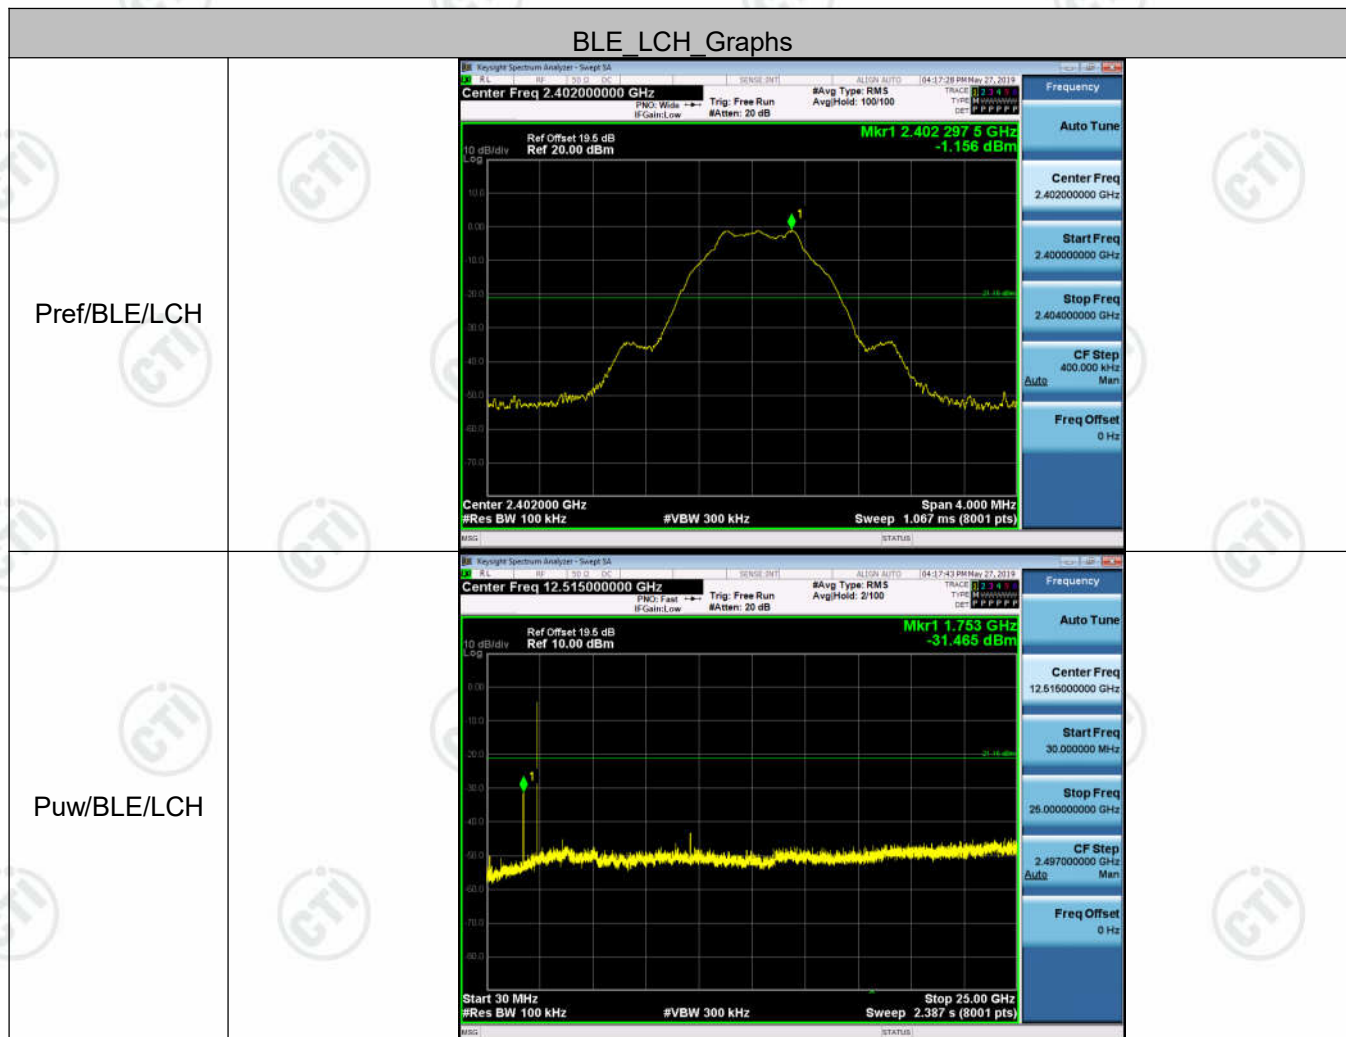



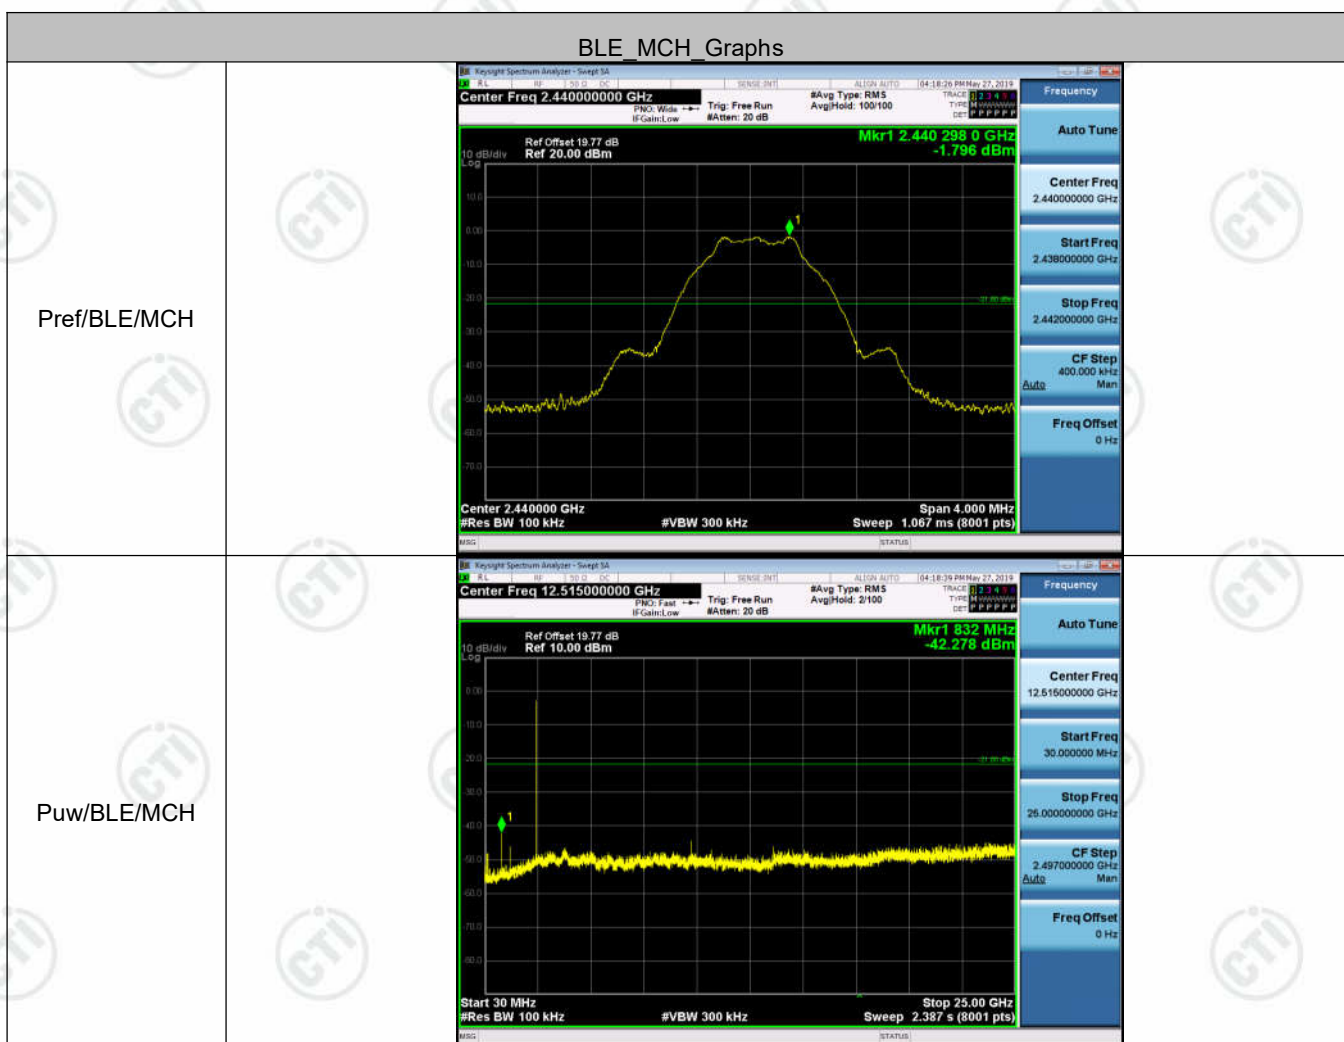

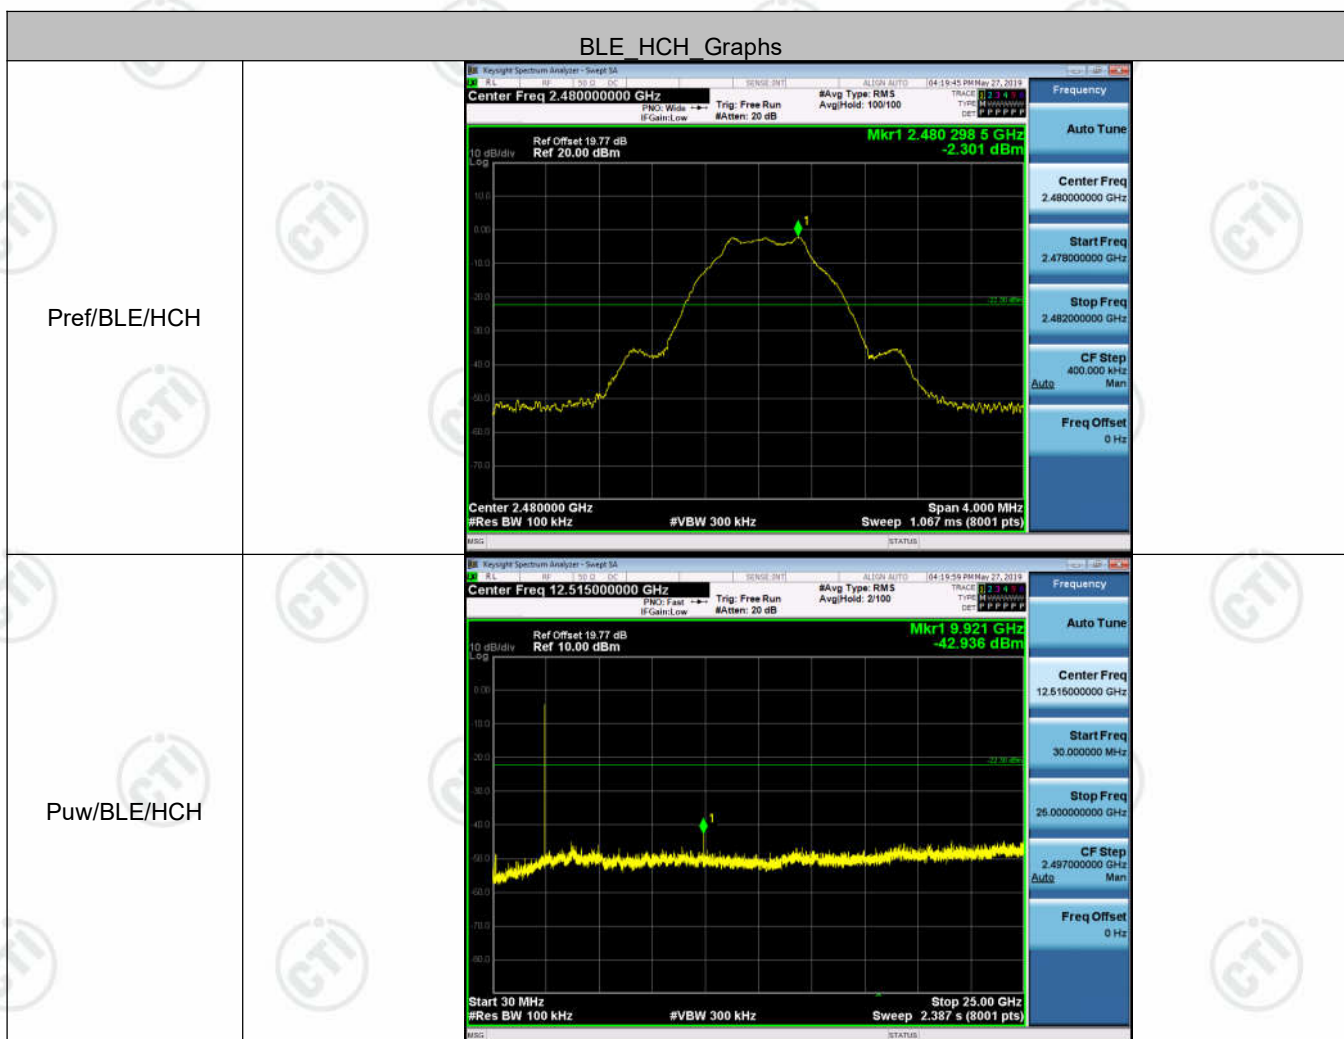

## Appendix E): Power Spectral Density

### Test Limit

According to §15.247(e) and RSS-247 section 5.2(b)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi: 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi [ Limit = 8 – (DG – 6) ] <input type="checkbox"/> Point-to-point operation:
-------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

### Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 10.2


1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.

Measure and record the result of power spectral density. in the test report.

**Result Table**

Mode	Channel	PSD [dBm]	Verdict
BLE	LCH	-15.515	PASS
BLE	MCH	-16.015	PASS
BLE	HCH	-16.603	PASS

## Test Graphs

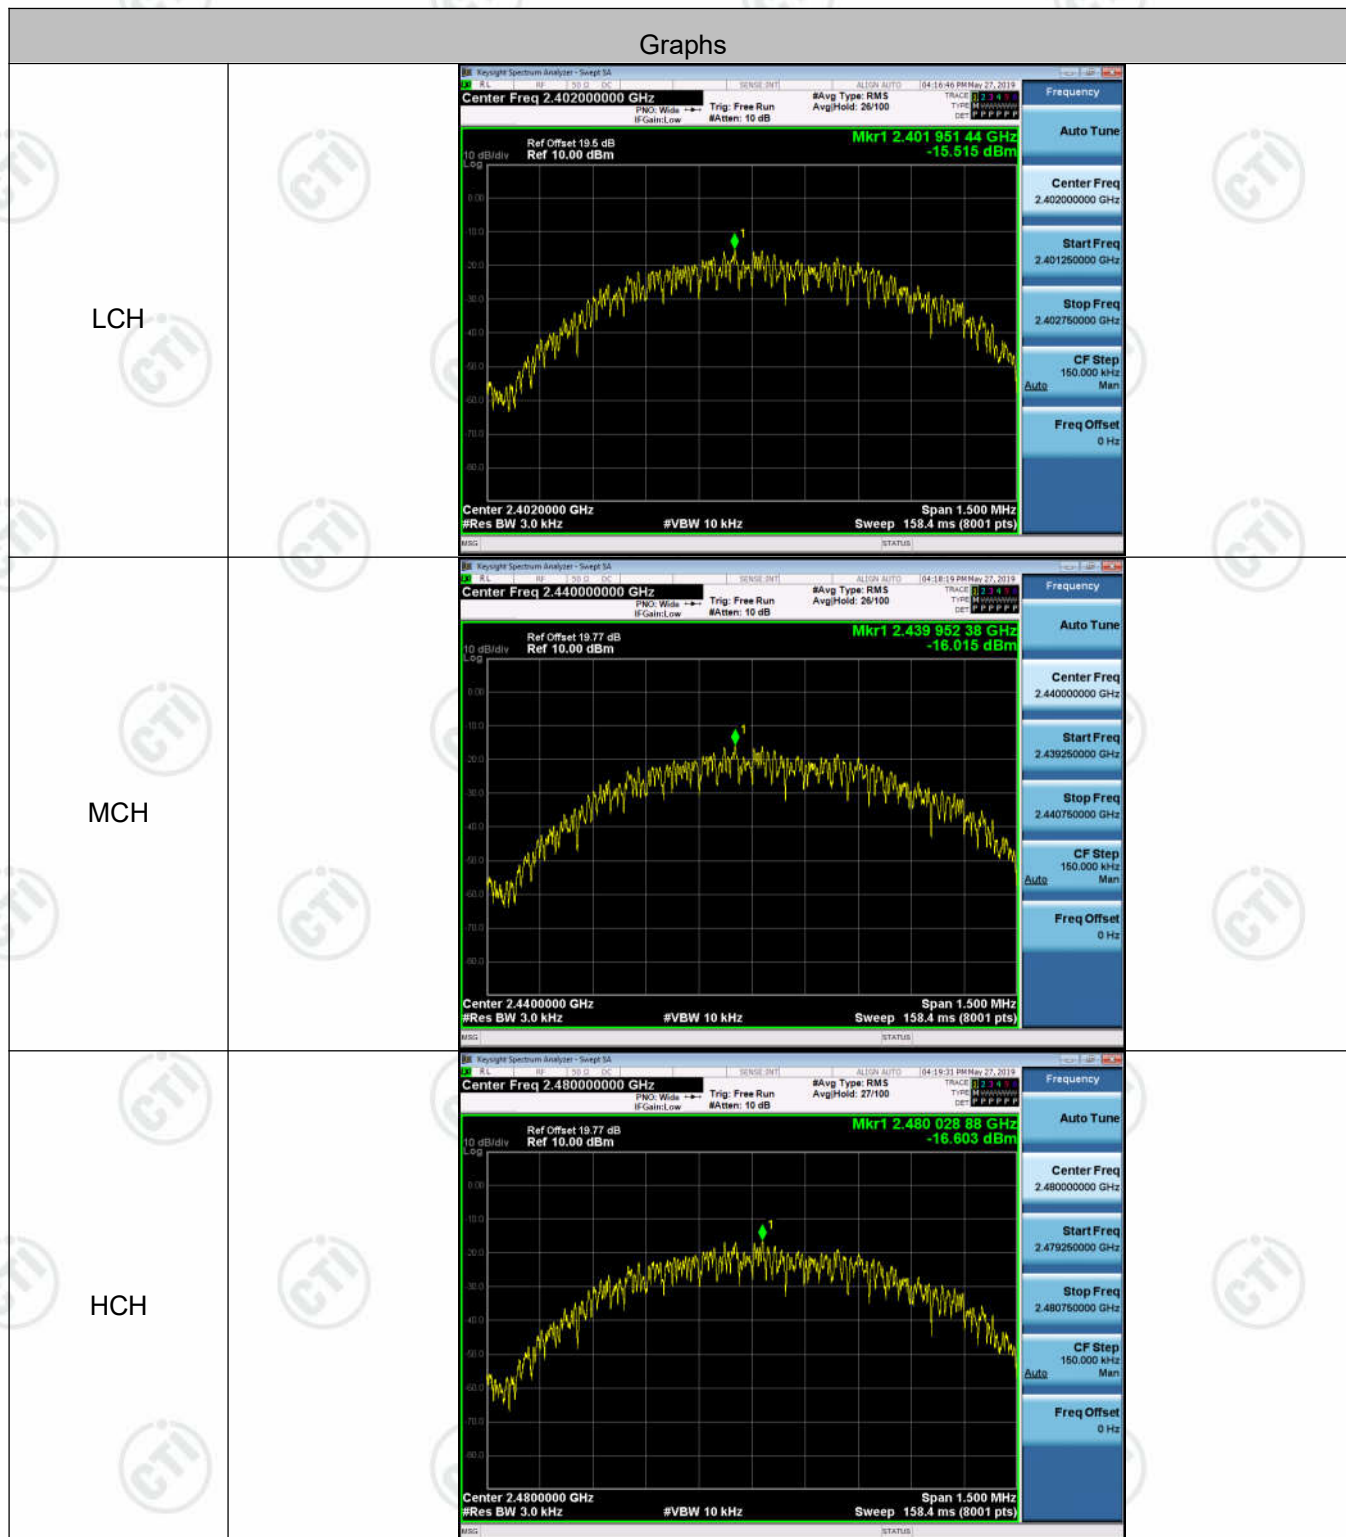



## Appendix F): Antenna Requirement


### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

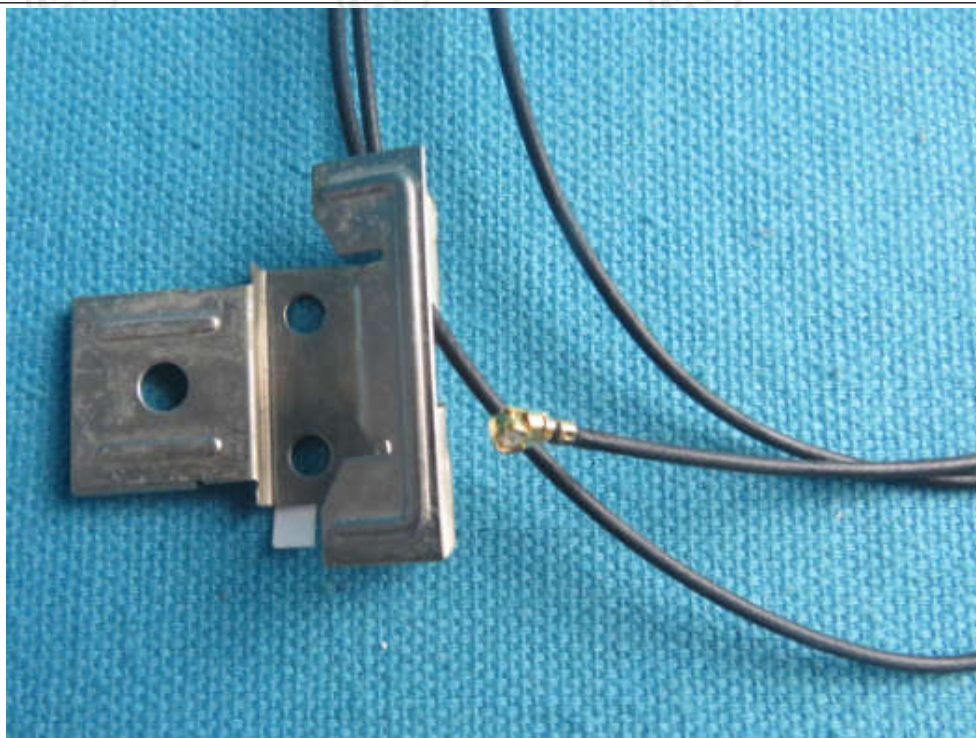

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 4.2 dBi.

## Appendix G): AC Power Line Conducted Emission

Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


**Product** : WIFI+BT Module

**Model/Type reference** : WCT3TM2311

**Temperature** : 21°C

**Humidity** : 51%

Live line:

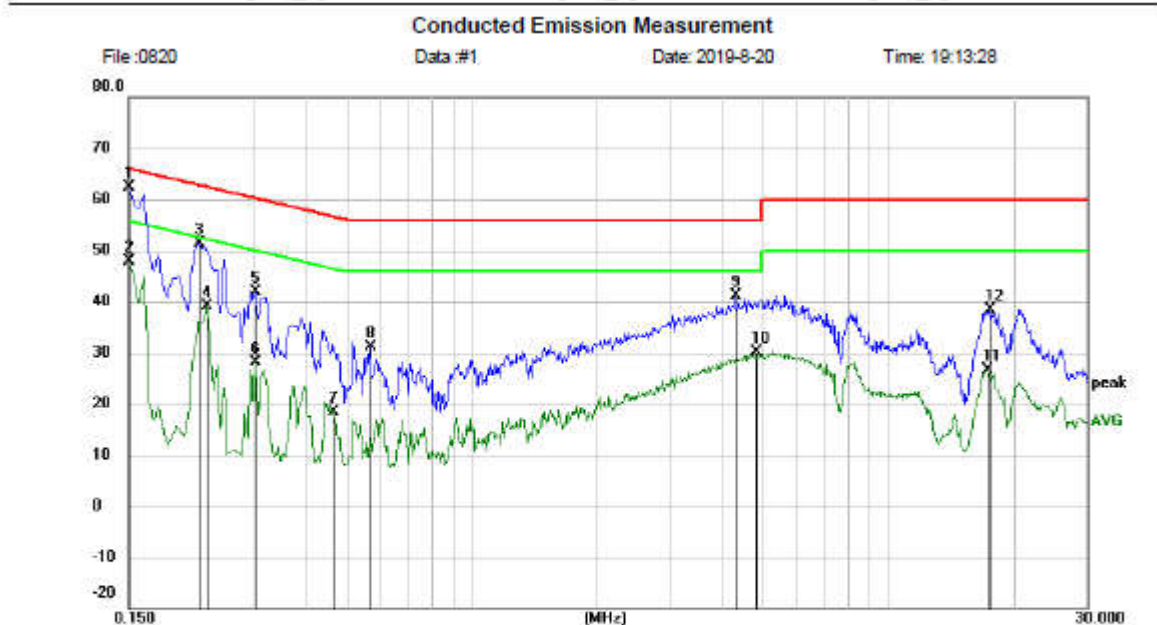

Site: LAB

Phase: L1

Temperature: 21

Limit: FCC Class B CE(QP)

Power: AC120/60Hz

Humidity: 51 %

EUT:

M/N:

Mode: ON

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1500	52.48	9.97	62.45	66.00	-3.55	peak	
2		0.1500	37.92	9.97	47.89	56.00	-8.11	AVG	
3		0.2220	41.36	10.04	51.40	62.74	-11.34	peak	
4		0.2310	29.21	10.04	39.25	52.41	-13.16	AVG	
5		0.3030	31.87	10.10	41.97	60.16	-18.19	peak	
6		0.3030	18.14	10.10	28.24	50.16	-21.92	AVG	
7		0.4650	8.29	10.00	18.29	46.60	-28.31	AVG	
8		0.5685	21.04	10.08	31.12	56.00	-24.88	peak	
9		4.2945	31.20	9.83	41.03	56.00	-14.97	peak	
10		4.8210	20.34	9.83	30.17	46.00	-15.83	AVG	
11		17.2455	16.61	9.96	26.57	50.00	-23.43	AVG	
12		17.5605	28.43	9.95	38.38	60.00	-21.62	peak	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)


File :0820\Data :#1

Page: 1

Engineer Signature:



Neutral line:

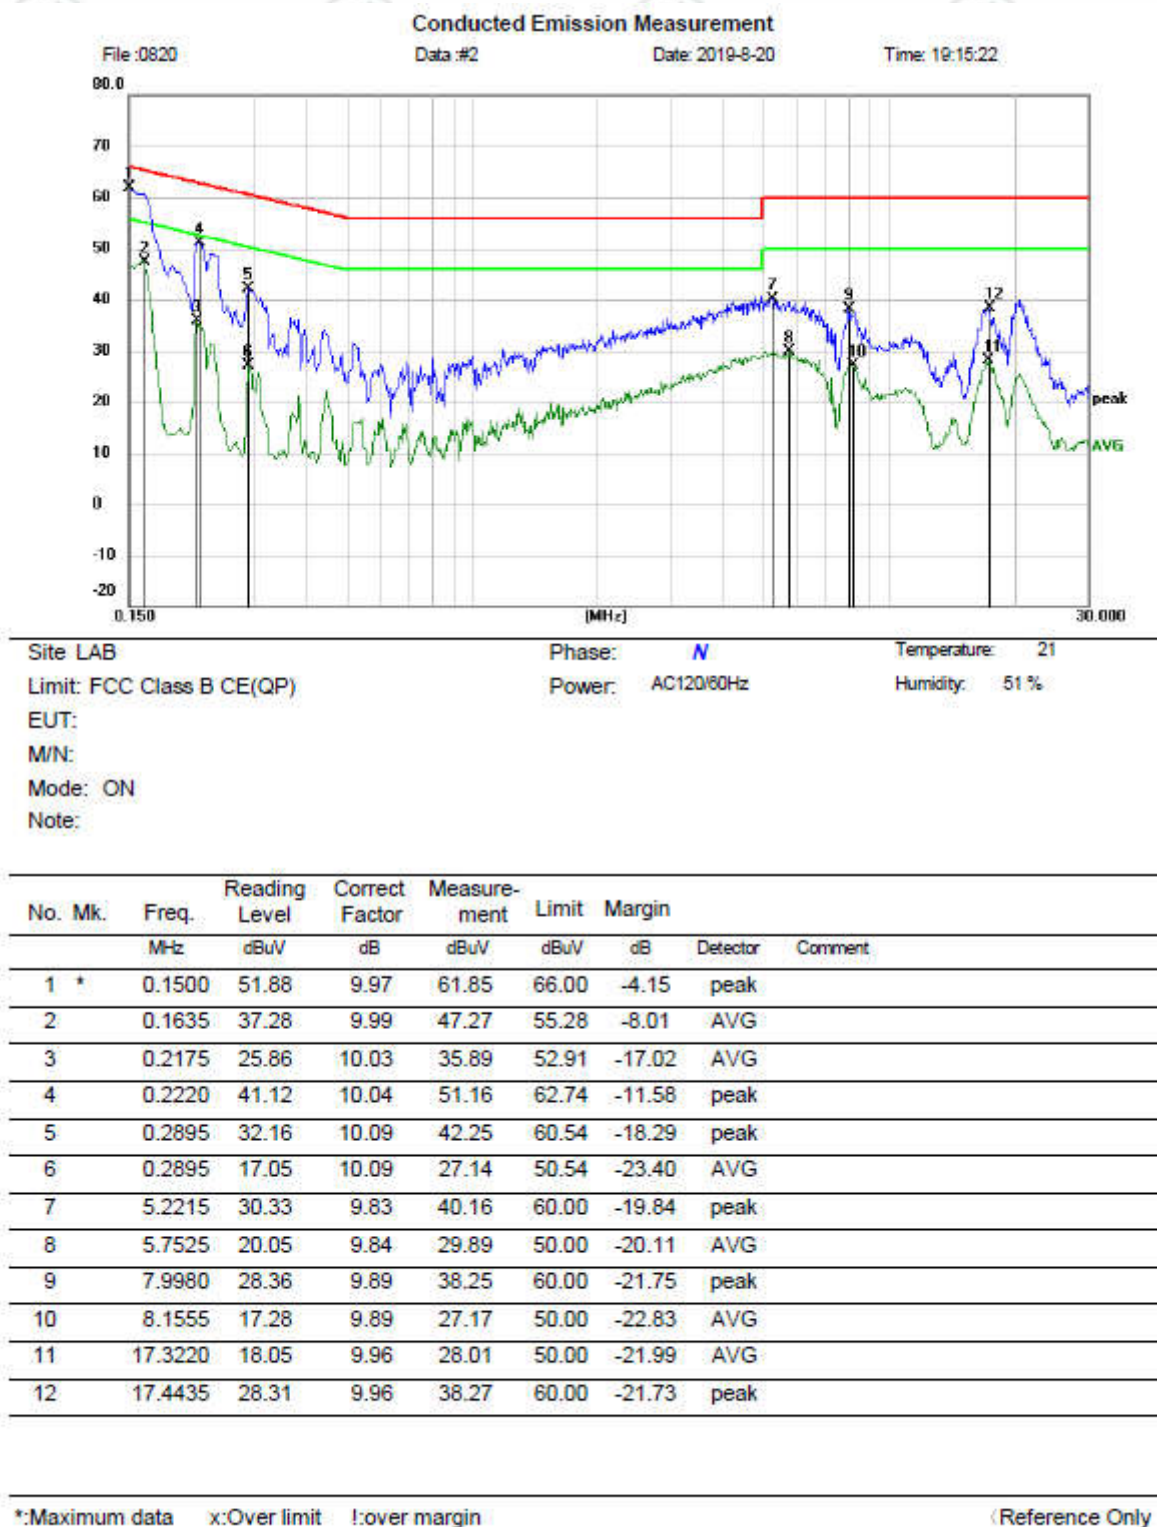

File :0820\Data :#2

Page: 1

Engineer Signature:

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

## Appendix H): Restricted bands around fundamental frequency (Radiated)


Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p><b>Below 1GHz test procedure as below:</b></p> <p>Test method Refer as KDB 558074 D01 v04, Section 12.1</p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>. Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
Limit:	Frequency	Limit (dBμV/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		



Test plot as follows:

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

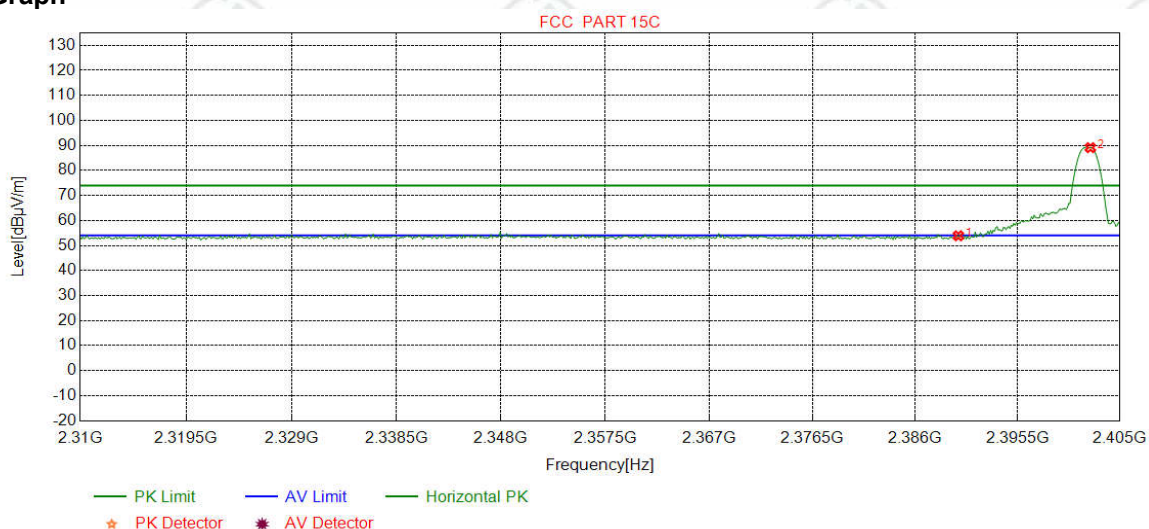

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2390.0000	32.25	13.37	-42.44	50.71	53.89	74.00	20.11	Horizontal
2	2402.2653	32.26	13.31	-42.43	85.97	89.11	74.00	-15.11	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	PK		


### Test Graph

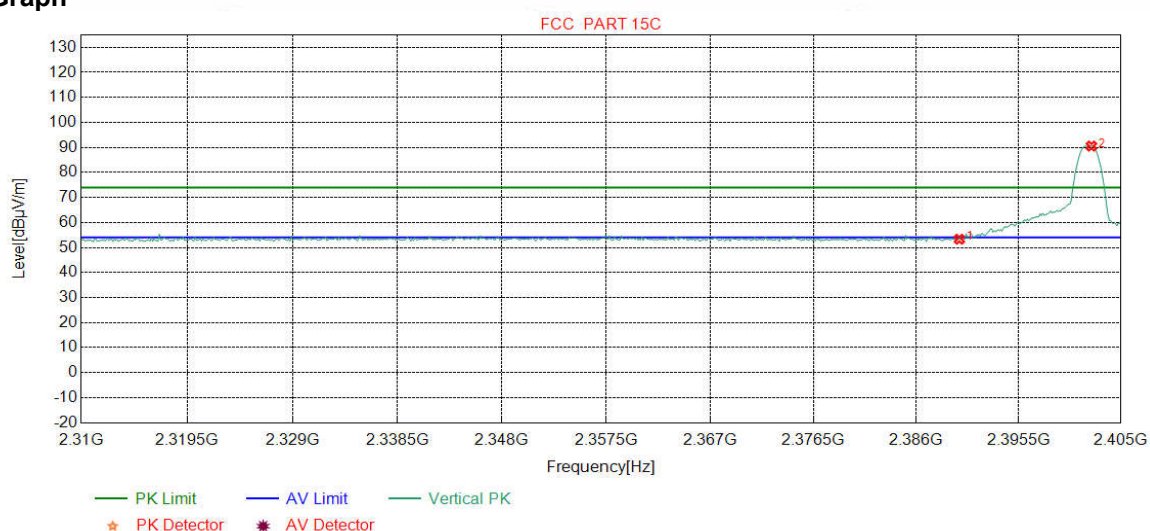

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2390.0000	32.25	13.37	-42.44	50.14	53.32	74.00	20.68	Vertical
2	2402.2653	32.26	13.31	-42.43	87.41	90.55	74.00	-16.55	Vertical

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

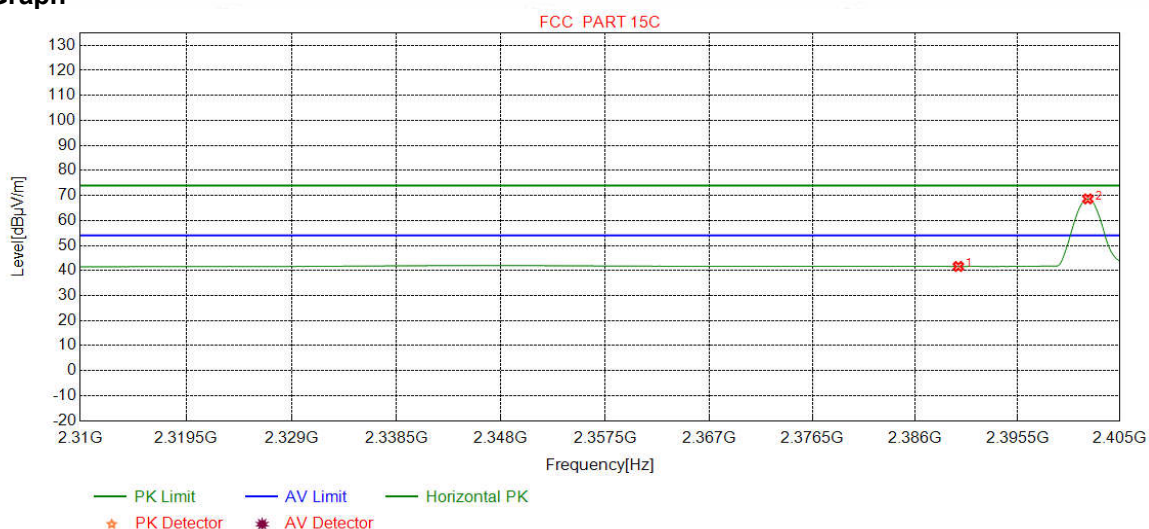

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2390.0000	32.25	13.37	-42.44	38.45	41.63	54.00	12.37	Horizontal
2	2402.0275	32.26	13.31	-42.43	65.49	68.63	54.00	-14.63	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

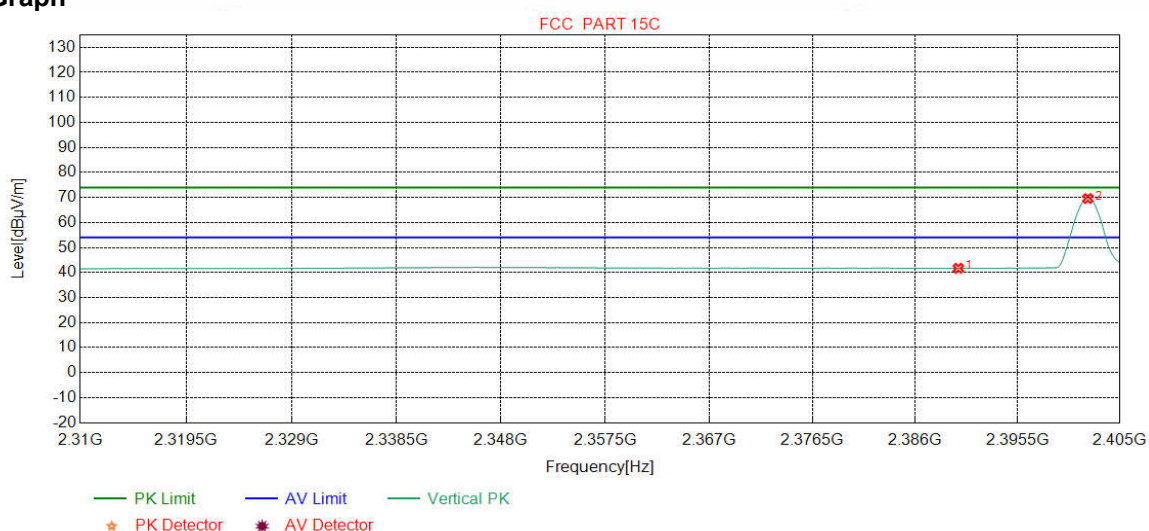

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2390.0000	32.25	13.37	-42.44	38.52	41.70	54.00	12.30	Vertical
2	2402.0275	32.26	13.31	-42.43	66.43	69.57	54.00	-15.57	Vertical

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	PK		

### Test Graph

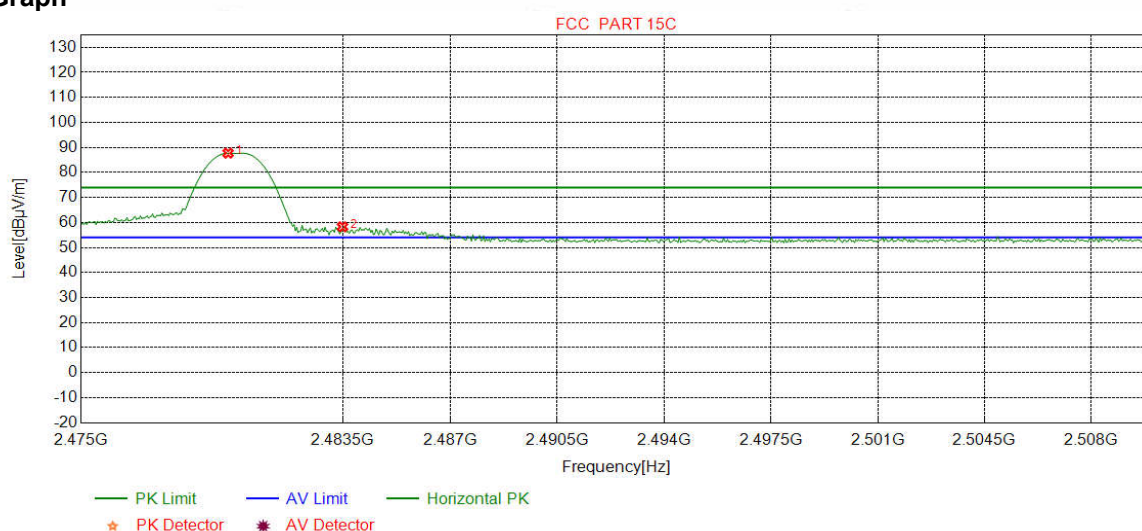


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2479.7747	32.37	13.39	-42.39	84.33	87.70	74.00	-13.70	Horizontal
2	2483.5000	32.38	13.38	-42.40	54.92	58.28	74.00	15.72	Horizontal



Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

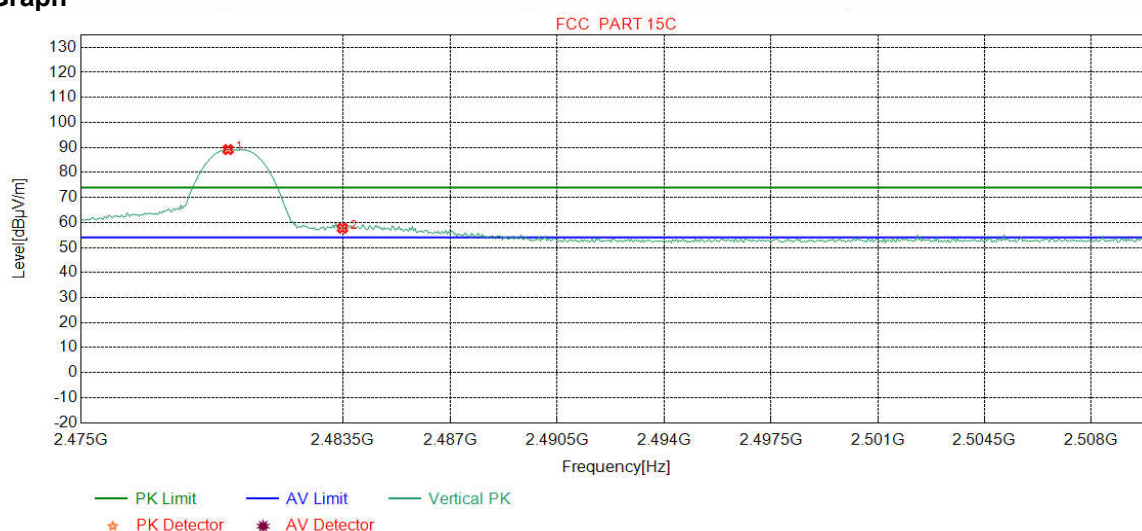

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2479.7747	32.37	13.39	-42.39	85.76	89.13	74.00	-15.13	Vertical
2	2483.5000	32.38	13.38	-42.40	54.35	57.71	74.00	16.29	Vertical

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	AV		


### Test Graph

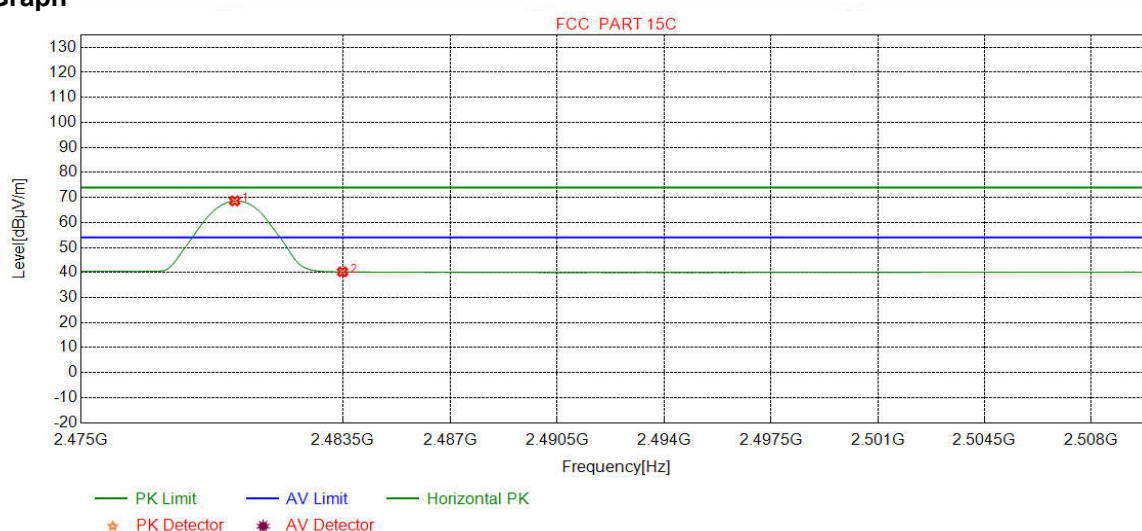

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2479.9937	32.37	13.39	-42.39	65.24	68.61	54.00	-14.61	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.89	40.25	54.00	13.75	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	AV		

### Test Graph

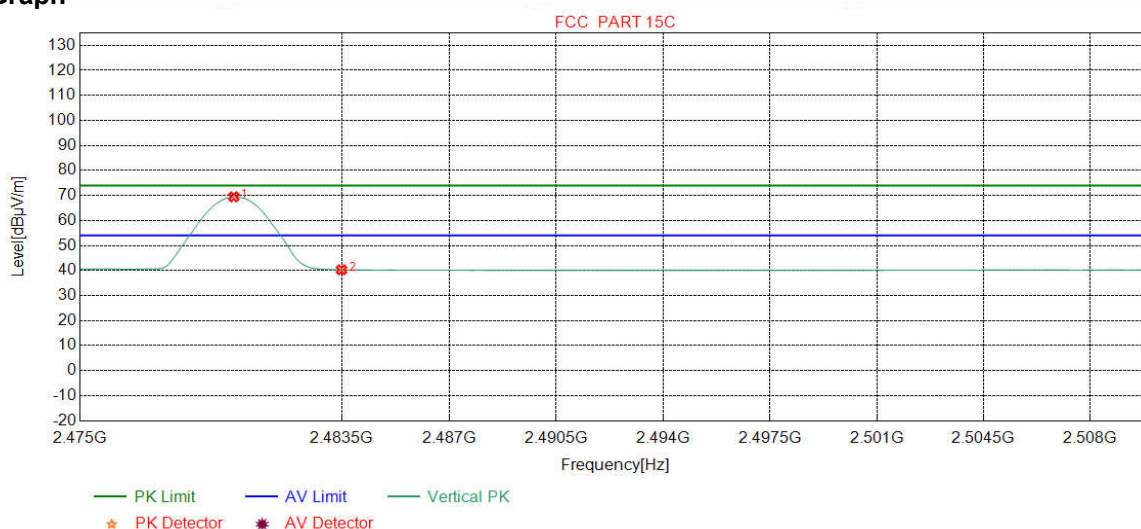

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2479.9937	32.37	13.39	-42.39	66.07	69.44	54.00	-15.44	Vertical
2	2483.5000	32.38	13.38	-42.40	36.93	40.29	54.00	13.71	Vertical

### Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

## Appendix I) Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below: Test method Refer as KDB 558074 D01 v04, Section 12.1 a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Above 1GHz test procedure as below: g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter). h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

## Radiated Spurious Emissions test Data:

**Product** : WIFI+BT Module      **Model/Type reference** : WCT3TM2311  
**Temperature** : 24℃      **Humidity** : 54%

### Radiated Emission below 1GHz

Mode:		GFSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	245.5556	12.08	1.86	-31.89	60.15	42.20	46.00	3.80	Pass	H
2	260.1070	12.40	1.92	-31.87	59.11	41.56	46.00	4.44	Pass	H
3	354.8855	14.41	2.25	-31.86	47.01	31.81	46.00	14.19	Pass	H
4	480.0280	16.68	2.61	-31.90	45.41	32.80	46.00	13.20	Pass	H
5	649.0189	19.39	3.10	-32.07	41.65	32.07	46.00	13.93	Pass	H
6	719.2539	20.01	3.22	-32.08	48.30	39.45	46.00	6.55	Pass	H
7	208.9829	11.13	1.71	-31.94	49.16	30.06	43.50	13.44	Pass	V
8	246.9137	12.12	1.87	-31.90	56.92	39.01	46.00	6.99	Pass	V
9	261.2711	12.43	1.93	-31.88	55.12	37.60	46.00	8.40	Pass	V
10	373.8994	14.83	2.30	-31.88	41.99	27.24	46.00	18.76	Pass	V
11	480.0280	16.68	2.61	-31.90	39.89	27.28	46.00	18.72	Pass	V
12	720.7091	20.03	3.23	-32.08	46.48	37.66	46.00	8.34	Pass	V

Mode:		GFSK Transmitting				Channel:		2440		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	132.4422	7.58	1.34	-32.01	55.11	32.02	43.50	11.48	Pass	H
2	246.6227	12.11	1.87	-31.90	59.81	41.89	46.00	4.11	Pass	H
3	260.1070	12.40	1.92	-31.87	59.12	41.57	46.00	4.43	Pass	H
4	366.6237	14.67	2.28	-31.86	45.82	30.91	46.00	15.09	Pass	H
5	479.2519	16.67	2.61	-31.90	45.67	33.05	46.00	12.95	Pass	H
6	720.3210	20.02	3.22	-32.07	48.70	39.87	46.00	6.13	Pass	H
7	247.6898	12.14	1.87	-31.90	56.86	38.97	46.00	7.03	Pass	V
8	260.1070	12.40	1.92	-31.87	55.12	37.57	46.00	8.43	Pass	V
9	399.8980	15.40	2.38	-31.76	42.21	28.23	46.00	17.77	Pass	V
10	480.0280	16.68	2.61	-31.90	39.93	27.32	46.00	18.68	Pass	V
11	721.8732	20.04	3.23	-32.07	46.53	37.73	46.00	8.27	Pass	V
12	895.9086	22.05	3.59	-31.59	40.97	35.02	46.00	10.98	Pass	V



Mode:		GFSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	133.6064	7.52	1.35	-32.01	55.02	31.88	43.50	11.62	Pass	H
2	247.3987	12.13	1.87	-31.90	59.98	42.08	46.00	3.92	Pass	H
3	260.8831	12.42	1.92	-31.87	58.94	41.41	46.00	4.59	Pass	H
4	354.9825	14.41	2.25	-31.86	47.07	31.87	46.00	14.13	Pass	H
5	479.2519	16.67	2.61	-31.90	45.46	32.84	46.00	13.16	Pass	H
6	720.3210	20.02	3.22	-32.07	48.43	39.60	46.00	6.40	Pass	H
7	199.8640	10.89	1.67	-31.94	50.78	31.40	43.50	12.10	Pass	V
8	246.9137	12.12	1.87	-31.90	56.79	38.88	46.00	7.12	Pass	V
9	260.8831	12.42	1.92	-31.87	55.10	37.57	46.00	8.43	Pass	V
10	375.0635	14.85	2.31	-31.88	40.93	26.21	46.00	19.79	Pass	V
11	478.5729	16.66	2.61	-31.90	40.14	27.51	46.00	18.49	Pass	V
12	720.0300	20.02	3.22	-32.07	46.89	38.06	46.00	7.94	Pass	V

**Transmitter Emission above 1GHz**

Mode:		GFSK Transmitting					Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1897.2897	31.02	3.42	-42.66	50.97	42.75	74.00	31.25	Pass	H	PK
2	3007.0005	33.20	4.92	-42.12	50.80	46.80	74.00	27.20	Pass	H	PK
3	5910.1940	35.66	5.11	-41.01	46.79	46.55	74.00	27.45	Pass	H	PK
4	7206.2804	36.31	5.81	-41.02	47.50	48.60	74.00	25.40	Pass	H	PK
5	9607.4405	37.64	6.63	-40.76	49.78	53.29	74.00	20.71	Pass	H	PK
6	11746.5831	39.10	7.47	-41.30	47.20	52.47	74.00	21.53	Pass	H	PK
7	9608.0202	37.64	6.63	-40.76	44.27	47.78	54.00	6.22	Pass	H	AV
8	2069.7070	31.80	3.57	-42.58	53.40	46.19	74.00	27.81	Pass	V	PK
9	3359.0239	33.34	4.53	-41.90	50.71	46.68	74.00	27.32	Pass	V	PK
10	4795.1197	34.50	4.55	-40.67	46.68	45.06	74.00	28.94	Pass	V	PK
11	5379.1586	34.88	4.83	-40.60	47.32	46.43	74.00	27.57	Pass	V	PK
12	7224.2816	36.32	5.80	-41.00	46.94	48.06	74.00	25.94	Pass	V	PK
13	9608.4406	37.64	6.63	-40.76	51.88	55.39	74.00	18.61	Pass	V	PK
14	9608.0489	37.64	6.63	-40.76	43.96	47.47	54.00	6.53	Pass	V	AV

Mode:		GFSK Transmitting					Channel:		2440		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1598.2598	29.05	3.07	-42.90	53.51	42.73	74.00	31.27	Pass	H	PK
2	3017.0011	33.21	4.90	-42.12	51.18	47.17	74.00	26.83	Pass	H	PK
3	5691.1794	35.31	5.01	-40.81	46.98	46.49	74.00	27.51	Pass	H	PK
4	6271.2181	35.85	5.40	-41.14	46.50	46.61	74.00	27.39	Pass	H	PK
5	7635.3090	36.55	6.14	-40.84	47.20	49.05	74.00	24.95	Pass	H	PK
6	9760.4507	37.70	6.73	-40.62	49.07	52.88	74.00	21.12	Pass	H	PK
7	9760.0210	37.70	6.73	-40.62	42.93	46.74	54.00	7.26	Pass	H	AV
8	2185.5186	31.96	3.65	-42.53	54.31	47.39	74.00	26.61	Pass	V	PK
9	2938.1938	33.10	4.40	-42.16	51.43	46.77	74.00	27.23	Pass	V	PK
10	4343.0895	34.28	4.49	-40.86	46.47	44.38	74.00	29.62	Pass	V	PK
11	5470.1647	34.97	5.02	-40.63	46.92	46.28	74.00	27.72	Pass	V	PK
12	7641.3094	36.54	6.14	-40.83	46.90	48.75	74.00	25.25	Pass	V	PK
13	9760.4507	37.70	6.73	-40.62	49.06	52.87	74.00	21.13	Pass	V	PK
14	9759.9763	37.70	6.73	-40.62	41.76	45.57	54.00	8.43	Pass	V	AV

Mode:		GFSK Transmitting					Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1959.2959	31.43	3.43	-42.63	51.08	43.31	74.00	30.69	Pass	H	PK
2	3066.0044	33.23	4.79	-42.08	50.03	45.97	74.00	28.03	Pass	H	PK
3	4245.0830	34.14	4.51	-40.84	47.84	45.65	74.00	28.35	Pass	H	PK
4	6072.2048	35.81	5.23	-41.10	46.84	46.78	74.00	27.22	Pass	H	PK
5	7636.3091	36.55	6.14	-40.84	46.76	48.61	74.00	25.39	Pass	H	PK
6	9544.4363	37.62	6.76	-40.82	46.68	50.24	74.00	23.76	Pass	H	PK
7	1595.4595	29.03	3.07	-42.89	55.43	44.64	74.00	29.36	Pass	V	PK
8	1977.6978	31.55	3.45	-42.62	56.25	48.63	74.00	25.37	Pass	V	PK
9	3199.0133	33.28	4.65	-42.00	50.58	46.51	74.00	27.49	Pass	V	PK
10	5534.1689	35.05	5.16	-40.67	46.77	46.31	74.00	27.69	Pass	V	PK
11	7644.3096	36.54	6.14	-40.83	47.42	49.27	74.00	24.73	Pass	V	PK
12	10128.4752	37.98	6.87	-40.60	46.83	51.08	74.00	22.92	Pass	V	PK

**Note:**

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor


2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

## PHOTOGRAPHS OF TEST SETUP

Test model No.: WCT3TM2311

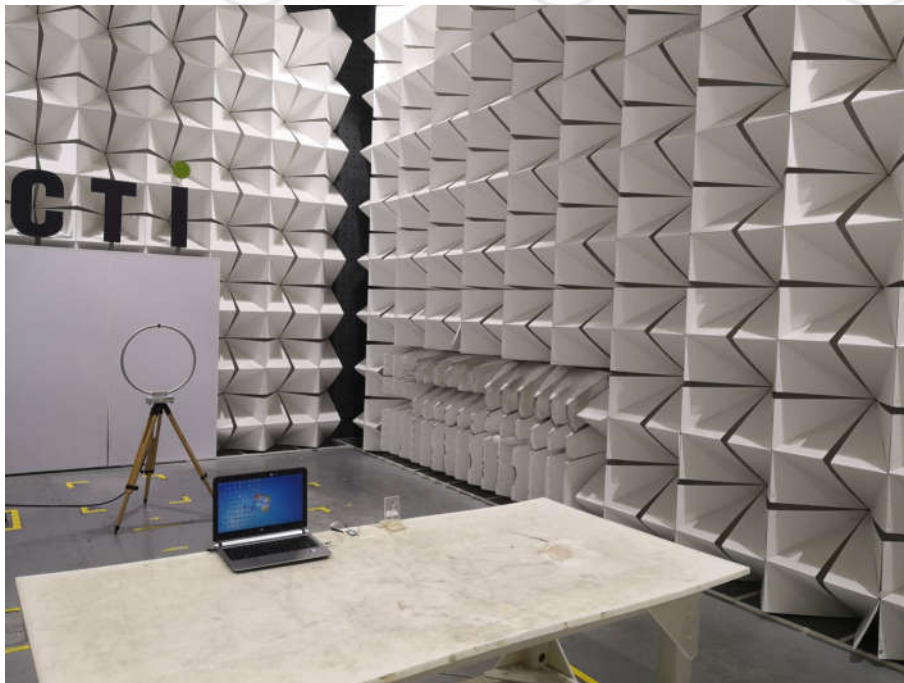


**Radiated spurious emission Test Setup-1(Below 30MHz)**

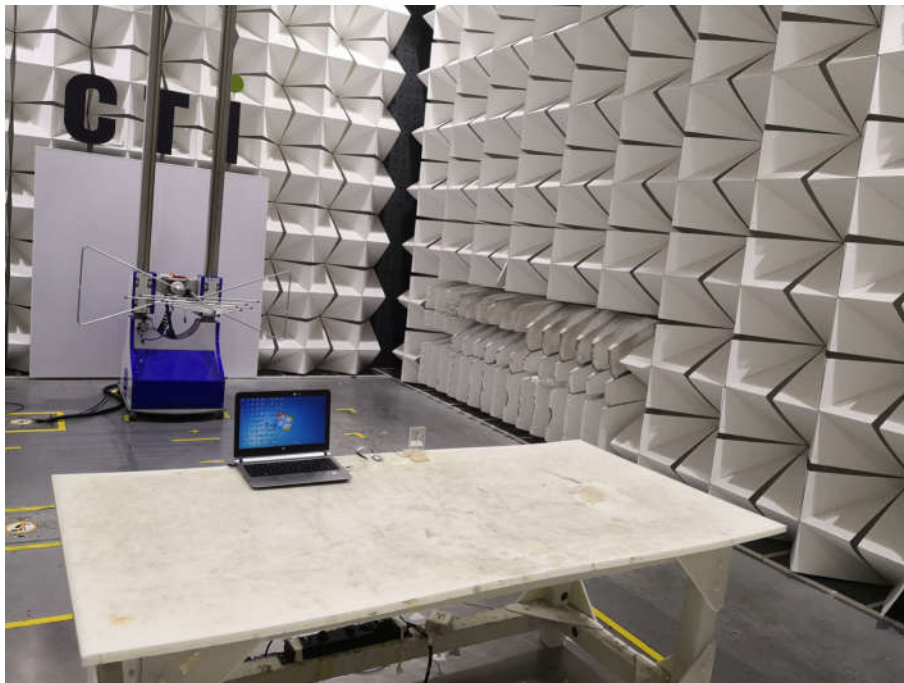

**Radiated spurious emission Test Setup-2 (Below 1GHz)**



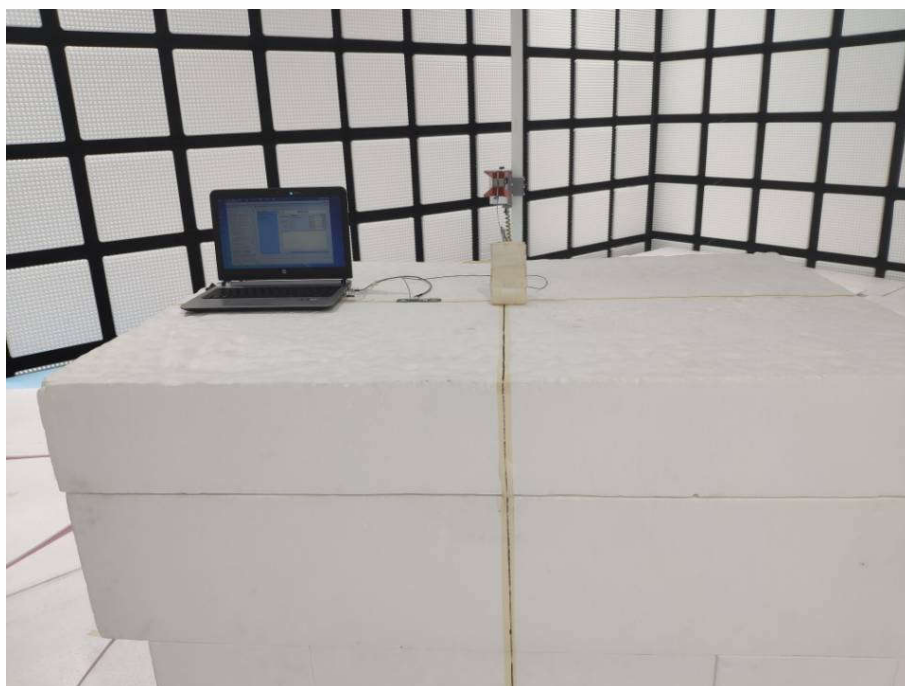

**Radiated spurious emission Test Setup-3 (Above 1GHz)**



**Conducted Emissions Test Setup**



## PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No. EED32L00127301 for EUT external and internal photos.

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.